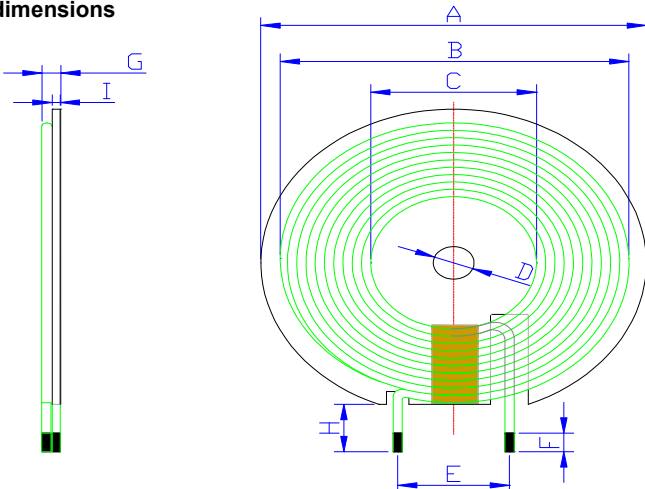
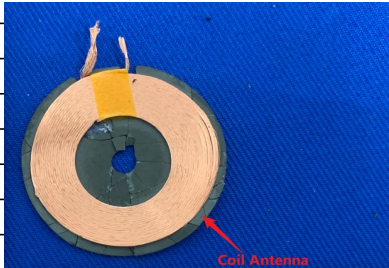


Product specification document

customer name	Shenzhen Jingzhuo Industrial Co., LTD		Customer material number			
Admidia elegant material number	TD-JZ20230811001-43.50pen double slotL=15MM		Specification number	20230811001	edition version	001
external dimensions 				(unit: mm)		
				A	43.5 ±0.5	
				B	40.0 ±0.5	
				C	20.5 ±0.5	
				D	5.7	
				E	18.0 ref	
				F	3 ±1	
				G	1.5 Max	
				H	15.0 ±2	
				I	0.60 ±0.1(Magnetic sheet thickness)	
				(1)Line diameter: 0.08 * 24P bare copper wire		
				(2)Number of winding coil: 10TS		
				(3)Whether the start and tail line crosses: Yes		
				(4)Coil 8MM high temperature tape		
				(5)Coils and magnets need to be pasted in the middle.		
				(6) The back side of the magnetic sheet is 43 round slotted back glue		
				Electrical character:		
Parameter	Specifications		Test condition	Test instrument		
L0	6.5 ±10%	μH	100KHz/1V	■TH1816B		
Q	>40	min	100KHz/1V	■TH1816B		
DCR	<50	mΩ	@ 25℃	■CH-502BC		
Temperature grade :						
Operating temperature	-40℃~ 125℃					
List of material:						
serial number	Classification	material specification	Supplier	Remarks		
num. one	Magnetic sheet	43.5*5.3*0.6T 0Pen double slots	PC95Galvanised			
num. two	Copper line	0.08*24Pbare copper wire	Bare copper wire			
num. three	High temperature t	high temperature glue	Environmental protection tape			
num. four	Stannum	107H	Thousand Island environmental protectiontin			
num.five	Glue	Yellow gum	Environmentally friendly glue			
num.six	Glue					
Weave		Check			Ratify	
Xiao Shu Fang		Peng Yong			Zhu Hui	

Manufacturer: Shenzhen Jingzhuo Industrial Co., LTD

Address: Room 502, Building B, Weihuada Industrial Park, No. 5, Lirong Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen