



# FCC RADIO TEST REPORT

## FCC ID: 2ACFWRL-R26

**Product :** Wireless alarm kit

**Trade Name :** RL

**Model Name :** RL-0507A

**Serial Model :** RL-0507, RL-0507C, SWHOM-ALARM2,  
SRHOM-ALARMA, SRHOM-ALARMB

**Report No. :** NTEK-2014NT0721113F

### **Prepared for**

GUANGDONG ROULE ELECTRONICS CO.,LTD.  
No.12,Pingdong 3rd Road,Nanping Industry Community,Zhuhai,  
Guangdong China

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China  
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599  
Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : GUANGDONG ROULE ELECTRONICS CO.,LTD.

Address ..... : No.12,Pingdong 3rd Road,Nanping Industry Community,Zhuhai, Guangdong China

**Manufacture's Name** ..... : GUANGDONG ROULE ELECTRONICS CO.,LTD.

Address ..... : No.12,Pingdong 3rd Road,Nanping Industry Community,Zhuhai, Guangdong China

### Product description

Product name ..... : Wireless alarm kit

Model and/or type reference : RL-0507A

Serial Model : RL-0507, RL-0507C, SWHOM-ALARM2, SRHOM-ALARMA, SRHOM-ALARMB

**Standards** ..... : FCC Part15.231 01 Oct. 2013

Test procedure ..... ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** .....


Date (s) of performance of tests ..... : 21 Jul. 2014 ~ 30 Jul. 2014

Date of Issue ..... : 30 Jul. 2014

Test Result ..... : **Pass**

Testing Engineer : 

Denny Huang

Technical Manager : 

(Brown Lu)

Authorized Signatory : 

(Bill Yao)

Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>1.1 TEST FACILITY</b>	<b>5</b>
<b>1.2 MEASUREMENT UNCERTAINTY</b>	<b>5</b>
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	<b>6</b>
<b>2.2 DESCRIPTION OF TEST MODES</b>	<b>7</b>
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>8</b>
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>9</b>
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>10</b>
<b>3 . ANTENNA REQUIREMENT</b>	<b>11</b>
<b>3.1 STANDARD REQUIREMENT</b>	<b>11</b>
<b>3.2 EUT ANTENNA</b>	<b>11</b>
<b>3.3 CONDUCTED EMISSION MEASUREMENT</b>	<b>12</b>
<b>3.3.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>12</b>
<b>3.3.2 TEST PROCEDURE</b>	<b>13</b>
<b>3.3.3 DEVIATION FROM TEST STANDARD</b>	<b>13</b>
<b>3.3.4 TEST SETUP</b>	<b>13</b>
<b>3.2.5 TEST RESULT</b>	<b>14</b>
<b>3.4 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>3.4.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>3.4.2 TEST PROCEDURE</b>	<b>16</b>
<b>3.4.3 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>3.4.4 TEST SETUP</b>	<b>17</b>
<b>3.4.5 TEST RESULTS (BELOW 30MHZ)</b>	<b>19</b>
<b>3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)</b>	<b>20</b>
<b>4 . BANDWIDTH TEST</b>	<b>23</b>
<b>4.1 TEST PROCEDURE</b>	<b>23</b>
<b>4.2 DEVIATION FROM STANDARD</b>	<b>23</b>
<b>4.3 TEST SETUP</b>	<b>23</b>
<b>4.4 TEST RESULTS</b>	<b>24</b>
<b>5 . TRANSMITTER TIMEOUT</b>	<b>25</b>
<b>5.1 REQUIREMENTS</b>	<b>25</b>
<b>6 . EUT TEST PHOTO</b>	<b>26</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

<b>FCC Part15, Subpart C (15.231)</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	Note(1)
15.203	Antenna Requirement	Pass	
15.231	Radiated Spurious Emission	Pass	
15.231	Occupied Bandwidth	Pass	
15.231	Transmitter Timeout	Pass	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report.

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless alarm kit										
Trade Name	RL										
Model Name	RL-0507A										
Serial Model	RL-0507, RL-0507C, SWHOM-ALARM2, SRHOM-ALARMA, SRHOM-ALARMB										
Model Difference	All the models are the same circuit and RF module, except the model names.										
Product Description	<p>The EUT is a Wireless alarm kit</p> <table border="1"><tr><td>Operation Frequency:</td><td>433.92MHz</td></tr><tr><td>Modulation Type:</td><td>ASK</td></tr><tr><td>Number Of Channel</td><td>1CH.</td></tr><tr><td>Antenna Designation:</td><td>PCB antenna</td></tr><tr><td>Output Power:</td><td>87.33dBuV/m</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	433.92MHz	Modulation Type:	ASK	Number Of Channel	1CH.	Antenna Designation:	PCB antenna	Output Power:	87.33dBuV/m
Operation Frequency:	433.92MHz										
Modulation Type:	ASK										
Number Of Channel	1CH.										
Antenna Designation:	PCB antenna										
Output Power:	87.33dBuV/m										
Channel List	Refer to below										
Adapter	N/A										
Battery	DC 12V*1 cell "AA" alkaline battery										

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
01	433.92
--	---

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX

<b>For Conducted Emission</b>	
Final Test Mode	Description
Mode 1	TX


<b>For Radiated Emission</b>	
Final Test Mode	Description
Mode 1	TX

Note:

- (1) The EUT use new battery.

**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Wireless alarm kit	RL	RL-0507A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.07	2015.06.06	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.07.06	2015.07.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.07.06	2015.07.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year

### **3. ANTENNA REQUIREMENT**

#### **3.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **3.2 EUT ANTENNA**

The EUT antenna is PCB Antenna. It comply with the standard requirement.

### 3.3 CONDUCTED EMISSION MEASUREMENT

#### 3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

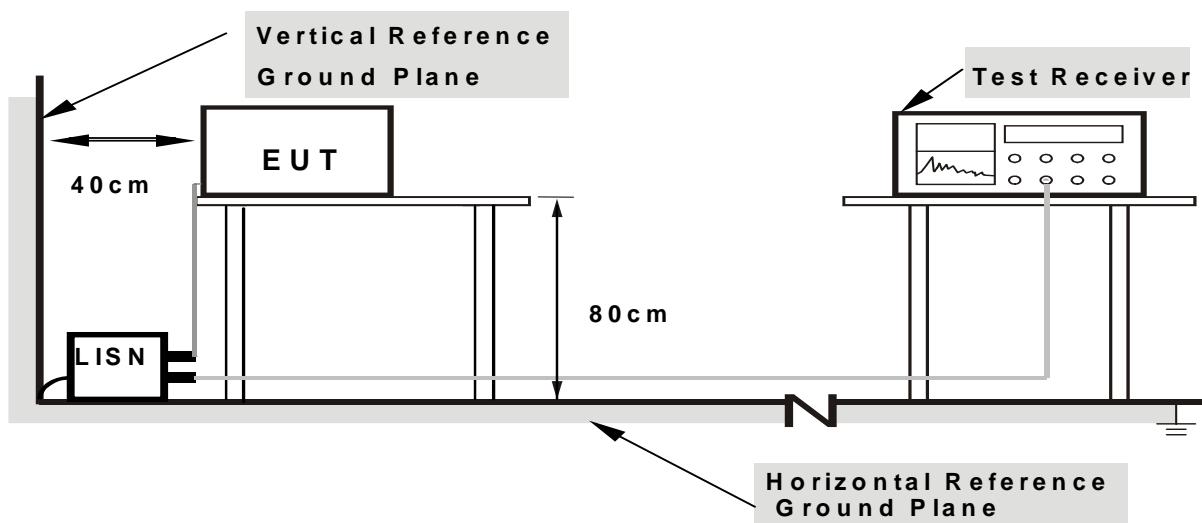

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

**3.2.5 TEST RESULT**

EUT :	wireless alarm kit	Model Name. :	RL-0507A
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N/A
Test Voltage :	N/A	Test Mode :	N/A

### 3.4 RADIATED EMISSION MEASUREMENT

#### 3.4.1 Radiated Emission Limits ( FCC 15.209 )

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RADIATED EMISSION MEASUREMENT ( FCC 15.231 )

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	2250.00	225.00
70 - 130	1250.00	125.00
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3750.00	375.00
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12500.00	1250.00

Notes:

- (1) \*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $uV/m$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $uV/m$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.4.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

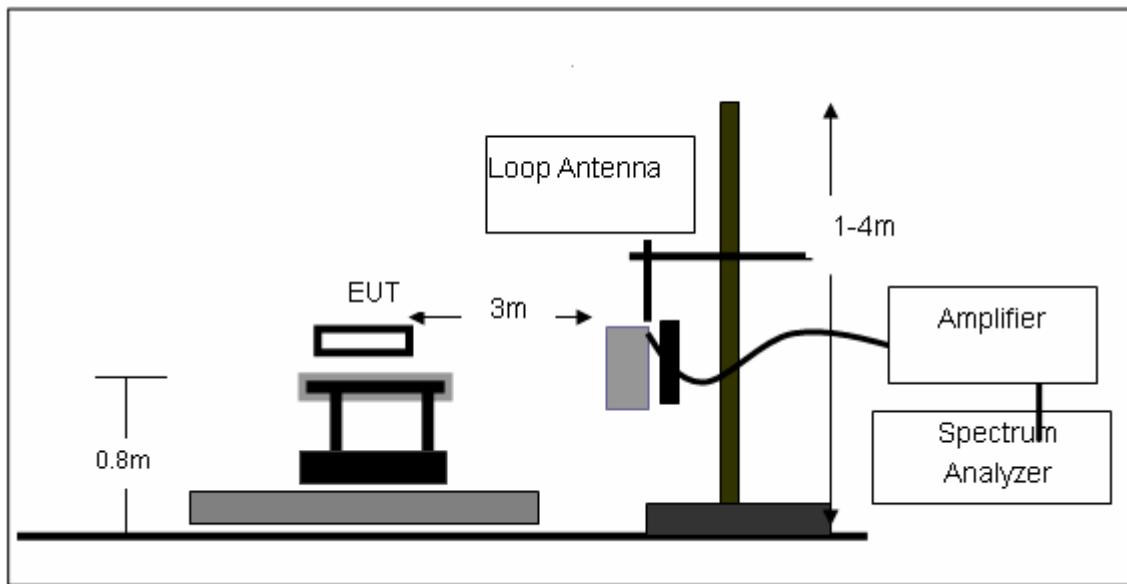

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

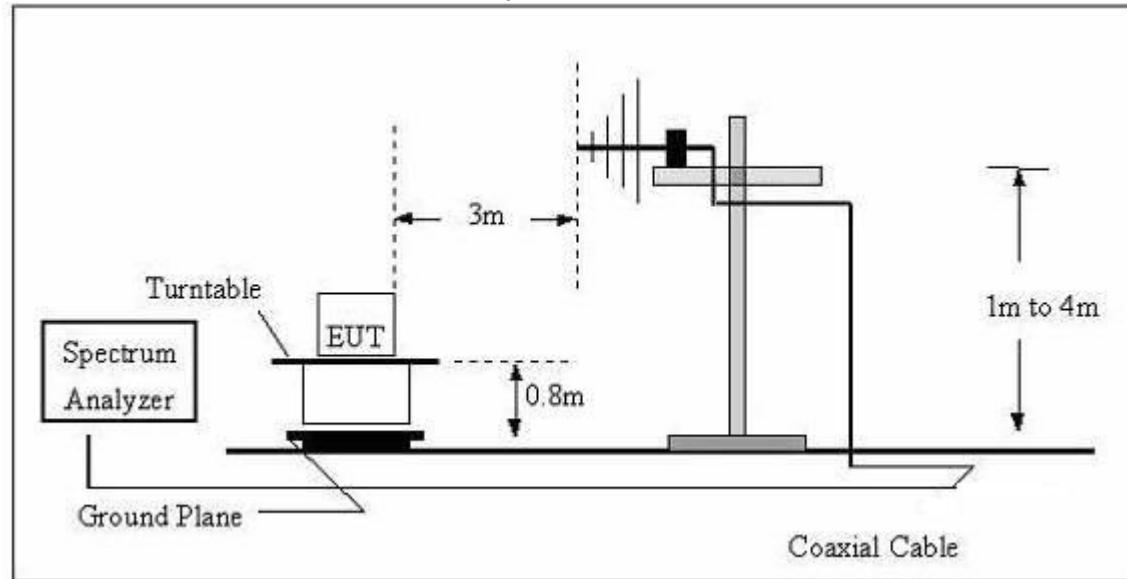

## (C) Radiated Emission Test-Up Frequency Above 1GHz

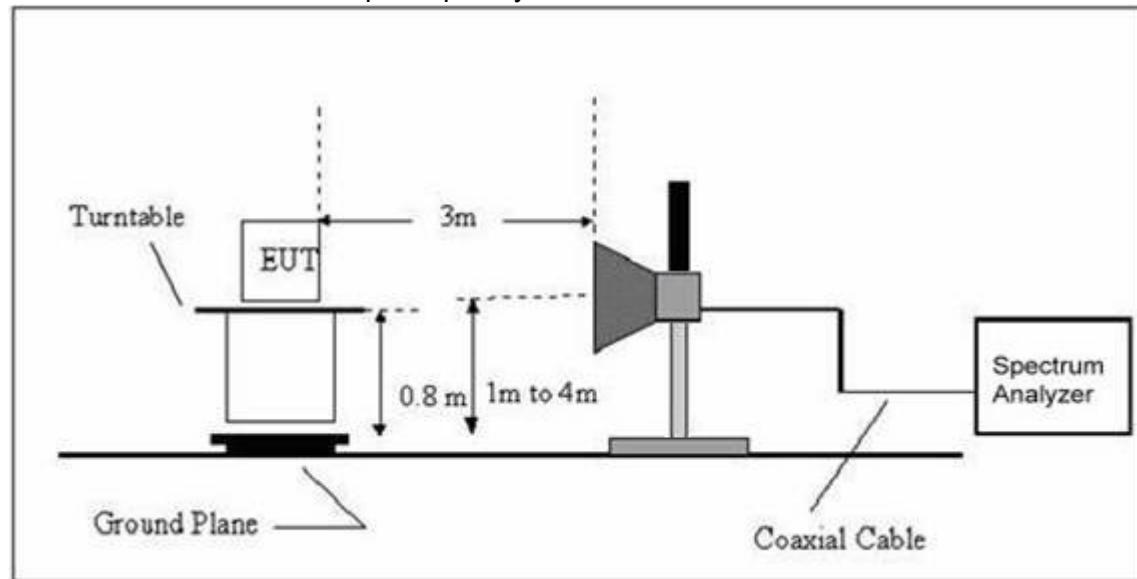

**3.4.5 TEST RESULTS (BELOW 30MHz)**

EUT :	Wireless alarm kit	Model Name. :	RL-0507A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

### 3.4.6 TEST RESULTS (BETWEEN 30 – 5000 MHZ)

EUT :	Wireless alarm kit	Model Name :	RL-0507A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	TX	Polarization :	Horizontal

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
		MHz	dB	dBuV/m (PK)	dBuV/m (AV)	
433.92	-8.40	87.33	78.93	100.83	80.83	pass
867.84	-8.40	76.57	68.17	80.83	60.83	pass
1302.54	-8.40	55.14	46.74	74.00	54.00	pass
1856.31	-8.40	52.71	44.31	74.00	54.00	pass
2405.68	-8.40	46.33	37.93	74.00	54.00	pass

EUT :	Wireless alarm kit	Model Name :	RL-0507A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12.0V
Test Mode :	TX	Polarization :	Vertical

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
		MHz	dB	dBuV/m (PK)	dBuV/m (AV)	
433.92	-8.40	85.47	77.07	100.83	80.83	pass
867.84	-8.40	72.69	64.29	80.83	60.83	pass
1324.96	-8.40	51.82	43.42	74.00	54.00	pass
1867.29	-8.40	53.48	45.08	74.00	54.00	pass
2347.21	-8.40	45.19	36.79	74.00	54.00	pass

**Note:** 1. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).

2. \*Calculate Average value based on Duty Cycle correction factor:

$$\text{Duty Cycle} = \text{Ton}/(\text{Ton}+\text{Toff}) = 23.585\text{ms}/62.62\text{ms} = 0.38 = 38\%$$

$$\text{Duty Cycle factor} = 20\lg(\text{Duty Cycle}) = 20\lg(0.38) = -8.40\text{dB}$$

$$\text{Average} = \text{Peak} + \text{Duty Cycle factor}$$

$$2. \text{ FCC Limit for Average Measurement} = 41.6667(433.92) - 7083.3333 = 10996.681164\text{uV/m} \\ = 80.83\text{dBuV/m}$$

3. Pulse Desensitization Correction Factor

$$\text{Pulse Width(PW)} = 23.585\text{ms} \quad 2/\text{PW} = 2/23.585\text{ms} = 0.0848\text{kHz}$$

$$\text{RBW}(100\text{kHz}) > 2/\text{PW} (0.0848\text{kHz});$$

Therefore PDCF is not needed.

### 3.4.7 DUTY CYCLE



The duty cycle is simply the on time divided by the period:


The duration of one cycle = 62.62ms

Effective period of the cycle =  $1.511\text{ms} \times 10 + 0.565\text{ms} \times 15 = 23.585\text{ms}$

Duty Cycle =  $23.585\text{ms} / 62.62\text{ms} = 0.38$

#### The duration of one cycle

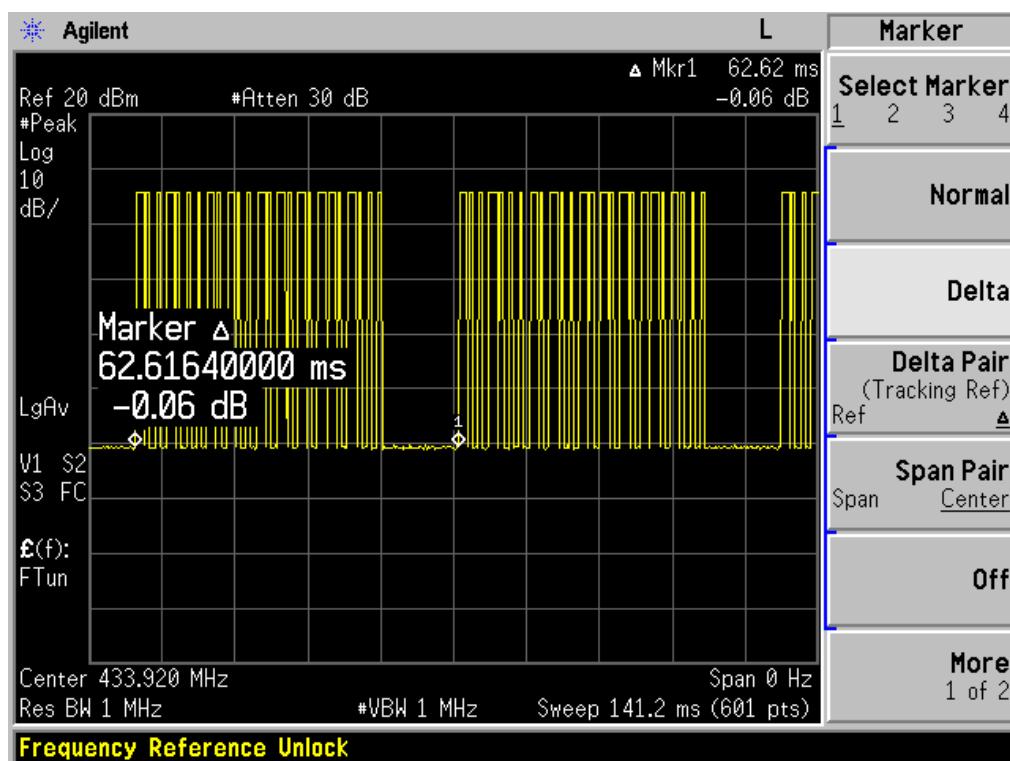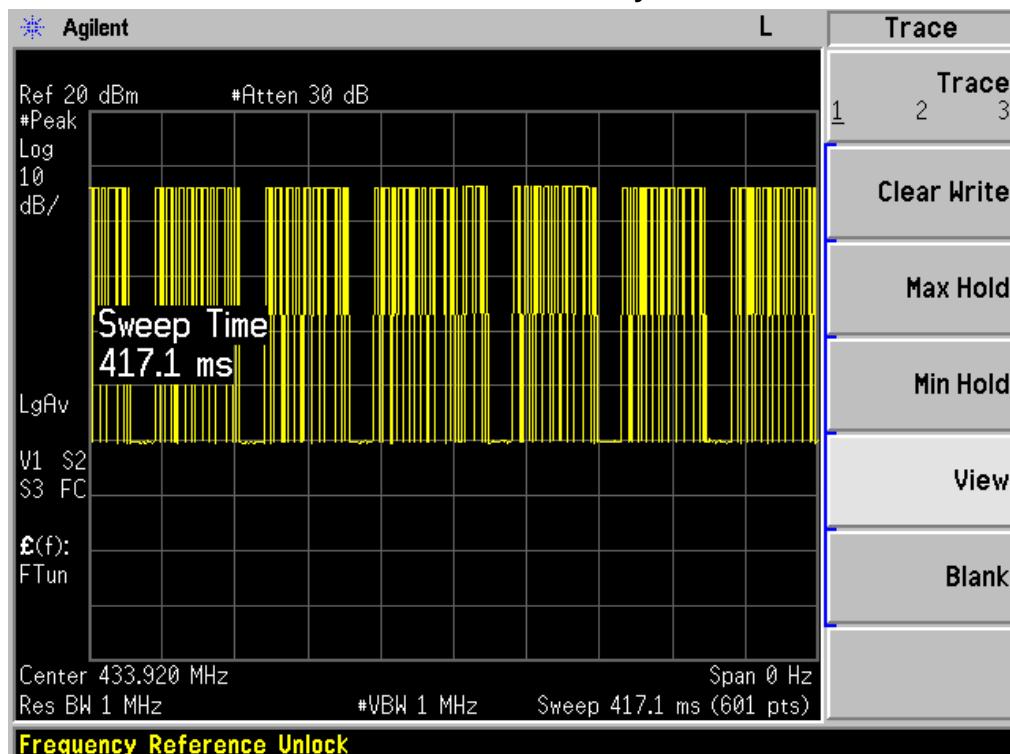

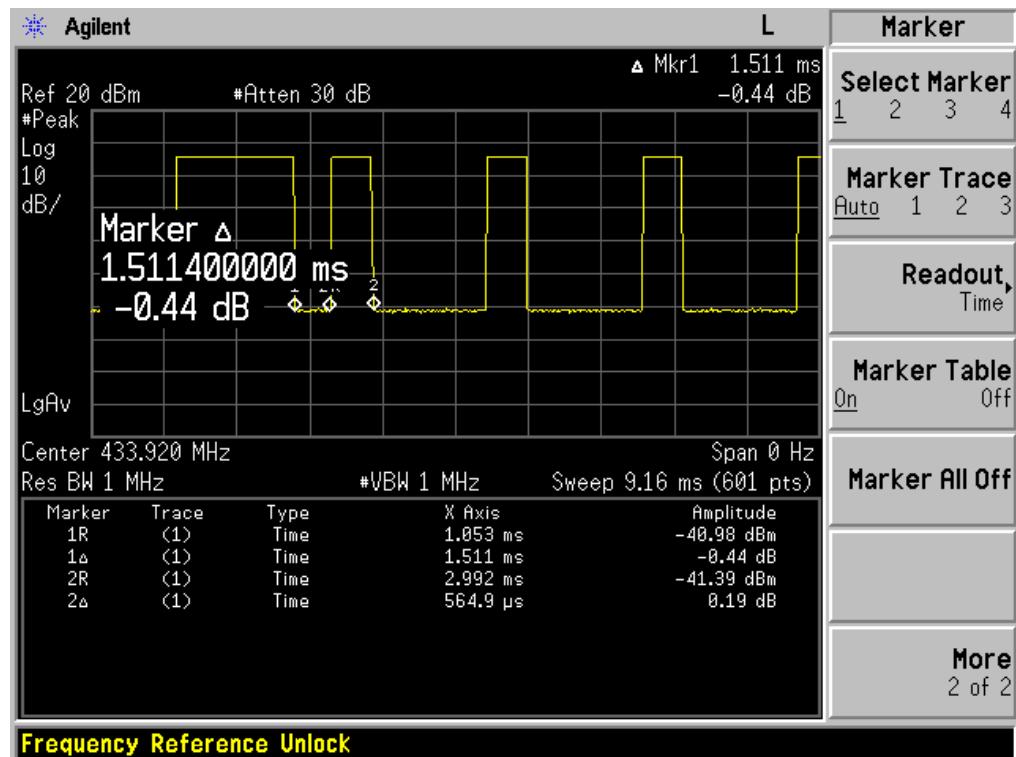

## 4. BANDWIDTH TEST

### 4.1 TEST PROCEDURE

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Limit:  $433.92\text{MHz} \times 0.25\% = 1084.8\text{KHz}$

### 4.2 DEVIATION FROM STANDARD

No deviation.


### 4.3 TEST SETUP



#### 4.4 TEST RESULTS

EUT :	Wireless alarm kit	Model Name :	RL-0507A
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 12.0V
Test Mode :	TX CH 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (kHz)	Limit (kHz)
CH01	433.92	52.319	1084.8

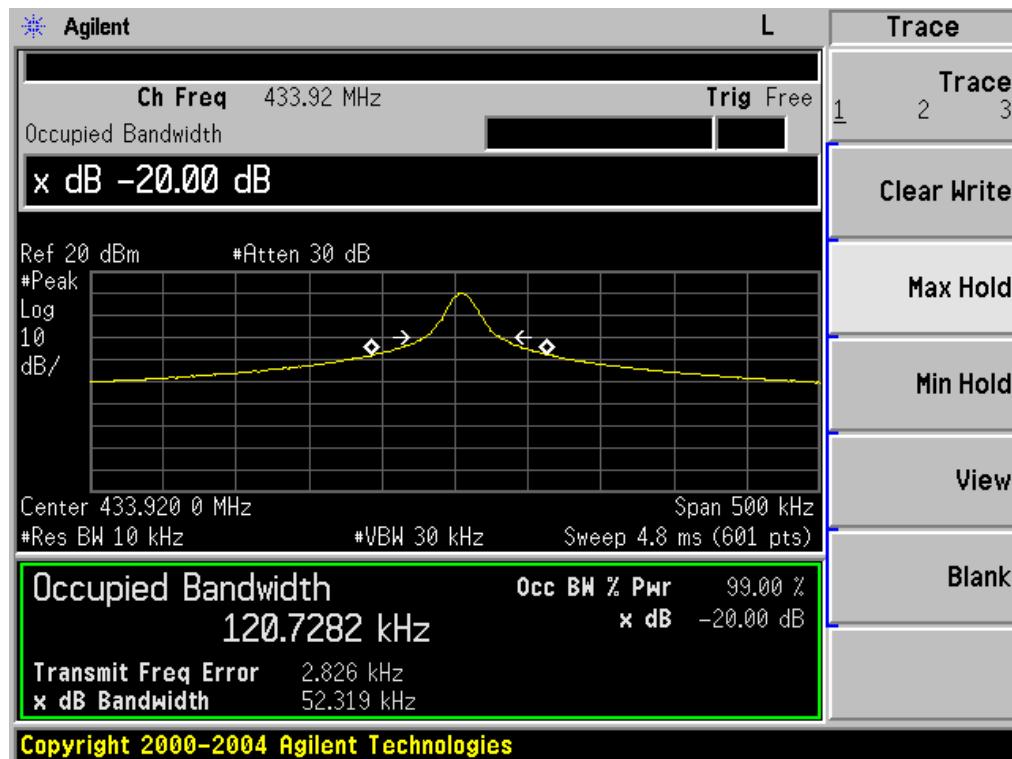

## 5. TRANSMITTER TIMEOUT

### 5.1 REQUIREMENTS

1 A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

**Result:** The EUT has a manually activated transmitter, please refer to below detail data

2 A transmitter activated automatically shall cease transmission within 5 seconds after activation.


**Result:** The EUT does not have a automatically activated transmitter

3 Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour

**Result:** The EUT does not employ periodic transmission.

4 Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

**Result:** The section is not applicable to EUT.

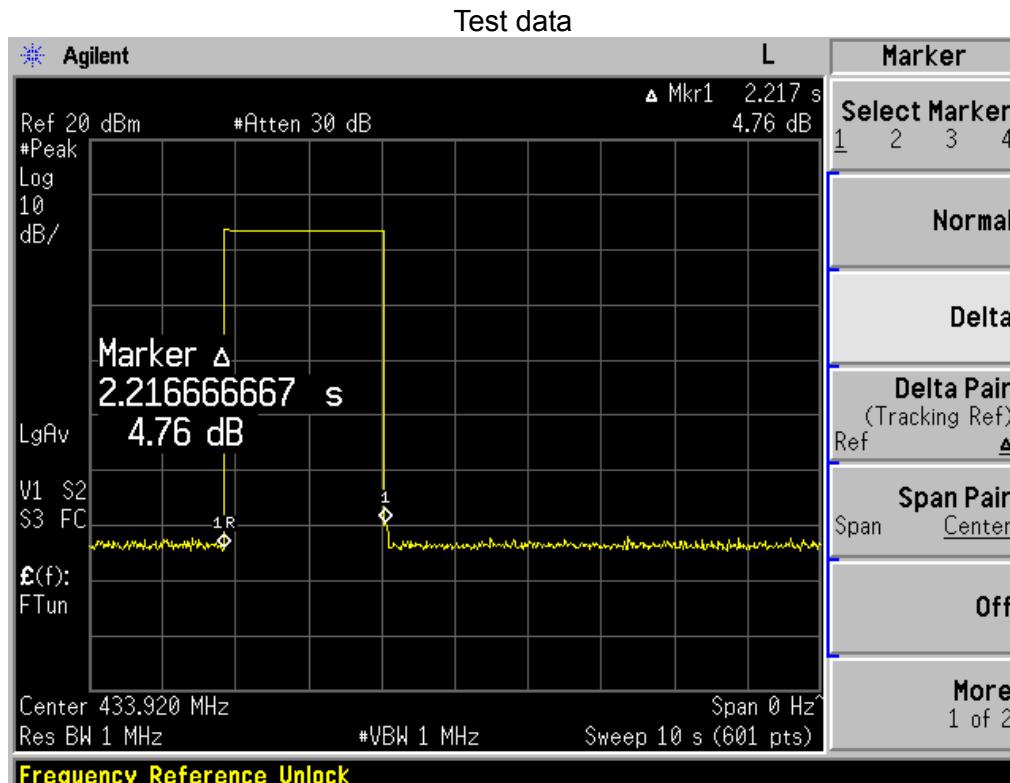

THE DURATION OF EACH TRANSMISSION	LIMIT	RESULT
2.217s	<5s	PASS

**6. EUT TEST PHOTO****Radiated Measurement Photos**