

MEASUREMENT REPORT

FCC PART 15.247 Bluetooth

FCC ID: 2ACGOJ7

APPLICANT: Shenzhen JiLang Technology Limited

Application Type: Certification

Product: Bluetooth Speaker

Model No.: J7

FCC Classification: FCC Part 15 Spread Spectrum Transmitter(DSS)

FCC Rule Part(s): Part 15.247

Test Procedure(s): ANSI C63.10-2013, DA 00-705

Test Date: March 29 ~ April 11, 2017

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and DA 00-705. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1703RSU03101	Rev. 01	Initial report	04-11-2017	Valid

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Feature of Equipment under Test	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this Report.....	9
2.4. Pseudorandom Frequency Hopping Sequence.....	10
2.5. Device Capabilities	10
2.6. Test Configuration	10
2.7. Test Software	10
2.8. EMI Suppression Device(s)/Modifications.....	11
2.9. Labeling Requirements.....	11
3. DESCRIPTION OF TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions.....	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE	15
6. MEASUREMENT UNCERTAINTY.....	16
7. TEST RESULT	17
7.1. Summary	17
7.2. 20dB Bandwidth Measurement.....	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used.....	18
7.2.3. Test Setting.....	18
7.2.4. Test Setup.....	19
7.2.5. Test Result.....	20
7.3. Output Power Measurement.....	22
7.3.1. Test Limit	22
7.3.2. Test Procedure Used	22
7.3.3. Test Setting.....	22
7.3.4. Test Setup.....	22
7.3.5. Test Result.....	23

7.4.	Carrier Frequency Separation Measurement	25
7.4.1.	Test Limit	25
7.4.2.	Test Procedure Used	25
7.4.3.	Test Setting	25
7.4.4.	Test Setup.....	25
7.4.5.	Test Result.....	26
7.5.	Number of Hopping Channels Measurement	28
7.5.1.	Test Limit	28
7.5.2.	Test Procedure Used	28
7.5.3.	Test Settiting	28
7.5.4.	Test Setup.....	28
7.5.5.	Test Result.....	29
7.6.	Time of Occupancy Measurement	31
7.6.1.	Test Limit	31
7.6.2.	Test Procedure Used	31
7.6.3.	Test Settiting	31
7.6.4.	Test Setup.....	32
7.6.5.	Test Result.....	33
7.7.	Band-edge Compliance Measurement.....	35
7.7.1.	Test Limit	35
7.7.2.	Test Procedure Used	35
7.7.3.	Test Setting	35
7.7.4.	Test Setup.....	36
7.7.5.	Test Result.....	37
7.8.	Conducted Spurious Emissions Measurement.....	39
7.8.1.	Test Limit	39
7.8.2.	Test Procedure Used	39
7.8.3.	Test Setting	39
7.8.4.	Test Setup.....	40
7.8.5.	Test Result.....	41
7.9.	Radiated Spurious Emission Measurement	47
7.9.1.	Test Limit	47
7.9.2.	Test Procedure Used	47
7.9.3.	Test Setting	47
7.9.4.	Test Setup.....	49
7.9.5.	Test Result.....	51
7.10.	Radiated Restricted Band Edge Measurement	59
7.10.1.	Test Result.....	59
7.11.	AC Conducted Emissions Measurement.....	75
7.11.1.	Test Limit	75

7.11.2. Test Setup.....	75
7.11.3. Test Result.....	76
8. CONCLUSION.....	78

§2.1033 General Information

Applicant:	Shenzhen JiLang Technology Limited
Applicant Address:	3rd Floor, C Builing, NO1, East Area, Shangxue Industrial Park, Bantian Town, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen JiLang Technology Limited
Manufacturer Address:	3rd Floor, C Builing, NO1, East Area, Shangxue Industrial Park, Bantian Town, Longgang District, Shenzhen, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.247
Model No.	J7
FCC ID:	2ACGOJ7
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	FCC Part 15 Spread Spectrum Transmitter (DSS)
Method/System:	Frequency Hopping Spread Spectrum (FHSS)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Bluetooth Speaker
Model No.:	J7
FCC ID:	2ACGOJ7
Bluetooth Module:	V2.1+EDR

2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2402~2480MHz
Bluetooth Version	V2.1+EDR
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK)
Antenna Type	PCB Antenna
Antenna Gain	1dBi

The equipment under test (EUT) is the **Bluetooth Speaker FCC ID: 2ACGOJ7**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

2.3. Working Frequencies for this Report


Channel List for Bluetooth V2.1+EDR

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2419 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz
75	2477 MHz	76	2478 MHz	77	2479 MHz
78	2480 MHz	--	--	--	--

2.4. Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

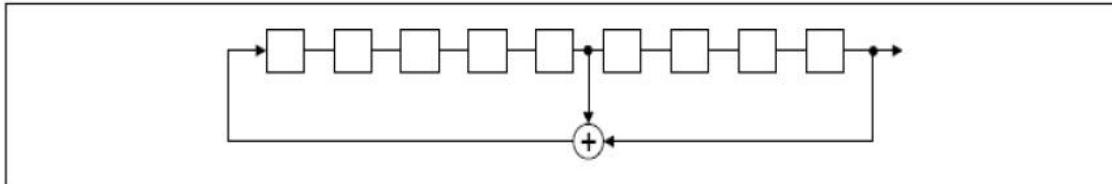

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

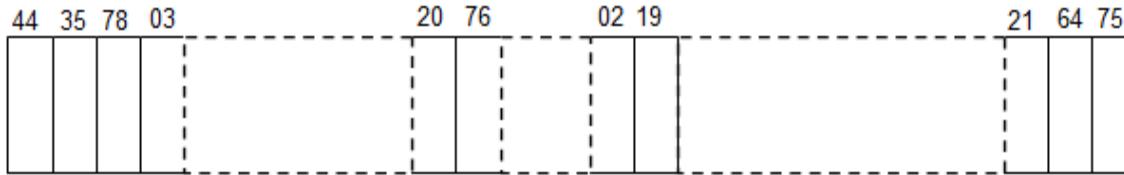

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

2.5. Device Capabilities

Bluetooth V2.1+EDR

2.6. Test Configuration

The **Bluetooth Speaker FCC ID: 2ACGOJ7** was tested per the guidance of ANSI C63.10-2013 and DA 00-705. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. Test Software

The test utility software used during testing was engineering directive ordered by applicant.

2.8. Description of Support Units

The EUT has been tested with associated equipment below:

Description	Manufacturer	Model No.
Adapter	Supply by MRT	HSU50600F

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" (DA 00-705) were used in the measurement of the **Bluetooth Speaker FCC ID: 2ACGOJ7**.

Deviation from measurement procedure.....**None**

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.11.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Bluetooth Speaker** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Bluetooth Speaker** FCC ID: 2ACGOJ7 unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	102030	1 year	2017/05/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101684	1 year	2017/06/21
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2017/12/22
Shielding Anechoic Chamber	MIX-BEP	Chamber-SR2	N/A	1 year	2017/05/10

Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9010A	MY56070124	1 year	2017/06/23
EMI Test Receiver	R&S	ESR7	101209	1 year	2017/11/03
Microwave System Amplifier	Agilent	83017A	MY53270040	1 year	2018/03/29
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	302	1 year	2017/12/11
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2017/12/14
Bilog Period Antenna	Schwarzbeck	VULB9168	662	1 year	2017/12/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2017/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2018/01/03
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2017/12/22
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/08
USB Wideband Power Sensor	Boonton	55006	8911	1 year	2017/05/08
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2017/12/22

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement – AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: Shenzhen JiLang Technology Limited
FCC ID: 2ACGOJ7
Method/System: Frequency Hopping Spread Spectrum (FHSS)
Number of Channels: 79

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)	20dB Bandwidth	N/A	Conducted	PASS	Section 7.2
15.247(b)(1)	Peak Transmitter Output Power	<1 Watt if > 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.4
15.247(a)(1)(iii)	Number of Channels	> 15 Channels		PASS	Section 7.5
15.247(a)(1)(iii)	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	Band Edge / out- of-Band Emissions	Conducted \geq 20dBc		PASS	Section 7.7, Section 7.8
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS	Section 7.9, Section 7.10
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	PASS	Section 7.11

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 20dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2

7.2.3. Test Setting


1. Set RBW \geq 1% of the 20dB bandwidth
2. VBW \geq $3 \times$ RBW
3. Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

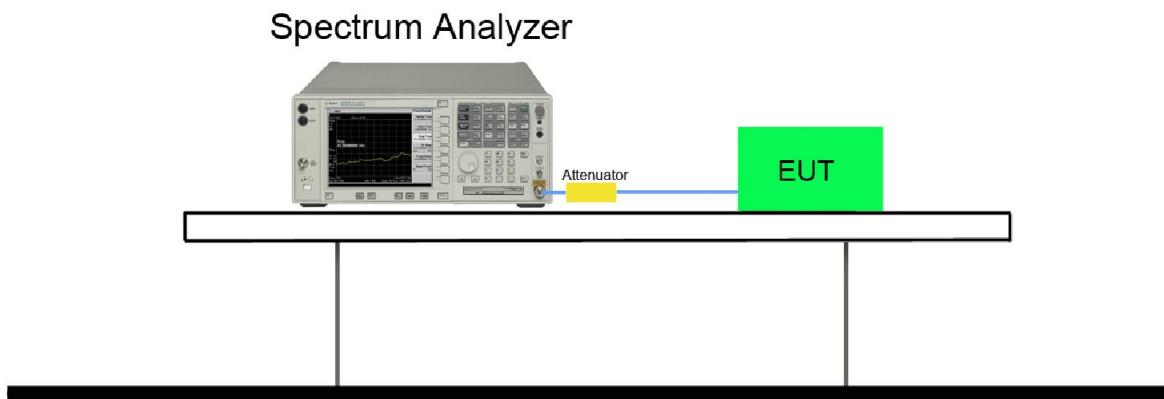

7.2.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	20dB Bandwidth (MHz)	Result
DH5	00	2402	0.88	Pass
DH5	39	2441	0.88	Pass
DH5	78	2480	0.88	Pass
2DH5	00	2402	1.23	Pass
2DH5	39	2441	1.25	Pass
2DH5	78	2480	1.22	Pass

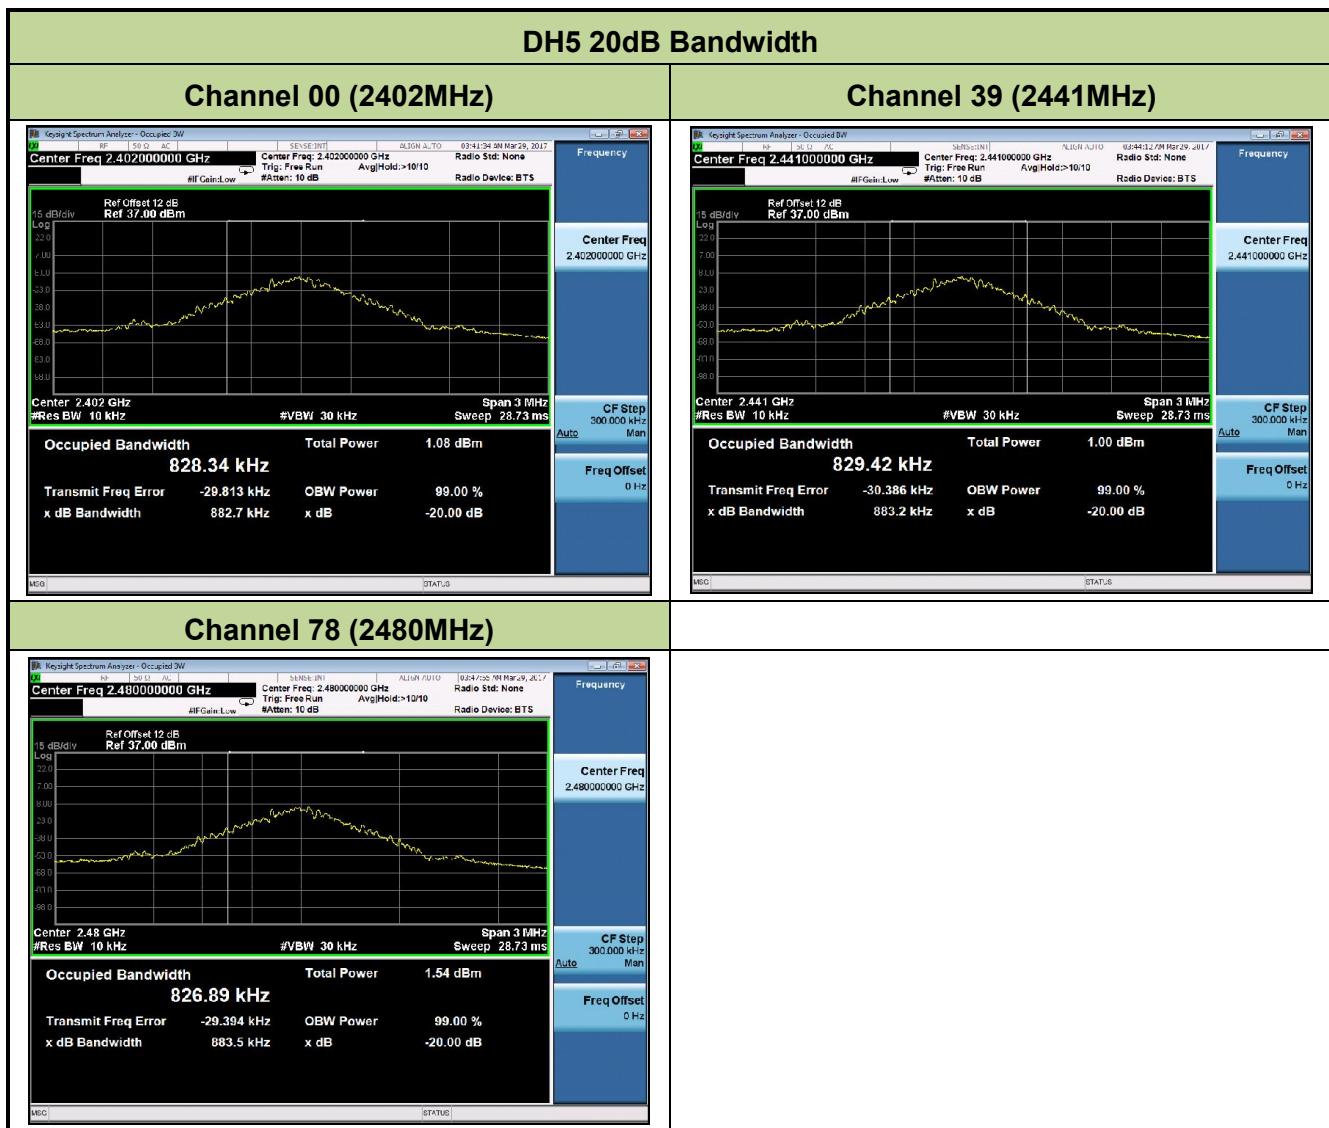



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power permissible output power is 1 Watt for all other frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.


7.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.5

7.3.3. Test Setting

1. Set RBW \geq the 20 dB bandwidth of the emission being measured.
2. VBW $\geq 3 \times$ RBW
3. Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss)


7.3.4. Test Setup

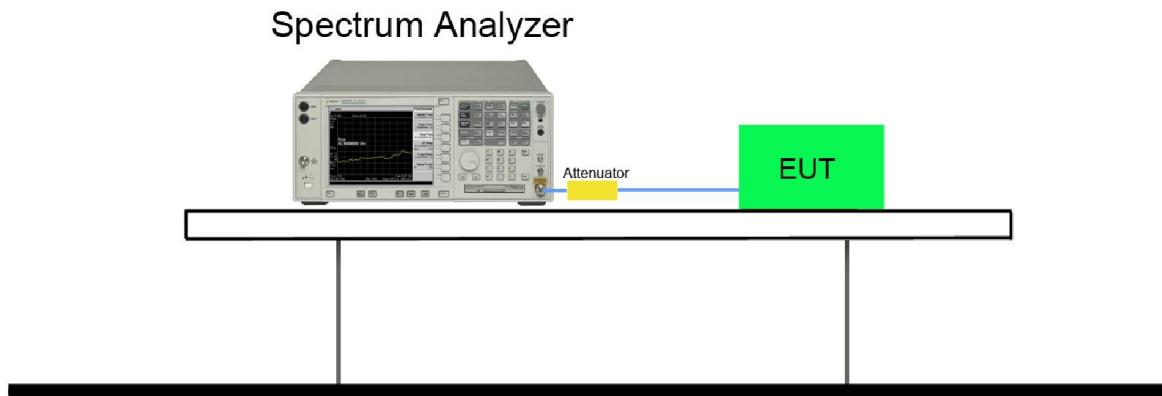

7.3.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Peak Power		
			(dBm)	(mW)	Limit (mW)
DH5	00	2402	-5.95	0.25	< 1000
DH5	39	2441	-5.58	0.28	< 1000
DH5	78	2480	-5.35	0.29	< 1000
2DH5	00	2402	-5.22	0.30	< 1000
2DH5	39	2441	-4.65	0.34	< 1000
2DH5	78	2480	-4.09	0.39	< 1000



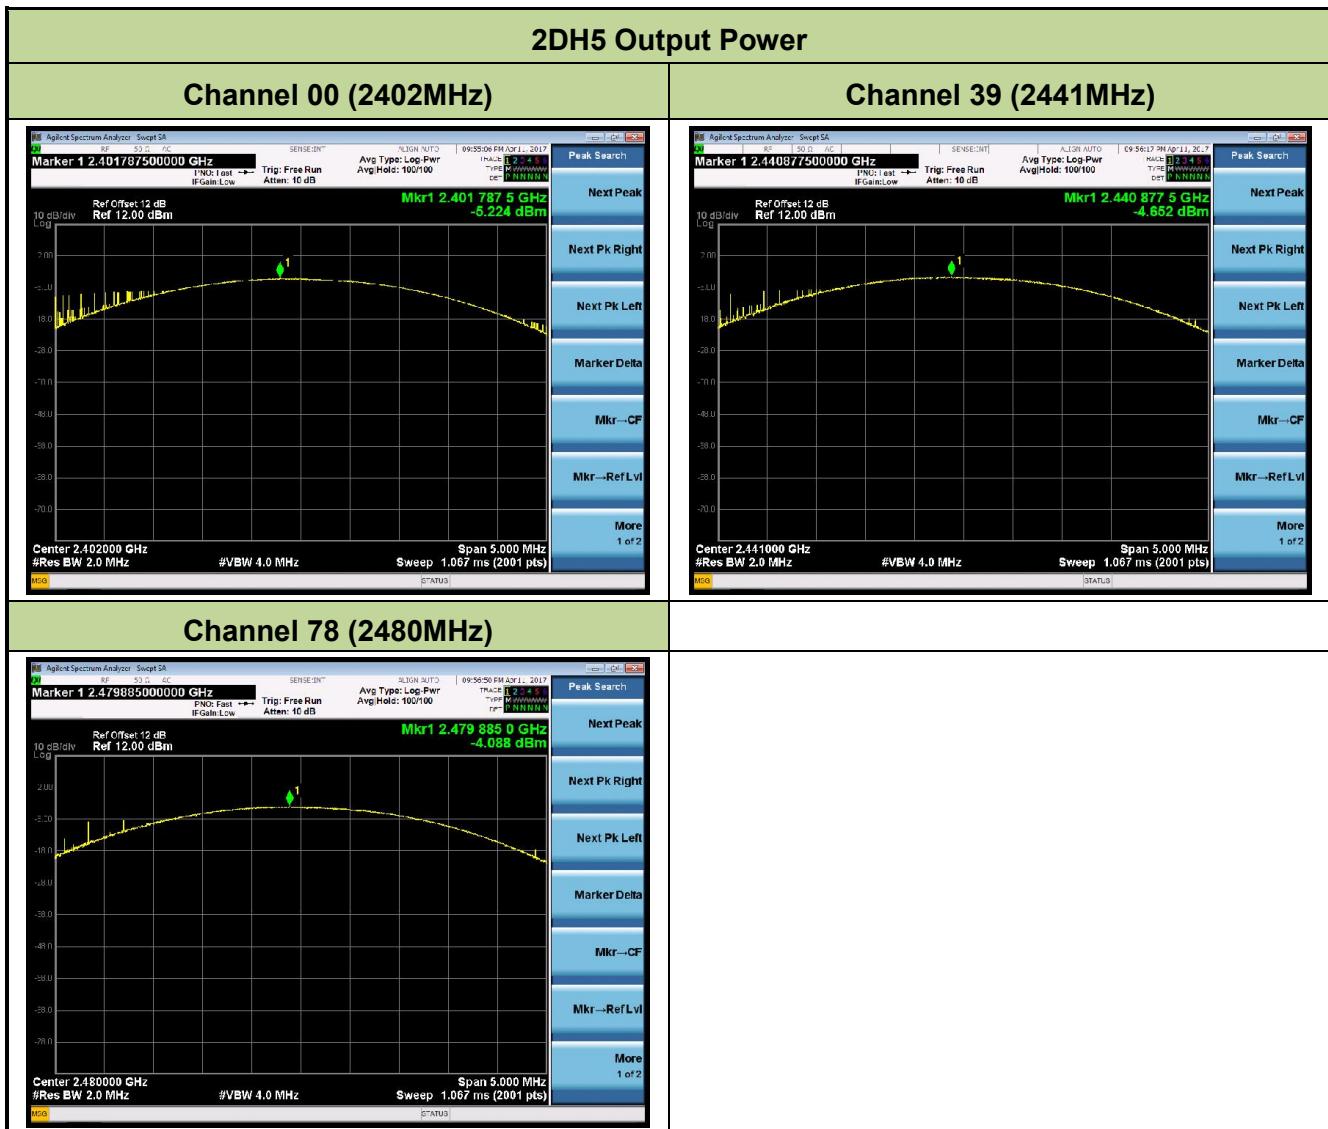

7.4. Carrier Frequency Separation Measurement

7.4.1. Test Limit

The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


7.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.2

7.4.3. Test Setting


1. Span = wide enough to capture the peaks of two adjacent channels.
2. RBW approximately 30% of the channel spacing
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


7.4.4. Test Setup

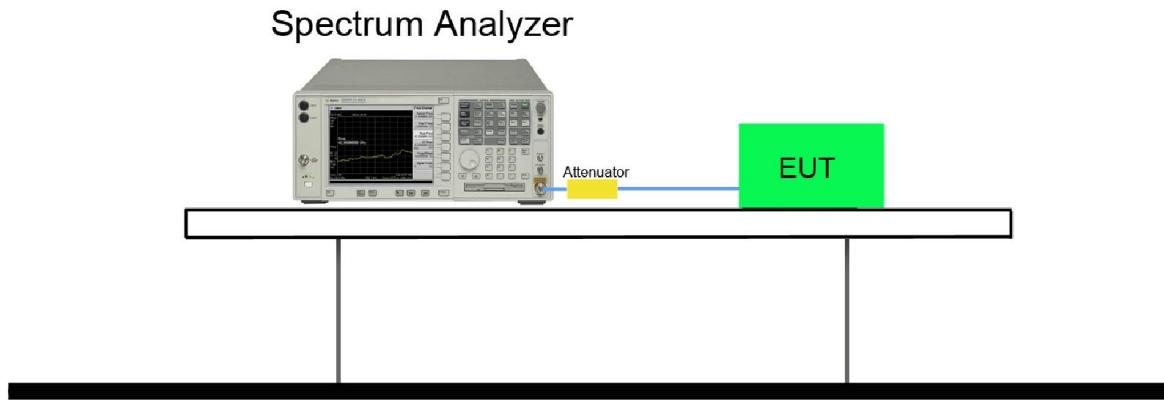

7.4.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit (KHz)	Result
DH5	00	2402	≥ 586.67	Pass
DH5	39	2441	≥ 586.67	Pass
DH5	78	2480	≥ 586.67	Pass
2DH5	00	2402	≥ 820.00	Pass
2DH5	39	2441	≥ 833.33	Pass
2DH5	78	2480	≥ 813.33	Pass

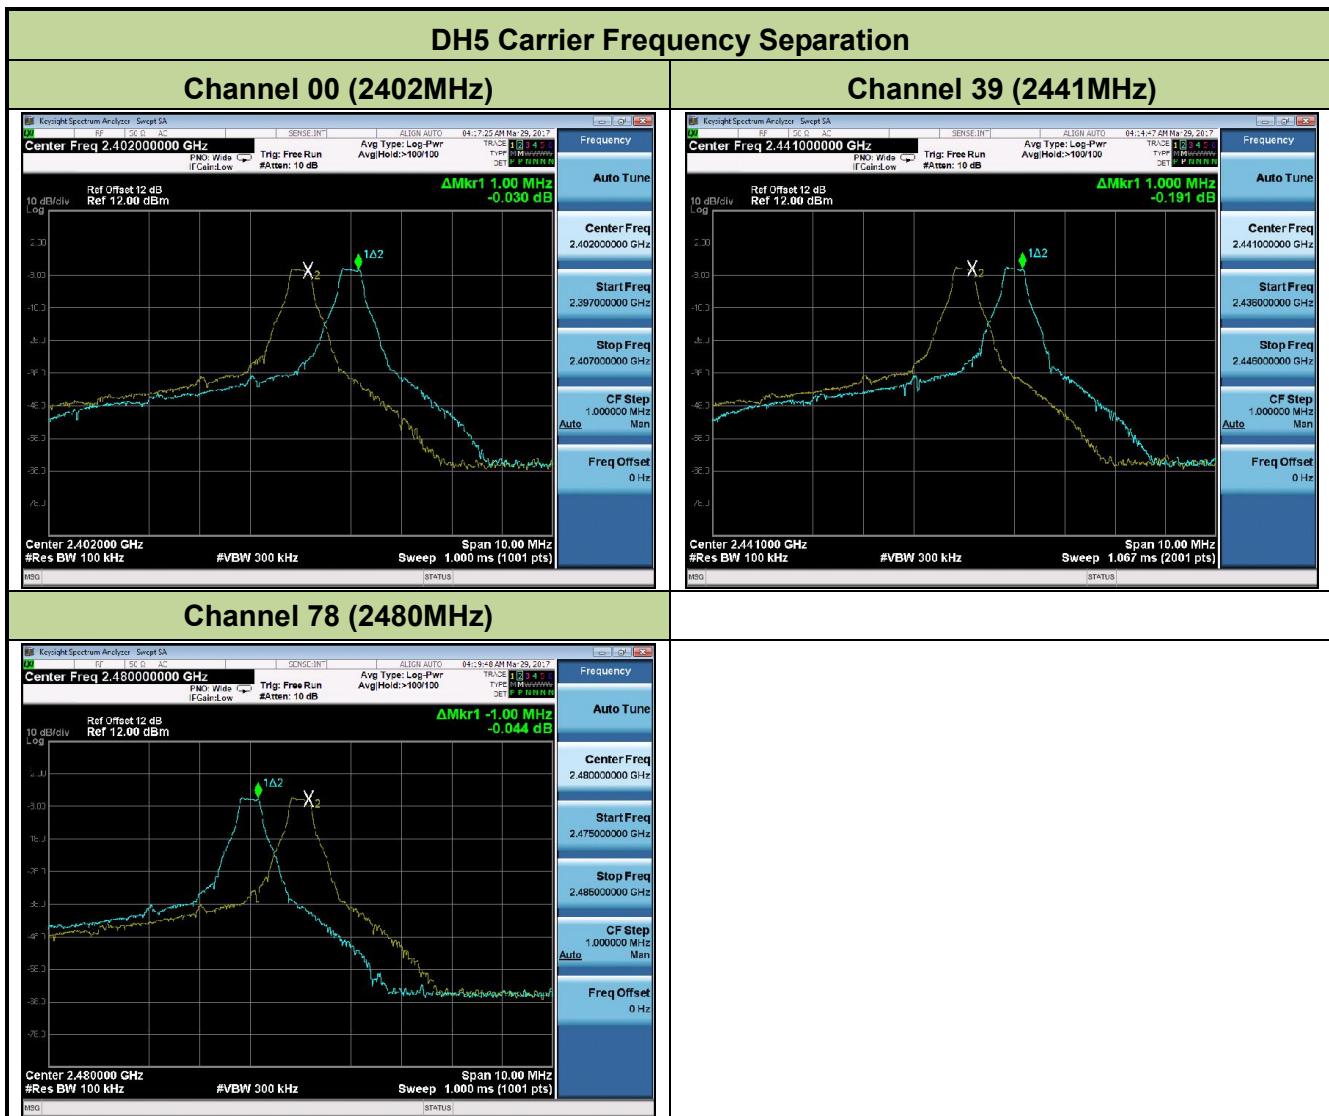

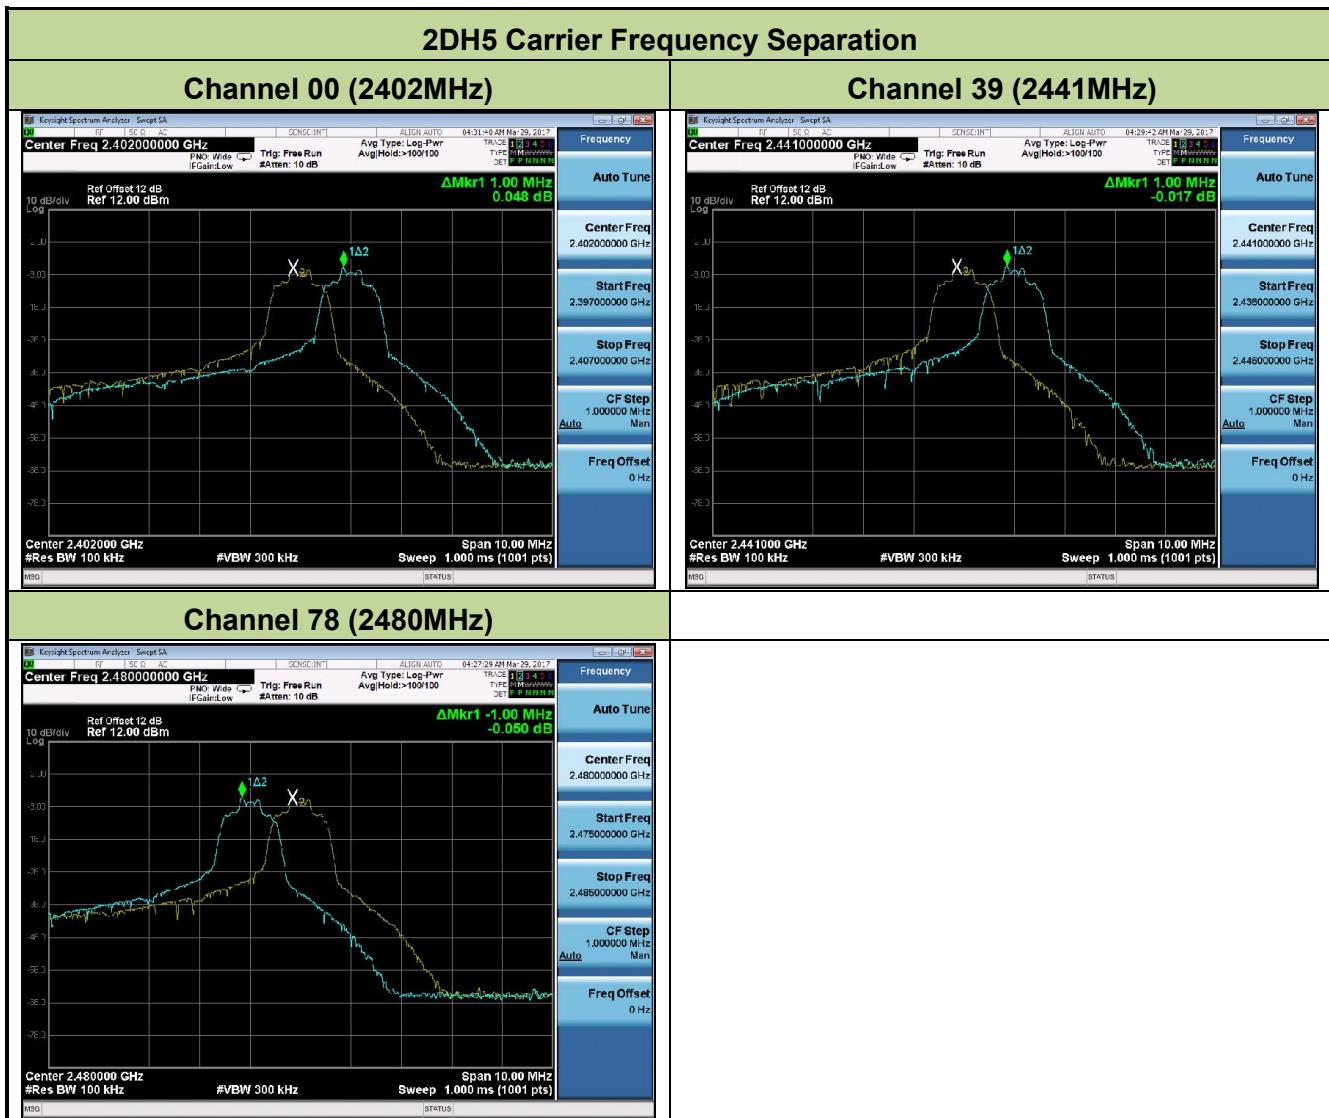

7.5. Number of Hopping Channels Measurement

7.5.1. Test Limit

This frequency hopping system must employ a minimum of 15 hopping channels.


7.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.3

7.5.3. Test Setting


1. Span = the frequency band of operation.
2. RBW \leq 30% of the channel spacing or the 20 dB bandwidth
3. VBW \geq RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

7.5.4. Test Setup

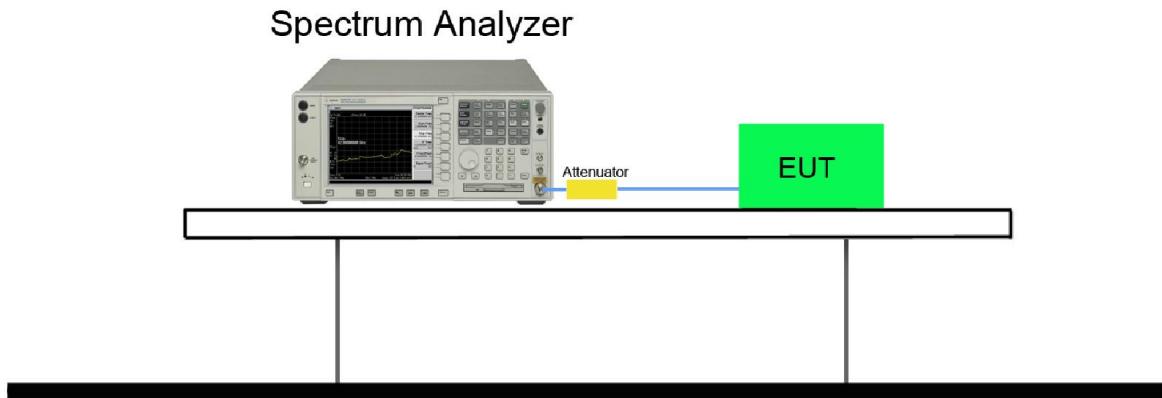

7.5.5. Test Result

Test Mode (Hopping)	Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
DH5	79	2402 ~ 2480	≥ 15	Pass
2DH5	79	2402 ~ 2480	≥ 15	Pass

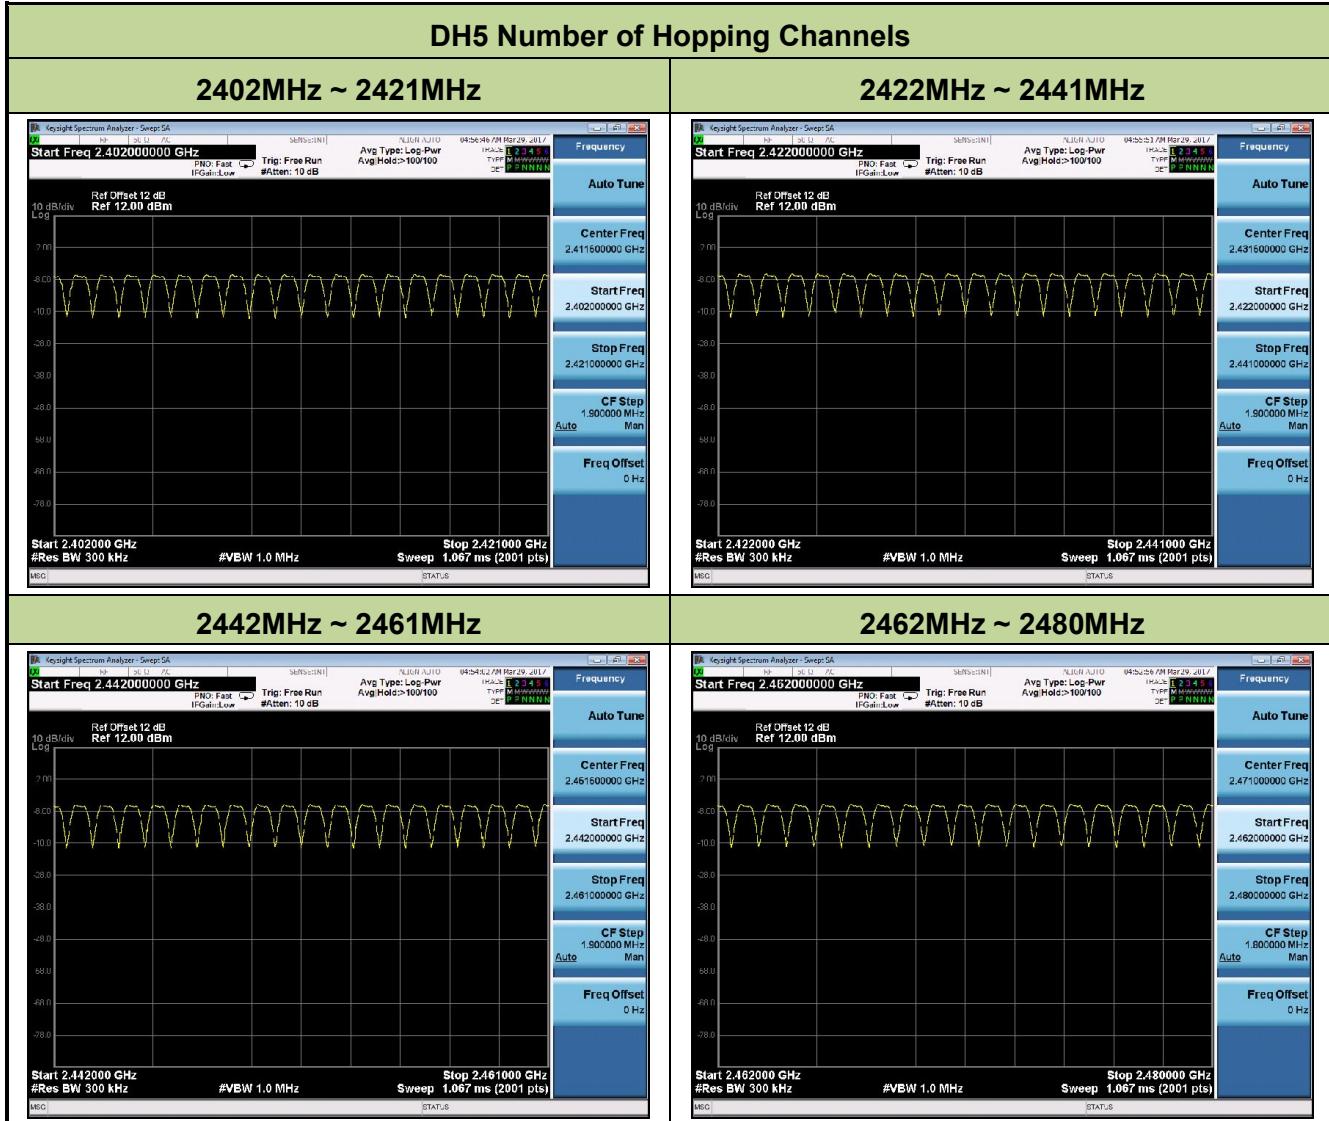



7.6. Time of Occupancy Measurement

7.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

7.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.4


7.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW = 1MHz
3. VBW \geq RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (data rate, modulation format, etc.), repeat this test for each variation.


An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

7.6.4. Test Setup

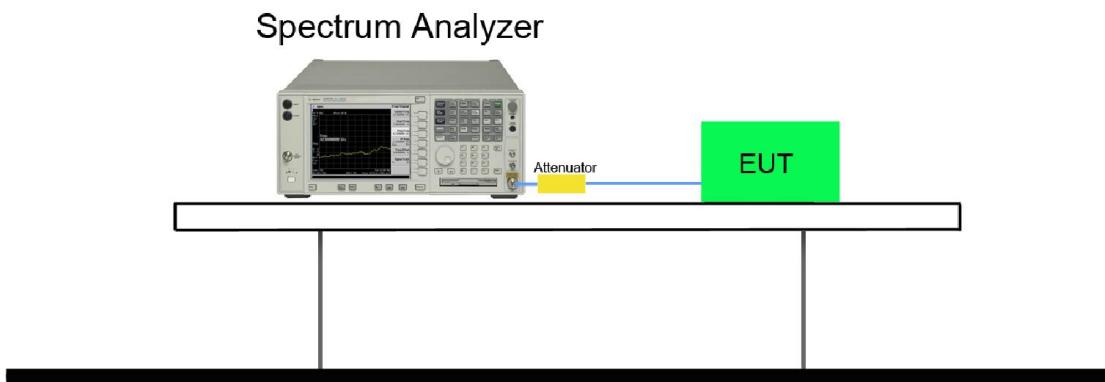


7.6.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
2DH1	39	2441	120.0	< 400	Pass
2DH3	39	2441	260.8	< 400	Pass
2DH5	39	2441	296.4	< 400	Pass

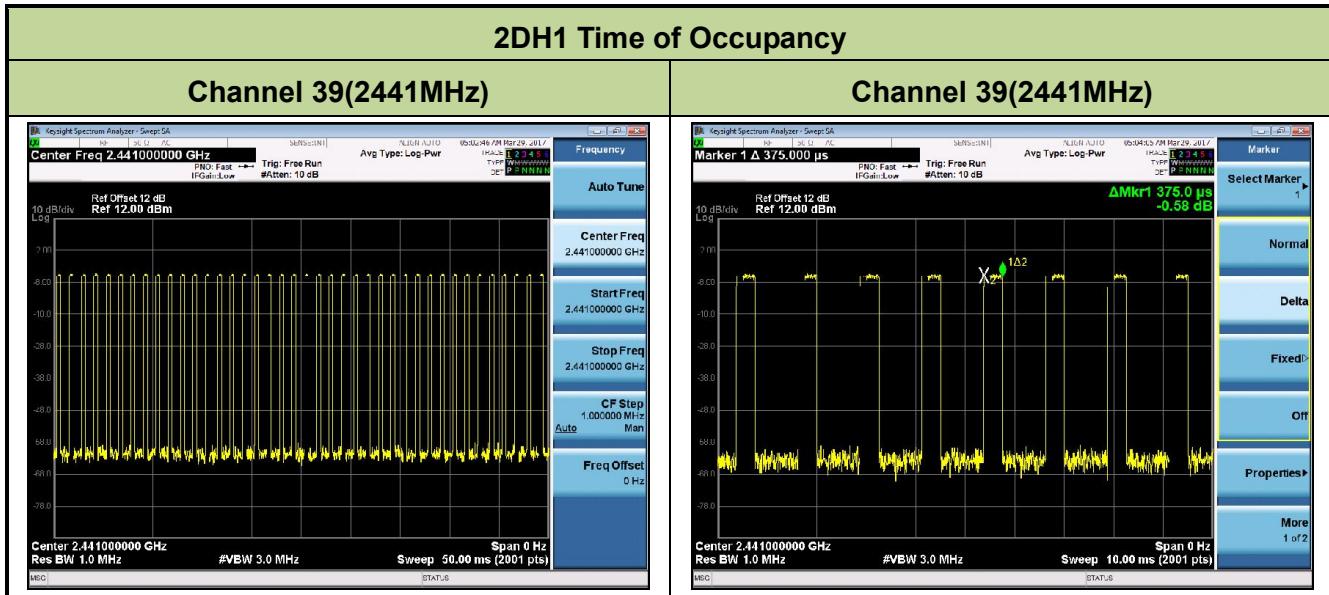


Note: Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $40/50\text{msec} = 800$ hops/sec.

The Maximum Occupancy Time within 31.6sec: $[(0.375\text{ms} \times 800)/79] \times 31.6 = 120.0$ msec.

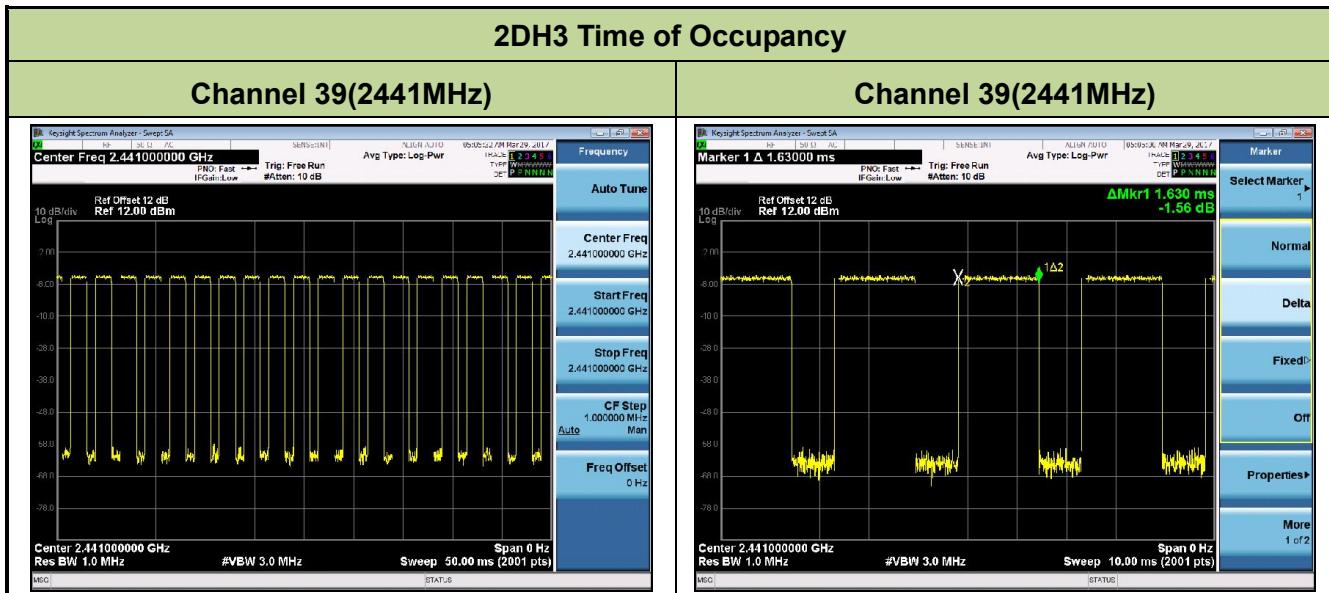

Note: Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $20/50\text{msec} = 400$ hops/sec.

The Maximum Occupancy Time within 31.6sec: $[(1.630\text{ms} \times 400)/79] \times 31.6 = 260.8$ msec.

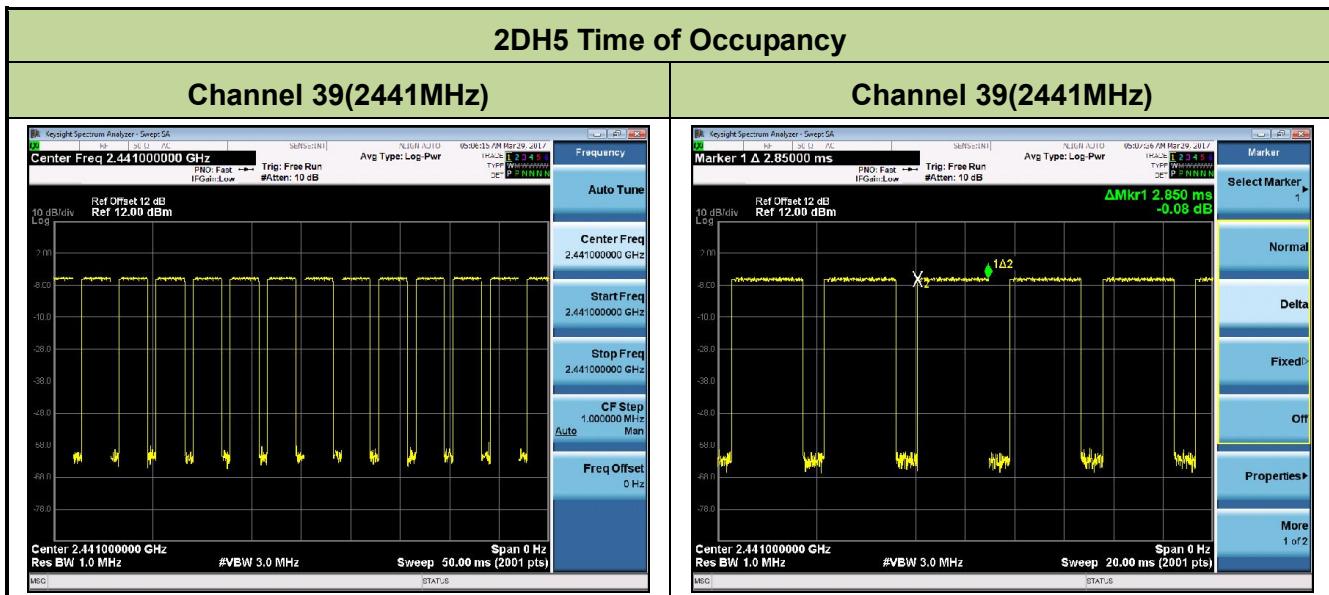

Note: Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $13/50\text{msec} = 260$ hops/sec.

The Maximum Occupancy Time within 31.6sec: $[(2.850\text{ms} \times 260)/79] \times 31.6 = 296.4$ msec.

7.7. Band-edge Compliance Measurement

7.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.6


7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW \geq 1% of spectrum analyzer display span
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, than use the marker-to-peak function to move the marker to the peak of the in-band emission.


7.7.4. Test Setup

Spectrum Analyzer

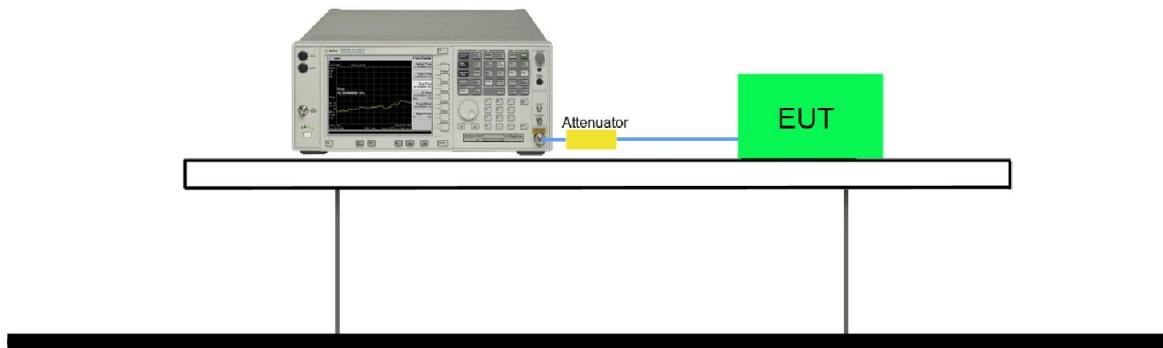


7.7.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass

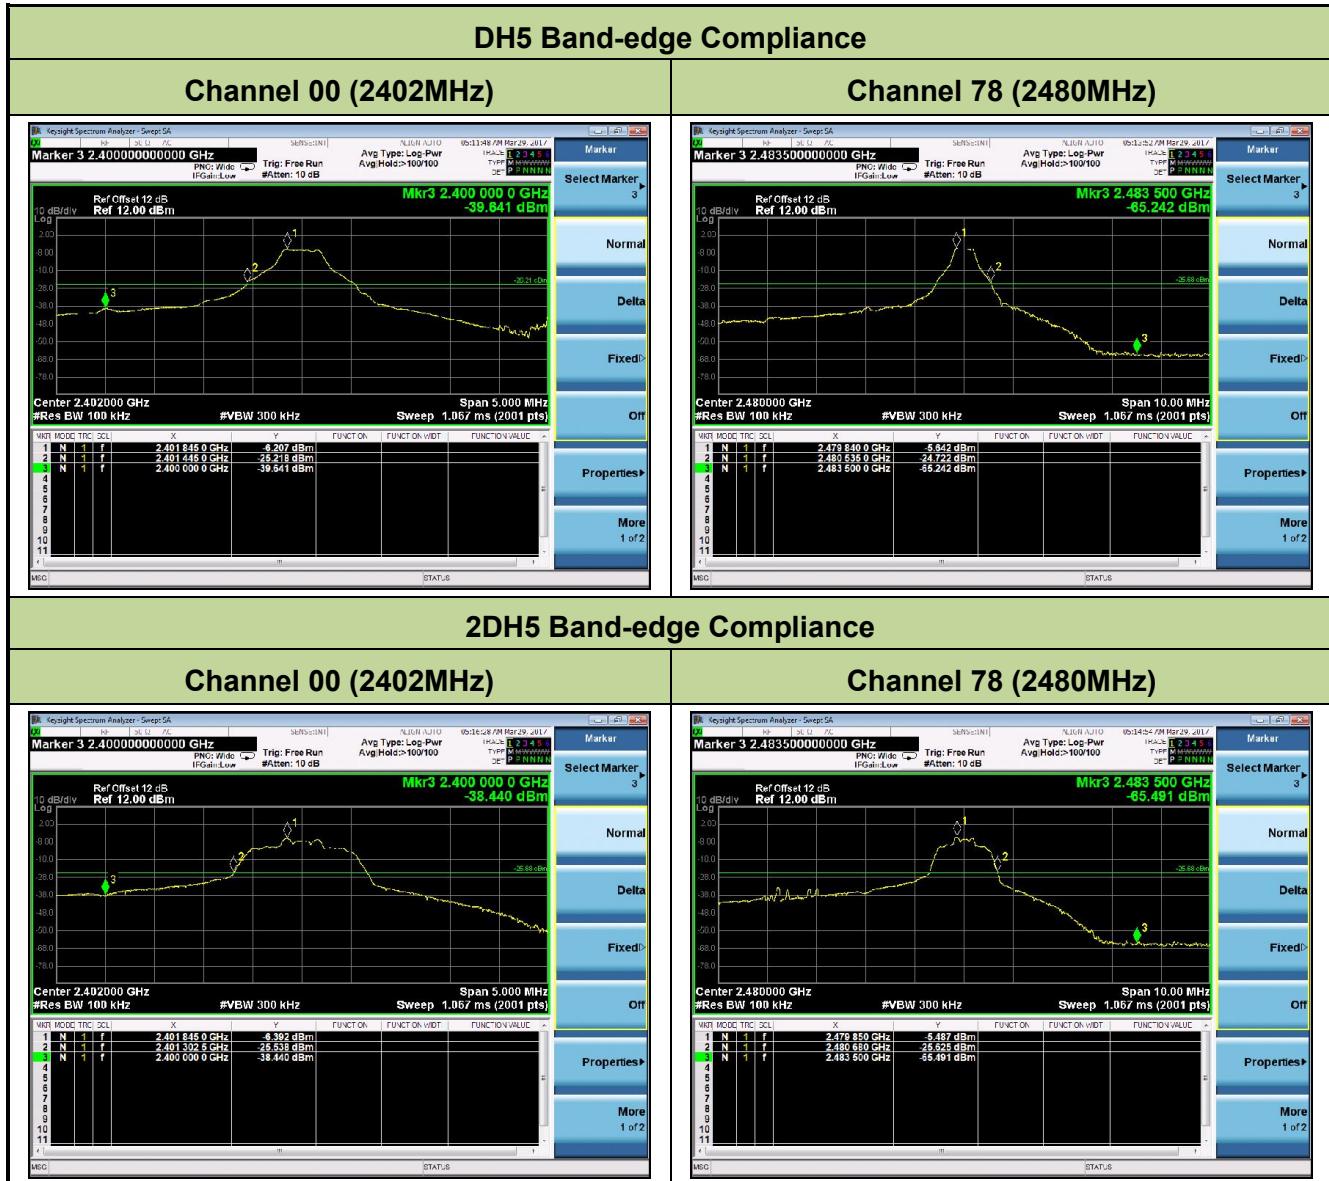


DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

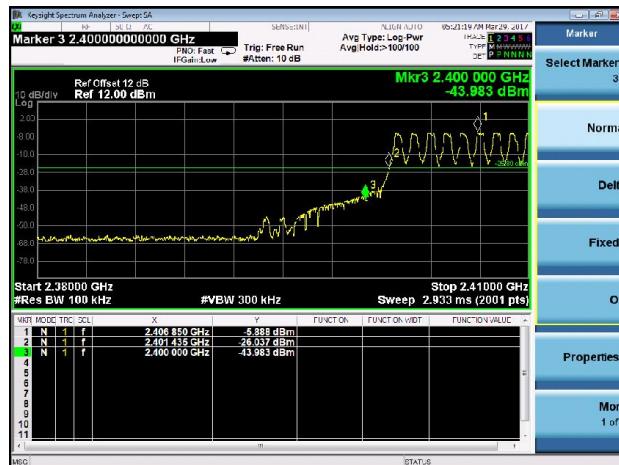


Channel 78 (2480MHz)

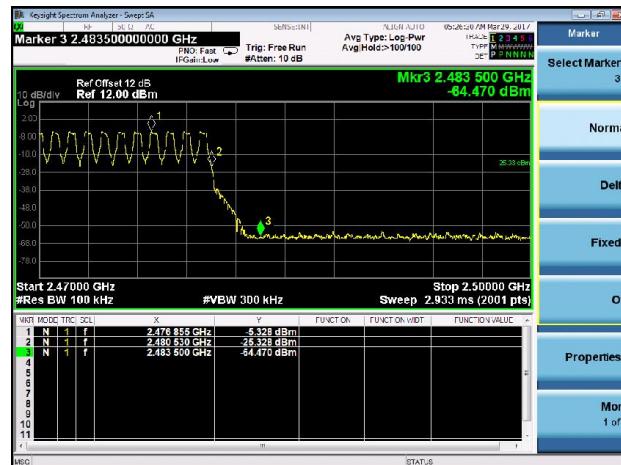

2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

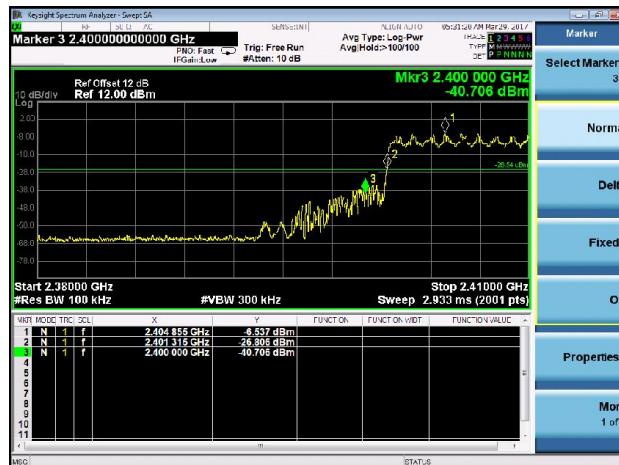

Channel 78 (2480MHz)



7.8. Conducted Spurious Emissions Measurement

7.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8


7.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


7.8.4. Test Setup

Spectrum Analyzer

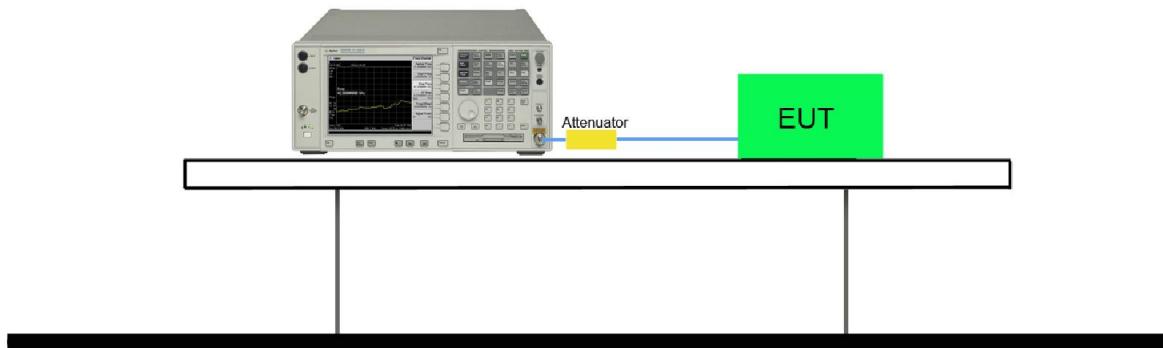


7.8.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass

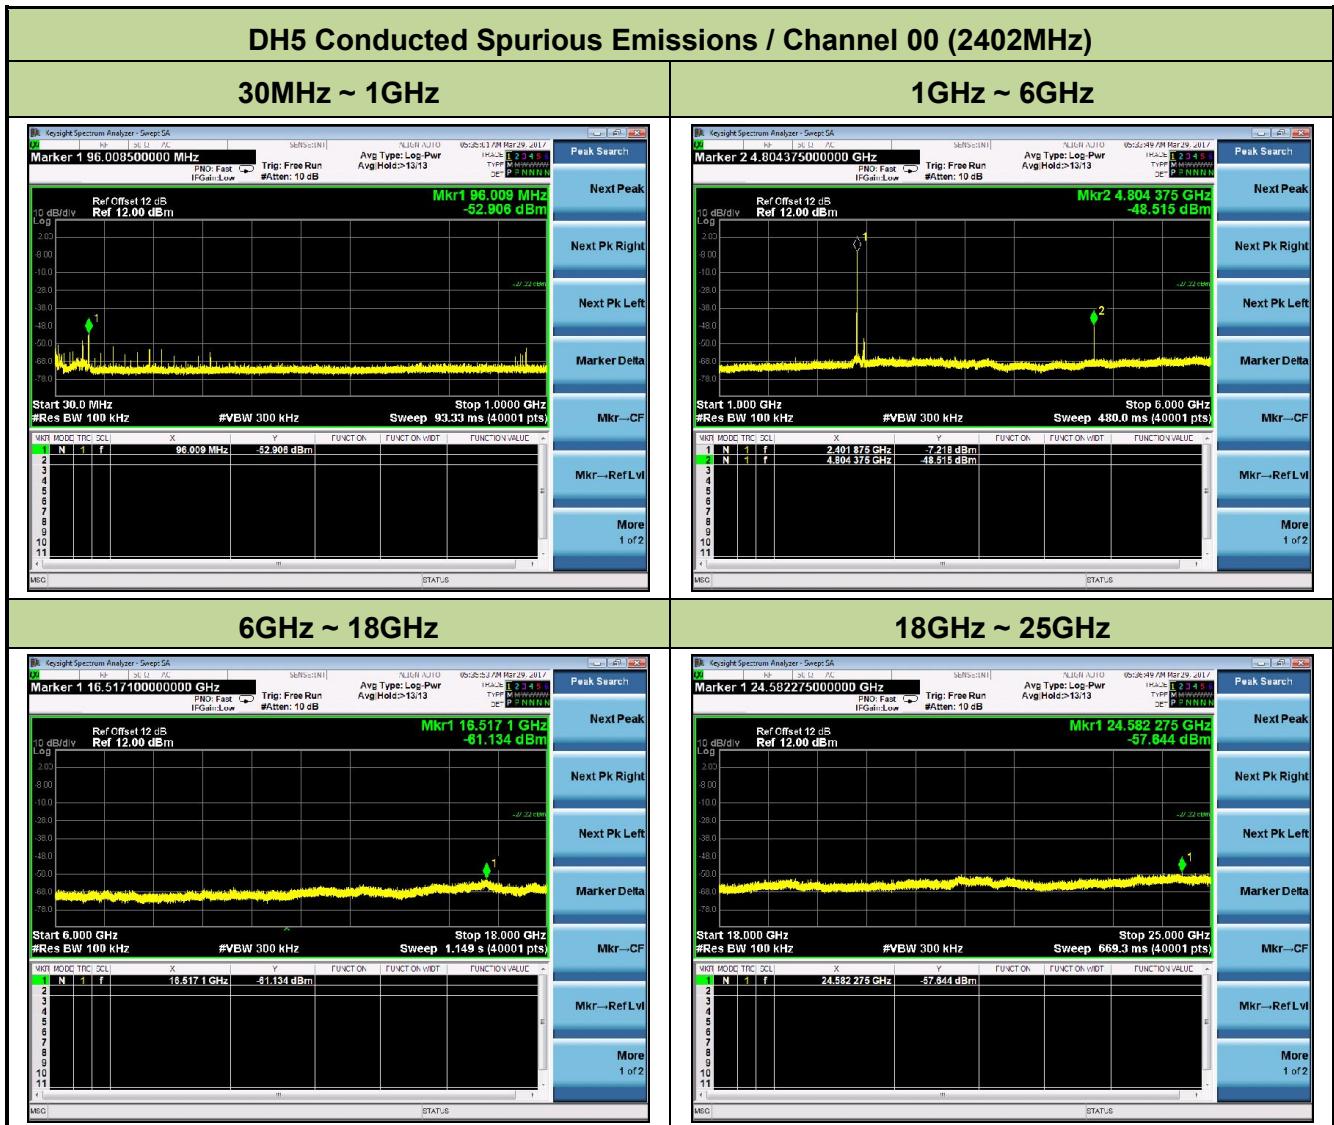


DH5 Conducted Spurious Emissions / Channel 39 (2441MHz)


30MHz ~ 1GHz

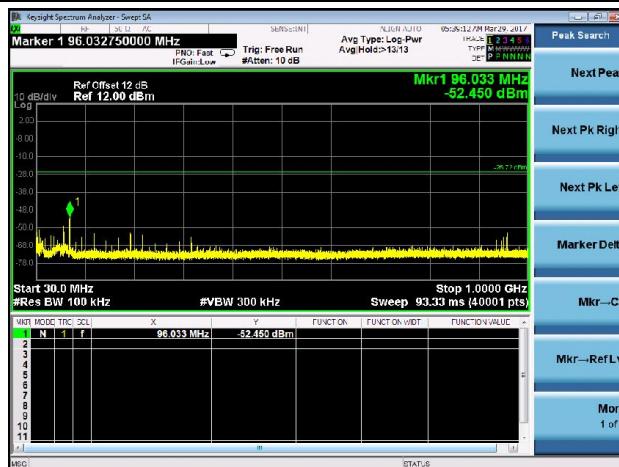

1GHz ~ 6GHz

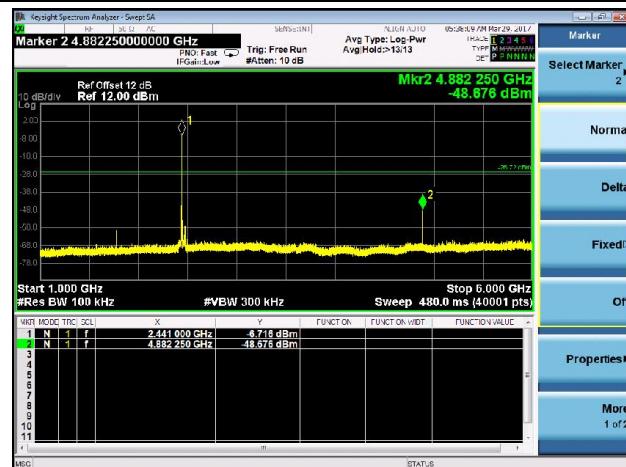

6GHz ~ 18GHz

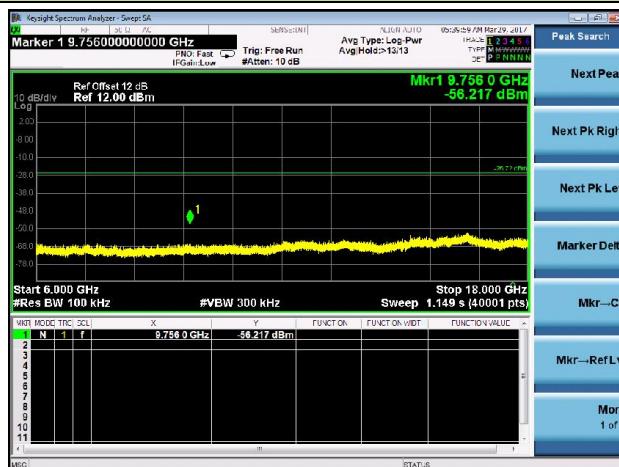


18GHz ~ 25GHz




DH5 Conducted Spurious Emissions / Channel 79 (2480MHz)


30MHz ~ 1GHz

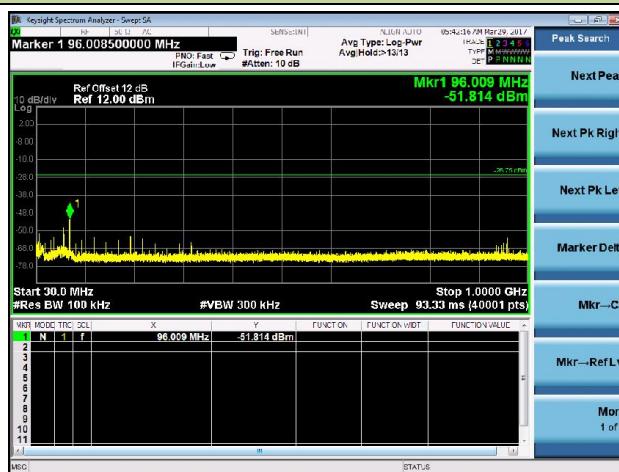


1GHz ~ 6GHz

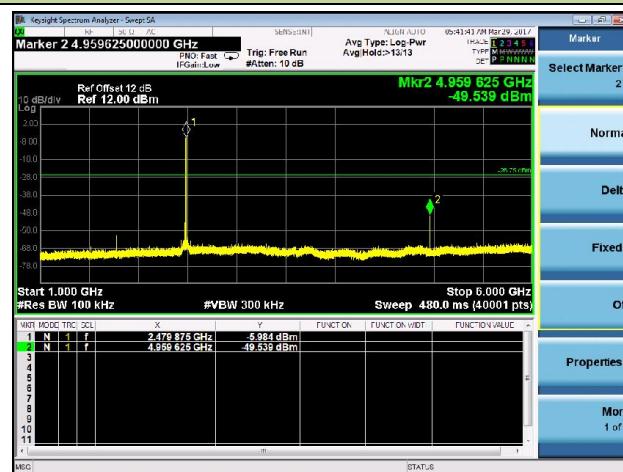

6GHz ~ 18GHz

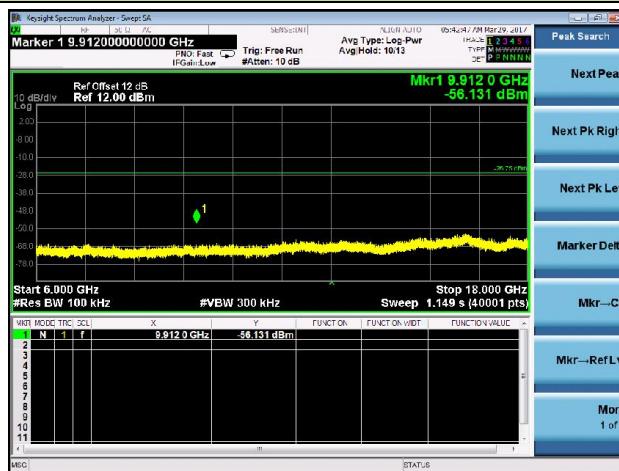


18GHz ~ 25GHz

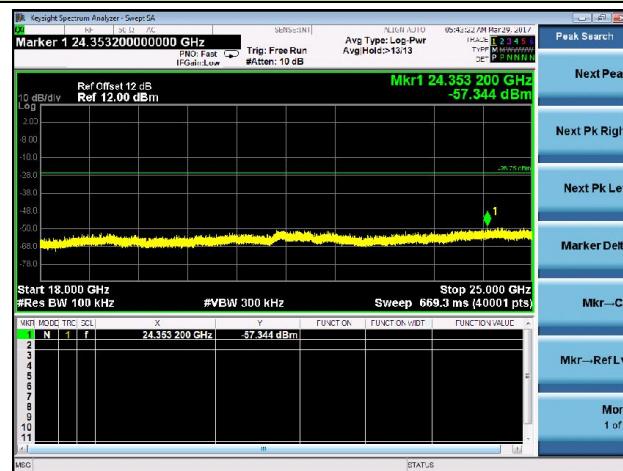


2DH5 Conducted Spurious Emissions / Channel 00 (2402MHz)


30MHz ~ 1GHz

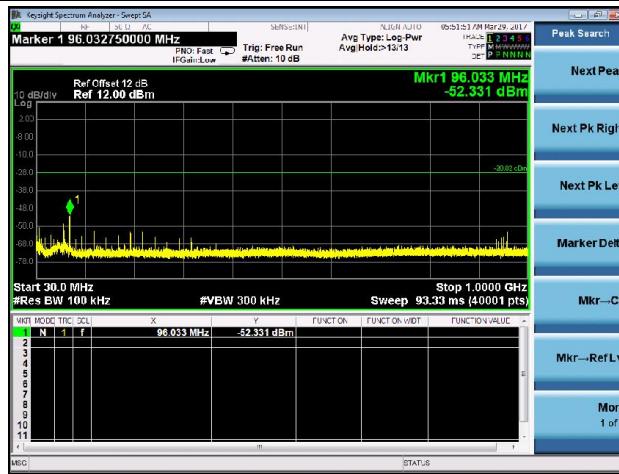


1GHz ~ 6GHz

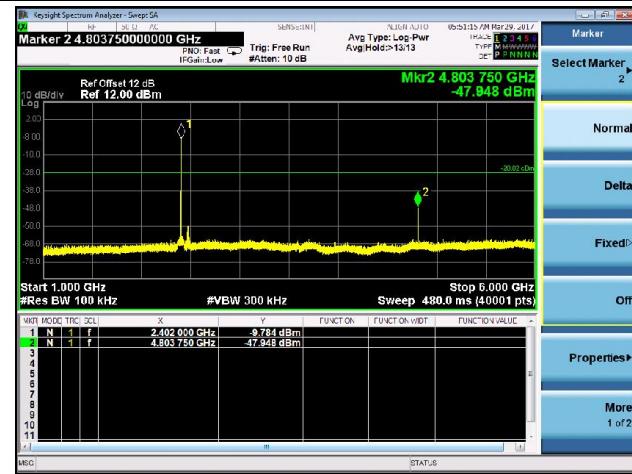



6GHz ~ 18GHz

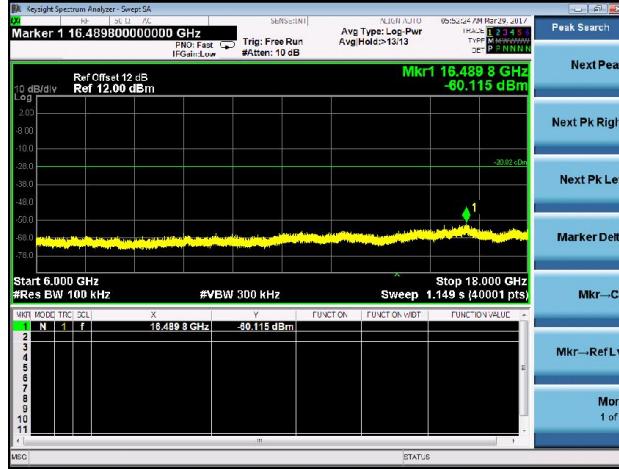

18GHz ~ 25GHz

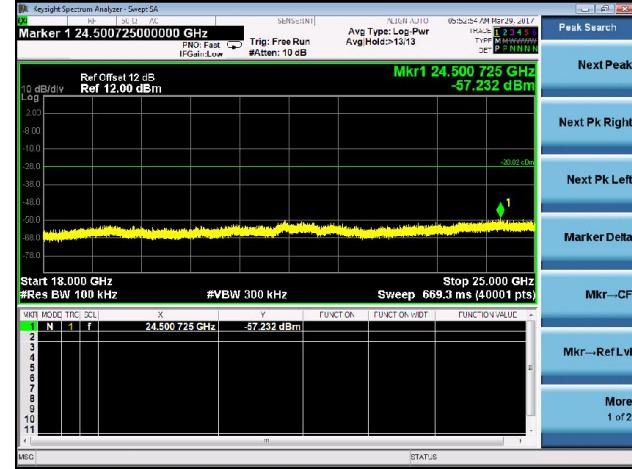

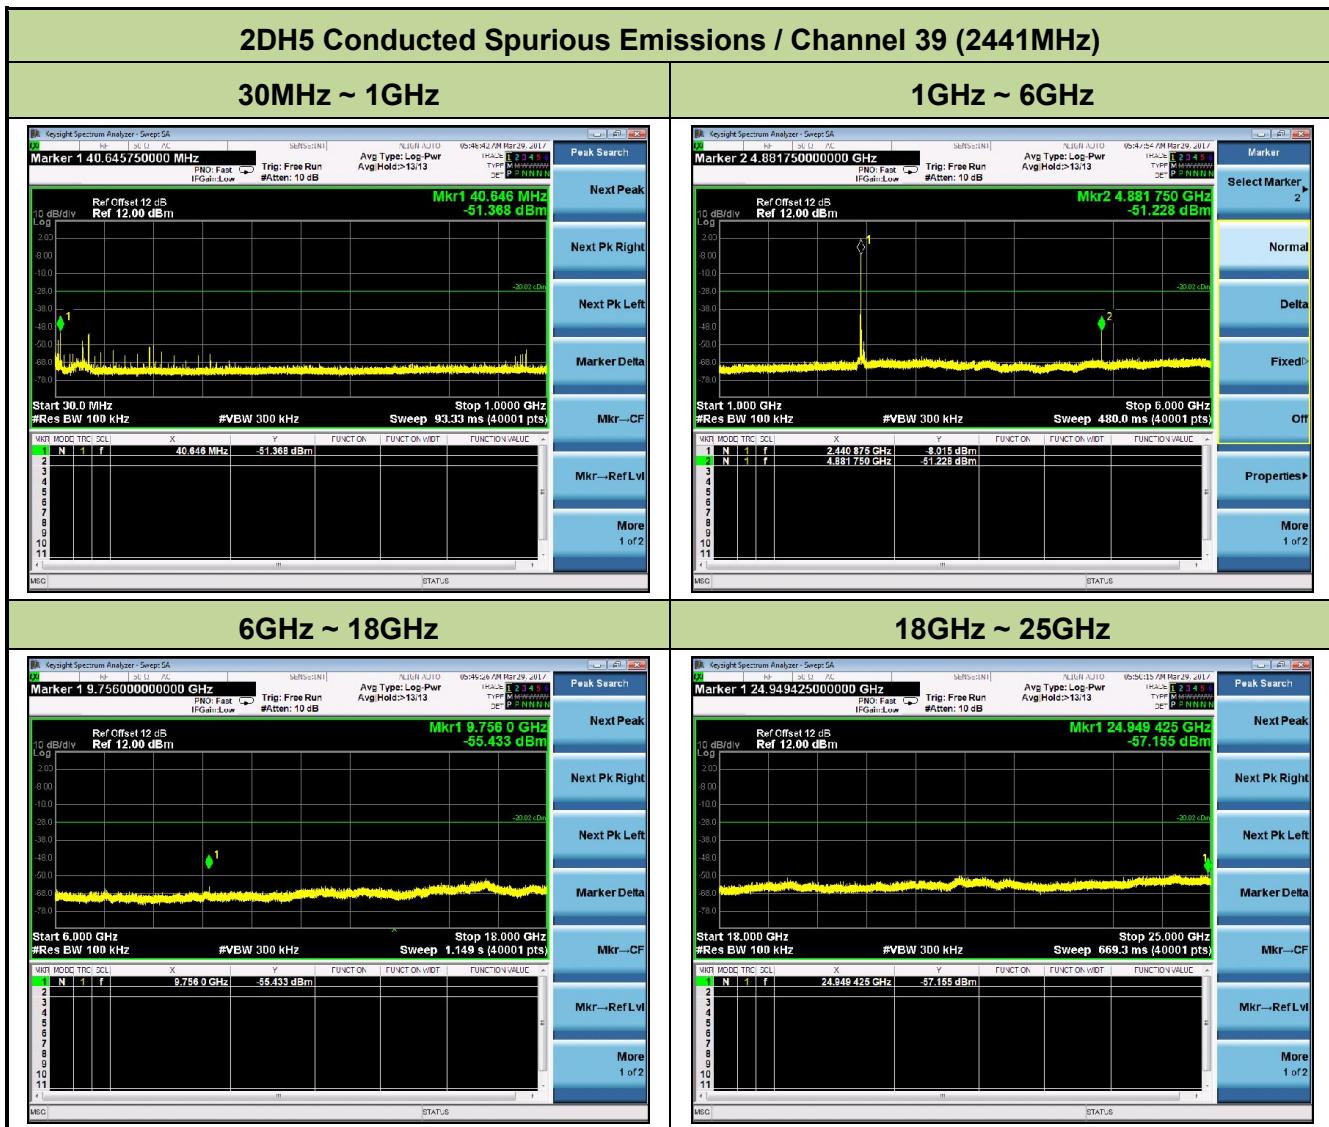

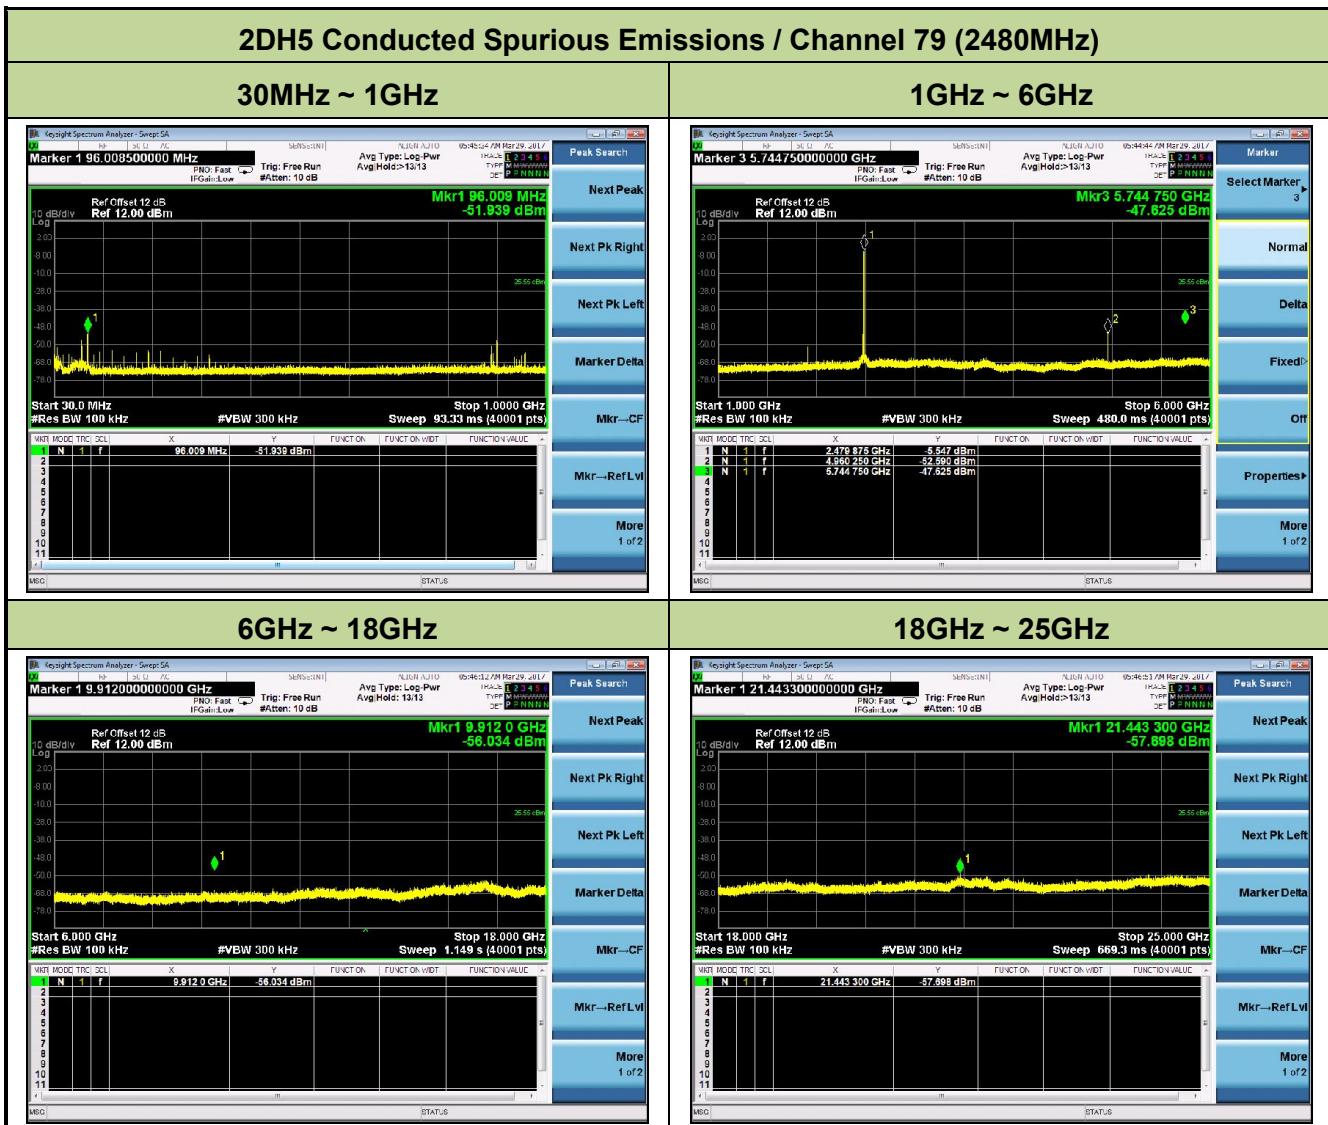

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.5

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 * RBW$
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.9.4. Test Setup

9kHz ~ 30MHz Test Setup:

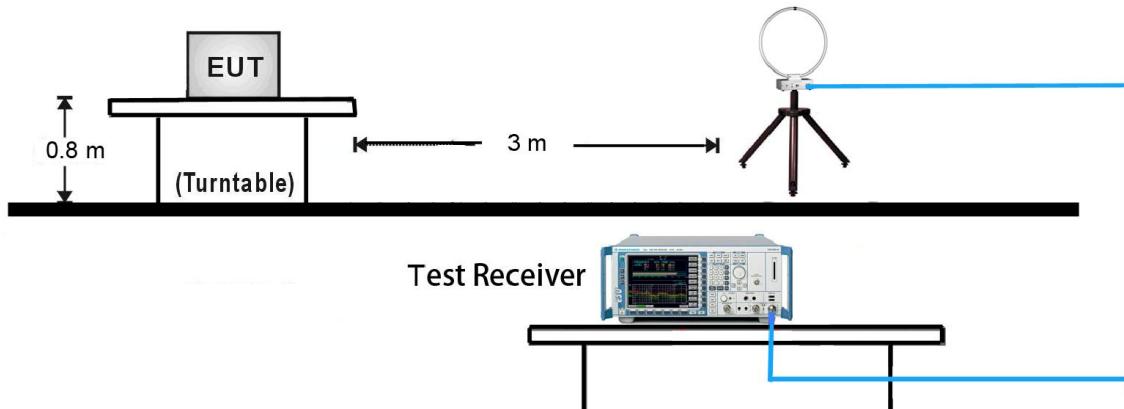

30MHz ~ 1GHz Test Setup:

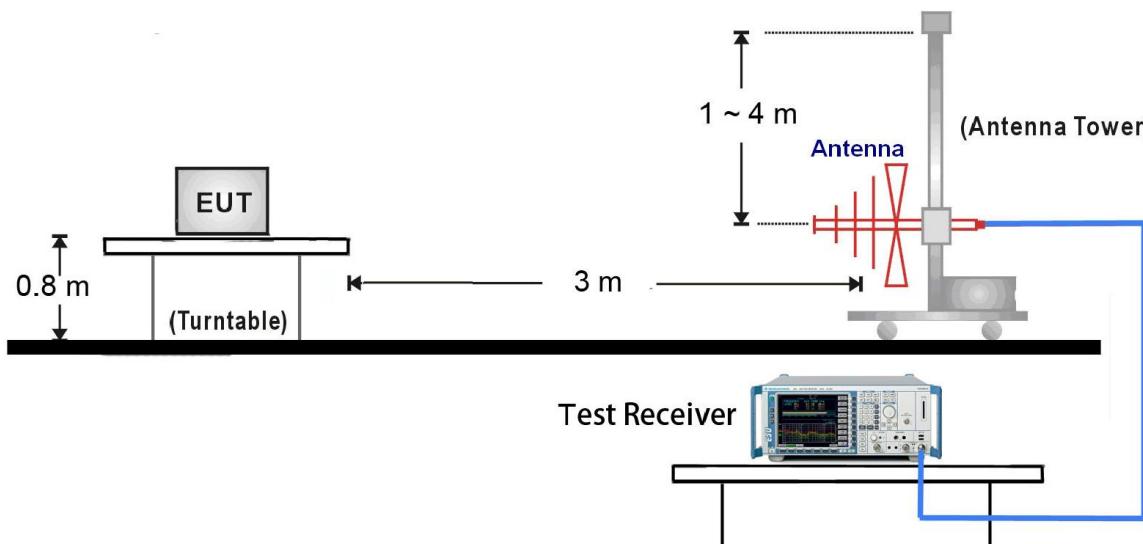

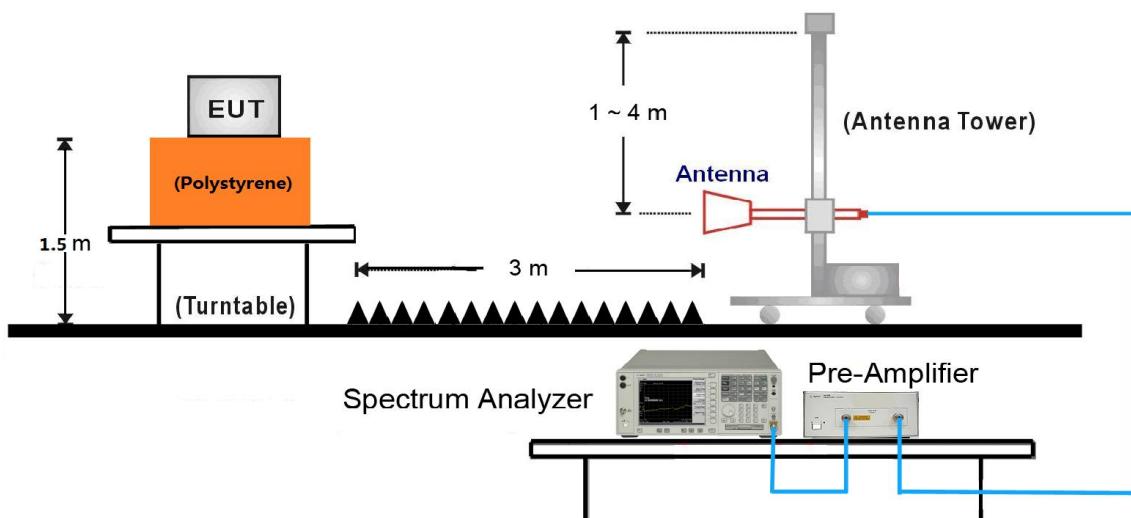1GHz ~ 25GHz Test Setup:

7.9.5. Test Result

Remark: There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4799.5	43.7	2.7	46.4	74.0	-27.6	Peak	Horizontal
	5400.0	34.1	3.1	37.2	74.0	-36.8	Peak	Horizontal
*	9638.0	33.9	11.0	44.9	74.0	-29.1	Peak	Horizontal
*	10554.0	34.9	12.5	47.4	74.0	-26.6	Peak	Horizontal
	4808.0	43.8	2.7	46.5	74.0	-27.5	Peak	Vertical
	7526.0	34.7	8.3	43.0	74.0	-31.0	Peak	Vertical
*	8788.0	33.5	8.9	42.4	74.0	-31.6	Peak	Vertical
*	10307.5	35.0	12.0	47.0	74.0	-27.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.2dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3524.0	35.8	-1.0	34.8	74.0	-39.2	Peak	Horizontal
	4411.0	35.1	1.4	36.5	74.0	-37.5	Peak	Horizontal
*	4884.5	43.1	2.7	45.8	74.0	-28.2	Peak	Horizontal
*	10911.0	35.1	13.0	48.1	74.0	-25.9	Peak	Horizontal
	4884.5	44.5	2.7	47.2	74.0	-26.8	Peak	Vertical
	8332.0	33.9	8.0	41.9	74.0	-32.1	Peak	Vertical
*	9203.0	33.0	10.1	43.1	74.0	-30.9	Peak	Vertical
*	9755.0	35.4	11.4	46.8	74.0	-27.2	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.4dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	79	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4961.0	42.4	2.9	45.3	74.0	-28.7	Peak	Horizontal
	7511.0	34.7	8.3	43.0	74.0	-31.0	Peak	Horizontal
*	9527.0	32.3	10.7	43.0	74.0	-31.0	Peak	Horizontal
*	10537.0	34.7	12.5	47.2	74.0	-26.8	Peak	Horizontal
	4961.0	45.4	2.9	48.3	74.0	-25.7	Peak	Vertical
	7386.0	34.0	7.9	41.9	74.0	-32.1	Peak	Vertical
*	8890.0	33.1	9.2	42.3	74.0	-31.7	Peak	Vertical
*	9916.5	35.8	11.5	47.3	74.0	-26.7	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.6dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4808.0	42.5	2.7	45.2	74.0	-28.8	Peak	Horizontal
	7411.0	34.4	8.0	42.4	74.0	-31.6	Peak	Horizontal
*	9287.0	33.5	10.3	43.8	74.0	-30.2	Peak	Horizontal
*	10503.0	34.1	12.4	46.5	74.0	-27.5	Peak	Horizontal
	4799.5	42.9	2.7	45.6	74.0	-28.4	Peak	Vertical
	5400.0	33.7	3.1	36.8	74.0	-37.2	Peak	Vertical
*	9251.0	32.7	10.2	42.9	74.0	-31.1	Peak	Vertical
*	9661.5	34.7	11.0	45.7	74.0	-28.3	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.7dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4884.5	41.8	2.7	44.5	74.0	-29.5	Peak	Horizontal
	5402.0	34.3	3.1	37.4	74.0	-36.6	Peak	Horizontal
*	7018.0	37.0	6.9	43.9	74.0	-30.1	Peak	Horizontal
*	9633.0	33.2	11.0	44.2	74.0	-29.8	Peak	Horizontal
	4884.5	43.3	2.7	46.0	74.0	-28.0	Peak	Vertical
	7521.0	35.0	8.3	43.3	74.0	-30.7	Peak	Vertical
*	8772.0	33.1	8.9	42.0	74.0	-32.0	Peak	Vertical
*	9755.0	35.4	11.4	46.8	74.0	-27.2	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.9dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	79	Test Engineer:	Alex Ma
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4961.0	41.6	2.9	44.5	74.0	-29.5	Peak	Horizontal
	7417.0	35.6	8.0	43.6	74.0	-30.4	Peak	Horizontal
*	9677.0	32.6	10.9	43.5	74.0	-30.5	Peak	Horizontal
*	10265.0	34.1	12.0	46.1	74.0	-27.9	Peak	Horizontal
	3477.0	36.4	-1.3	35.1	74.0	-38.9	Peak	Vertical
	4425.0	34.0	1.4	35.4	74.0	-38.6	Peak	Vertical
*	4961.0	44.8	2.9	47.7	74.0	-26.3	Peak	Vertical
*	11064.0	34.2	12.8	47.0	74.0	-27.0	Peak	Vertical


Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (92.6dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission 30MHz ~ 1GHz:

Site: AC1	Time: 2017/03/29 - 20:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: AC 120V / 60Hz
Worst Case Mode: Transmit by DH5 at Channel 2480MHz	

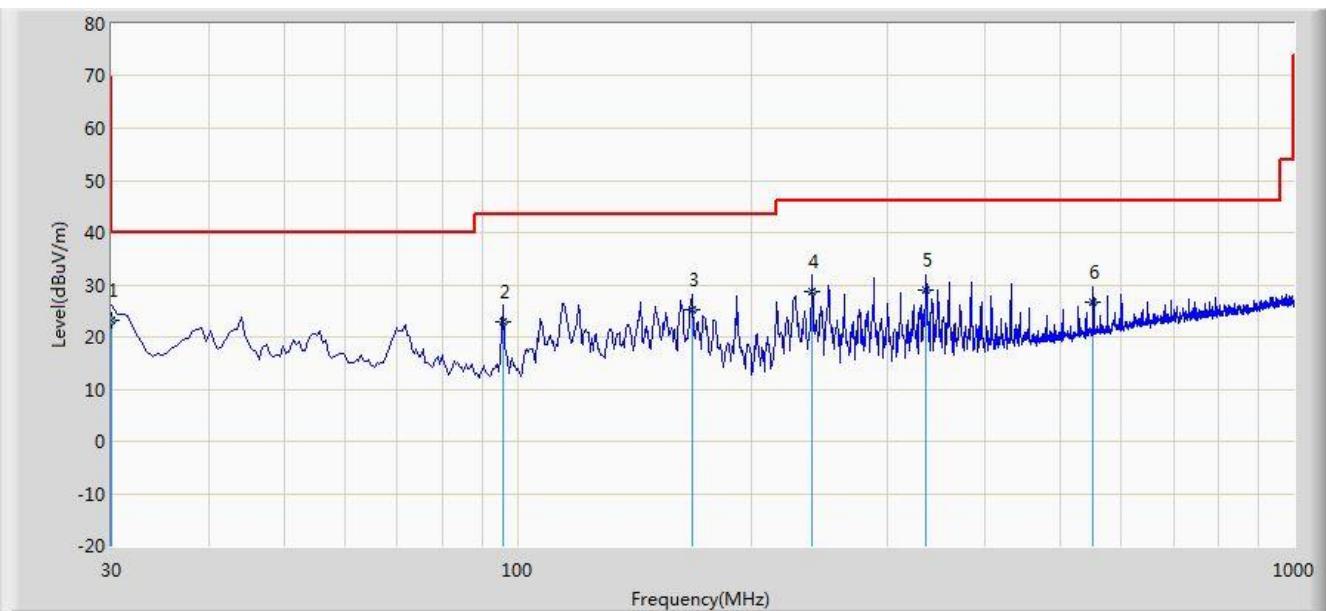


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1		*	30.000	23.083	9.475	-16.917	40.000	13.608	QP
2			95.960	22.966	12.318	-20.534	43.500	10.648	QP
3			167.740	25.178	10.709	-18.322	43.500	14.469	QP
4			240.005	28.785	16.023	-17.215	46.000	12.762	QP
5			336.035	28.921	13.743	-17.079	46.000	15.178	QP
6			551.860	26.580	7.082	-19.420	46.000	19.498	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/29 - 20:1
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: AC 120V / 60Hz
Worst Case Mode: Transmit by DH5 at Channel 2480MHz	

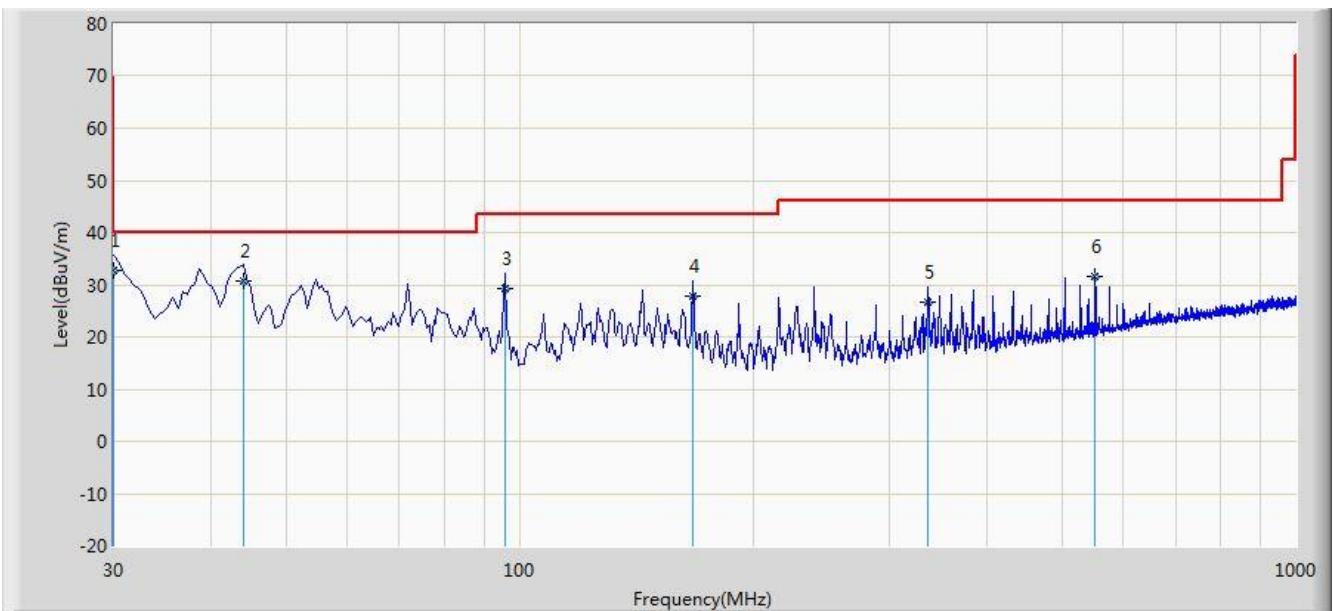

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1		*	30.000	32.621	19.013	-7.379	40.000	13.608	QP
2			44.065	30.831	16.587	-9.169	40.000	14.244	QP
3			95.960	29.284	18.636	-14.216	43.500	10.648	QP
4			167.255	27.809	13.293	-15.691	43.500	14.516	QP
5			336.035	26.583	11.405	-19.417	46.000	15.178	QP
6			551.860	31.540	12.042	-14.460	46.000	19.498	QP


Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Result

Site: AC1	Time: 2017/03/31 - 18:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

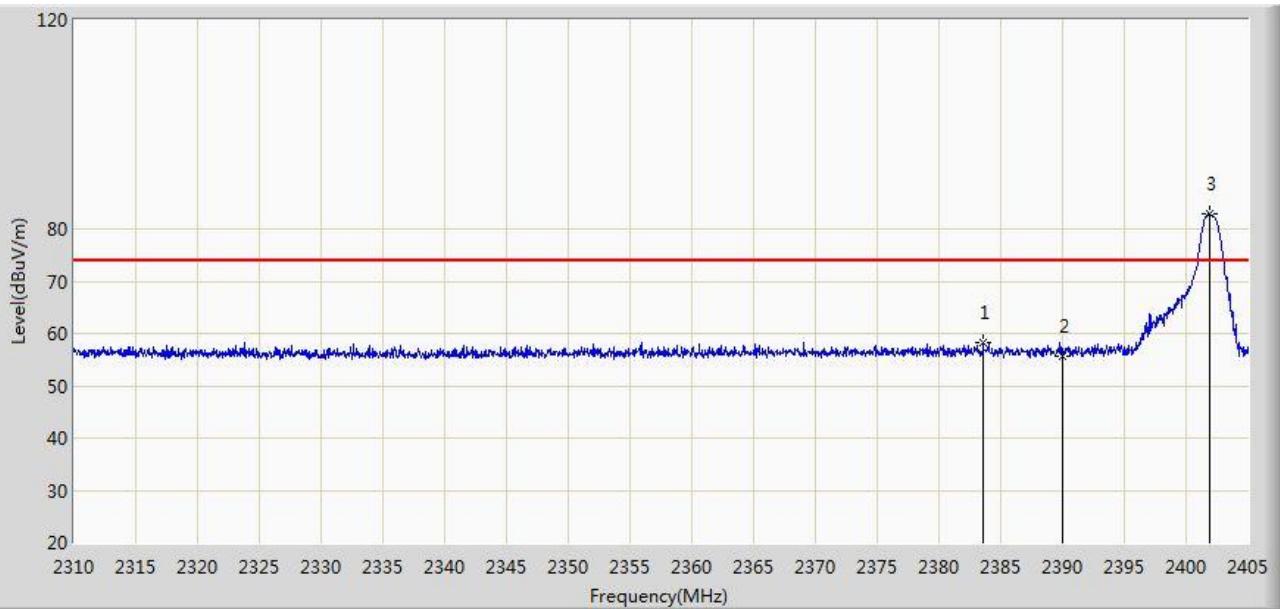


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2383.577	58.270	27.055	-15.730	74.000	31.214	PK
2			2390.000	55.757	24.554	-18.243	74.000	31.203	PK
3		*	2401.865	82.860	51.676	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

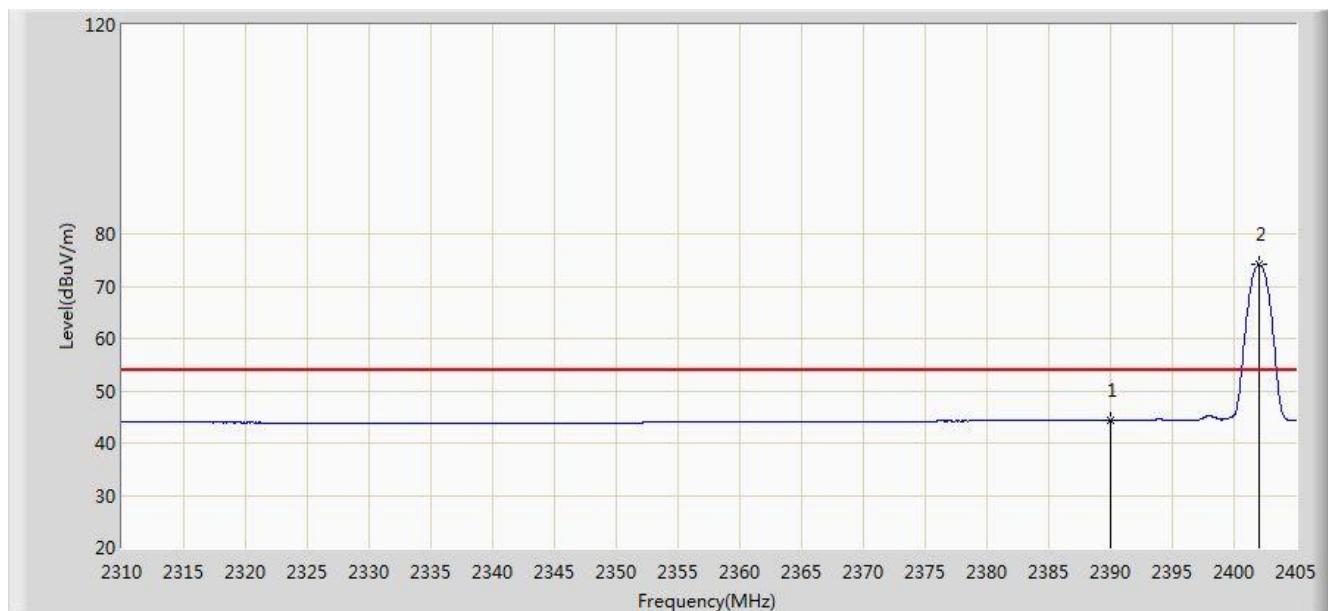


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.293	13.090	-9.707	54.000	31.203	AV
2		*	2402.008	74.119	42.935	N/A	N/A	31.184	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

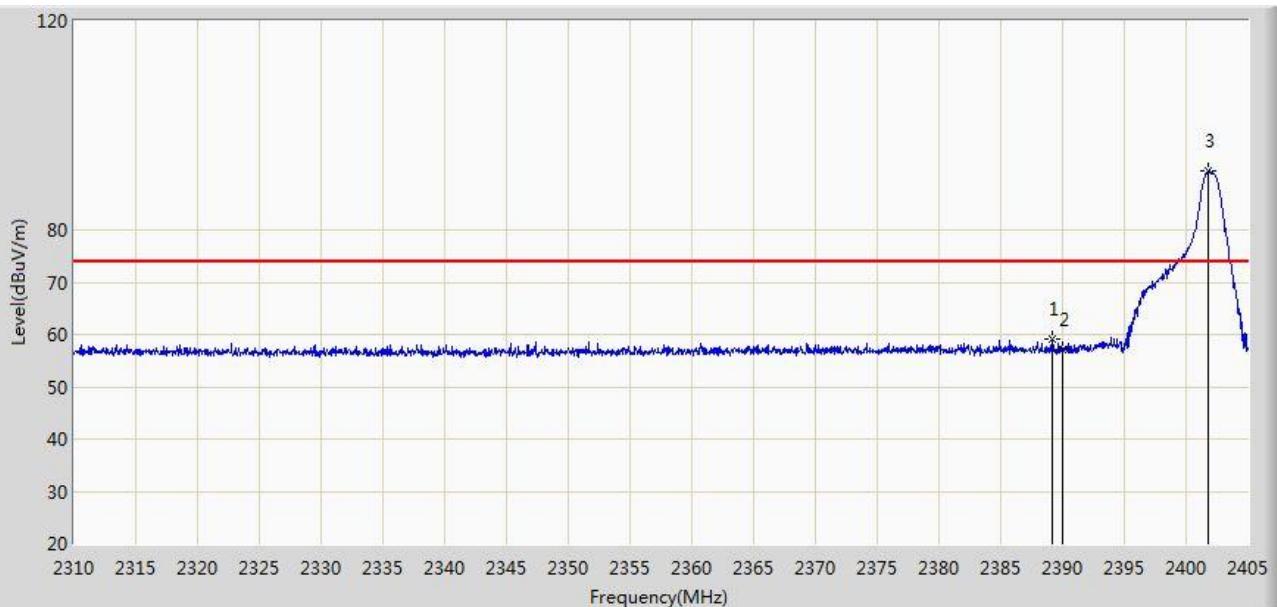


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.135	59.105	27.901	-14.895	74.000	31.204	PK
2			2390.000	56.986	25.783	-17.014	74.000	31.203	PK
3	*		2401.817	91.226	60.042	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

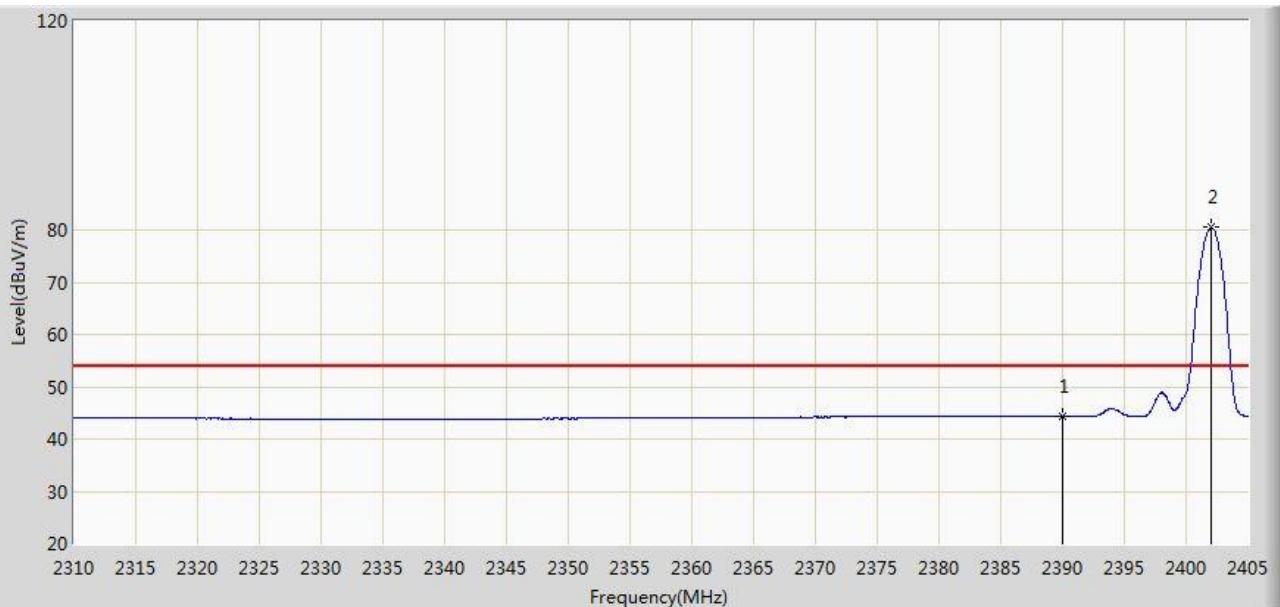


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2390.000	44.371	13.168	-9.629	54.000	31.203	AV
2		*	2402.055	80.468	49.284	N/A	N/A	31.184	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

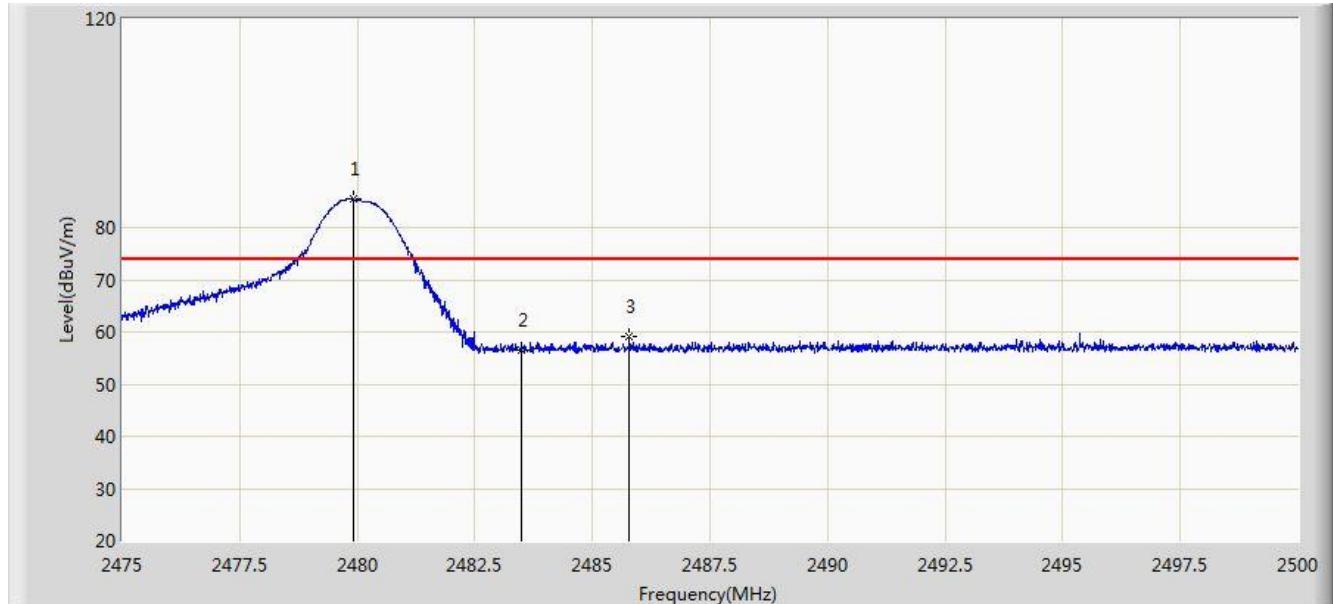


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2479.913	85.483	54.299	N/A	N/A	31.184	PK
2			2483.500	56.558	25.365	-17.442	74.000	31.194	PK
3			2485.788	59.043	27.844	-14.957	74.000	31.200	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

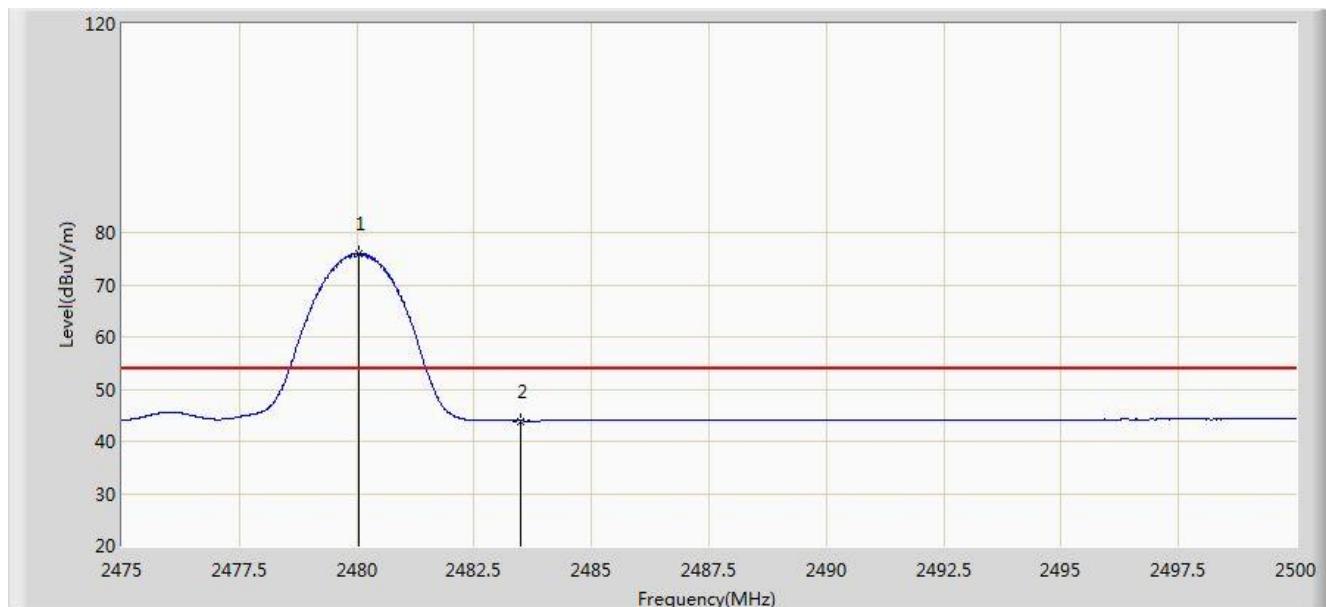


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.038	75.990	44.806	N/A	N/A	31.184	AV
2			2483.500	43.910	12.717	-10.090	54.000	31.194	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

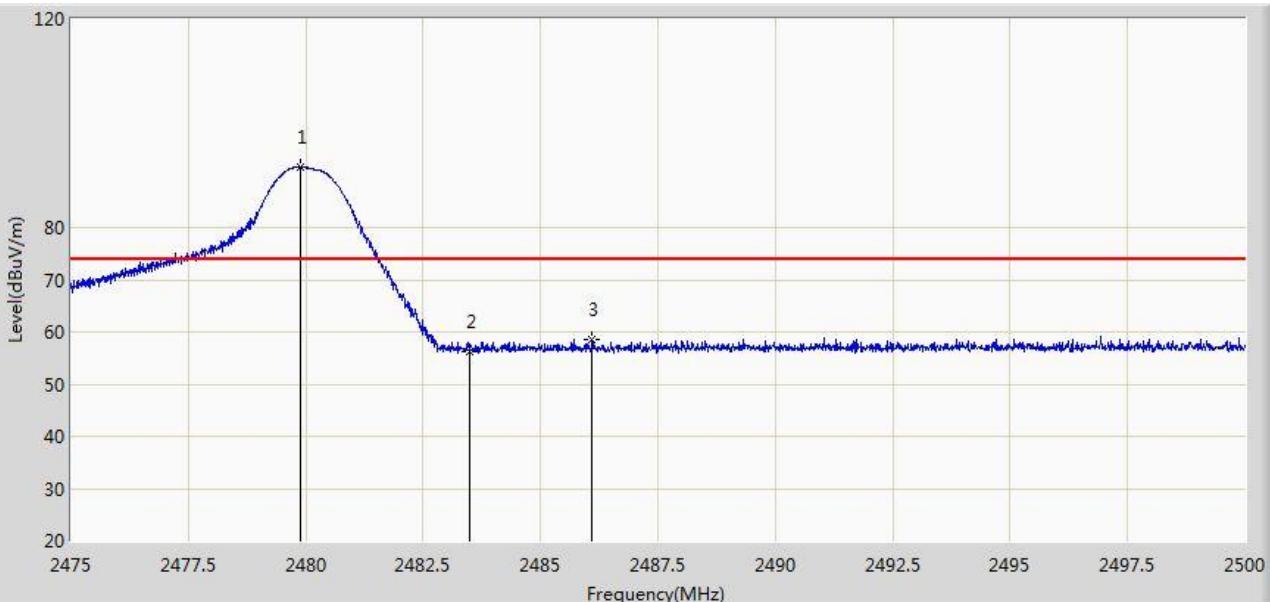


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2479.900	91.625	60.441	N/A	N/A	31.184	PK
2			2483.500	56.092	24.899	-17.908	74.000	31.194	PK
3			2486.100	58.606	27.406	-15.394	74.000	31.200	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

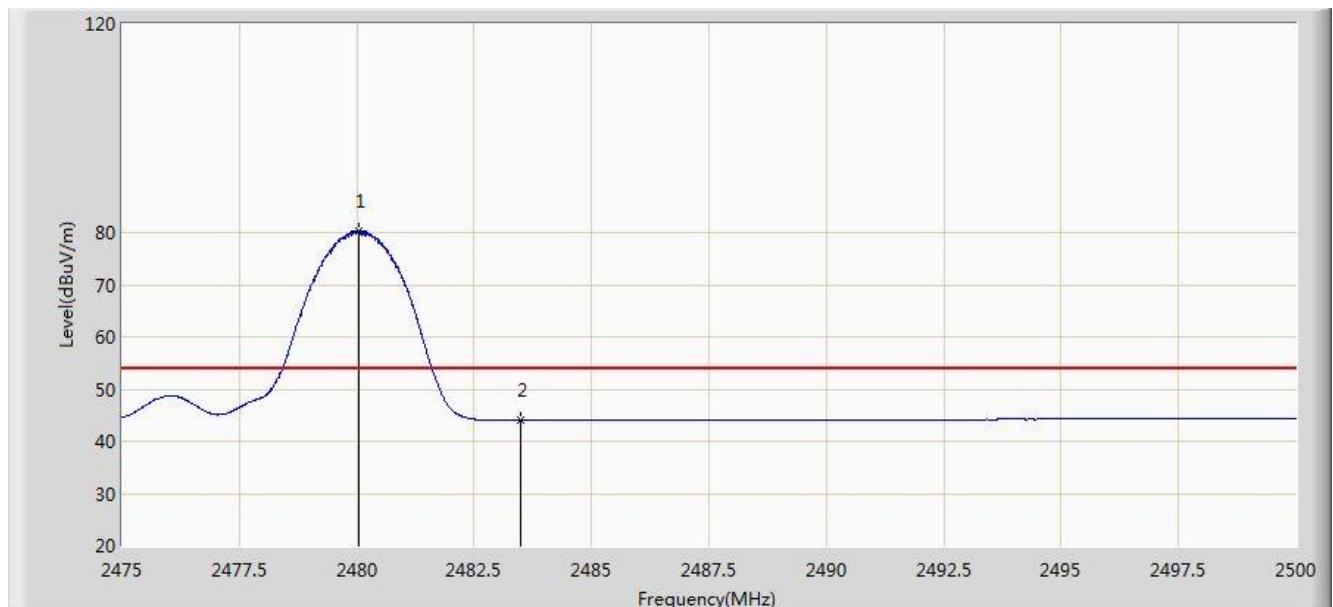


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.050	80.241	49.057	N/A	N/A	31.184	AV
2			2483.500	44.006	12.813	-9.994	54.000	31.194	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

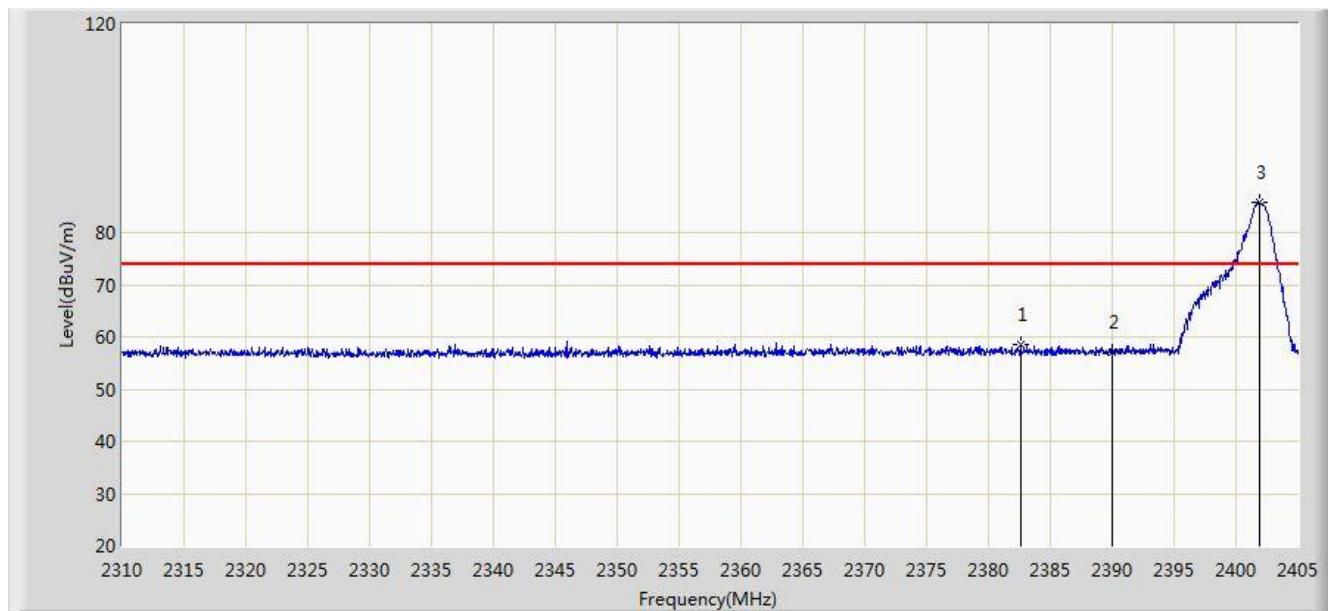


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.580	58.605	27.389	-15.395	74.000	31.216	PK
2			2390.000	57.201	25.998	-16.799	74.000	31.203	PK
3	*		2401.960	85.843	54.659	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

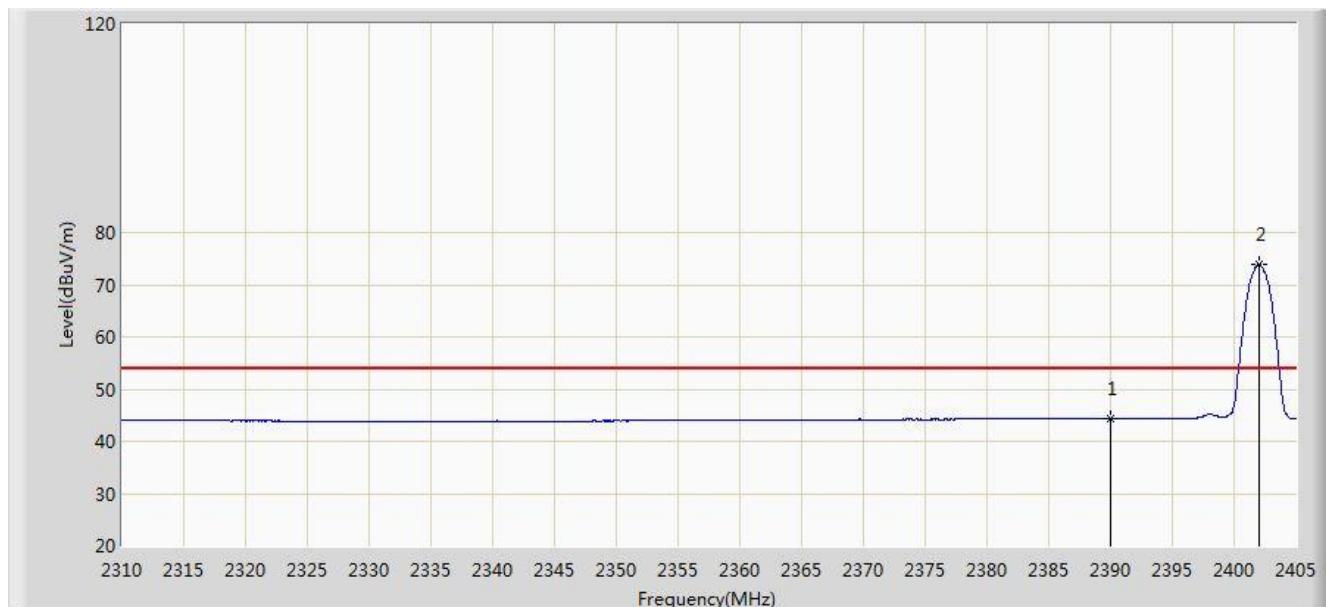


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.331	13.128	-9.669	54.000	31.203	AV
2		*	2402.008	73.912	42.728	N/A	N/A	31.184	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

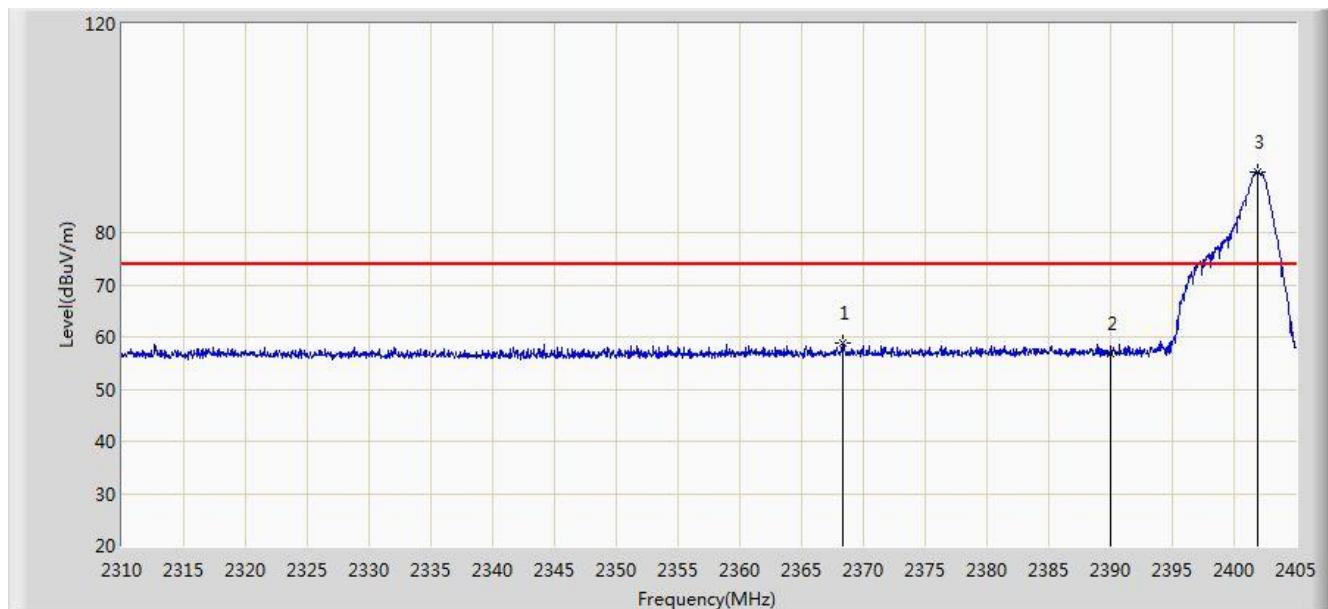


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.282	58.751	27.508	-15.249	74.000	31.243	PK
2			2390.000	56.938	25.735	-17.062	74.000	31.203	PK
3	*		2401.865	91.695	60.511	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

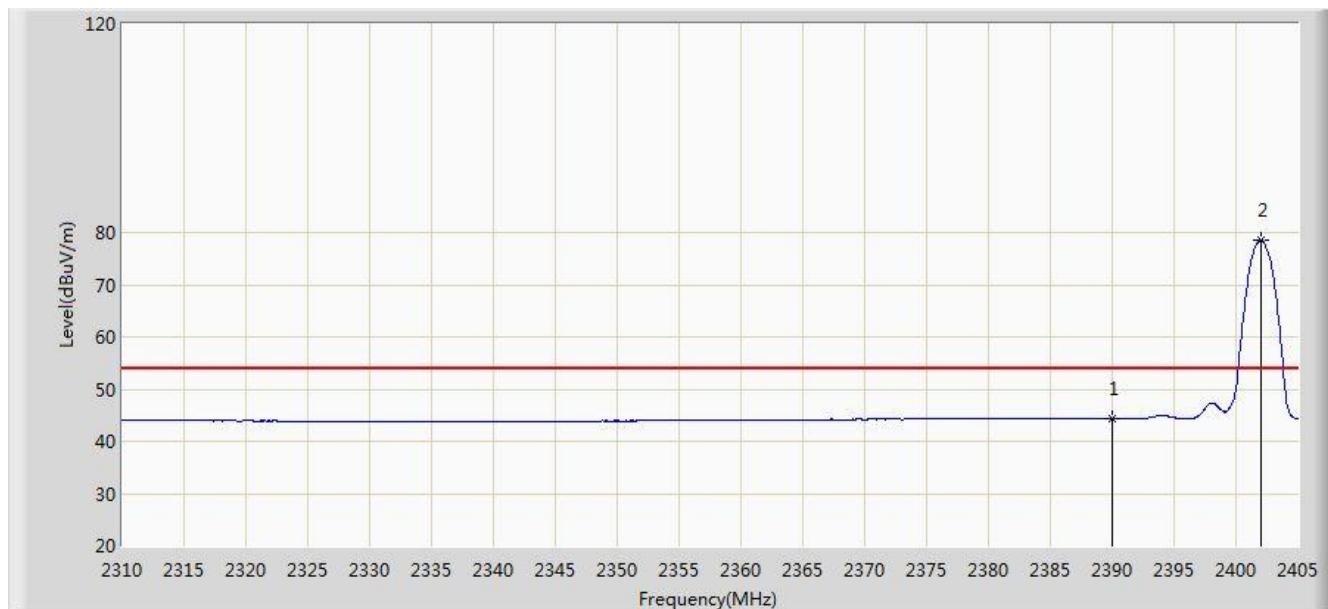


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.332	13.129	-9.668	54.000	31.203	AV
2		*	2402.008	78.693	47.509	N/A	N/A	31.184	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

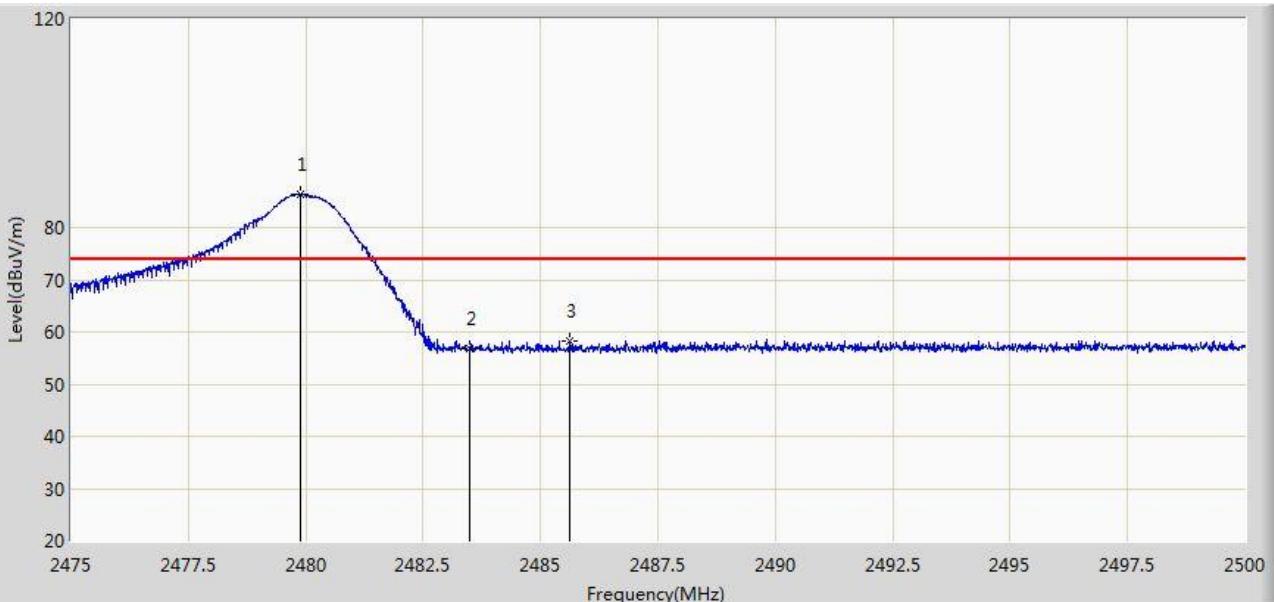


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2479.887	86.421	55.237	N/A	N/A	31.184	PK
2			2483.500	56.934	25.741	-17.066	74.000	31.194	PK
3			2485.625	58.405	27.206	-15.595	74.000	31.198	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

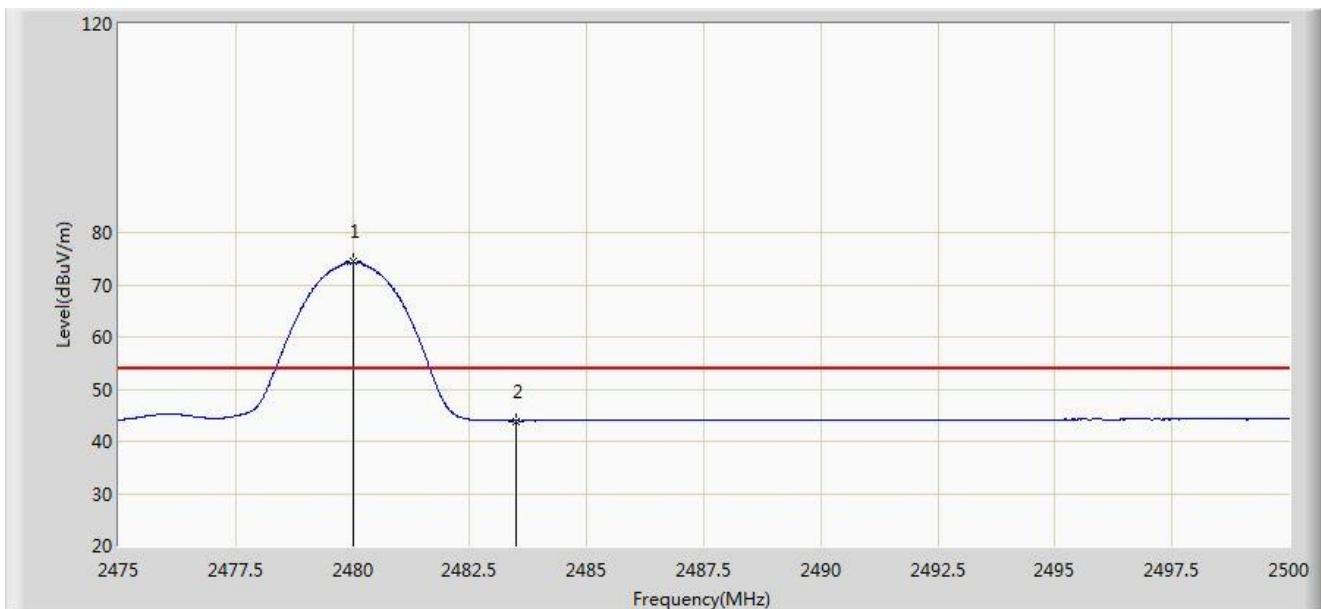


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.025	74.351	43.167	N/A	N/A	31.184	AV
2			2483.500	43.908	12.715	-10.092	54.000	31.194	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

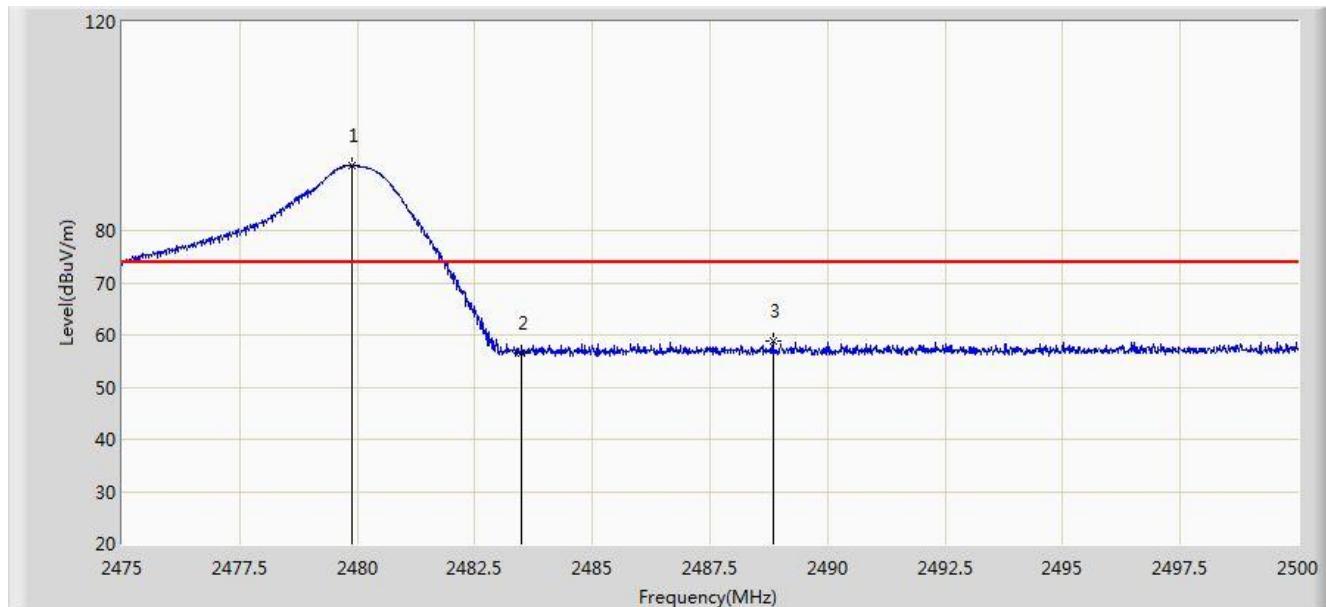


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2479.900	92.552	61.368	N/A	N/A	31.184	PK
2			2483.500	56.402	25.209	-17.598	74.000	31.194	PK
3			2488.837	58.833	27.626	-15.167	74.000	31.207	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/03/31 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Speaker	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

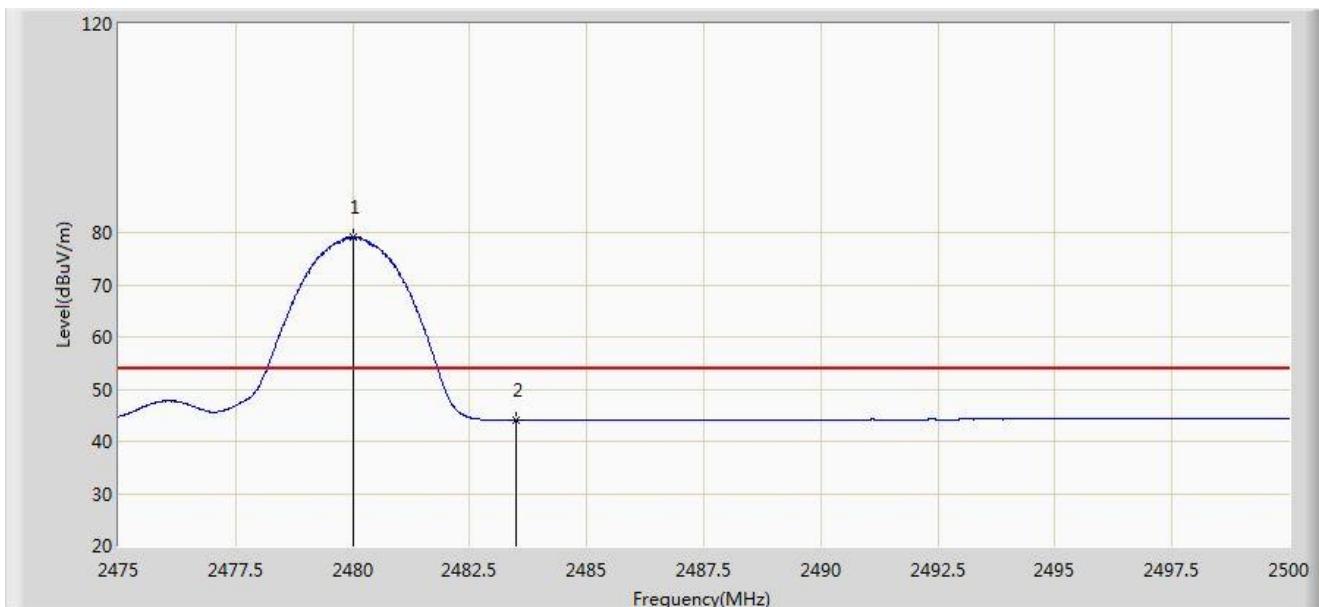

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.012	79.092	47.908	N/A	N/A	31.184	AV
2			2483.500	43.963	12.770	-10.037	54.000	31.194	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11.AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

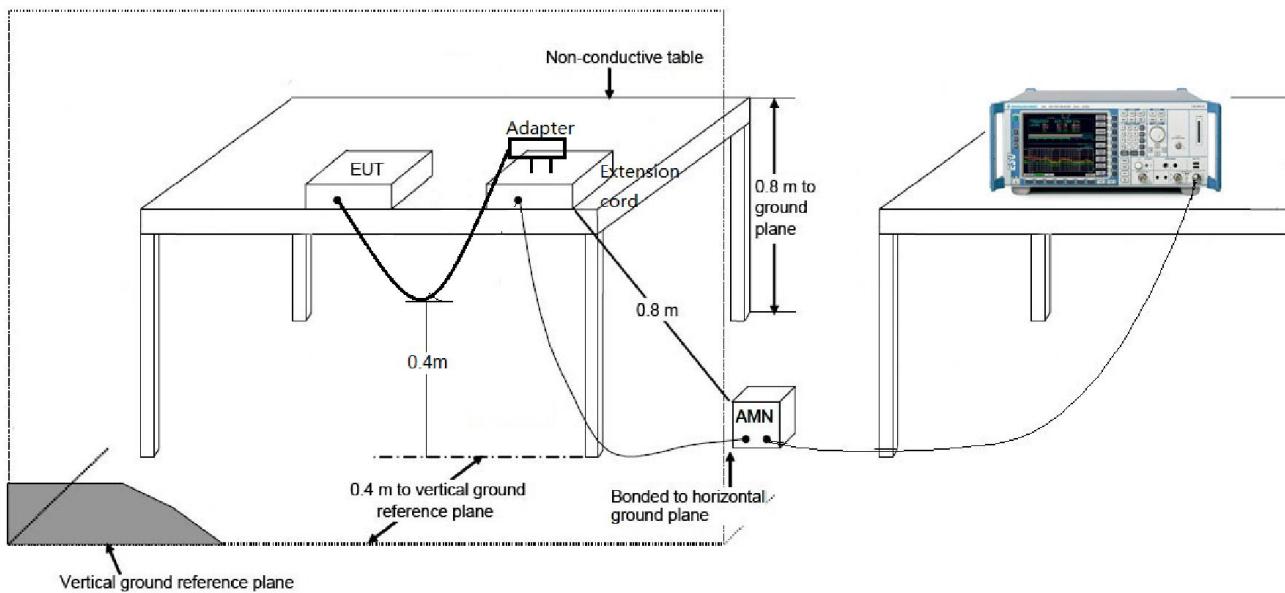

7.11.3. Test Result

Site: SR2	Time: 2017/03/31 - 14:17
Limit: FCC_Part15.207_CE_AC Power_ClassB	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Bluetooth Speaker	Power: By Battery
Note: Transmit by 2DH5 at channel 2480MHz	

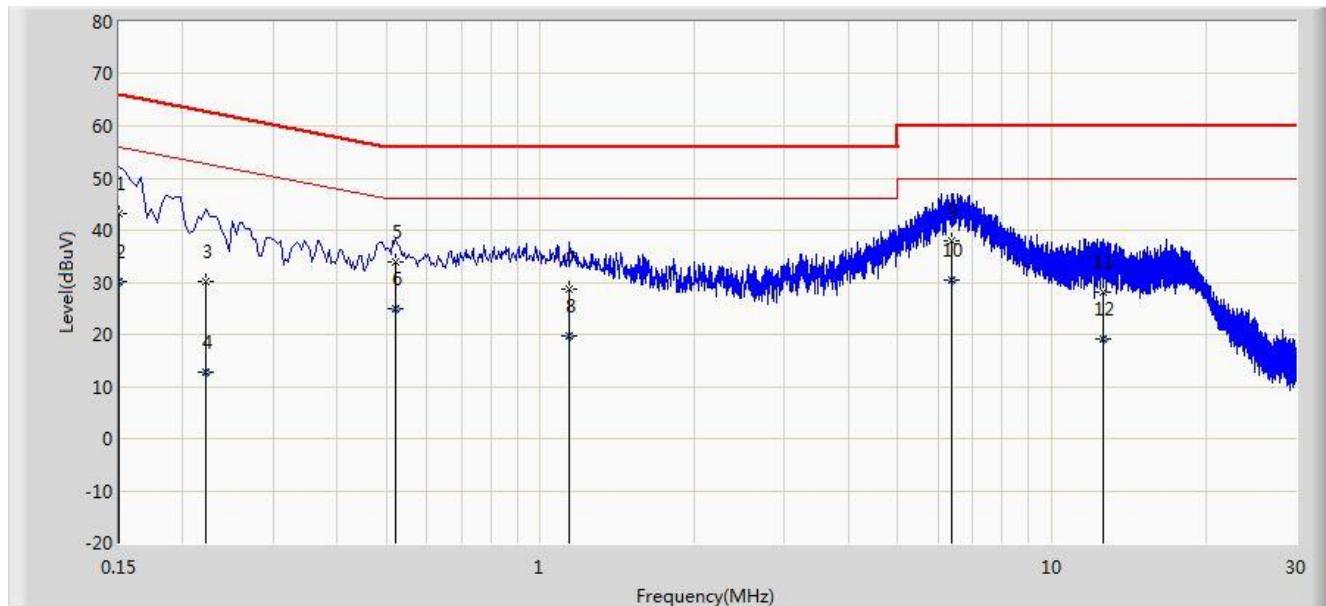


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	43.068	31.900	-22.932	66.000	11.168	QP
2			0.150	30.068	18.900	-25.932	56.000	11.168	AV
3			0.222	30.224	20.283	-32.520	62.744	9.941	QP
4			0.222	12.851	2.910	-39.893	52.744	9.941	AV
5			0.522	33.777	23.623	-22.223	56.000	10.155	QP
6			0.522	25.022	14.867	-20.978	46.000	10.155	AV
7			1.142	28.660	18.756	-27.340	56.000	9.904	QP
8			1.142	19.703	9.799	-26.297	46.000	9.904	AV
9			6.382	37.924	27.800	-22.076	60.000	10.124	QP
10	*		6.382	30.424	20.300	-19.576	50.000	10.124	AV
11			12.590	28.012	17.949	-31.988	60.000	10.063	QP
12			12.590	19.043	8.980	-30.957	50.000	10.063	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2017/03/31 - 14:31
Limit: FCC_Part15.207_CE_AC Power_ClassB	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Bluetooth Speaker	Power: By Battery
Note: Transmit by 2DH5 at channel 2480MHz	

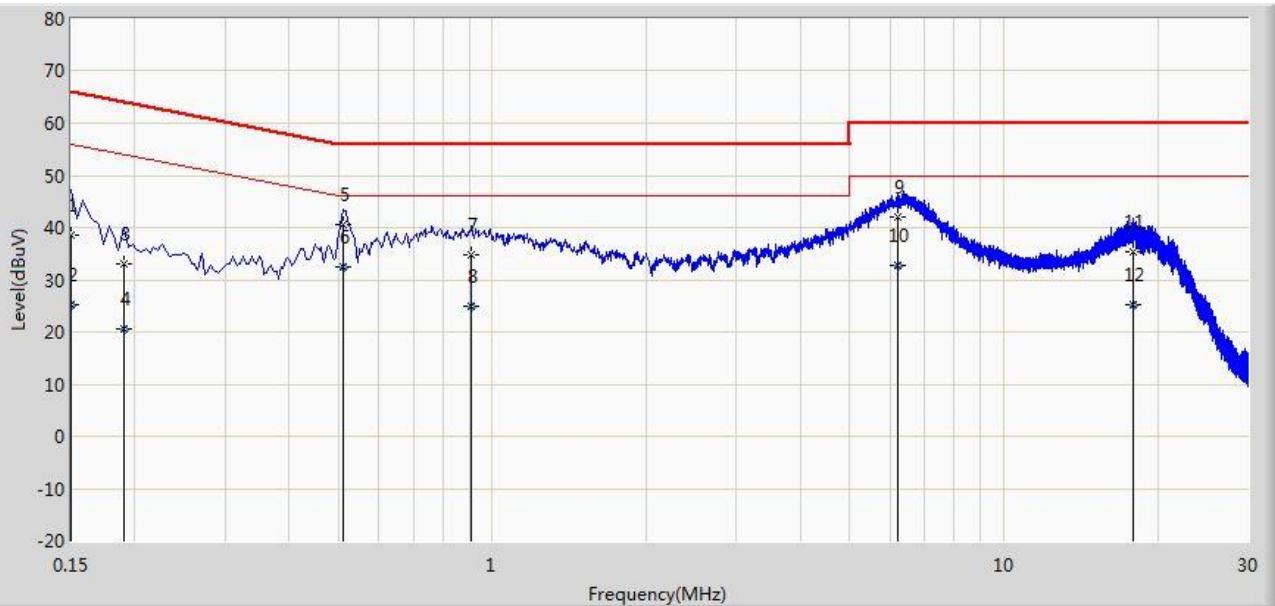

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.150	38.431	27.289	-27.569	66.000	11.142	QP
2			0.150	25.210	14.068	-30.790	56.000	11.142	AV
3			0.190	32.900	22.872	-31.137	64.037	10.028	QP
4			0.190	20.598	10.571	-33.438	54.037	10.028	AV
5			0.510	40.576	30.400	-15.424	56.000	10.176	QP
6	*		0.510	32.376	22.200	-13.624	46.000	10.176	AV
7			0.910	34.705	24.746	-21.295	56.000	9.959	QP
8			0.910	24.836	14.877	-21.164	46.000	9.959	AV
9			6.206	41.933	31.800	-18.067	60.000	10.133	QP
10			6.206	32.833	22.700	-17.167	50.000	10.133	AV
11			17.838	35.249	25.118	-24.751	60.000	10.132	QP
12			17.838	25.166	15.035	-24.834	50.000	10.132	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Bluetooth Speaker FCC ID: 2ACGOJ7** is in compliance with Part 15C of the FCC Rules.

The End
