

# FCC Part 15C

## Measurement and Test Report

### For

**Guangzhou Shangke Information Technology Co., LTD**  
**Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe**  
**District, Guangzhou, Guangdong, Province, China**

**FCC ID: 2ACGT-T100X**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>Wireless Power Bank</u>
<b>Tested Model:</b>	<u>T100X</u>
<b>Report No.:</b>	<u>STR18038126I</u>
<b>Tested Date:</b>	<u>2018-03-12 to 2018-03-30</u>
<b>Issued Date:</b>	<u>2018-04-04</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u>
<b>Prepared By:</b>	<p><b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
1.6 MEASUREMENT UNCERTAINTY .....	5
1.7 TEST EQUIPMENT LIST AND DETAILS .....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. RF EXPOSURE .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. ANTENNA REQUIREMENT .....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION .....	9
<b>5. CONDUCTED EMISSIONS .....</b>	<b>10</b>
5.1 TEST PROCEDURE.....	10
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	10
5.3 ENVIRONMENTAL CONDITIONS .....	10
5.4 TEST RECEIVER SETUP .....	11
5.5 SUMMARY OF TEST RESULTS/PLOTS .....	11
<b>6. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>	<b>14</b>
6.1 STANDARD APPLICABLE.....	14
6.2 TEST PROCEDURE.....	14
6.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
6.4 ENVIRONMENTAL CONDITIONS .....	15
6.5 SUMMARY OF TEST RESULTS/PLOTS .....	16
<b>7. 20DB EMISSION BANDWIDTH .....</b>	<b>20</b>
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 ENVIRONMENTAL CONDITIONS .....	20
7.4 SUMMARY OF TEST RESULTS/PLOTS .....	20

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Guangzhou Shangke Information Technology Co., LTD

Address of applicant: Room 1205-1212, R&F To-Win Building, No.30  
Huaxia Road, Tianhe District, Guangzhou,  
Guangdong, Province, China

Manufacturer: Guangzhou Shangke Information Technology Co., LTD

Address of manufacturer: Room 1205-1212, R&F To-Win Building, No.30  
Huaxia Road, Tianhe District, Guangzhou,  
Guangdong, Province, China

<b>General Description of EUT</b>	
Product Name:	Wireless Power Bank
Trade Name:	TECLAST
Model No.:	T100X
Adding Model:	WA10,WA20,WB10,WB20,WD10,WD20,WE10, WE20, WG10,WG20,WH10,WH20,WJ10,WJ20, WK10, WT20, WK20,WP10, WP20,WR10, WR20, WT10,WV10,WV20,WY10,WY20, WZ10,WZ20, TD01, TD02,TD03,TD04,TD05,TD06,TD07,TD08, TD09,TD10, E10, E11, E20, M10,M20,P10,P20, Z10,Z20,X10, X20,W10,W20,PA10,PA20, PB10, PB20,PC10, PC20,PD10,PD20, PE10,PE20, PF10, PF20, PG10, PG20,PH10,PH20,PI10,PI20, PL10, PL20
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model T100X, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Frequency Range:	112-205kHz
Antenna Type:	Coil Antenna
Rated Voltage:	DC 5V (Wireless output)
Rated Current:	<= 1A (Wireless output)
Rated Power:	<= 5W (Wireless output)

## 1.2 Test Standards

The following report is prepared on behalf of the Guangzhou Shangke Information Technology Co., LTD. in accordance with Part 15.207, 15.209, RSS-Gen Issue 4 and RSS-216 Issue 2 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.207, 15.209 and RSS-Gen Issue 4 and RSS-216 Issue 2 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging+Discharging	Wireless Output

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.25	Shielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter Power	/	A70-501500	/
iPhone X	Apple	MQA52ZP/A	/

Accessories Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty			
Parameter	Conditions	Uncertainty	
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$	
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$	

## 1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2017-06-12	2018-06-11
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-12	2018-06-11
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
Loop Antenna	ETS-LINDGREN	6502	00071730	2017-06-08	2018-06-07
Receiver	R&S	ESCI	100435	2017-06-08	2018-06-07
Spectrum Analyzer	R&S	FSP40	100416	2017-06-08	2018-06-07

## 2. SUMMARY OF TEST RESULTS

---

Description of Test	Result
§ 15.207(a) Conducted Emission	Compliant
§ 15.209(a) Radiated Emission	Compliant
§ 15.215 20dB Emission Bandwidth	Compliant

N/A: not applicable

### 3. RF Exposure

---

#### 3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### 3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## 4. Antenna Requirement

---

### 4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 4.2 Evaluation Information

This product has a Coil antenna, fulfill the requirement of this section.


## 5. Conducted Emissions

### 5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 5.2 Basic Test Setup Block Diagram

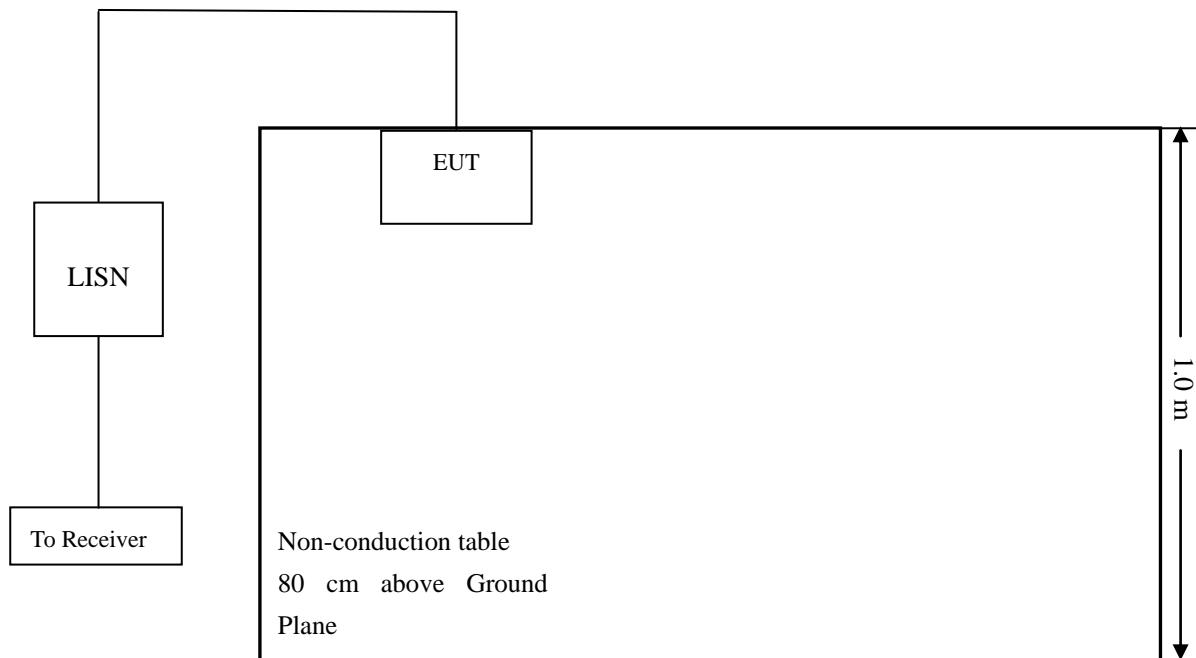

### 5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 5.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal

## 5.5 Summary of Test Results/Plots

According to the data in section 5.5, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

**-8.47 dB at 0.1700 MHz** in the **Neutral, QP** detector, 0.15-30MHz


**Plot of Conducted Emissions Test Data**

 EUT: *Wireless Power Bank*

 Tested Model: *T100X*


 Operating Condition: *TM1*

 Comment: *AC 120V/60Hz*

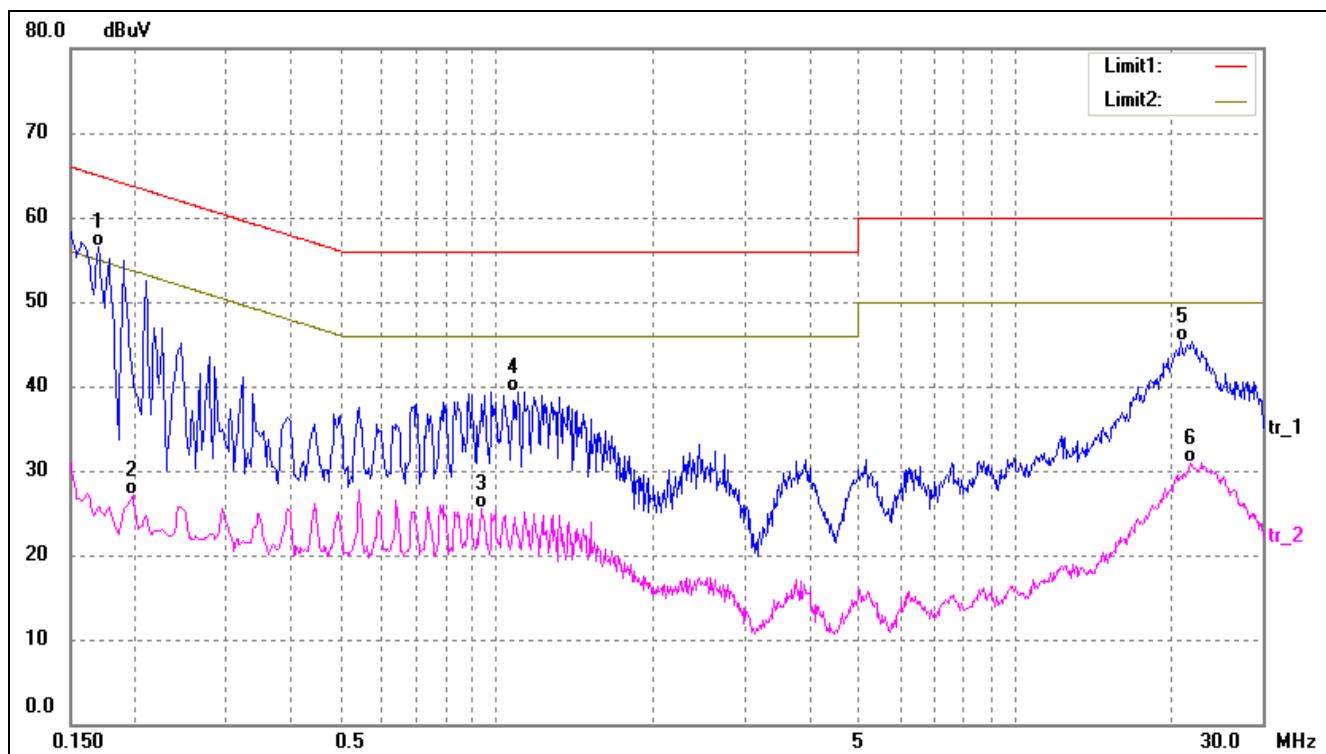 Test Specification: *Neutral*


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	46.66	9.83	56.49	64.96	-8.47	QP
2	0.1980	17.27	9.80	27.07	53.69	-26.62	AVG
3	0.9340	15.81	9.77	25.58	46.00	-20.42	AVG
4	1.0980	29.59	9.76	39.35	56.00	-16.65	QP
5	20.8780	35.72	9.68	45.40	60.00	-14.60	QP
6	21.7460	21.27	9.68	30.95	50.00	-19.05	AVG

Test Specification: Line

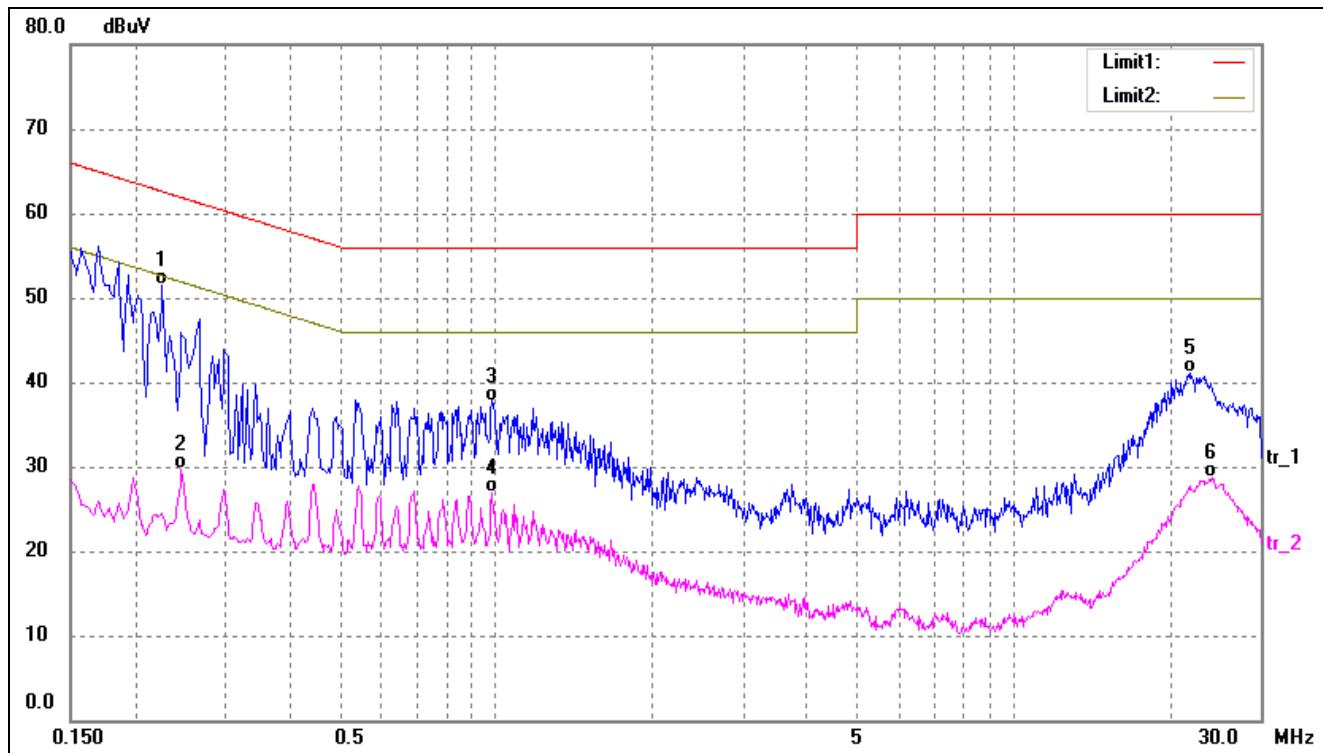

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2260	41.69	9.80	51.49	62.60	-11.11	QP
2	0.2460	19.81	9.80	29.61	51.89	-22.28	AVG
3	0.9820	28.04	9.76	37.80	56.00	-18.20	QP
4	0.9820	17.12	9.76	26.88	46.00	-19.12	AVG
5	21.9940	31.48	9.68	41.16	60.00	-18.84	QP
6	24.2220	19.09	9.69	28.78	50.00	-21.22	AVG

## 6. Field Strength of Spurious Emissions

### 6.1 Standard Applicable

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	24000/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

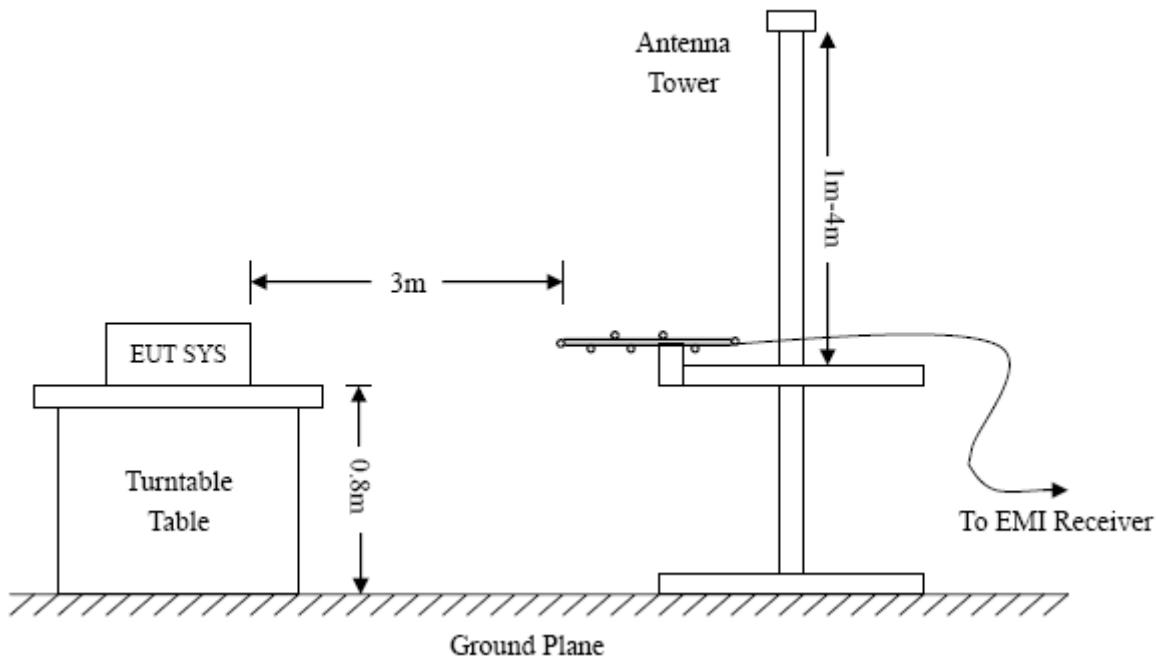

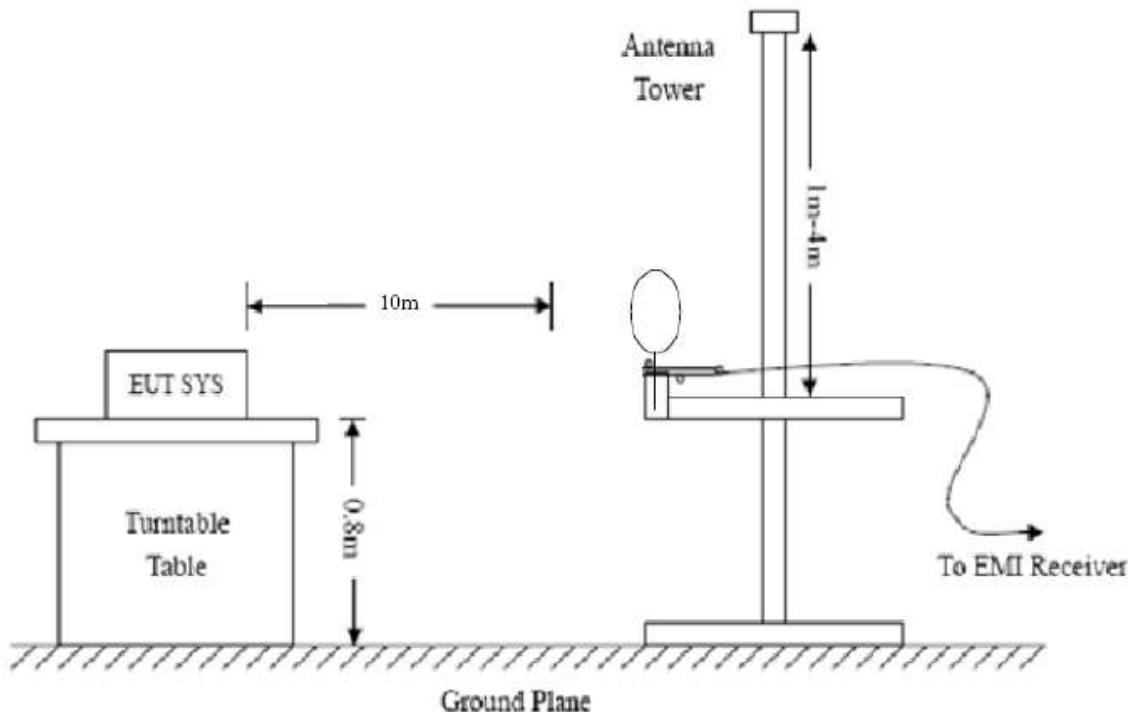

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 6.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 6.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 6. Reference Measurement at open field site

The measurement was performed with set-up consisting of a single turn loop antenna with a diameter of 0.15 m, feeded by a signal generator. The loop dimension was chosen to simulate the EUT as far as possible. The signal generator was set to a fixed output level with an unmodulated 10 kHz and 14 kHz sinusoidal signal.

The radiated H fieldstrength at 10 kHz and 14 kHz generated by this set-up was measured with the same test setup as used in the SAC in 3 m distance first, and then repeated at the open field site in 3 m and 10 m distance

### 6.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.209(a) standards, and had the worst cases:

**-8.28dB at 59.0251 MHz in the Vertical polarization QP detector, 9kHz to 1 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiated Emissions Test Data ( Below 1GHz)**


EUT: Wireless Power Bank

Tested Model: T100X

Operating Condition: TM1

Comment: AC 120V/60Hz

Test Specification: Worst case EUT X axis

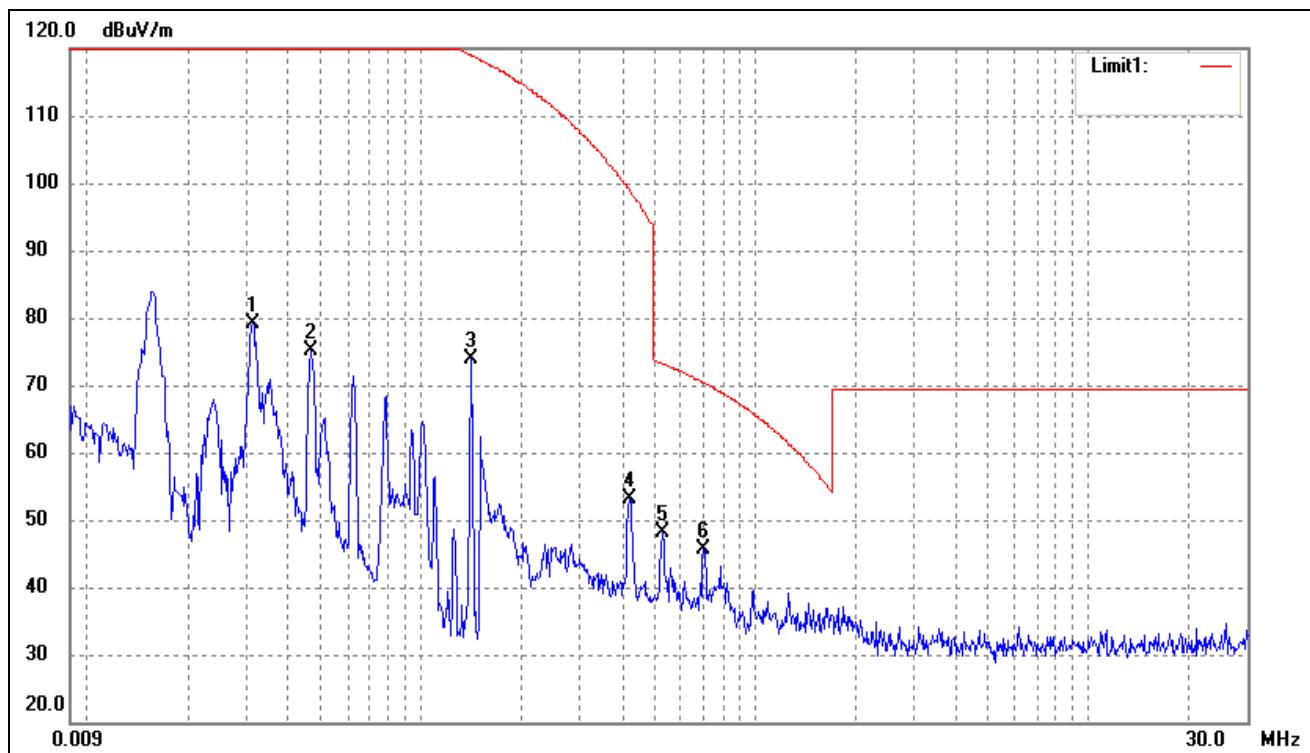

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0313	87.57	-8.38	79.19	126.89	-47.70	274	100	peak
2	0.0471	83.66	-8.45	75.21	125.75	-50.54	92	100	peak
3	0.1409	82.57	-8.74	73.83	118.98	-45.15	254	100	peak
4	0.4215	61.99	-8.89	53.10	98.74	-45.64	114	100	peak
5	0.5265	57.10	-8.91	48.19	73.21	-25.02	314	100	peak
6	0.7010	54.59	-8.94	45.65	70.38	-24.73	164	100	peak

**Plot of Radiated Emissions Test Data ( Above 1GHz)**


*EUT:* Wireless Power Bank

*Tested Model:* T100X

*Operating Condition:* TM1


*Comment:* AC 120V/60Hz

*Test Specification:* Horizontal

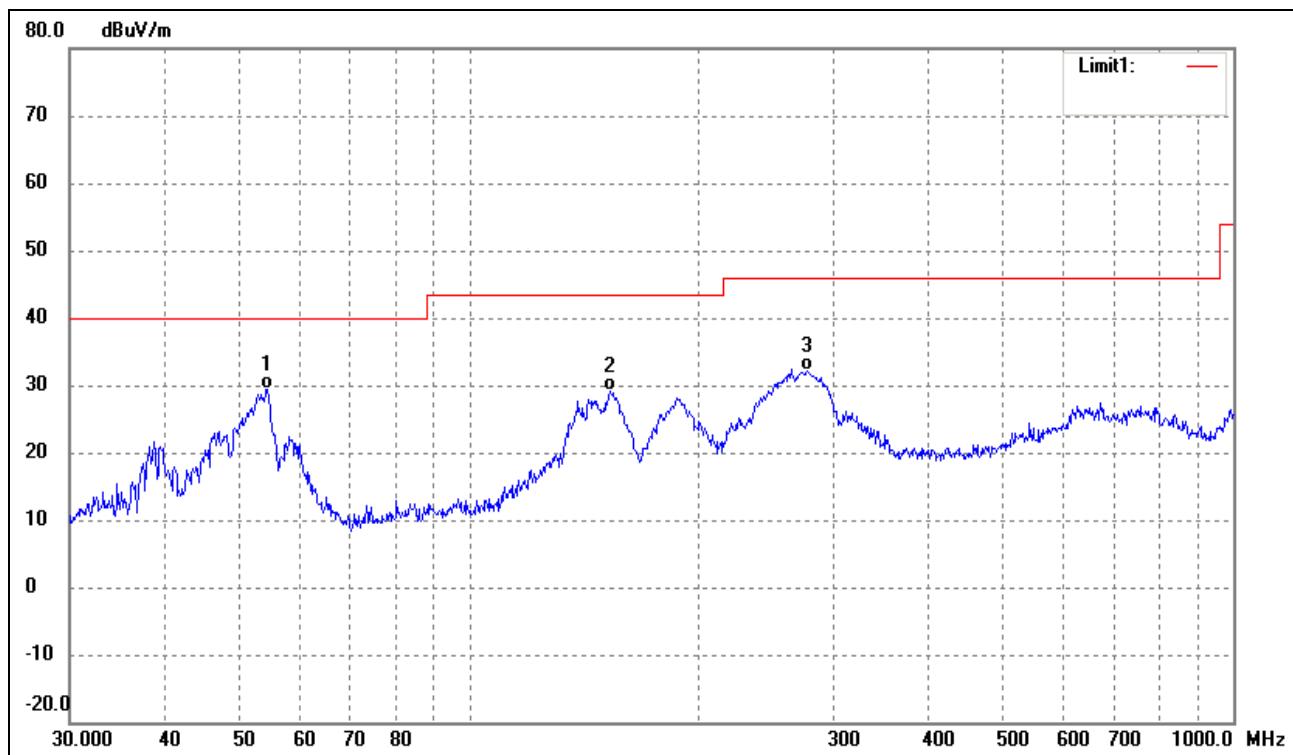

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	54.4516	47.76	-18.41	29.35	40.00	-10.65	213	100	QP
2	152.6641	49.71	-20.59	29.12	43.50	-14.38	317	100	QP
3	277.0935	44.56	-12.31	32.25	46.00	-13.75	54	100	QP

Test Specification: Vertical

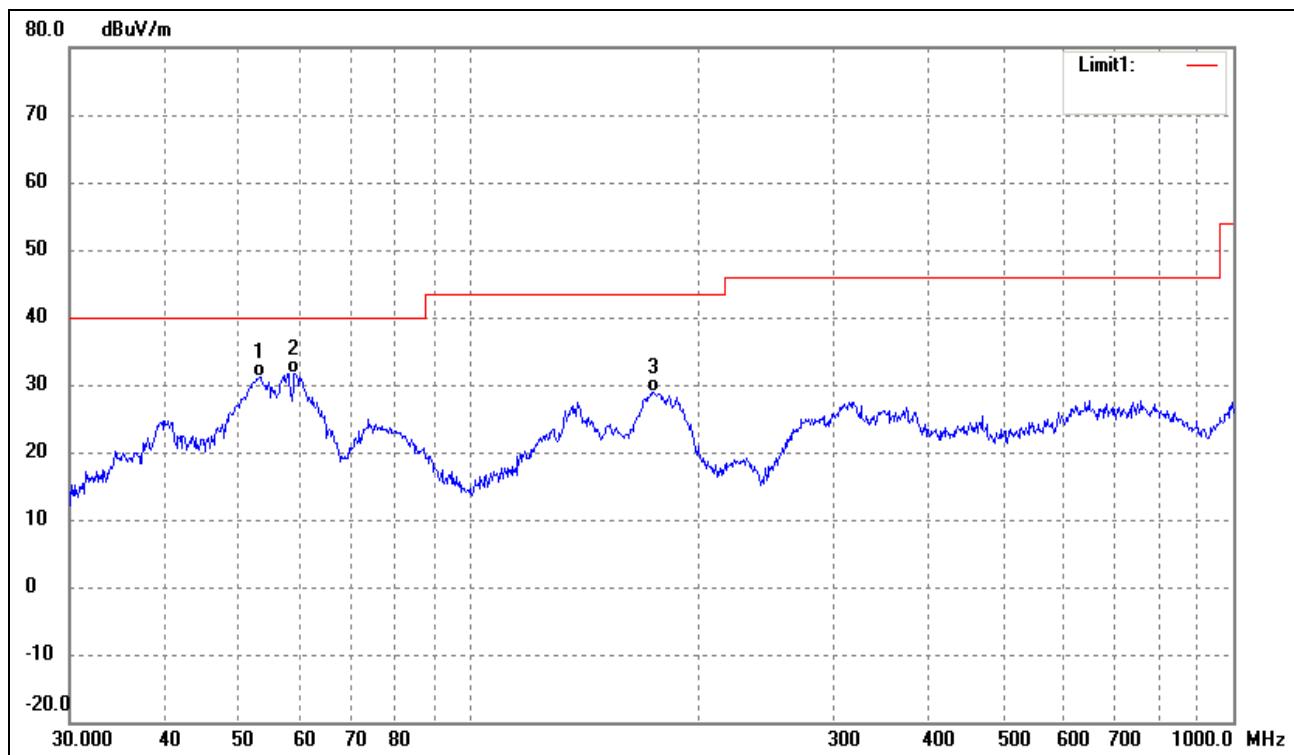

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	53.1313	49.61	-18.46	31.15	40.00	-8.85	170	100	QP
2	59.0251	49.96	-18.24	31.72	40.00	-8.28	186	100	QP
3	174.4241	50.11	-21.13	28.98	43.50	-14.52	76	100	QP

## 7. 20dB Emission bandwidth.

### 7.1 Standard Applicable

According to 15.215,20dB emission bandwidth.

### 7.2 Test Procedure


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

### 7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 7.4 Summary of Test Results/Plots

Test Channel(kHz)	20dB Emission Bandwidth(kHz)
172.25	3.505

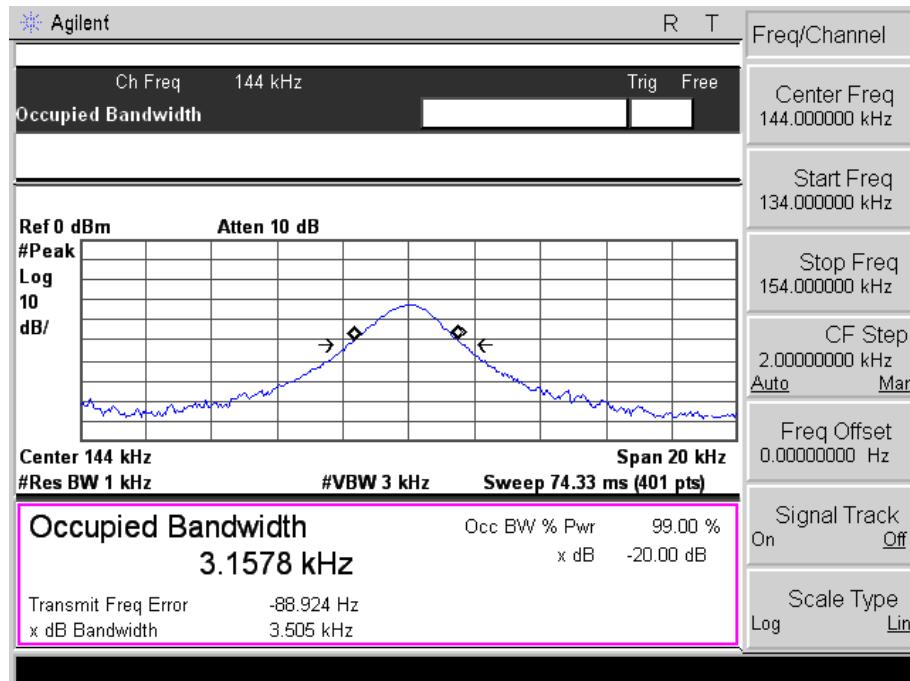

\*\*\*\*\* END OF REPORT \*\*\*\*\*