



東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

Electrical Properties

Frequency	2400-2500MHz 5150-5850MHz
Impedance	50 Ohm Nominal
VSWR	2.0MAX
Gain	2.98 dBi(Max.) for 2.4G Band and 5.49dBi(Max.) for 5G Band
Connector	Cable
Radiation	Omni-Directional


Physical Properties


Antenna mast	FPC
Operating Temp.	-40 ~ +85 °C
Antenna Color	Grey



东莞市仕研电子通讯有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

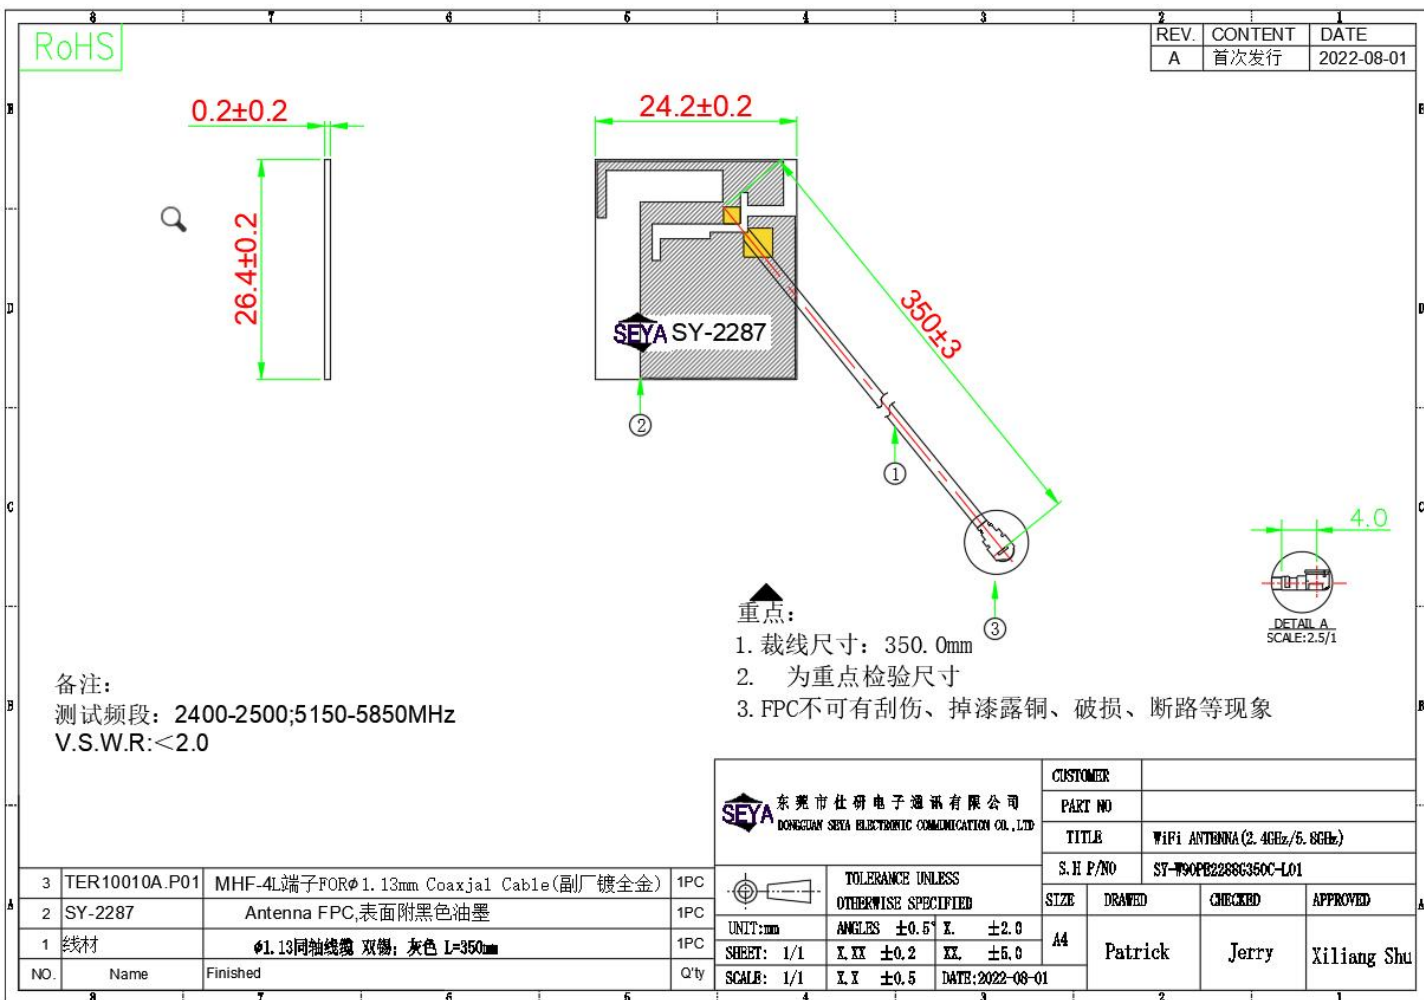


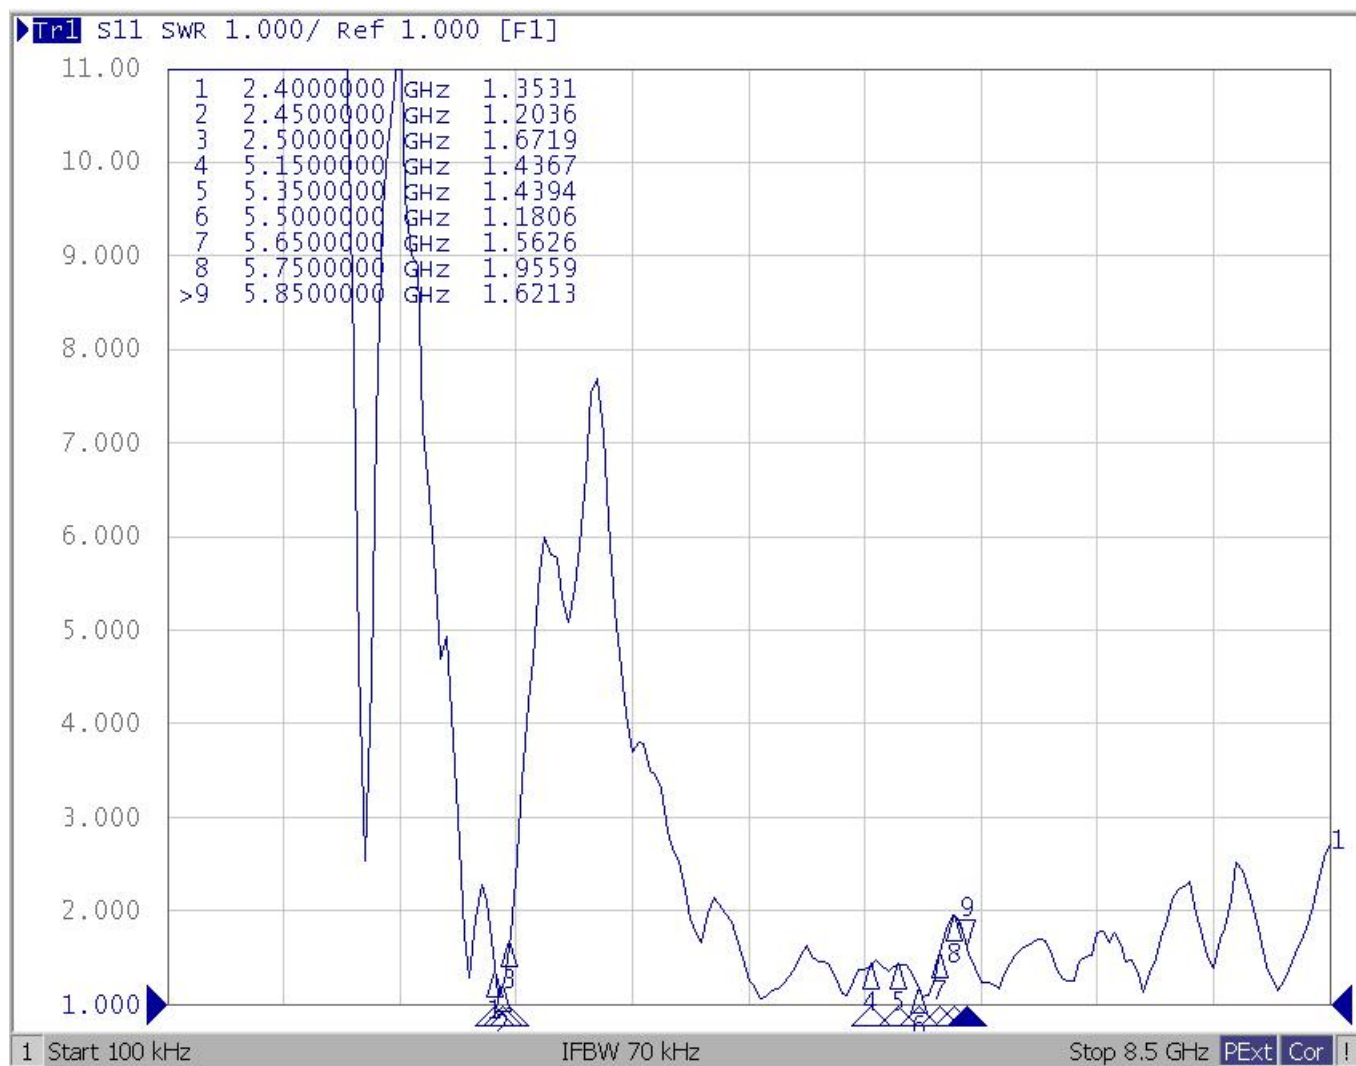



GAIN

2D/3D

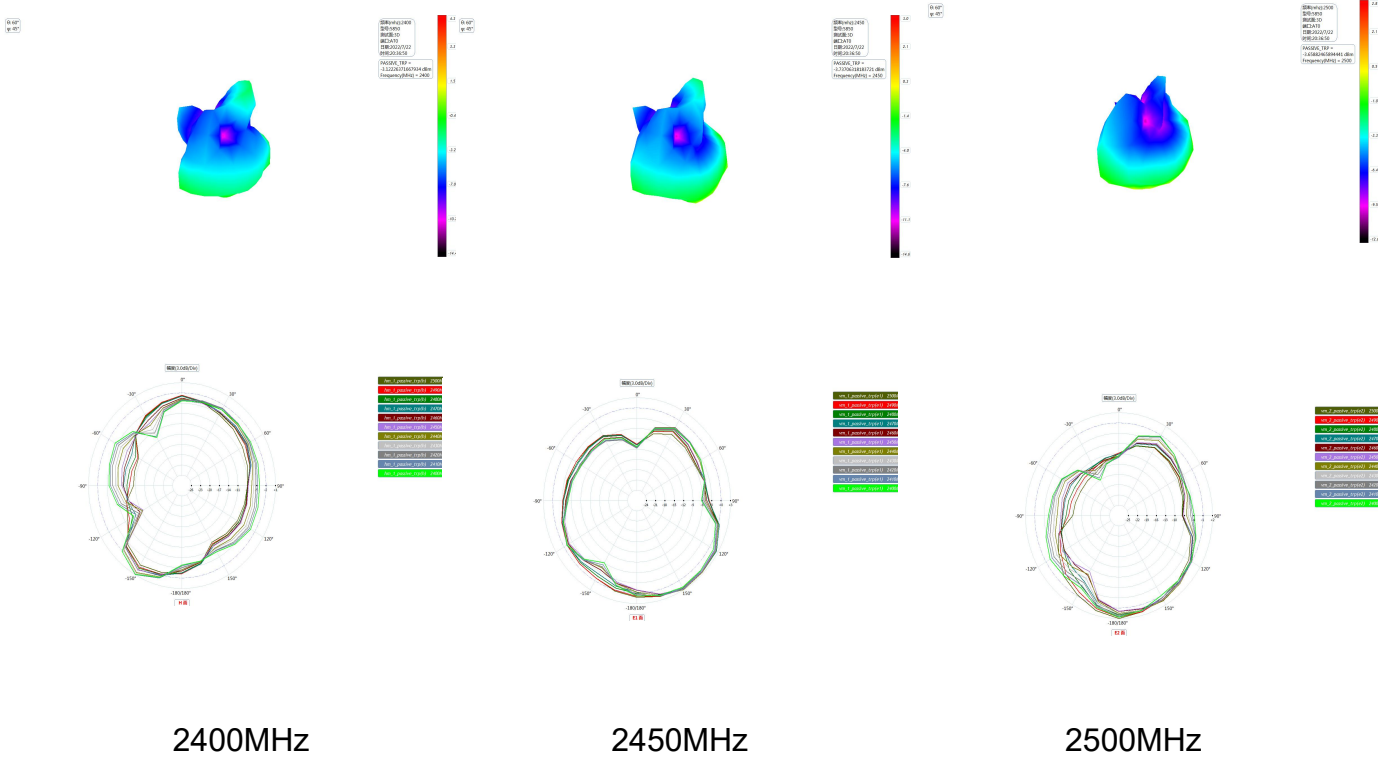




東莞市仕研電子通訊有限公司
DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

GAIN

2D/3D

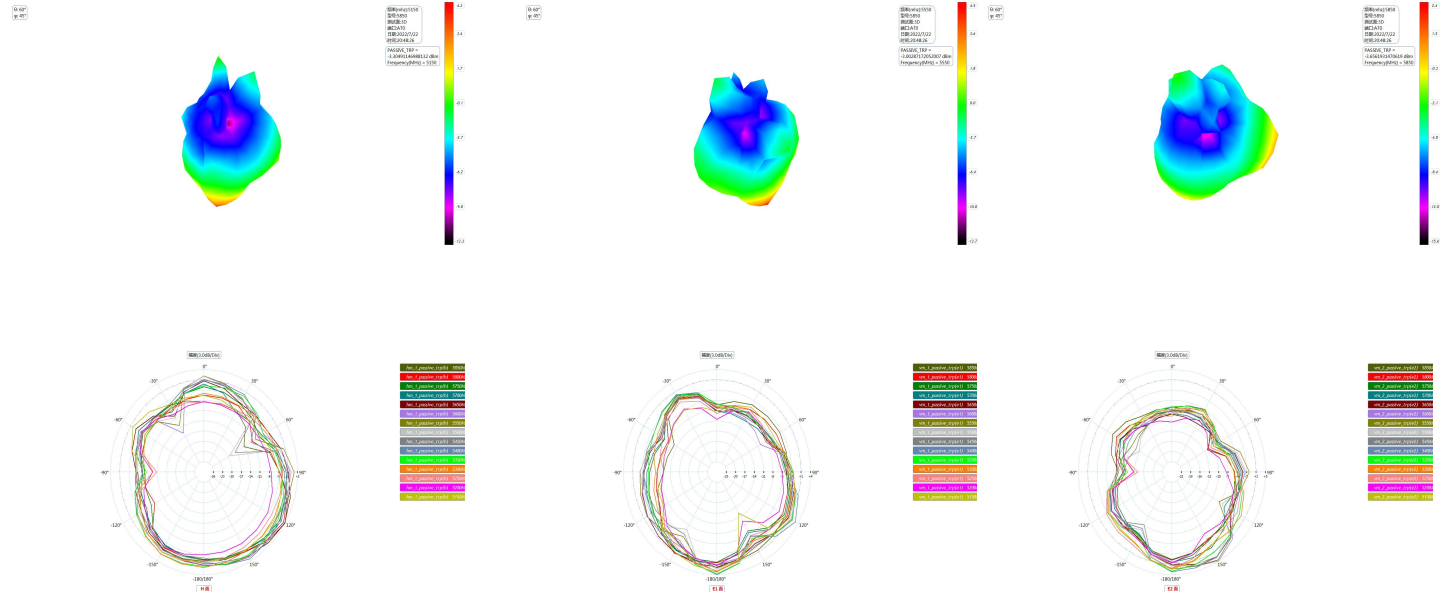

5150MHz

5500MHz

5850MHz



東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

GAIN

Passive data

Freq (MHz)	Effi (%)	Gain (dBi)
2400	48.75	2.26
2450	42.27	2.98
2500	43.05	2.83
5150	52.77	4.29
5350	54.20	5.49
5500	50.12	4.54
5650	51.88	4.02
5750	46.89	1.92
5850	53.05	2.42