

Report No.: AGC01806140401FE03 Page 1 of 62

# **FCC Test Report**

Report No.: AGC01806140401FE03

FCC ID : 2ACGYM2318EC

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: GSM Mobile Phone

**BRAND NAME** : Enspire

MODEL NAME : M2318EC

**CLIENT**: PACFEVERY S.A

**DATE OF ISSUE** : May 16, 2014

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 62

### **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 16, 2014	Valid	Original Report

#### **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.3. LIMITS AND MEASUREMENT RESULTS	19
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
9.3. MEASUREMENT EQUIPMENT USED	26
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP	37

10.3. TEST RESULT	38
11. BAND EDGE EMISSION	42
11.1. MEASUREMENT PROCEDURE	42
11.2. TEST SET-UP	42
11.3. TEST RESULT	43
12. NUMBER OF HOPPING FREQUENCY	46
12.1. MEASUREMENT PROCEDURE	47
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	47
12.3. MEASUREMENT EQUIPMENT USED	47
12.4. LIMITS AND MEASUREMENT RESULT	47
13. TIME OF OCCUPANCY (DWELL TIME)	48
13.1. MEASUREMENT PROCEDURE	48
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	48
13.3. MEASUREMENT EQUIPMENT USED	48
13.4. LIMITS AND MEASUREMENT RESULT	48
14. FREQUENCY SEPARATION	51
14.1. MEASUREMENT PROCEDURE	51
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	51
14.3. MEASUREMENT EQUIPMENT USED	51
14.4. LIMITS AND MEASUREMENT RESULT	51
15. FCC LINE CONDUCTED EMISSION TEST	52
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST	52
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	52
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	53
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	53
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	54
N/AAPPENDIX A: PHOTOGRAPHS OF TEST SETUP	56
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	56
ADDENDIV D. DUOTOGDADUS OF FUT	57

Page 5 of 62

#### 1. VERIFICATION OF CONFORMITY

PACFEVERY S.A
Av. Malecón Simón Bolívar 2104 Guayaquil-Ecuador
China SUM Company Limited
Floor 2 <sup>nd</sup> , Block C, HuangJinShan ShanHai Commerial Plaza, BanTian, LongGuang District, ShenZhen, 518000, China
GSM Mobile Phone
Enspire
M2318EC
May 05, 2014 to May 14, 2014
None
Normal
AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By

Matt Zhang May 16, 2014

Checked By

Kidd Yang May 16, 2014

Authorized By

Solger Zhang May 16, 2014

Page 6 of 62

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is "GSM Mobile Phone" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

	•
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.09dBm(Max)
Bluetooth Version	V 2.1+EDR
Modulation	GFSK, π /4-DQPSK, 8DPSK
Number of channels	79
Hardware Version	C188_MB_V1.11
Software Version	N/A
Antenna Designation	Integrated Antenna
Antenna Gain	0.8 dBi
Power Supply	DC3.7V by Battery

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	:	:	
	38	2440 MHZ	
2400~2483.5MHZ	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

Page 7 of 62

#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

Page 8 of 62

#### 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ACGYM2318EC** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 9 of 62

#### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal Hopping

#### Note:

<sup>1.</sup> All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report, if no other cases.


<sup>2.</sup> For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Report No.: AGC01806140401FE03 Page 10 of 62

#### **5. SYSTEM TEST CONFIGURATION**

#### **5.1. CONFIGURATION OF EUT SYSTEM**

Configuration:



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	GSM Mobile Phone	M2318EC	FCC ID: 2ACGYM2318EC	EUT
2	Adapter	M2318EC	DC5.0V / 500mA	Accessory
3	Battery	Sb-2056	DC3.7V/ 800 mAh	Accessory
4	Earphone	M2318EC	N/A	Accessory
5	USB Cable	M2318EC	N/A	Accessory

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

Page 11 of 62

#### **6. TEST FACILITY**

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.		

### **ALL TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/17/2013	07/16/2014
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/17/2013	07/16/2014
Amplifier	EM	EM30180	0607030	02/27/2014	02/26/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/17/2013	07/16/2014
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/17/2013	07/16/2014
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/07/2013	06/06/2014
LISN	R&S	ESH3-Z5	8389791009	07/17/2013	07/16/2014
Loop Antenna	Daze	ZN30900N	SEL0097	07/17/2013	07/16/2014
Isolation Transformer	LETEAC	LTBK		07/17/2013	07/16/2014

Page 12 of 62

#### 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 4. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 5. Record the maximum power from the Spectrum Analyzer.


#### For average power test:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to power probe through an RF attenuator.
- 3. Connect the power probe to the PC.
- 4. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 5. Record the maximum power from the software.
- 6. The maximum peak power shall be less 125mW (21dBm).


Note: The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.

#### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### **PEAK POWER TEST SETUP**

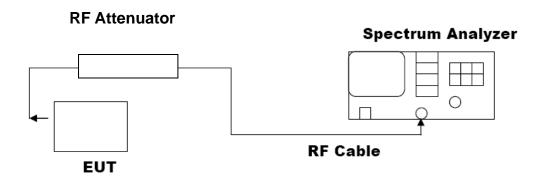


#### **AVERAGE POWER SETUP**




Page 13 of 62


#### 7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION						
Frequency (GHz)	Pass or Fail					
2.402	0.38	2.39	21	Pass		
2.441	1.08	3.09	21	Pass		
2.480	1.08	3.09	21	Pass		

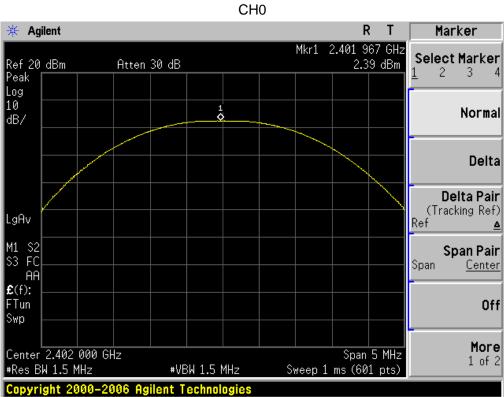


CH39

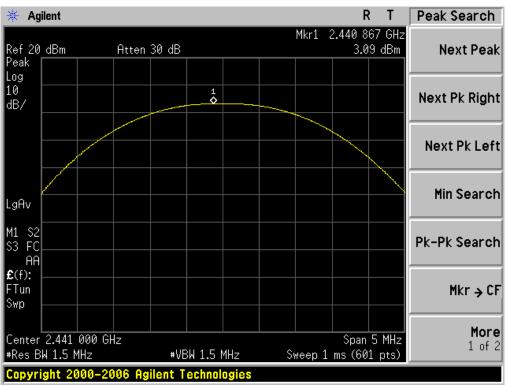

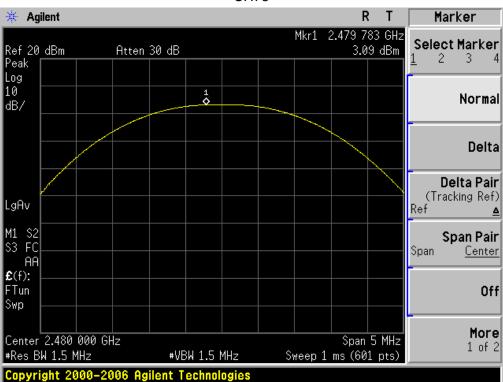



Page 15 of 62

	PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION			
Frequency (GHz)  Average Power (dBm)  Peak Power Applicable Limits (dBm)  Pass or Fail				Pass or Fail
2.402	-0.49	1.52	21	Pass
2.441	0.25	2.26	21	Pass
2.480	0.19	2.2	21	Pass

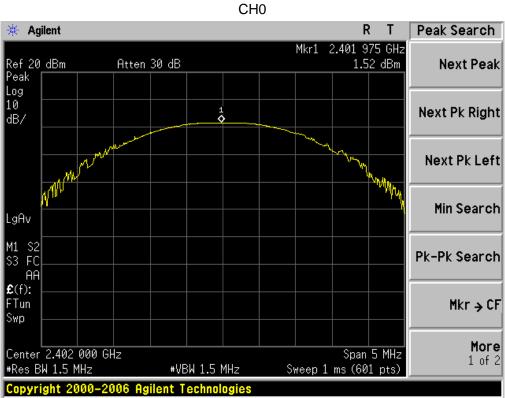


**CH39** 

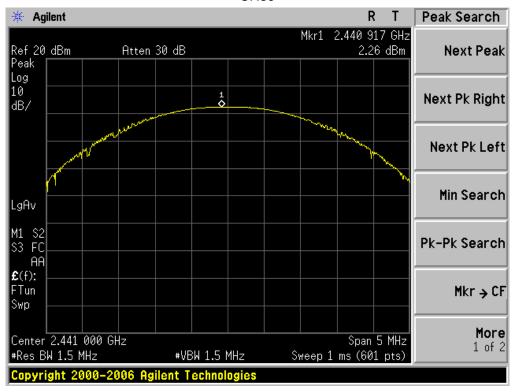

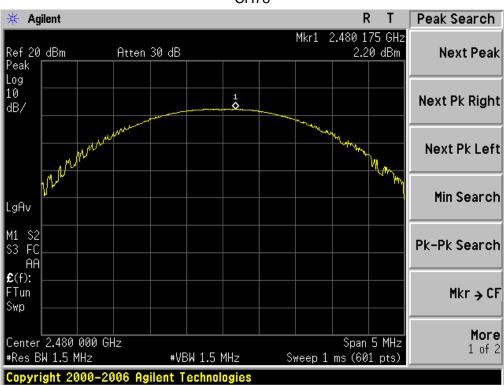



Report No.: AGC01806140401FE03 Page 17 of 62

PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION				
Frequency Average Power Peak Power Applicable Limits Pass or Fail (dBm) (dBm)				
2.402	-0.49	1.52	21	Pass
2.441	0.2	2.21	21	Pass
2.480	0.24	2.25	21	Pass

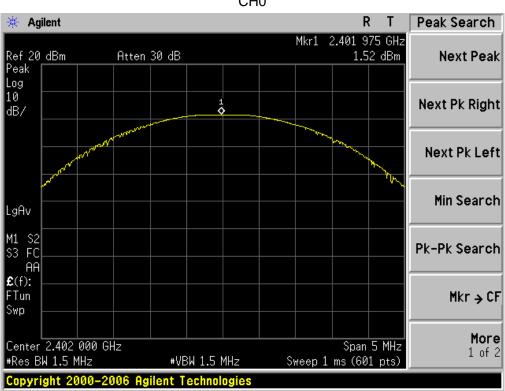

**CH39** 

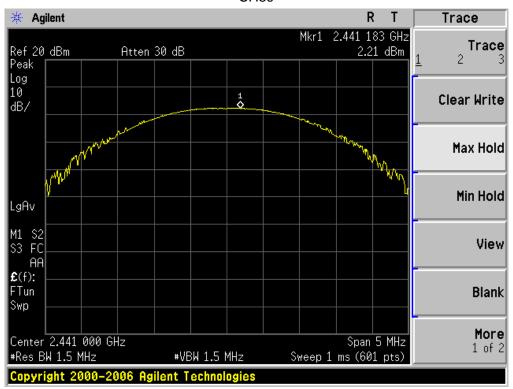

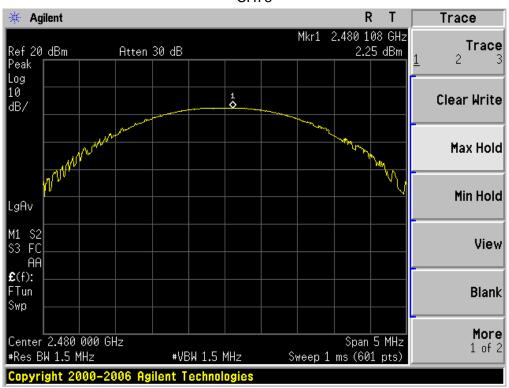


Page 19 of 62

#### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 5. Set SPA Trace 1 Max hold, then View.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

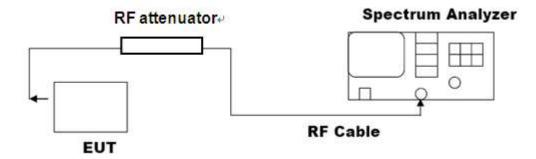


#### **8.3. LIMITS AND MEASUREMENT RESULTS**

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.761	PASS
	Middle Channel	0.768	PASS
	High Channel	0.769	PASS

Page 20 of 62

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

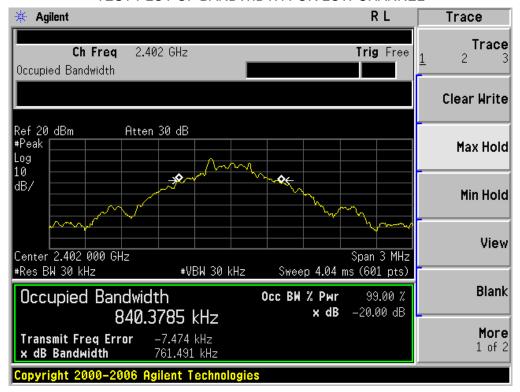


#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 21 of 62

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

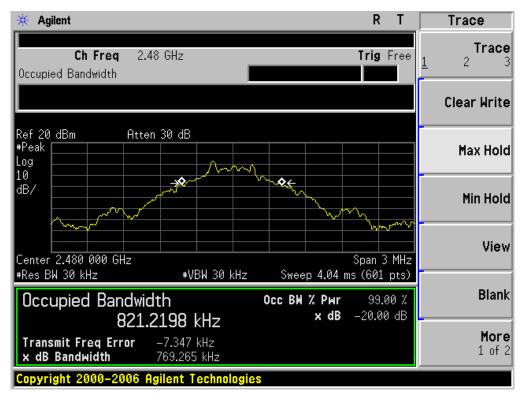

Report No.: AGC01806140401FE03 Page 22 of 62


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.118	PASS
	Middle Channel	1.119	PASS
	High Channel	1.117	PASS

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Page 23 of 62

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

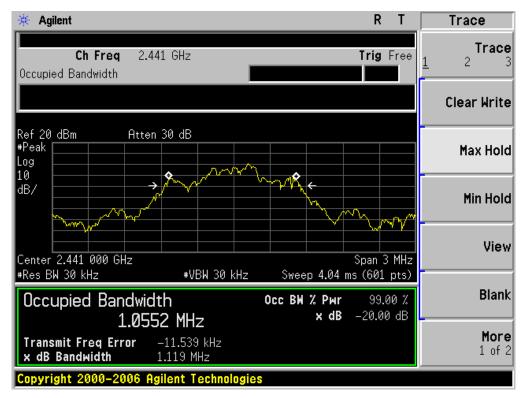

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Report No.: AGC01806140401FE03 Page 24 of 62

BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Da	ta (MHz)	Criteria
N/A	Low Channel	1.129	PASS
	Middle Channel	1.153	PASS
	High Channel	1.150	PASS

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 25 of 62

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

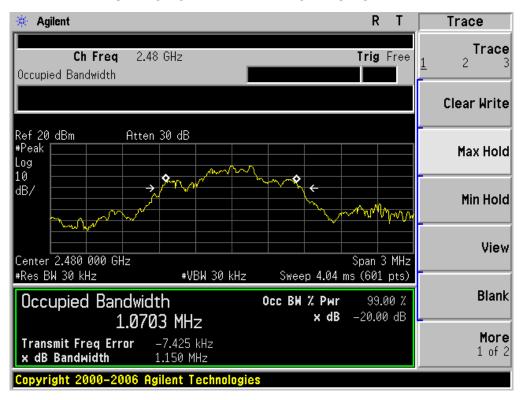

Page 26 of 62

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6


#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT			
Analia alda di mita	Measurement Result		
Applicable Limits	Test Data	Criteria	
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit		
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS	
intentional radiator is operating, the radio frequency	Channel		
power that is produce by the intentional radiator			
shall be at least 20 dB below that in 100KHz			
bandwidth within the band that contains the highest			
level of the desired power.	At least -20dBc than the limit	DACC	
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS	
restricted bands, as defined in §15.205(a), must also			
comply with the radiated emission limits specified			
in§15.209(a))			


Page 27 of 62

### TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

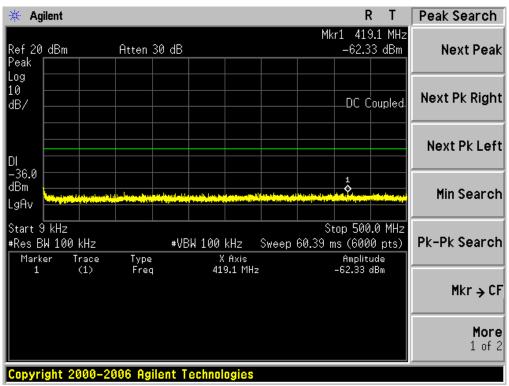


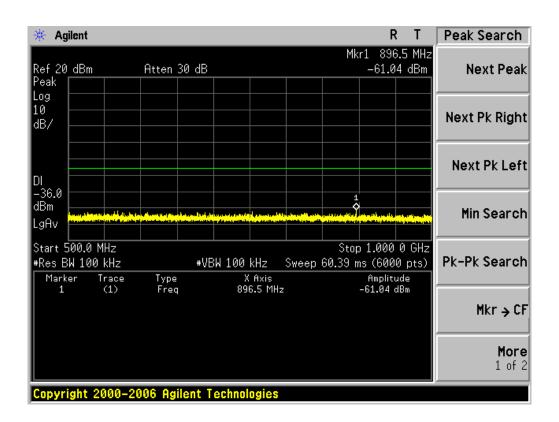

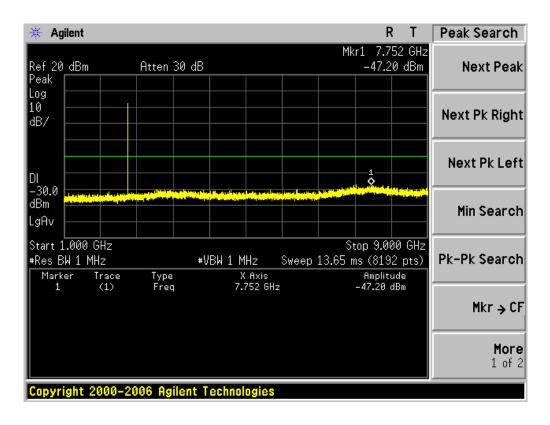


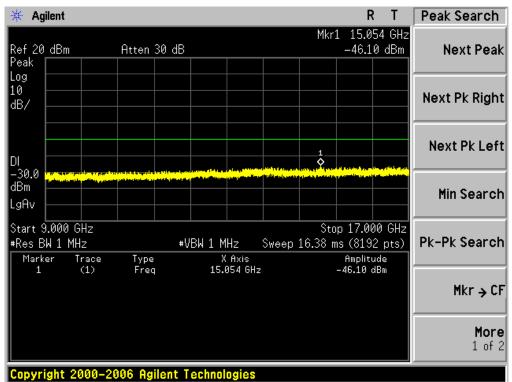



Report No.: AGC01806140401FE03 Page 29 of 62

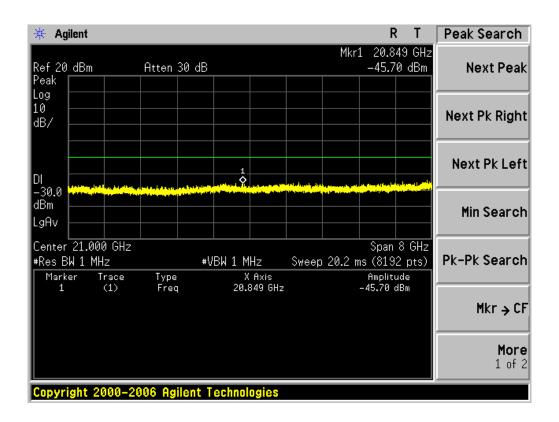


### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

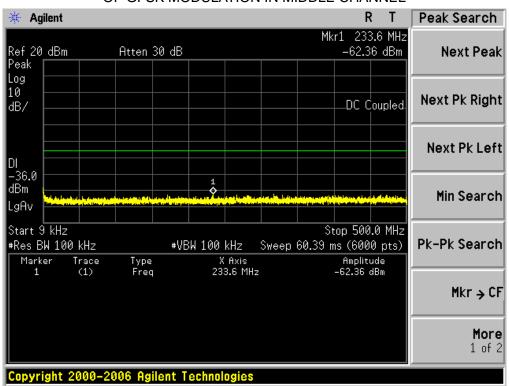


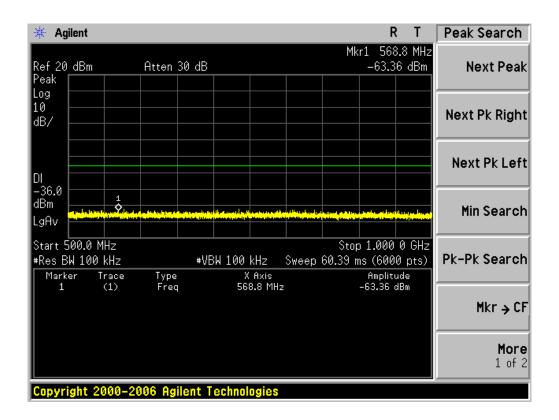

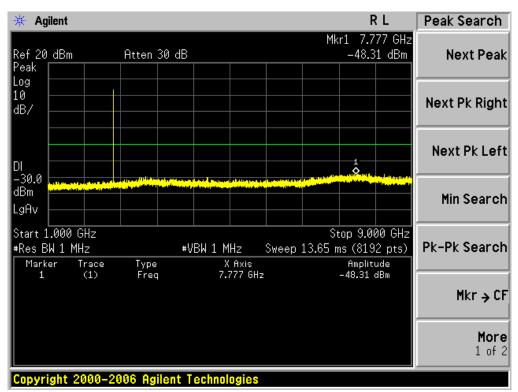


Report No.: AGC01806140401FE03 Page 31 of 62

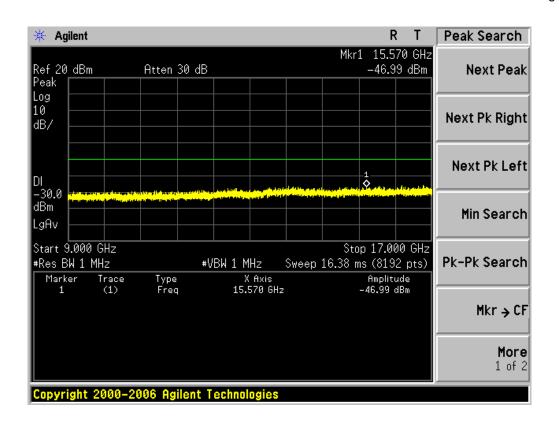


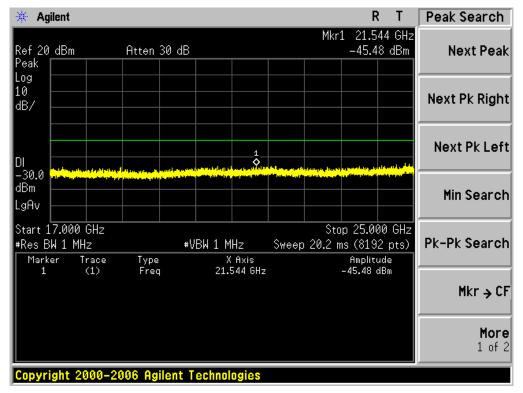



Page 32 of 62

## TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

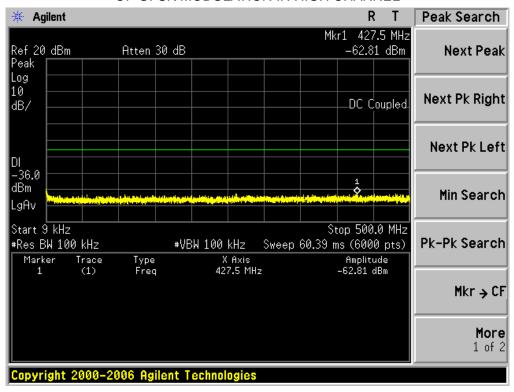


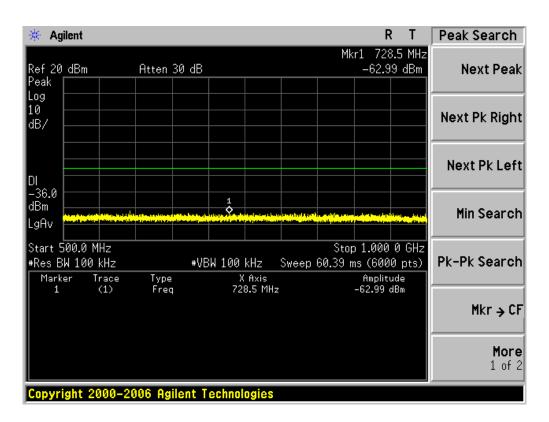

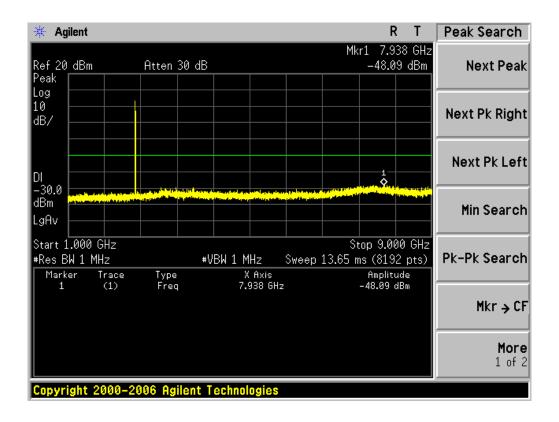

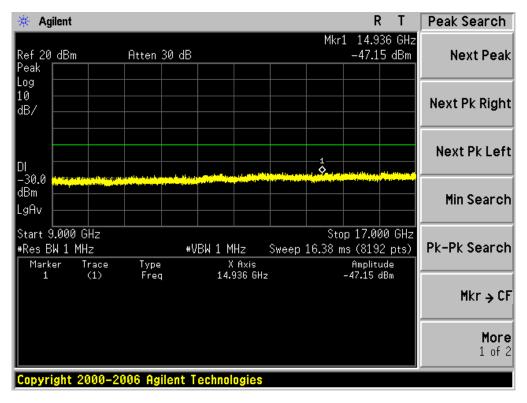

Page 34 of 62

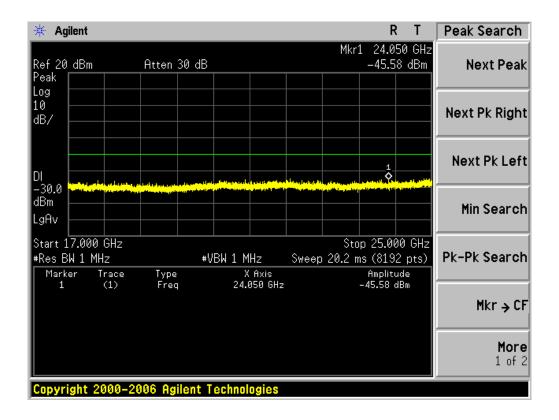

Page 35 of 62

#### 10. RADIATED EMISSION

#### 10.1. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC01806140401FE03 Page 36 of 62

The following table is the setting of spectrum analyzer and receiver.


3 3 7			
Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC01806140401FE03 Page 37 of 62

#### 10.2. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

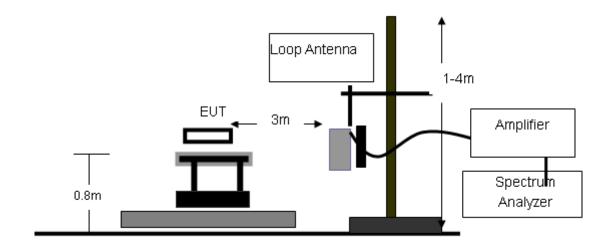

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

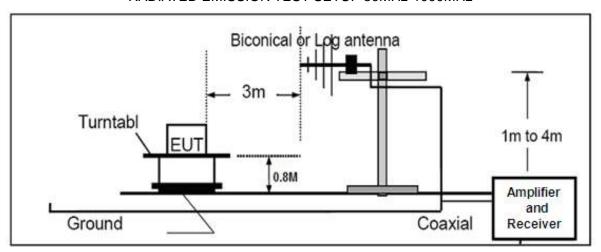

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

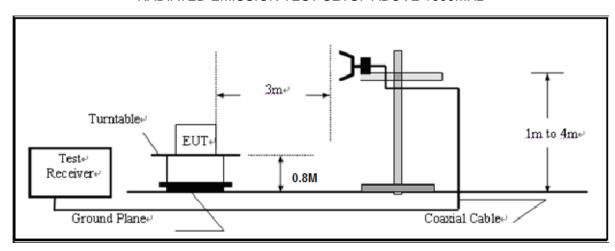


Page 38 of 62

#### 10.3. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION BELOW 1GHZ-Horizontal

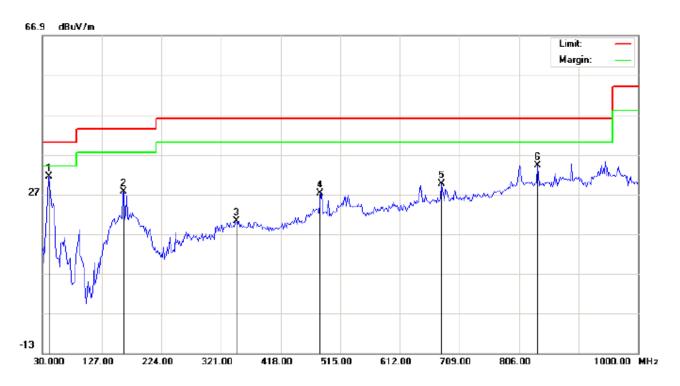

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: GSM Mobile Phone

M/N: M2318EC

Mode: High Channel GFSK

Note:

Polarization: Horizontal Temperature: 26
Power: AC 120V/60Hz Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	41.3166	22.51	8.81	31.32	40.00	-8.68	peak			
2		162.5666	12.36	15.17	27.53	43.50	-15.97	peak			
3		346.8666	1.62	18.53	20.15	46.00	-25.85	peak			
4		482.6666	6.23	20.94	27.17	46.00	-18.83	peak			
5		679.8999	5.05	24.65	29.70	46.00	-16.30	peak			
6		836.7166	6.96	27.31	34.27	46.00	-11.73	peak			


**RESULT: PASS** 

Temperature: 26

Humidity: 60 %

Page 39 of 62

#### **RADIATED EMISSION BELOW 1GHZ-Vertical**

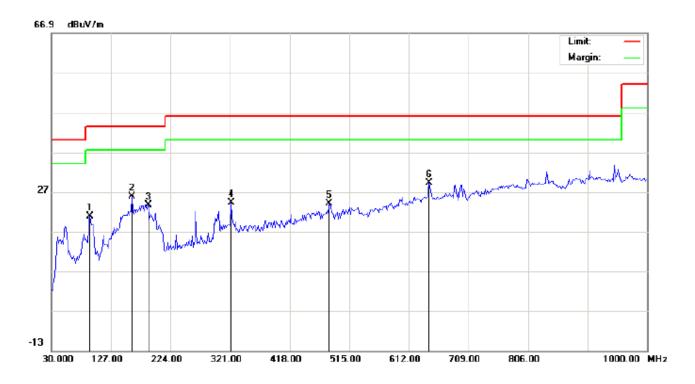

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: GSM Mobile Phone

M/N: M2318EC

Mode: High Channel GFSK

Note:

		F	Deeding	Fastas	M	1::4	0		Antenna	Table	
No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Height	Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		93.0498	11.05	9.72	20.77	43.50	-22.73	peak			
2		160.9499	10.70	15.13	25.83	43.50	-17.67	peak			
3		188.4333	12.22	11.46	23.68	43.50	-19.82	peak			
4		322.6166	7.21	16.92	24.13	46.00	-21.87	peak			
5		482.6666	3.01	20.94	23.95	46.00	-22.05	peak		·	
6	*	644.3333	5.32	23.84	29.16	46.00	-16.84	peak			

Polarization:

Power:

Distance:

Vertical

AC 120V/60Hz


#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 40 of 62

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) -Horizontal

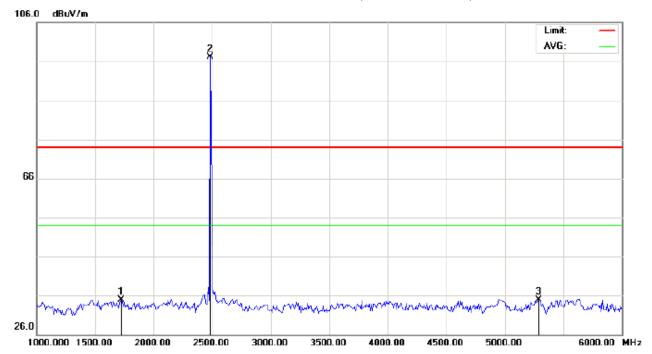

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: GSM Mobile Phone Distance:

M/N: M2318EC

Mode: High Channel GFSK


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1725.000	47.87	-13.01	34.86	74.00	-39.14	peak			
2	*	2480.000	106.67	-9.59	97.08	74.00	23.08	peak			
3		5291.667	36.78	-1.81	34.97	74.00	-39.03	peak			

**RESULT: PASS** 

Page 41 of 62

# RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) -Vertical

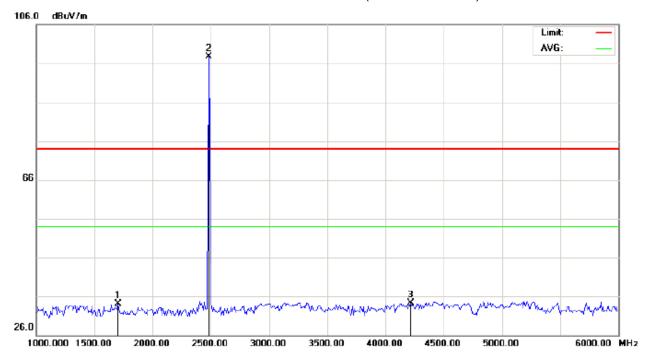

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: GSM Mobile Phone Distance:

M/N: M2318EC

Mode: High Channel GFSK

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1700.000	47.43	-13.28	34.15	74.00	-39.85	peak			
2	*	2480.000	107.38	-9.59	97.79	74.00	23.79	peak			
3		4216.667	38.30	-4.07	34.23	74.00	-39.77	peak			

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 42 of 62

# 11. BAND EDGE EMISSION

# 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency = Operation Frequency, RBW>=1%span, VBW>=RBW
- 3. The band edges was measured and recorded.


# 11.2. TEST SET-UP

Radiated same as 10.2

Page 43 of 62

#### 11.3. TEST RESULT

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Horizontal

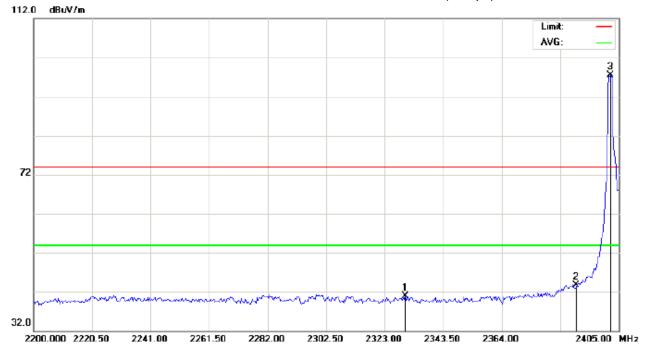

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: GSM Mobile Phone Distance:


M/N: M2318EC

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2330.175	50.65	-9.76	40.89	74.00	-33.11	peak			
2		2390.000	53.44	-9.69	43.75	74.00	-30.25	peak			
3	*	2402.000	107.23	-9.68	97.55	74.00	23.55	peak			

Page 44 of 62

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL (3Mbps)-Vertical

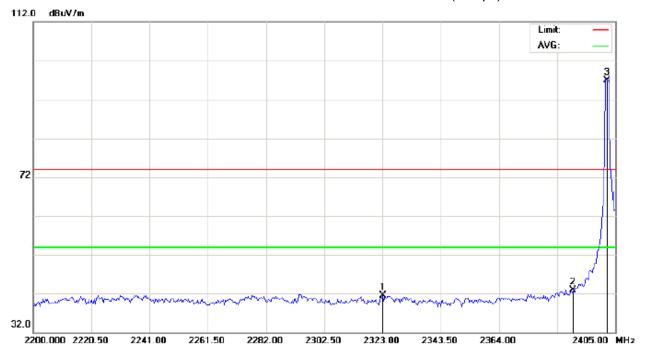

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: GSM Mobile Phone Distance:


M/N: M2318EC

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2323.000	51.21	-9.76	41.45	74.00	-32.55	peak			
2		2390.000	52.65	-9.69	42.96	74.00	-31.04	peak			
3	*	2402.000	106.59	-9.68	96.91	74.00	22.91	peak			

Page 45 of 62

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Horizontal

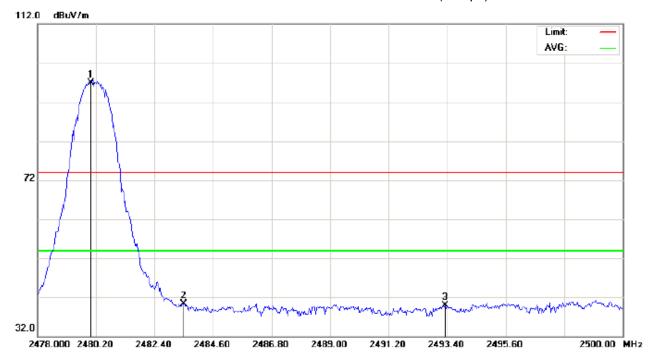

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: GSM Mobile Phone Distance:


M/N: M2318EC

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	106.55	-9.59	96.96	74.00	22.96	peak			
2		2483.500	49.88	-9.59	40.29	74.00	-33.71	peak			
3		2493.327	49.47	-9.58	39.89	74.00	-34.11	peak			

Page 46 of 62

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (3Mbps)-Vertical

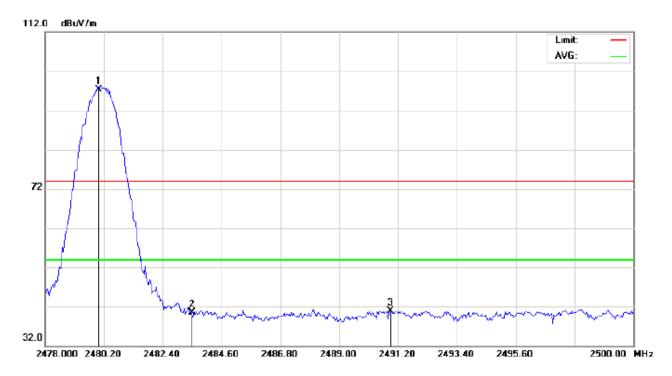

Site: site #1

Polarization: Vertical

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Distance:

Power:

Humidity: 60 %

M/N: M2318EC

EUT: GSM Mobile Phone

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	106.95	-9.59	97.36	74.00	23.36	peak			
2		2483.500	50.19	-9.59	40.60	74.00	-33.40	peak			
3		2490.907	50.52	-9.58	40.94	74.00	-33.06	peak			

#### **RESULT: PASS**

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 47 of 62

#### 12. NUMBER OF HOPPING FREQUENCY

#### 12.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

# 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

#### TEST PLOT FOR NO. OF TOTAL CHANNELS

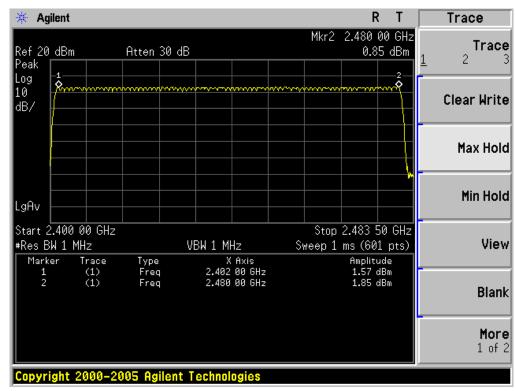

Page 48 of 62

# 13. TIME OF OCCUPANCY (DWELL TIME)

#### 13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

#### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 13.4. LIMITS AND MEASUREMENT RESULT


#### The Worst Case (3Mbps)

		` ;		
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.860	31.6	305.07	400
Middle	2.897	31.6	309.01	400
High	2.897	31.6	309.01	400

Low Channel Time 2.860\*(1600/6)/79\*31.6=305.07 ms Middle Channel Time 2.897\*(1600/6)/79\*31.6=309.01 ms High Channel Time

2.897\*(1600/6)/79\*31.6=309.01 ms

#### TEST PLOT OF LOW CHANNEL

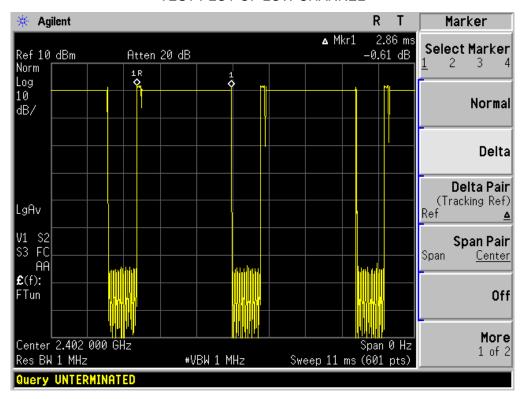


TEST PLOT OF MIDDLE CHANNEL



Report No.: AGC01806140401FE03 Page 50 of 62

#### TEST PLOT OF HIGH CHANNEL

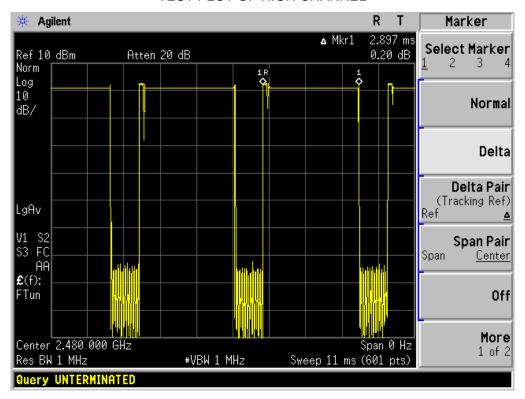

Page 51 of 62

#### 14. FREQUENCY SEPARATION

#### 14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

# 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


#### 14.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz	Door	
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass	

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

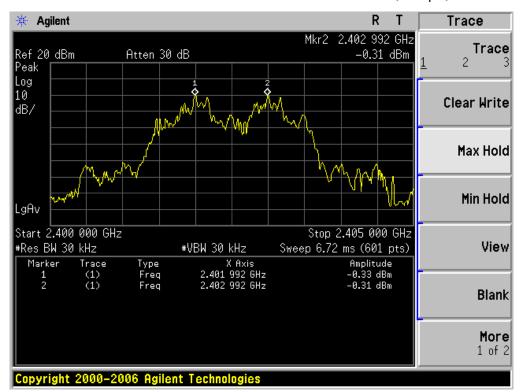

Page 52 of 62

# 15. FCC LINE CONDUCTED EMISSION TEST


#### 15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage						
Frequency	Q.P.( dBuV)	Average( dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	56	46					
5MHz~30MHz	60	50					

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

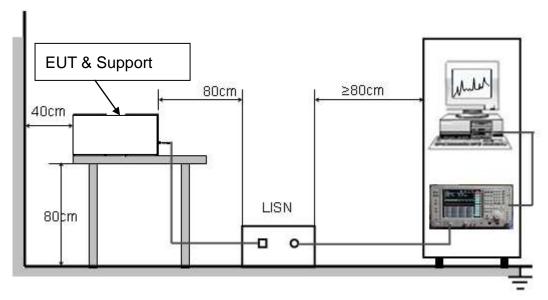

Page 53 of 62

#### 15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %

Page 54 of 62

# 15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

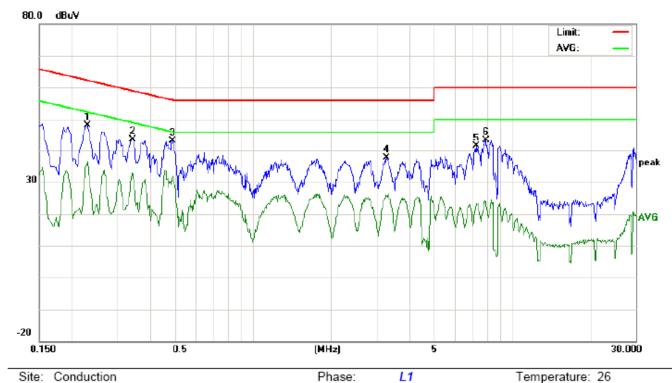

Power:

AC 120V/60Hz

Limit: FCC Class B Conduction(QP)

EUT: GSM Mobile Phone


M/N: M2318EC

Mode: High Channel GFSK

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2300	37.83		26.14	10.25	48.08		36.39	62.45	52.45	-14.37	-16.06	Р	
2	0.3460	33.35		20.91	10.31	43.66		31.22	59.06	49.06	-15.40	-17.84	Р	
3	0.4900	32.71		21.38	10.39	43.10		31.77	56.17	46.17	-13.07	-14.40	Р	
4	3.2780	27.00		15.14	10.53	37.53		25.67	56.00	46.00	-18.47	-20.33	Р	
5	7.2659	30.95		13.02	10.34	41.29		23.36	60.00	50.00	-18.71	-26.64	Р	
6	7.9339	33.01		13.44	10.35	43.36		23.79	60.00	50.00	-16.64	-26.21	Р	

Page 55 of 62

# Line Conducted Emission Test Line 2-N

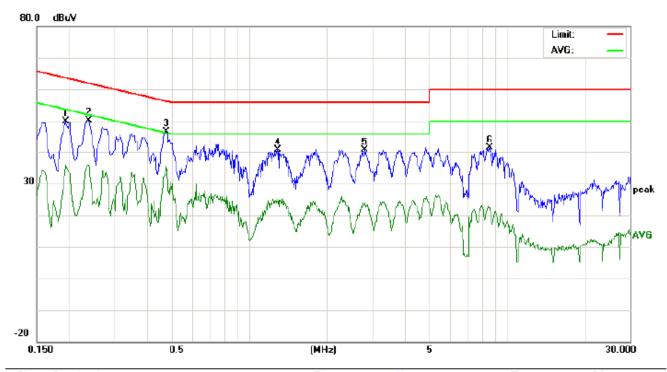

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: GSM Mobile Phone

M/N: M2318EC

Mode: High Channel GFSK

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	39.61		25.55	10.21	49.82		35.76	63.86	53.86	-14.04	-18.10	Р	
2	0.2379	39.77		25.72	10.26	50.03		35.98	62.17	52.17	-12.14	-16.19	Р	
3	0.4779	36.33		25.03	10.38	46.71		35.41	56.38	46.38	-9.67	-10.97	Р	
4	1.2940	30.30		13.86	10.38	40.68		24.24	56.00	46.00	-15.32	-21.76	Р	
5	2.8140	30.14		13.36	10.51	40.65		23.87	56.00	46.00	-15.35	-22.13	Р	
6	8.5778	31.13		12.01	10.32	41.45		22.33	60.00	50.00	-18.55	-27.67	Р	


Report No.: AGC01806140401FE03 Page 56 of 62

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

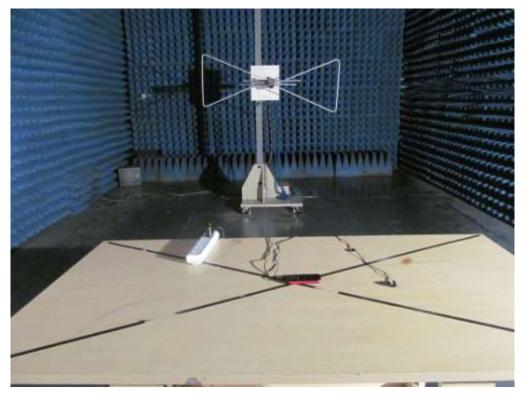

Page 57 of 62

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT




**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



**BACK VIEW OF EUT** 

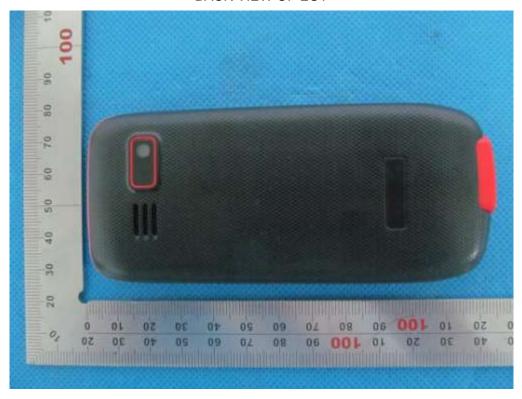


LEFT VIEW OF EUT



RIGHT VIEW OF EUT



**OPEN VIEW OF EUT-1** 

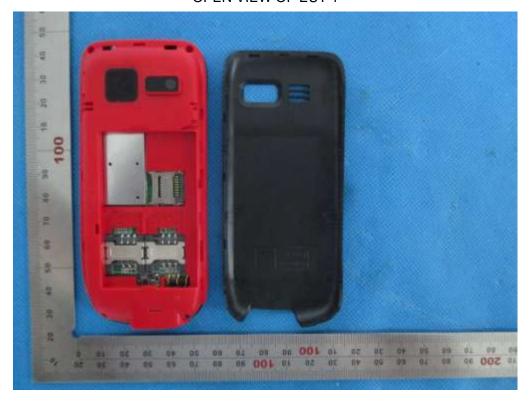


**OPEN VIEW OF EUT-2** 




**OPEN VIEW OF EUT-3** 



# **INTERNAL VIEW OF EUT-1**

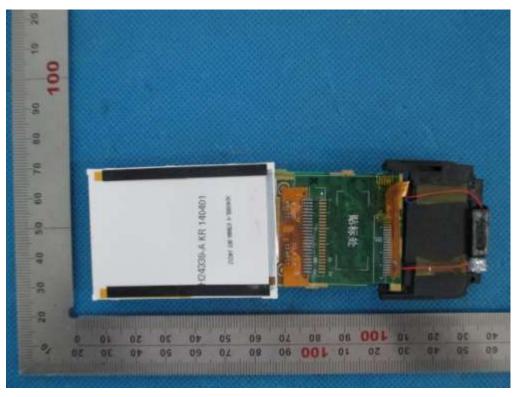

**INTERNAL VIEW OF EUT-2** 

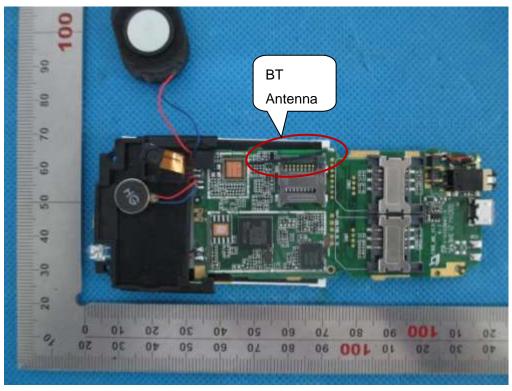

----END OF REPORT----