


| Freq | Preamp  | Read  | Cable | Antenna | Limit | Over   | Remark |             |
|------|---------|-------|-------|---------|-------|--------|--------|-------------|
|      | Factor  | Level | Loss  | Factor  |       |        |        |             |
|      | MHz     | dB    | dBuV  | dB      | dB/m  | dBuV/m | dBuV/m | dB          |
| 1    | 2390.00 | 26.32 | 34.52 | 7.34    | 28.72 | 44.26  | 74.00  | -29.74 Peak |
| 2    | 2400.00 | 26.32 | 39.38 | 7.34    | 28.72 | 49.12  | 74.00  | -24.88 Peak |

NOTE: 1. Absolute Level= Reading Level+antenna Factor+cable loss+preamp factor,  
Over Limit= Absolute Level – Limit;


2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

3. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

| 3M bps         |           |                     |         |
|----------------|-----------|---------------------|---------|
| EUT :          | Traveltek | Model Name :        | W1330Q  |
| Temperature :  | 20 °C     | Relative Humidity : | 54%     |
| Pressure :     | 1010hPa   | Test Mode :         | TX-2480 |
| Test Voltage : | DC 7.6V   |                     |         |

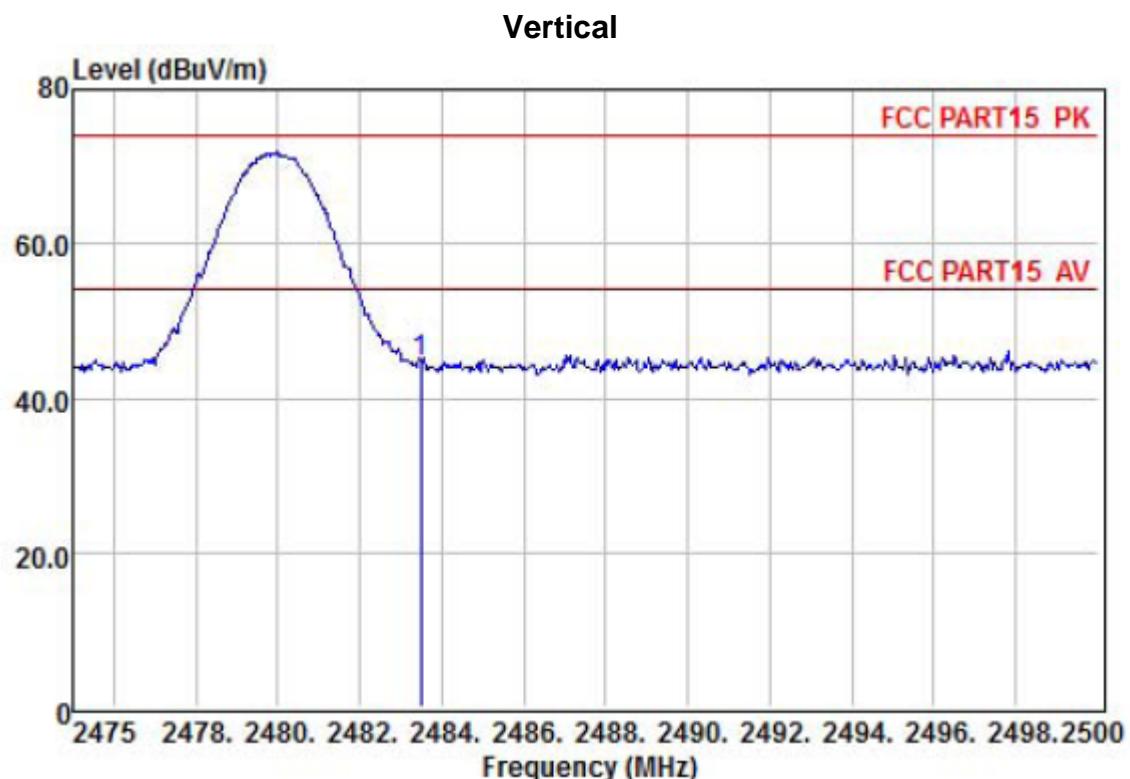

|   | Preamp<br>Freq | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Limit<br>Level | Line<br>Limit | Over<br>Limit | Remark      |
|---|----------------|---------------|---------------|-------------------|----------------|---------------|---------------|-------------|
|   | MHz            | dB            | dBuV          | dB                | dB/m           | dBuV/m        | dBuV/m        | dB          |
| 1 | 2483.50        | 26.34         | 34.54         | 7.57              | 28.79          | 44.56         | 74.00         | -29.44 Peak |

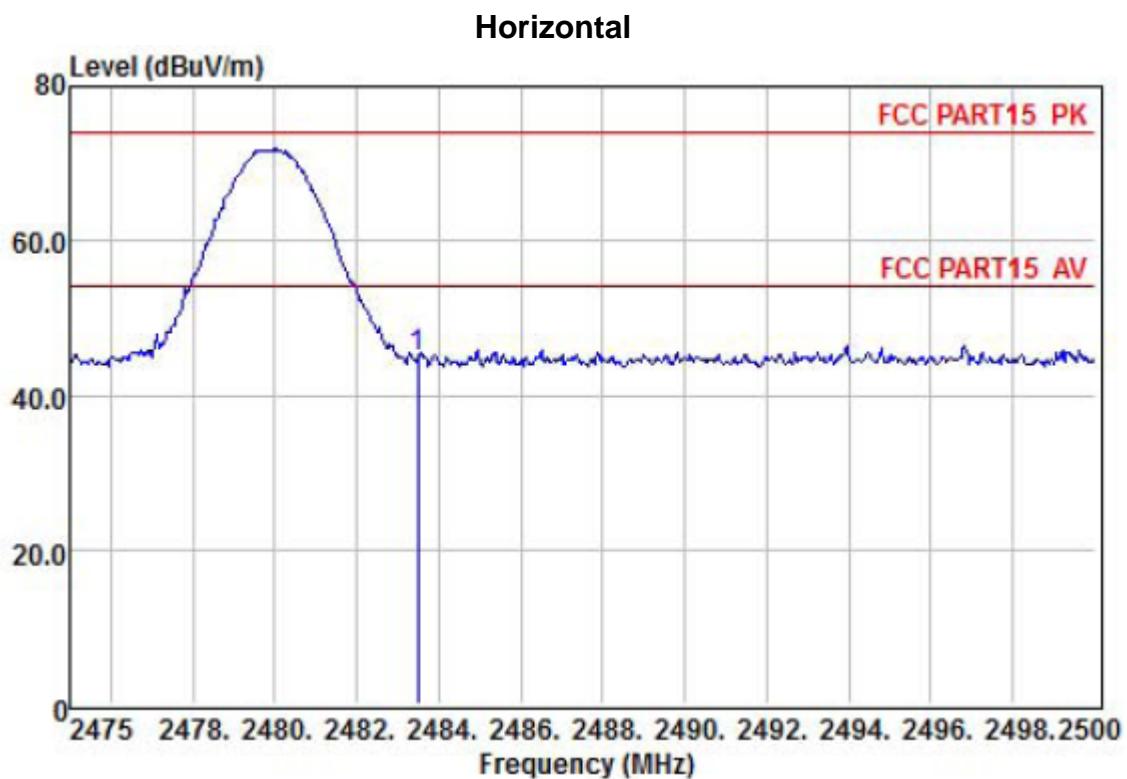

|   | Preamp<br>Freq | Read<br>Factor | Cable<br>Level | Antenna<br>Loss | Limit<br>Factor | Line<br>Level | Over<br>Line<br>Limit | Over<br>Limit<br>Remark |
|---|----------------|----------------|----------------|-----------------|-----------------|---------------|-----------------------|-------------------------|
|   | MHz            | dB             | dBuV           | dB              | dB/m            | dBuV/m        | dBuV/m                | dB                      |
| 1 | 2483.50        | 26.34          | 34.80          | 7.57            | 28.79           | 44.82         | 74.00                 | -29.18 Peak             |

NOTE: 1. Absolute Level= Reading Level+antenna Factor+cable loss+preamp factor,  
 Over Limit= Absolute Level – Limit;  
 2.The amplitude of spurious emissions which are attenuated by more than 20dB below the  
 permissible value has not to be reported.  
 3.If the PK measured levels comply with average limit, then the average level were deemed to comply  
 with average limit.

**Spurious Emission in Restricted Band:(1-25G)**

All the modulation modes have been tested and all other emissions more than 20dB below the limit, the worst result was report as below:

| Polar (H/V)       | Frequency | Meter Reading | Antenna Factor | Cable loss | Preamp factor | Emission Level | Limits | Margin | Detector Type |
|-------------------|-----------|---------------|----------------|------------|---------------|----------------|--------|--------|---------------|
|                   | (MHz)     | (dBuV)        | (dB)           | (dB)       | (dB)          | (dBuV/m)       | (dBuV/ | (dB)   |               |
| 1Mbps Non-hopping |           |               |                |            |               |                |        |        |               |
| Vertical          | 3262      | 36.48         | 30.26          | 10.68      | 26.63         | 50.79          | 74     | -23.21 | PK            |
| Horizontal        | 3262      | 38.42         | 30.26          | 10.68      | 26.63         | 52.73          | 74     | -21.27 | PK            |
| Vertical          | 4032      | 37.95         | 31.55          | 10.52      | 27.02         | 53.00          | 74     | -21.00 | PK            |
| Horizontal        | 4032      | 37.17         | 31.55          | 10.52      | 27.02         | 52.22          | 74     | -21.78 | PK            |
| 1Mbps hopping     |           |               |                |            |               |                |        |        |               |
| Vertical          | 3351      | 35.15         | 30.34          | 10.78      | 26.67         | 49.60          | 74     | -24.40 | PK            |
| Horizontal        | 3351      | 35.27         | 30.34          | 10.78      | 26.67         | 49.72          | 74     | -24.28 | PK            |
| Vertical          | 4130      | 37.49         | 30.69          | 10.95      | 27.08         | 52.05          | 74     | -21.95 | PK            |
| Horizontal        | 4130      | 37.19         | 30.69          | 10.95      | 27.08         | 51.75          | 74     | -22.25 | PK            |

## 6. 20DB BANDWIDTH

### 6.1. Limits

According to FCC Section 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth( $10 \times \log 1\% = 20\text{dB}$ )taking the RF output power

### 6.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, during the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting.

2. Set the spectrum analyzer:

Span: approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW  $\geq 1\%$  of the 20dB bandwidth

VBW  $\geq$  RBW

Sweep=auto

Detector function=peak

Trace=max hold




## Test data:

|               |                         |                     |         |
|---------------|-------------------------|---------------------|---------|
| EUT :         | Traveltek               | Model Name :        | W1330Q  |
| Temperature : | 25 °C                   | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /C78(1Mbps) |                     |         |

| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 908.6                | PASS   |
| 2441 MHz  | 864.4                | PASS   |
| 2480 MHz  | 867.4                | PASS   |


Test plot as follows:



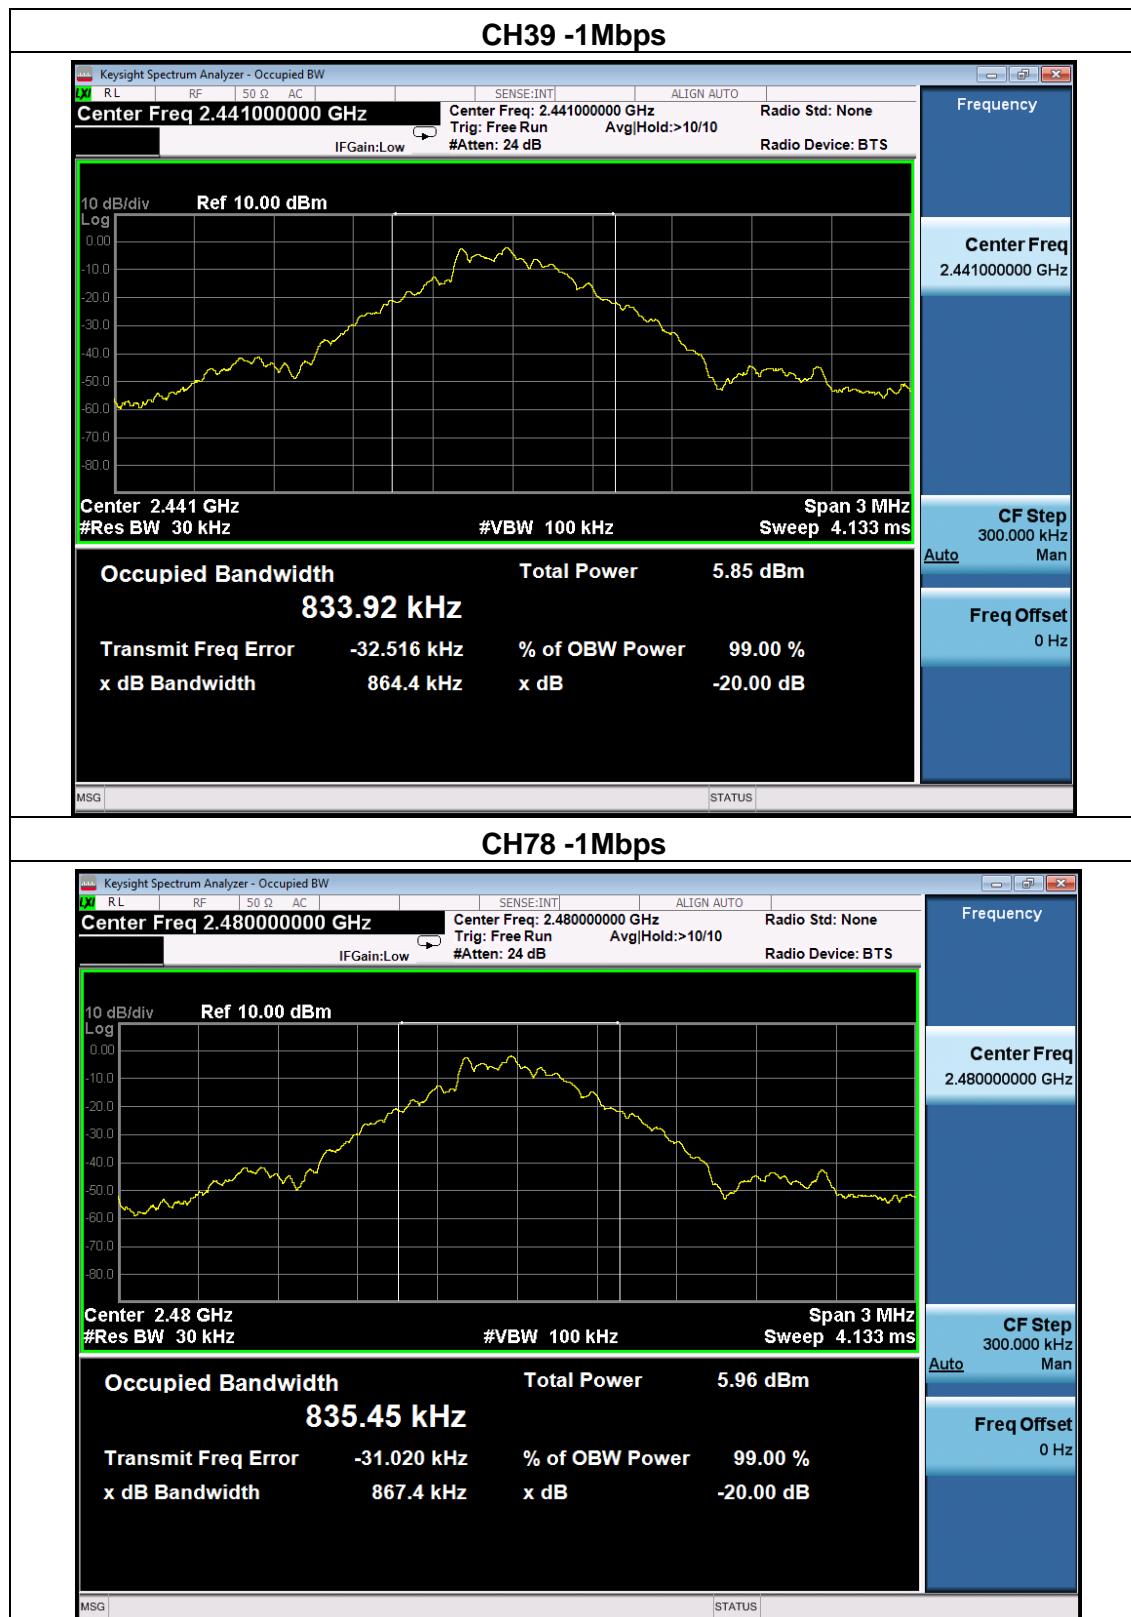

|               |                         |                     |         |
|---------------|-------------------------|---------------------|---------|
| EUT :         | Traveltek               | Model Name :        | W1330Q  |
| Temperature : | 25 °C                   | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /C78(2Mbps) |                     |         |


| Frequency | 20dB Bandwidth (MHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1.214                | PASS   |
| 2441 MHz  | 1.216                | PASS   |
| 2480 MHz  | 1.217                | PASS   |

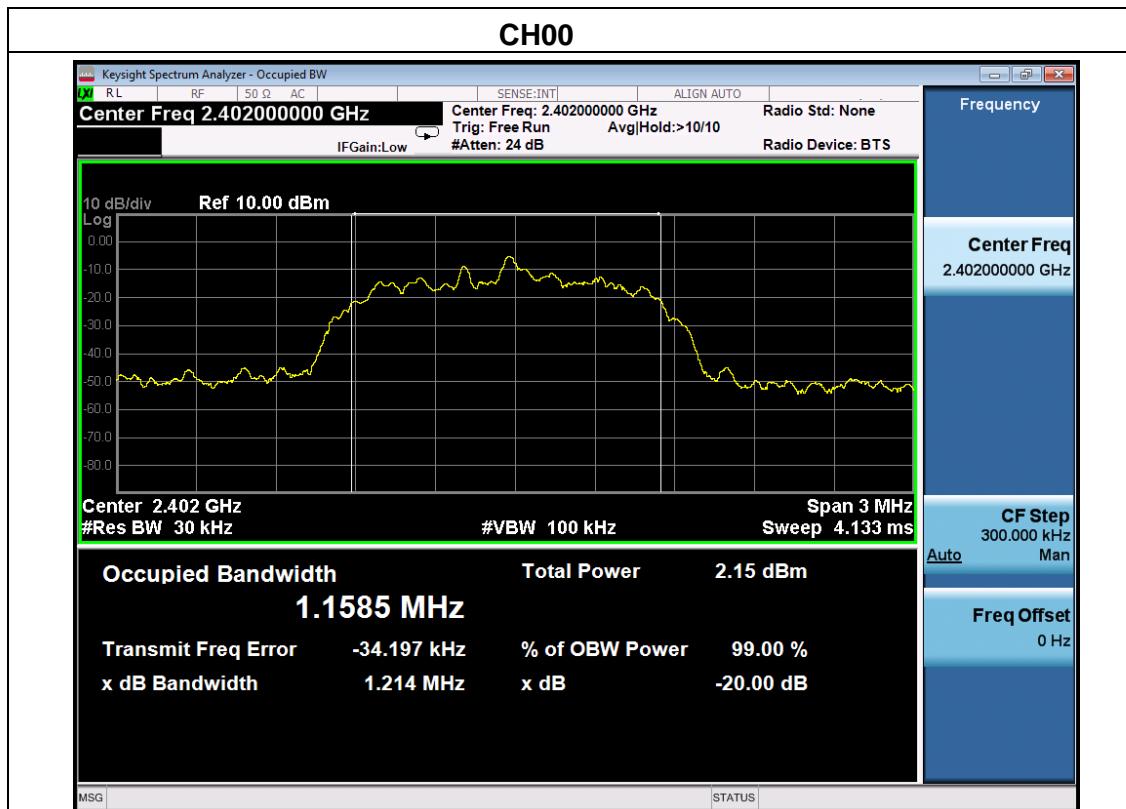




|               |                          |                     |         |
|---------------|--------------------------|---------------------|---------|
| EUT :         | Traveltek                | Model Name :        | W1330Q  |
| Temperature : | 25 °C                    | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                 | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /CH78(3Mbps) |                     |         |

| Frequency | 20dB Bandwidth (MHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1.206                | PASS   |
| 2441 MHz  | 1.207                | PASS   |
| 2480 MHz  | 1.207                | PASS   |

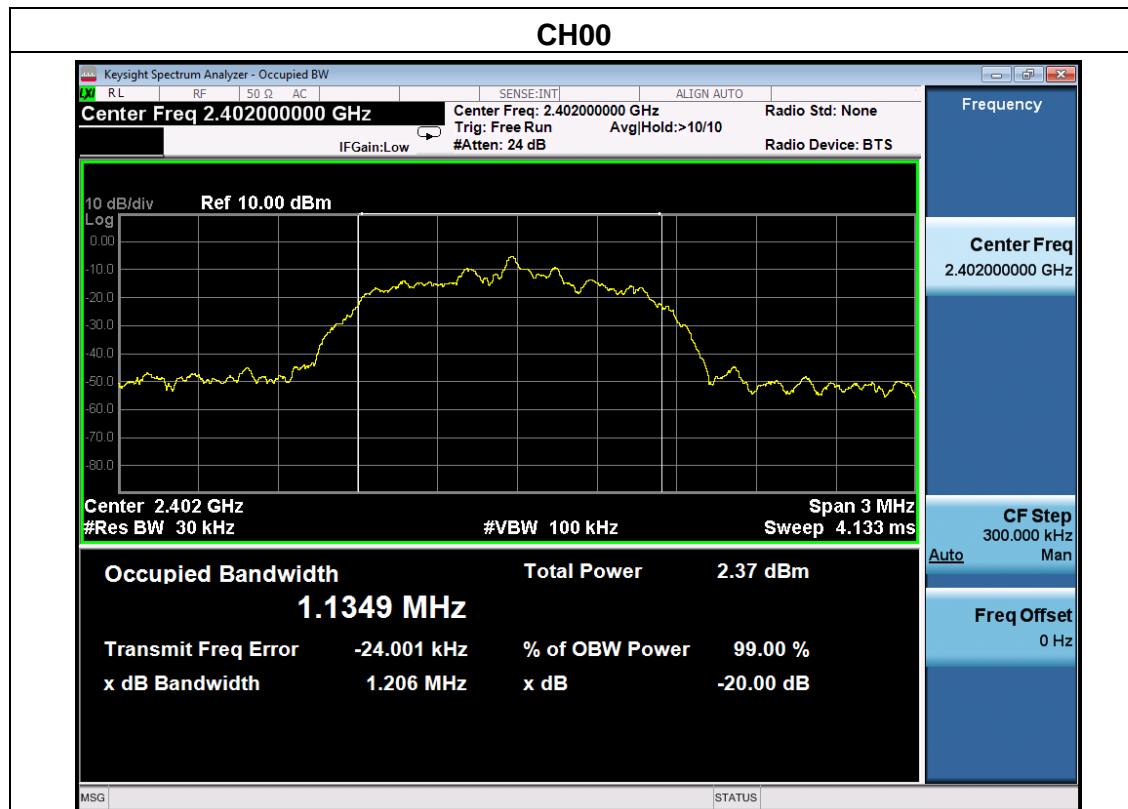

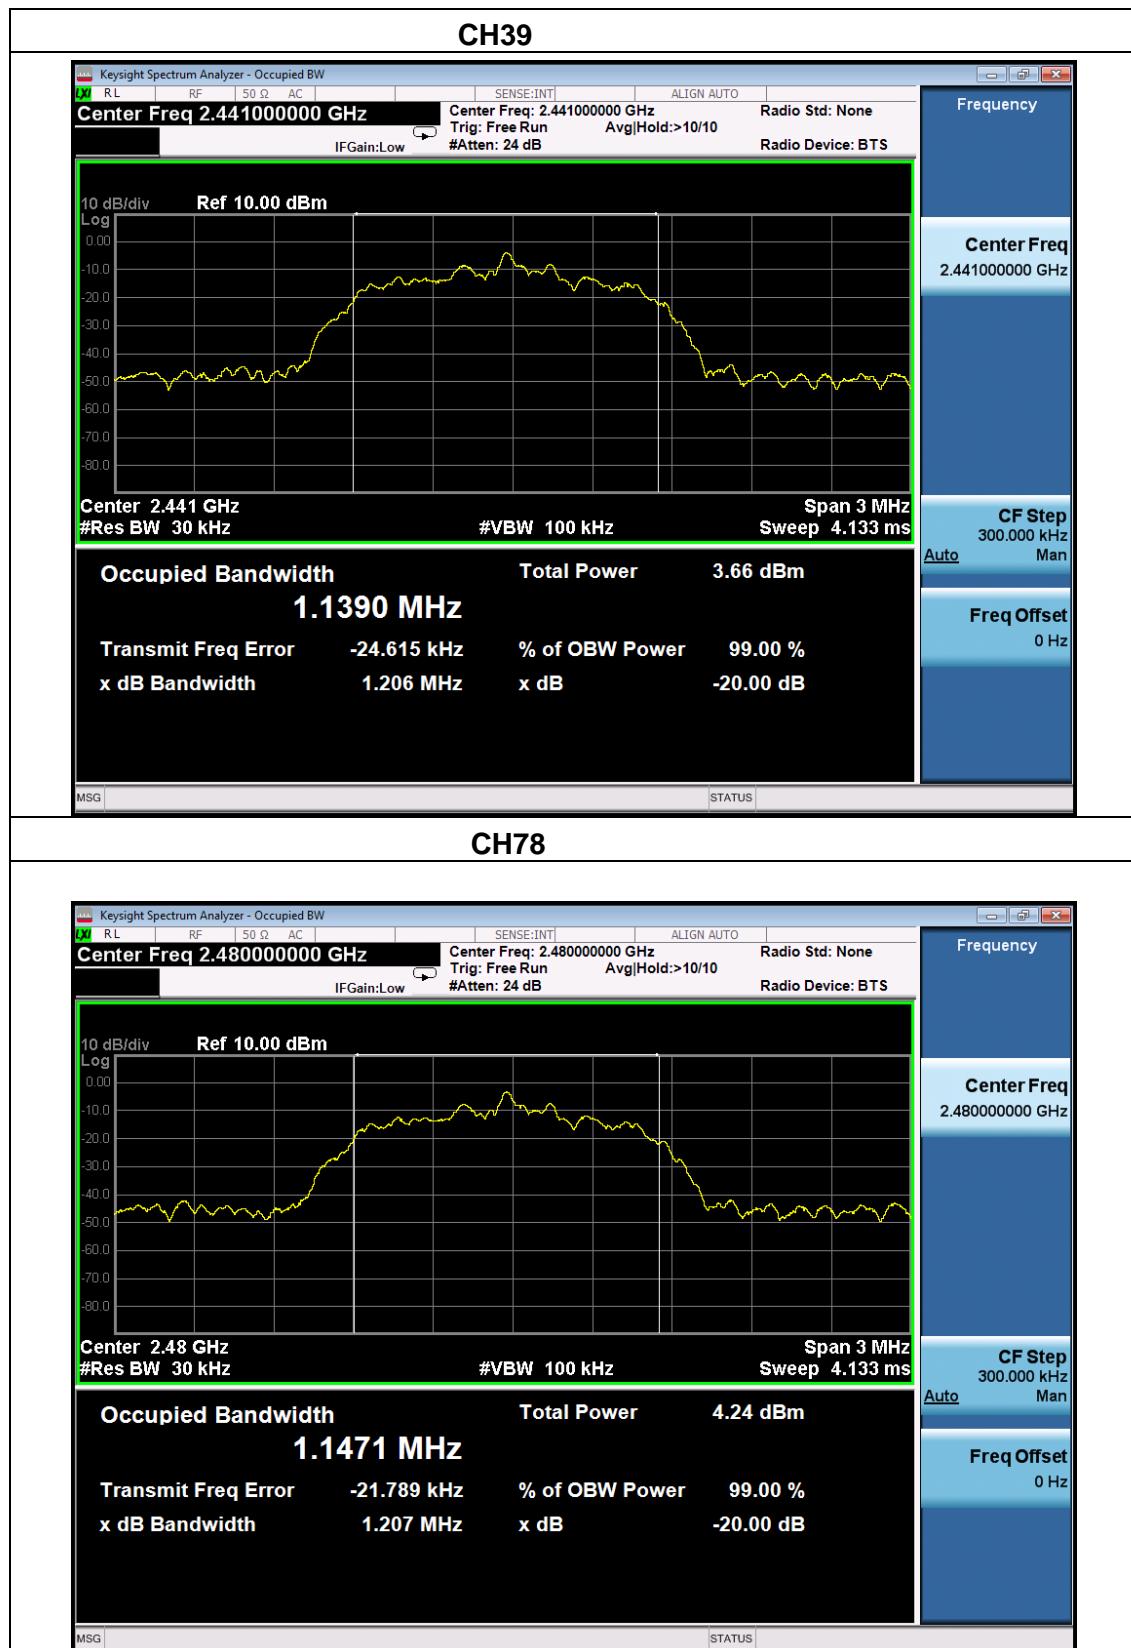

## 7. FREQUENCY SEPARATION

### 7.1. Limits

According to FCC Section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 7.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: wide enough to capture the peaks of two adjacent channels

RBW  $\geq$  1% of the span(30KHz)

VBW  $\geq$  RBW(100KHz)

Sweep=auto

Detector function=peak

Trace=max hold



Test data:

|               |                          |                     |         |
|---------------|--------------------------|---------------------|---------|
| EUT :         | Traveltek                | Model Name :        | W1330Q  |
| Temperature : | 24 °C                    | Relative Humidity : | 58%     |
| Pressure :    | 1010hPa                  | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /CH78(1Mbps) |                     |         |

| Frequency | Ch. Separation (MHz) | Limit (KHz) | Result   |
|-----------|----------------------|-------------|----------|
| 2402 MHz  | 1.000                | 908.6       | Complies |
| 2441 MHz  | 1.004                | 864.4       | Complies |
| 2480 MHz  | 0.998                | 867.4       | Complies |

### Ch. Separation Limits: > 20dB bandwidth

Test plot as follows:







|               |                          |                     |         |
|---------------|--------------------------|---------------------|---------|
| EUT :         | Traveltek                | Model Name :        | W1330Q  |
| Temperature : | 24 °C                    | Relative Humidity : | 58%     |
| Pressure :    | 1010 hPa                 | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /CH78(2Mbps) |                     |         |

| Frequency | Ch. Separation (MHz) | Limit (KHz) | Result   |
|-----------|----------------------|-------------|----------|
| 2402 MHz  | 1.000                | 0.809       | Complies |
| 2441 MHz  | 1.002                | 0.811       | Complies |
| 2480 MHz  | 0.998                | 0.811       | Complies |

### Ch. Separation Limits: >2/3 of 20dB bandwidth

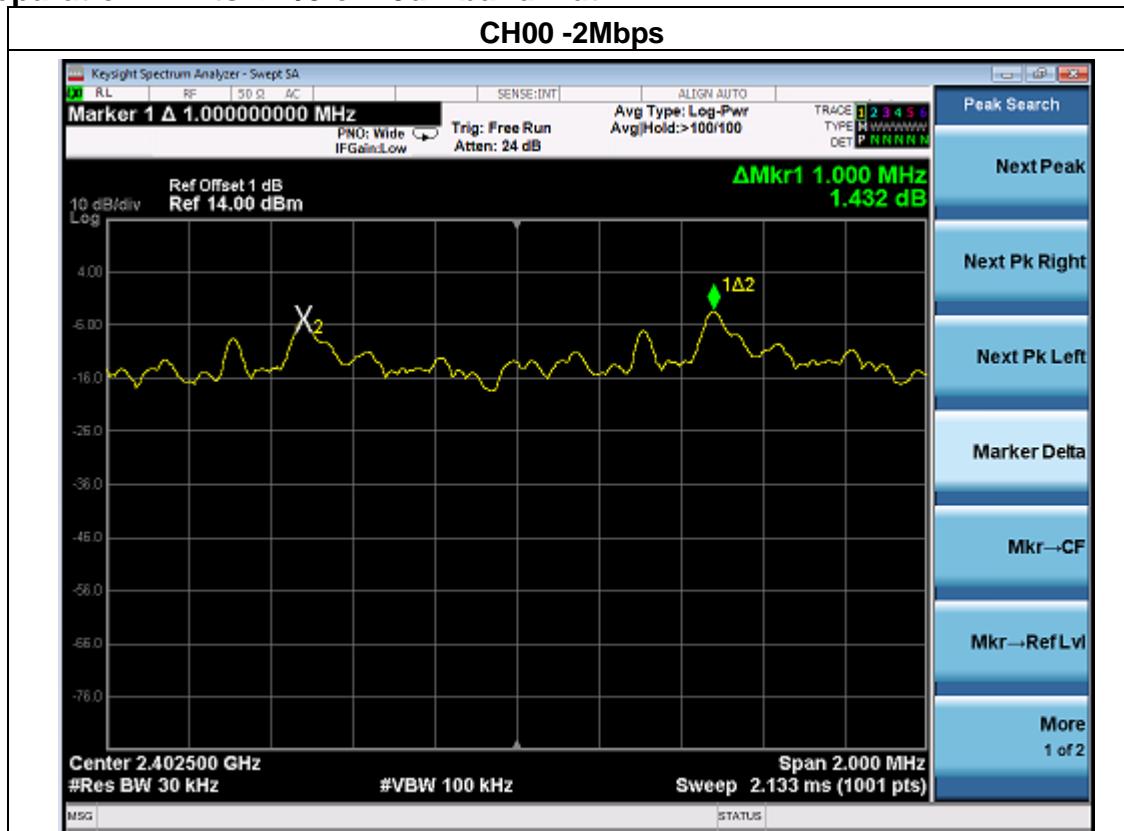


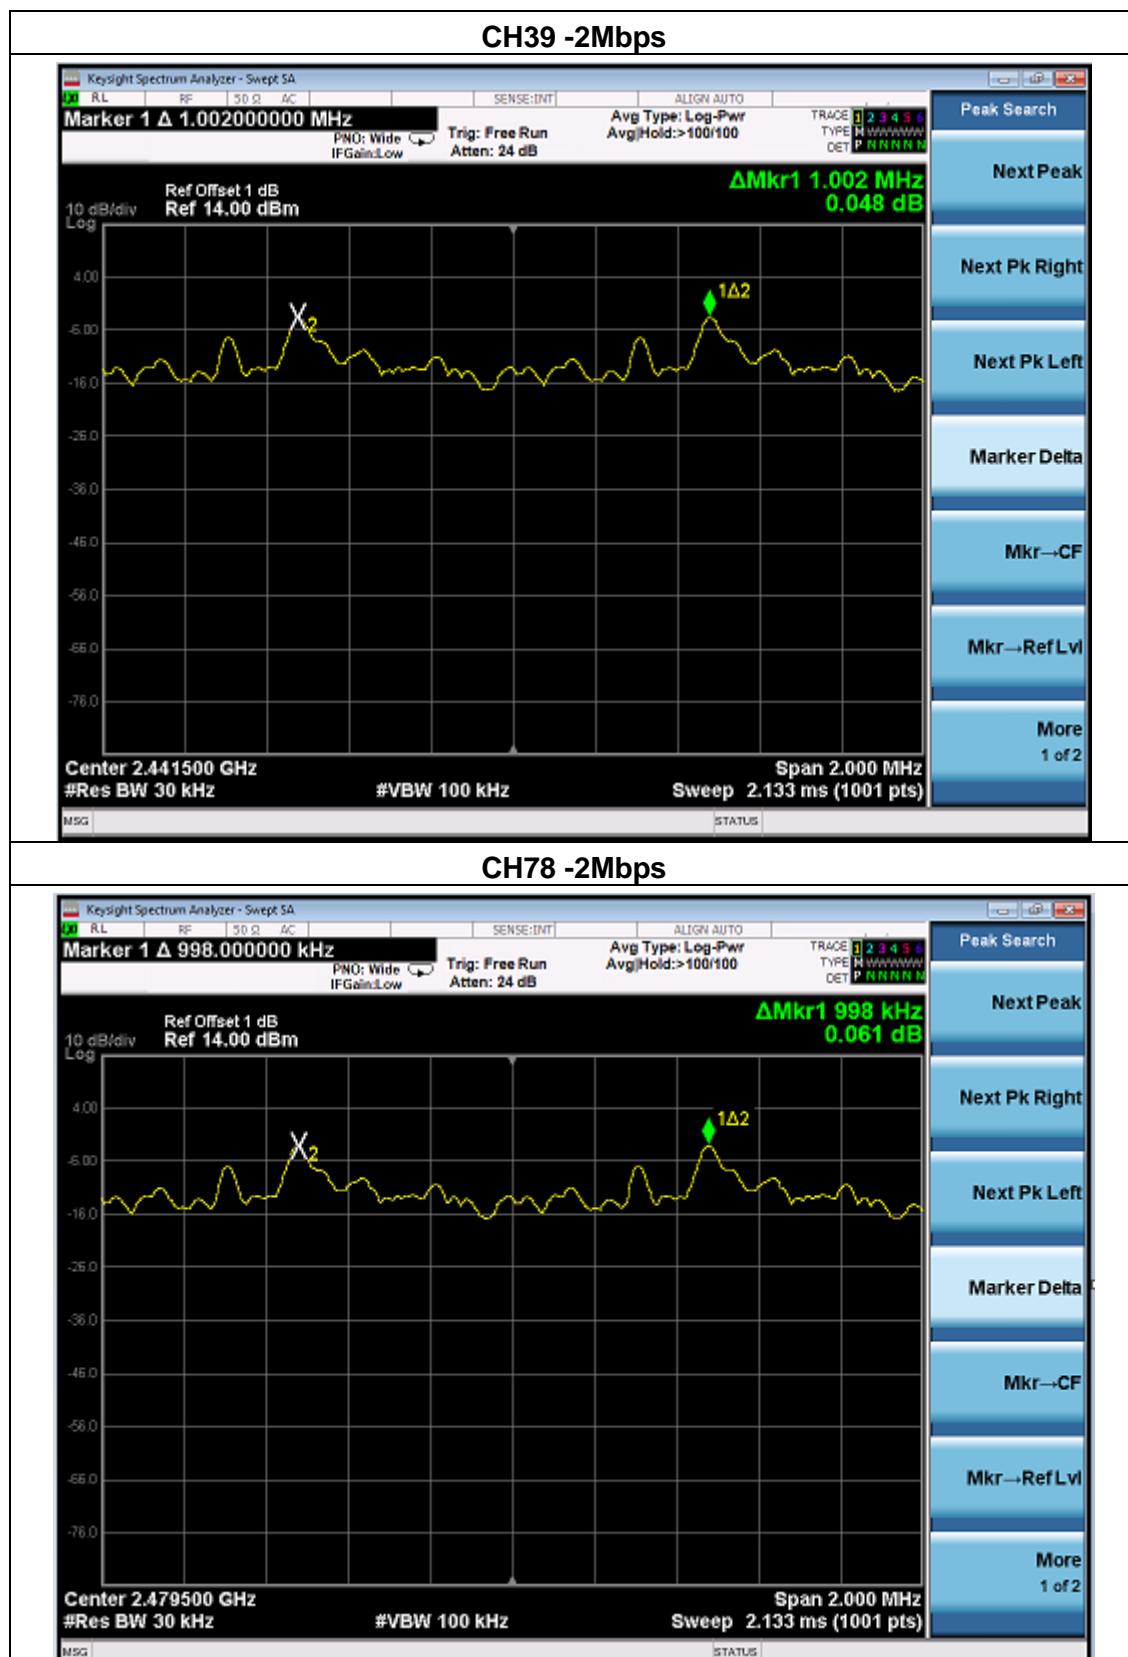


|               |                          |                     |         |
|---------------|--------------------------|---------------------|---------|
| EUT :         | Traveltek                | Model Name :        | W1330Q  |
| Temperature : | 24 °C                    | Relative Humidity : | 58%     |
| Pressure :    | 1010 hPa                 | Test Voltage :      | DC 7.6V |
| Test Mode :   | CH00 / CH39 /CH78(3Mbps) |                     |         |

| Frequency | Ch. Separation (MHz) | Limit (KHz) | Result   |
|-----------|----------------------|-------------|----------|
| 2402 MHz  | 1.000                | 0.804       | Complies |
| 2441 MHz  | 1.002                | 0.805       | Complies |
| 2480 MHz  | 1.000                | 0.805       | Complies |

### Ch. Separation Limits: >2/3 of 20dB bandwidth

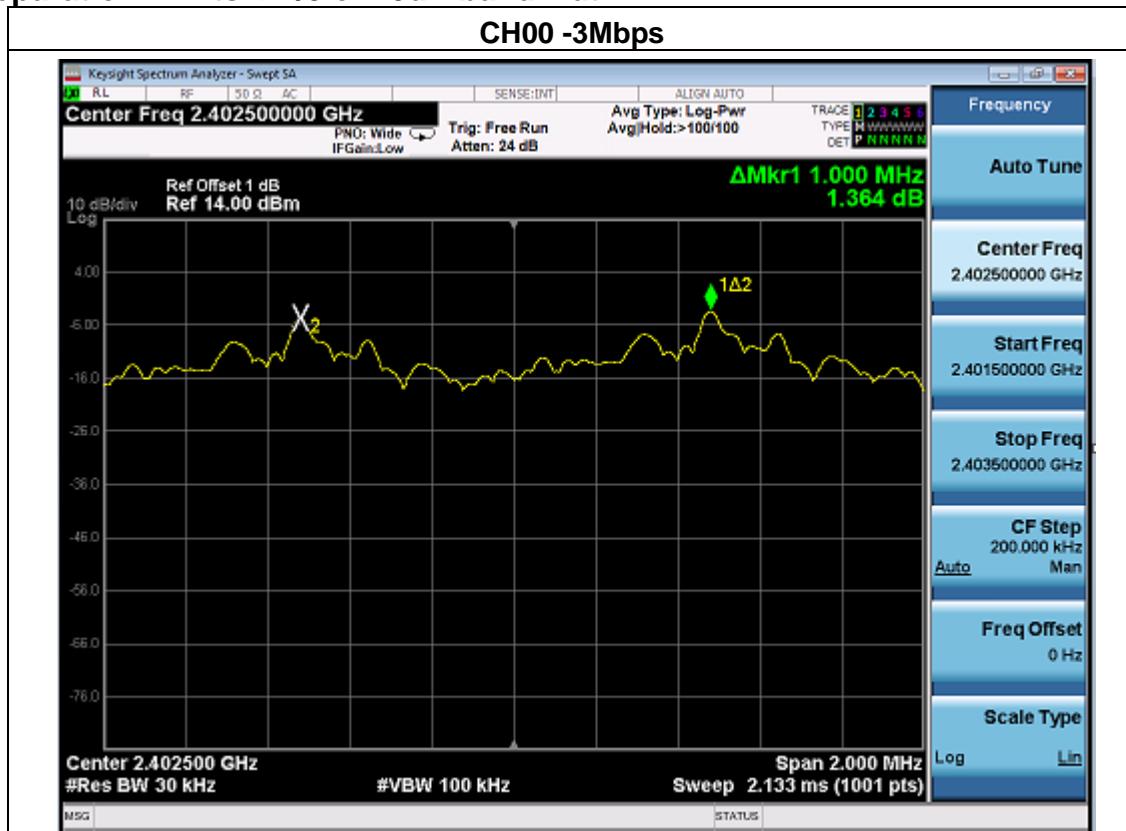

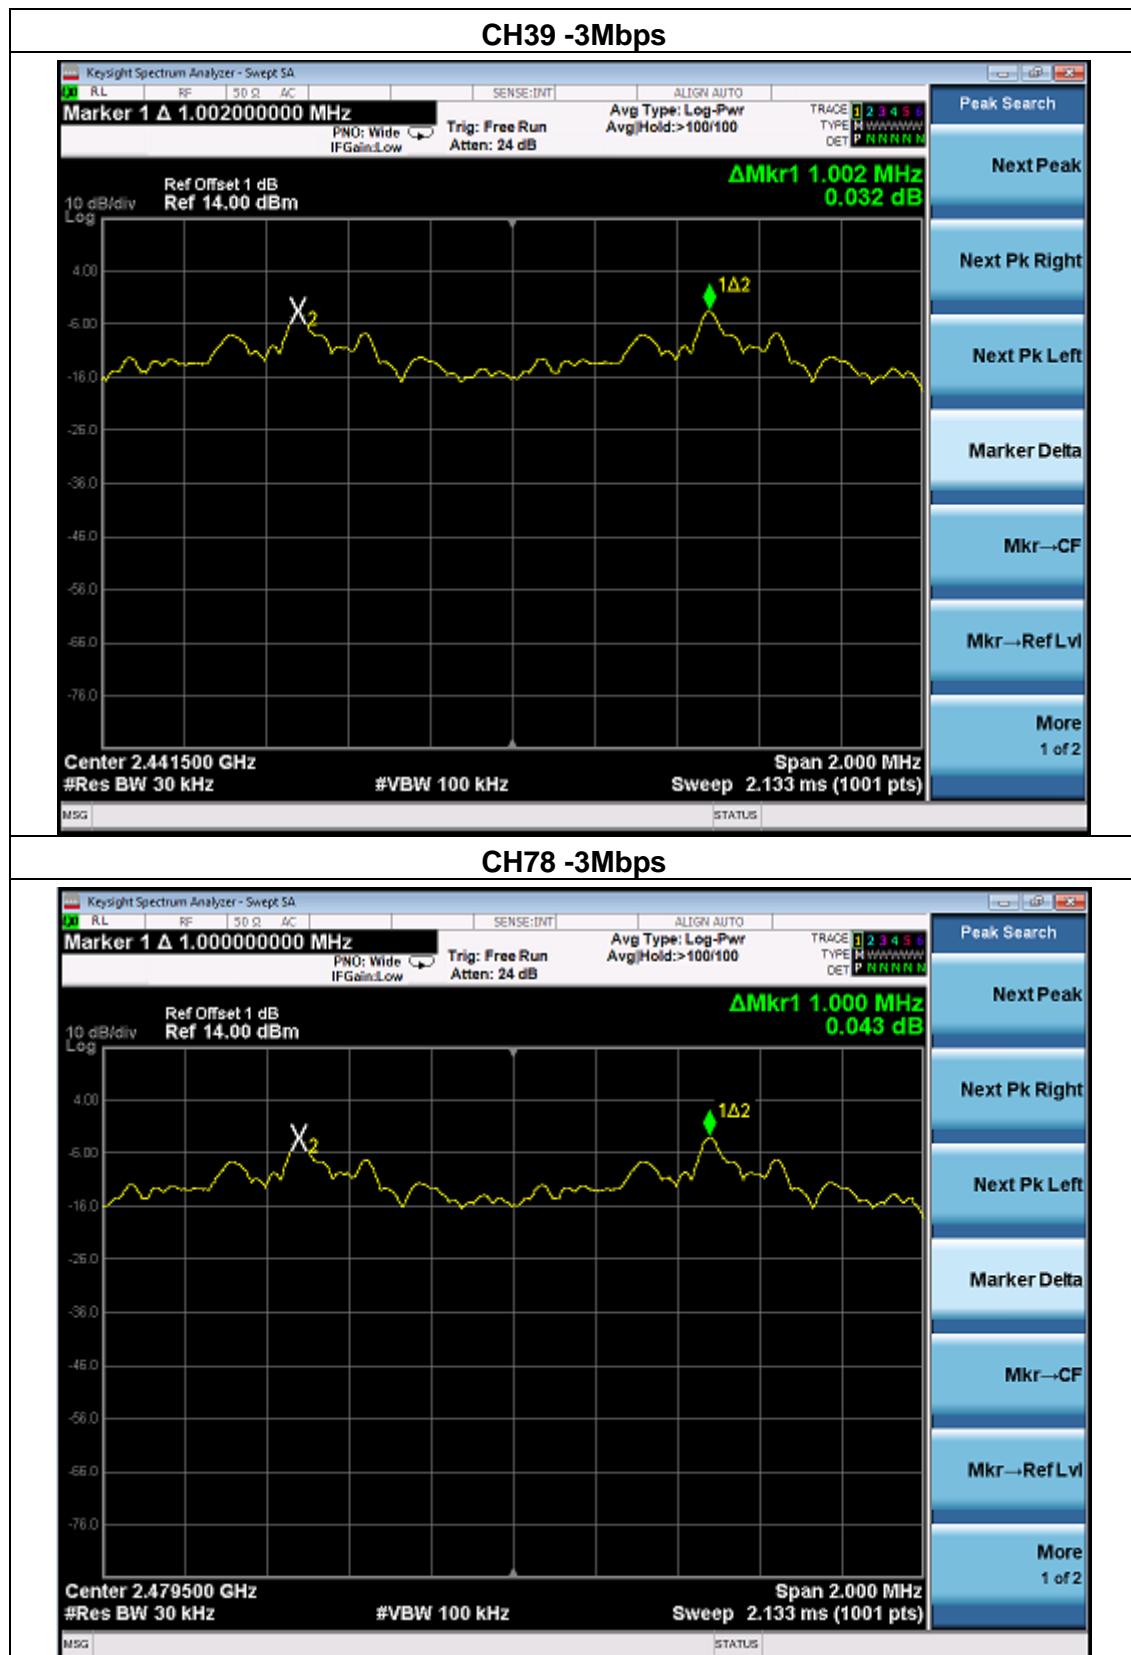

## 8. NUMBER OF HOPPING FREQUENCY

### 8.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 8.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: the frequency band of operation

RBW =100KHz

VBW=300KHz

Sweep=auto

Detector function=peak

Trace=max hold




|               |              |                     |         |
|---------------|--------------|---------------------|---------|
| EUT :         | Traveltek    | Model Name :        | W1330Q  |
| Temperature : | 24 °C        | Relative Humidity : | 58%     |
| Pressure :    | 1010 hPa     | Test Voltage :      | DC 7.6V |
| Test Mode :   | <b>1Mbps</b> |                     |         |

Test data:

| Measured channel numbers | Limit | Result |
|--------------------------|-------|--------|
| 79                       | ≥15   | PASS   |

Test plot as follows:

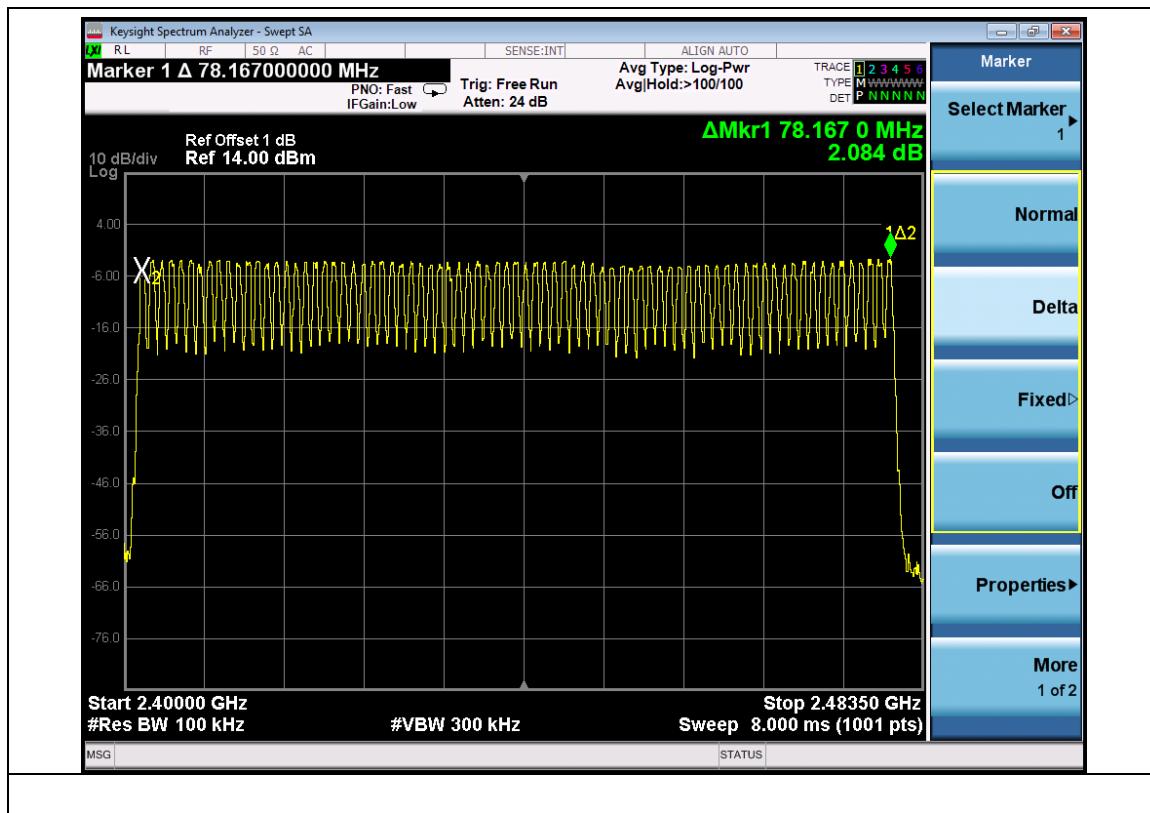

## 9. DWELL TIME

### 9.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 9.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode power.

2. Set the spectrum analyzer:

Span= 0Hz, RBW =1000 kHz, VBW = 3000 kHz

Use a video trigger with the trigger level set to enable triggering only on full pulses.

Detector function=peak, Sweep Time is more than once pulse time.

Set the EUT for DH5, DH3 and DH1 packet transmitting

Measure the maximum time duration of one single pulse.

A Period Time = (channel number)\*0.4

DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)

DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)

DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

For Example:

BT hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),

Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.


Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




Test data:


| Data Packet | Frequency | Pulse Duration | Dwell Time | Limits |
|-------------|-----------|----------------|------------|--------|
|             |           | (ms)           | (s)        | (s)    |
| DH1         | 2441 MHz  | 0.370          | 0.118      | 0.4    |
| 2DH1        | 2441 MHz  | 0.386          | 0.124      | 0.4    |
| 3DH1        | 2441 MHz  | 0.391          | 0.125      | 0.4    |

Test plot as follows as below:

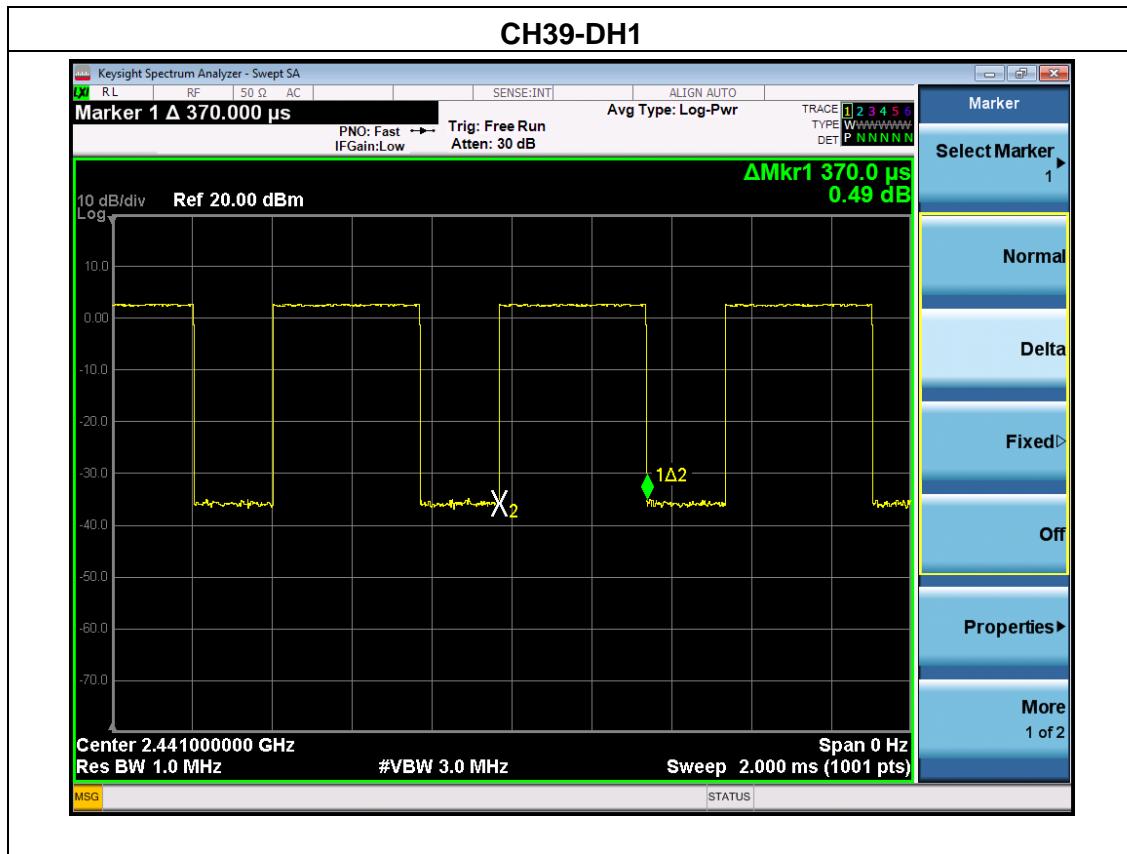


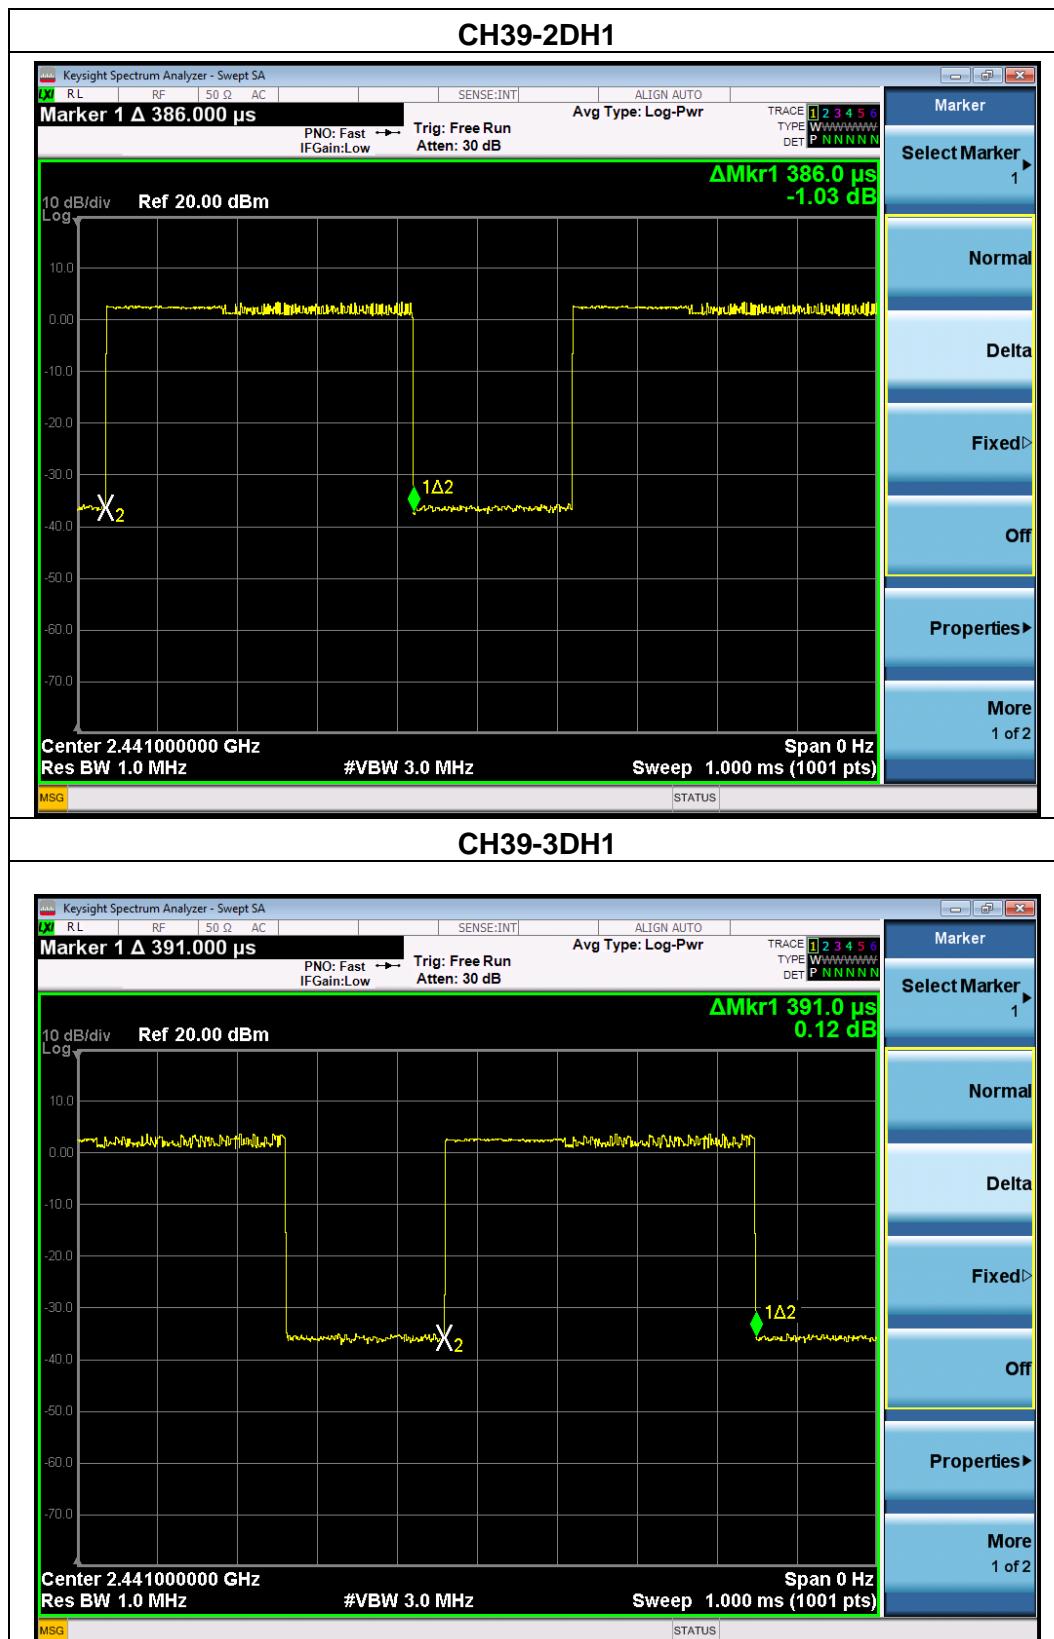


| Data Packet | Frequency | Pulse Duration | Dwell Time | Limits |
|-------------|-----------|----------------|------------|--------|
|             |           | (ms)           | (s)        | (s)    |
| DH3         | 2441 MHz  | 1.650          | 0.264      | 0.4    |
| 2DH3        | 2441 MHz  | 1.641          | 0.263      | 0.4    |
| 3DH3        | 2441 MHz  | 1.644          | 0.263      | 0.4    |

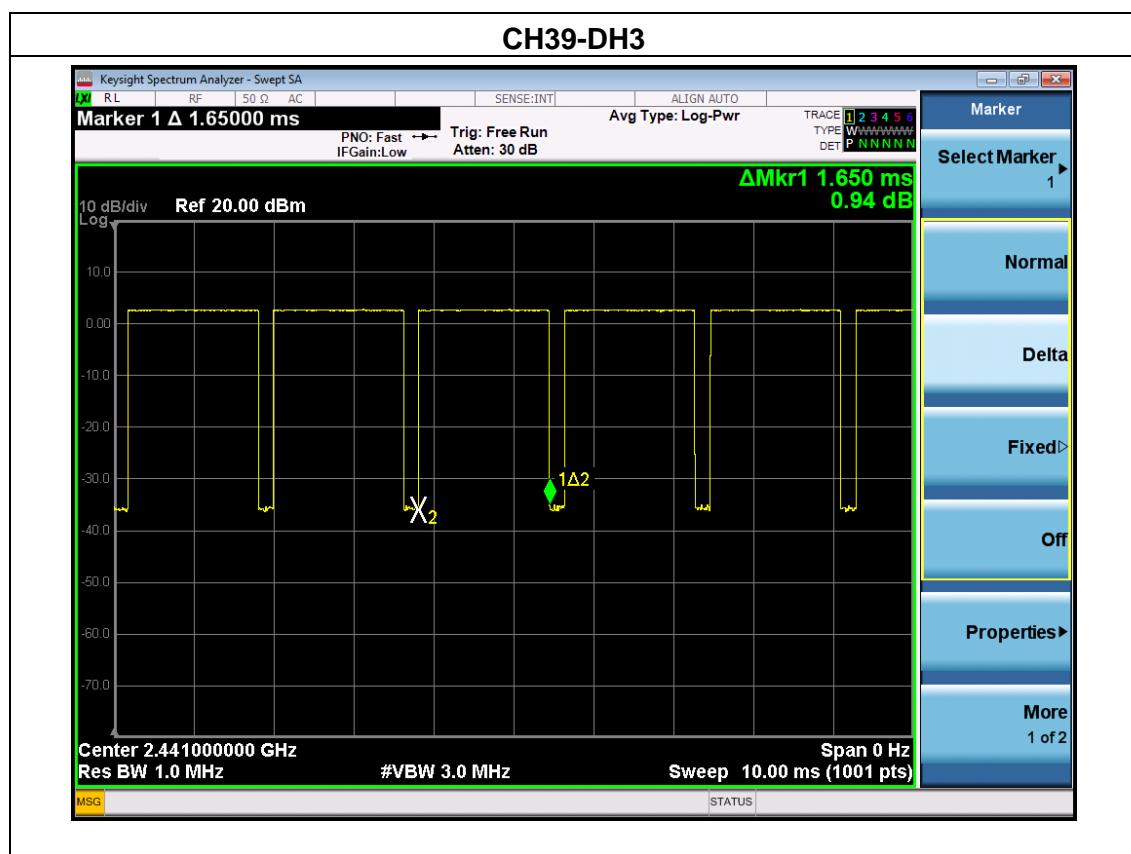


## CH39-2DH3

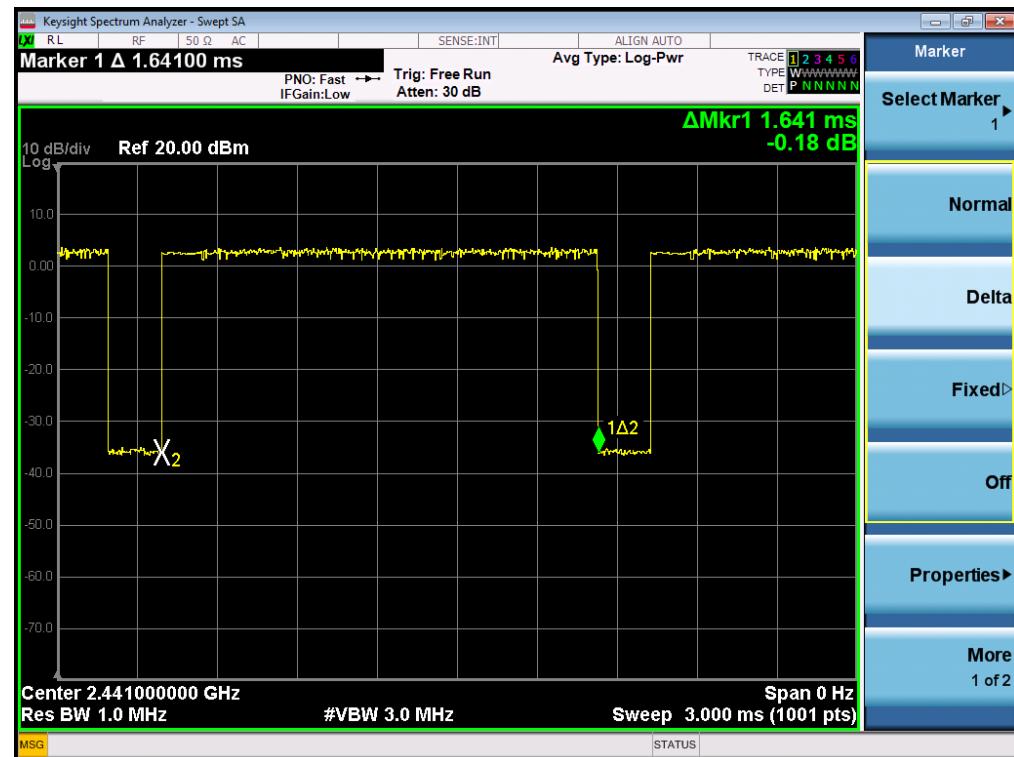


## CH39-3DH3

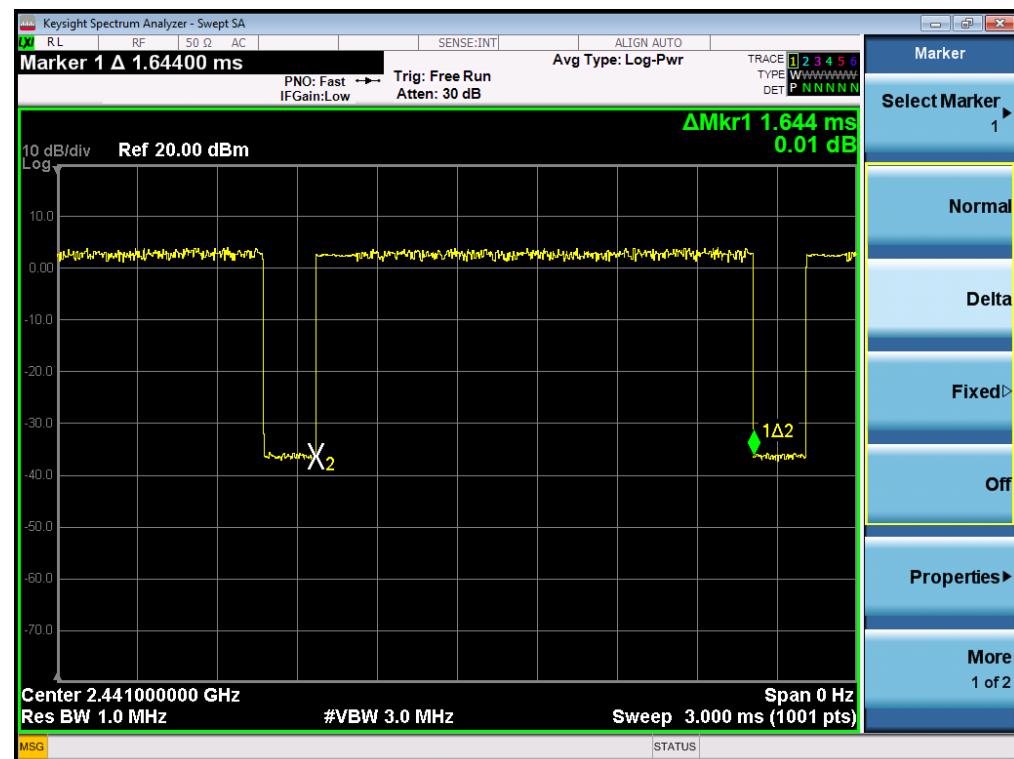


| Data Packet | Frequency | Pulse Duration | Dwell Time | Limits |
|-------------|-----------|----------------|------------|--------|
|             |           | (ms)           | (s)        | (s)    |
| DH5         | 2441 MHz  | 2.90           | 0.307      | 0.4    |
| 2DH5        | 2441 MHz  | 2.90           | 0.307      | 0.4    |
| 3DH5        | 2441 MHz  | 2.92           | 0.310      | 0.4    |

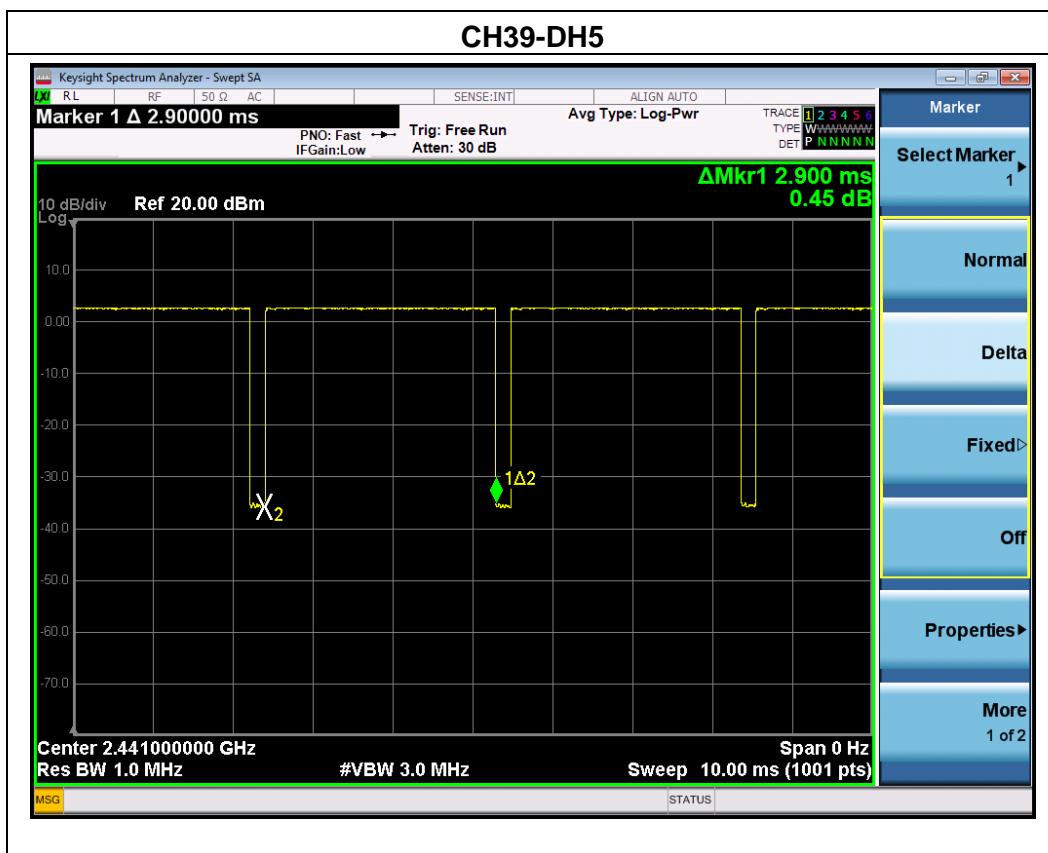

## CH39-2DH5

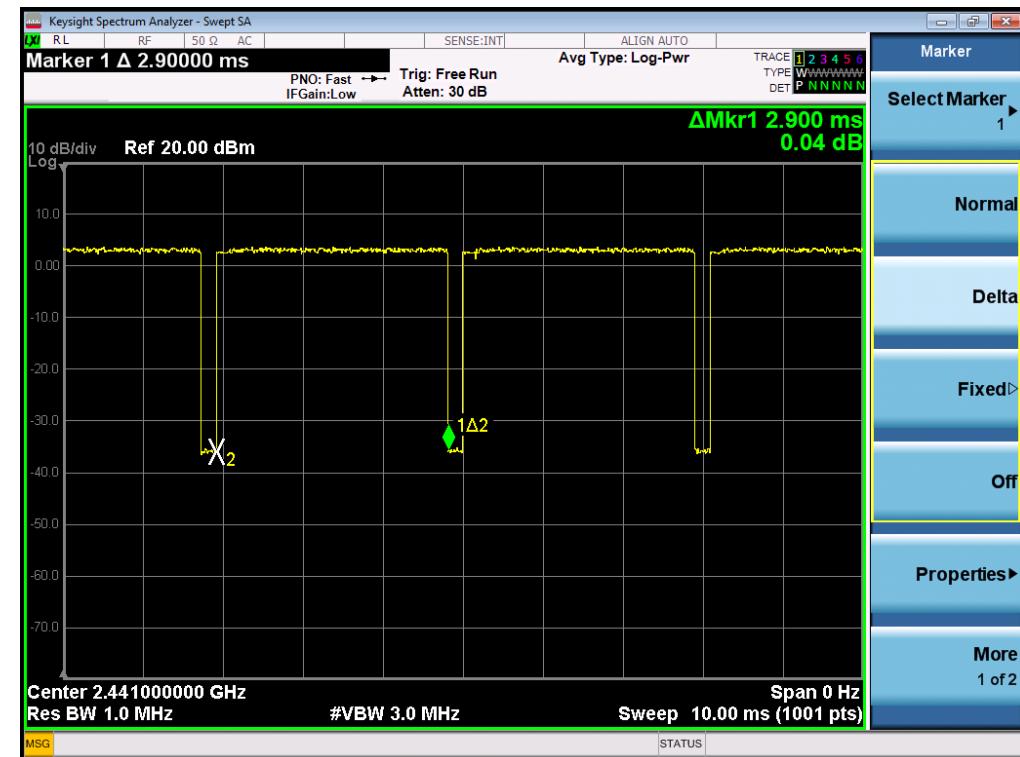

## CH39-3DH5

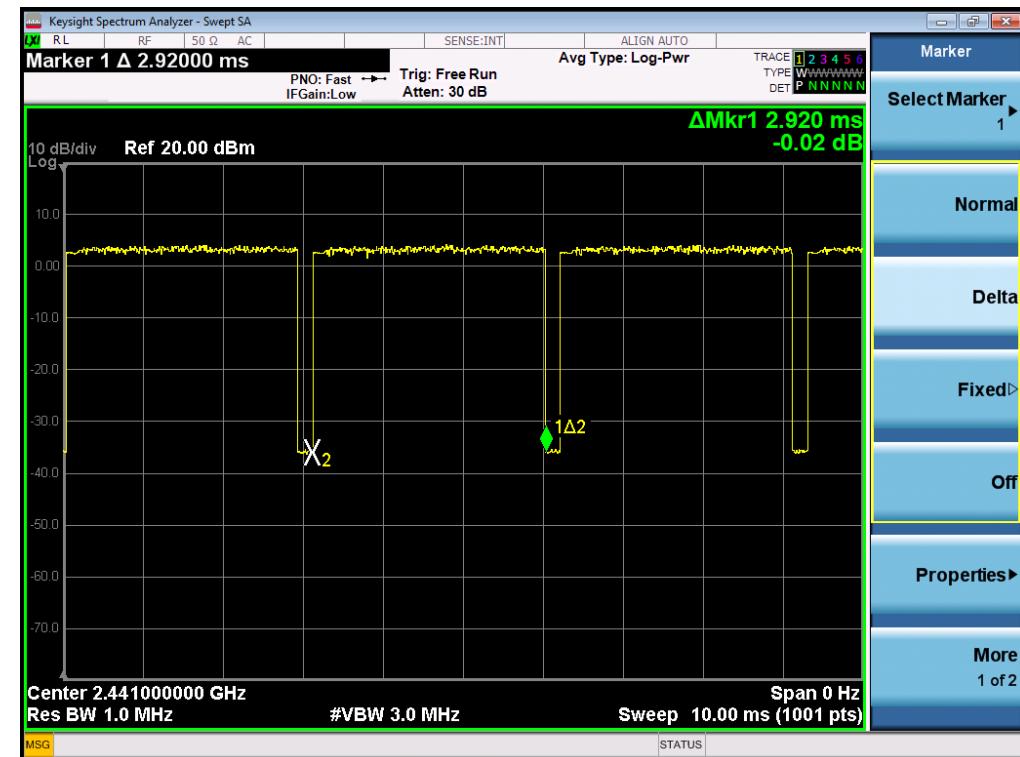


## 10. BAND EDGE COMPLIANCE TEST

### 10.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see §15.205(c)).

### 10.2. Test setup

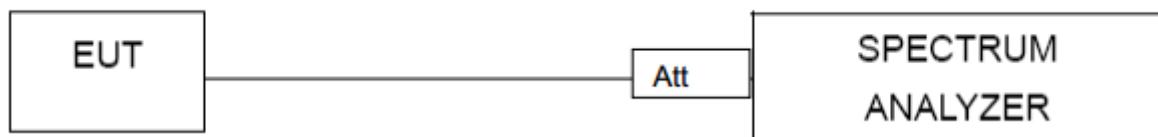



### 10.3. TEST Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.



For conducted test:

| Frequency Band        | Delta Peak to band<br>emission<br>(dBc) | > Limit<br>(dBc) | Result |
|-----------------------|---|------------------|--------|
| GFSK Non-hopping      |   |                  |        |
| Left Band             | 59.48                                   | 20               | Pass   |
| Right Band            | 57.42                                   | 20               | Pass   |
| π/4-DQPSK Non-hopping |   |                  |        |
| Left Band             | 42.60                                   | 20               | Pass   |
| Right Band            | 60.79                                   | 20               | Pass   |
| 8DPSK Non-hopping     |   |                  |        |
| Left Band             | 57.72                                   | 20               | Pass   |
| Right Band            | 59.77                                   | 20               | Pass   |
| GFSK hopping          |   |                  |        |
| Left Band             | 55.90                                   | 20               | Pass   |
| Right Band            | 59.67                                   | 20               | Pass   |
| π/4-DQPSK hopping     |   |                  |        |
| Left Band             | 44.71                                   | 20               | Pass   |
| Right Band            | 59.07                                   | 20               | Pass   |
| 8DPSK hopping         |   |                  |        |
| Left Band             | 53.73                                   | 20               | Pass   |
| Right Band            | 58.84                                   | 20               | Pass   |



## BDR mode (GFSK): Band Edge-Left Side

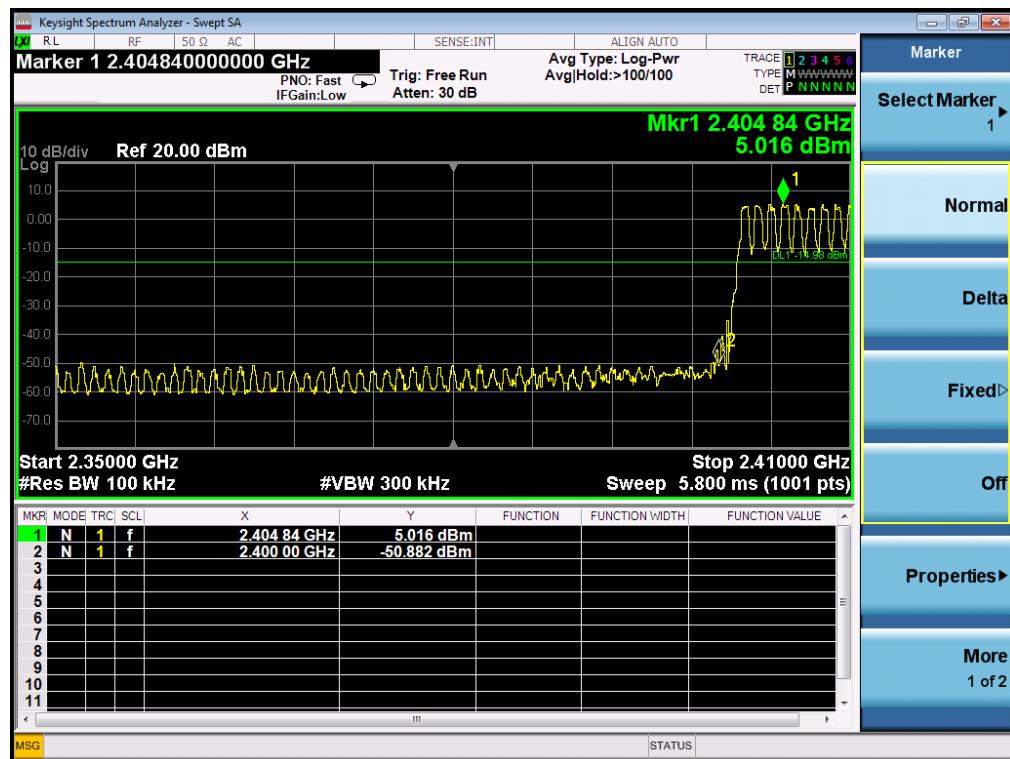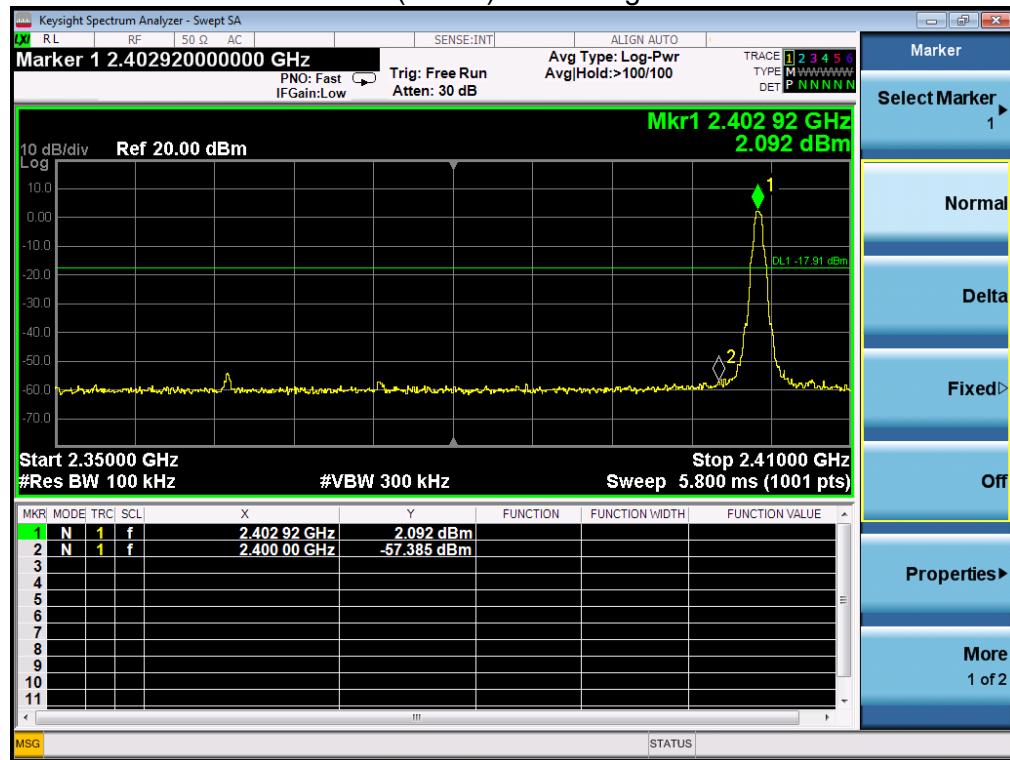


## BDR mode (GFSK): Band Edge-Right Side

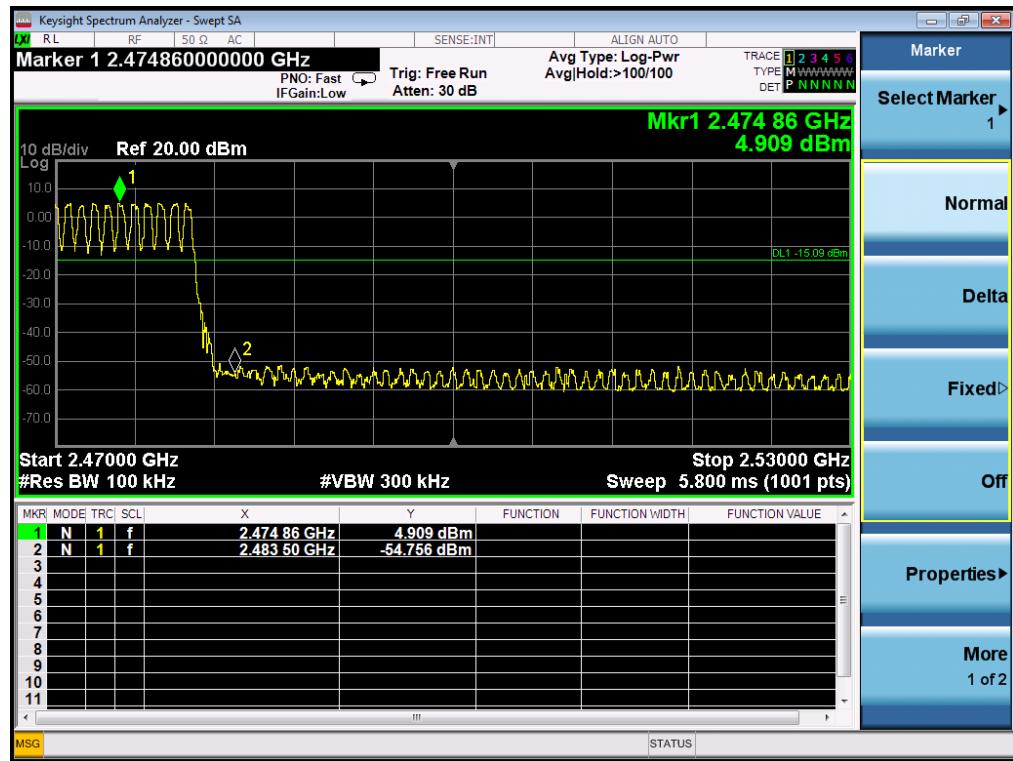
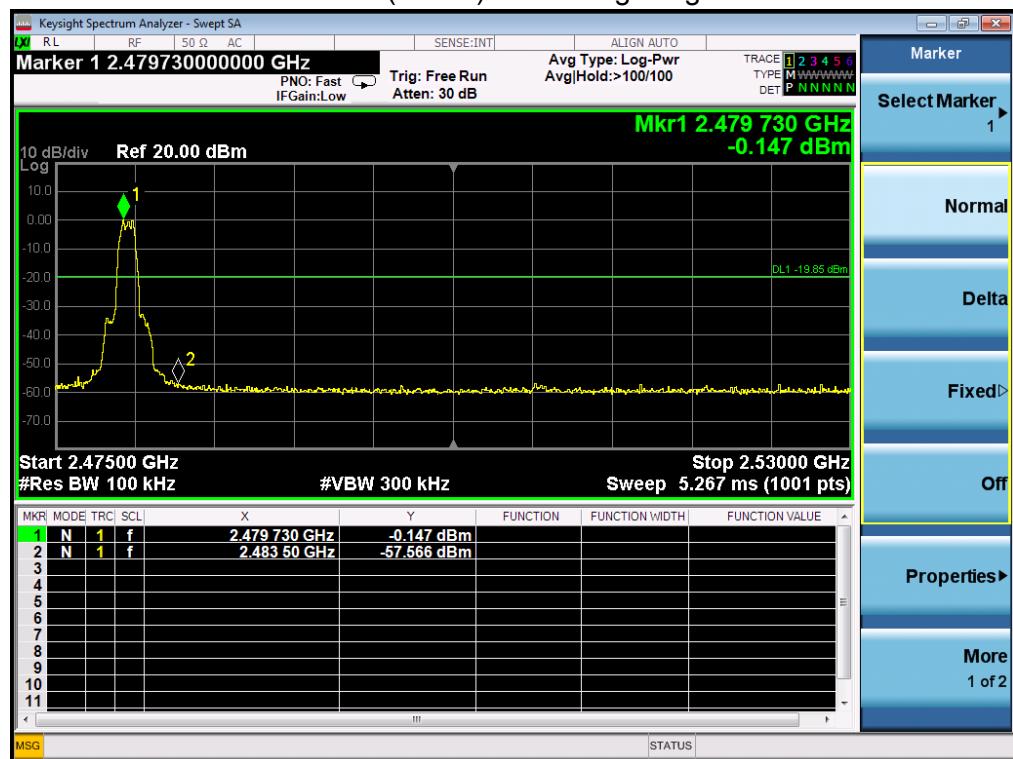


EDR mode ( $\pi/4$ -DQPSK): Band Edge-Left Side

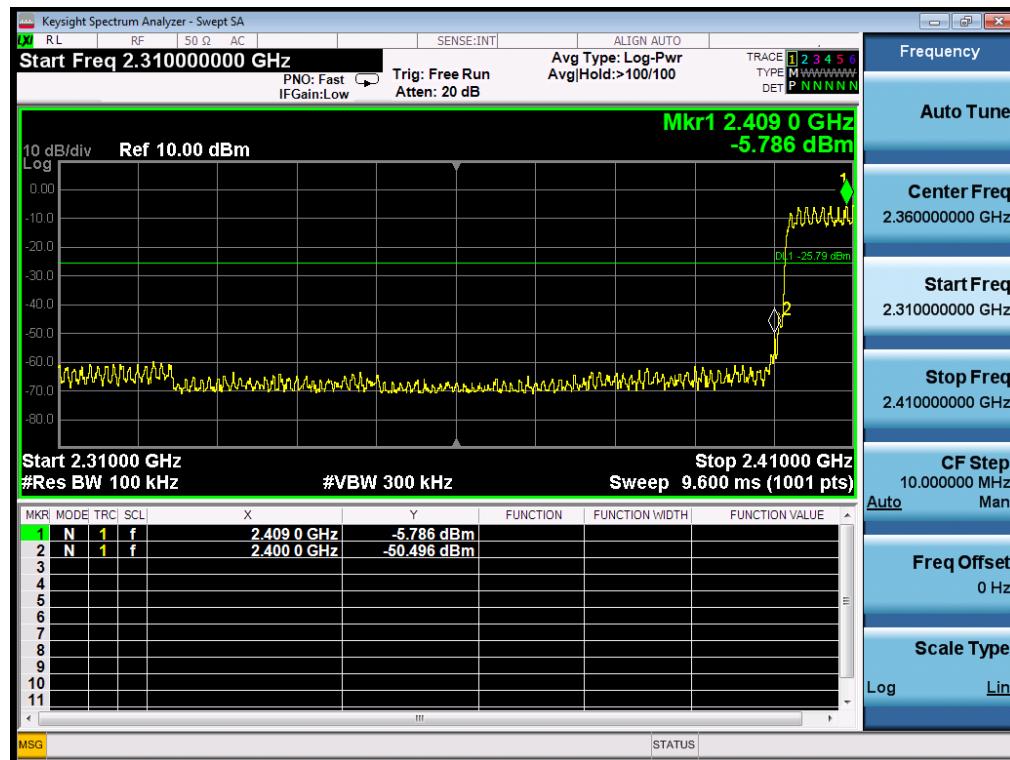
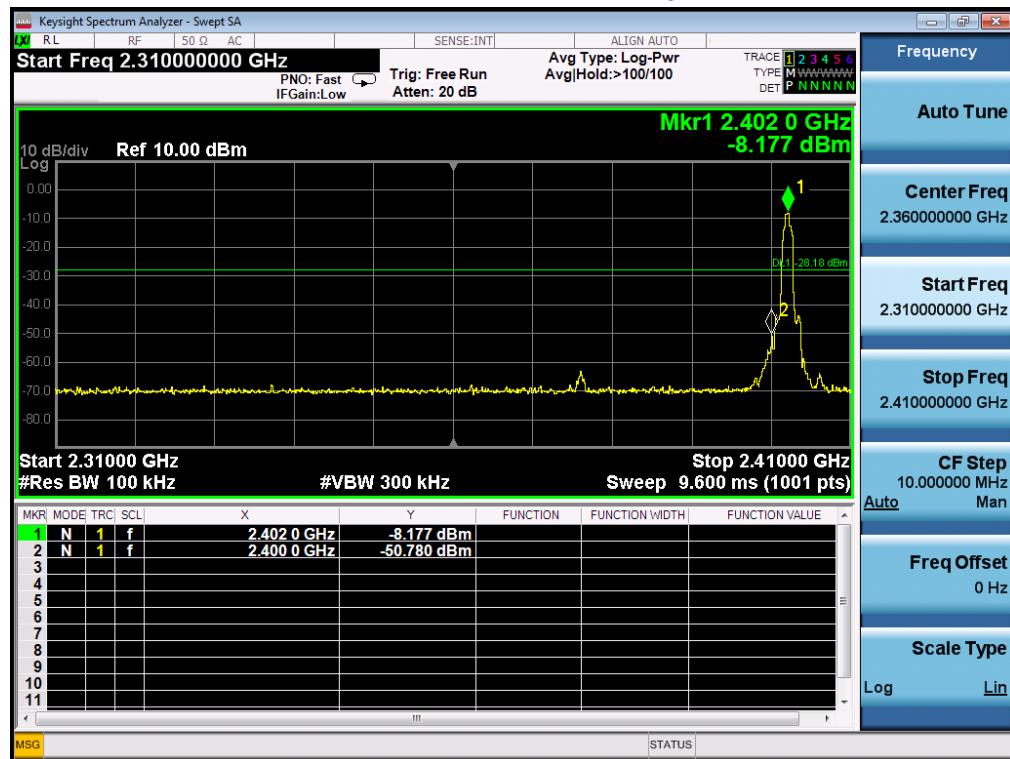


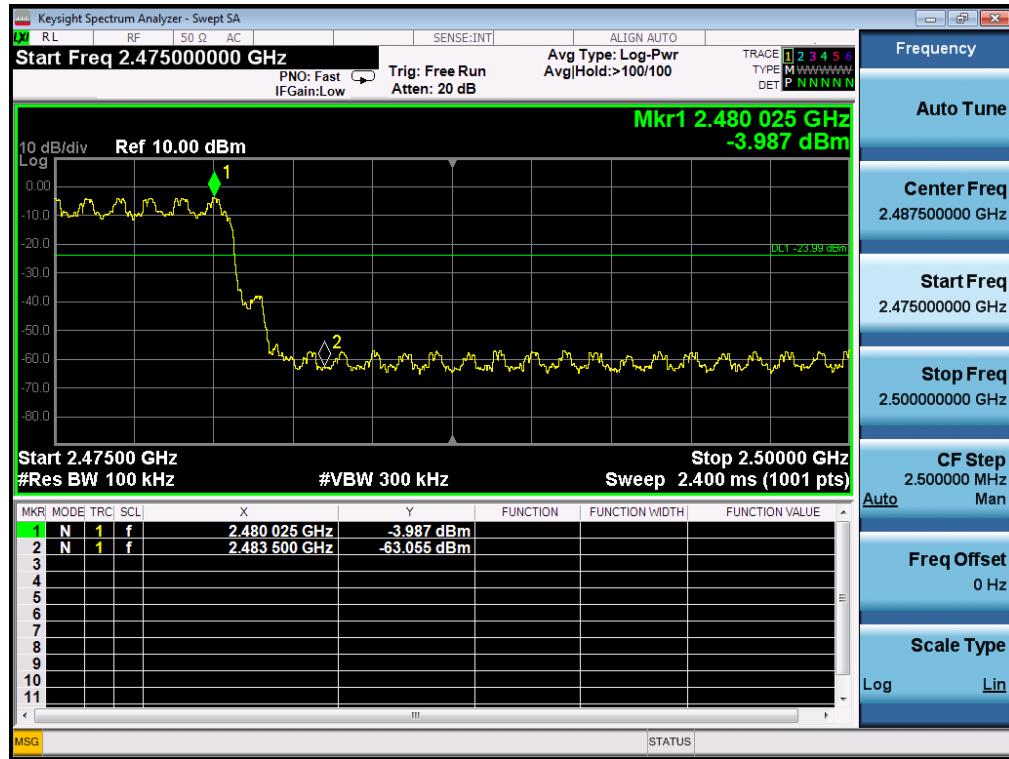EDR mode ( $\pi/4$ -DQPSK): Band Edge- Right Side

## EDR mode(8DPSK): Band Edge-Left Side

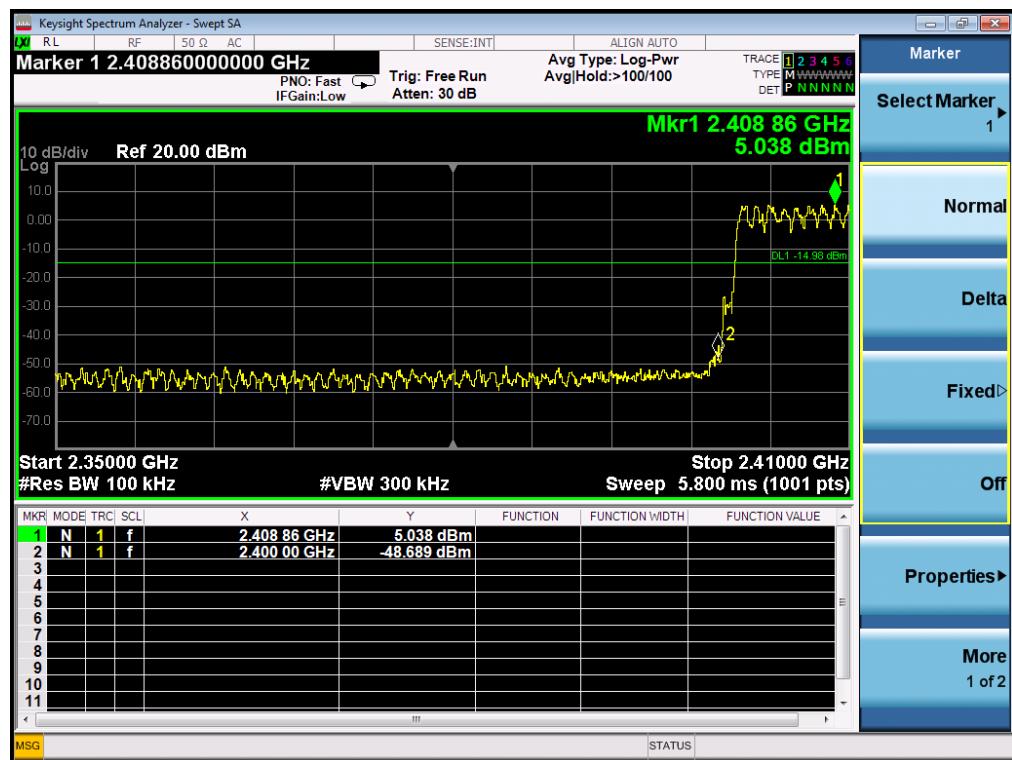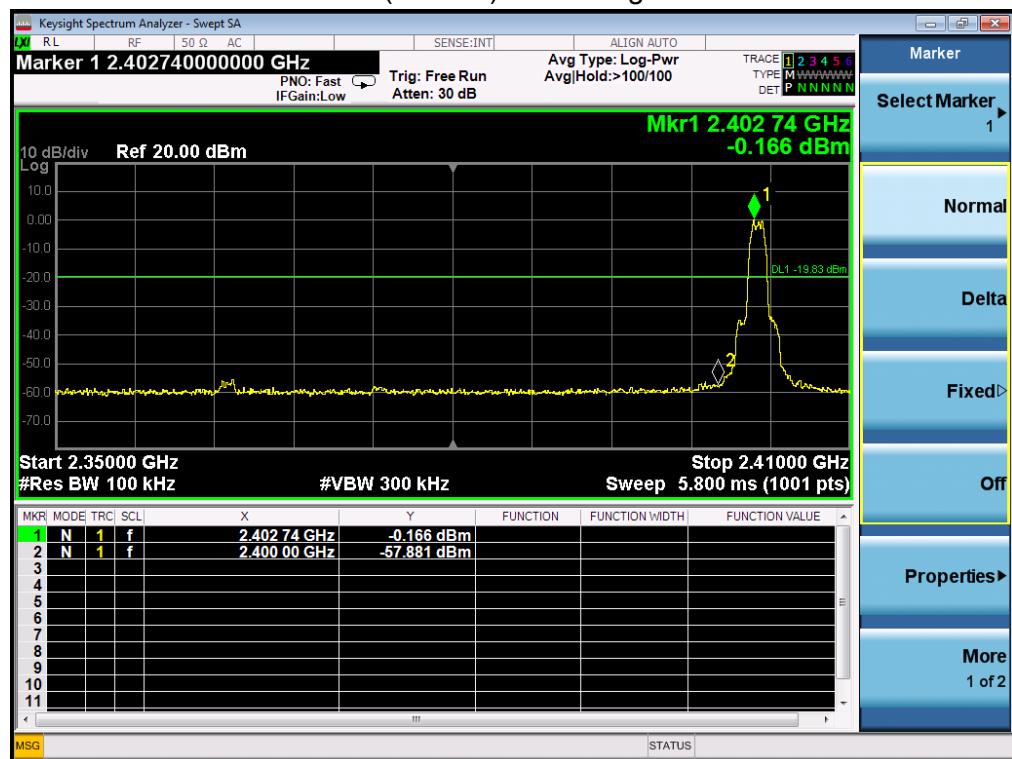

## EDR mode(8DPSK): Band Edge-Right Side

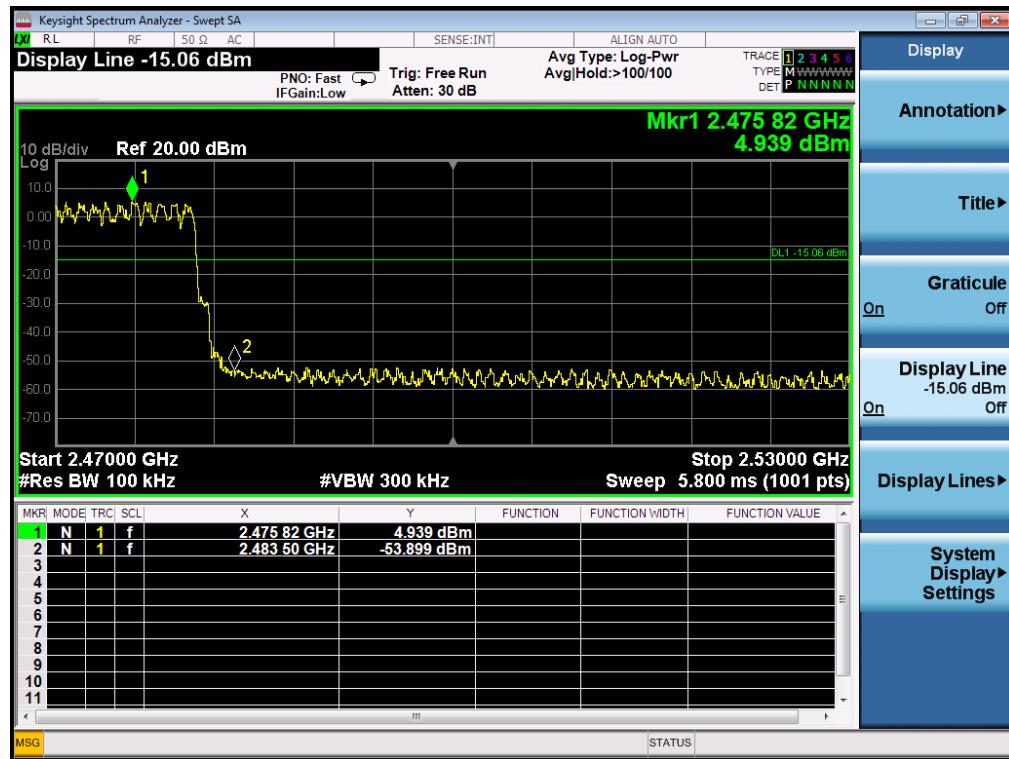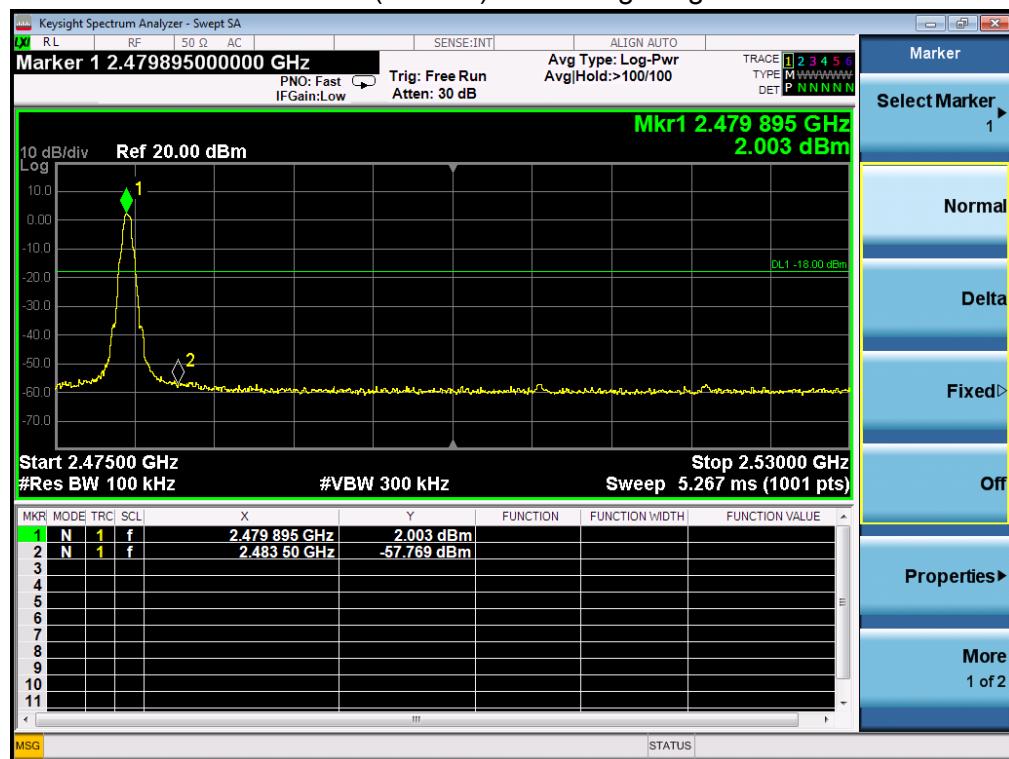

NOTE: Hopping enabled and disabled have evaluated, and the worst data was reported.

## 11. ANTENNA REQUIREMENTS

### 11.1. Limits



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2. Result

The antennas used for this product is FPCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1dBi.

## 12. PHOTOGRAPHS OF TEST SET-UP

Radiated Emission Test

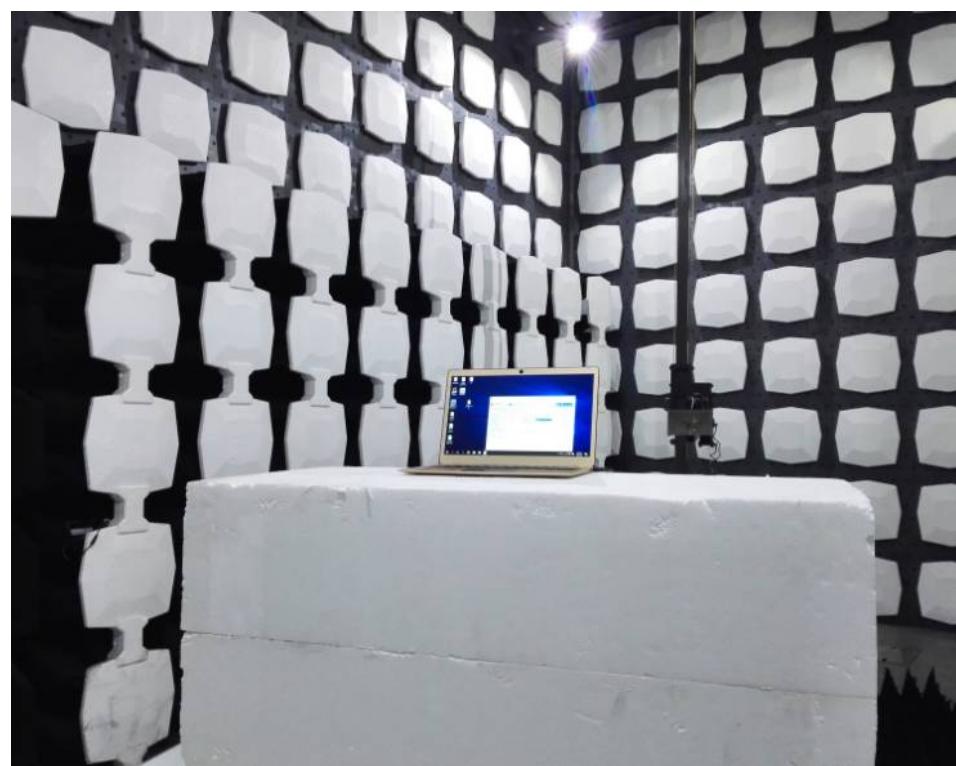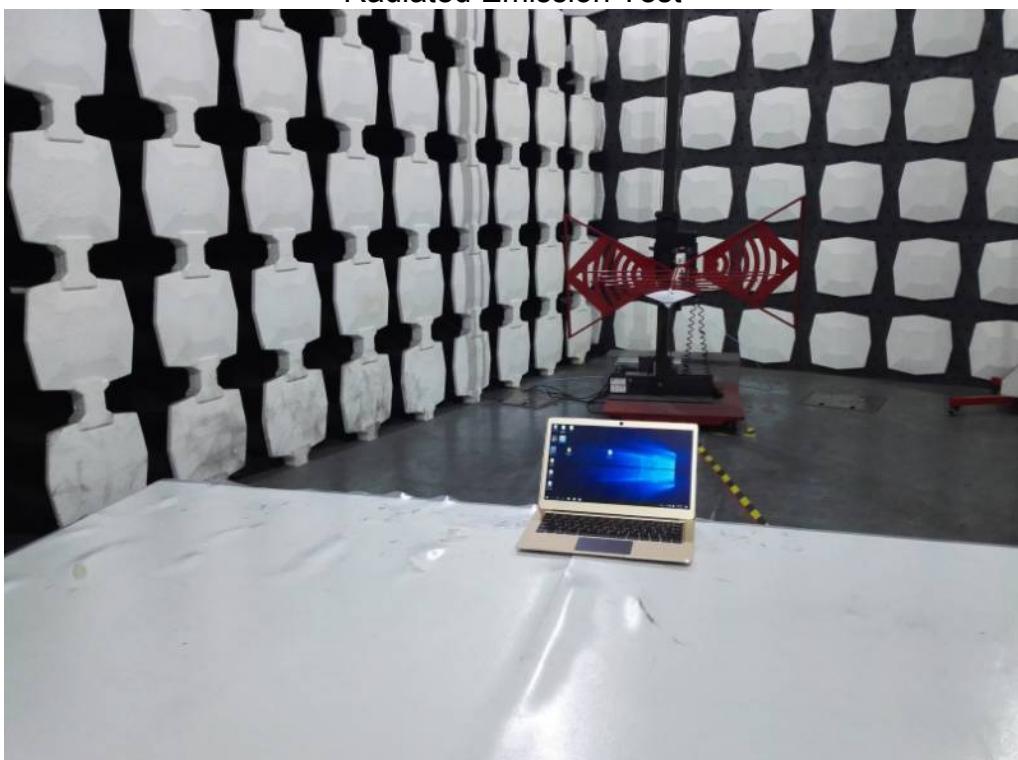

Conducted Emission



## 13. PHOTOGRAPHS OF THE EUT



-----End-----