

RF TEST REPORT

Applicant iRay Technology Co. Ltd.

FCC ID 2ACHK-01070189


Product Wireless Digital Flat Panel Detector

Model Mars1013X

Report No. R2209A0844-R2

Issue Date May 26, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	10
5.1. Unwanted Emission	10
5.2. Conducted Emission	56
6. Main Test Instruments.....	59
ANNEX A: The EUT Appearance	60
ANNEX B: Test Setup Photos	61
ANNEX C: Product Change Description.....	62

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Unwanted Emissions	15.407(b)	PASS
2	Conducted Emissions	15.207	PASS
Date of Testing: April 9, 2023 ~ April 18, 2023			
Date of Sample Received: September 28, 2022			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Mars1013X (Report No.: R2209A0844-R2) is a variant model of WIFI-2-V897EA1 (Report No.: R1905A0235-R4).

Test Case refers to the following table.

Test Case	Original (WIFI-2-V897EA1)	Variant (Mars1013X)
Average output power	PASS	Refer to the original report: R1905A0235-R4.
Occupied bandwidth	PASS	Refer to the original report: R1905A0235-R4.
Frequency stability	PASS	Refer to the original report: R1905A0235-R4.
Power spectral density	PASS	Refer to the original report: R1905A0235-R4.
Unwanted Emissions	PASS	PASS
Conducted Emissions	PASS	PASS

The detailed product change description please refers to the *Difference Declaration Letter*.

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	iRay Technology Co. Ltd.
Applicant address	RM 202, Building 7, No. 590, Ruiqing RD., Pudong, Shanghai, China
Manufacturer	iRay Technology Co. Ltd.
Manufacturer address	RM 202, Building 7, No. 590, Ruiqing RD., Pudong, Shanghai, China

2.2. General information

EUT Description		
Model	Mars1013X	
Lab Internal SN	R2209A0844/S02	
Hardware Version	A06	
Software Version	ARM: Kernel: 1.0.39.0 Core: 2.3.1.75 FPGA: 2.10.1.16 MCU: 2.10.0.17	
Power Supply	Battery / AC adapter	
Antenna Type	Internal Antenna	
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)	
Antenna Gain	U-NII-1:	Short Cable: 1.42 dBi Long Cable: 2.78 dBi
	U-NII-3:	Short Cable: 3.04 dBi Long Cable: -0.30 dBi
Directional Gain	NA	
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-3: 5725MHz -5850MHz	
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM	
EUT Accessory		
Adapter	Manufacturer: Shenzhen Longxc Power Supply Co., LTD Model: LXCP61-024300	
Rechargeable Li-ion Battery Pack	Manufacturer: iRay Technology Taicang Ltd. Model: BATTERY-KX	
DC cable	Manufacturer: iRay Technology Co. Ltd. Model: /	
Charger	Manufacturer: iRay Technology Taicang Ltd.	

	Model: CHARGER-COMBO
Note:	
1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	
2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.	
3. (a) Manufacturers implements security features in any digitally modulated devices capable of operating in any of the U-NII bands, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software prevents the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers uses means including, but not limited to the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment authorization.	
(b) Manufacturers take steps to ensure that DFS functionality cannot be disabled by the operator of the U-NII device.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2022) Unlicensed National Information Infrastructure Devices

ANSI C63.10-2013

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	/
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ac VHT20	MCS0	MCS0	MCS0
802.11ac VHT40	MCS0	MCS0	MCS0
802.11ac VHT80	MCS0	MCS0	MCS0

Wireless Technology and Frequency Range

Wireless Technology	Bandwidth	Channel	Frequency	
Wi-Fi	U-NII-1	20 MHz	36	
			40	
			44	
			48	
		40 MHz	38	
			46	
	U-NII-3	80 MHz	42	
		20 MHz	149	
			153	
			157	
			161	
	40 MHz	165	5825MHz	
		151	5755MHz	
		159	5795MHz	
		80 MHz	155	
Does this device support TPC Function? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
Does this device support TDWR Band? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				

5. Test Case Results

5.1. Unwanted Emission

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission

is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.


The test is in transmitting mode.

Test setup


9KHz~ 30MHz

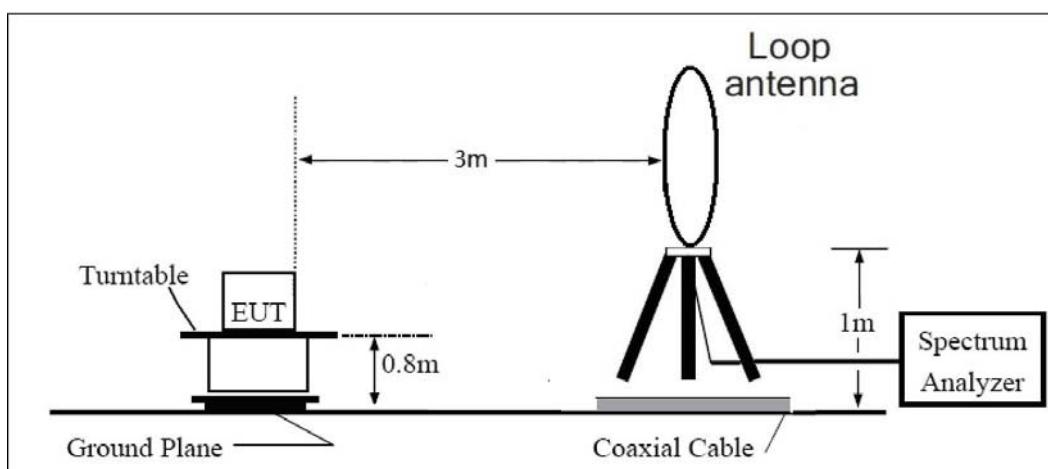

30MHz~ 1GHz

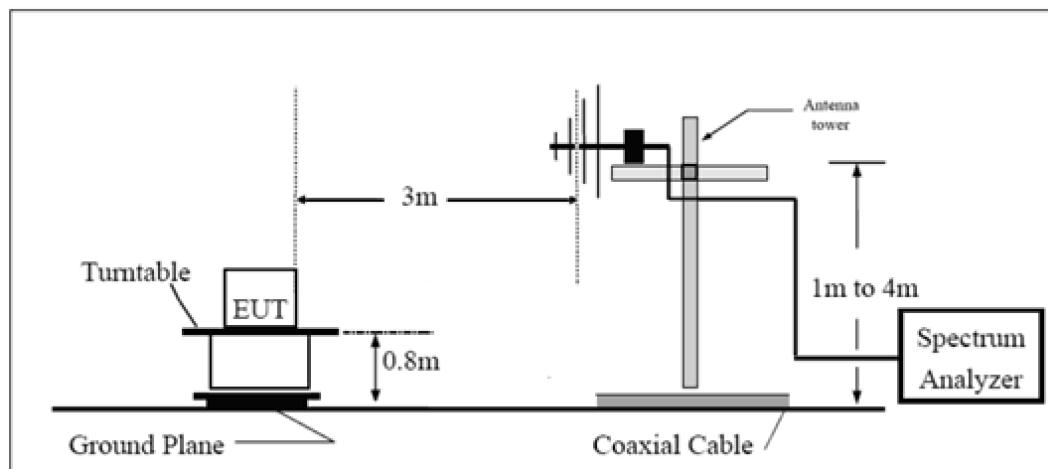

Above 1GHz

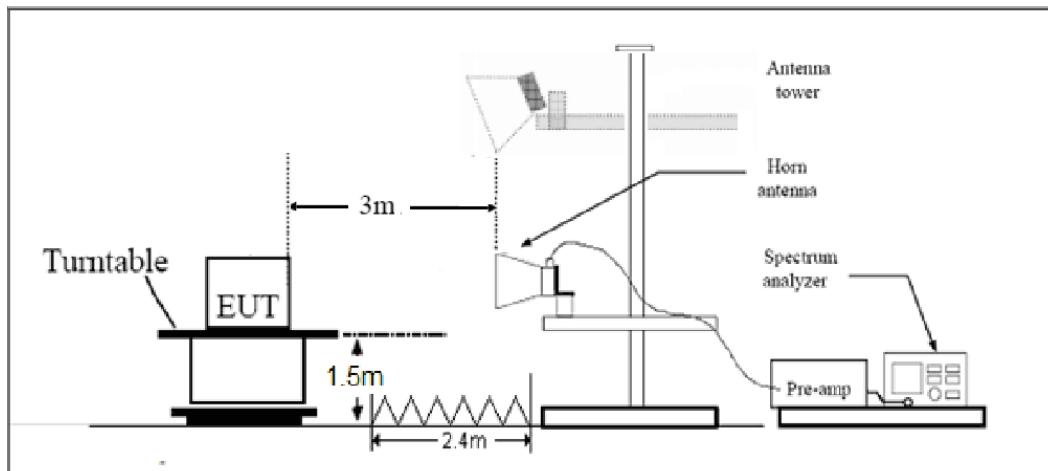

Note: Area side: 2.4mX3.6m

Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).

Note: the following formula is used to convert the EIRP to field strength

§1. $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2. $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dB μ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30–88	100	40
88–216	150	43.5
216–960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB


Test Results:








The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

After the pretest, SISO Antenna 2 was selected as the worst antenna.

The signal beyond the limit is carrier.

A symbol () in the test plot below means (dB μ V/m)

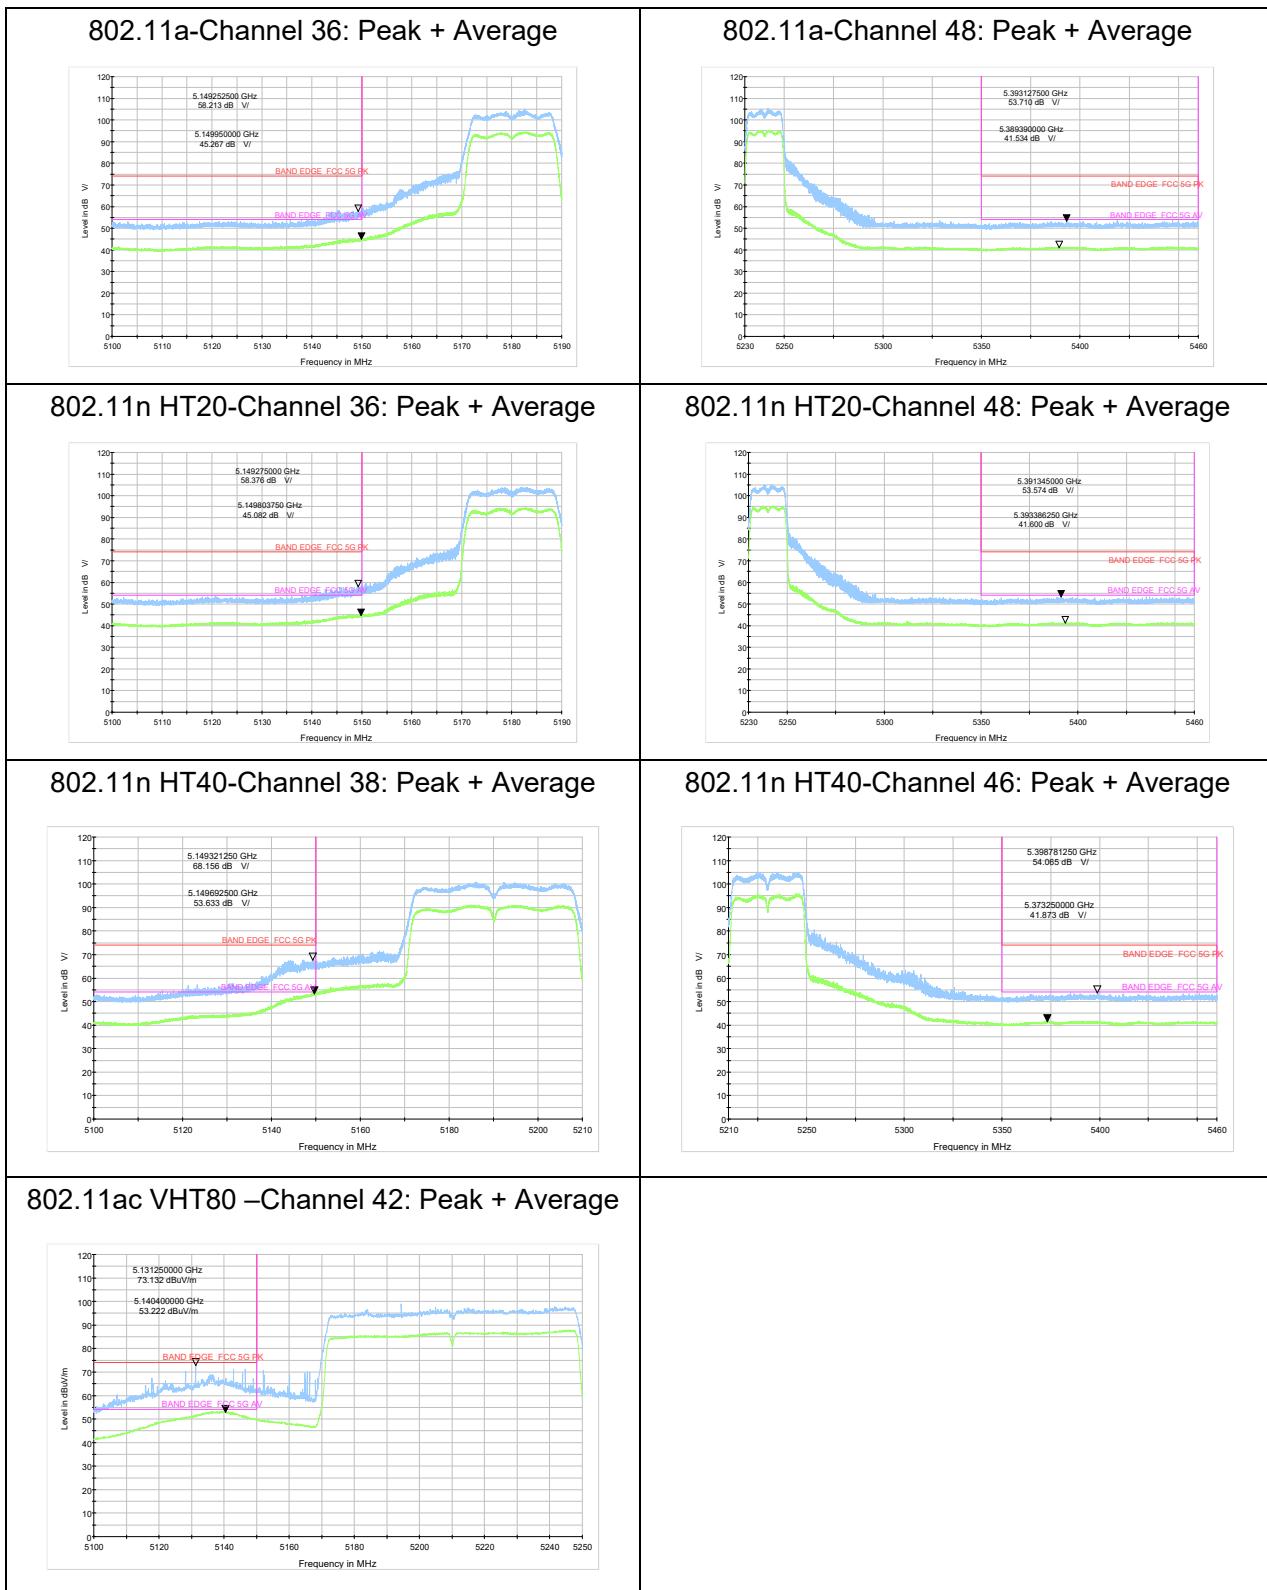U-NII-1

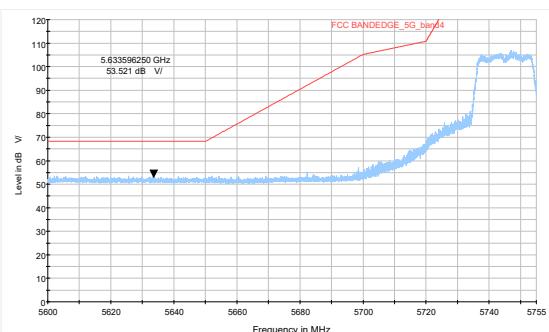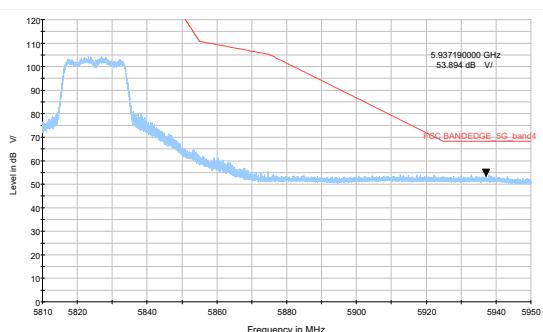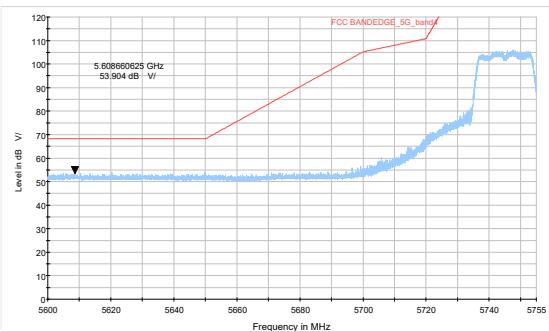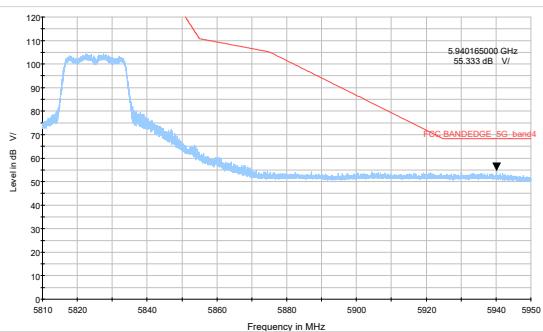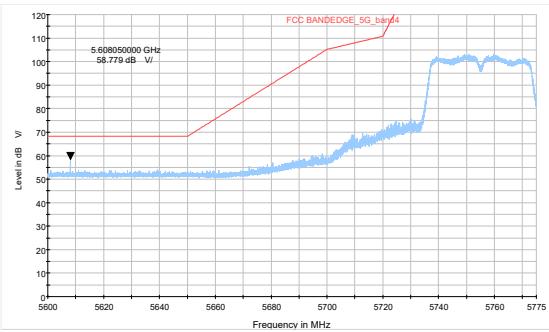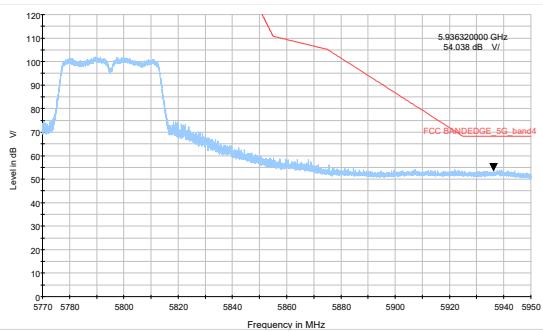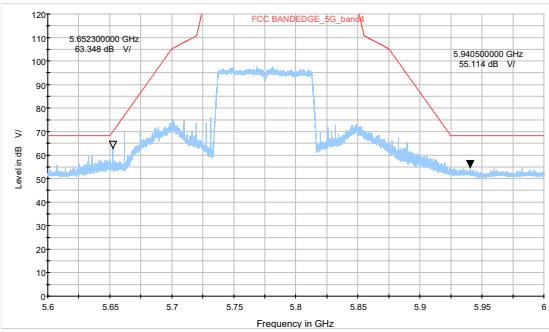
U-NII-3
802.11a-Channel 149: Peak

802.11a-Channel 165: Peak

802.11n HT20-Channel 149: Peak

802.11n HT20-Channel 165: Peak

802.11n HT40-Channel 151: Peak

802.11n HT40-Channel 159: Peak

802.11ac VHT80- Channel 155: Peak


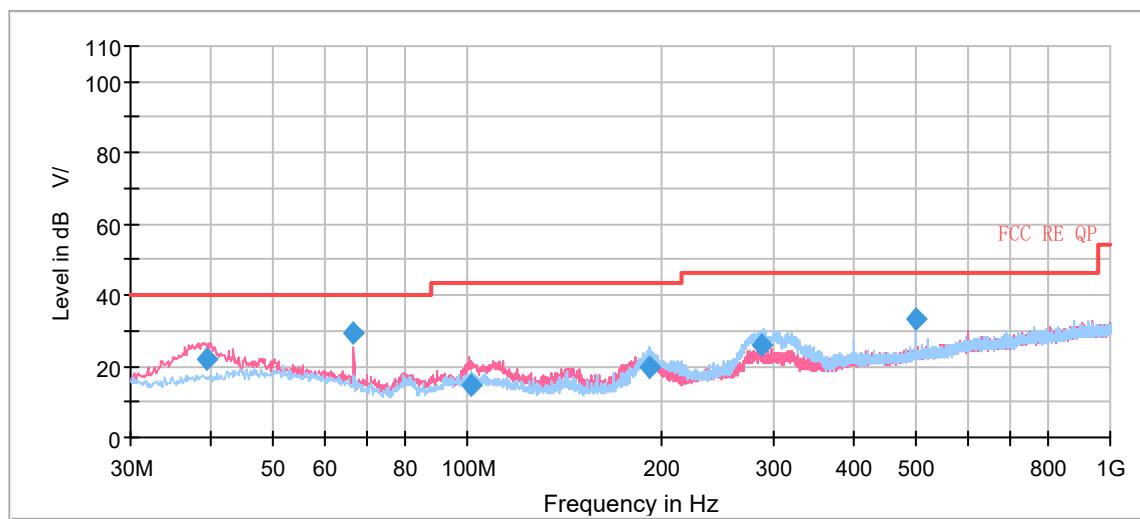
Result of RE**Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-40GHz are more than 20dB below the limit are not reported.

After the pretest, SISO Antenna 2 was selected as the worst antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a CH36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A symbol (dB V) in the test plot below means (dB μ V/m)


Continuous TX mode:

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
39.411075	22.27	100.0	V	22.0	19.3	17.73	40.00
66.684413	29.24	100.0	V	50.0	17.4	10.76	40.00
101.426750	14.82	100.0	V	0.0	18.8	28.68	43.50
192.111750	19.49	100.0	H	314.0	18.0	24.01	43.50
287.585000	25.68	100.0	H	207.0	20.1	20.32	46.00
500.025000	33.20	100.0	V	90.0	24.8	12.80	46.00


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

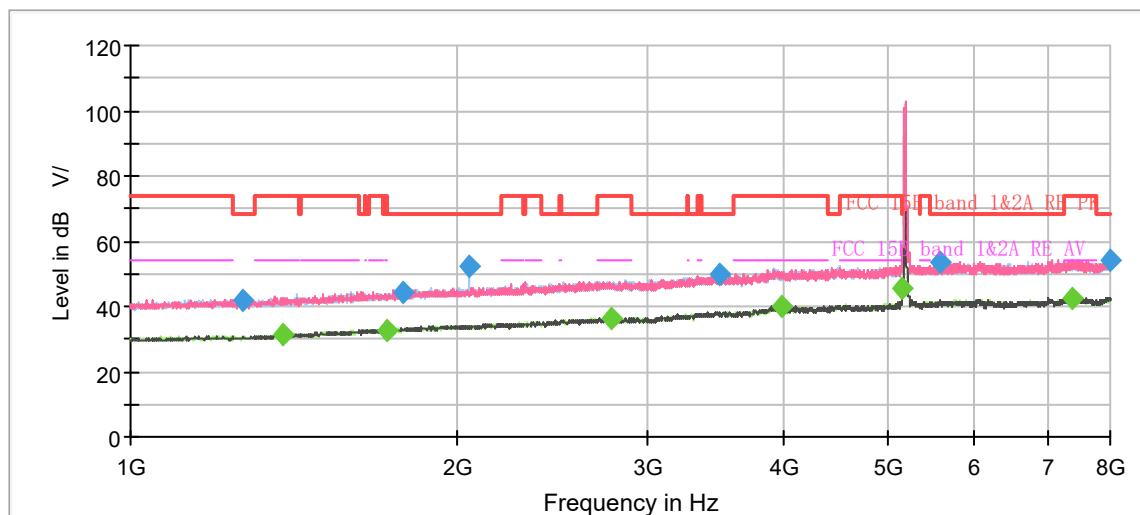

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

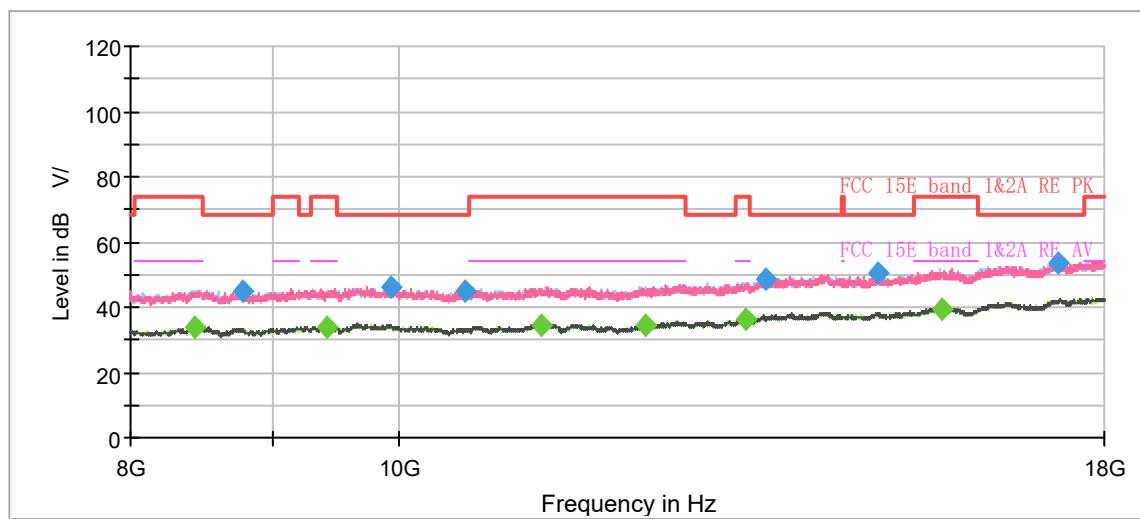


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1269.500000	41.94	---	68.20	26.26	500.0	200.0	H	290.0	-7.3
1384.125000	---	31.49	54.00	22.51	500.0	200.0	V	38.0	-6.6
1721.000000	---	32.91	54.00	21.09	500.0	200.0	H	260.0	-4.8
1780.500000	44.24	---	68.20	23.96	500.0	200.0	H	186.0	-4.5
2049.125000	52.35	---	68.20	15.85	500.0	100.0	H	53.0	-3.2
2772.750000	---	36.29	54.00	17.71	500.0	100.0	V	94.0	0.0
3488.500000	49.80	---	68.20	18.40	500.0	200.0	H	335.0	2.5
3989.000000	---	39.73	54.00	14.27	500.0	200.0	V	345.0	4.5
5149.250000	---	45.42	54.00	8.58	500.0	100.0	H	32.0	7.1
5580.625000	53.53	---	68.20	14.67	500.0	100.0	V	315.0	7.9
7393.625000	---	42.68	54.00	11.32	500.0	200.0	H	220.0	9.3
7994.750000	54.31	---	68.20	13.89	500.0	100.0	V	225.0	9.2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

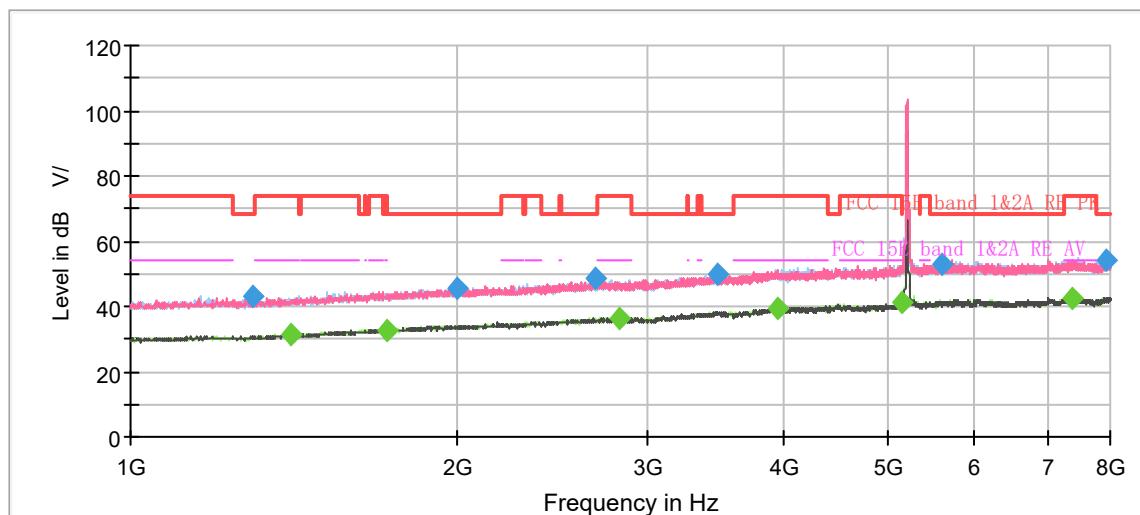

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

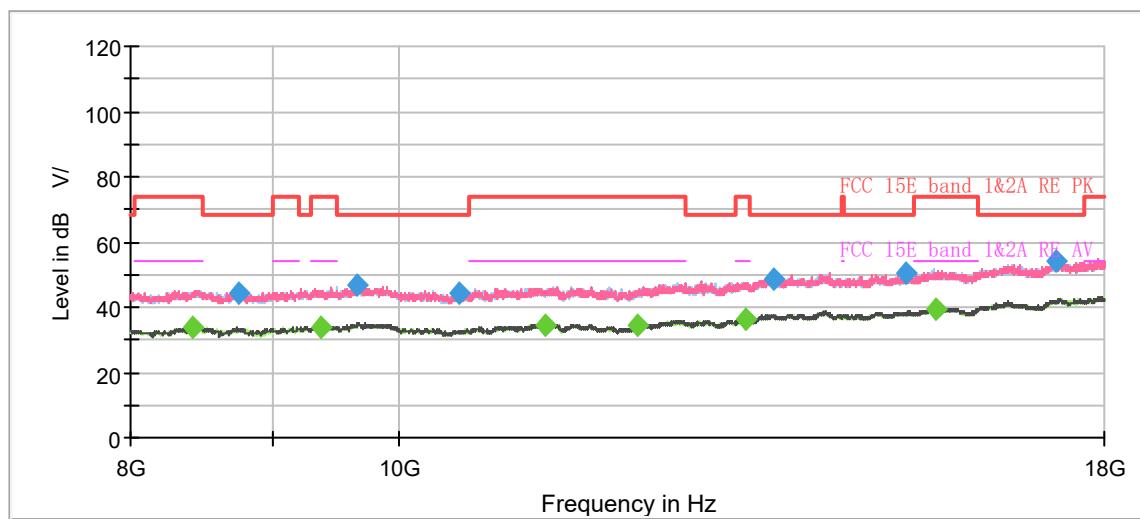


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1297.500000	42.86	---	68.20	25.34	500.0	100.0	H	90.0	-7.2
1405.125000	---	31.32	54.00	22.68	500.0	100.0	V	110.0	-6.4
1721.875000	---	32.78	54.00	21.22	500.0	200.0	H	331.0	-4.8
1996.625000	45.45	---	68.20	22.75	500.0	100.0	H	202.0	-3.5
2676.500000	48.48	---	68.20	19.72	500.0	200.0	H	166.0	-0.2
2820.875000	---	36.30	54.00	17.70	500.0	100.0	H	152.0	0.1
3475.375000	49.67	---	68.20	18.53	500.0	100.0	V	0.0	2.5
3945.250000	---	39.61	54.00	14.39	500.0	200.0	H	270.0	4.4
5145.750000	---	41.20	54.00	12.80	500.0	100.0	V	278.0	7.1
5592.875000	52.84	---	68.20	15.36	500.0	200.0	V	64.0	7.9
7391.875000	---	42.53	54.00	11.47	500.0	100.0	H	85.0	9.3
7948.375000	54.16	---	68.20	14.04	500.0	100.0	H	99.0	9.1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

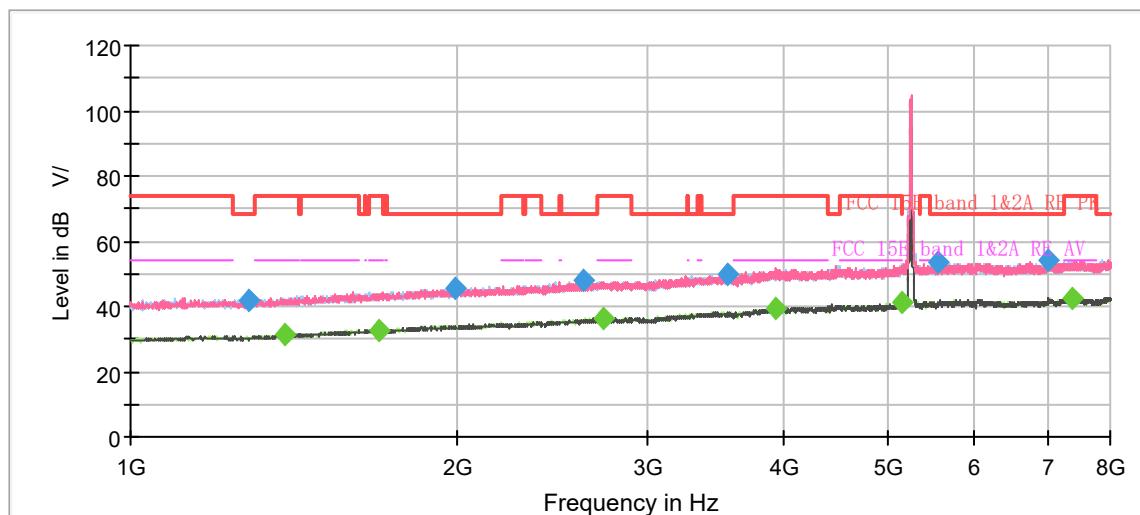

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

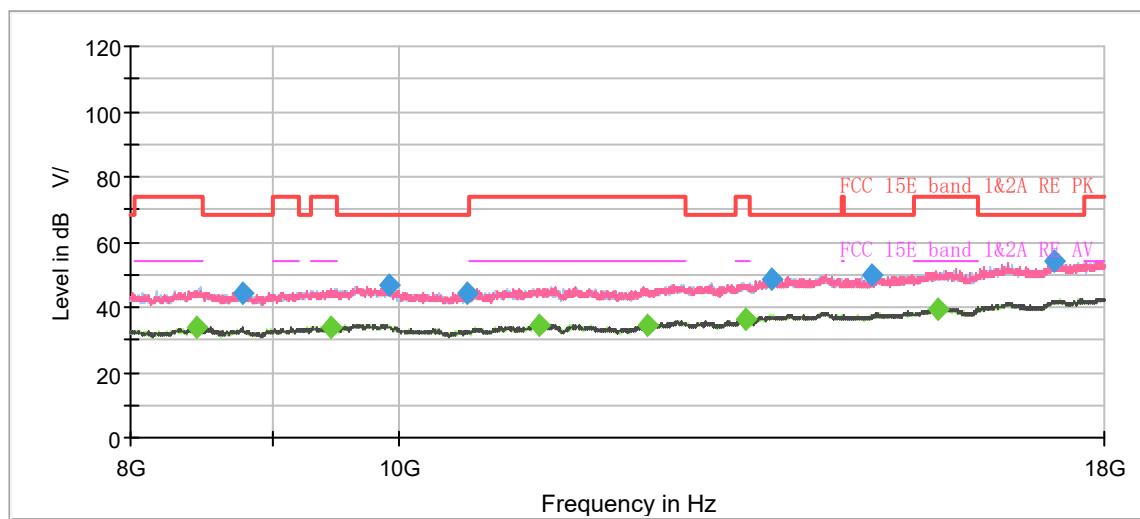


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1287.875000	42.10	---	68.20	26.10	500.0	200.0	V	212.0	-7.2
1388.500000	---	31.43	54.00	22.57	500.0	200.0	H	264.0	-6.6
1693.000000	---	32.80	54.00	21.20	500.0	200.0	V	16.0	-5.0
1992.250000	45.59	---	68.20	22.61	500.0	200.0	V	60.0	-3.5
2617.000000	47.74	---	68.20	20.46	500.0	100.0	H	137.0	-0.6
2730.750000	---	36.25	54.00	17.75	500.0	200.0	H	353.0	-0.1
3555.875000	49.65	---	68.20	18.55	500.0	200.0	H	201.0	2.6
3937.375000	---	39.58	54.00	14.42	500.0	200.0	H	137.0	4.4
5147.500000	---	41.18	54.00	12.82	500.0	100.0	V	245.0	7.1
5543.000000	53.38	---	68.20	14.82	500.0	100.0	V	250.0	7.8
7005.125000	54.14	---	68.20	14.06	500.0	200.0	V	303.0	8.9
7394.500000	---	42.47	54.00	11.53	500.0	200.0	H	235.0	9.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

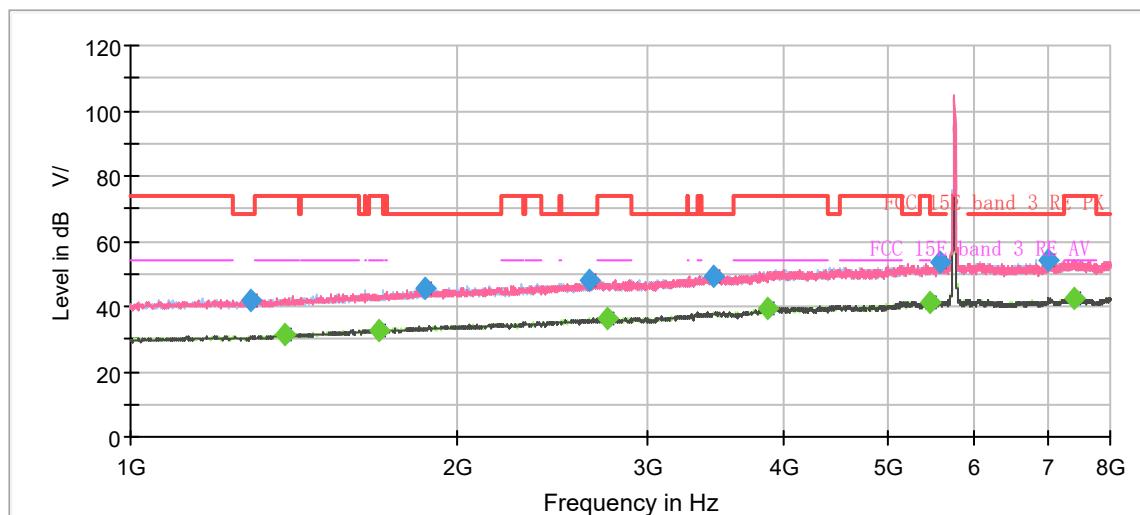

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

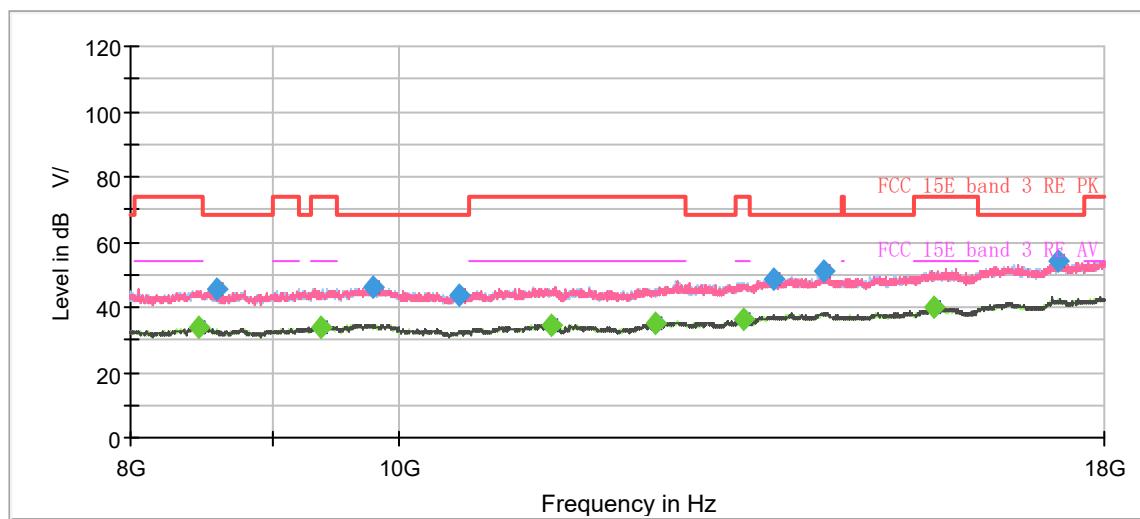


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1291.375000	41.79	---	68.20	26.41	500.0	200.0	V	12.0	-7.2
1385.875000	---	31.41	54.00	22.59	500.0	100.0	V	188.0	-6.6
1696.500000	---	32.80	54.00	21.20	500.0	200.0	V	61.0	-4.9
1867.125000	45.50	---	68.20	22.70	500.0	100.0	V	356.0	-4.1
2646.750000	48.01	---	68.20	20.19	500.0	100.0	V	261.0	-0.4
2745.625000	---	36.27	54.00	17.73	500.0	200.0	V	22.0	-0.1
3447.375000	49.47	---	68.20	18.73	500.0	200.0	V	339.0	2.4
3868.250000	---	39.54	54.00	14.46	500.0	200.0	V	204.0	4.1
5447.625000	---	41.23	54.00	12.77	500.0	100.0	V	109.0	7.6
5563.125000	53.45	---	68.20	14.75	500.0	100.0	H	98.0	7.9
7006.875000	54.11	---	68.20	14.09	500.0	200.0	H	221.0	8.9
7395.375000	---	42.62	54.00	11.38	500.0	200.0	V	51.0	9.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

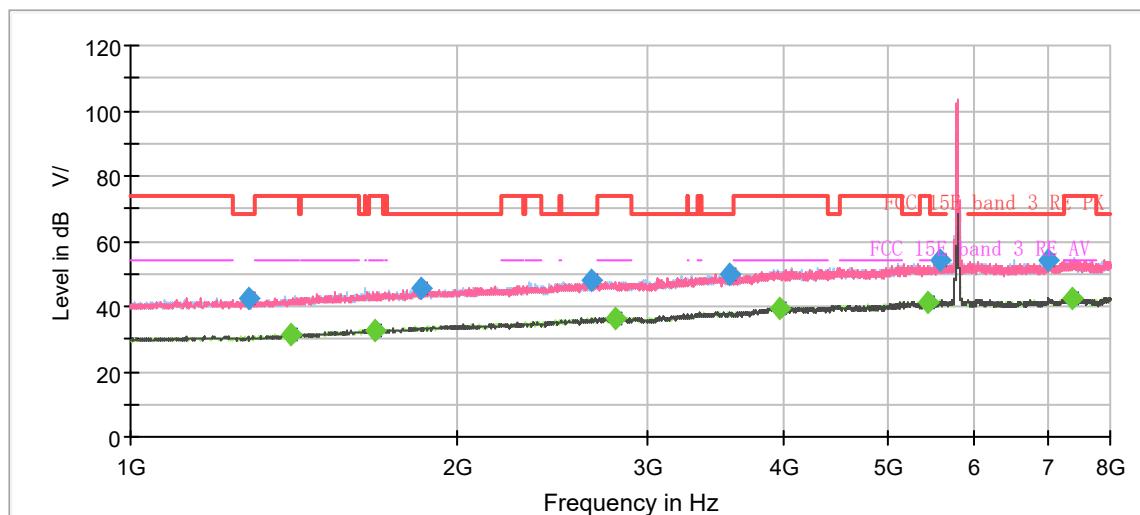

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

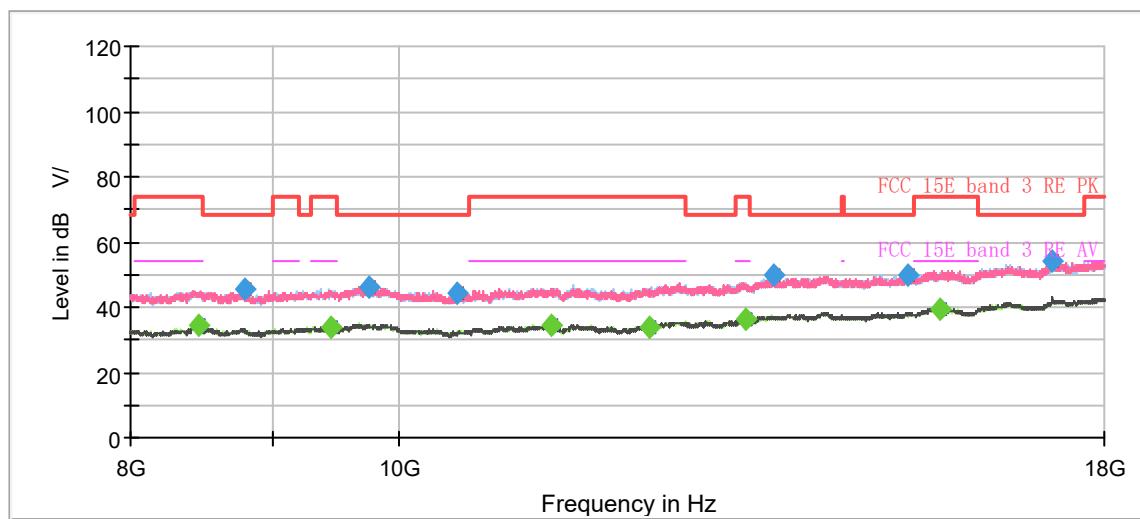


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1283.500000	42.22	---	68.20	25.98	500.0	100.0	H	239.0	-7.3
1406.000000	---	31.57	54.00	22.43	500.0	100.0	V	85.0	-6.4
1680.750000	---	32.86	54.00	21.14	500.0	200.0	H	226.0	-5.0
1854.875000	45.30	---	68.20	22.90	500.0	100.0	V	115.0	-4.1
2656.375000	47.76	---	68.20	20.44	500.0	200.0	H	211.0	-0.4
2793.750000	---	36.61	54.00	17.39	500.0	200.0	H	0.0	0.0
3564.625000	49.67	---	68.20	18.53	500.0	200.0	V	66.0	2.6
3973.250000	---	39.64	54.00	14.36	500.0	200.0	H	201.0	4.5
5438.000000	---	41.31	54.00	12.69	500.0	200.0	H	334.0	7.6
5578.875000	53.98	---	68.20	14.22	500.0	100.0	H	156.0	7.9
7000.750000	54.33	---	68.20	13.87	500.0	100.0	H	19.0	8.8
7384.875000	---	42.52	54.00	11.48	500.0	200.0	V	144.0	9.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

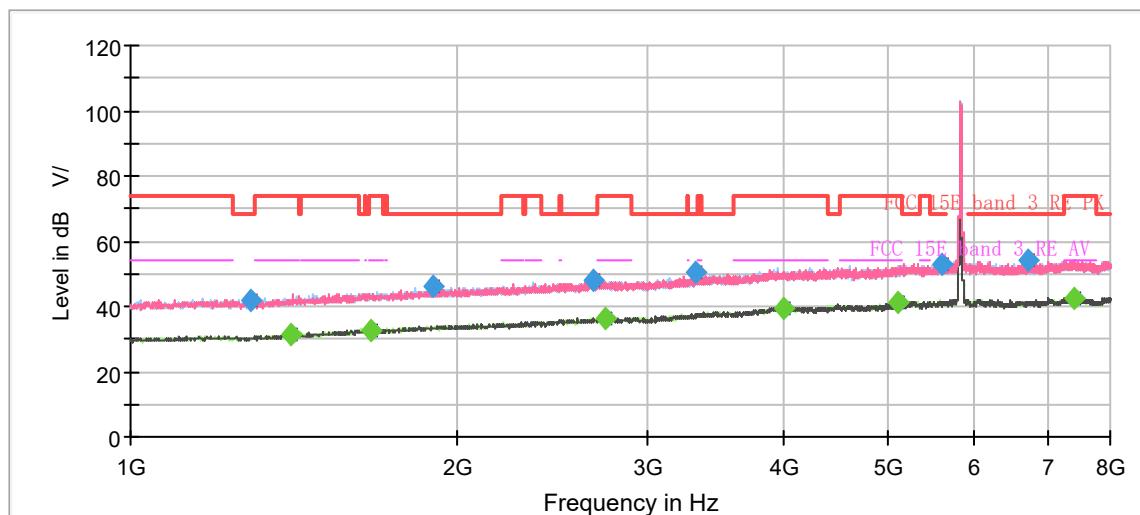

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

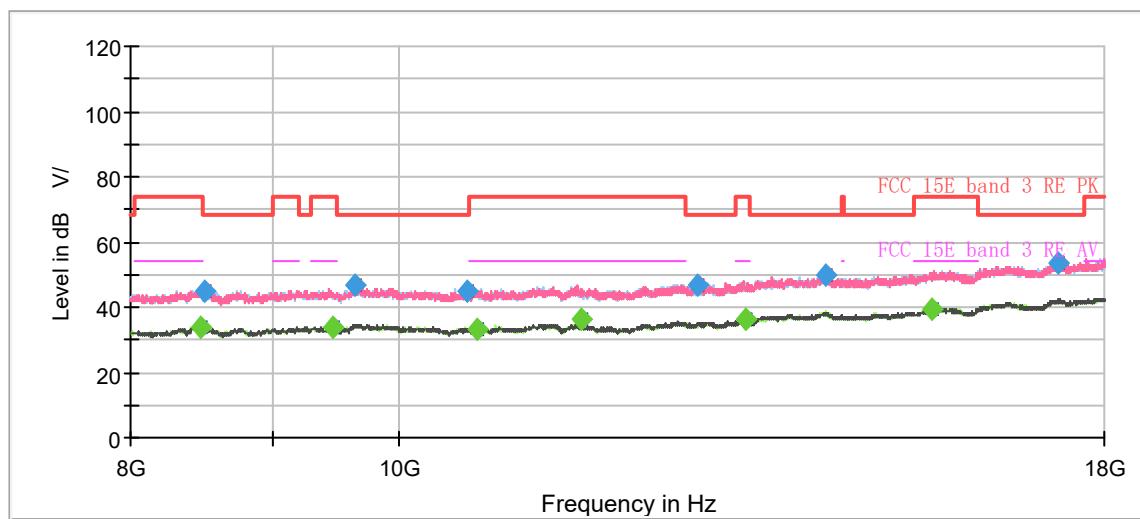


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1293.125000	41.84	---	68.20	26.36	500.0	200.0	V	0.0	-7.2
1404.250000	---	31.14	54.00	22.86	500.0	100.0	V	91.0	-6.5
1664.125000	---	32.92	54.00	21.08	500.0	200.0	V	155.0	-5.1
1897.750000	46.40	---	68.20	21.80	500.0	200.0	V	27.0	-3.9
2675.625000	48.14	---	68.20	20.06	500.0	200.0	V	150.0	-0.2
2743.000000	---	36.29	54.00	17.71	500.0	200.0	H	309.0	-0.1
3313.500000	50.55	---	68.20	17.65	500.0	100.0	H	86.0	1.9
3994.250000	---	39.53	54.00	14.47	500.0	200.0	H	252.0	4.5
5095.875000	---	41.25	54.00	12.75	500.0	200.0	V	263.0	6.9
5601.625000	53.16	---	68.20	15.04	500.0	100.0	H	221.0	8.0
6727.750000	54.14	---	68.20	14.06	500.0	200.0	V	47.0	8.6
7398.000000	---	42.54	54.00	11.46	500.0	200.0	H	147.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH36

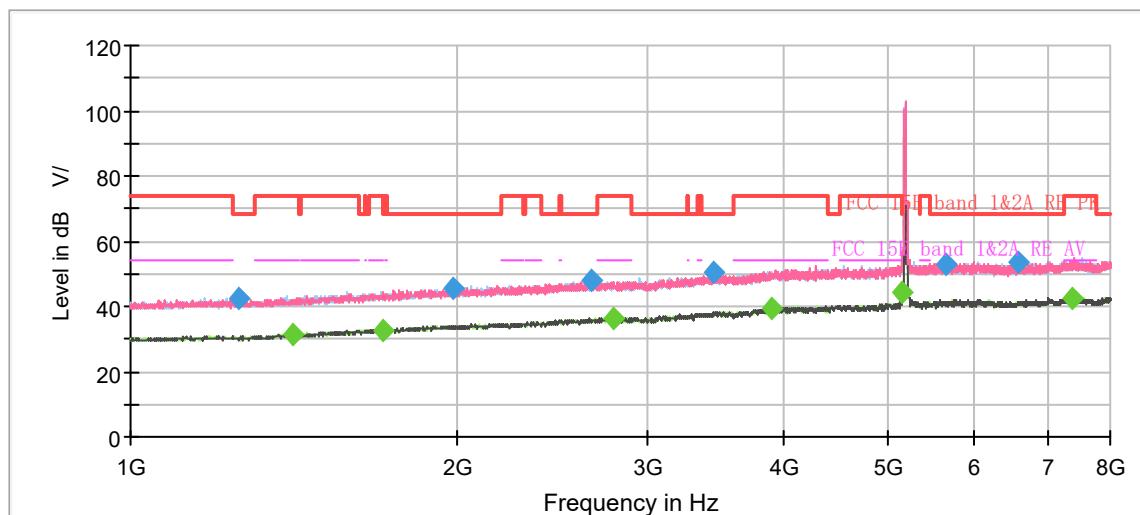

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

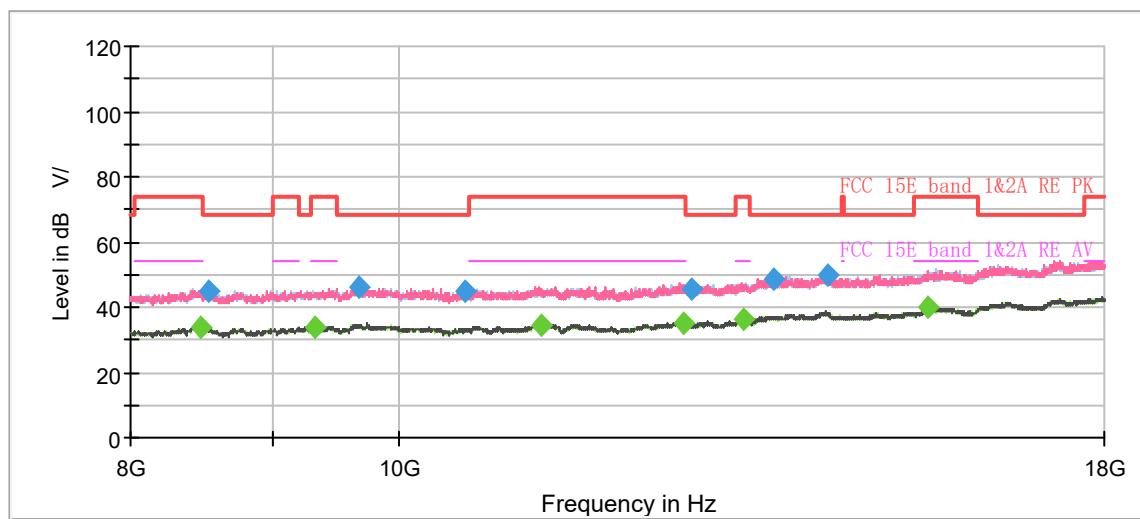


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1256.375000	42.37	---	68.20	25.83	500.0	200.0	H	210.0	-7.4
1410.375000	---	31.55	54.00	22.45	500.0	100.0	H	249.0	-6.4
1708.750000	---	32.88	54.00	21.12	500.0	100.0	V	155.0	-4.9
1980.000000	45.68	---	68.20	22.52	500.0	200.0	V	145.0	-3.5
2661.625000	47.96	---	68.20	20.24	500.0	200.0	H	0.0	-0.3
2784.125000	---	36.33	54.00	17.67	500.0	200.0	H	203.0	0.0
3452.625000	50.48	---	68.20	17.72	500.0	200.0	H	79.0	2.4
3905.875000	---	39.52	54.00	14.48	500.0	100.0	H	89.0	4.3
5148.375000	---	44.50	54.00	9.50	500.0	100.0	H	0.0	7.1
5644.500000	52.88	---	68.20	15.32	500.0	200.0	H	64.0	8.0
6583.375000	53.84	---	68.20	14.36	500.0	100.0	V	0.0	8.2
7382.250000	---	42.49	54.00	11.51	500.0	200.0	H	189.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH40

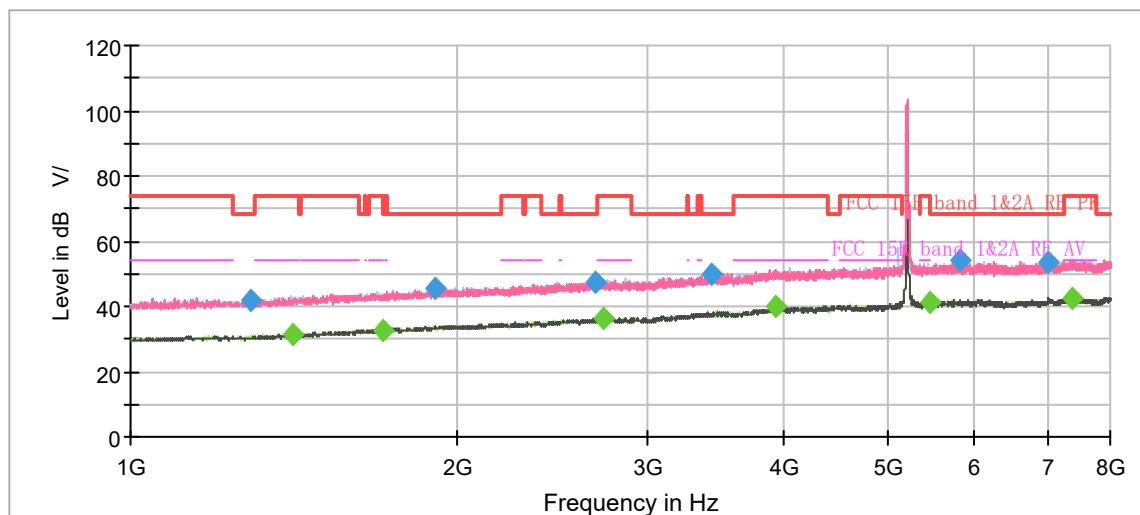

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

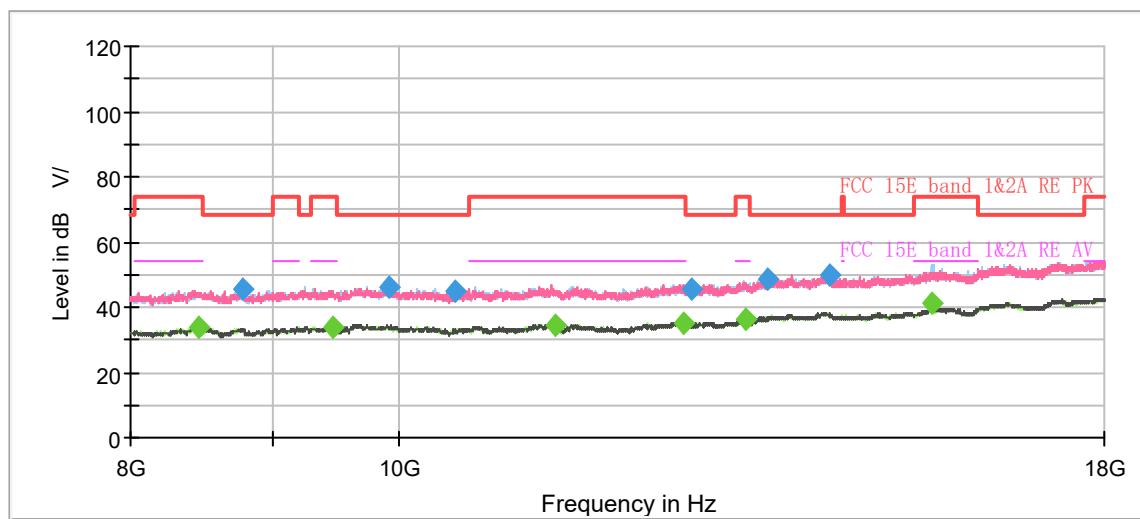


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1289.625000	41.67	---	68.20	26.53	500.0	100.0	H	18.0	-7.2
1410.375000	---	31.42	54.00	22.58	500.0	200.0	V	45.0	-6.4
1707.875000	---	32.91	54.00	21.09	500.0	200.0	H	210.0	-4.9
1905.625000	45.38	---	68.20	22.82	500.0	100.0	V	270.0	-3.9
2677.375000	47.60	---	68.20	20.60	500.0	100.0	V	0.0	-0.2
2731.625000	---	36.52	54.00	17.48	500.0	200.0	H	124.0	-0.1
3430.750000	49.90	---	68.20	18.30	500.0	200.0	H	243.0	2.3
3939.125000	---	39.76	54.00	14.24	500.0	200.0	H	0.0	4.4
5448.500000	---	41.33	54.00	12.67	500.0	200.0	H	0.0	7.6
5813.375000	54.17	---	68.20	14.03	500.0	200.0	V	100.0	8.1
7006.000000	53.73	---	68.20	14.47	500.0	200.0	V	15.0	8.9
7388.375000	---	42.57	54.00	11.43	500.0	200.0	H	210.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH48

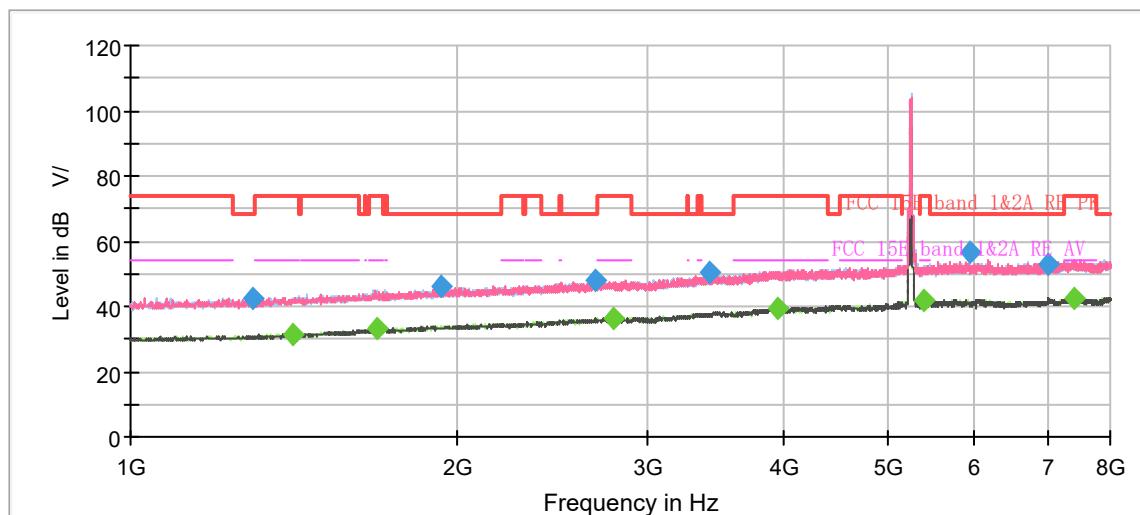

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

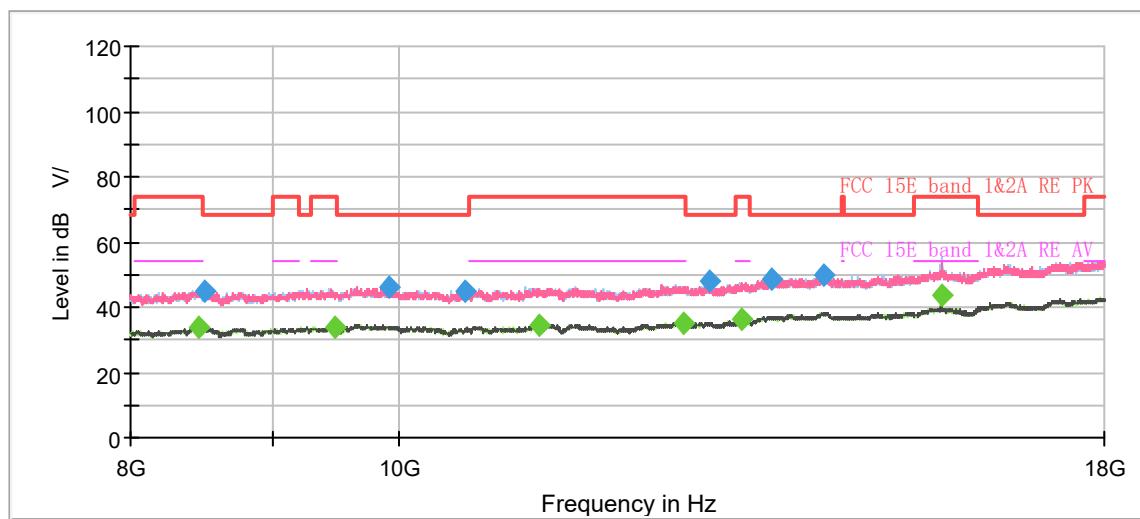


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1296.625000	42.43	---	68.20	25.77	500.0	200.0	H	354.0	-7.2
1412.125000	---	31.35	54.00	22.65	500.0	200.0	V	184.0	-6.4
1686.875000	---	33.12	54.00	20.88	500.0	200.0	V	8.0	-5.0
1934.500000	46.04	---	68.20	22.16	500.0	100.0	H	159.0	-3.8
2680.875000	47.70	---	68.20	20.50	500.0	200.0	H	306.0	-0.2
2781.500000	---	36.26	54.00	17.74	500.0	200.0	H	249.0	0.0
3417.625000	50.44	---	68.20	17.76	500.0	200.0	H	311.0	2.3
3944.375000	---	39.50	54.00	14.50	500.0	200.0	H	277.0	4.4
5392.500000	---	41.85	54.00	12.15	500.0	100.0	V	1.0	7.4
5944.625000	56.53	---	68.20	11.67	500.0	100.0	H	128.0	8.0
7006.875000	52.93	---	68.20	15.27	500.0	100.0	H	154.0	8.9
7398.875000	---	42.56	54.00	11.44	500.0	100.0	H	15.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH149

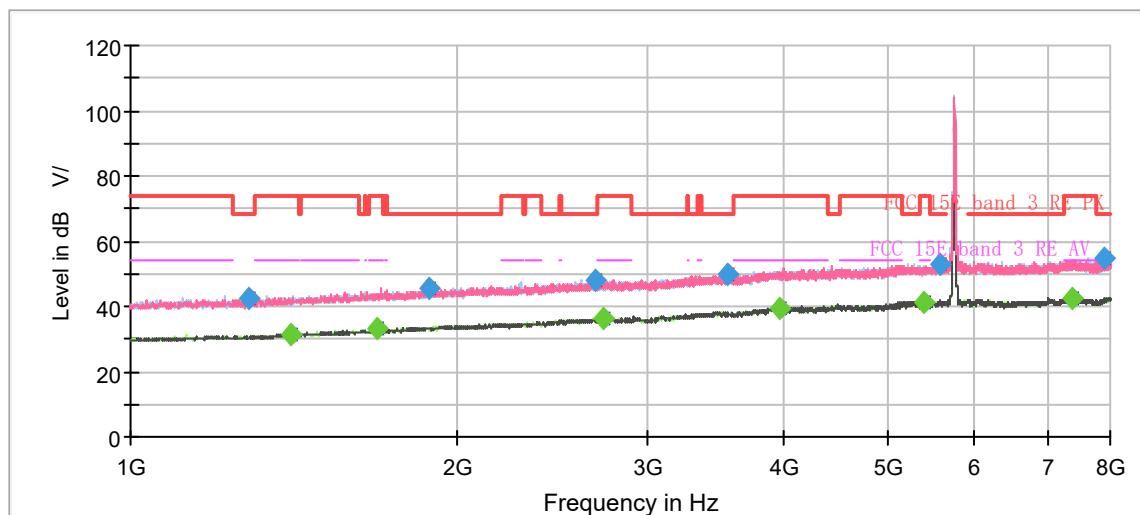

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

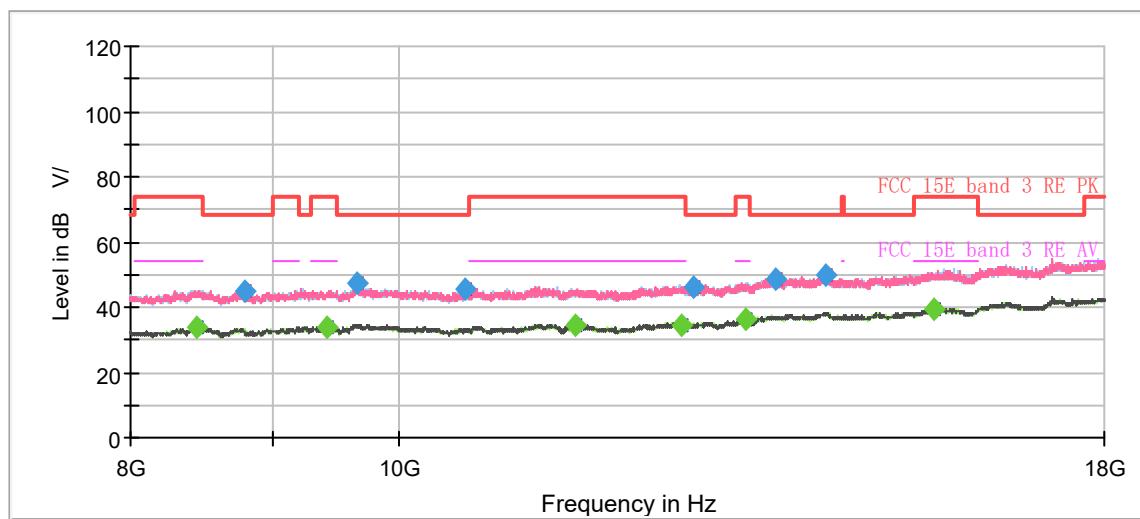


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1287.875000	42.36	---	68.20	25.84	500.0	200.0	H	225.0	-7.2
1406.875000	---	31.48	54.00	22.52	500.0	200.0	V	8.0	-6.4
1684.250000	---	33.23	54.00	20.77	500.0	100.0	V	148.0	-5.0
1885.500000	45.66	---	68.20	22.54	500.0	200.0	V	329.0	-4.0
2686.125000	48.12	---	68.20	20.08	500.0	100.0	H	0.0	-0.2
2729.875000	---	36.33	54.00	17.67	500.0	100.0	H	192.0	-0.1
3556.750000	50.10	---	68.20	18.10	500.0	200.0	V	138.0	2.6
3966.250000	---	39.51	54.00	14.49	500.0	200.0	H	249.0	4.5
5386.375000	---	41.24	54.00	12.76	500.0	100.0	V	253.0	7.4
5575.375000	53.18	---	68.20	15.02	500.0	100.0	V	153.0	7.9
7387.500000	---	42.61	54.00	11.39	500.0	200.0	H	320.0	9.3
7886.250000	54.53	---	68.20	13.67	500.0	200.0	H	202.0	9.0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH157

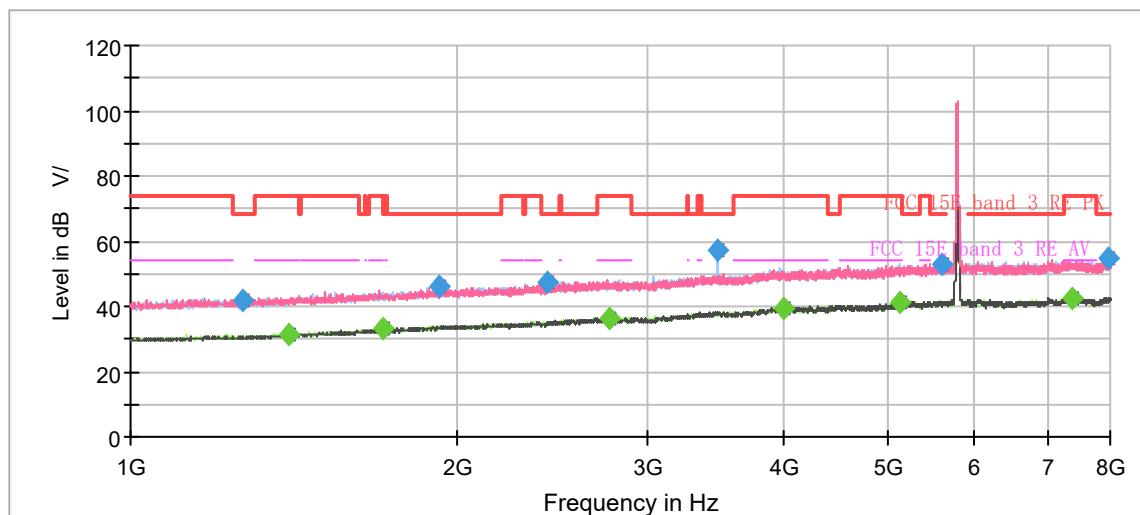

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

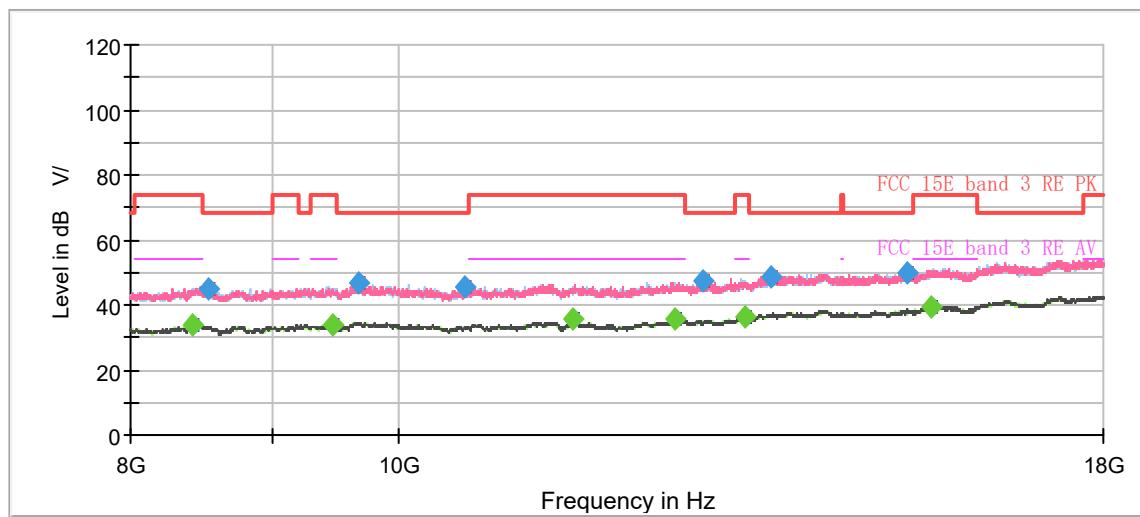


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1271.250000	42.14	---	68.20	26.06	500.0	200.0	V	44.0	-7.3
1398.125000	---	31.46	54.00	22.54	500.0	200.0	H	159.0	-6.5
1707.875000	---	32.94	54.00	21.06	500.0	100.0	V	260.0	-4.9
1924.875000	45.88	---	68.20	22.32	500.0	100.0	V	0.0	-3.8
2423.625000	47.50	---	68.20	20.70	500.0	100.0	H	329.0	-1.5
2764.000000	---	36.24	54.00	17.76	500.0	100.0	H	95.0	-0.1
3471.000000	56.96	---	68.20	11.24	500.0	100.0	H	135.0	2.5
3998.625000	---	39.60	54.00	14.40	500.0	100.0	V	349.0	4.5
5122.125000	---	41.24	54.00	12.76	500.0	100.0	V	339.0	7.0
5588.500000	53.09	---	68.20	15.11	500.0	200.0	H	268.0	7.9
7389.250000	---	42.63	54.00	11.37	500.0	200.0	H	90.0	9.3
7951.875000	54.58	---	68.20	13.62	500.0	100.0	H	118.0	9.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH165

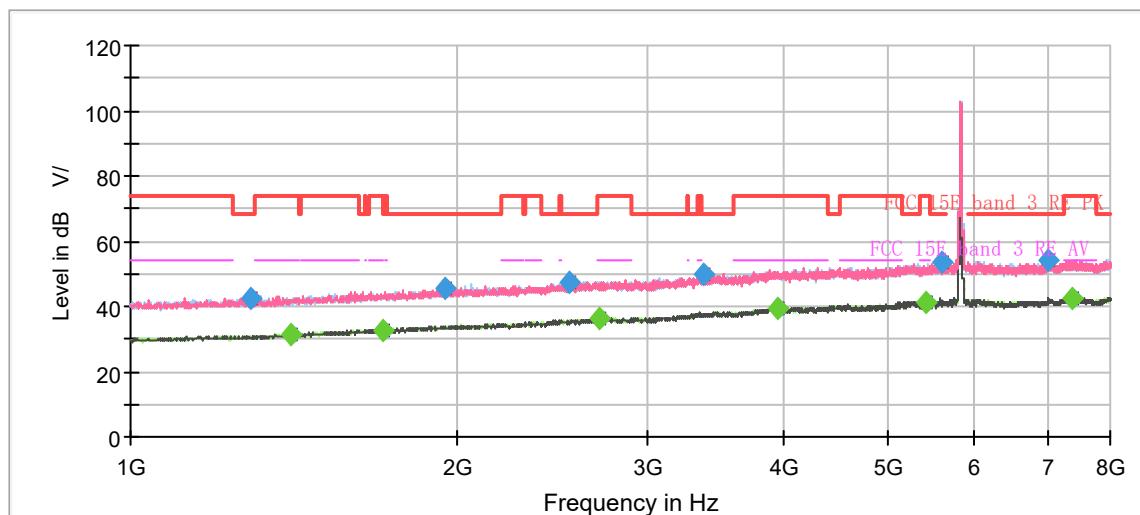

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

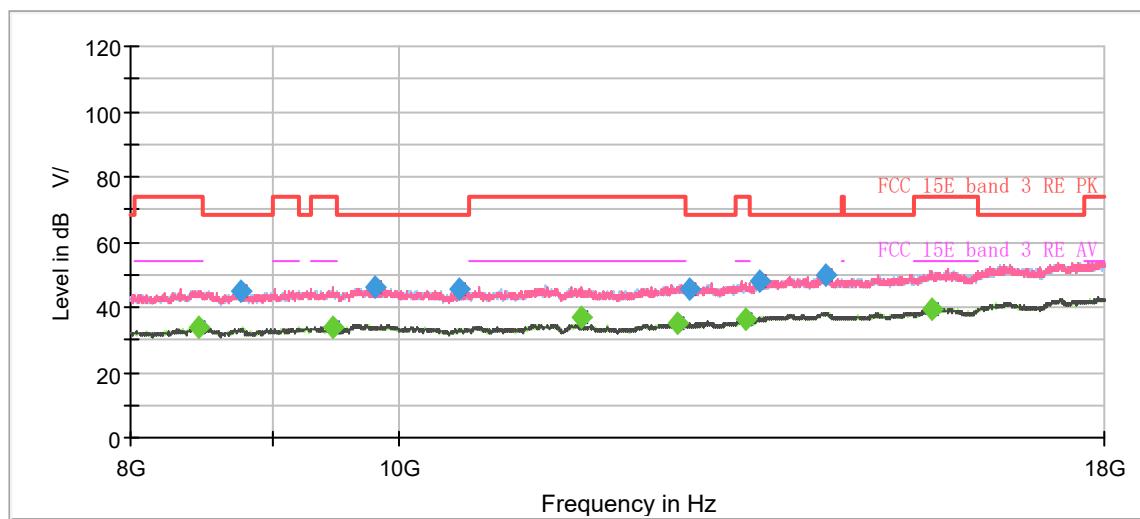


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1288.750000	42.66	---	68.20	25.54	500.0	200.0	V	233.0	-7.2
1406.000000	---	31.44	54.00	22.56	500.0	200.0	V	41.0	-6.4
1705.250000	---	32.87	54.00	21.13	500.0	100.0	V	170.0	-4.9
1951.125000	45.42	---	68.20	22.78	500.0	200.0	H	26.0	-3.7
2540.000000	47.35	---	68.20	20.85	500.0	200.0	V	141.0	-1.0
2703.625000	---	36.33	54.00	17.67	500.0	100.0	V	228.0	-0.1
3376.500000	49.94	---	68.20	18.26	500.0	100.0	H	168.0	2.2
3946.125000	---	39.66	54.00	14.34	500.0	200.0	V	126.0	4.4
5400.375000	---	41.40	54.00	12.60	500.0	200.0	H	350.0	7.5
5606.875000	53.47	---	68.20	14.73	500.0	200.0	H	214.0	8.0
7002.500000	54.30	---	68.20	13.90	500.0	200.0	V	170.0	8.9
7392.750000	---	42.66	54.00	11.34	500.0	200.0	H	174.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH38

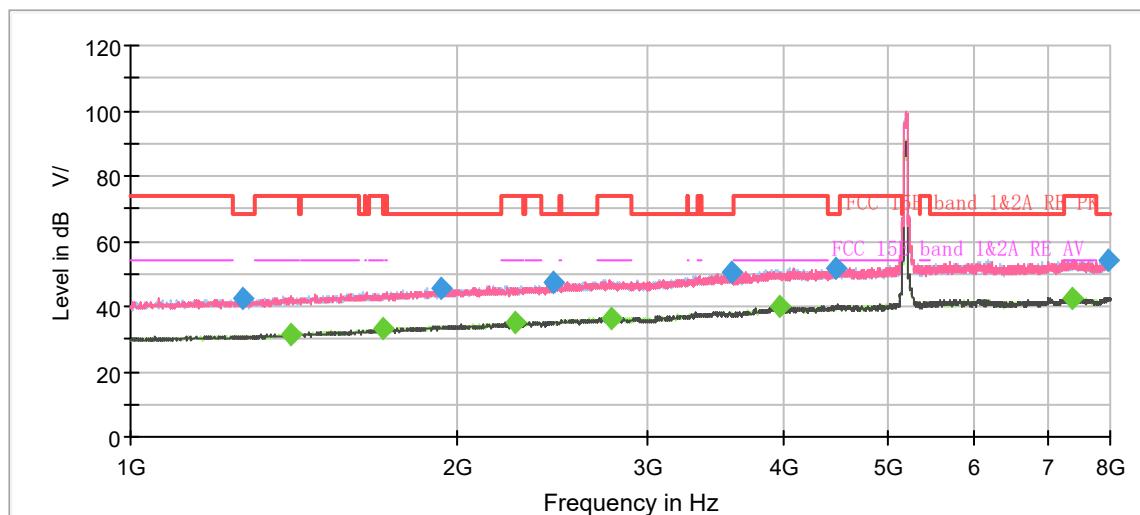

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

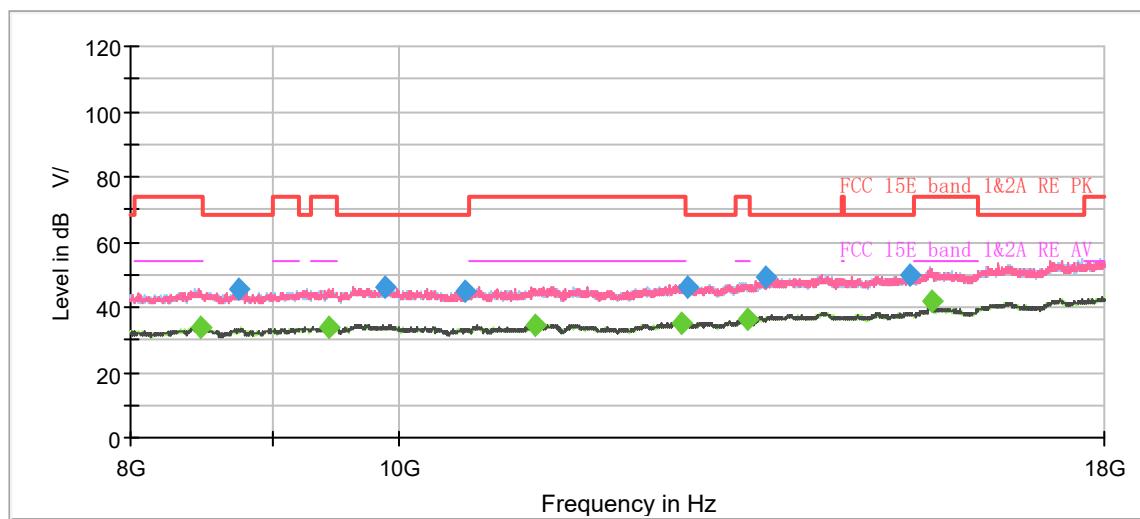


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1267.750000	42.35	---	68.20	25.85	500.0	200.0	V	303.0	-7.4
1406.875000	---	31.53	54.00	22.47	500.0	200.0	V	76.0	-6.4
1705.250000	---	33.05	54.00	20.95	500.0	200.0	H	285.0	-4.9
1931.000000	45.64	---	68.20	22.56	500.0	200.0	V	225.0	-3.8
2262.625000	---	34.77	54.00	19.23	500.0	200.0	V	294.0	-2.3
2456.875000	47.46	---	68.20	20.74	500.0	200.0	V	139.0	-1.3
2773.625000	---	36.40	54.00	17.60	500.0	200.0	H	33.0	0.0
3576.000000	50.20	---	68.20	18.00	500.0	100.0	V	83.0	2.6
3973.250000	---	39.71	54.00	14.29	500.0	100.0	H	318.0	4.5
4465.875000	51.65	---	68.20	16.55	500.0	200.0	H	119.0	5.4
7389.250000	---	42.67	54.00	11.33	500.0	200.0	H	99.0	9.3
7963.250000	54.36	---	68.20	13.84	500.0	100.0	V	162.0	9.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH46

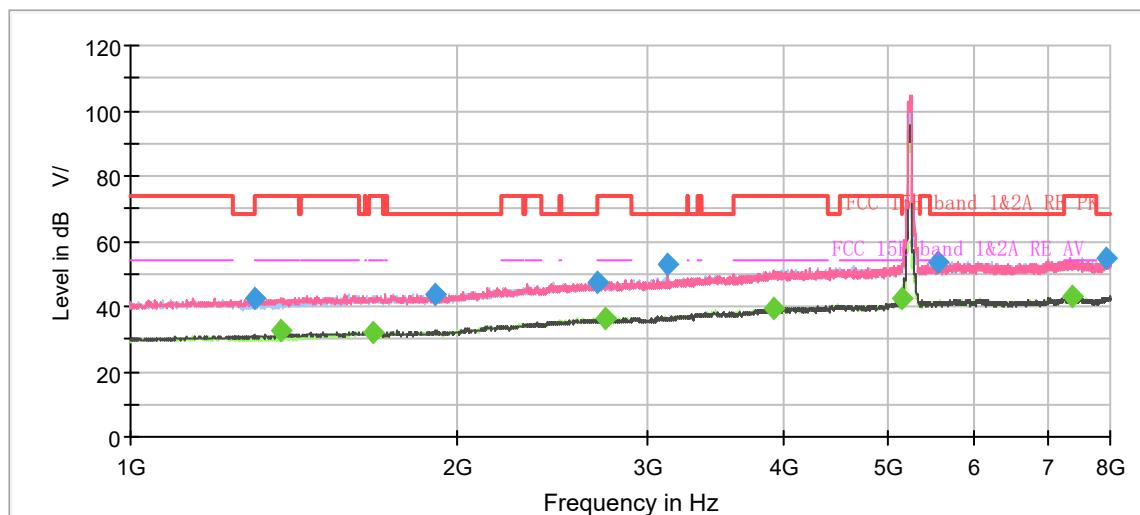

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

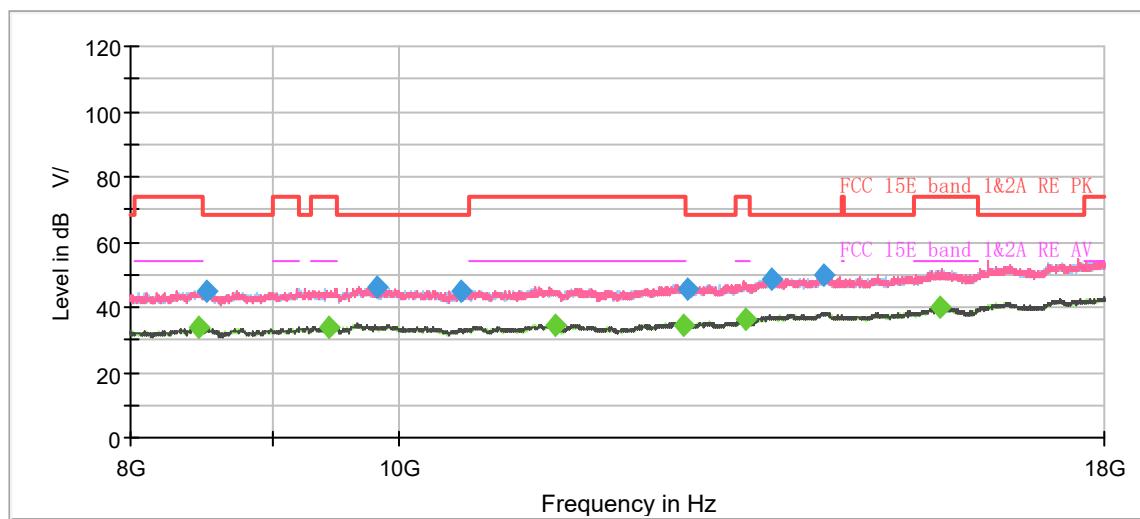


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1299.250000	42.23	---	68.20	25.97	500.0	100.0	V	167.0	-7.2
1374.500000	---	32.76	54.00	21.24	500.0	100.0	V	176.0	-6.7
1674.625000	---	32.29	54.00	21.71	500.0	200.0	H	244.0	-5.0
1910.000000	43.87	---	68.20	24.33	500.0	200.0	V	217.0	-3.9
2687.875000	47.48	---	68.20	20.72	500.0	100.0	V	212.0	-0.2
2744.750000	---	36.21	54.00	17.79	500.0	200.0	V	70.0	-0.1
3121.000000	53.16	---	68.20	15.04	500.0	200.0	V	281.0	1.0
3919.000000	---	39.51	54.00	14.49	500.0	100.0	H	101.0	4.4
5146.625000	---	42.35	54.00	11.65	500.0	100.0	V	354.0	7.1
5560.500000	53.35	---	68.20	14.85	500.0	200.0	V	134.0	7.9
7392.750000	---	43.10	54.00	10.90	500.0	200.0	H	122.0	9.3
7947.500000	54.71	---	68.20	13.49	500.0	100.0	V	167.0	9.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH151

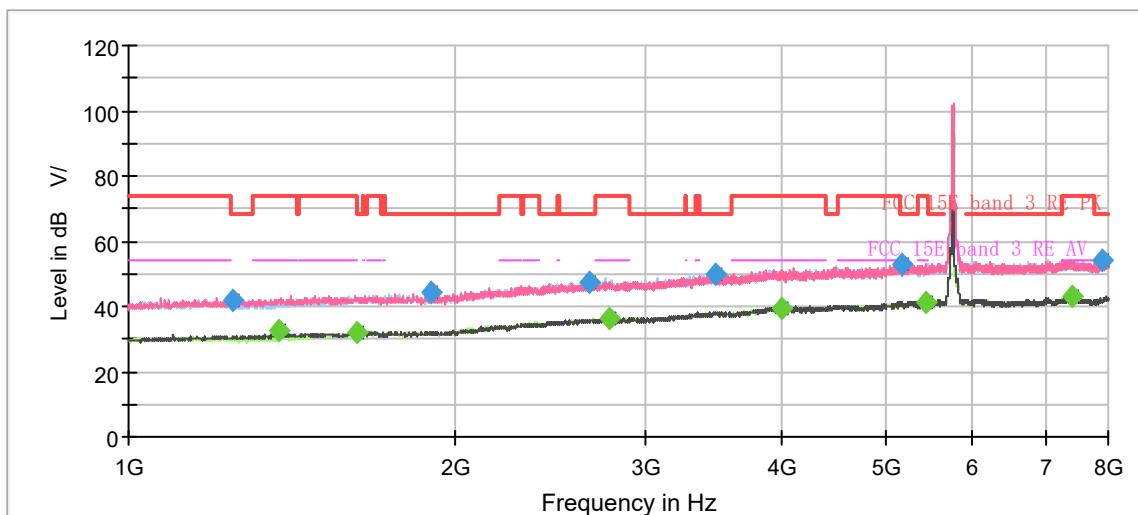

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

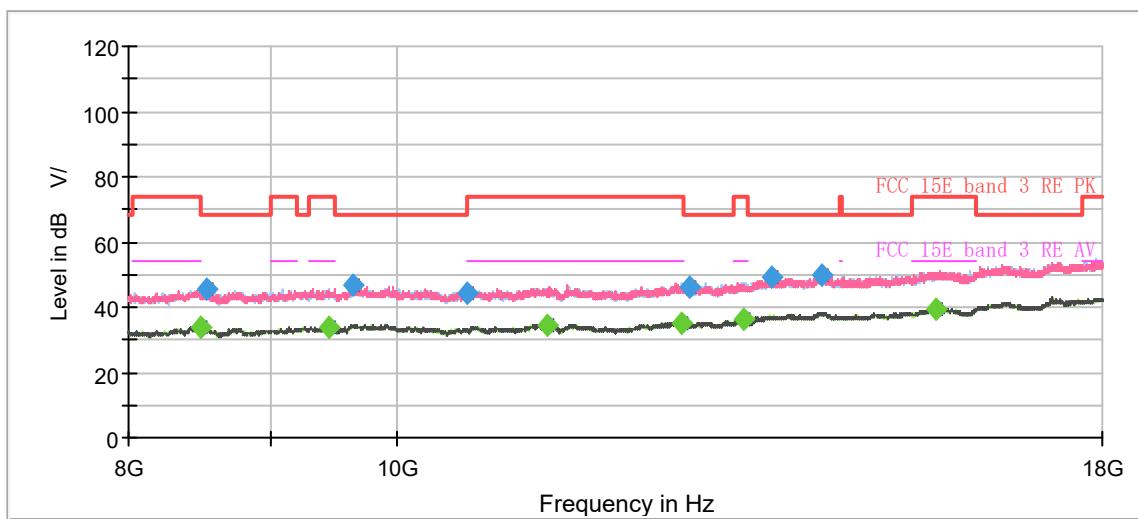


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1246.750000	41.93	---	68.20	26.27	500.0	200.0	V	109.0	-7.5
1374.500000	---	32.50	54.00	21.50	500.0	100.0	V	176.0	-6.7
1624.750000	---	32.17	54.00	21.83	500.0	100.0	V	24.0	-5.4
1903.875000	44.07	---	68.20	24.13	500.0	100.0	H	272.0	-3.9
2662.500000	47.51	---	68.20	20.69	500.0	100.0	V	231.0	-0.3
2771.875000	---	36.36	54.00	17.64	500.0	100.0	V	186.0	0.0
3475.375000	49.66	---	68.20	18.54	500.0	200.0	H	303.0	2.5
3996.875000	---	39.65	54.00	14.35	500.0	100.0	V	0.0	4.5
5153.625000	53.14	---	68.20	15.06	500.0	200.0	H	165.0	7.1
5443.250000	---	41.12	54.00	12.88	500.0	100.0	V	348.0	7.6
7423.375000	---	42.81	54.00	11.19	500.0	200.0	H	180.0	9.2
7898.500000	54.13	---	68.20	14.07	500.0	100.0	H	329.0	9.0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH159

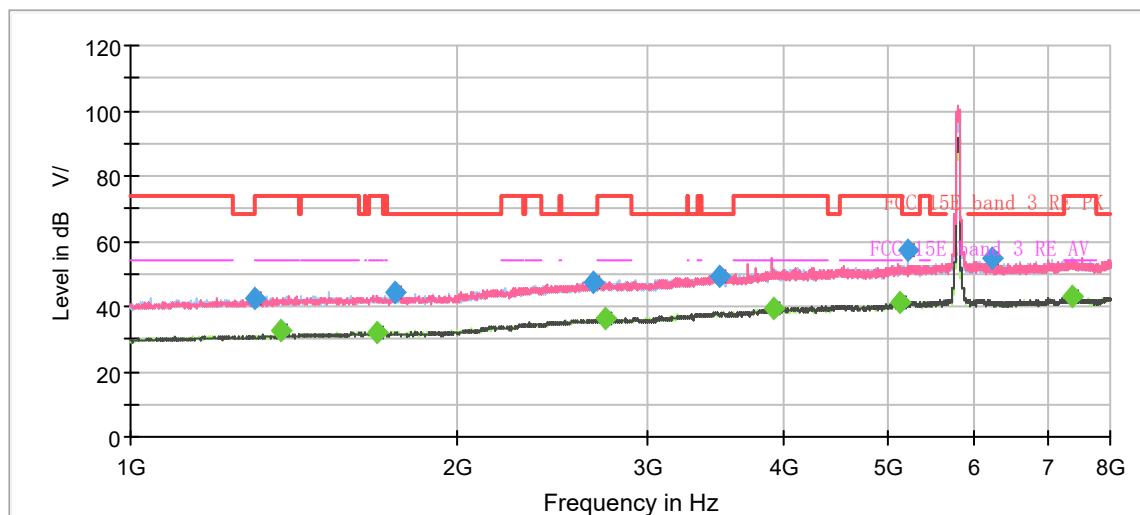

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

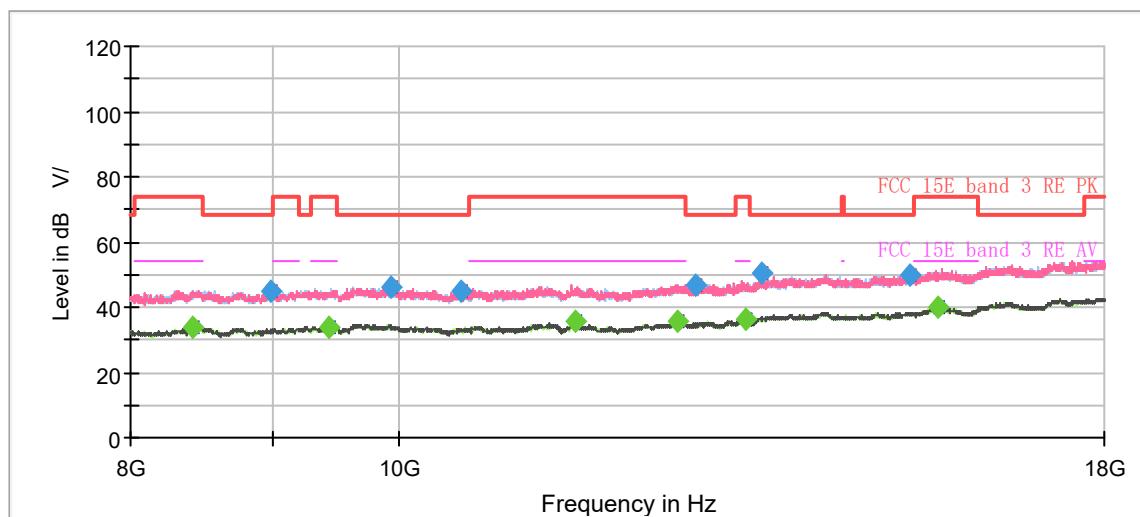


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1299.250000	42.33	---	68.20	25.87	500.0	100.0	V	21.0	-7.2
1374.500000	---	32.91	54.00	21.09	500.0	100.0	V	174.0	-6.7
1690.375000	---	32.14	54.00	21.86	500.0	200.0	V	126.0	-5.0
1754.250000	44.17	---	68.20	24.03	500.0	200.0	H	92.0	-4.7
2674.750000	47.65	---	68.20	20.55	500.0	100.0	V	0.0	-0.2
2736.000000	---	36.31	54.00	17.69	500.0	100.0	V	76.0	-0.1
3497.250000	49.40	---	68.20	18.80	500.0	200.0	H	116.0	2.5
3922.500000	---	39.60	54.00	14.40	500.0	200.0	H	123.0	4.4
5122.125000	---	41.44	54.00	12.56	500.0	200.0	V	82.0	7.0
5211.375000	57.26	---	68.20	10.94	500.0	200.0	H	102.0	7.3
6212.375000	54.48	---	68.20	13.72	500.0	200.0	H	142.0	8.1
7387.500000	---	43.05	54.00	10.95	500.0	100.0	H	285.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11ac (HT80) CH42

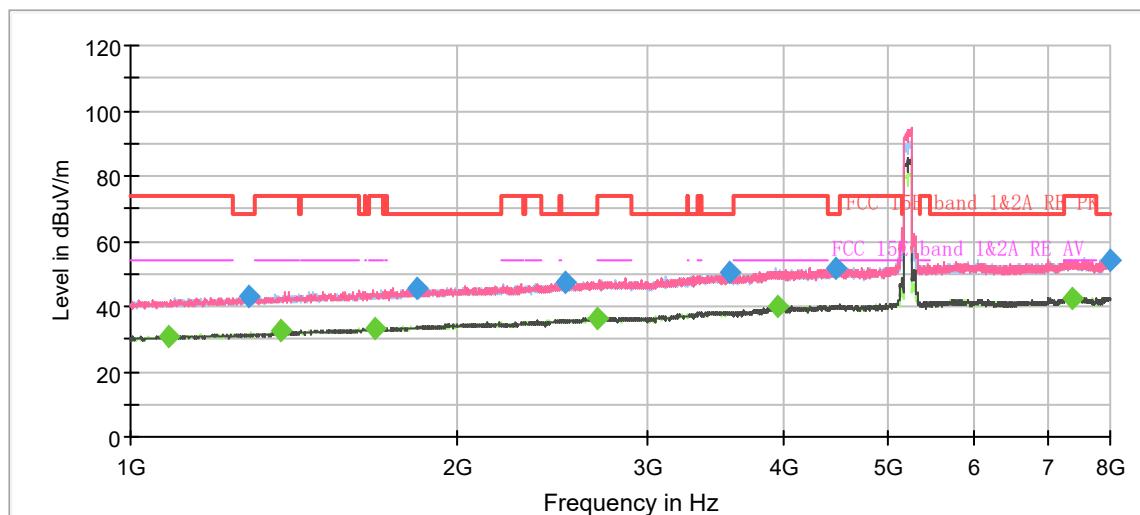

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

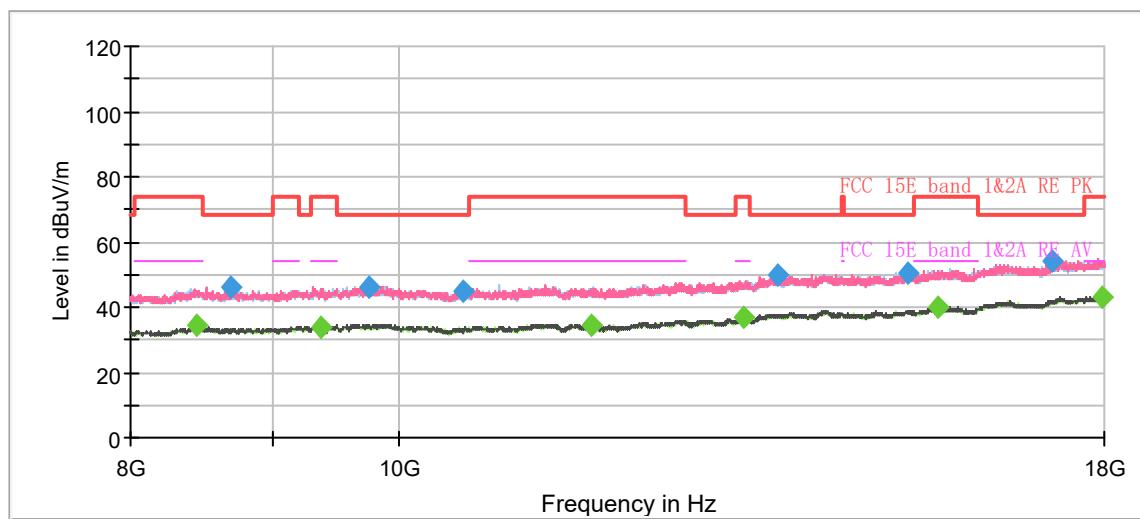


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1084.875000	---	30.57	54.00	23.43	500.0	100.0	H	243.0	-8.6
1285.250000	42.84	---	68.20	25.36	500.0	100.0	V	315.0	-7.2
1374.500000	---	32.45	54.00	21.55	500.0	100.0	V	32.0	-6.7
1682.500000	---	33.32	54.00	20.68	500.0	100.0	V	261.0	-5.0
1840.000000	45.64	---	68.20	22.56	500.0	100.0	H	88.0	-4.2
2519.000000	47.63	---	68.20	20.57	500.0	100.0	H	282.0	-1.1
2692.250000	---	36.48	54.00	17.52	500.0	100.0	V	84.0	-0.1
3567.250000	50.47	---	68.20	17.73	500.0	100.0	H	149.0	2.6
3941.750000	---	39.82	54.00	14.18	500.0	200.0	V	331.0	4.4
4475.500000	51.74	---	68.20	16.46	500.0	200.0	H	142.0	5.4
7380.500000	---	42.74	54.00	11.26	500.0	200.0	V	39.0	9.3
8000.000000	54.24	---	68.20	13.96	500.0	200.0	V	326.0	9.2

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11ac (HT80) CH155

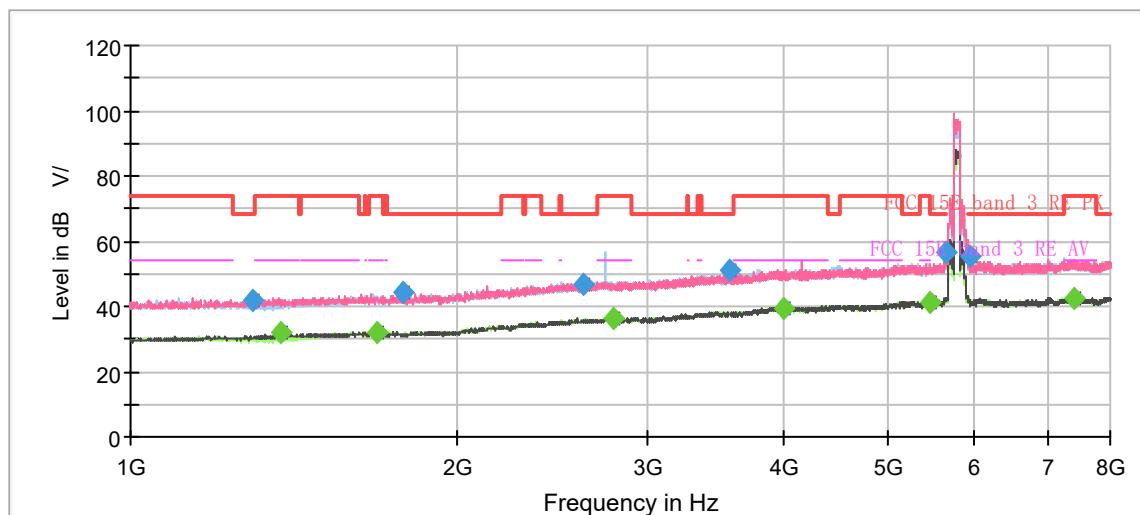

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

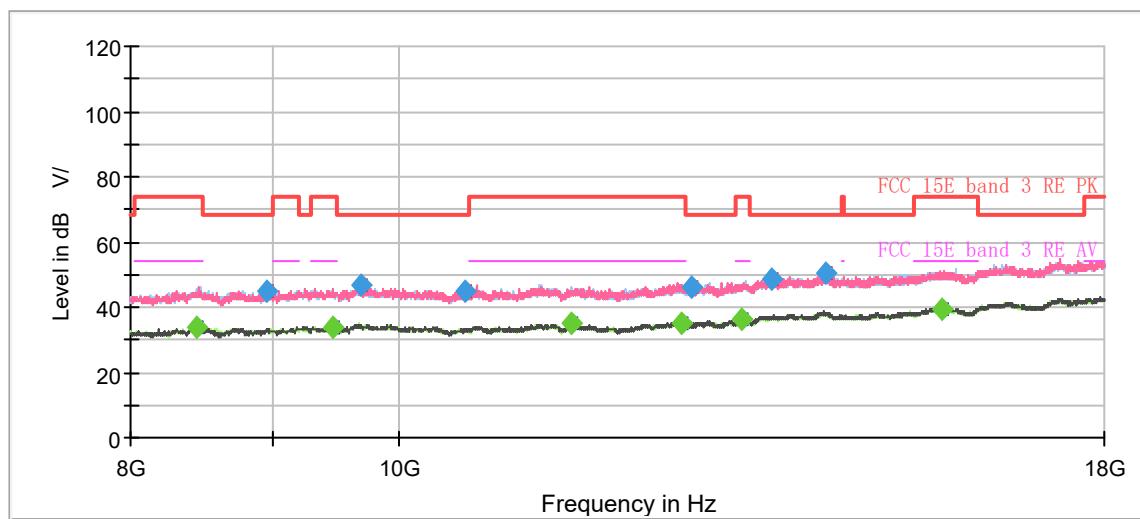


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1294.000000	41.82	---	68.20	26.38	500.0	200.0	V	135.0	-7.2
1374.500000	---	32.29	54.00	21.71	500.0	100.0	V	175.0	-6.7
1687.750000	---	32.03	54.00	21.97	500.0	200.0	H	331.0	-5.0
1781.375000	44.52	---	68.20	23.68	500.0	200.0	H	357.0	-4.5
2610.000000	46.99	---	68.20	21.21	500.0	100.0	V	194.0	-0.6
2786.750000	---	36.31	54.00	17.69	500.0	100.0	V	89.0	0.0
3571.625000	51.21	---	68.20	16.99	500.0	100.0	V	343.0	2.6
3995.125000	---	39.55	54.00	14.45	500.0	200.0	H	288.0	4.5
5456.375000	---	41.50	54.00	12.50	500.0	200.0	V	39.0	7.6
5643.625000	56.92	---	68.20	11.28	500.0	100.0	V	354.0	8.0
5934.125000	55.68	---	68.20	12.52	500.0	100.0	V	354.0	8.0
7405.000000	---	42.63	54.00	11.37	500.0	100.0	V	99.0	9.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11a CH36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

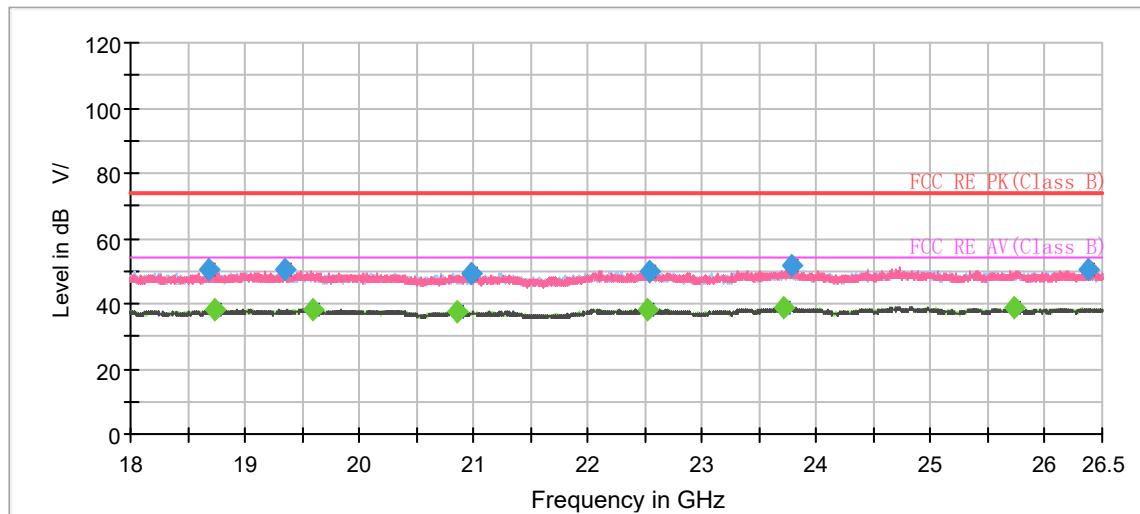
Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18684.250000	50.45	---	74.00	23.55	500.0	100.0	H	157.0	-5.6
25737.125000	---	38.64	54.00	15.36	500.0	200.0	H	184.0	-2.6
23713.062500	---	38.91	54.00	15.09	500.0	200.0	H	282.0	-2.4
20853.875000	---	37.73	54.00	16.27	500.0	200.0	V	189.0	-5.1
22543.250000	50.06	---	74.00	23.94	500.0	200.0	V	232.0	-3.9
19357.875000	50.27	---	74.00	23.73	500.0	200.0	V	255.0	-5.4
19594.812500	---	38.46	54.00	15.54	500.0	200.0	V	260.0	-5.3
20978.187500	49.39	---	74.00	24.61	500.0	200.0	V	260.0	-5.1
22513.500000	---	38.32	54.00	15.68	500.0	200.0	V	293.0	-3.9
23775.750000	51.55	---	74.00	22.45	500.0	200.0	V	307.0	-2.4
26369.312500	50.36	---	74.00	23.64	500.0	200.0	V	312.0	-2.3
18731.000000	---	38.01	54.00	15.99	500.0	200.0	V	322.0	-5.5

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit-MAX Peak/ Average

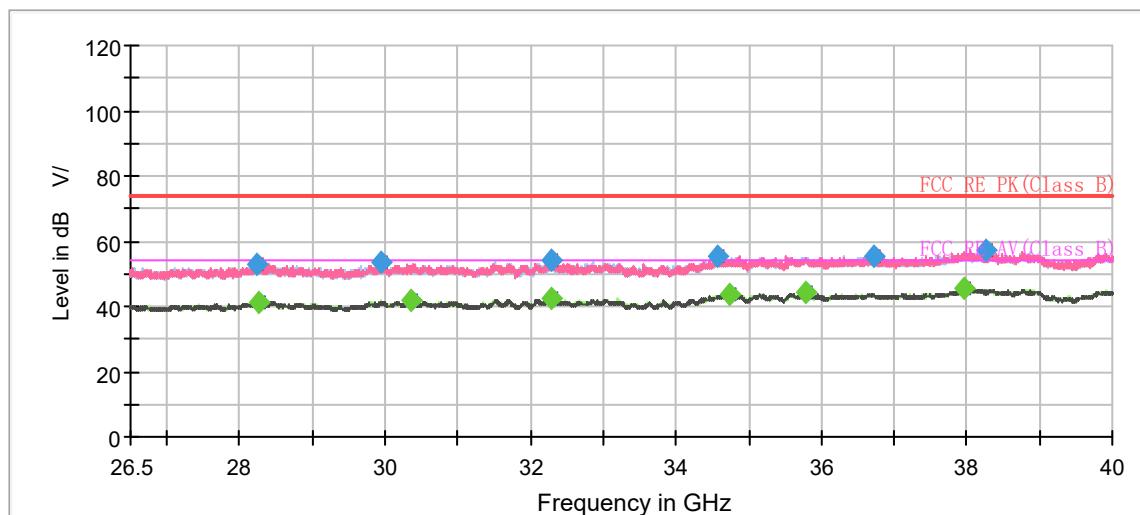

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
28244.875000	52.71	---	74.00	21.29	500.0	200.0	V	19.0	0.0
28266.812500	---	41.46	54.00	12.54	500.0	200.0	H	143.0	0.0
29940.812500	53.53	---	74.00	20.47	500.0	100.0	V	73.0	-0.5
30367.750000	---	41.57	54.00	12.43	500.0	200.0	H	182.0	-0.5
32276.312500	53.96	---	74.00	20.04	500.0	200.0	V	185.0	-1.0
32294.875000	---	42.35	54.00	11.65	500.0	200.0	V	318.0	-1.0
34578.062500	55.08	---	74.00	18.92	500.0	200.0	V	255.0	2.3
34729.937500	---	43.50	54.00	10.50	500.0	200.0	V	280.0	2.5
35781.250000	---	44.17	54.00	9.83	500.0	200.0	H	217.0	2.8
36707.687500	55.37	---	74.00	18.63	500.0	200.0	V	80.0	3.6
37966.562500	---	45.28	54.00	8.72	500.0	200.0	H	35.0	4.9
38251.750000	57.40	---	74.00	16.60	500.0	100.0	V	83.0	5.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit-MAX Peak/ Average

5.2. Conducted Emission

Ambient condition


Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

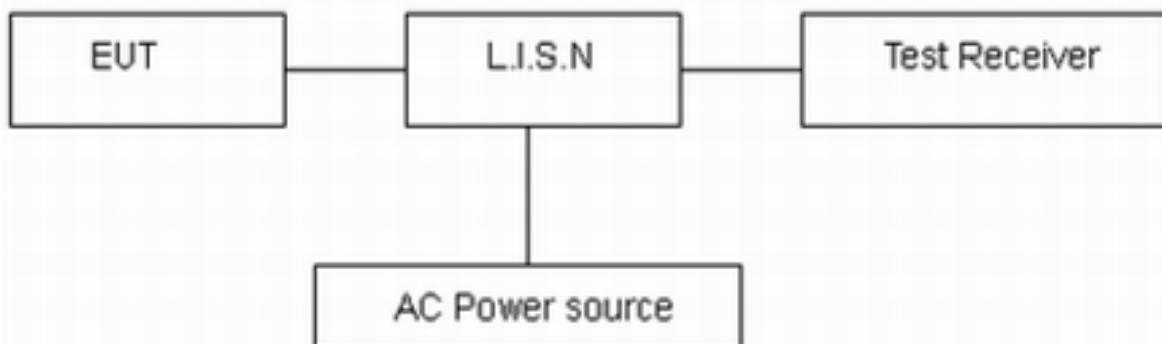

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11a Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

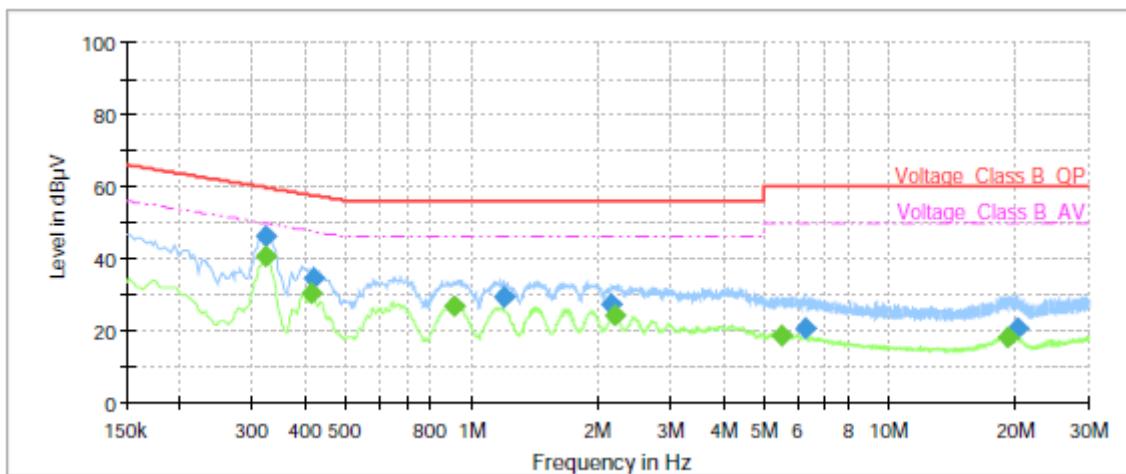

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.32	46.00	---	59.68	13.68	1000.0	9.000	L1	ON	21.0
0.32	---	40.74	49.62	8.88	1000.0	9.000	L1	ON	21.0
0.42	---	30.31	47.54	17.23	1000.0	9.000	L1	ON	21.0
0.42	34.41	---	57.45	23.04	1000.0	9.000	L1	ON	21.0
0.91	---	26.66	46.00	19.34	1000.0	9.000	L1	ON	20.3
1.19	29.27	---	56.00	26.73	1000.0	9.000	L1	ON	20.1
2.15	27.29	---	56.00	28.71	1000.0	9.000	L1	ON	19.7
2.20	---	24.08	46.00	21.92	1000.0	9.000	L1	ON	19.7
5.50	---	18.53	50.00	31.47	1000.0	9.000	L1	ON	19.5
6.28	20.64	---	60.00	39.36	1000.0	9.000	L1	ON	19.5
19.23	---	18.12	50.00	31.88	1000.0	9.000	L1	ON	19.7
20.14	20.43	---	60.00	39.57	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

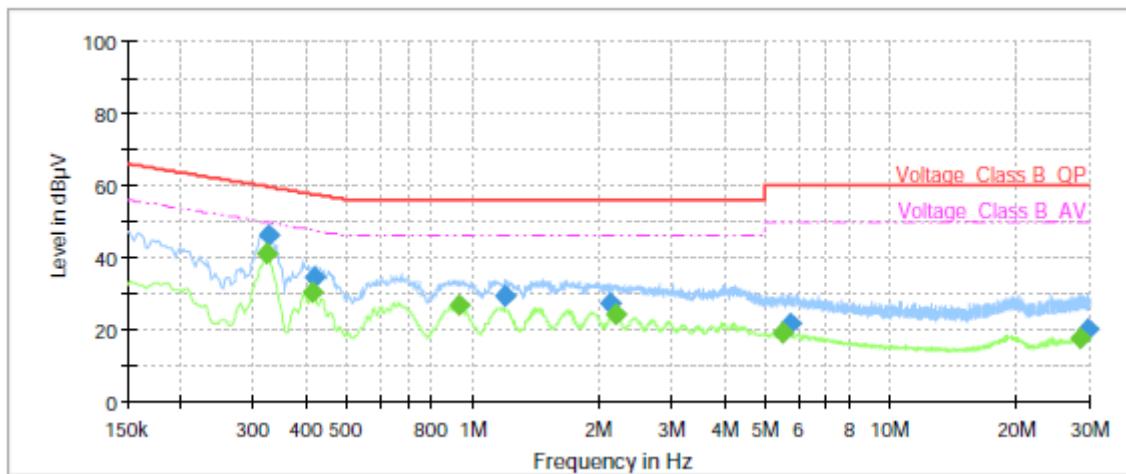

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.32	---	40.83	49.62	8.79	1000.0	9.000	N	ON	21.0
0.33	46.03	---	59.57	13.54	1000.0	9.000	N	ON	21.0
0.42	---	30.31	47.54	17.22	1000.0	9.000	N	ON	21.0
0.42	34.28	---	57.49	23.21	1000.0	9.000	N	ON	21.0
0.93	---	26.57	46.00	19.43	1000.0	9.000	N	ON	20.3
1.19	29.10	---	56.00	26.90	1000.0	9.000	N	ON	20.1
2.14	27.29	---	56.00	28.71	1000.0	9.000	N	ON	19.7
2.19	---	24.22	46.00	21.78	1000.0	9.000	N	ON	19.7
5.50	---	18.76	50.00	31.24	1000.0	9.000	N	ON	19.5
5.77	21.63	---	60.00	38.37	1000.0	9.000	N	ON	19.5
28.33	---	17.61	50.00	32.39	1000.0	9.000	N	ON	19.8
29.73	19.83	---	60.00	40.17	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

6. Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESR	102389	2022-05-25	2023-05-24
Signal Analyzer	R&S	FSV40	101186	2022-05-14	2023-05-13
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	HF907	102723	2021-07-24	2024-07-23
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-13	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2022-05-25	2023-05-24
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

ANNEX C: Product Change Description

The Product Change Description are submitted separately.

*****END OF REPORT*****