

1190

FCC Test Report

Equipment : In-Wall Bluetooth Music Receiver

Brand Name : Ten-Tronics
Model No. : A-1350WP

FCC ID : 2ACIA-TTBT003

Standard : 47 CFR FCC Part 15.247 Operating Band : 2400 MHz – 2483.5 MHz

FCC Classification : DSS

Applicant : Ten-Tronics Co., Ltd.

Manufacturer No.33, Lane 347, Chung-San S. Road, Young-Kang Dist, Tainan City, Taiwan

The product sample received on Dec. 23, 2014 and completely tested on Jan. 29, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Vic Hsiao / Supervisor

SPORTON INTERNATIONAL INC. Page No. : 1 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Accessories and Support Equipment	
1.3	Testing Applied Standards	
1.4	Testing Location Information	
1.5	Measurement Uncertainty	
2	TEST CONFIGURATION OF EUT	g
2.1	The Worst Case Modulation Configuration	g
2.2	The Worst Case Power Setting Parameter	g
2.3	The Worst Case Measurement Configuration	10
2.4	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	20dB Bandwidth and Carrier Frequency Separation	17
3.3	Number of Hopping Frequencies	19
3.4	Time of Occupancy (Dwell Time)	21
3.5	RF Output Power	23
3.6	Transmitter Radiated Bandedge Emissions	26
3.7	Transmitter Radiated Unwanted Emissions	29
4	TEST EQUIPMENT AND CALIBRATION DATA	40

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Report No.: FR4D2338-01

Summary of Test Result

Report No.: FR4D2338-01

Conformance Test Specifications							
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result		
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied		
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.5100690MHz 30.61 (Margin 25.39dB) - QP 19.18 (Margin 26.82dB) - AV	FCC 15.207	Complied		
3.2	15.247(a)	20dB Bandwidth	EDR: 1.2575MHz	N/A	Complied		
3.2	15.247(a)	Carrier Frequency Separation (ChS)	BR: 1 MHz EDR: 0.994 MHz	ChS ≥ BW _{20dB} x2/3.	Complied		
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	N ≥ 15	Complied		
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.318sec	0.4 s within 0.4 x N	Complied		
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: -1.11 EDR: -1.72	Power [dBm] BR:21 EDR:21	Complied		
3.6	15.247(d)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2487.200MHz 56.19 (Margin 17.81 dB) - PK 44.55 (Margin 9.45 dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied		
3.7	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:796.300 MHz 38.92 (Margin 7.08 dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied		

SPORTON INTERNATIONAL INC. Page No. : 3 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR4D2338-01

Report No.	Version	Description	Issued Date
FR4D2338-01	Rev. 01	Initial issue of report	Mar. 30, 2015

SPORTON INTERNATIONAL INC. Page No. : 4 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)		
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	-1.11		

Report No.: FR4D2338-01

Note 1: Bluetooth BR uses a GFSK (1Mbps).

Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.2 Antenna Information

	Antenna Category						
\boxtimes							
		Temporary RF connector provided					
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.					

Antenna General Information				
Ant. Cat.	Gain _(dBi)			
Integral	РСВ	0		

SPORTON INTERNATIONAL INC. Page No. : 5 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

	Identify EUT			
EUT Serial Number		N/A		
Pres	sentation of Equipment			
		Type of EUT		
\boxtimes	Stand-alone			
	Combined (EUT where the radio part is fully integrated within another device)			
	Combined Equipment - Brand Name / Model No.:			
	Plug-in radio (EUT intended for a variety of host systems)			
	Host System - Brand Name / Model No.:			
	Other:			

Report No.: FR4D2338-01

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle				
Operated test mode for worst duty cycle				
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)			
∑ 79.68% - test mode single channel-DH5				

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.

1.1.5 EUT Operational Condition

Supply Voltage	\boxtimes	AC mains	\boxtimes	DC	
Type of DC Source	\boxtimes	External DC supply	\boxtimes	From Host System	From Battery

SPORTON INTERNATIONAL INC. Page No. : 6 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

1.2 Accessories and Support Equipment

Accessories Information						
AC Adenter	Brand Name	HON-KWANG	Model Name	HK-X105-A05		
AC Adapter	Power Rating	I/P: 100-240V, 200mA; O/P: 5V	′ 1000mA			

Report No.: FR4D2338-01

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted					
Equipment Brand Name Model Name					
Notebook	DELL	E5540			

Support Equipment – AC Conduction and Radiated Emission					
No.	No. Equipment Brand Name Model Name				
1	Notebook	DELL	E5530		

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC Public Notice DA 00-705

1.4 Testing Location Information

Testing Location						
	HWA YA ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.					
	TEL: 886-3-327-3456 FAX: 886-3-327-0973					
	Test Condition Test Site No. Test Engineer Test Environment					
AC Conduction		ction	CO04-HY	Zeus	23°C / 47%	
RF Conducted		cted	TH06-HY	Leo	23.6°C / 61%	
Radiated Emission		nission	03CH03-HY	Allen	25.1°C / 62%	
Test Site Registration Number						
FCC						
	636805					

SPORTON INTERNATIONAL INC. Page No. : 7 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR4D2338-01

Me	easurement Uncertainty	
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Power density, conducted		±0.8 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.7 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

SPORTON INTERNATIONAL INC. Page No. : 8 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing						
Bluetooth Mode	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode	
BR	1	1 Mbps	BR-1Mbps	-1.11	BR-1Mbps	
EDR	1	2 Mbps	EDR-2Mbps	-2.03		
EDR	1	3 Mbps	EDR-3Mbps	-1.72		

Report No.: FR4D2338-01

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version EDR RF test 080812					
Modulation Mode	dulation Mode 2402 MHz 2441 MHz 2480 MHz				
BR,1Mbps	0x03	0x03	0x03		
EDR,2Mbps	0x03	0x03	0x03		
EDR,3Mbps	0x03	0x03	0x03		

Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).

Note 2: Bluetooth EDR uses a combination of π/4-DQPSK (2Mbps) and 8DPSK (3Mbps).

Note 3: Modulation modes consist below configuration:

FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: π/4-DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)

Note 4: RF output power specifies that Maximum Peak Conducted Output Power.

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests		
Tests Item AC power-line conducted emissions		
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz	
Operating Mode		
1	Adapter Mode	
2	DC Power Supply Mode	
The operating mode 1 is the worst case and it was record in this test report.		

Report No.: FR4D2338-01

The Worst Case Mode for Following Conformance Tests		
Tests Item RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)		
Test Condition Conducted measurement at transmit chains Modulation Mode BR-1Mbps, EDR-2Mbps, EDR-3Mbps		

SPORTON INTERNATIONAL INC. Page No. : 10 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report


The Worst Case Mode for Following Conformance Tests				
Tests Item	Transmitter Radiated Bandedge Emissions Transmitter Radiated Unwanted Emissions			
Test Condition	Radiated measurement	Radiated measurement		
	EUT will be placed in fixed position.			
	⊠ EUT will be placed in mobile position and operating multiple positions.			
User Position	EUT will be a hand-held or body-worn bat operating multiple positions. EUT shall be planes.			
Operating Mode < 1GHz	Operating Mode Description			
1	Adapter Mode			
2 Power Supply Mode				
The operating mode 2 is the worst case and it was record in this test report.				
Operating Mode > 1GHz Operating Mode Description				
1	Adapter Mode			
Modulation Mode	Transmitter Radiated Bandedge Emissions: BR-1Mbps \ EDR-2Mbps \ EDR-3Mbps Transmitter Radiated Unwanted Emissions: For test mode BR-1Mbps, EDR-2Mbps and EDR-3Mbps of the transmitter were assess for pretest. The worst case was BR-1Mbps and recorded in this test report.			
	X Plane	Y Plane	Z Plane	
Orthogonal Planes of EUT				
Worst Planes of EUT	V			

Report No.: FR4D2338-01


SPORTON INTERNATIONAL INC. Page No. : 11 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



2.4 Test Setup Diagram

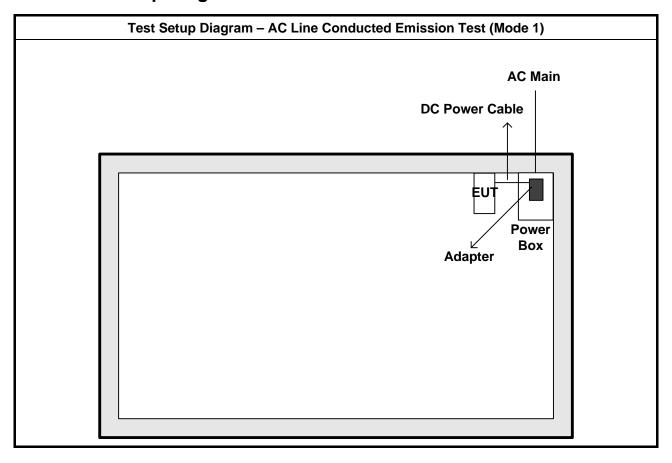

SPORTON INTERNATIONAL INC. Page No. : 12 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

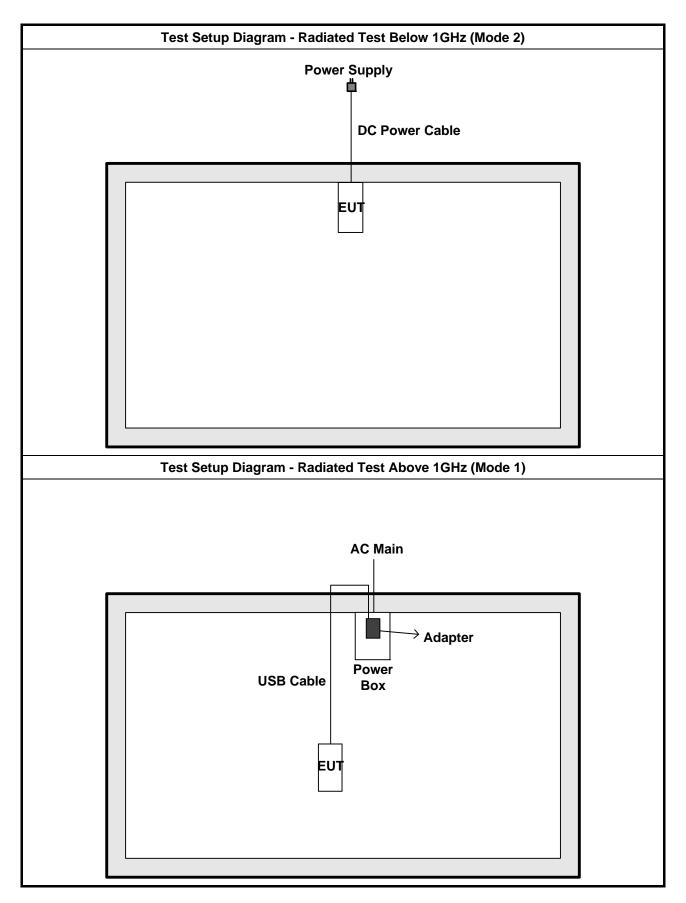

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 13 of 40 Report Version : Rev. 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit			
Frequency Emission (MHz)	Quasi-Peak	Average	
0.15-0.5	66 - 56 *	56 - 46 *	
0.5-5	56	46	
5-30	60	50	

Report No.: FR4D2338-01


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
\boxtimes	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

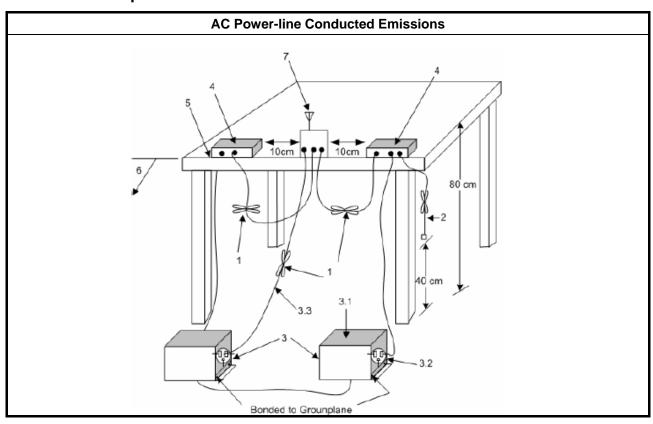

SPORTON INTERNATIONAL INC. Page No. : 14 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



3.1.5 Test Result of AC Power-line Conducted Emissions

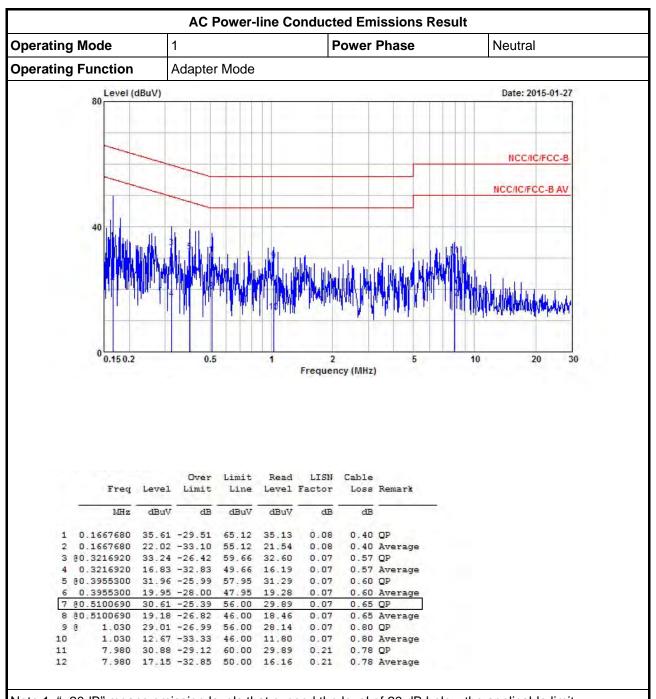


Report No.: FR4D2338-01

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 15 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

CC Test Report No. : FR4D2338-01

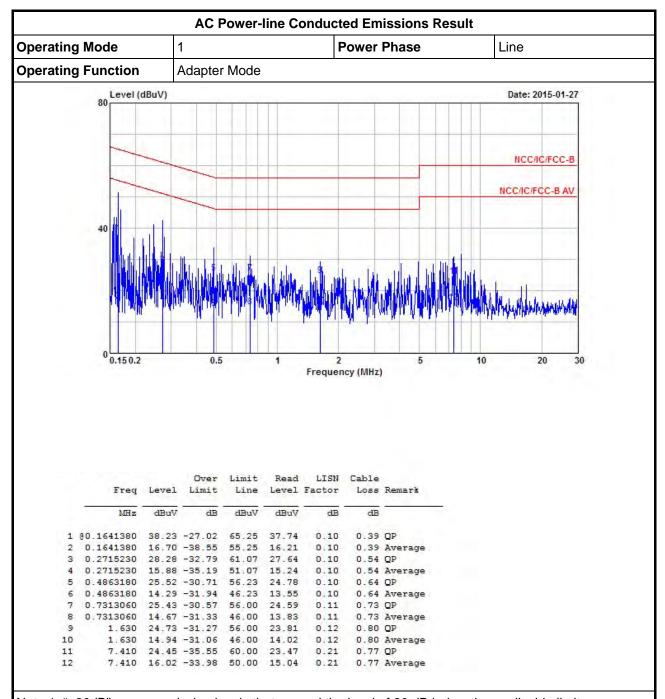

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 16 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

	20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems			
\boxtimes	2400-2483.5 MHz Band:			
	N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).			
	\bowtie N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).			
N : 1	N: Number of Hopping Frequencies; ChS: Hopping Channel Separation			

Report No.: FR4D2338-01

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

	Test Method				
\boxtimes	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.				
\boxtimes	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.				
	For conducted measurement.				
	☐ The EUT supports single transmit chain and measurements performed on this transmit chain.				
	☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.				

3.2.4 Test Setup

20dB Bandwidth and Carrier Frequency Separation				
	Spectrum			
	Analyzer			


SPORTON INTERNATIONAL INC. Page No. : 17 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result							
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)		
BR-1Mbps	2402	0.9461	0.8682	1.0000	0.631		
BR-1Mbps	2441	0.9341	0.8622	1.0000	0.623		
BR-1Mbps	2480	0.9401	0.8622	1.0000	0.627		
EDR-3Mbps	2402	1.2575	1.1497	0.9940	0.838		
EDR-3Mbps	2441	1.2575	1.1497	0.9940	0.838		
EDR-3Mbps	2480	1.2575	1.1497	0.9940	0.838		
Res	sult		Comp	lied			

Report No.: FR4D2338-01

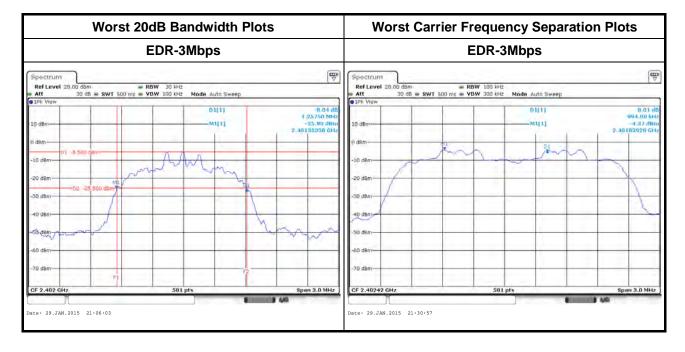

SPORTON INTERNATIONAL INC. Page No. : 18 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 Number of Hopping Frequencies

3.3.1 Number of Hopping Frequencies Limit

	Number of Hopping Frequencies Limit for Frequency Hopping Systems					
\boxtimes	2400-2483.5 MHz Band:					
	N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).					
	N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).					
N : N	I: Number of Hopping Frequencies; ChS : Hopping Channel Separation					

Report No.: FR4D2338-01

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

	Test Method						
\boxtimes	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.						
\boxtimes	For conducted measurement.						
	☐ The EUT supports single transmit chain and measurements performed on this transmit chain.						
	☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.						

3.3.4 Test Setup

Number of Hopping Frequencies				
	ЕИТ			
Spectrum Analyzer				

SPORTON INTERNATIONAL INC. Page No. : 19 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result							
Modulation Mode	Freq. (MHz) Hopping Channel Number (N) Hopping Chan Number Limit						
BR-1Mbps	BR-1Mbps 2402-2480		15				
EDR-3Mbps	2402-2480	79	15				
Result	Complied						

Report No.: FR4D2338-01



SPORTON INTERNATIONAL INC. Page No. : 20 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

3.4 Time of Occupancy (Dwell Time)

3.4.1 Time of Occupancy (Dwell Time) Limit

	Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems
\boxtimes	2400-2483.5 MHz Band: Dwell time ≤ 0.4 second within 0.4 x N
N : N	Number of Hopping Frequencies

Report No.: FR4D2338-01


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

		Test Method
\boxtimes	Refe	er as ANSI C63.10, clause 7.7.4 for dwell time measurement.
\boxtimes		etooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum ell time and maximum duty cycle.
		The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625 ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
		The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875 ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
		The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125 ms. DH5 Packet permit maximum $1600/79/6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
\boxtimes	For	conducted measurement.
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.4 Test Setup

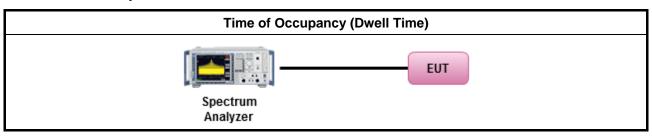

SPORTON INTERNATIONAL INC. Page No. : 21 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01




3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result						
Modulation Mode	Frag (MHz)		Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)	
BR-1Mbps	2441	2.98	106.7	0.318	0.4	
EDR-3Mbps	2441	2.98	98 106.7 0.318		0.4	
Res	sult		Com	plied		

Report No.: FR4D2338-01

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

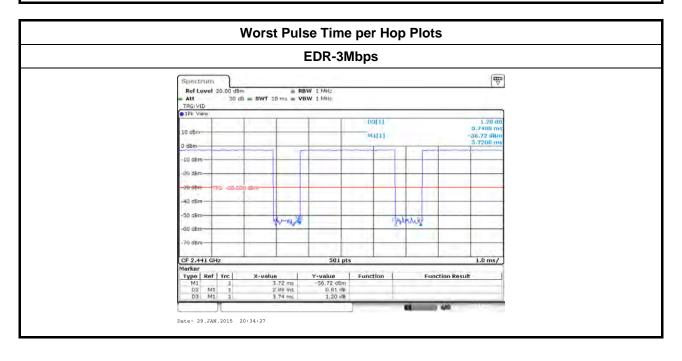

SPORTON INTERNATIONAL INC. Page No. : 22 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01

3.5 RF Output Power

3.5.1 RF Output Power Limit

	RF Output Power Limit for Frequency Hopping Systems							
Max	Maximum Peak Conducted Output Power Limit							
\boxtimes	240	2400-2483.5 MHz Band:						
		For Hopping Channel: N ≥ 75						
		☐ If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W)						
	\boxtimes	For Hopping Channel: N ≥ 15						
		If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm						
e.i.r	.p. P	ower Limit:						
\boxtimes	240	0-2483.5 MHz Band:						
		For Hopping Channel: N ≥ 75 - P _{eirp} ≤ 36 dBm (4 W)						
	\boxtimes	For Hopping Channel: N ≥ 15 - P _{eirp} ≤ 27 dBm (0.5 W)						
P _{eirp} N: N	, = e. Numb	e maximum transmitting antenna directional gain in dBi. i.r.p. Power in dBm. per of Hopping Frequencies pping Channel Separation						

Report No.: FR4D2338-01

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.5.3 Test Procedures

	Test Method							
\boxtimes	Maximum Peak Conducted Output Power							
	Refer as FCC DA 00-0705, spectrum analyzer for peak power.							
Refer as FCC DA 00-0705, peak power meter for peak power.								
		Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.						
		Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW ≥ EBW).						
\boxtimes	For	conducted measurement.						
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.						
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.						

SPORTON INTERNATIONAL INC. Page No. : 23 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR4D2338-01

3.5.4 Test Setup

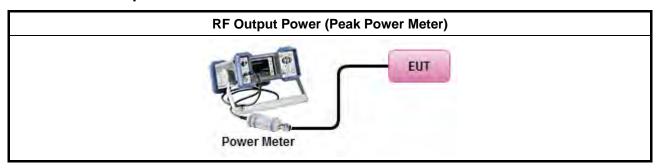

SPORTON INTERNATIONAL INC. Page No. : 24 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

3.5.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition		RF Output Power (dBm)					
Modulation Mode Freq. (MHz)		RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit	
BR-1Mbps	2402	-1.74	21	0	-1.74	27	
BR-1Mbps	2441	-1.40	21	0	-1.40	27	
BR-1Mbps	2480	-1.11	21	0	-1.11	27	
EDR-3Mbps	2402	-2.40	21	0	-2.40	27	
EDR-3Mbps	2441	-1.97	21	0	-1.97	27	
EDR-3Mbps 2480		-1.72	21	0	-1.72	27	
Result			Complied	•			

Report No.: FR4D2338-01

3.5.6 Test Result of Maximum Average Conducted Output Power


Maximum Average Conducted Output Power Result							
Condition		RF O	utput Power (dBm)			
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power	
BR-1Mbps	2402	-3.21	0.99	-2.22	0	-2.22	
BR-1Mbps	2441	-2.85	0.99	-1.86	0	-1.86	
BR-1Mbps	2480	-2.57	0.99	-1.58	0	-1.58	
EDR-3Mbps	2402	-6.08	0.99	-5.09	0	-5.09	
EDR-3Mbps	2441	-5.63	0.99	-4.64	0	-4.64	
EDR-3Mbps 2480		-5.37	0.99	-4.38	0	-4.38	
Result			Complied				

SPORTON INTERNATIONAL INC. Page No. : 25 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

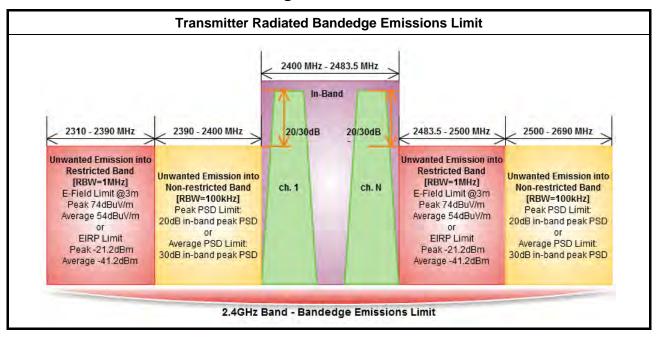

Report No.: FR4D2338-01


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

		Test Method – General Information								
\boxtimes	The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].								
		er as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency nnel and highest frequency channel within the allowed operating band.								
\boxtimes	For the transmitter unwanted emissions shall be measured using following options below:									
		For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.								
		Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.								
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.								
		Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.								
\boxtimes	For	the transmitter bandedge emissions shall be measured using following options below:								
	\boxtimes	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.								
		Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.								
	\boxtimes	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.								
\boxtimes	Refe	er as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m.								

SPORTON INTERNATIONAL INC. Page No. : 26 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

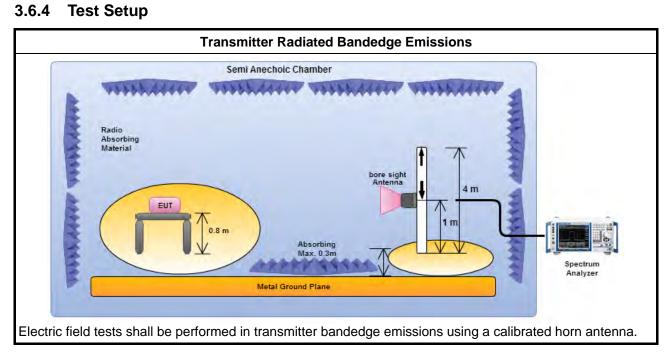

Report No.: FR4D2338-01

FCC Test Report Report No.: FR4D2338-01

3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)											
Modulation	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.				
BR-1Mbps	2402	84.02	2374.260	59.84	24.18	20	Н				
BR -1Mbps	2480	82.72	2485.120	59.44	23.28	20	Н				
EDR-2Mbps	2402	2402 83.25		59.35	23.90	20	Н				
EDR-2Mbps	2480	81.66	2487.840	59.86	21.80	20	Н				
EDR-3Mbps	2402	83.37	2381.196	59.71	23.66	20	Н				
EDR-3Mbps	2480	81.96	2497.920	60.07	21.89	20	Н				

	Transmitter Radiated Bandedge Emissions (Restricted Band)											
Modulation Mode	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.			
BR-1Mbps	2402	3	2330.604	56.38	74	2317.956	43.17	54	Н			
BR -1Mbps	2480	3	2487.200	55.91	74	2499.840	43.55	54	Н			
EDR-2Mbps	2402	3	2321.424	55.90	74	2315.712	43.18	54	Н			
EDR-2Mbps	2480	3	2490.560	56.39	74	2499.680	43.53	54	Н			
EDR-3Mbps	2402	3	2322.240	55.95	74	2314.488	43.18	54	Н			
EDR-3Mbps	2480	3	2487.200	56.19	74	2487.200	44.55	54	Н			

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz

SPORTON INTERNATIONAL INC. Page No. : 28 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit											
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)								
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300								
0.490~1.705	24000/F(kHz)	33.8 - 23	30								
1.705~30.0	30	29	30								
30~88	100	40	3								
88~216	150	43.5	3								
216~960	200	46	3								
Above 960	500	54	3								

Report No.: FR4D2338-01

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit									
RF output power procedure	Limit (dB)								
Peak output power procedure	20								
Average output power procedure	30								

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 29 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR4D2338-01


3.7.3 Test Procedures

		Test Method – General Information									
	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).										
	The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].									
	For	the transmitter unwanted emissions shall be measured using following options below:									
		Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log (dwell time/100 ms)									
		For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.									
For unwanted emissions into restricted bands.											
		Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.									
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.									
		Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.									
	For	radiated measurement.									
	\boxtimes	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.									
	\boxtimes	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.									
	\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.									
	The	any unwanted emissions level shall not exceed the fundamental emission level.									
		mplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value no need to be reported.									

SPORTON INTERNATIONAL INC. Page No. : 30 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01




3.7.4 Test Setup

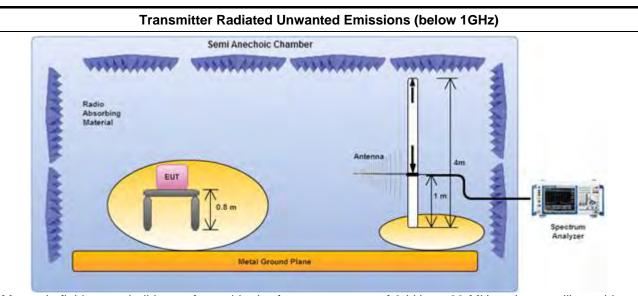

Report No.: FR4D2338-01

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

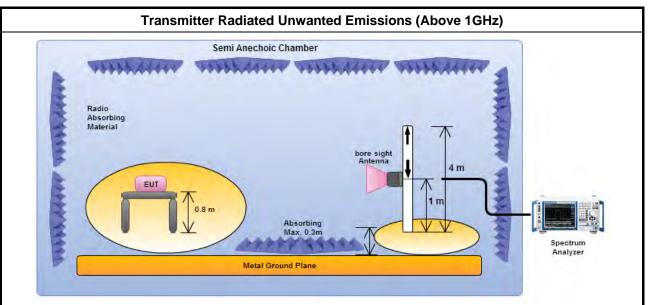

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.


3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


SPORTON INTERNATIONAL INC. Page No. : 31 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR4D2338-01

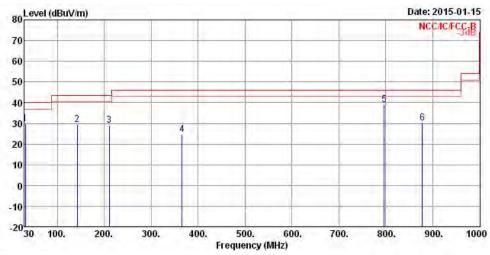

	Fuee	Level	0√er Limit	2000		Antenna		A 20 7 18 1	Remark	A/Pos	T/Pos
	Freq	rever	LIMIT	Line	rever	Factor	LOSS	Factor	Kemark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	31.940	29.86	-10.14	40.00	38.58	17.76	0.87	27.35	Peak	1,555	
2	142.520	29.49	-14.01	43.50	43.69	10.98	1.98	27.16	Peak	222	1222
3	210.420	28.92	-14.58	43.50	44.16	9.45	2.39	27.08	Peak	***	
4	365.620	24.69	-21.31	46.00	33.88	14.72	3.19	27.10	Peak	444	444
5	796.300	38.92	-7.08	46.00	41.99	19.66	4.90	27.63	Peak		1555
6	877.780	30.04	-15.96	46.00	31.89	20.44	5.08	27.37	Peak	1222	(2)22

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 32 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode 2 Polarization H

Report No.: FR4D2338-01

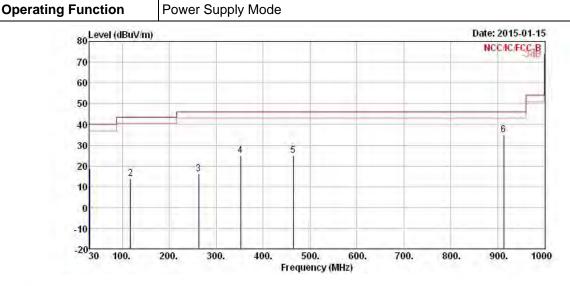

			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Line Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	18.63	-21.37	40.00	26.35	18.85	0.82	27.39	Peak	227	337
2	117.300	14.11	-29.39	43.50	27.27	12.26	1.76	27.18	Peak	444	444
3	262.800	16.29	-29.71	46.00	26.87	13.58	2.69	26.85	Peak		
4	352.040	25.02	-20.98	46.00	34.40	14.50	3.13	27.01	Peak	222	222
5	464.560	24.96	-21.04	46.00	32.29	16.82	3.58	27.73	Peak		
6	912.700	34.96	-11.04	46.00	36.44	20.60	5.23	27.31	Peak	عددا	1224

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


SPORTON INTERNATIONAL INC. Page No. : 33 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01



3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)



Report No.: FR4D2338-01

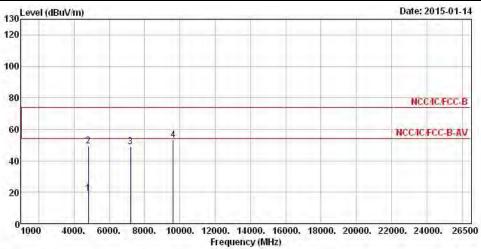

			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Level	Factor	Loss	Factor	Remark	2002	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	19.42	-34.58	54.00	14.20	33.20	4.49	32.47	Average	1222	-222
2	4804.000	49.52	-24.48	74.00	44.30	33.20	4.49	32.47	Peak	777	
3	7206.000	48.73			39.81	35.84	5.71	32.63	Peak	244	222
4	9608.000	53.25			41.36	38.37	6.66	33.14	Peak		


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (84.92 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 34 of 40
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Report No.: FR4D2338-01

Modulation ModeBR-1MbpsTest Freq. (MHz)2402Operating FunctionTransmitPolarizationH

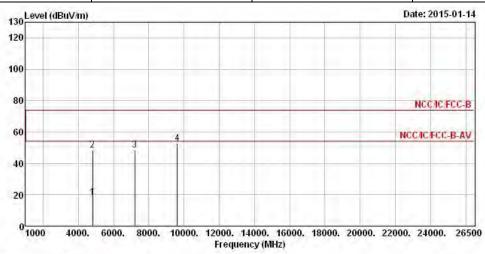

			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	$\overline{\text{dBuV/m}}$	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	18.18	-35.82	54.00	12.96	33.20	4.49	32.47	Average		111
2	4804.000	48.28	-25.72	74.00	43.06	33.20	4.49	32.47	Peak	1222	224
3	7206.000	48.50			39.58	35.84	5.71	32.63	Peak	455	1.65+
4	9608.000	52.92			41.03	38.37	6.66	33.14	Peak	444	222

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (84.92 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 35 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

Tr	ansmitter Radiated Unwan	nted Emissions (Above 1G	Hz)
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2441
Operating Function	Transmit	Polarization	V

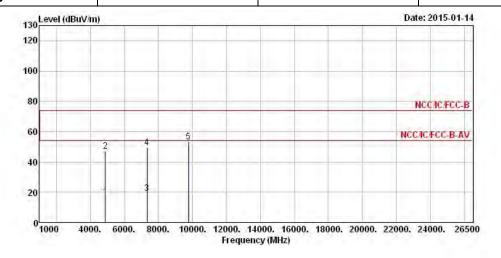


			0∨er			Antenna		7.77		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	16.91	-37.09	54.00	11.52	33.31	4.53	32.45	Average		227
2	4882.000	47.01	-26.99	74.00	41.62	33.31	4.53	32.45	Peak	1222	1222
3	7323.000	19.18	-34.82	54.00	9.96	36.15	5.75	32.68	Average	***	455
4	7323.000	49.28	-24.72	74.00	40.06	36.15	5.75	32.68	Peak	444	444
5	9764.000	53.14			40.90	38.64	6.73	33.13	Peak	227	555

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (85.09 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 36 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation ModeBR-1MbpsTest Freq. (MHz)2441								
Operating Function	Transmit	Polarization	Н					

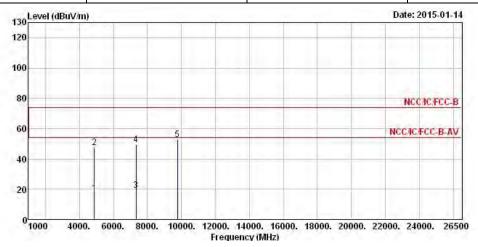


			0ver			Antenna		2000		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	17.48	-36.52	54.00	12.09	33.31	4.53	32.45	Average		227
2	4882.000	47.58	-26.42	74.00	42.19	33.31	4.53	32.45	Peak	1222	1222
3	7323.000	19.08	-34.92	54.00	9.86	36.15	5.75	32.68	Average	***	455
4	7323.000	49.18	-24.82	74.00	39.96	36.15	5.75	32.68	Peak	444	444
5	9764.000	52.97			40.73	38.64	6.73	33.13	Peak	227	555

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (85.09 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 37 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode BR-1Mbps Test Freq. (MHz) 2480								
Operating Function	Transmit	Polarization	V					

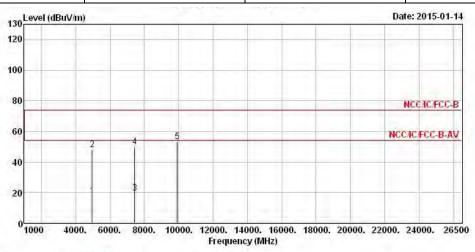


			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Le∨el	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	$\overline{dBuV/m}$	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	17.65	-36.35	54.00	12.08	33.44	4.57	32.44	Average	1444	1444
2	4960.000	47.75	-26.25	74.00	42.18	33.44	4.57	32.44	Peak	+++	
3	7440.000	19.74	-34.26	54.00	10.20	36.47	5.79	32.72	Average		
4	7440.000	49.84	-24.16	74.00	40.30	36.47	5.79	32.72	Peak		
5	9920.000	53.24			40.68	38.89	6.80	33.13	Peak	1444	1224

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (83.41 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 38 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01

Т	Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	BR-1Mbps	Test Freq. (MHz)	2480						
Operating Function	Transmit	Polarization	Н						

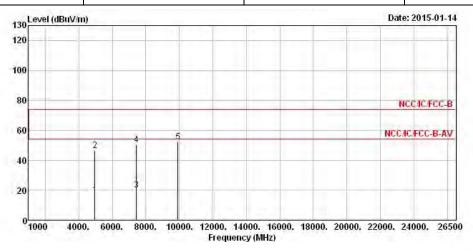

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	16.60	-37.40	54.00	11.03	33.44	4.57	32.44	Average	444	1444
2	4960.000	46.70	-27.30	74.00	41.13	33.44	4.57	32.44	Peak		
3	7440.000	20.16	-33.84	54.00	10.62	36.47	5.79	32.72	Average		999
4	7440.000	50.26	-23.74	74.00	40.72	36.47	5.79	32.72	Peak		
5	9920.000	52.29			39.73	38.89	6.80	33.13	Peak	1444	5.6.6

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (83.41 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

SPORTON INTERNATIONAL INC. Page No. : 39 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14. 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-666	9kHz ~ 30MHz	Nov. 26, 2014	AC Conduction

Report No.: FR4D2338-01

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101015	9kHz ~ 40GHz	Jun. 01, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17, 2013	Radiation
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz ~ 30MHz	Jul. 28, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 10, 2014	Radiation

Note: Calibration Interval of instruments listed above is two years.

SPORTON INTERNATIONAL INC. Page No. : 40 of 40 TEL: 886-3-327-3456 Report Version : Rev. 01