FCC Test Report

Report No.: AGC01892150601FE03

FCC ID : 2ACIP-TTSK40

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bluetooth Speaker

BRAND NAME : TAOTRONICS

MODEL NAME

TT-SK06,TT-SK05, TT-SK07, TT-SK08, TT-SK10, TT-SK11,

TT-SK12, TT-SK09

CLIENT : Hootoo.com Inc.

DATE OF ISSUE : July 31,2015

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 73

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 31,2015	Valid	Original Report

Note: This EUT is same with the FCC ID: OYCBT079(Report NO.AGC00931150703), same data.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	10
8.1TEST LIMIT	10
8.2. MEASUREMENT PROCEDURE	11
8.3. TEST SETUP	13
8.4. TEST RESULT	15
9. BAND EDGE EMISSION	41
9.1. MEASUREMENT PROCEDURE	41
9.2 TEST SETUP	41
9.3 RADIATED TEST RESULT	42
10. 20DB BANDWIDTH	50
10.1. MEASUREMENT PROCEDURE	50
10.2. TEST SET-UP	50
10.3. LIMITS AND MEASUREMENT RESULTS	50
11. FCC LINE CONDUCTED EMISSION TEST	59
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	59
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	59
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	60
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	60
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	65
APPENDIX B: PHOTOGRAPHS OF EUT	67

Page 4 of 73

1. VERIFICATION OF CONFORMITY

Applicant	Hootoo.com Inc.
Address	2880 Zanker Road STE 203 San Jose, CA95134
Manufacturer	Shenzhen NearbyExpress Technology Development Company Limited
Address	2/F,Block D, Minle Industrial Park, Meiban RD,Longhua District,Shenzhen,China.
Product Designation	Bluetooth Speaker
Brand Name	TAOTRONICS
Test Model	TT-SK06
Series Model	TT-SK05, TT-SK07, TT-SK08, TT-SK10, TT-SK11, TT-SK12, TT-SK09
Different Description	All the same except for the appearance color
Date of test	July 29,2015 to July 30,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By	Jerry XIVO	
	Jerry Xiao(Xiao Wang)	July 31,2015
Checked By	Formesto ei	
	Forrest Lei(Lei Yonggang)	July 31,2015
Authorized By	solya stong	
· .	Solger Zhang(Zhang Hongyi)	July 31,2015

Page 5 of 73

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

·····sje· teeea. deecp		
Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	3.05dBm(Max)	
Bluetooth Version	V4.0	
Modulation	GFSK, π /4-DQPSK, 8DPSK	
Number of channels	79 for traditional BT 40 for BLE	
Hardware Version	BT079-105118-MAX-ESD-CH-10P	
Software Version	V1.0	
Antenna Designation	PIFA Antenna (Met 15.203 Antenna requirement)	
Antenna Gain	0dBi	
Power Supply	DC 7.4V	
Note: The USB port only used for charging and can't be used to transfer data with PC.		

2.2. TABLE OF CARRIER FREQUENCYS

Traditional Bluetooth channel List

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
2400~2483.5MHZ	39	2441 MHZ
	40	2442 MHZ
	••	:
	77	2479 MHZ
	78	2480 MHZ

Page 6 of 73

BLE Channel List

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2404MHZ
2400~2483.5MHZ	:	:
	38	2478 MHZ
	39	2480 MHZ

Report No.: AGC01892150601FE03 Page 7 of 73

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal operation (BT)
Mata.	

Note:


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

Page 8 of 73

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Speaker	TAOTRONICS	TT-SK06	EUT
2	PC	Dell	A1465	A.E
3	Control box	N/A	N/A	A.E
4	USB Cable	N/A	1.2m, unshielded	A.E
5	Audio Cable	N/A	0.3m, unshielded	A.E
6	IPOD	APPLE	A1367	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

Report No.: AGC01892150601FE03 Page 9 of 73

6. TEST FACILITY

Site Compliance Certification Service(Shenzhen) Inc.	
Location No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr	
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

	Radiated I	Emission Test S	ite 966(2)		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWAR Z	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	СТ	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower SUNOL		TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CC	S-SZ-3A2	

	Conducted Emission Test Site												
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration								
EMI TEST RECEIVER	ROHDE&SCHWA RZ	ESCI	100783	03/09/2015	03/08/2016								
LISN(EUT)	ROHDE&SCHWA RZ	ENV216	101543-WX	03/09/2015	03/08/2016								
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016								
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016								
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE											

Page 10 of 73

8. RADIATED EMISSION

8.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics			
	(millivolts/meter)	(microvolts/meter)			
900-928MHz	50	500			
2400-2483.5MHz	50	500			
5725-5875MHz	50	500			
24.0-24.25GHz	250	2500			

Standard FCC 15.209

Frequency	Distance	Field Stre	ngths Limit			
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000 3		500 54.0				
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Ave				

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC01892150601FE03 Page 11 of 73

8.2. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC01892150601FE03 Page 12 of 73

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting					
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP					
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP					
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP					
Start ~Stop Frequency	1GHz~26.5GHz					
Clair Ctop Frequency	1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average					

Receiver Parameter	Setting					
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP					
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP					
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP					


Report No.: AGC01892150601FE03 Page 13 of 73

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

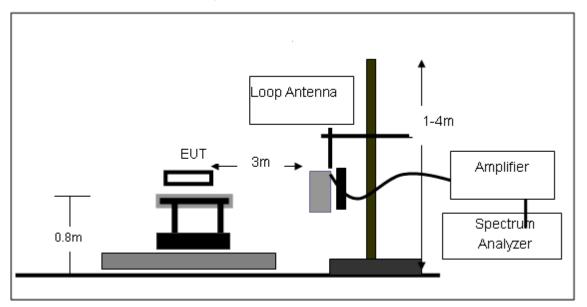

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

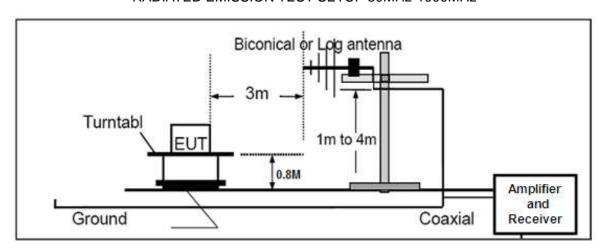

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

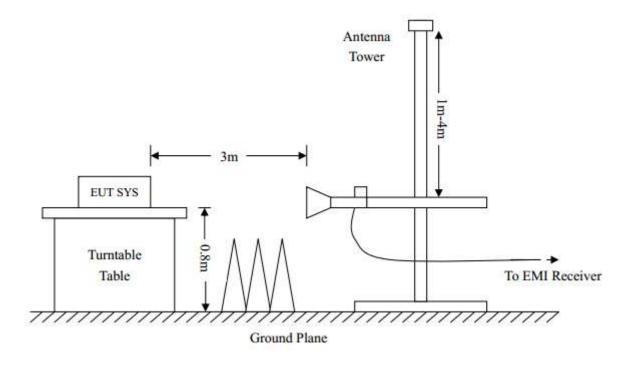

Page 15 of 73

8.4. TEST RESULT

(Worst modulation:GFSK)


FOR TRADITIONAL BLUETOOTH

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

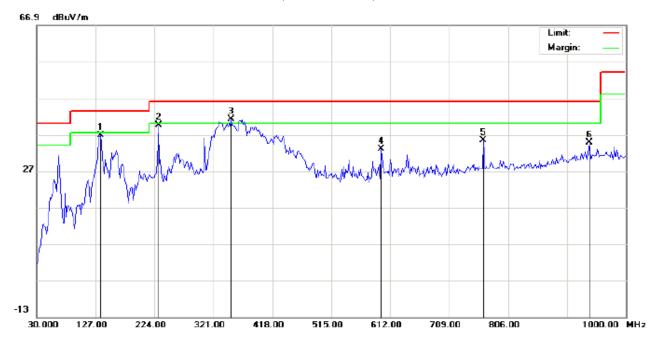

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Low Channel TX

Note:

Р	olarization:	Horizontal	Temperature:	24.1
Р	ower:		Humidity: 53	6 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		135.0833	22.33	14.38	36.71	43.50	-6.79	peak			
2		230.4667	26.39	13.16	39.55	46.00	-6.45	peak			
3	*	350.1000	22.39	18.74	41.13	46.00	-4.87	peak			
4		597.4500	9.28	23.67	32.95	46.00	-13.05	peak			
5		765.5833	8.64	26.84	35.48	46.00	-10.52	peak			
6		940.1833	5.08	29.73	34.81	46.00	-11.19	peak			

Temperature: 24.1

Humidity: 53.6 %

Page 16 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

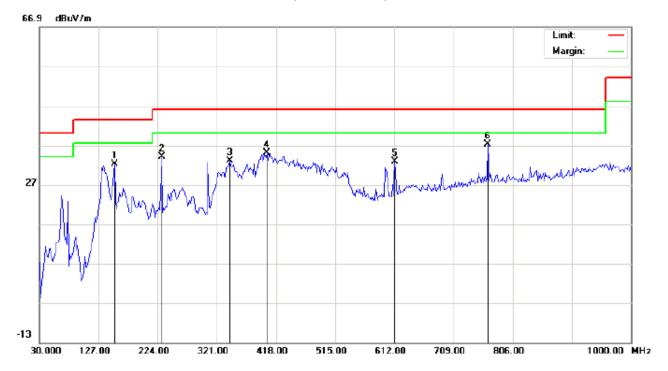

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		152.8667	16.89	15.28	32.17	43.50	-11.33	peak			
2		230.4667	21.93	11.99	33.92	46.00	-12.08	peak			
3		342.0167	14.73	18.21	32.94	46.00	-13.06	peak			
4		403.4500	15.74	19.17	34.91	46.00	-11.09	peak			
5		612.0000	9.71	23.00	32.71	46.00	-13.29	peak			
6	*	765.5833	10.33	26.84	37.17	46.00	-8.83	peak		·	

Power:

Distance: 3m


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 17 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

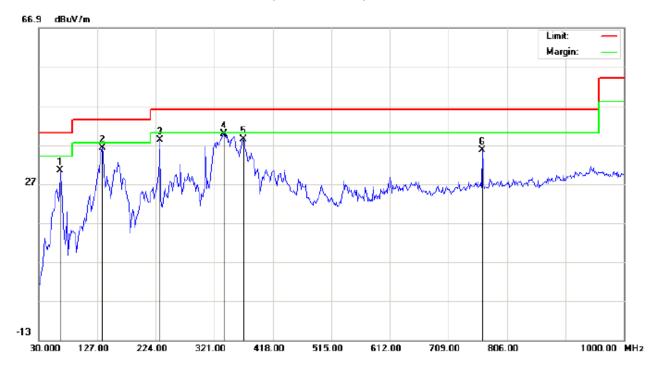

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Middle Channel TX

Note:

Polarization: *Horizontal* Temperature: 24.1 Power: Humidity: 53.6 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		65.5667	19.75	10.65	30.40	40.00	-9.60	peak			
2		135.0833	21.86	14.38	36.24	43.50	-7.26	peak			
3		230.4667	25.04	13.16	38.20	46.00	-7.80	peak			
4	*	337.1666	21.92	17.89	39.81	46.00	-6.19	peak			
5		369.5000	19.47	18.87	38.34	46.00	-7.66	peak			
6		765.5833	8.75	26.84	35.59	46.00	-10.41	peak			

Temperature: 24.1

Humidity: 53.6 %

Page 18 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

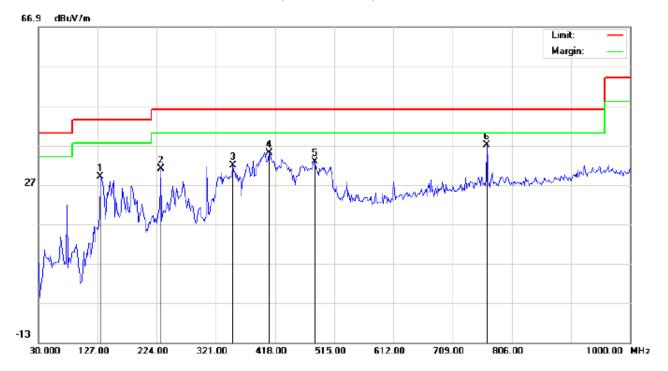

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

FIIT: Blustaath Saaskar

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu√/m	dB		cm	degree	
1		131.8500	17.11	11.80	28.91	43.50	-14.59	peak			
2		230.4667	19.06	11.99	31.05	46.00	-14.95	peak			
3		348.4833	13.13	18.64	31.77	46.00	-14.23	peak			
4		408.3000	15.66	19.32	34.98	46.00	-11.02	peak			
5		482.6667	11.79	20.94	32.73	46.00	-13.27	peak			
6	*	765.5833	10.10	26.84	36.94	46.00	-9.06	peak			

Power:

Distance: 3m

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 24.1

Humidity: 53.6 %

Page 19 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

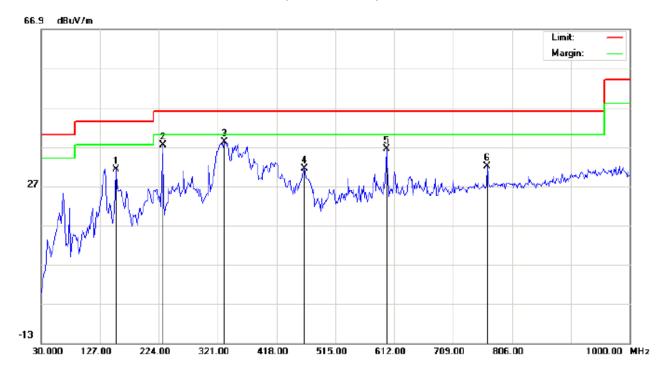

Polarization: Horizontal

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		152.8667	15.92	15.28	31.20	43.50	-12.30	peak			
2		230.4667	24.23	13.16	37.39	46.00	-8.61	peak			
3	*	332.3167	20.56	17.56	38.12	46.00	-7.88	peak			
4		463.2667	10.70	20.73	31.43	46.00	-14.57	peak			
5		599.0667	12.66	23.71	36.37	46.00	-9.63	peak			
6		765.5833	5.09	26.84	31.93	46.00	-14.07	peak			

Power:


Distance: 3m

Temperature: 24.1

Humidity: 53.6 %

Page 20 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

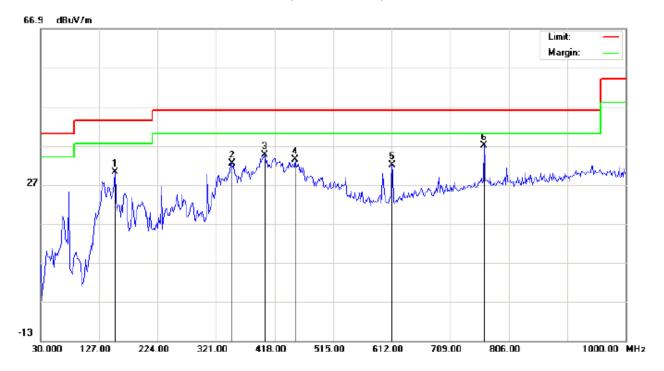

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		152.8667	14.93	15.28	30.21	43.50	-13.29	peak			
2		346.8667	13.85	18.53	32.38	46.00	-13.62	peak			
3		401.8333	15.48	19.13	34.61	46.00	-11.39	peak			
4		451.9500	12.85	20.61	33.46	46.00	-12.54	peak			
5		612.0000	8.91	23.00	31.91	46.00	-14.09	peak		·	
6	*	765.5833	10.13	26.84	36.97	46.00	-9.03	peak			

Power:

Distance: 3m

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 73


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

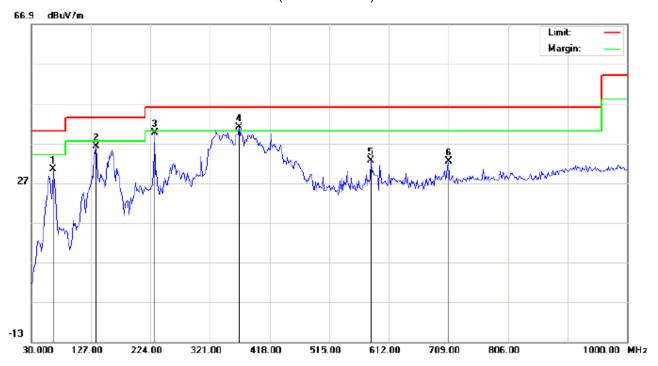

Site: site #1 Polarization: Horizontal Temperature: 24.1 Limit: FCC Class B 3M Radiation Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		65.5664	19.70	10.65	30.35	40.00	-9.65	peak			
2		135.0833	21.83	14.38	36.21	43.50	-7.29	peak			
3		230.4667	26.39	13.16	39.55	46.00	-6.45	peak			
4	*	367.8833	22.19	18.86	41.05	46.00	-4.95	peak			
5		582.8999	9.22	23.30	32.52	46.00	-13.48	peak			
6		709.0000	7.04	25.45	32.49	46.00	-13.51	peak			

Temperature: 24.1 Humidity: 53.6 %

Page 22 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

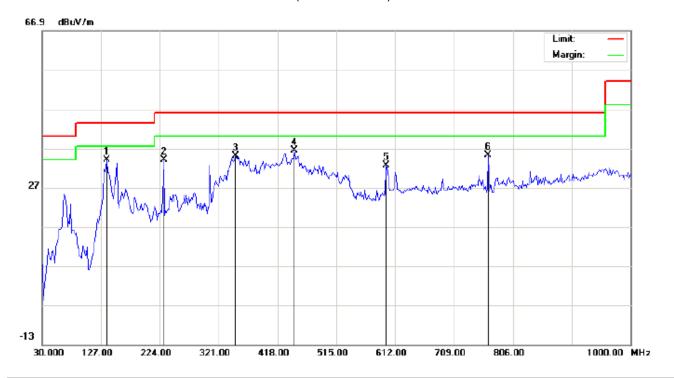

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	136.6999	20.16	13.82	33.98	43.50	-9.52	peak			
2		230.4667	21.93	11.99	33.92	46.00	-12.08	peak			
3		348.4832	16.30	18.64	34.94	46.00	-11.06	peak			
4		445.4832	15.88	20.45	36.33	46.00	-9.67	peak			
5		597.4500	9.90	22.72	32.62	46.00	-13.38	peak			
6		765.5833	8.33	26.84	35.17	46.00	-10.83	peak			

Power:

Distance: 3m


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 23 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

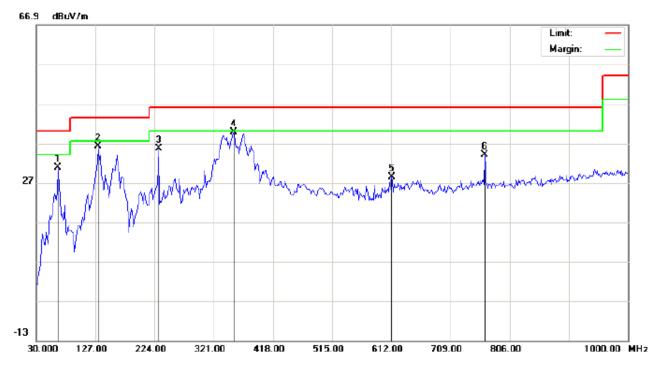

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Middle Channel TX

Note:

Polarization: Horizontal Temperature: 24.1 Power: Humidity: 53.6 %

Distance: 3m


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		65.5664	20.25	10.65	30.90	40.00	-9.10	peak			
2		131.8498	22.46	13.84	36.30	43.50	-7.20	peak			
3		230.4667	22.54	13.16	35.70	46.00	-10.30	peak			
4	*	353.3333	20.95	18.76	39.71	46.00	-6.29	peak			
5		612.0000	4.74	23.76	28.50	46.00	-17.50	peak			
6		765.5833	7.25	26.84	34.09	46.00	-11.91	peak			

Temperature: 24.1

Humidity: 53.6 %

Page 24 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

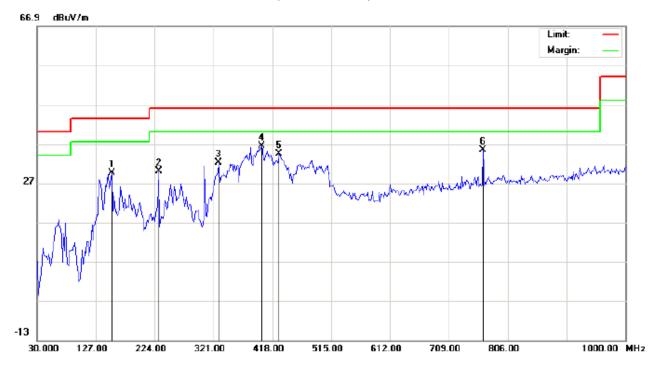

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		152.8667	14.32	15.28	29.60	43.50	-13.90	peak			
2		230.4667	18.06	11.99	30.05	46.00	-15.95	peak			
3		329.0833	14.78	17.35	32.13	46.00	-13.87	peak			
4	*	400.2167	17.34	19.08	36.42	46.00	-9.58	peak			
5		429.3167	14.44	19.96	34.40	46.00	-11.60	peak			
6		765 5833	8.60	26.84	35.44	46.00	-10.56	neak			

Power:

Distance: 3m

Polarization: Vertical

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 24.1 Humidity: 53.6 %

Page 25 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

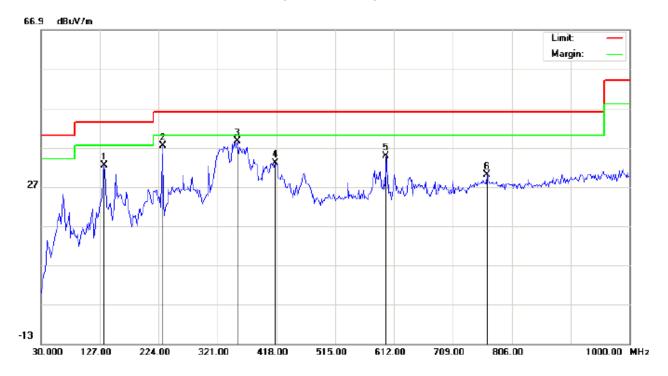

Polarization: Horizontal

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		133.4667	18.28	14.11	32.39	43.50	-11.11	peak			
2		230.4667	24.23	13.16	37.39	46.00	-8.61	peak			
3	*	353.3333	19.87	18.76	38.63	46.00	-7.37	peak			
4		416.3833	13.39	19.57	32.96	46.00	-13.04	peak			
5		599.0665	11.16	23.71	34.87	46.00	-11.13	peak			
6		765.5833	3.09	26.84	29.93	46.00	-16.07	peak			

Power:

Distance: 3m

Page 26 of 73

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

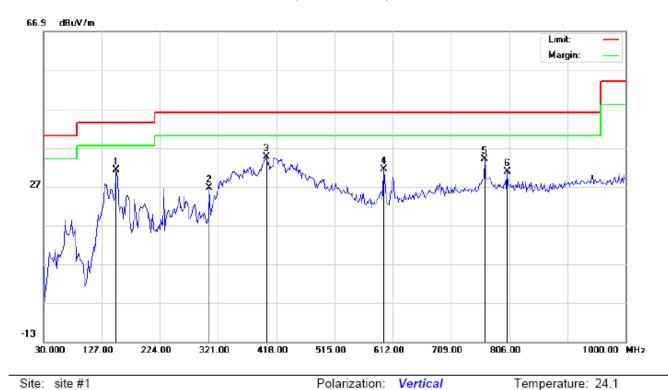

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: High Channel TX

Note:

Power:		Humidity:	53.6 %
Distance:	3m		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		151.2500	15.91	15.27	31.18	43.50	-12.32	peak			
2		306.4499	10.84	15.84	26.68	46.00	-19.32	peak			
3	*	401.8333	15.48	19.13	34.61	46.00	-11.39	peak			
4		597.4500	8.60	22.72	31.32	46.00	-14.68	peak			
5		765.5833	7.13	26.84	33.97	46.00	-12.03	peak			
6		802.7667	3.39	27.32	30.71	46.00	-15.29	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 27 of 73

RADIATED EMISSION ABOVE 1GHZ FOR TRADITIONAL BLUETOOTH

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

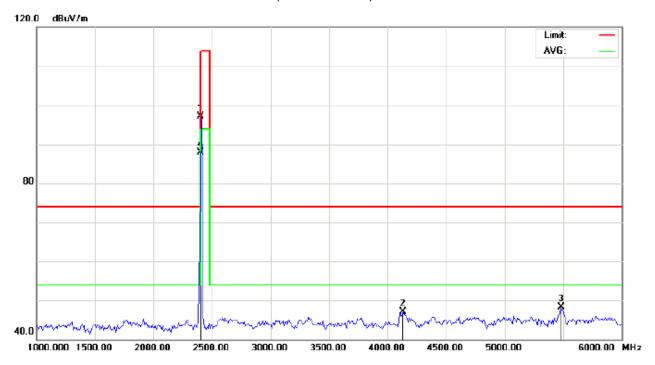

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	106.73	-9.68	97.05	114.00	-16.95	peak			
2		4133.333	51.38	-4.36	47.02	74.00	-26.98	peak			
3		5483.333	50.05	-1.81	48.24	74.00	-25.76	peak			
4	*	2402.000	97.58	-9.68	87.90	94.00	-6.10	AVG	150	0	

Page 28 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

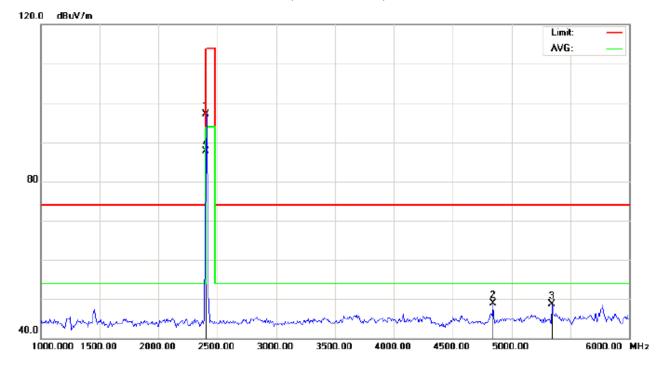

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	106.76	-9.68	97.08	114.00	-16.92	peak			
2		4841.667	51.12	-2.21	48.91	74.00	-25.09	peak			
3		5341.667	50.43	-1.81	48.62	74.00	-25.38	peak			
4	*	2402.000	97.38	-9.68	87.70	94.00	-6.30	AVG	150	55	

Page 29 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

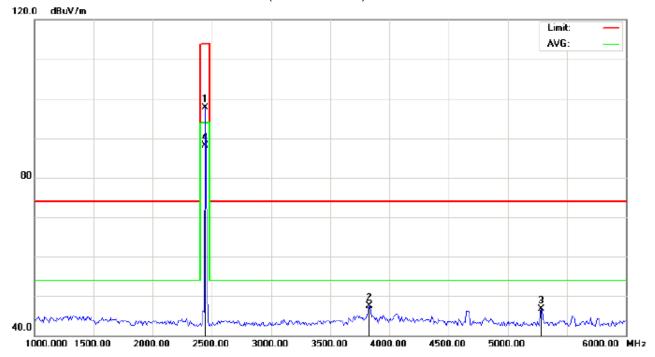

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	107.29	-9.63	97.66	114.00	-16.34	peak			
2		3833.333	53.30	-5.84	47.46	74.00	-26.54	peak			
3		5283.333	48.51	-1.81	46.70	74.00	-27.30	peak			
4	*	2441.000	97.74	-9.63	88.11	94.00	-5.89	AVG	150	200	

Page 30 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

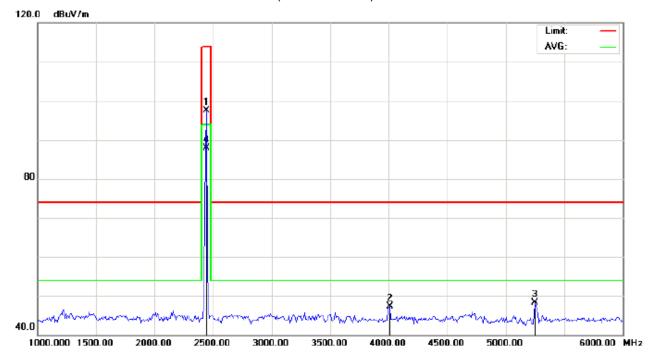

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	107.23	-9.63	97.60	114.00	-16.40	peak			
2		4008.333	52.03	-4.78	47.25	74.00	-26.75	peak			
3		5250.000	50.10	-1.81	48.29	74.00	-25.71	peak			
4	*	2441.000	97.59	-9.63	87.96	94.00	-6.04	AVG	150	124	

Page 31 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

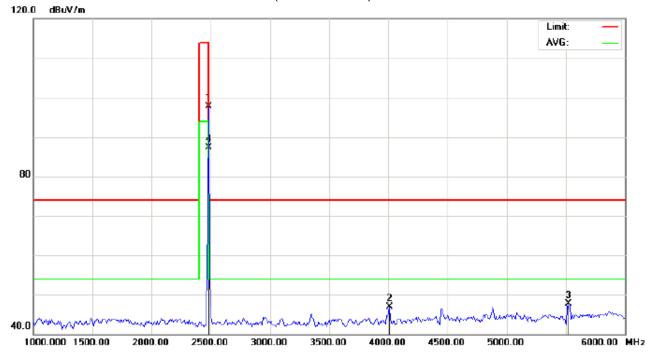

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2480.000	107.37	-9.59	97.78	114.00	-16.22	peak			
2		4008.333	51.65	-4.78	46.87	74.00	-27.13	peak			
3		5525.000	49.49	-1.80	47.69	74.00	-26.31	peak			
4	*	2480.000	96.89	-9.59	87.30	94.00	-6.70	AVG	150	299	

Page 32 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

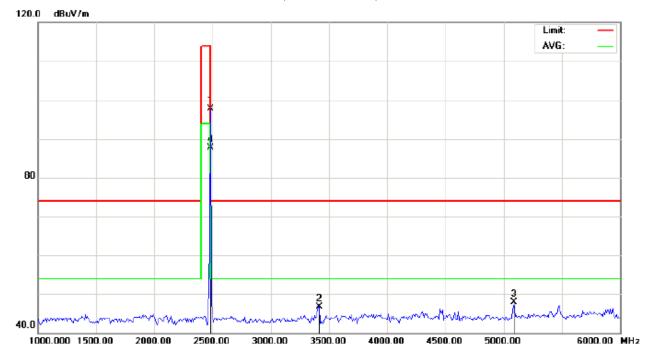

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	107.37	-9.59	97.78	114.00	-16.22	peak			
2		3416.667	54.77	-7.97	46.80	74.00	-27.20	peak			
3		5091.667	49.62	-1.80	47.82	74.00	-26.18	peak			
4	*	2480.000	97.28	-9.59	87.69	94.00	-6.31	AVG	150	360	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC01892150601FE03 Page 33 of 73

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.73	-9.68	97.05	114	-16.95	Horizontal
2402	106.76	-9.68	97.08	114	-16.92	Vertical
2441	107.29	-9.63	97.66	114	-16.34	Horizontal
2441	107.23	-9.63	97.60	114	-16.40	Vertical
2480	107.37	-9.59	97.78	114	-16.22	Horizontal
2480	107.37	-9.59	97.78	114	-16.22	Vertical


Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv) (dB/m)		(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	97.58	-9.68	87.90	94	-6.10	Horizontal
2402	97.38	-9.68	87.70	94	-6.30	Vertical
2441	97.74	-9.63	88.11	94	-5.89	Horizontal
2441	97.59	-9.63	87.96	94	-6.04	Vertical
2480	96.89	-9.59	87.30	94	-6.70	Horizontal
2480	97.28	-9.59	87.69	94	-6.31	Vertical

Page 34 of 73

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

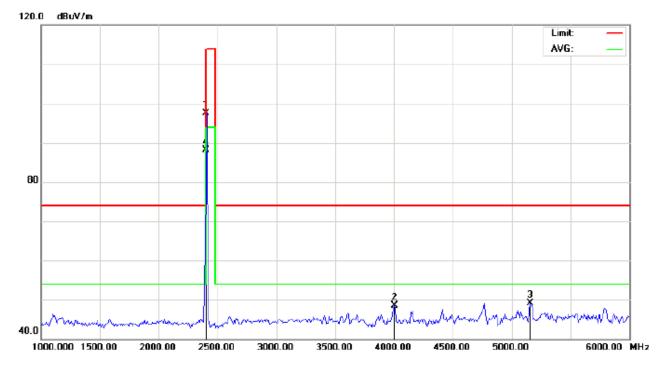

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	107.27	-9.68	97.59	114.00	-16.41	peak			
2		4000.000	53.24	-4.81	48.43	74.00	-25.57	peak			
3		5158.333	50.85	-1.80	49.05	74.00	-24.95	peak			
4	*	2402.000	97.88	-9.68	88.20	94.00	-5.80	AVG	100	360	

Page 35 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

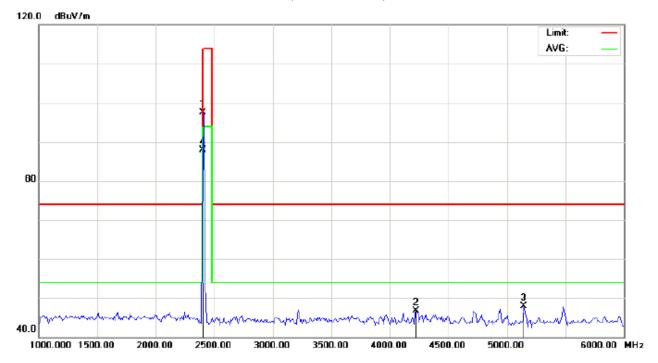

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	107.23	-9.68	97.55	114.00	-16.45	peak			
2		4225.000	50.67	-4.04	46.63	74.00	-27.37	peak			
3		5141.667	49.66	-1.80	47.86	74.00	-26.14	peak			
4	*	2402.000	97.49	-9.68	87.81	94.00	-6.19	AVG	100	289	

Page 36 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

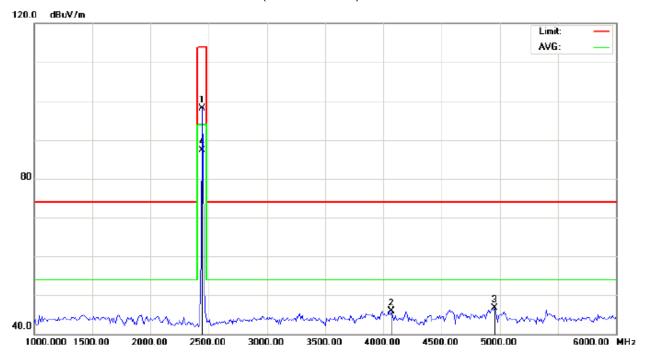

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	107.79	-9.63	98.16	114.00	-15.84	peak			
2		4066.667	50.45	-4.58	45.87	74.00	-28.13	peak			
3		4958.333	48.64	-1.91	46.73	74.00	-27.27	peak			
4	*	2440.000	96.98	-9.63	87.35	94.00	-6.65	AVG	100	94	

Page 37 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

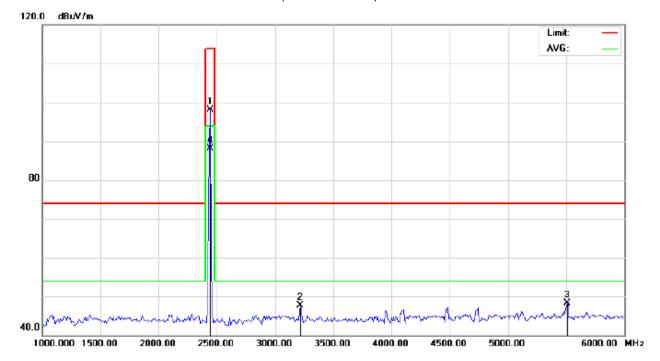

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06

Mode: Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2440.000	107.73	-9.63	98.10	114.00	-15.90	peak			
2		3216.667	55.86	-8.16	47.70	74.00	-26.30	peak			
3		5508.333	50.08	-1.81	48.27	74.00	-25.73	peak			
4	*	2440.000	97.79	-9.63	88.16	94.00	-5.84	AVG	100	180	

RESULT: PASS

Page 38 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

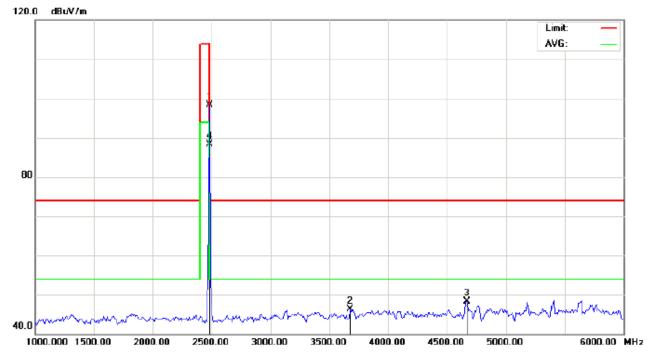

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06

Mode: High Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	107.87	-9.59	98.28	114.00	-15.72	peak			
2		3675.000	53.17	-6.81	46.36	74.00	-27.64	peak			
3		4666.667	50.94	-2.67	48.27	74.00	-25.73	peak			
4	*	2480.000	97.85	-9.59	88.26	94.00	-5.74	AVG	100	29	

RESULT: PASS

Page 39 of 73

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

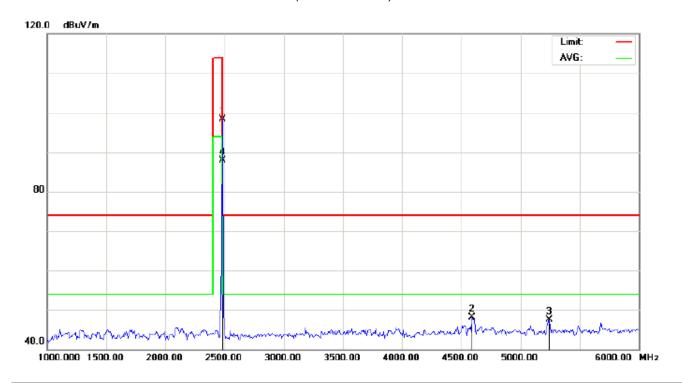

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	107.84	-9.59	98.25	114.00	-15.75	peak			
2		4591.667	50.89	-2.87	48.02	74.00	-25.98	peak			
3		5241.667	49.36	-1.80	47.56	74.00	-26.44	peak			
4	*	2480.000	97.47	-9.59	87.88	94.00	-6.12	AVG	100	0	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC01892150601FE03 Page 40 of 73

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	107.27	-9.68	97.59	114	-16.41	Horizontal
2402	107.23	-9.68	97.55	114	-16.45	Vertical
2440	107.79	-9.63	98.16	114	-15.84	Horizontal
2440	107.73	-9.63	98.10	114	-15.90	Vertical
2480	107.87	-9.59	98.28	114	-15.72	Horizontal
2480	107.84	-9.59	98.25	114	-15.75	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	97.88	-9.68	88.20	94	-5.80	Horizontal
2402	97.49	-9.68	87.81	94	-6.19	Vertical
2440	96.98	-9.63	87.35	94	-6.65	Horizontal
2440	97.79	-9.63	88.16	94	-5.84	Vertical
2480	97.85	-9.59	88.26	94	-5.74	Horizontal
2480	97.47	-9.59	87.88	94	-6.12	Vertical

Page 41 of 73

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.


3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

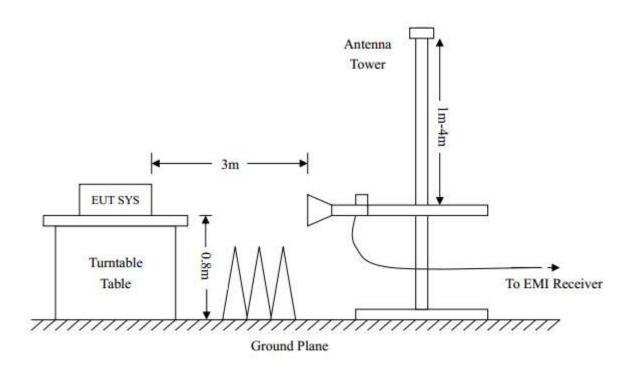

CONDUCTED TEST SETUP




Page 42 of 73

9.3 RADIATED TEST RESULT

(Worst modulation:GFSK)

FOR TRADITIONAL BLEUTOOTH

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

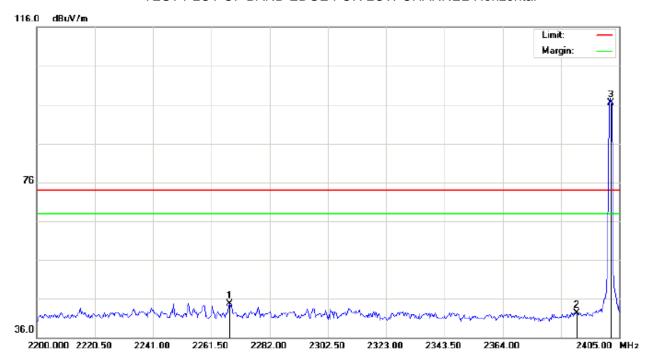

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

Distance:

EUT: Bluetooth Speaker


M/N: TT-SK06

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2267.992	34.57	10.17	44.74	74.00	-29.26	peak			
2		2390.000	32.00	10.31	42.31	74.00	-31.69	peak			
3	*	2402.000	86.22	10.32	96.54	74.00	22.54	peak			

Page 43 of 73

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

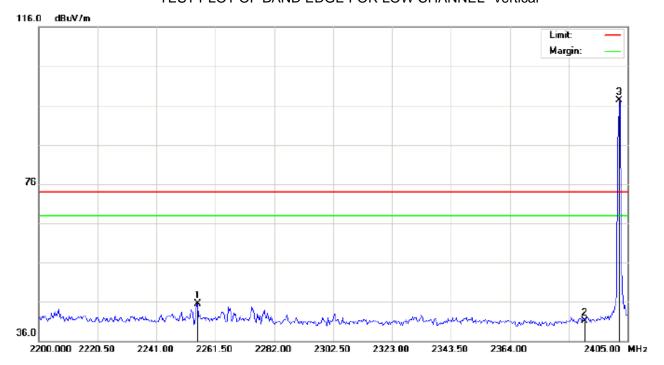

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: TT-SK06

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2255.350	35.37	10.16	45.53	74.00	-28.47	peak			
2		2390.000	30.71	10.31	41.02	74.00	-32.98	peak			
3	*	2402.000	87.07	10.32	97.39	74.00	23.39	peak			

Page 44 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

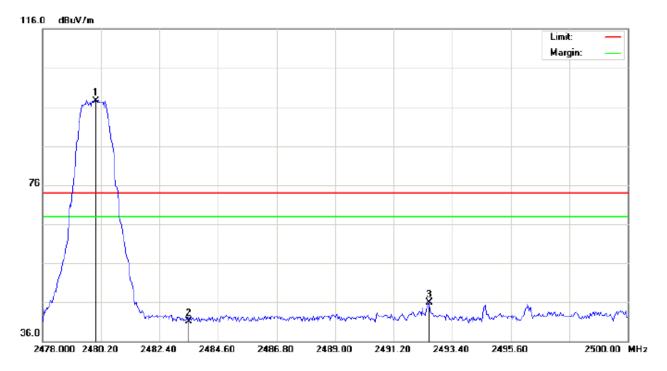

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: TT-SK06

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2492.520	35.52	10.42	45.94	74.00	-28.06	peak			

Page 45 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

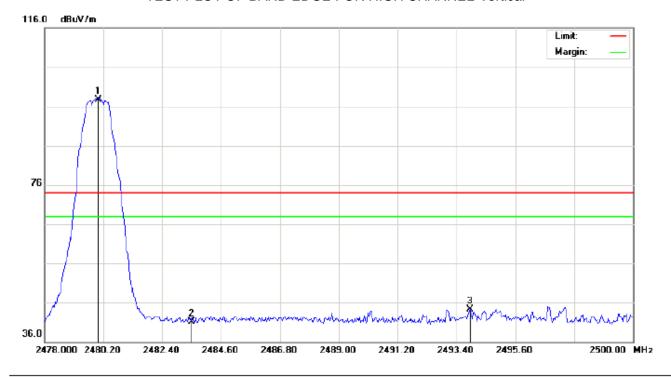

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.32	10.41	97.73	74.00	23.73	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2493.913	33.94	10.42	44.36	74.00	-29.64	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 46 of 73

FOR BLE

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

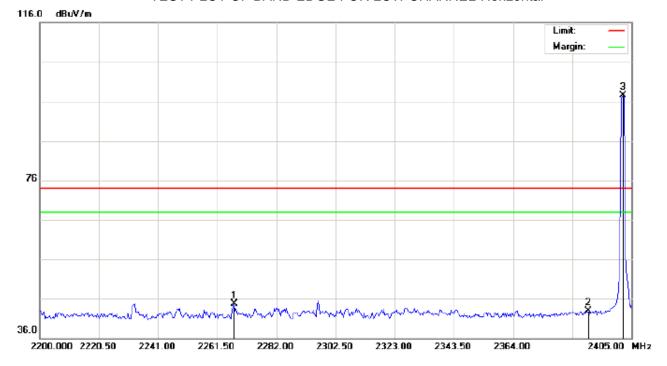

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: TT-SK06

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2267.308	34.59	10.17	44.76	74.00	-29.24	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3	*	2402.000	87.22	10.32	97.54	74.00	23.54	peak			

Page 47 of 73

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

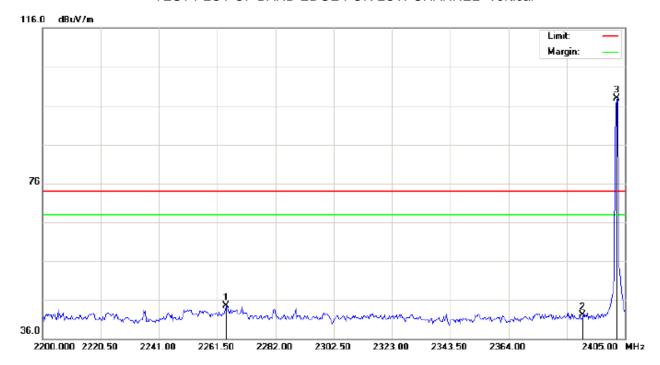

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: TT-SK06

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2264.575	34.41	10.17	44.58	74.00	-29.42	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	*	2402.000	87.58	10.32	97.90	74.00	23.90	peak			

Page 48 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

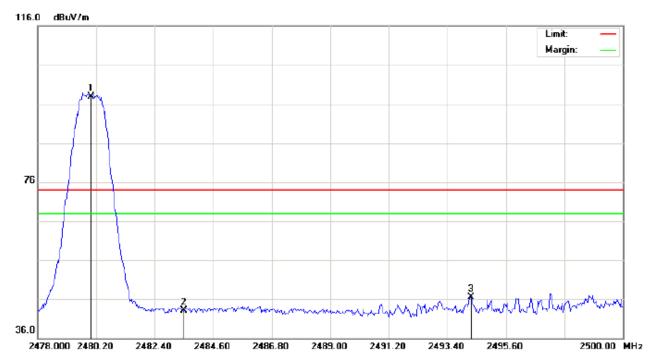

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: TT-SK06

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.55	10.41	97.96	74.00	23.96	peak			
2		2483.500	32.69	10.41	43.10	74.00	-30.90	peak			
3		2494.280	36.14	10.42	46.56	74.00	-27.44	peak			

Page 49 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

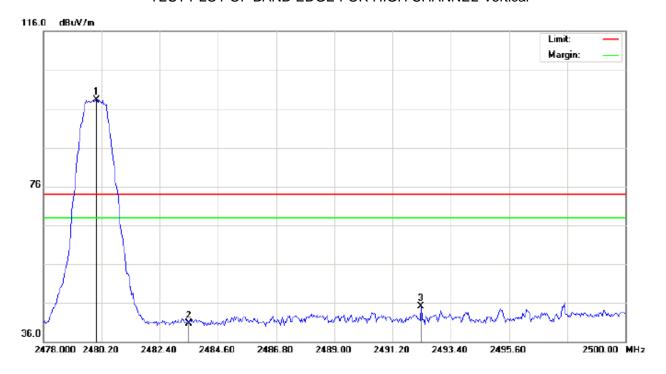

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: TT-SK06

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.80	10.41	98.21	74.00	24.21	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2492.263	34.77	10.42	45.19	74.00	-28.81	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 50 of 73


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

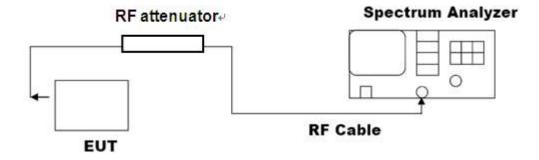

10.3. LIMITS AND MEASUREMENT RESULTS

FOR TRADITIONAL BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL										
Applicable Limite	Measurement Result									
Applicable Limits	Test Da	Test Data (MHz)								
	Low Channel	0.916	PASS							
N/A	Middle Channel	0.915	PASS							
	High Channel	0.916	PASS							

Page 51 of 73

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 52 of 73


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

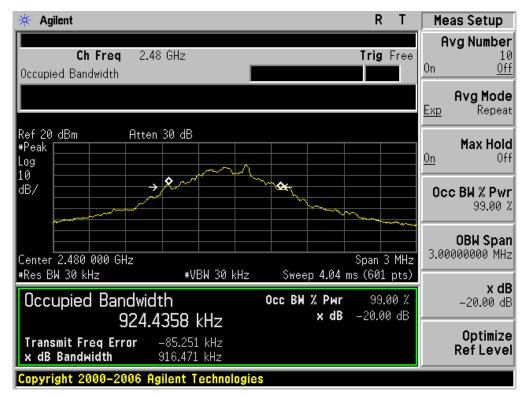

Report No.: AGC01892150601FE03 Page 53 of 73


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL										
Applicable Limite	Measurement Result									
Applicable Limits	Test Da	Criteria								
	Low Channel	1.268	PASS							
N/A	Middle Channel	1.282	PASS							
	High Channel	1.273	PASS							

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

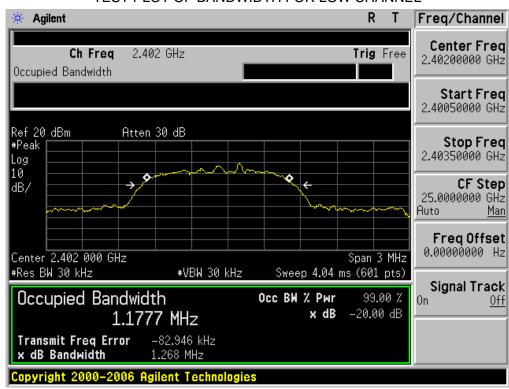


Page 54 of 73

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

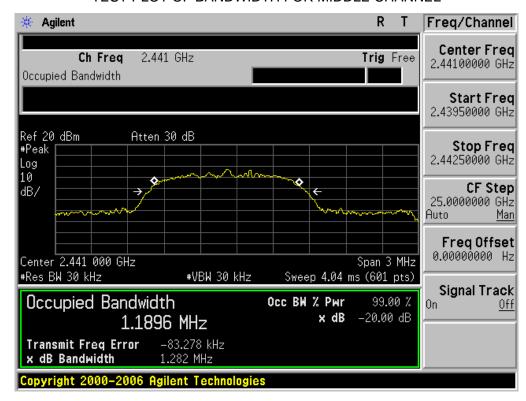


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

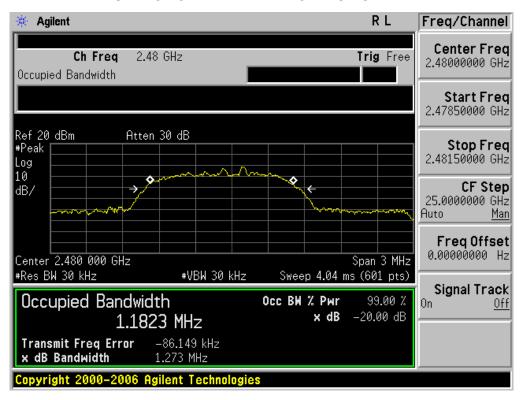

Report No.: AGC01892150601FE03 Page 55 of 73


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL										
Applicable Limite	Measurement Result									
Applicable Limits	Test Da	Criteria								
	Low Channel	1.289	PASS							
N/A	Middle Channel	1.287	PASS							
	High Channel	1.279	PASS							

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

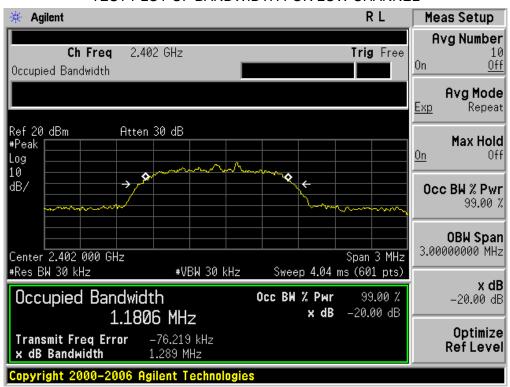


Page 56 of 73

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

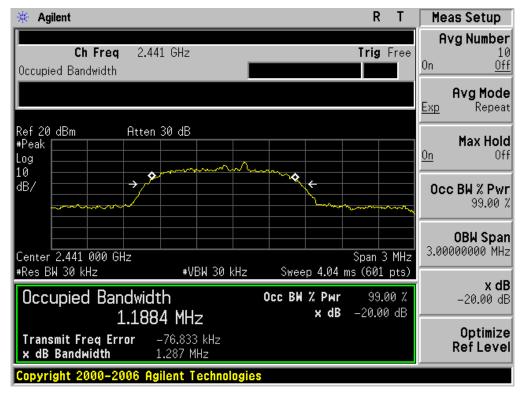

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

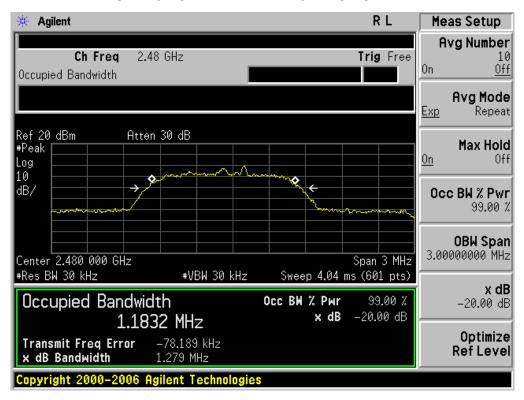


Page 57 of 73

FOR BLE


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL										
Applicable Limite	Measurement Result									
Applicable Limits	Test Da	Criteria								
	Low Channel	1.201	PASS							
N/A	Middle Channel	1.212	PASS							
	High Channel	1.212	PASS							

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

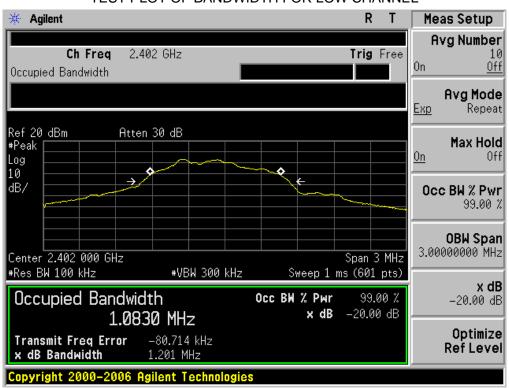


Page 58 of 73

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

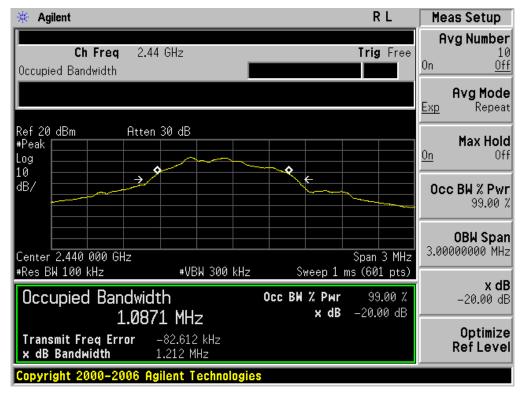

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

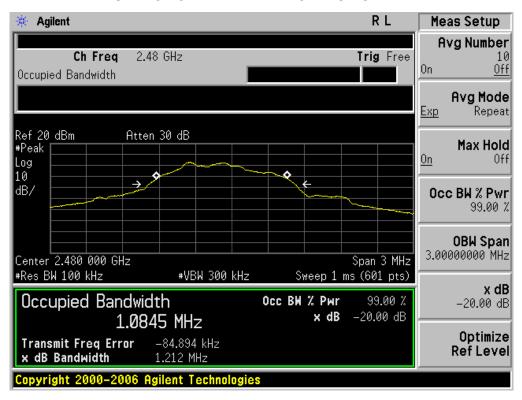

Page 59 of 73

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

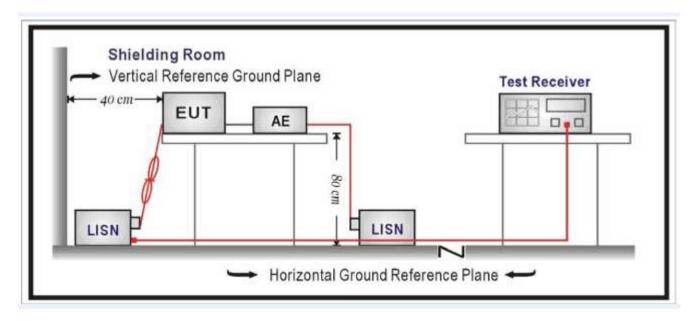

Page 60 of 73

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 53.7 %

Page 61 of 73

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST FOR TRADITIONAL BLUETOOTH

Line Conducted Emission Test Line 1-L

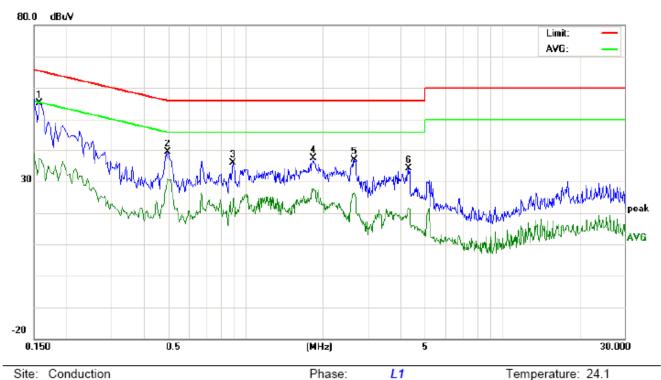

Site: Conduction

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: BT Link with charging

Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	44.87		27.16	10.17	55.04		37.33	65.56	55.56	-10.52	-18.23	Р	
2	0.4980	29.01		20.48	10.40	39.41		30.88	56.03	46.03	-16.62	-15.15	Р	
3	0.8940	25.57		12.32	10.40	35.97		22.72	56.00	46.00	-20.03	-23.28	Р	
4	1.8340	27.15		17.11	10.27	37.42		27.38	56.00	46.00	-18.58	-18.62	Р	
5	2.6580	26.45		16.02	10.47	36.92		26.49	56.00	46.00	-19.08	-19.51	Р	
6	4.3299	23.84		11.41	10.28	34.12		21.69	56.00	46.00	-21.88	-24.31	Р	

Power:

Humidity: 53.7 %

Page 62 of 73

Line Conducted Emission Test Line 2-N

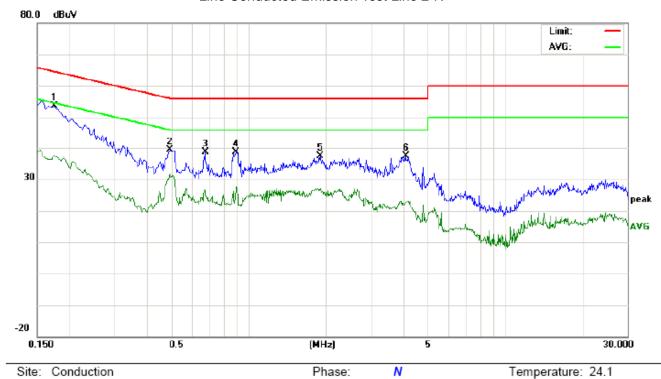

Site: Conduction Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: BT Link with charging

Note:

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	43.38		27.38	10.19	53.57		37.57	64.76	54.76	-11.19	-17.19	Р	
2	0.4940	28.98		21.27	10.40	39.38		31.67	56.10	46.10	-16.72	-14.43	Р	
3	0.6780	28.20		16.40	10.34	38.54		26.74	56.00	46.00	-17.46	-19.26	Р	
4	0.8980	28.19		17.10	10.41	38.60		27.51	56.00	46.00	-17.40	-18.49	Р	
5	1.9060	27.08		16.83	10.25	37.33		27.08	56.00	46.00	-18.67	-18.92	Р	
6	4.1099	27.00		12.35	10.38	37.38		22.73	56.00	46.00	-18.62	-23.27	Р	


Power:

Humidity: 53.7 %

Page 63 of 73

FOR BLE

Line Conducted Emission Test Line 1-L

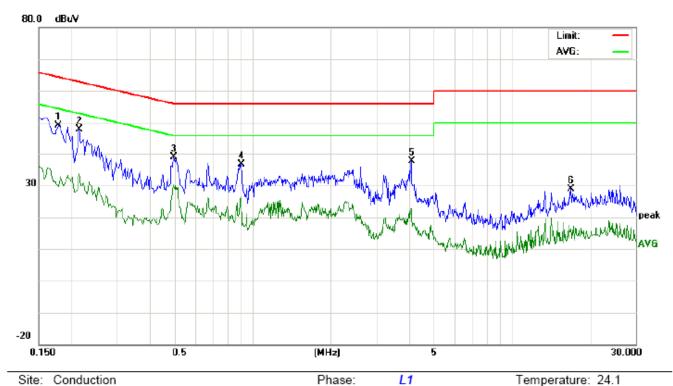

Power:

Site. Conduction

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker


M/N: TT-SK06

Mode: BT Link with charging

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	38.85		19.49	10.19	49.04		29.68	64.57	54.57	-15.53	-24.89	Р	
2	0.2140	37.67		23.45	10.23	47.90		33.68	63.04	53.04	-15.14	-19.36	Р	
3	0.4980	28.60		19.32	10.40	39.00		29.72	56.03	46.03	-17.03	-16.31	Р	
4	0.9060	26.21		13.14	10.41	36.62		23.55	56.00	46.00	-19.38	-22.45	Р	
5	4.1060	27.14		12.13	10.38	37.52		22.51	56.00	46.00	-18.48	-23.49	Р	
6	16.8500	18.78		6.20	10.13	28.91		16.33	60.00	50.00	-31.09	-33.67	Р	

Page 64 of 73

Line Conducted Emission Test Line 2-N

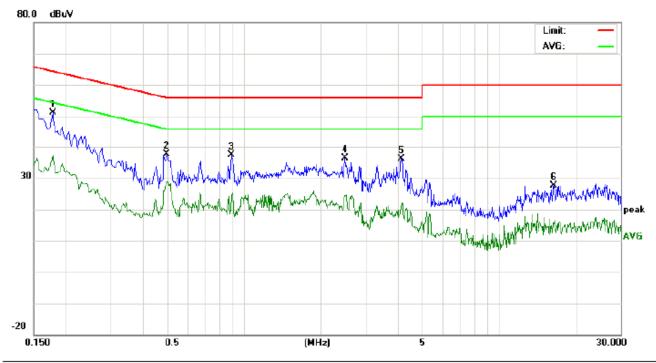

Site: Conduction Phase: N Temperature: 24.1 Limit: FCC Class B Conduction(QP) Power: Humidity: 53.7 %

EUT: Bluetooth Speaker

M/N: TT-SK06

Mode: BT Link with charging

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	40.82		26.96	10.19	51.01		37.15	64.57	54.57	-13.56	-17.42	Р	
2	0.4980	27.23		18.44	10.40	37.63		28.84	56.03	46.03	-18.40	-17.19	Р	
3	0.8980	26.99		13.75	10.41	37.40		24.16	56.00	46.00	-18.60	-21.84	Р	
4	2.4900	25.87		14.02	10.43	36.30		24.45	56.00	46.00	-19.70	-21.55	Р	
5	4.1499	25.84		10.55	10.36	36.20		20.91	56.00	46.00	-19.80	-25.09	Р	
6	16.4539	17.42		5.20	10.12	27.54		15.32	60.00	50.00	-32.46	-34.68	Р	

Page 65 of 73


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP




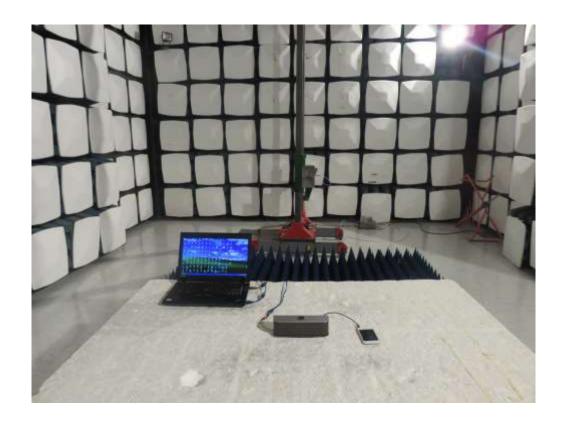


Page 67 of 73

APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT

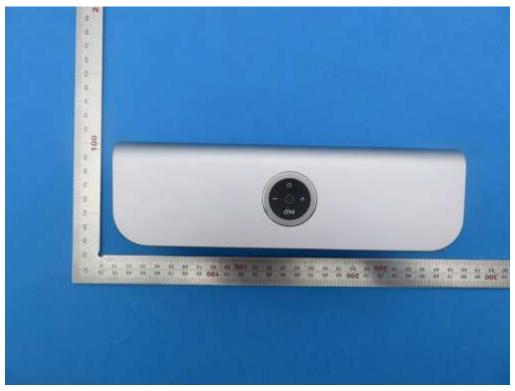

BOTTOM VIEW OF EUT

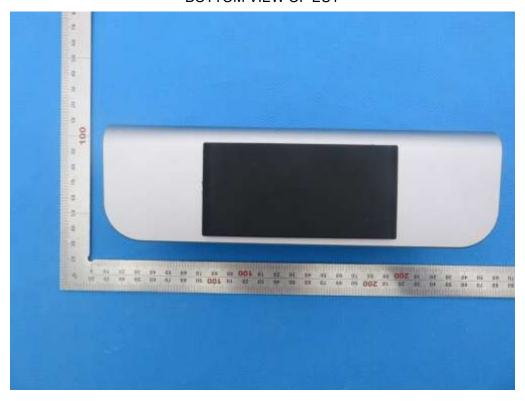

FRONT VIEW OF EUT

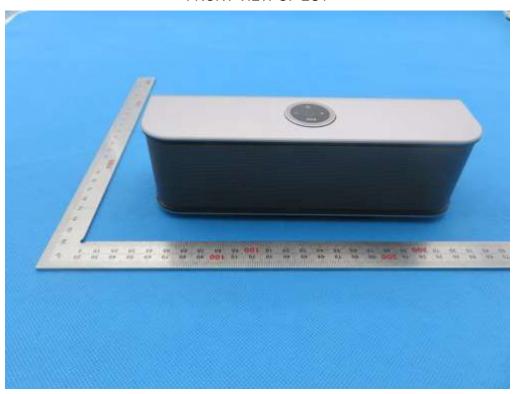


BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT

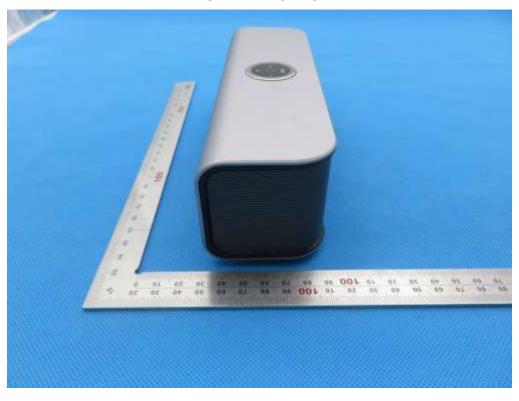

OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2

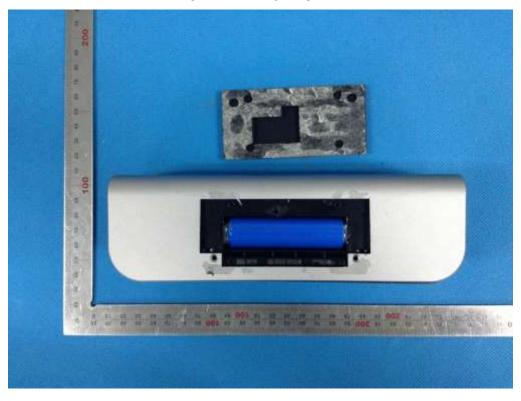


Report No.: AGC01892150601FE03 Page 71 of 73


OPEN VIEW OF EUT-3

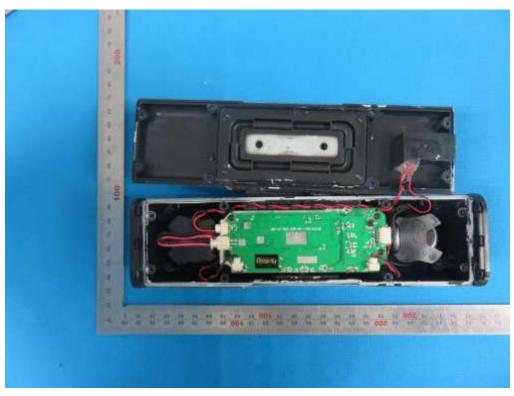

INTERNAL VIEW OF EUT-1

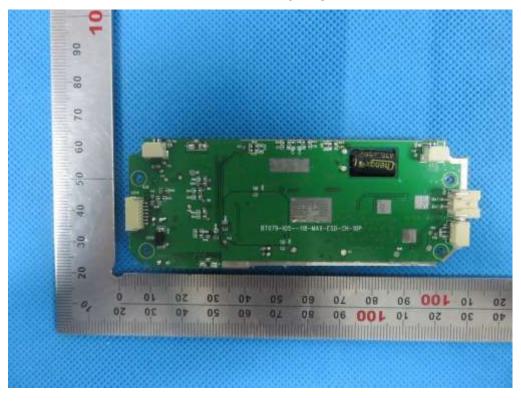


INTERNAL VIEW OF EUT-2

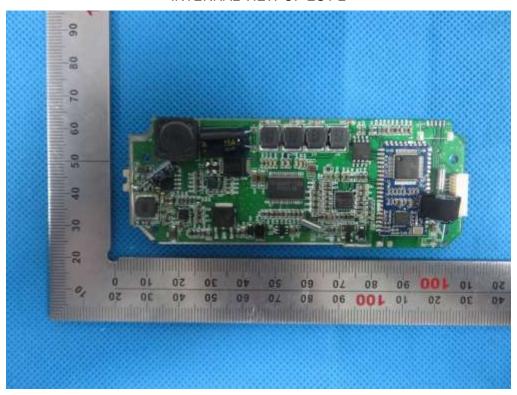


INTERNAL VIEW OF EUT-3



INTERNAL VIEW OF EUT-4

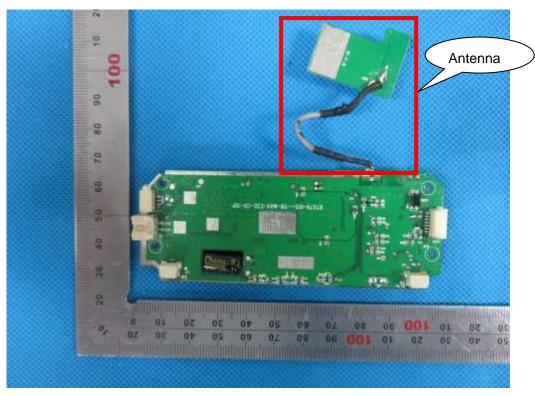

INTERNAL VIEW OF EUT-5

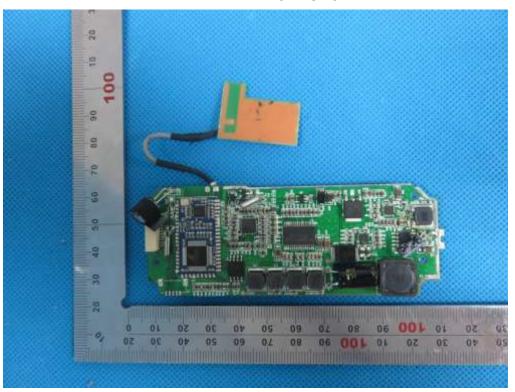

----END OF REPORT----