



Channel 6 (2437MHz)

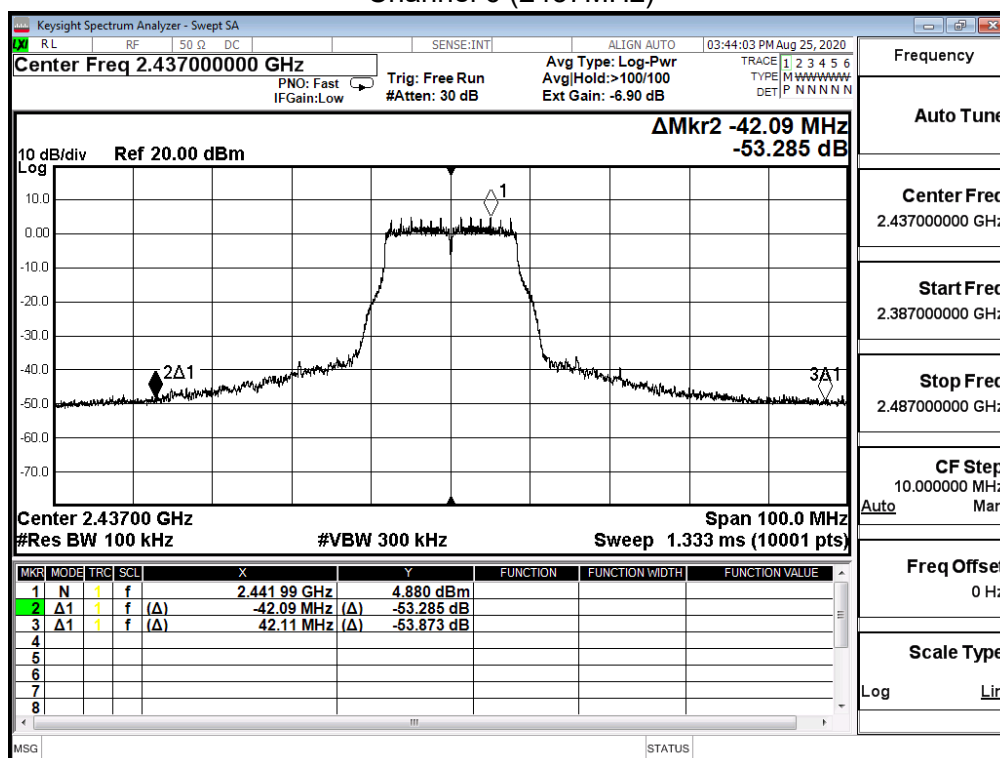


Channel 11 (2462MHz)

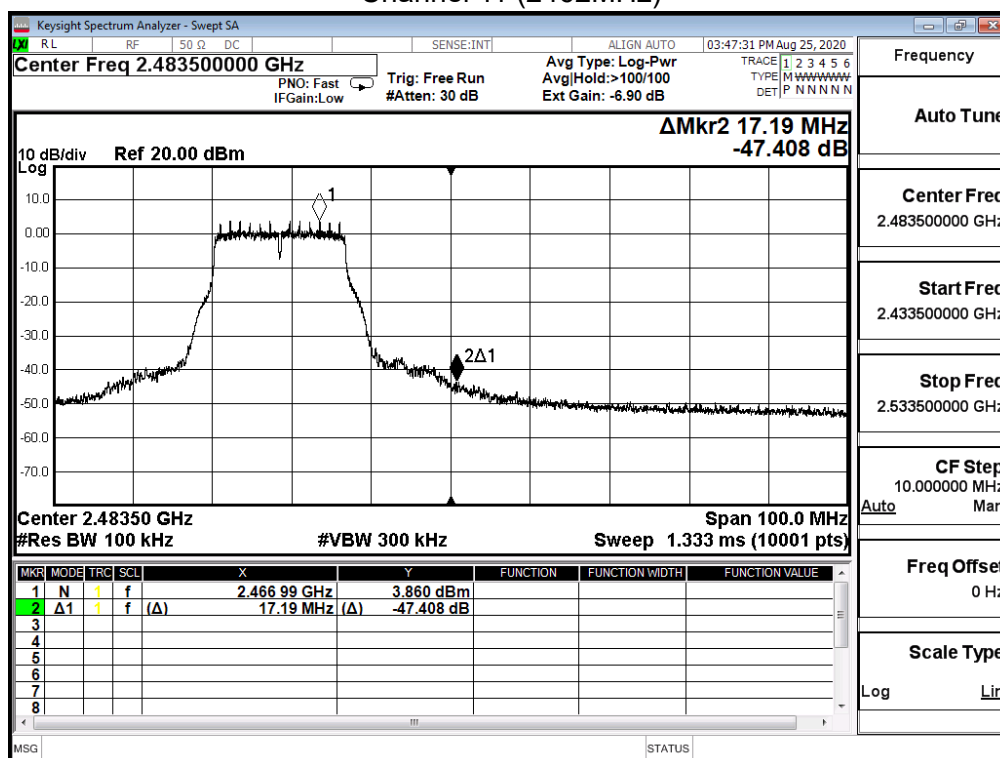


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: SISO Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11g (ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
1	2412	42.276	≥ 30	Pass
6	2437	49.372	≥ 30	Pass
11	2462	48.845	≥ 30	Pass


Channel 1 (2412MHz)

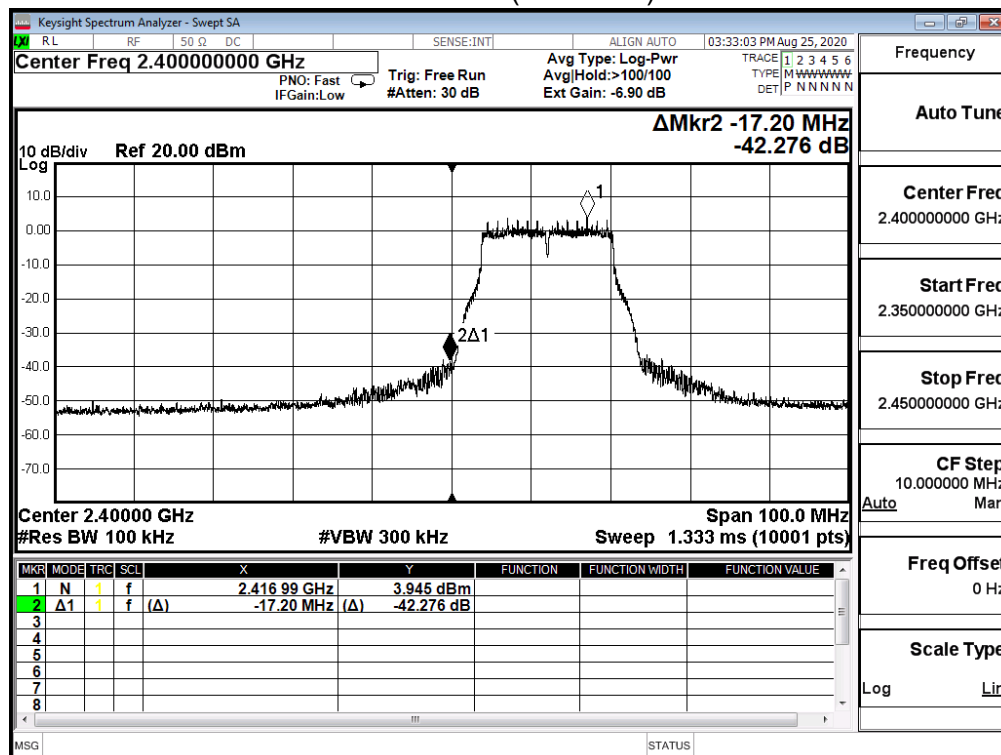

Channel 6 (2437MHz)

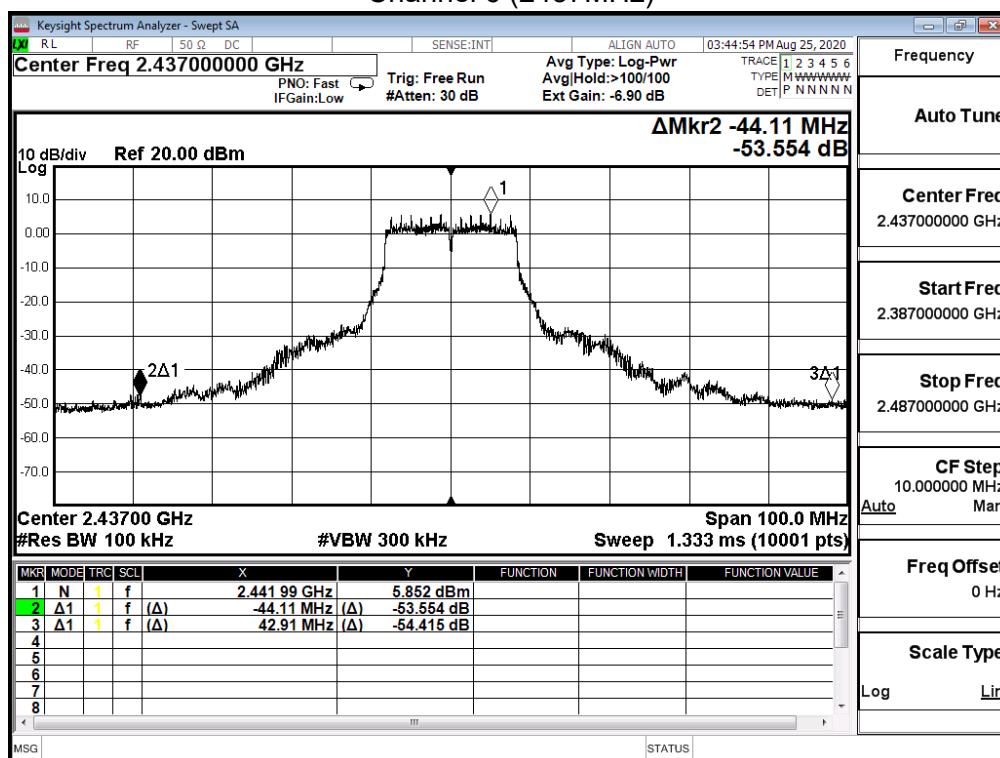


Channel 11 (2462MHz)

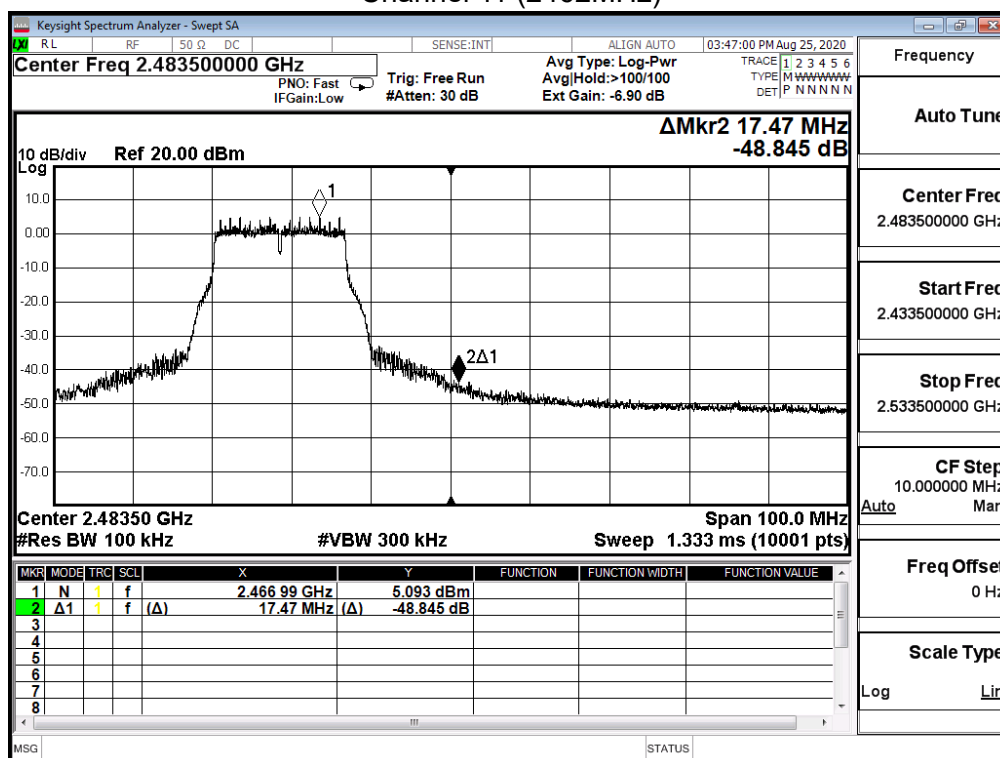


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11n(20M)(ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
1	2412	32.834	≥ 30	Pass
6	2437	47.169	≥ 30	Pass
11	2462	46.616	≥ 30	Pass


Channel 1 (2412MHz)

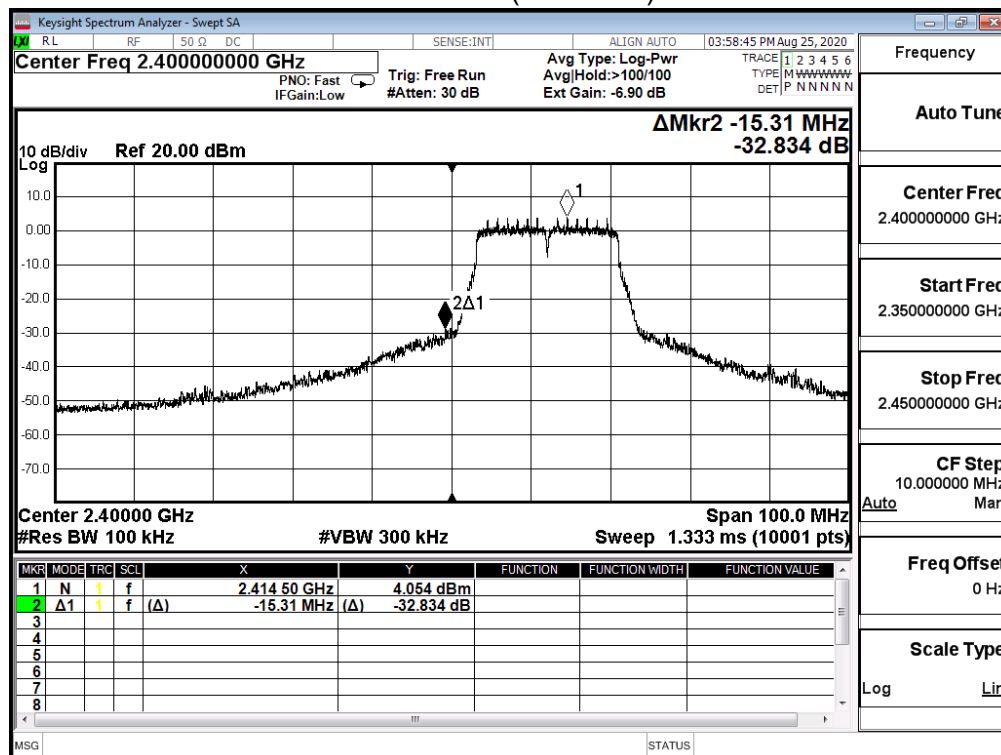

Channel 6 (2437MHz)

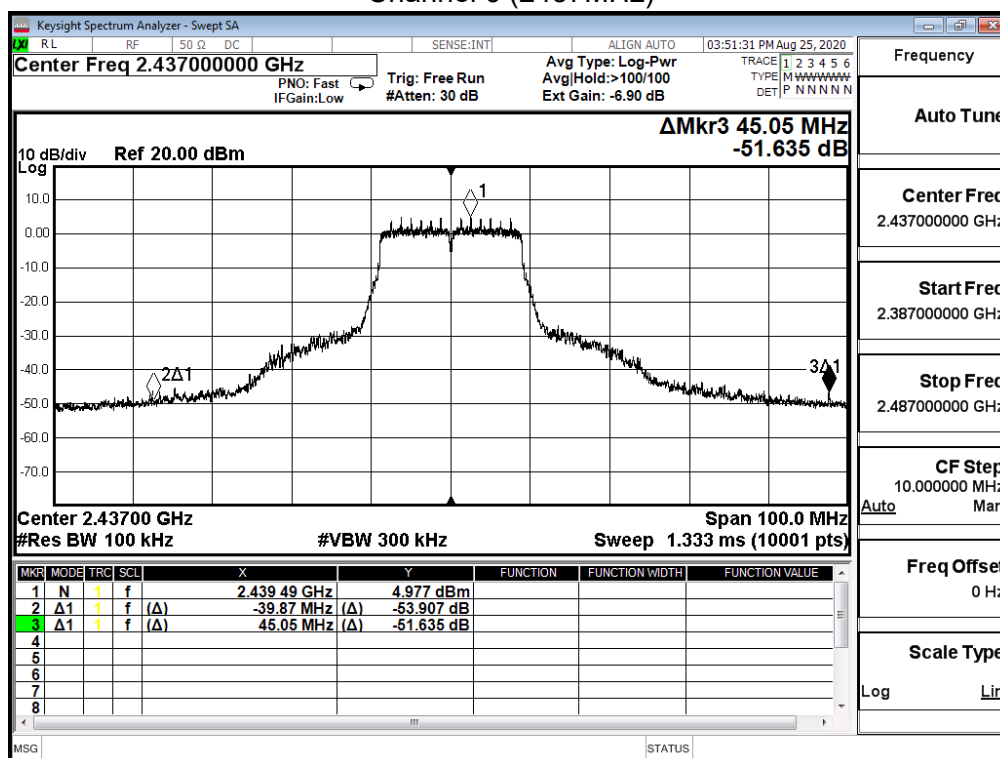


Channel 11 (2462MHz)

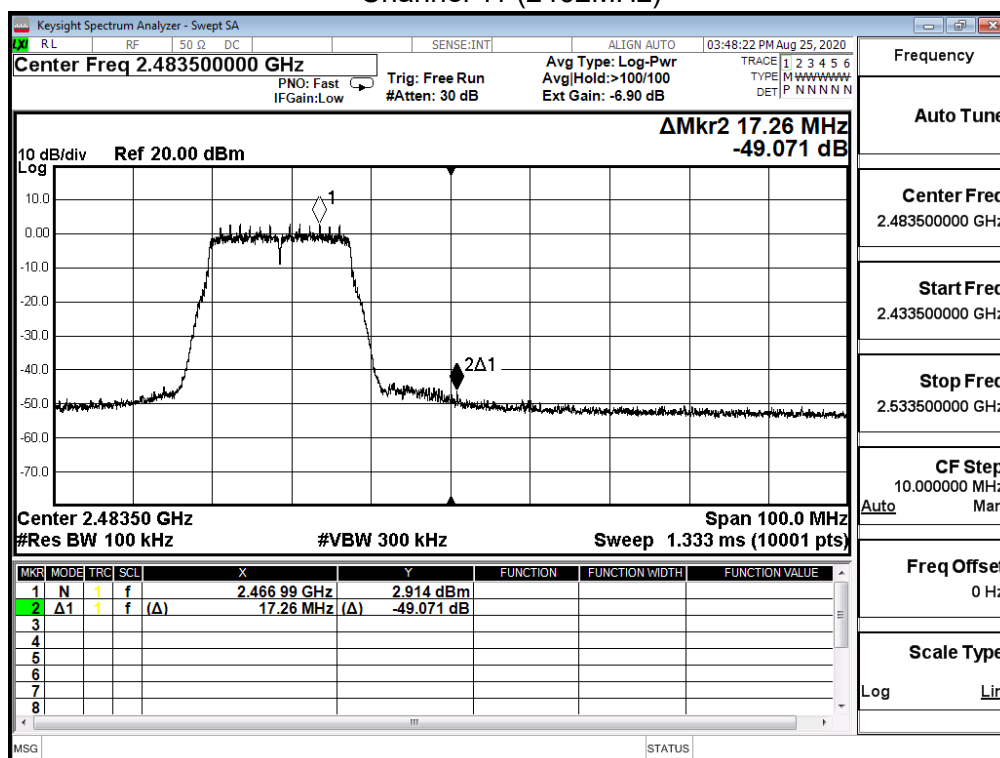


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11n(20M)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
1	2412	44.503	≥ 30	Pass
6	2437	52.427	≥ 30	Pass
11	2462	47.866	≥ 30	Pass


Channel 1 (2412MHz)

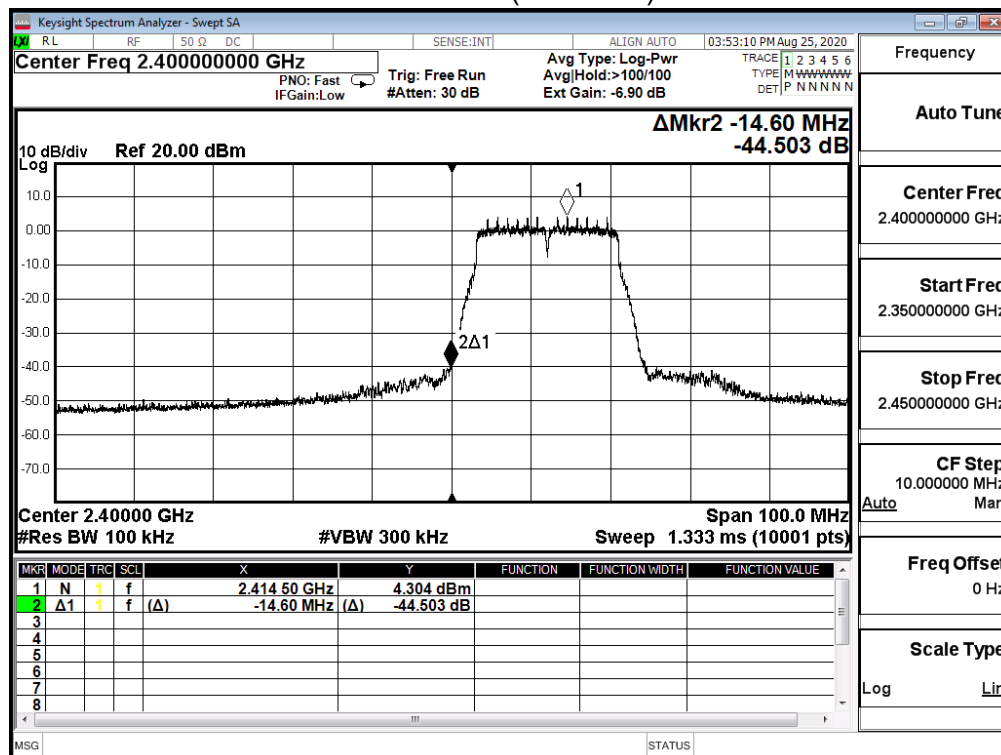

Channel 6 (2437MHz)

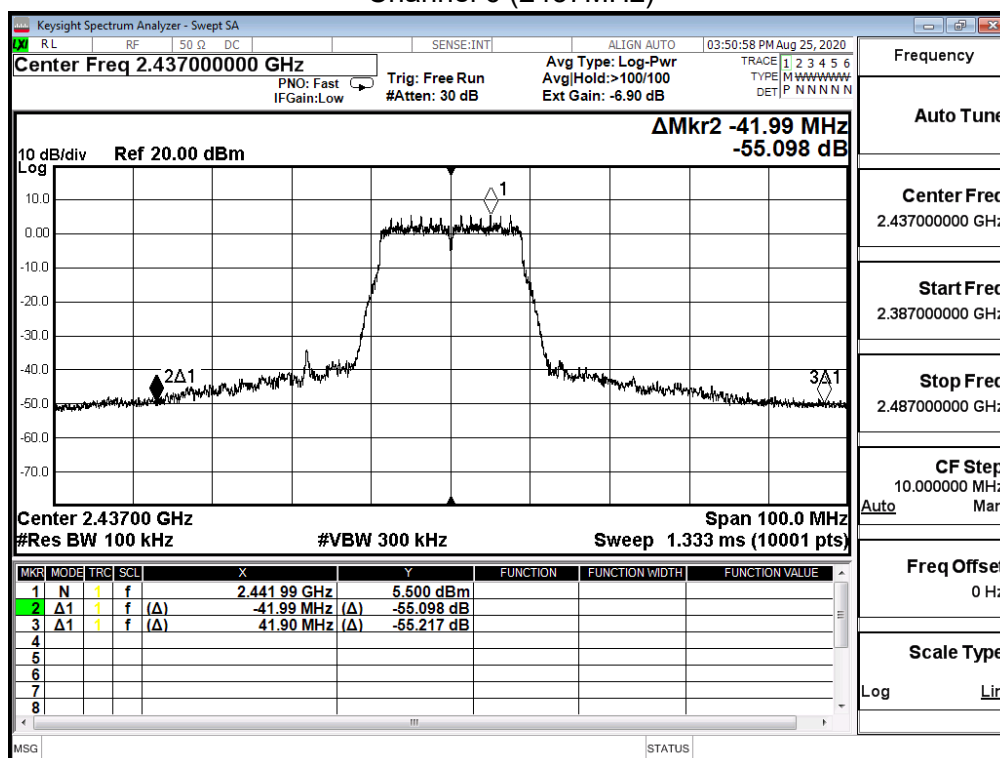


Channel 11 (2462MHz)

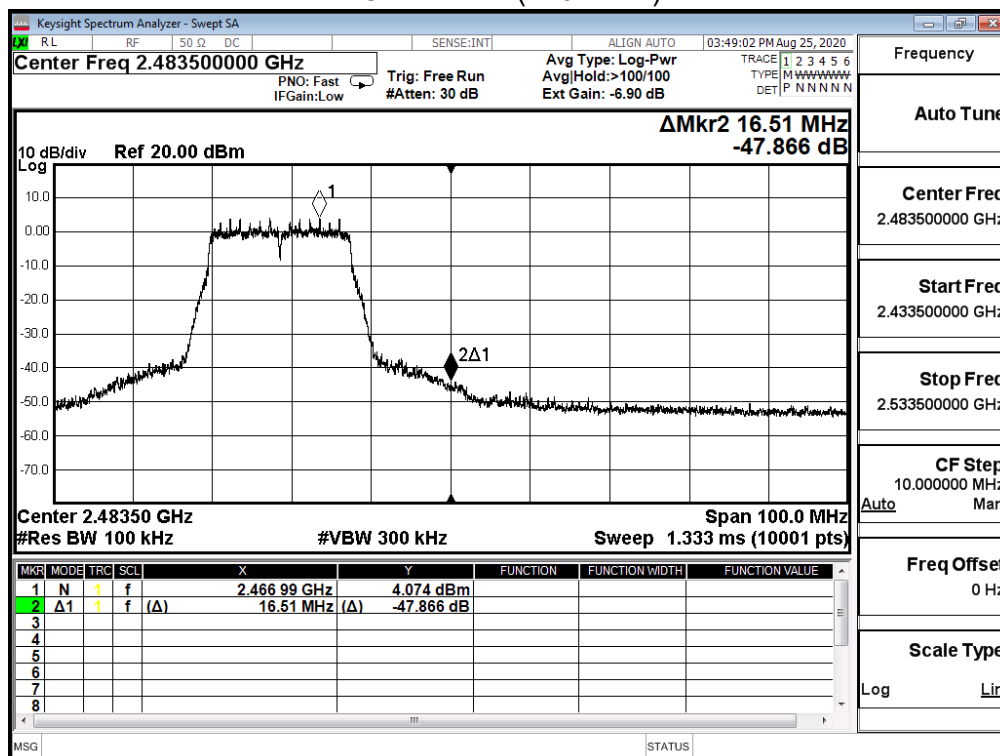


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11n(40M)(ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	38.352	≥ 30	Pass
6	2437	40.453	≥ 30	Pass
9	2452	36.802	≥ 30	Pass


Channel 3 (2422MHz)

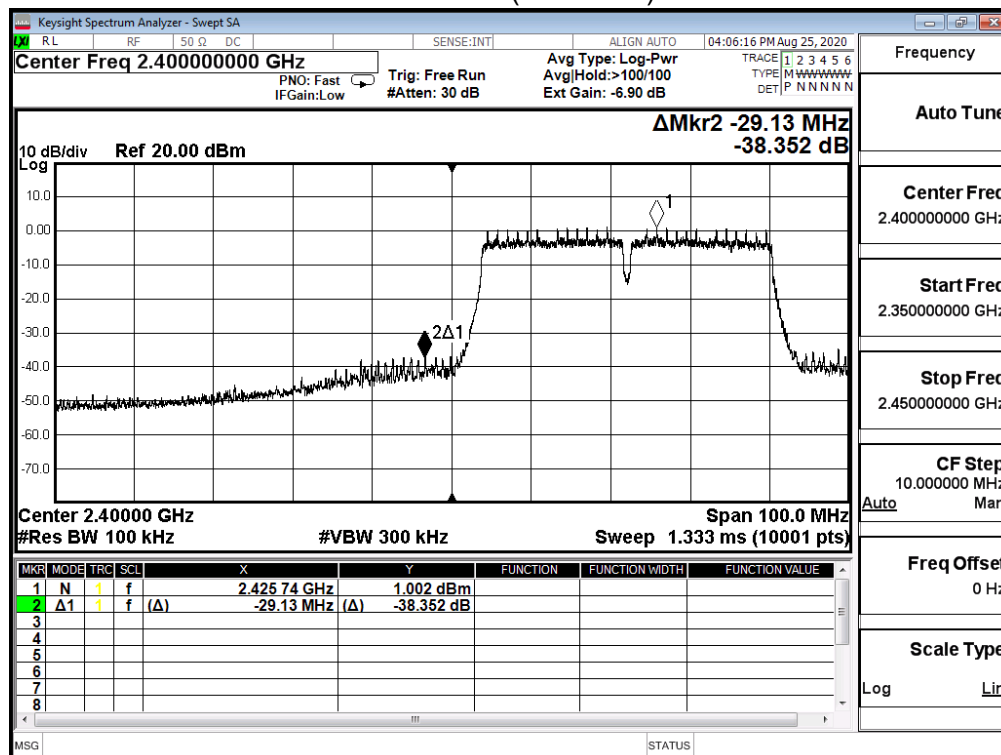

Channel 6 (2437MHz)

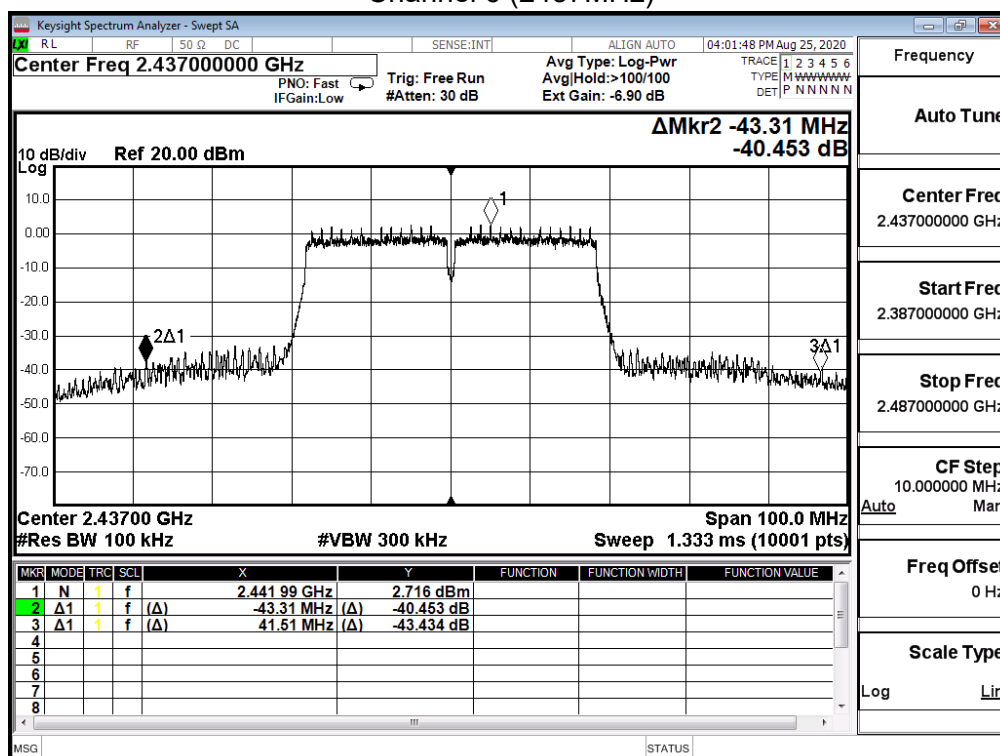


Channel 9 (2452MHz)

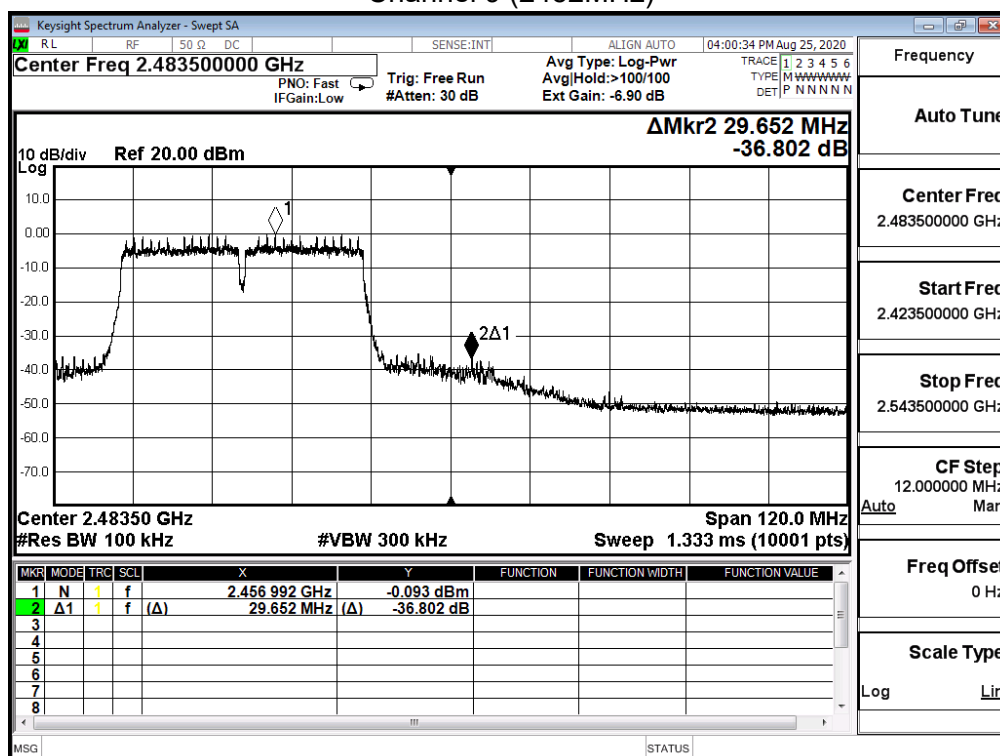


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11n(40M)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	44.029	≥ 30	Pass
6	2437	33.516	≥ 30	Pass
9	2452	45.464	≥ 30	Pass


Channel 3 (2422MHz)

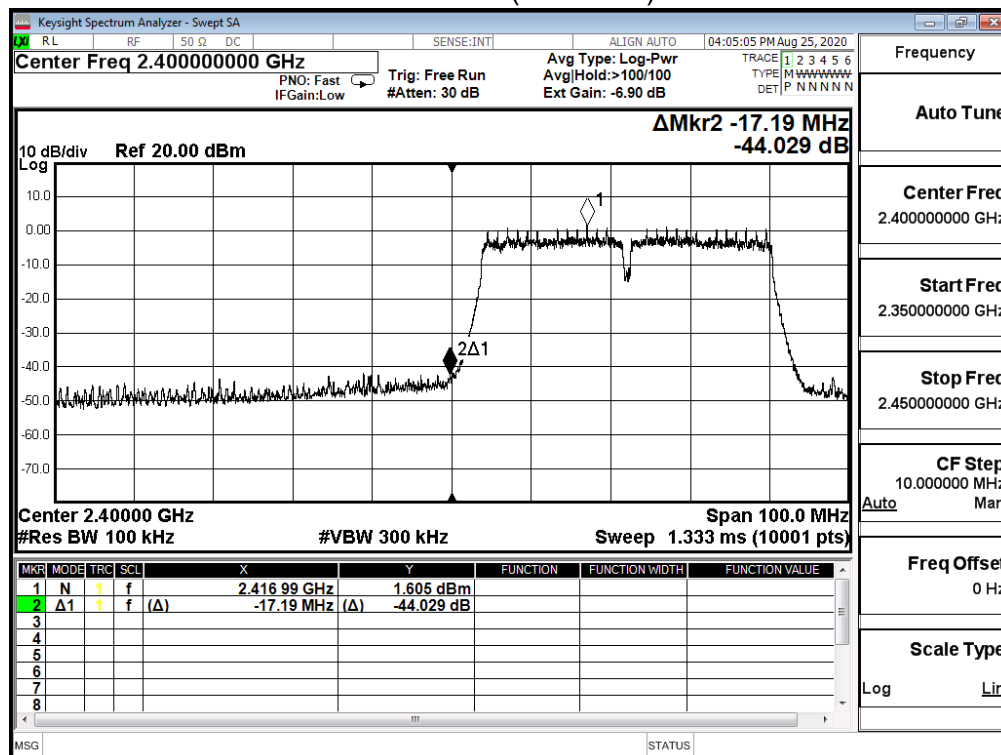

Channel 6 (2437MHz)

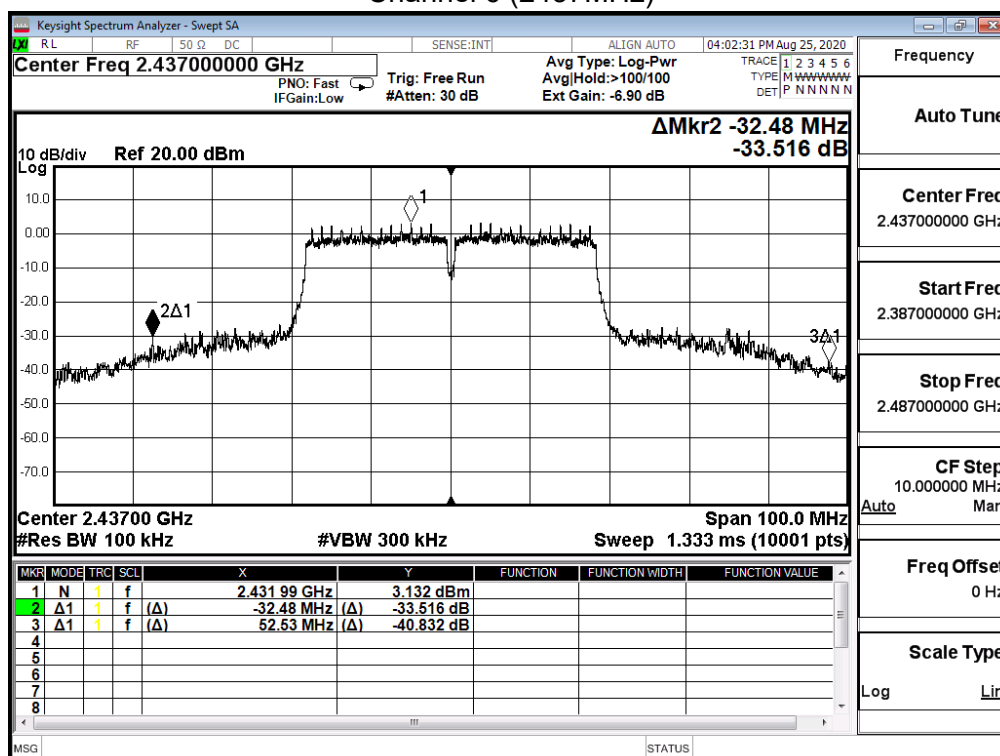

Channel 9 (2452MHz)

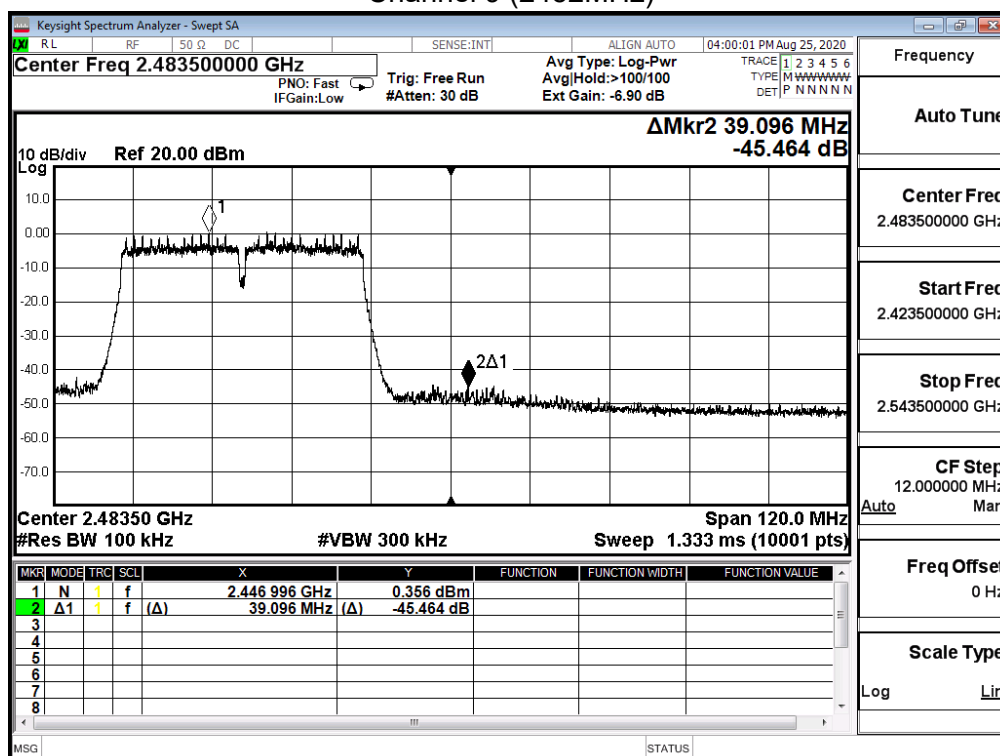


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%


IEEE 802.11ax(20M)(ANT 0)

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
1	2412	30.922	≥ 30	Pass
6	2437	50.387	≥ 30	Pass
11	2462	47.123	≥ 30	Pass


Channel 1 (2412MHz)

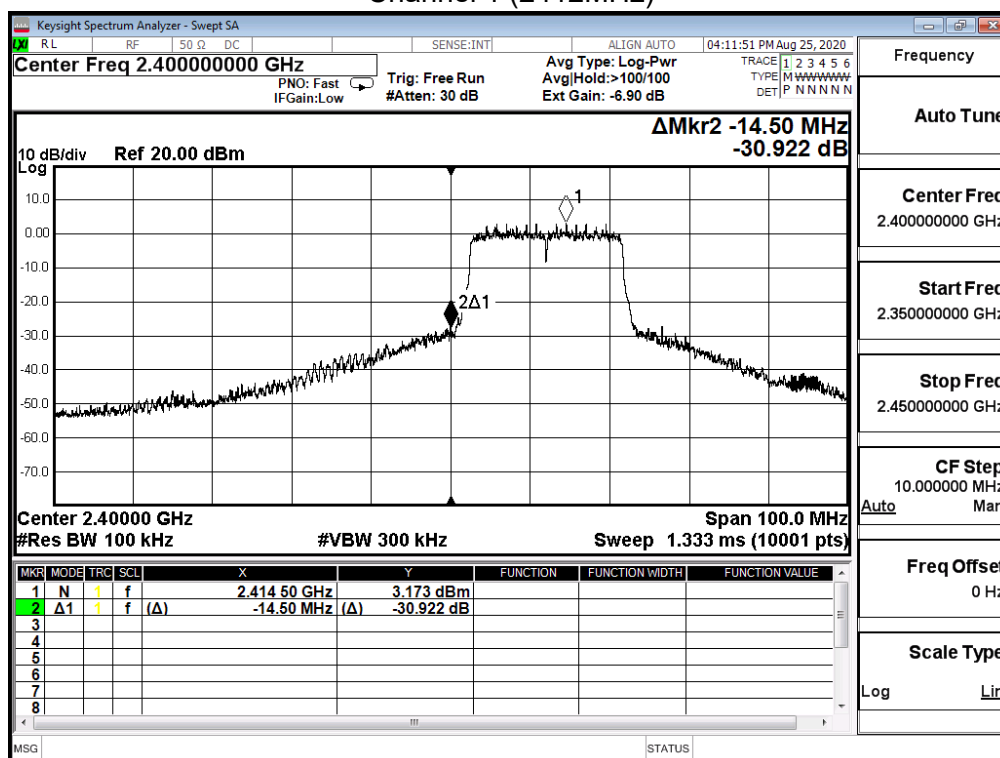

Channel 6 (2437MHz)

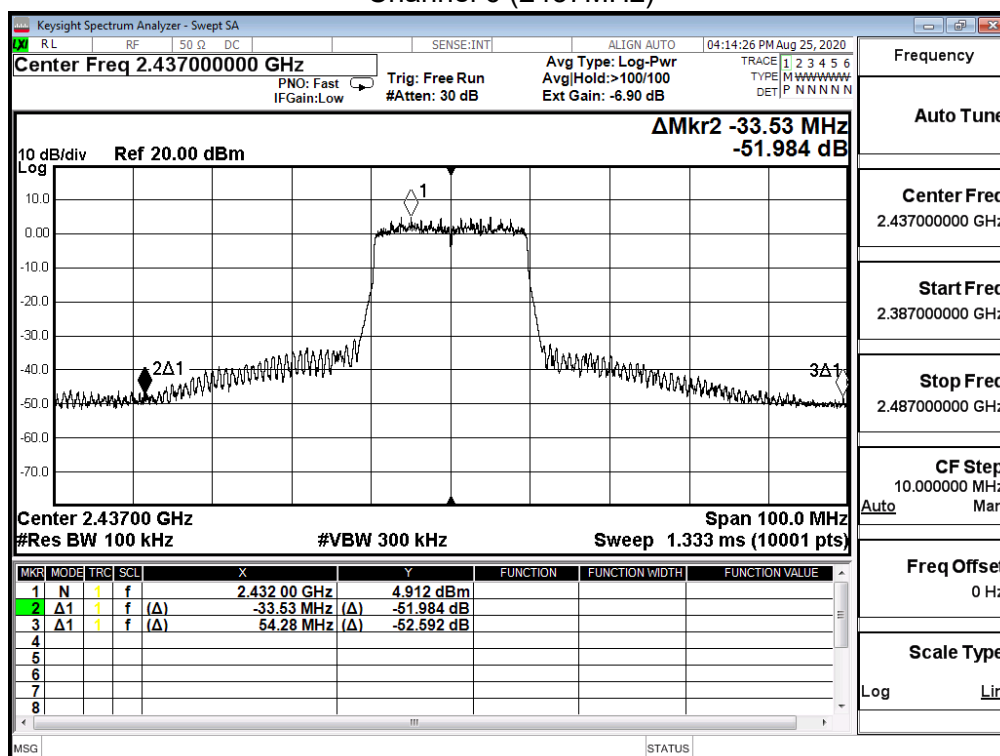


Channel 11 (2462MHz)

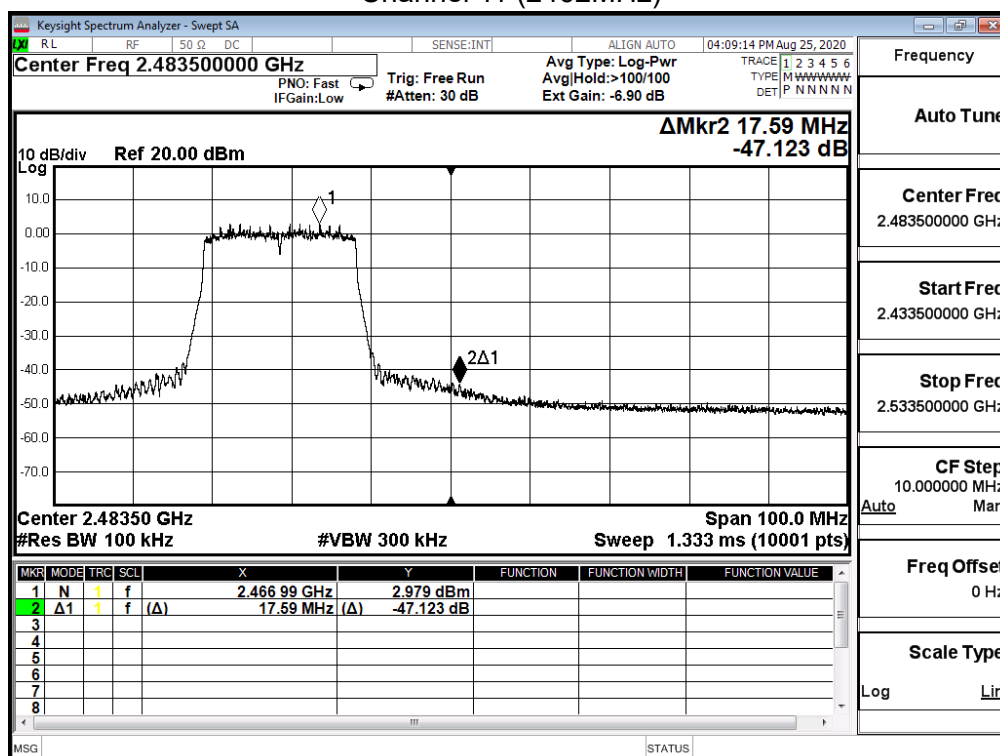


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11ax(20M)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
1	2412	42.935	≥ 30	Pass
6	2437	48.739	≥ 30	Pass
11	2462	44.279	≥ 30	Pass


Channel 1 (2412MHz)

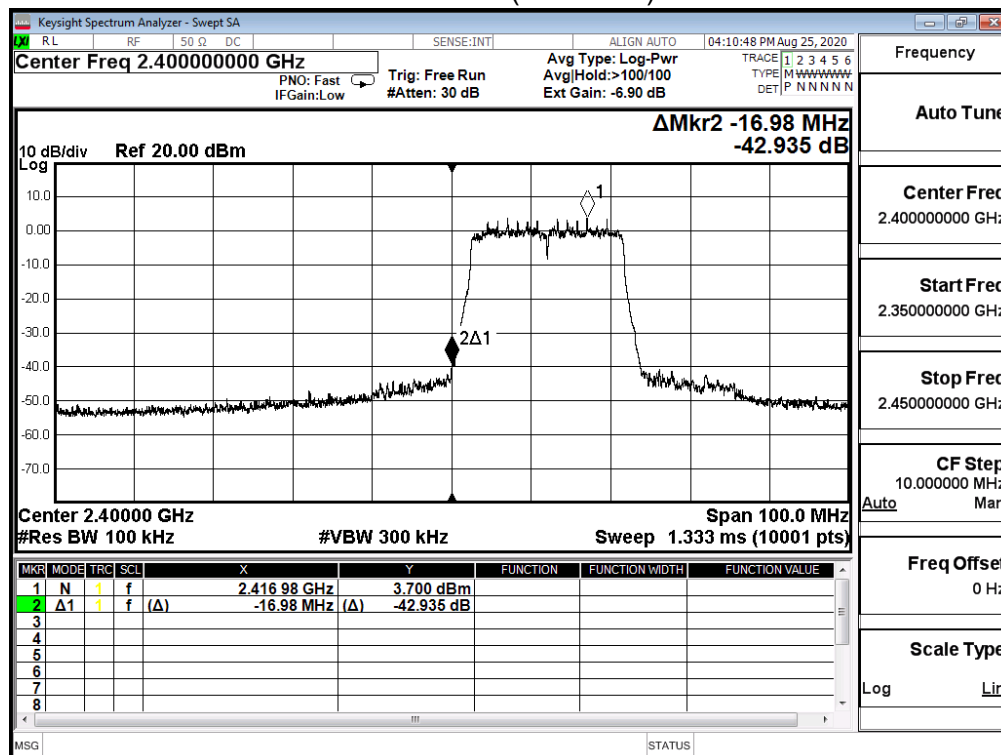

Channel 6 (2437MHz)

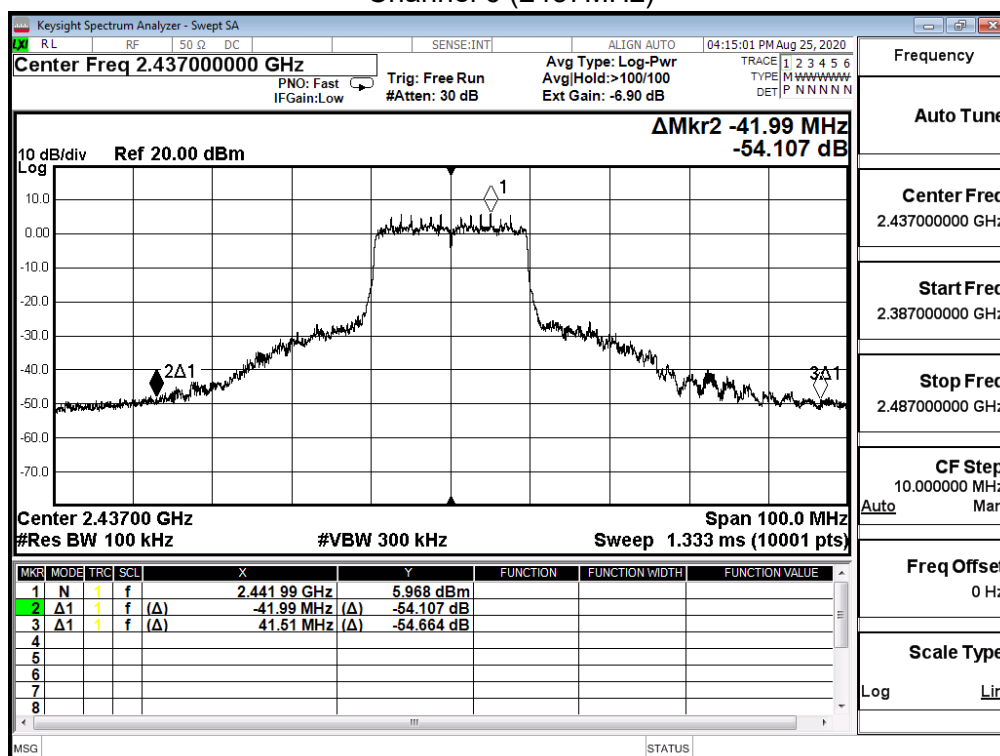


Channel 11 (2462MHz)

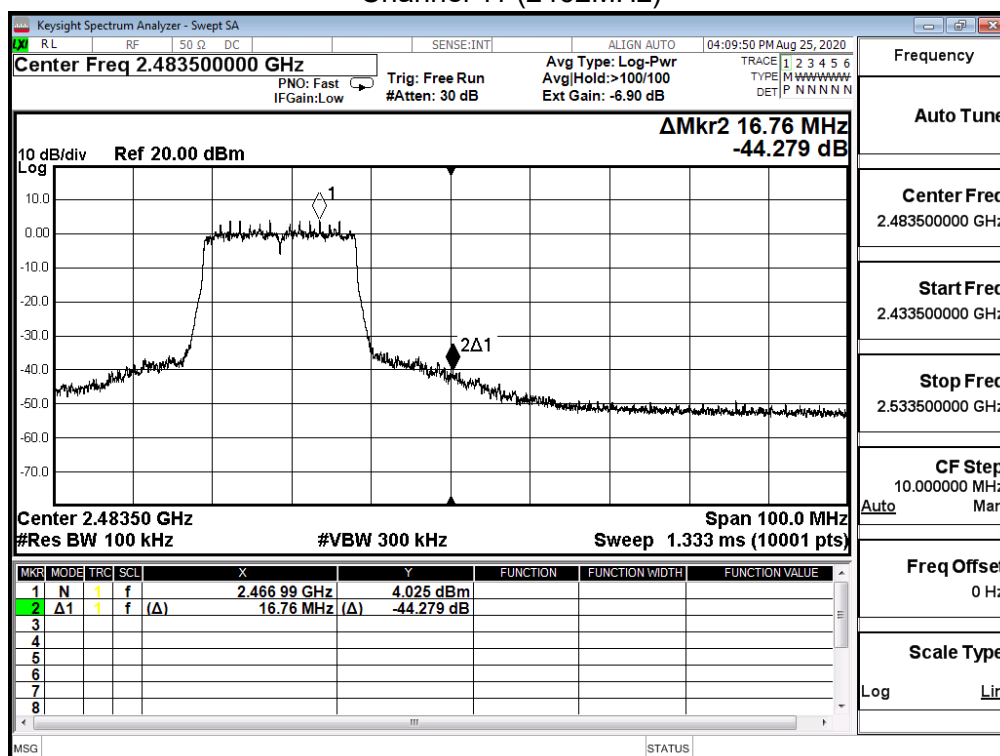


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11ax(40M)(ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	42.362	≥ 30	Pass
6	2437	44.702	≥ 30	Pass
9	2452	36.422	≥ 30	Pass


Channel 3 (2422MHz)

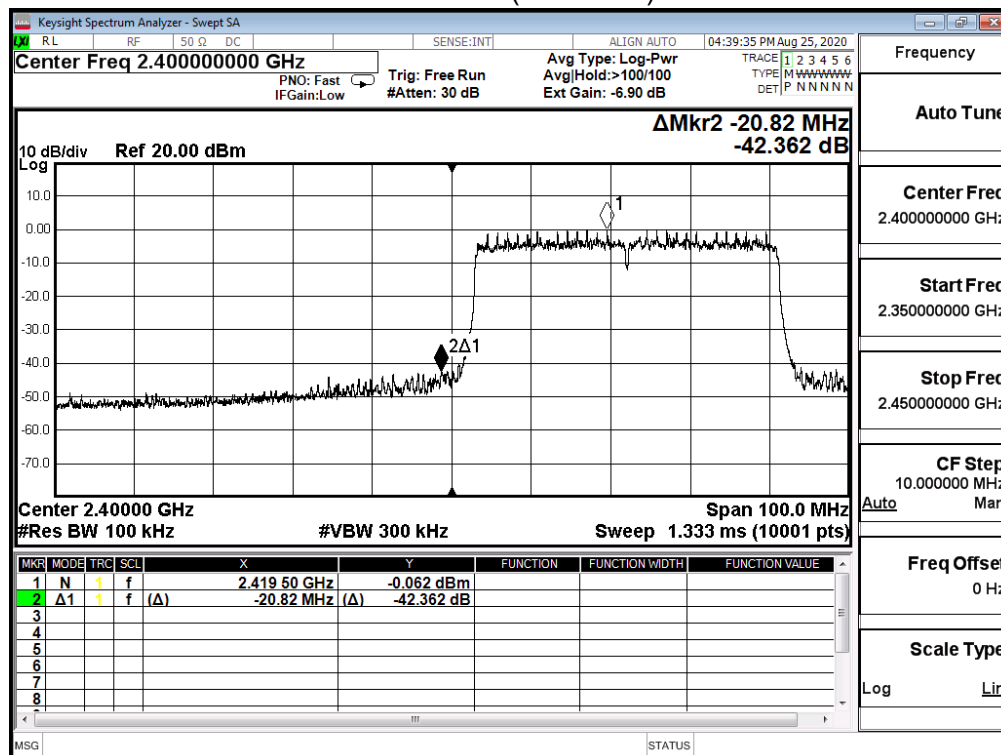

Channel 6 (2437MHz)

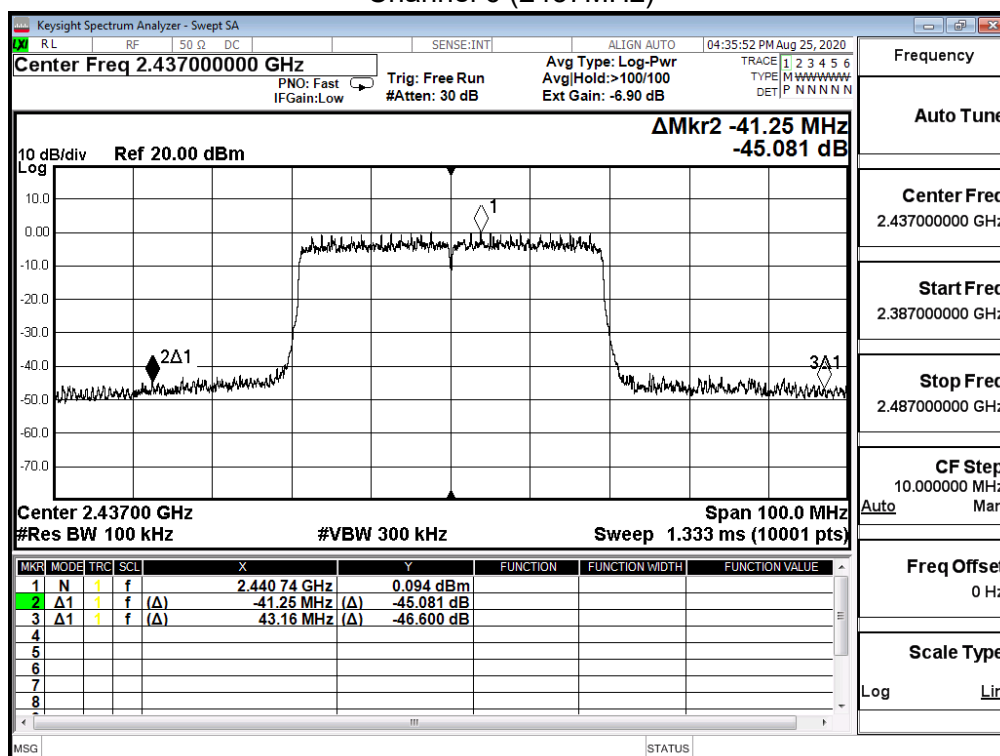


Channel 9 (2452MHz)

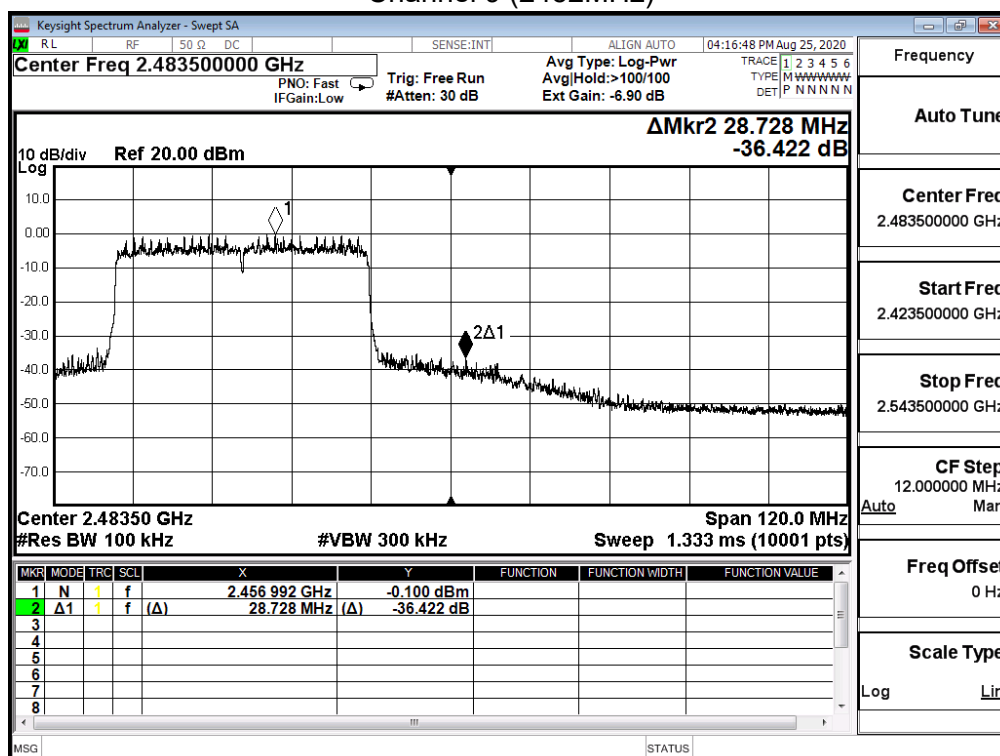


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%

IEEE 802.11ax(40M)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	40.168	≥ 30	Pass
6	2437	40.590	≥ 30	Pass
9	2452	42.006	≥ 30	Pass


Channel 3 (2422MHz)

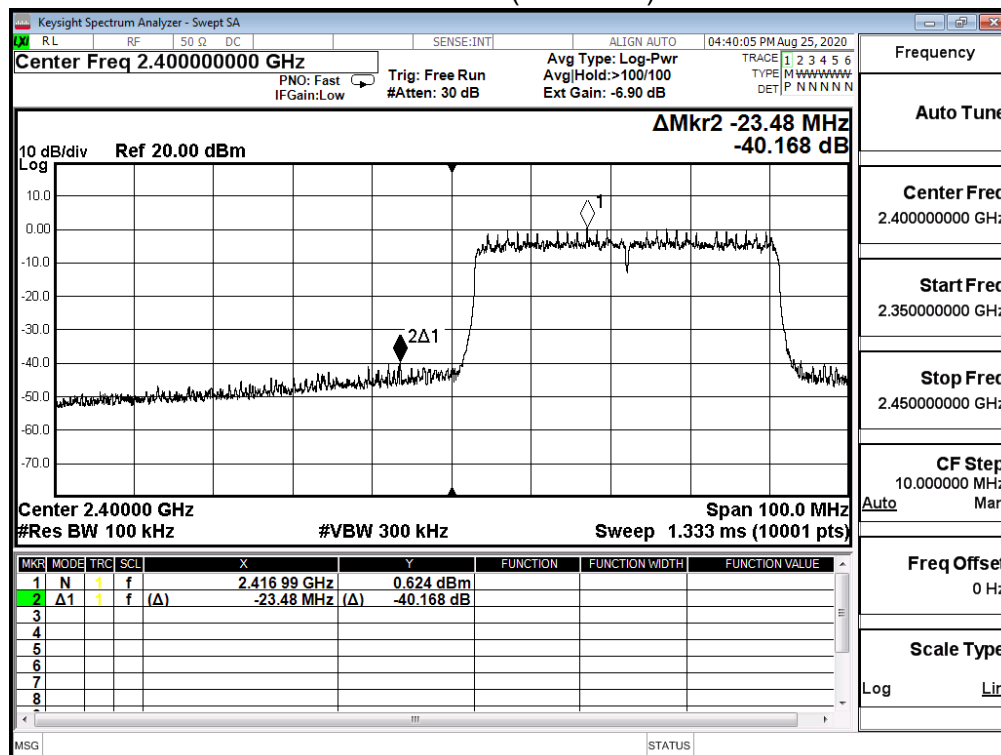

Channel 6 (2437MHz)

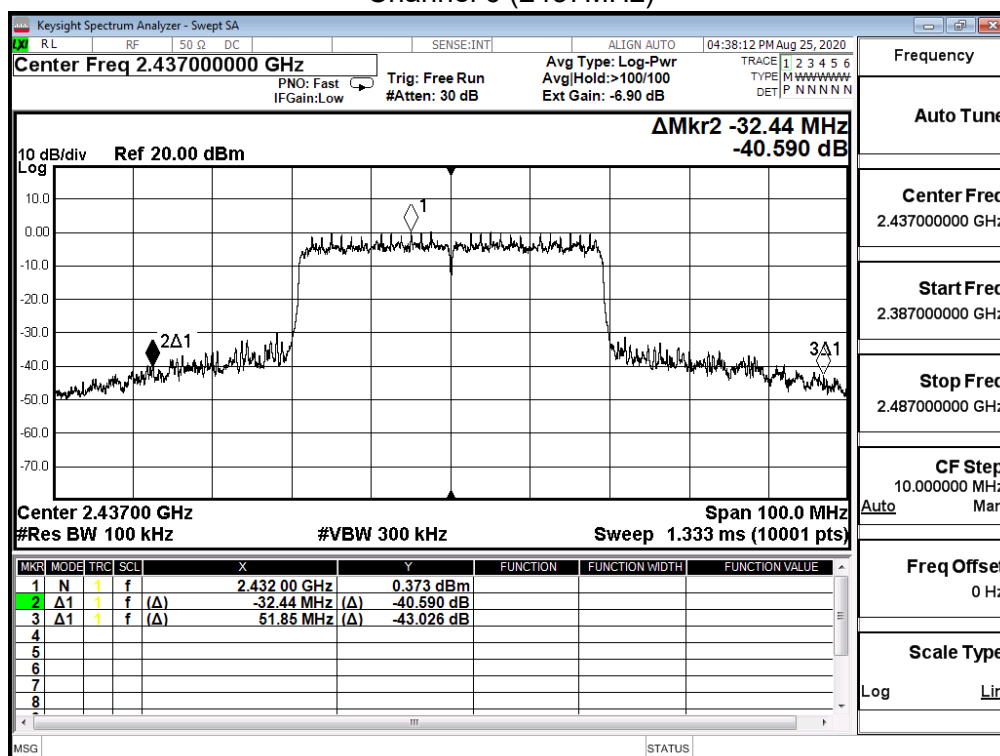


Channel 9 (2452MHz)

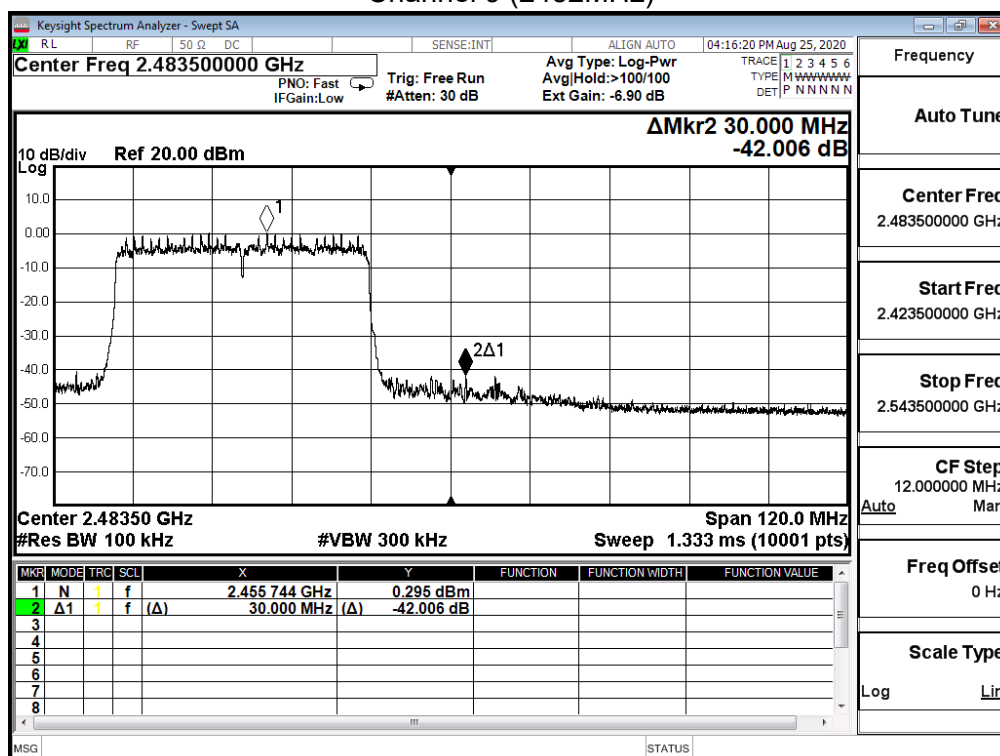


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: SISO Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%


2412MHz (30MHz-25GHz)-11b_Ant 0

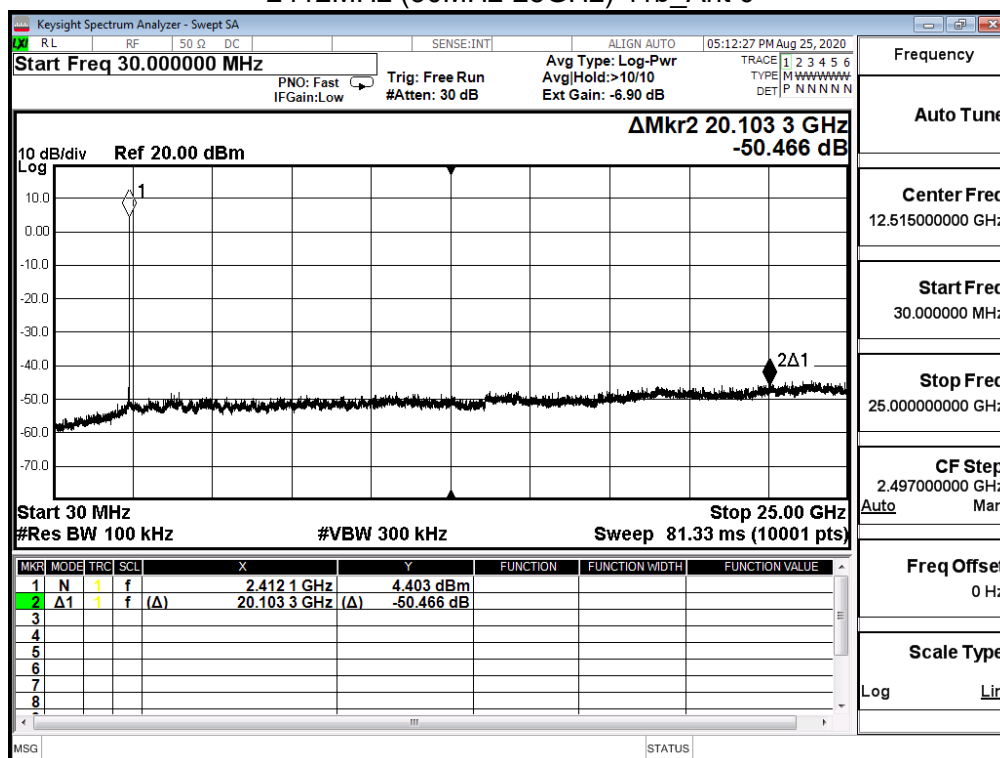


2437MHz (30MHz-25GHz)- 11b_Ant 0

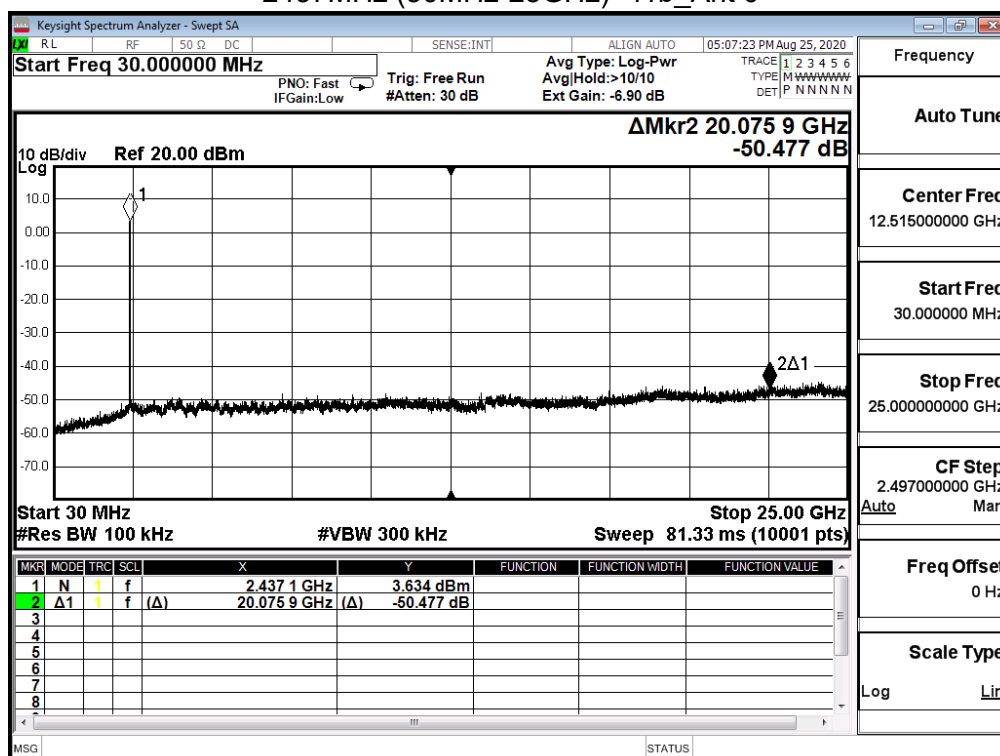


2462MHz (30MHz-25GHz)-11b_Ant 0

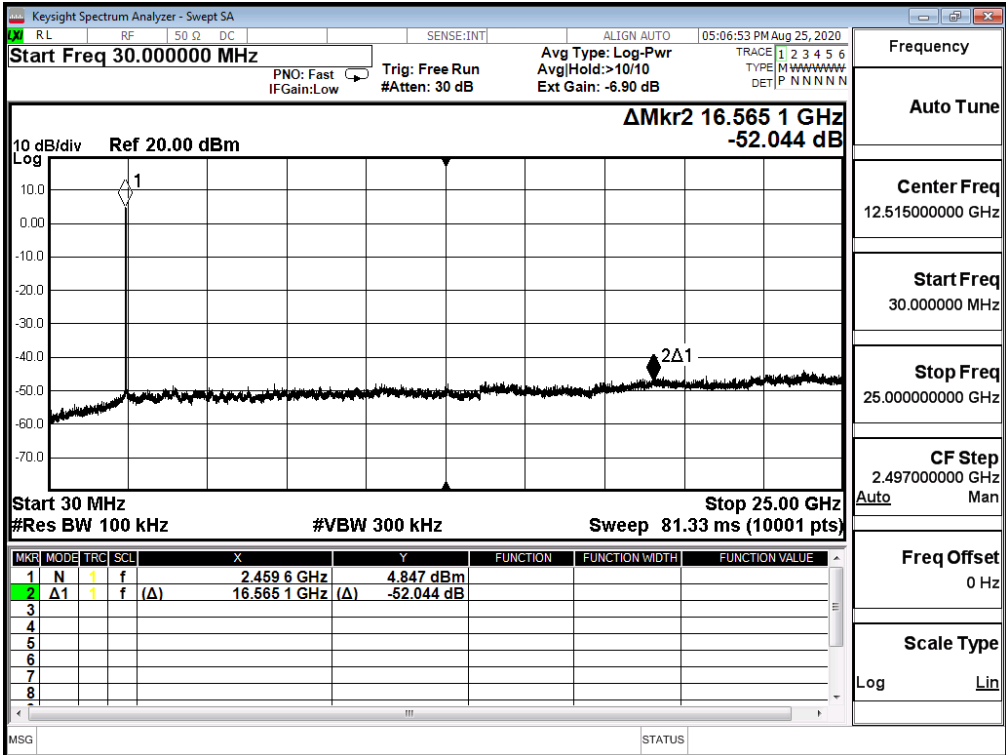


2412MHz (30MHz-25GHz)-11b_Ant 1

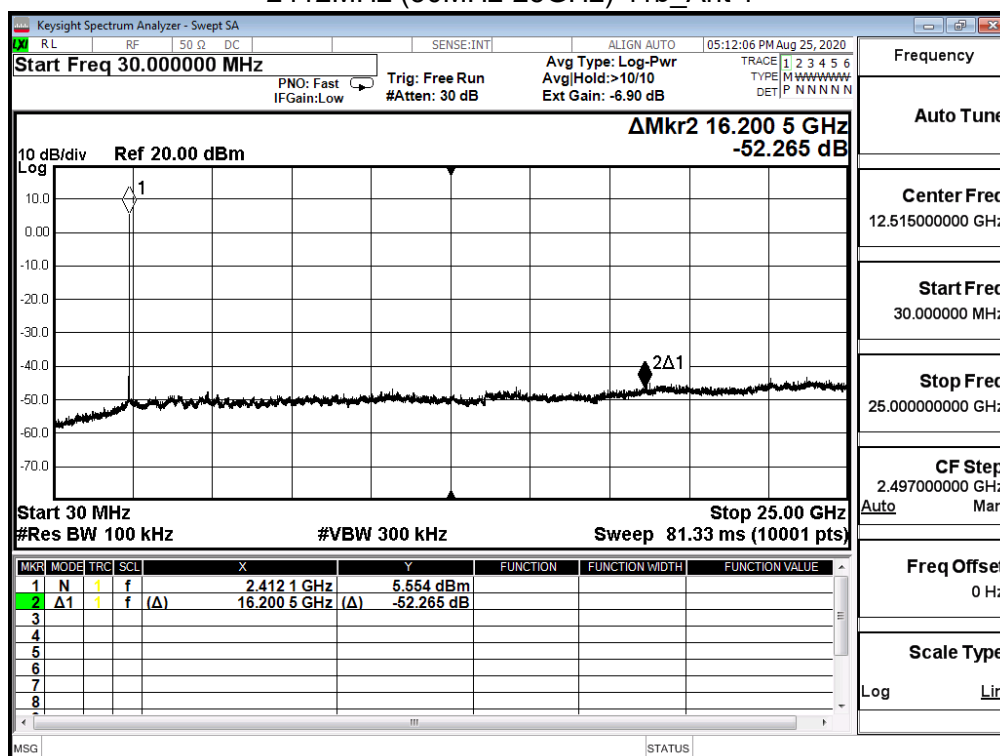


2437MHz (30MHz-25GHz)- 11b_Ant 1

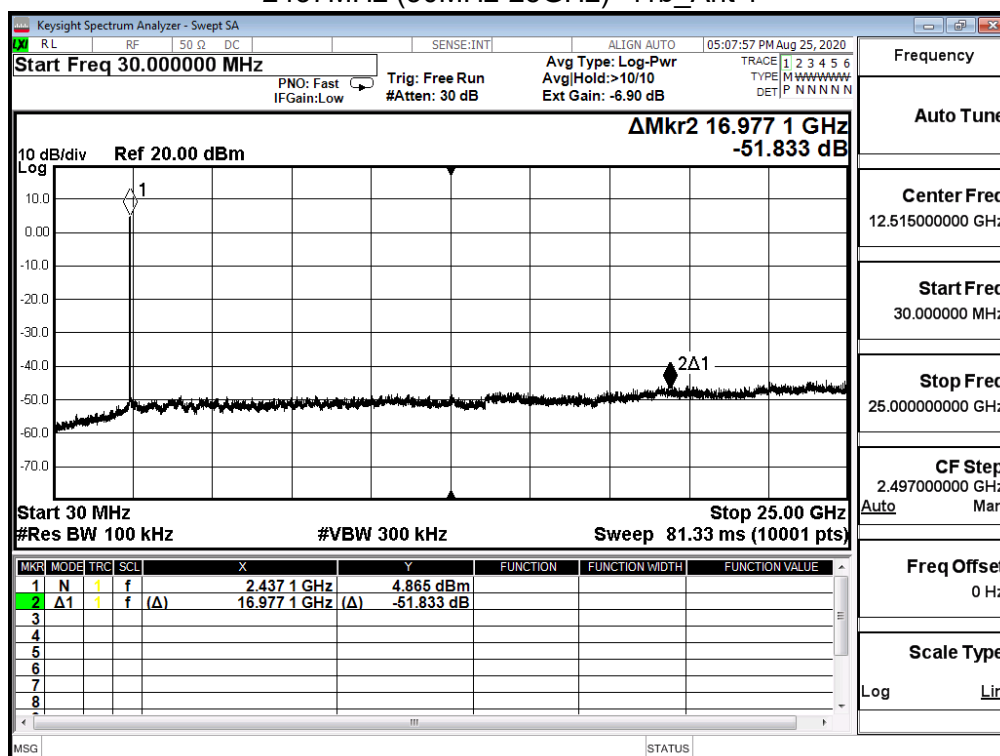


2462MHz (30MHz-25GHz)-11b_Ant 1

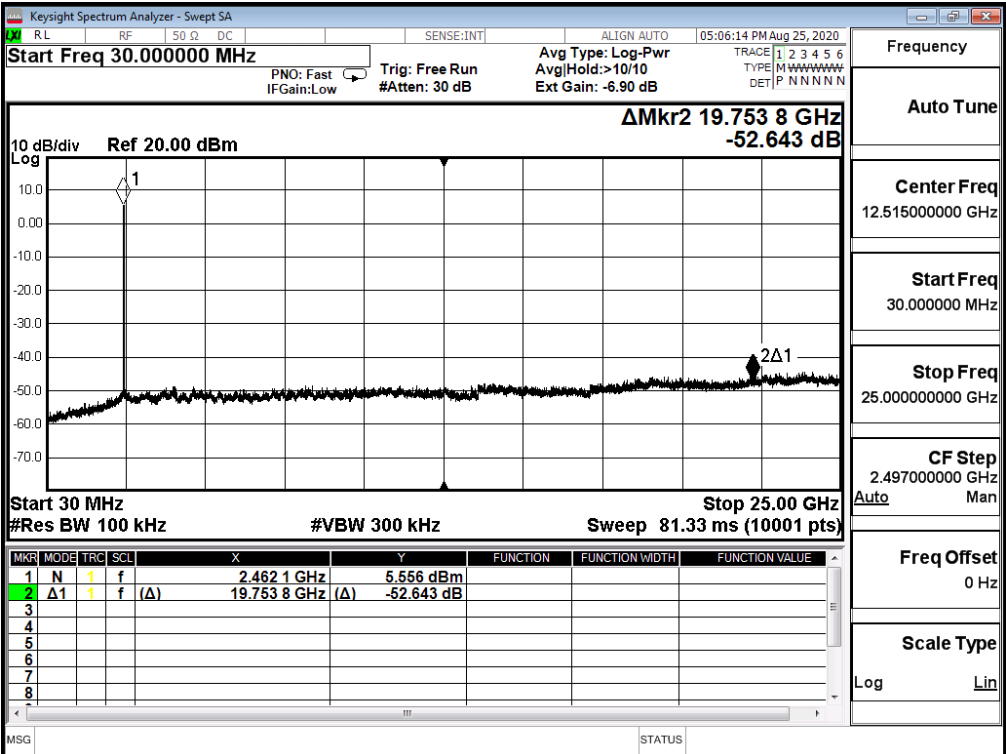


2412MHz (30MHz-25GHz)-11g_Ant 0

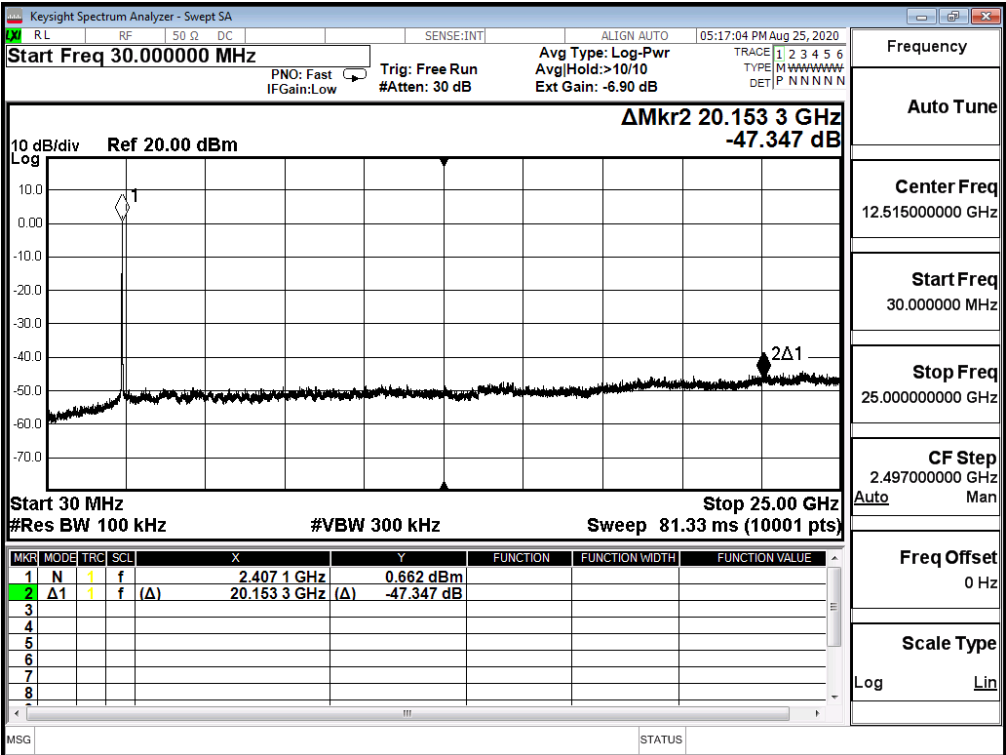


2437MHz (30MHz-25GHz)- 11g_Ant 0

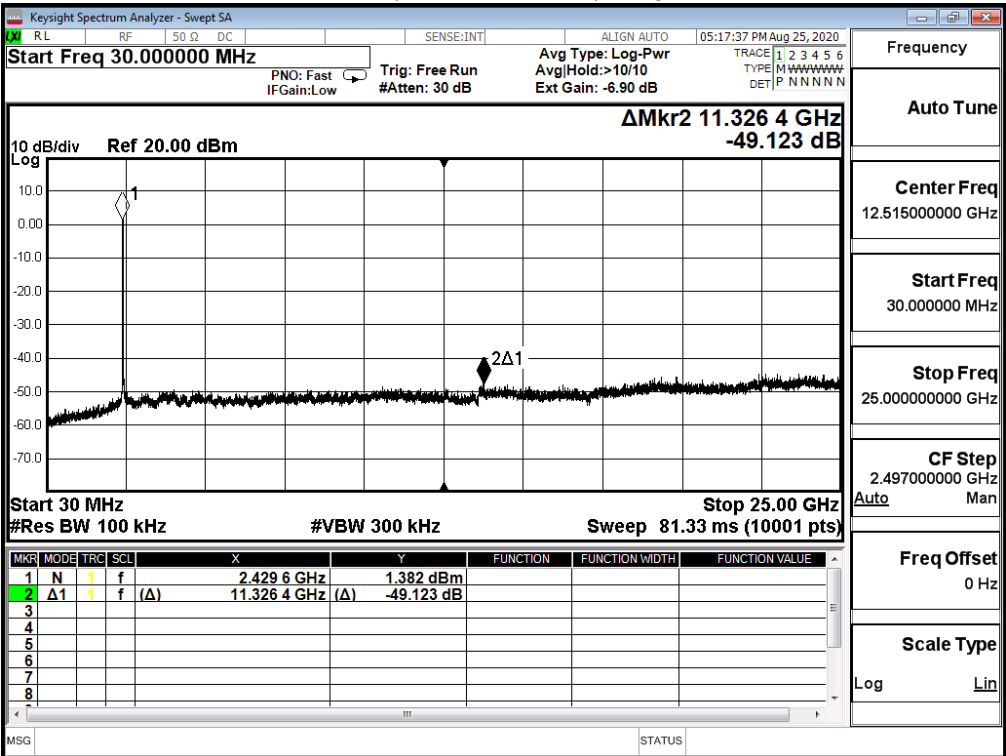


2462MHz (30MHz-25GHz)-11g_Ant 0

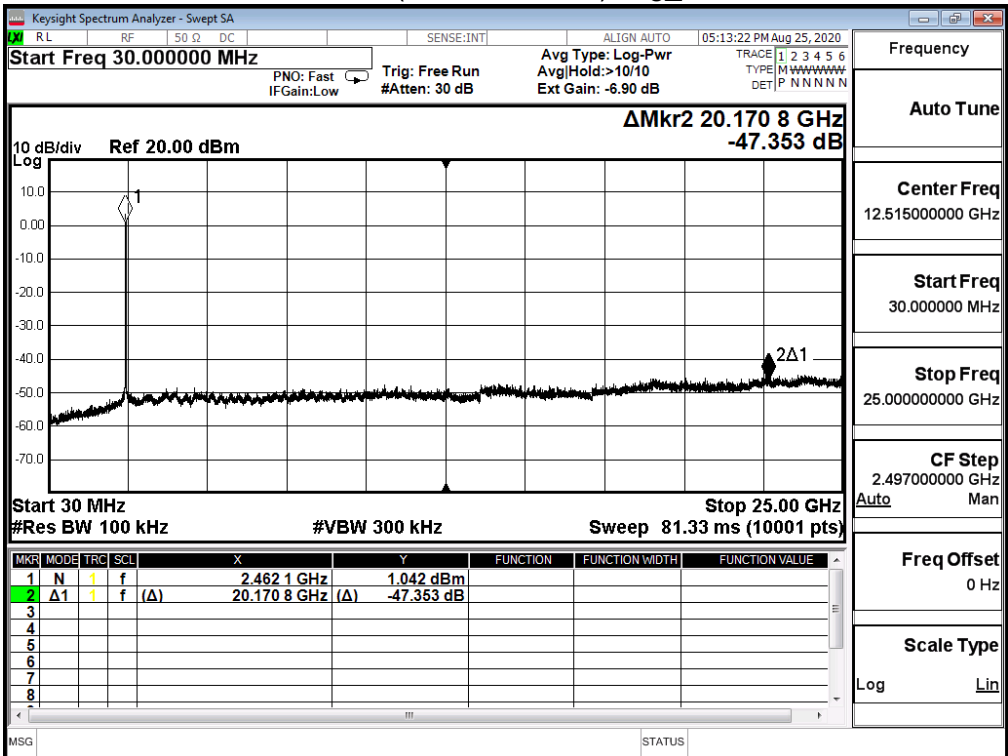


2412MHz (30MHz-25GHz)-11g_Ant 1

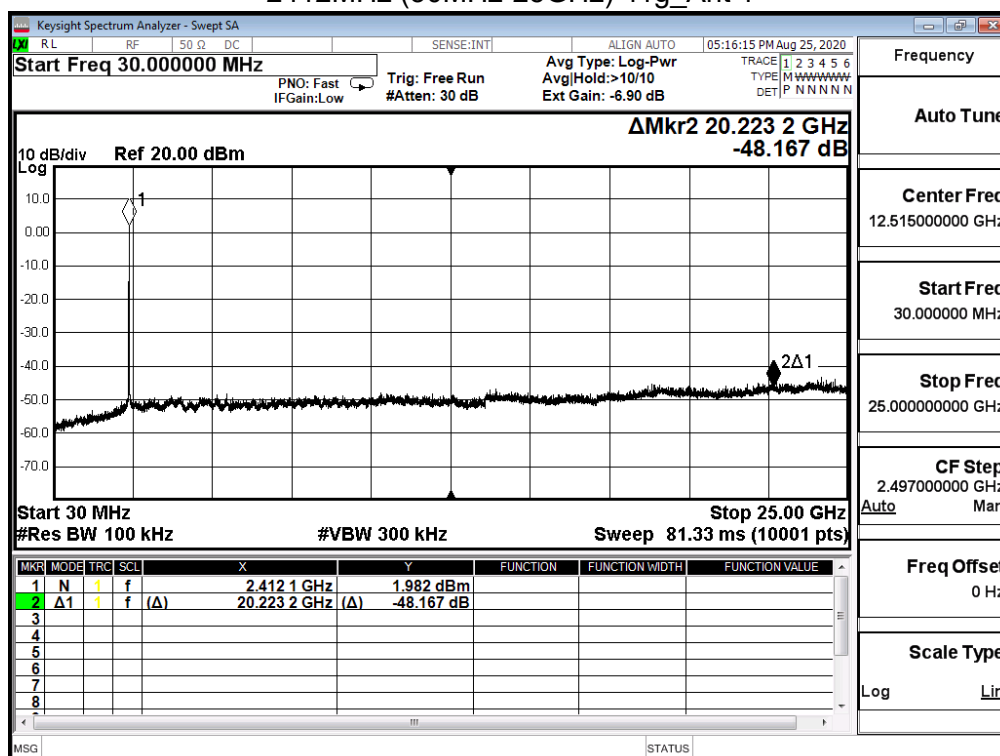

2437MHz (30MHz-25GHz)- 11g_Ant 1

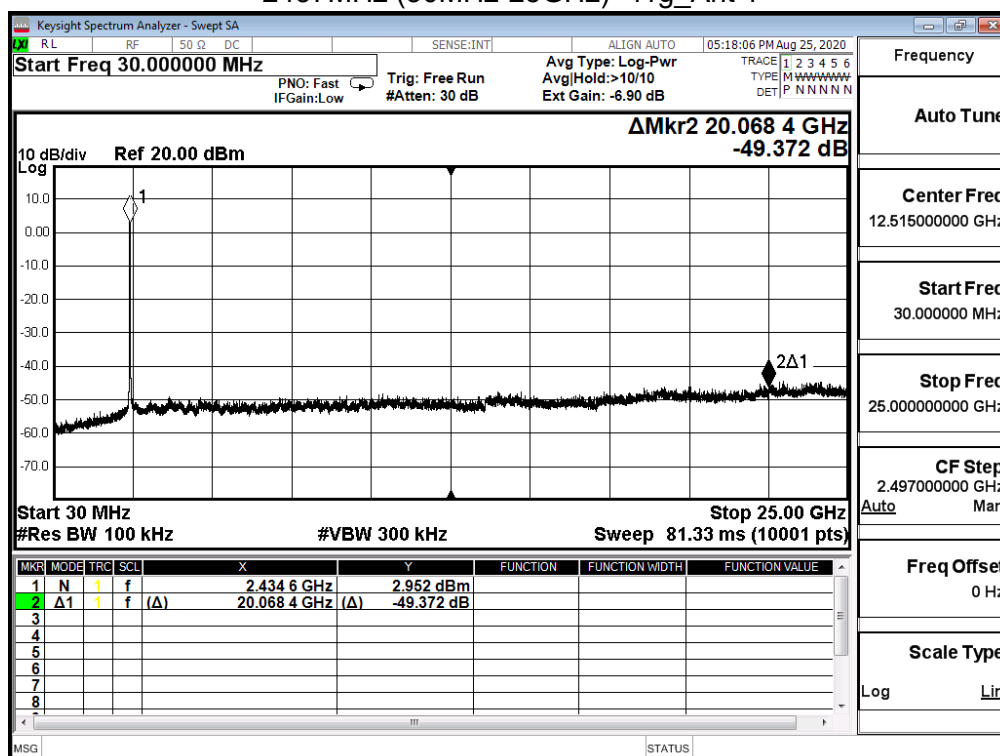


2462MHz (30MHz-25GHz)-11g_Ant 1

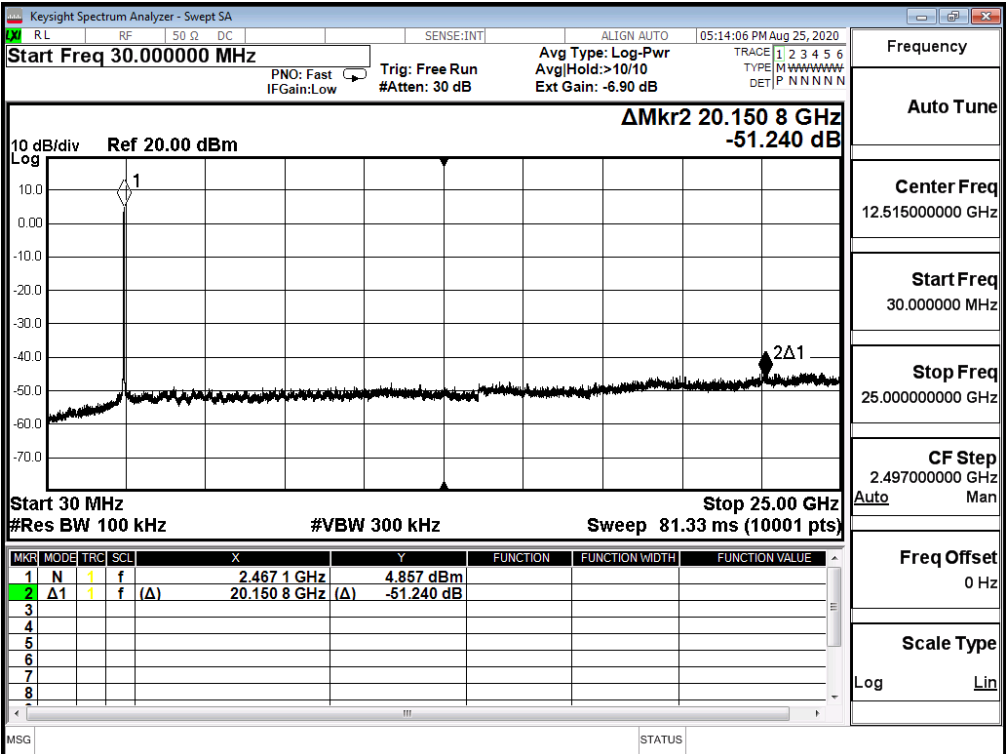


Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/08/25	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	63.0%


2412MHz (30MHz-25GHz)-11n(20M)_Ant 0

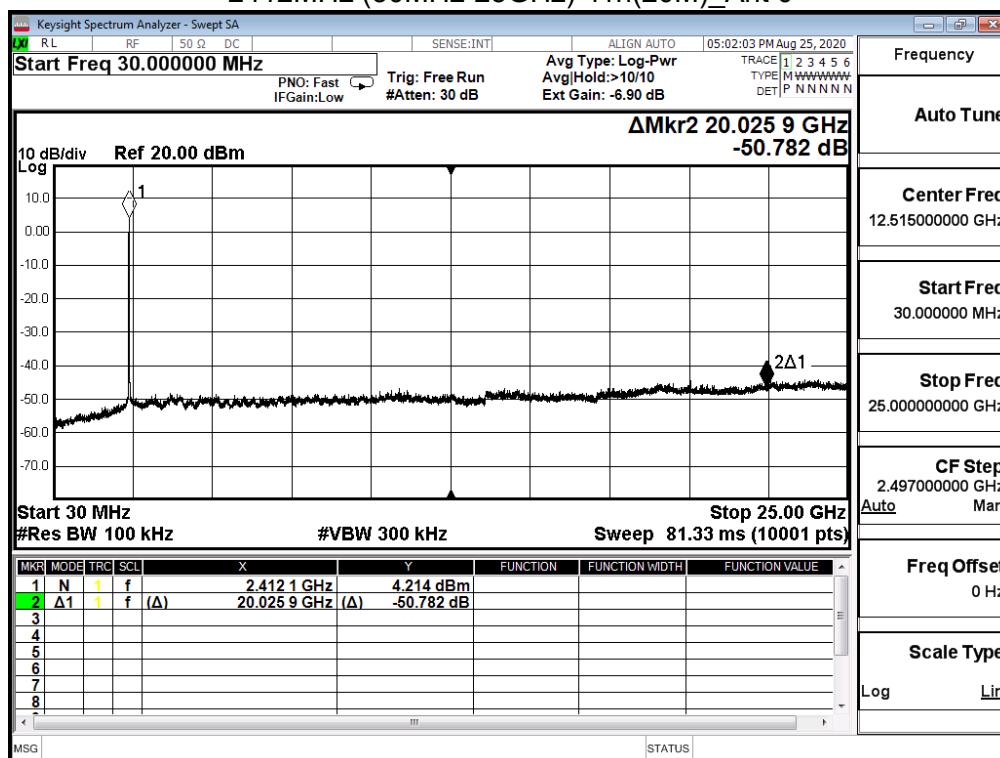


2437MHz (30MHz-25GHz)-11n(20M)_Ant 0

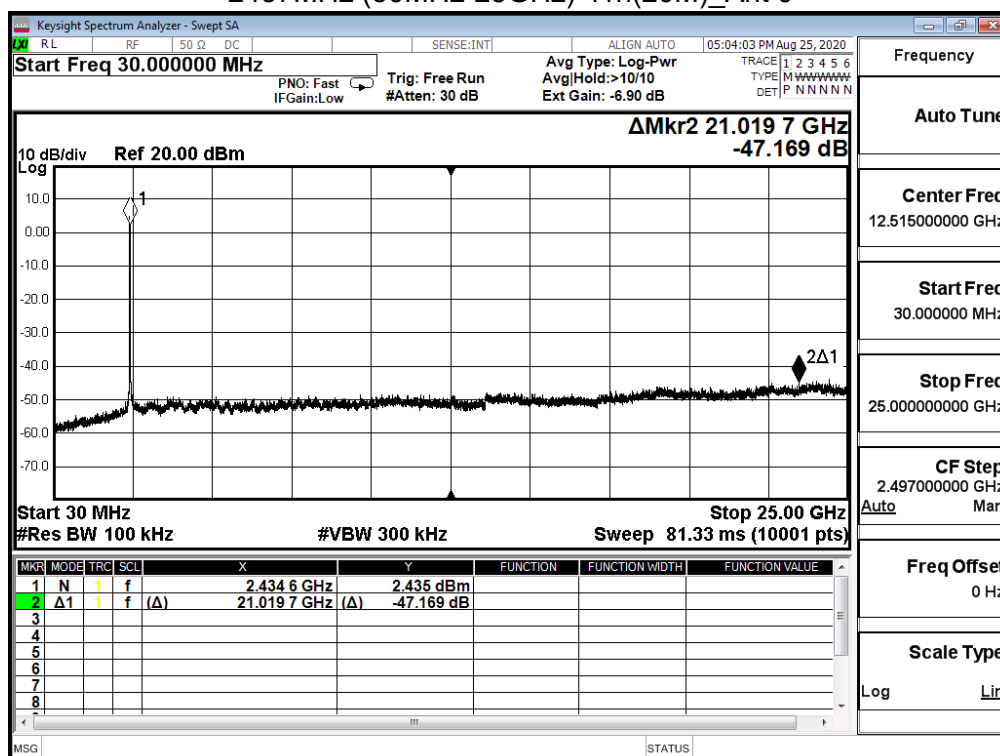


2462MHz (30MHz-25GHz)-11n(20M)_Ant 0

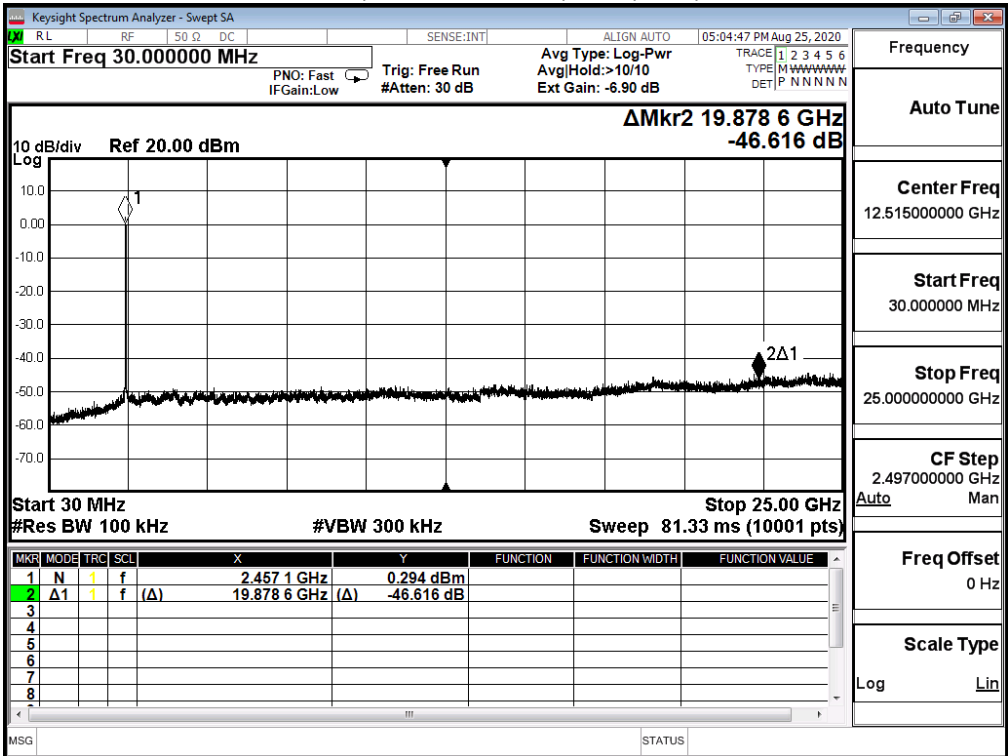


2412MHz (30MHz-25GHz)-11n(20M)_Ant 1

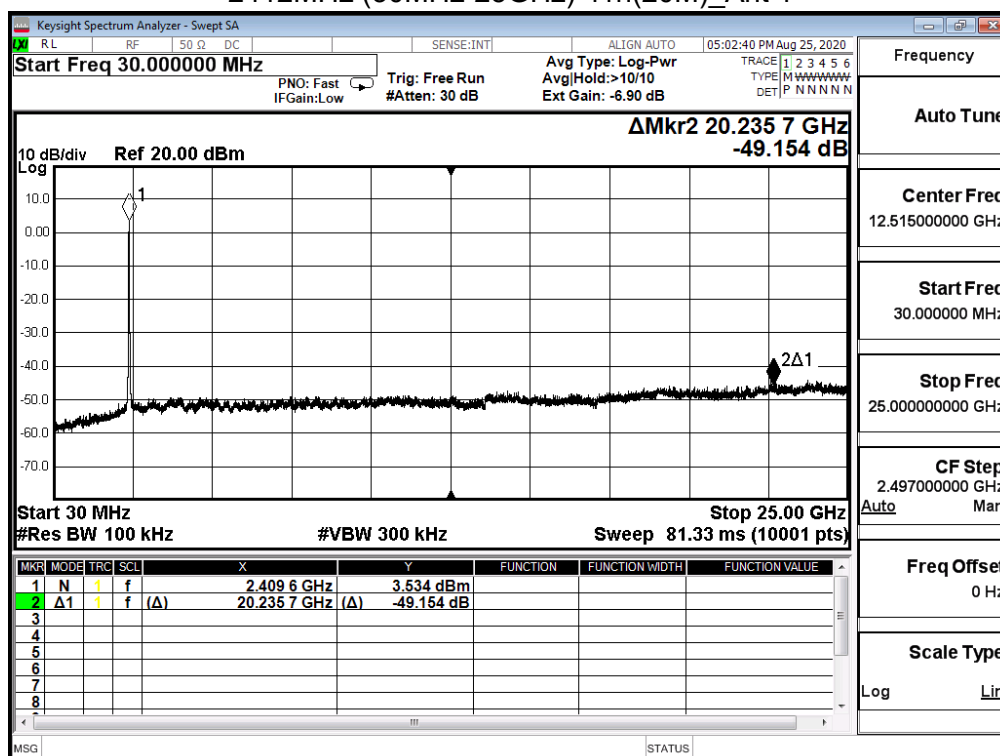


2437MHz (30MHz-25GHz)-11n(20M)_Ant 1

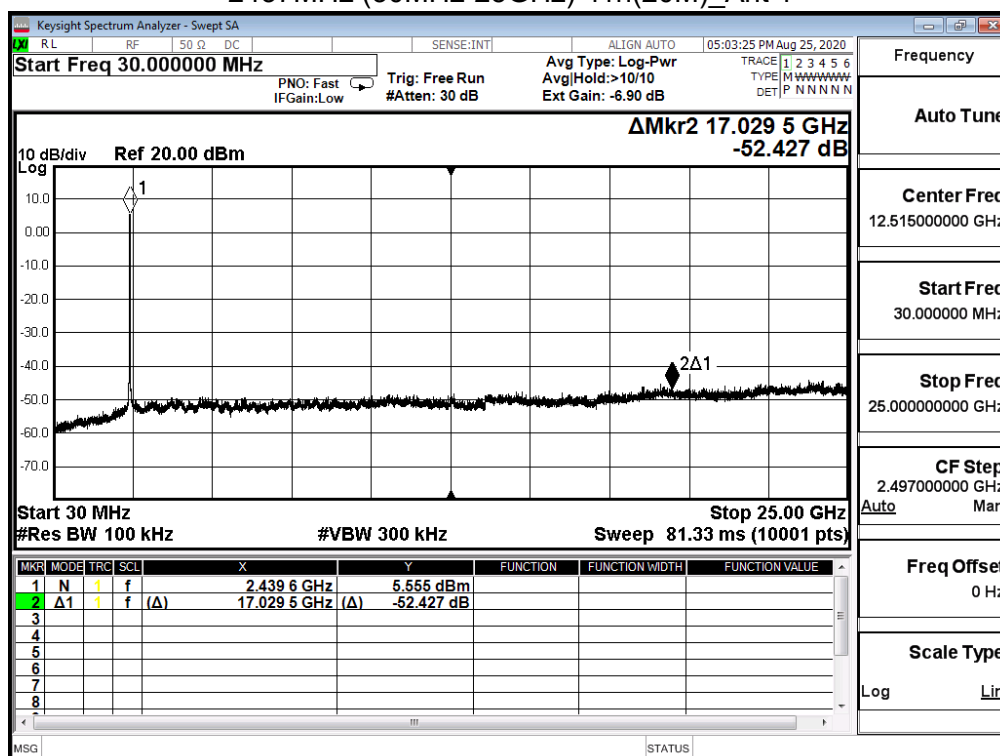


2462MHz (30MHz-25GHz)-11n(20M)_Ant 1

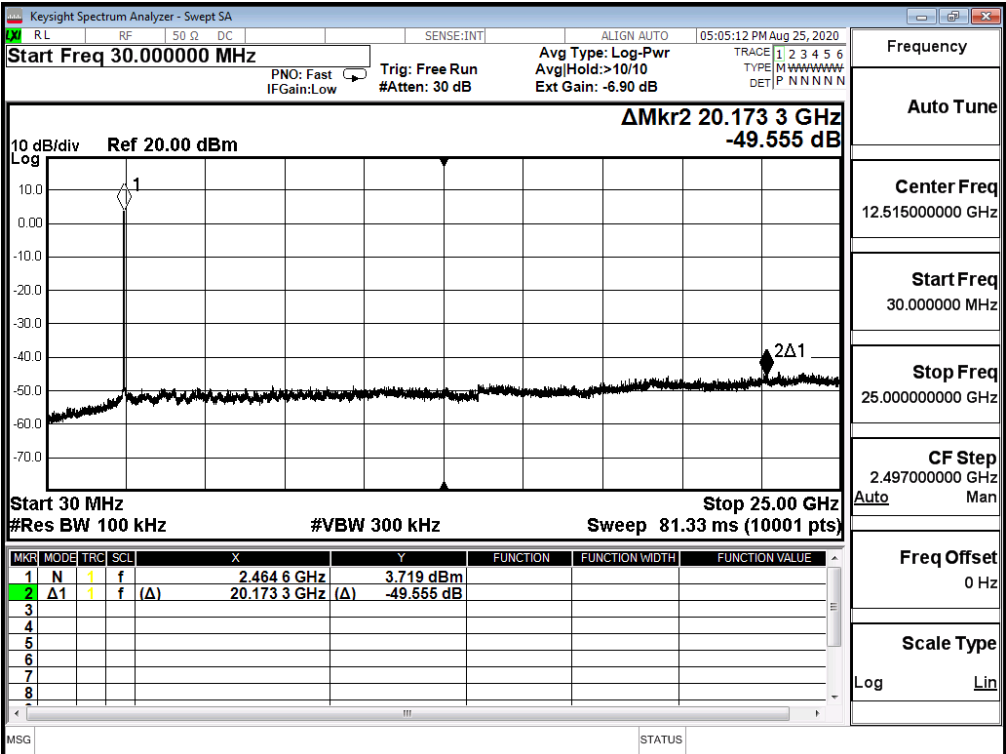


2422MHz (30MHz-25GHz)-11n(40M)_Ant 0

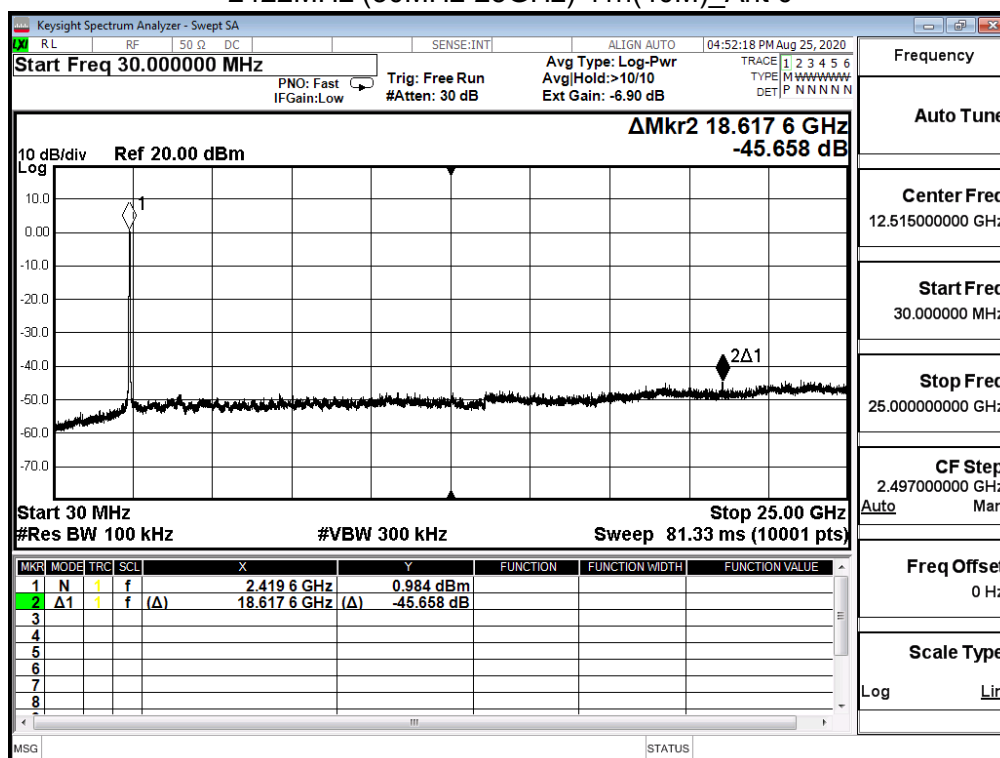


2437MHz (30MHz-25GHz)-11n(40M)_Ant 0

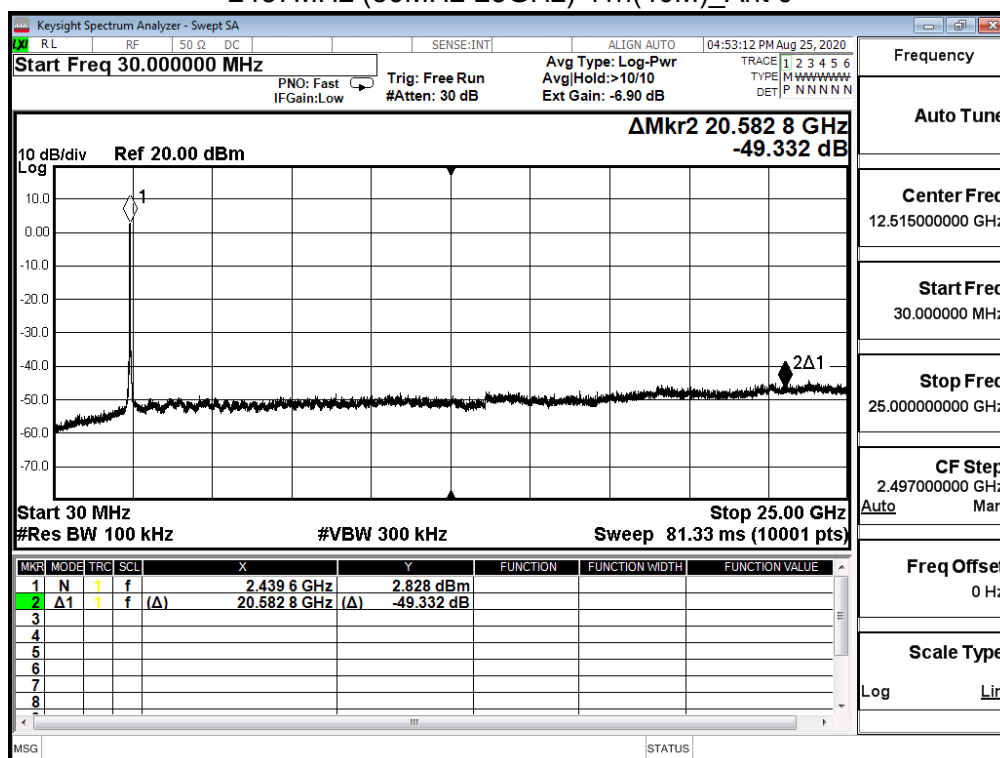


2452MHz (30MHz-25GHz)-11n(40M)_Ant 0

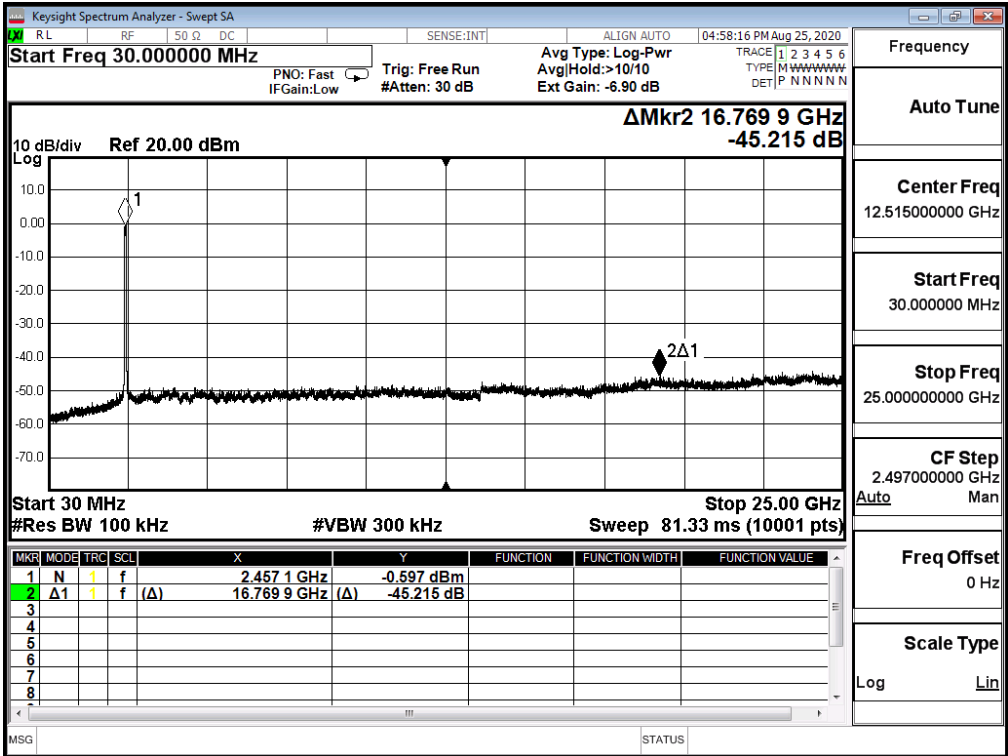


2422MHz (30MHz-25GHz)-11n(40M)_Ant 1

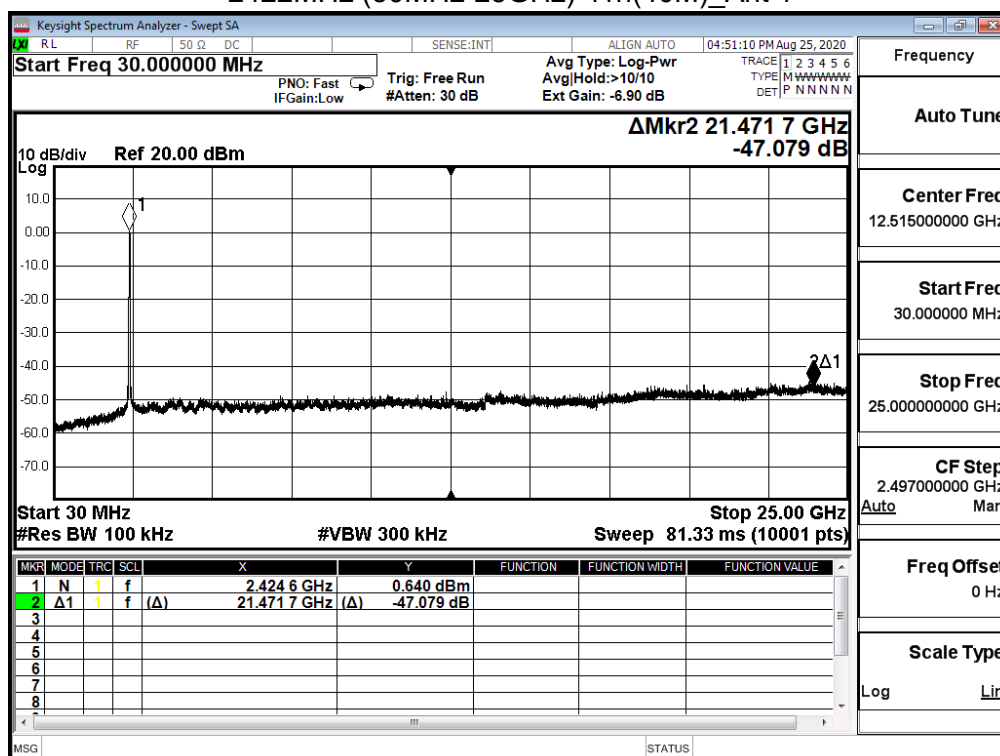


2437MHz (30MHz-25GHz)-11n(40M)_Ant 1

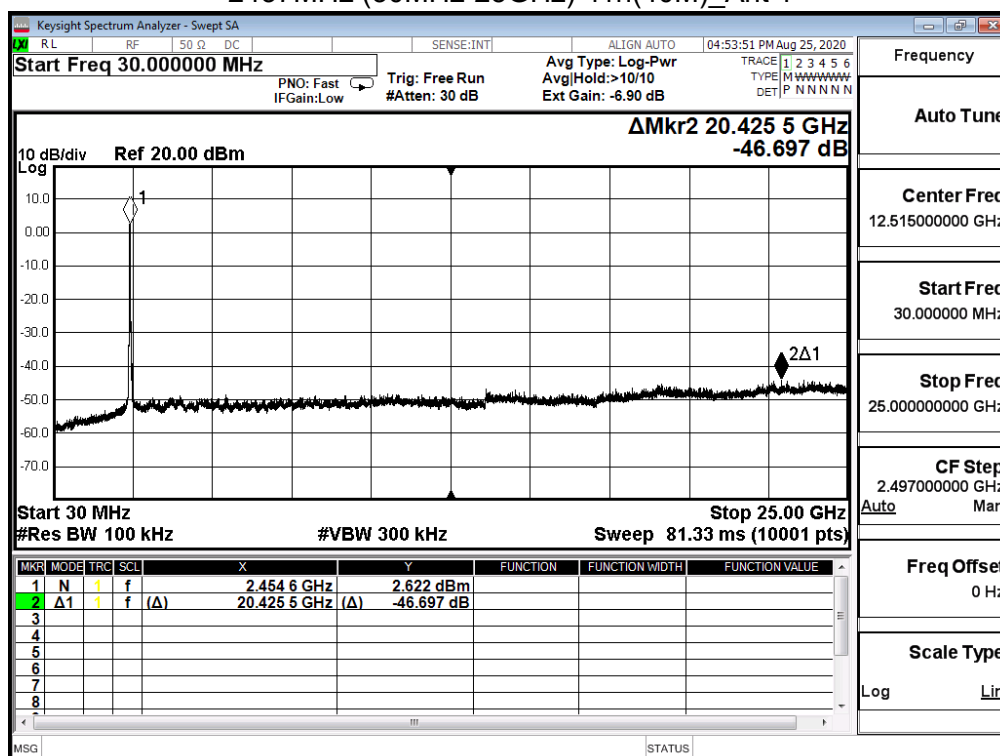


2452MHz (30MHz-25GHz)-11n(40M)_Ant 1

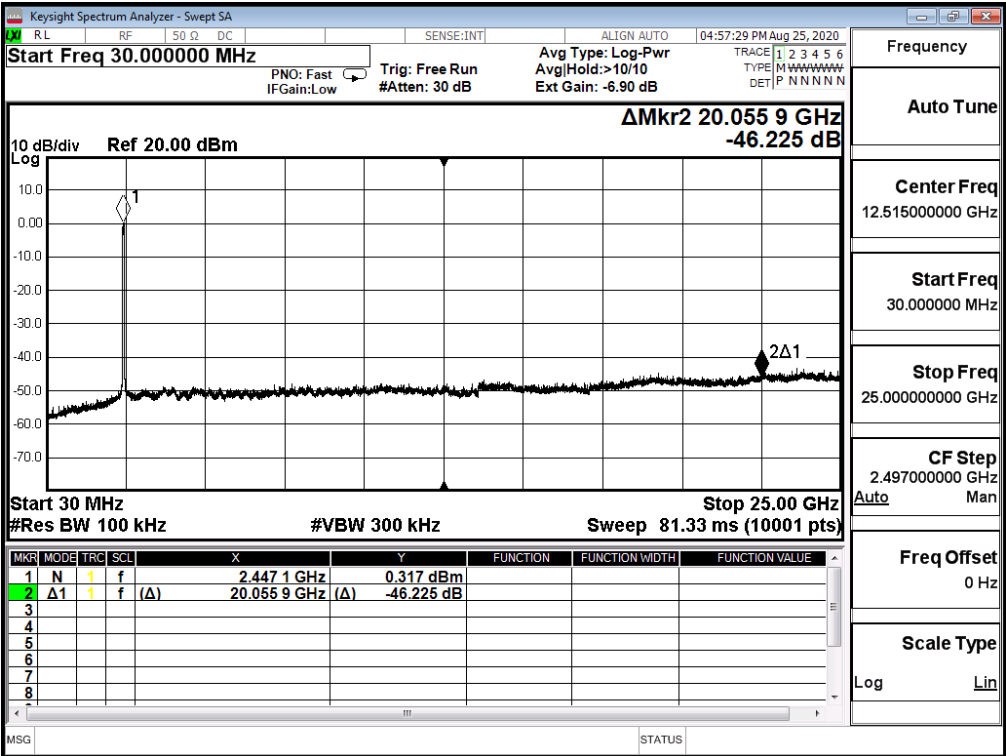


2412MHz (30MHz-25GHz)-11ax(20M)_Ant 0

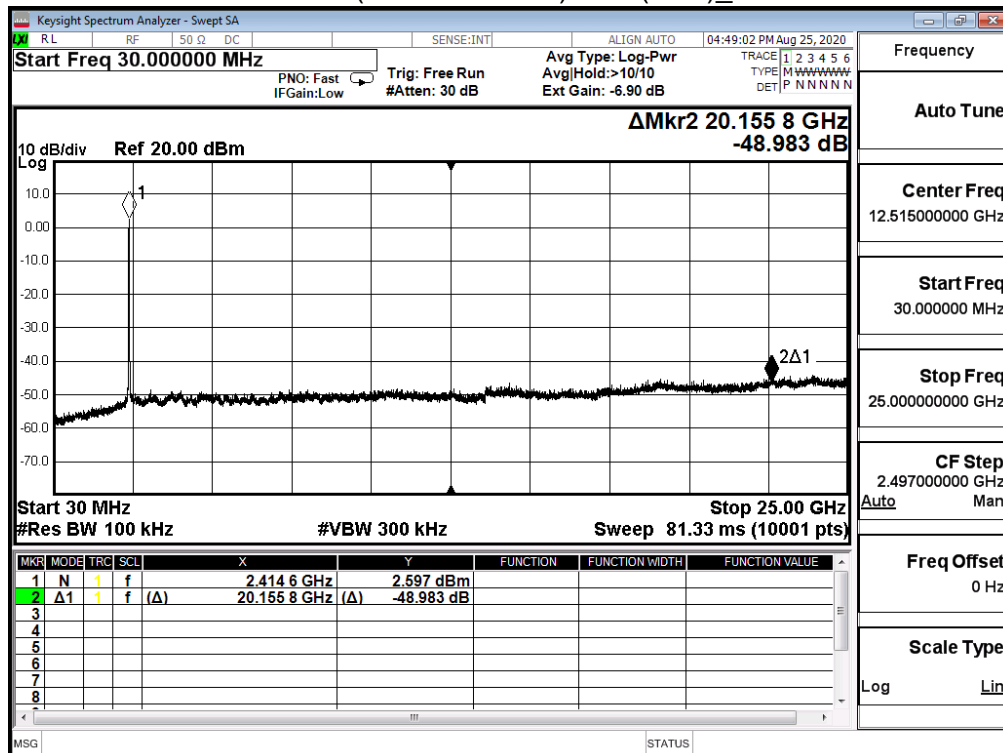


2437MHz (30MHz-25GHz)-11ax(20M)_Ant 0

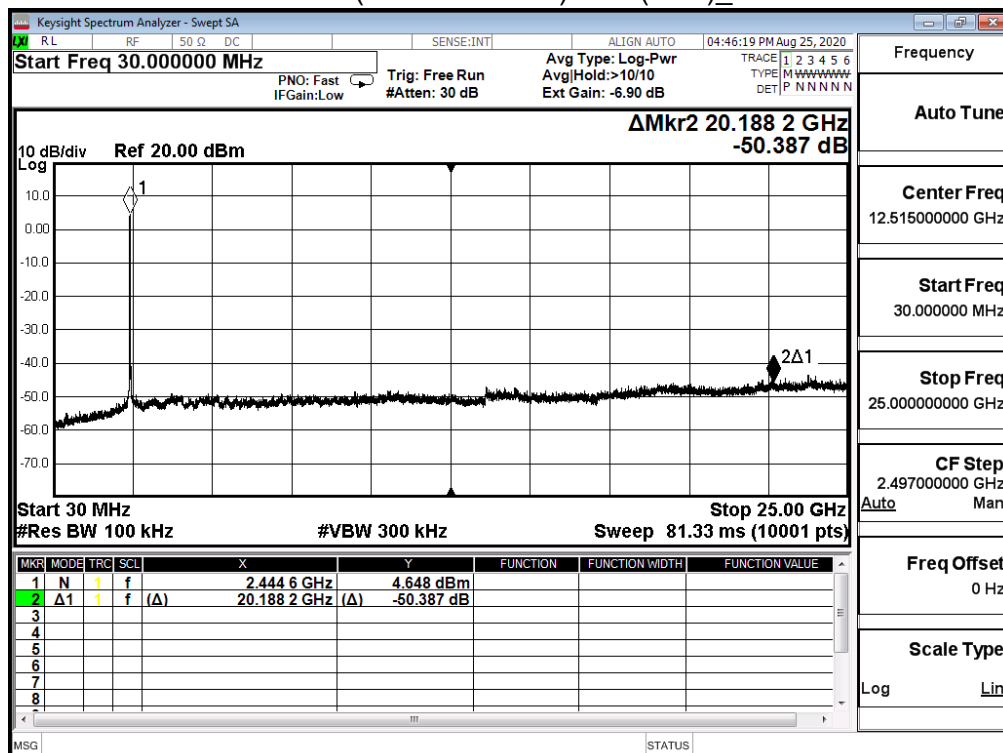


2462MHz (30MHz-25GHz)-11ax(20M)_Ant 0

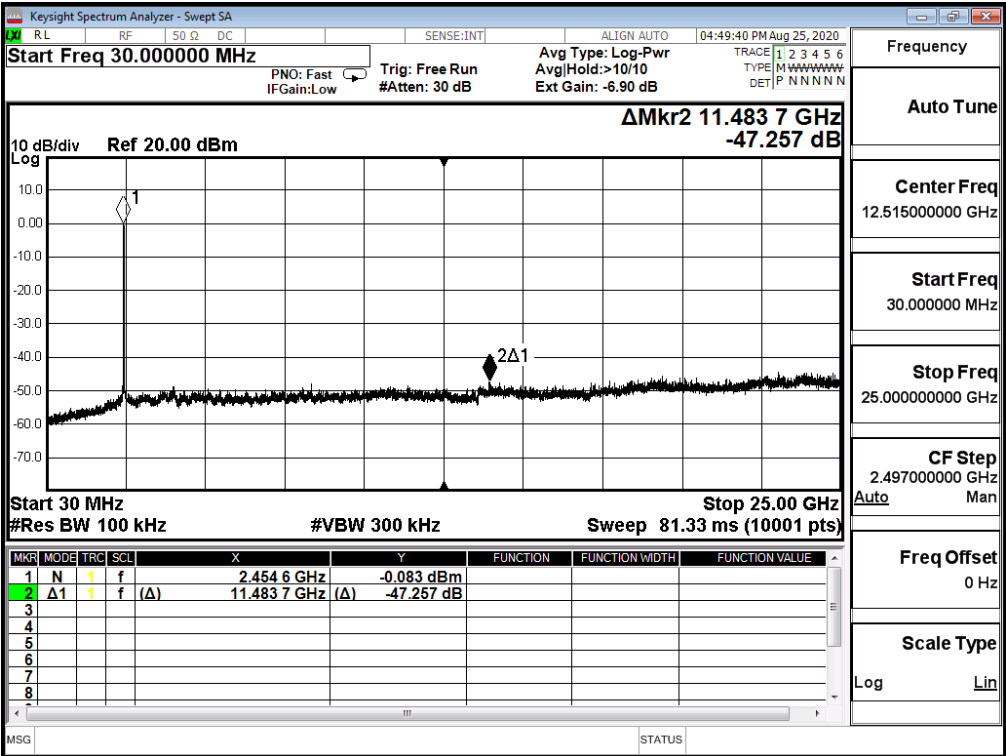


2412MHz (30MHz-25GHz)-11ax(20M)_Ant 1

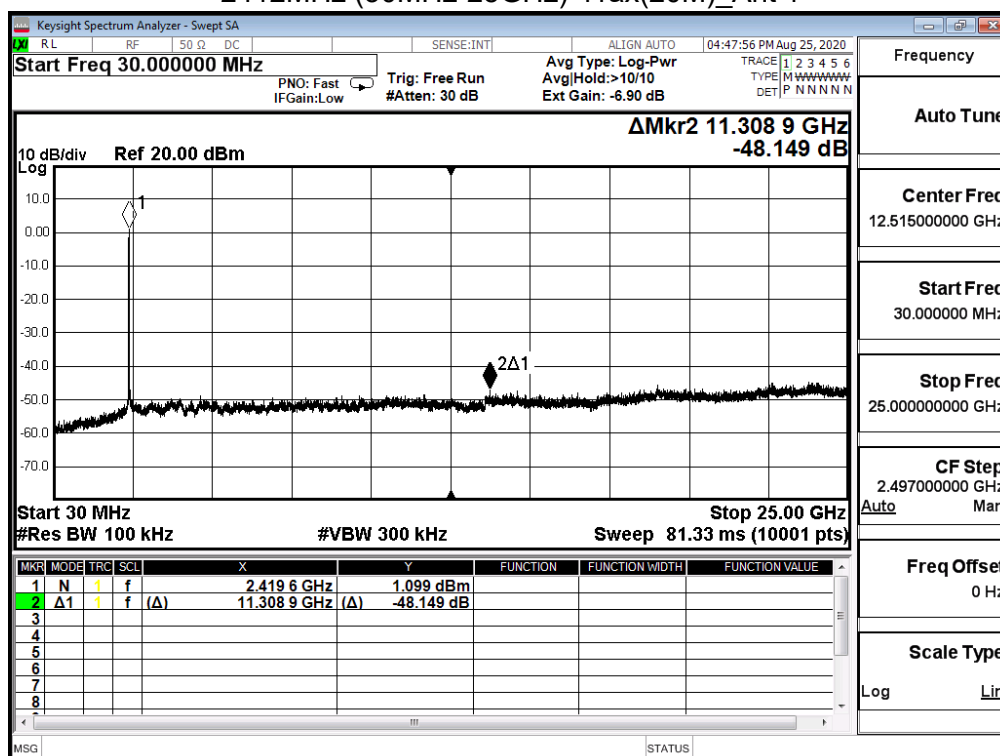


2437MHz (30MHz-25GHz)-11ax(20M)_Ant 1

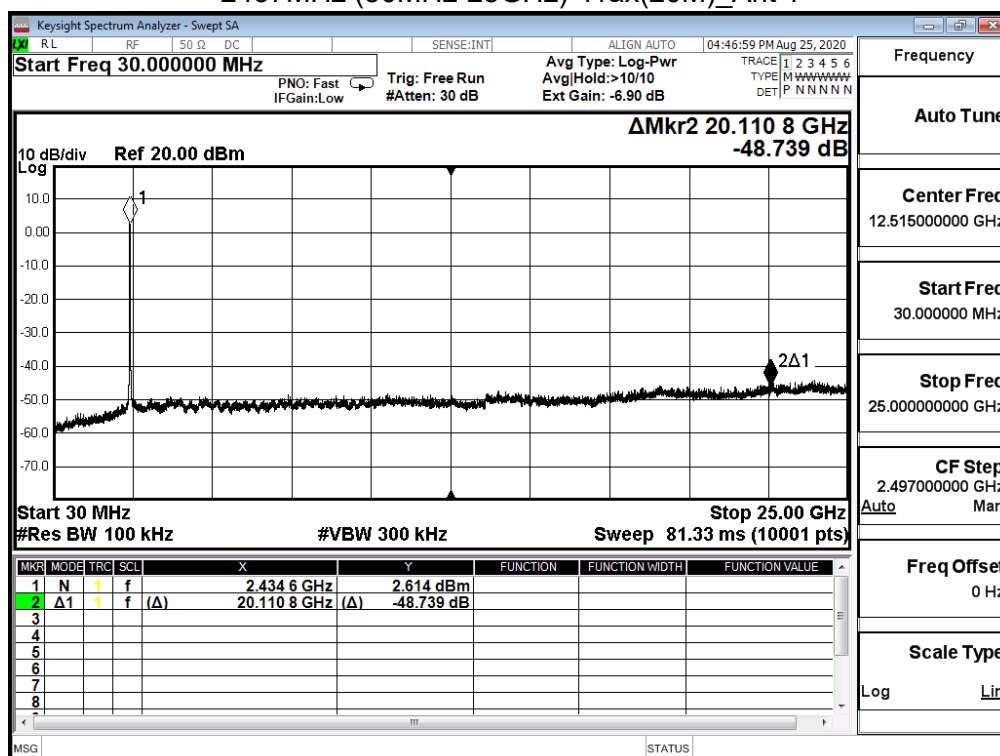


2462MHz (30MHz-25GHz)-11ax(20M)_Ant 1

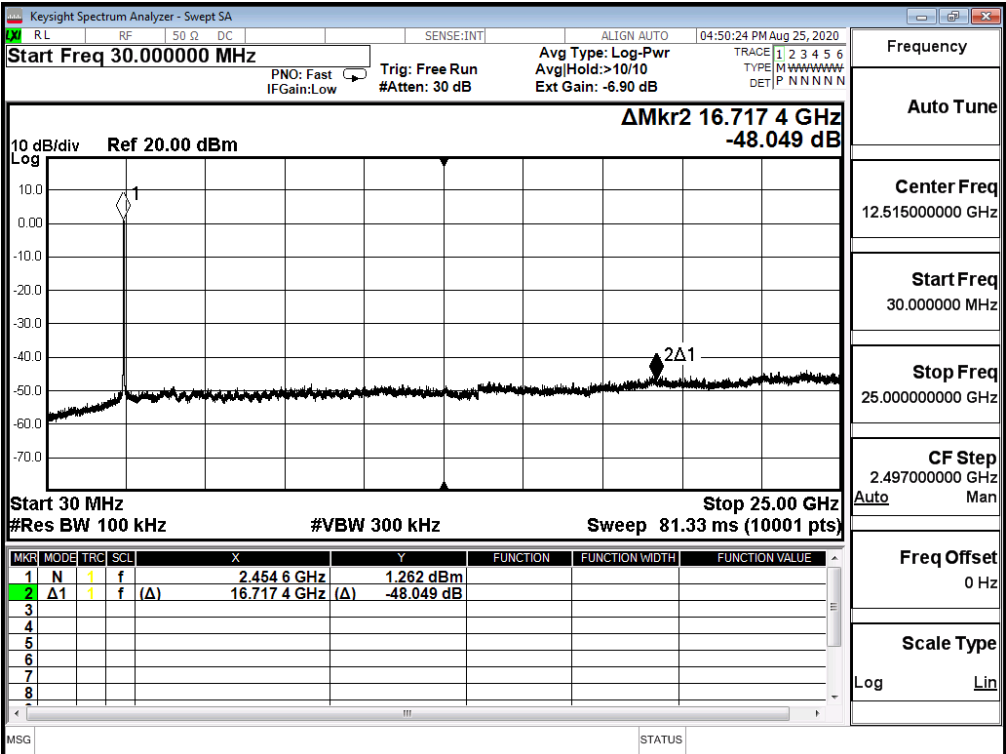


2422MHz (30MHz-25GHz)-11ax(40M)_Ant 0

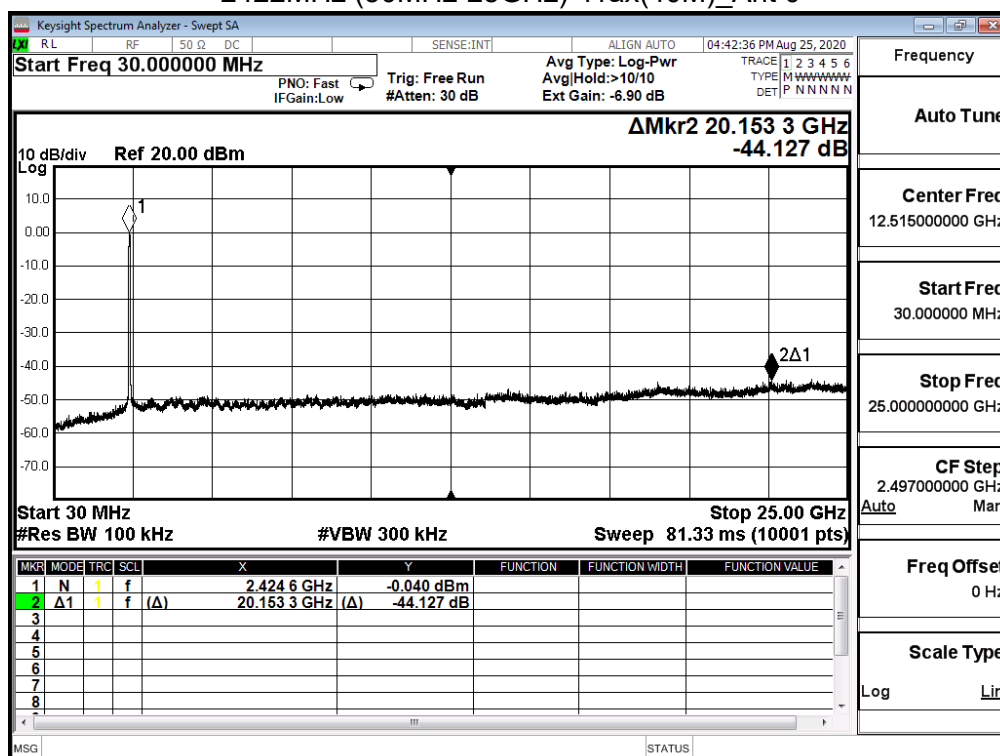


2437MHz (30MHz-25GHz)-11ax(40M)_Ant 0

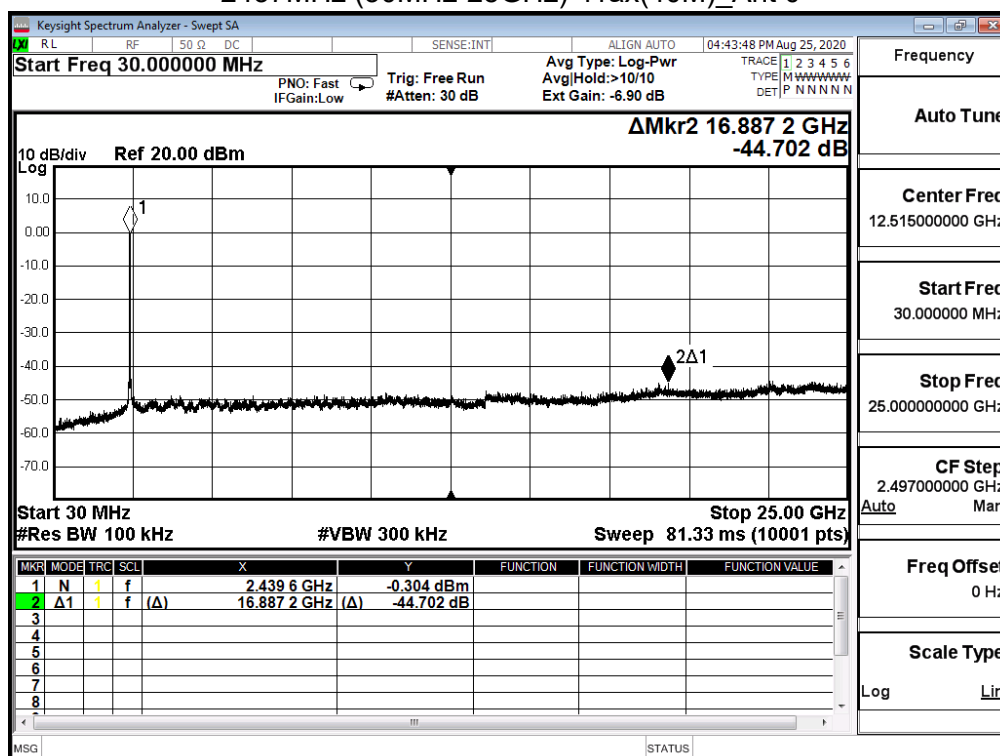


2452MHz (30MHz-25GHz)-11ax(40M)_Ant 0

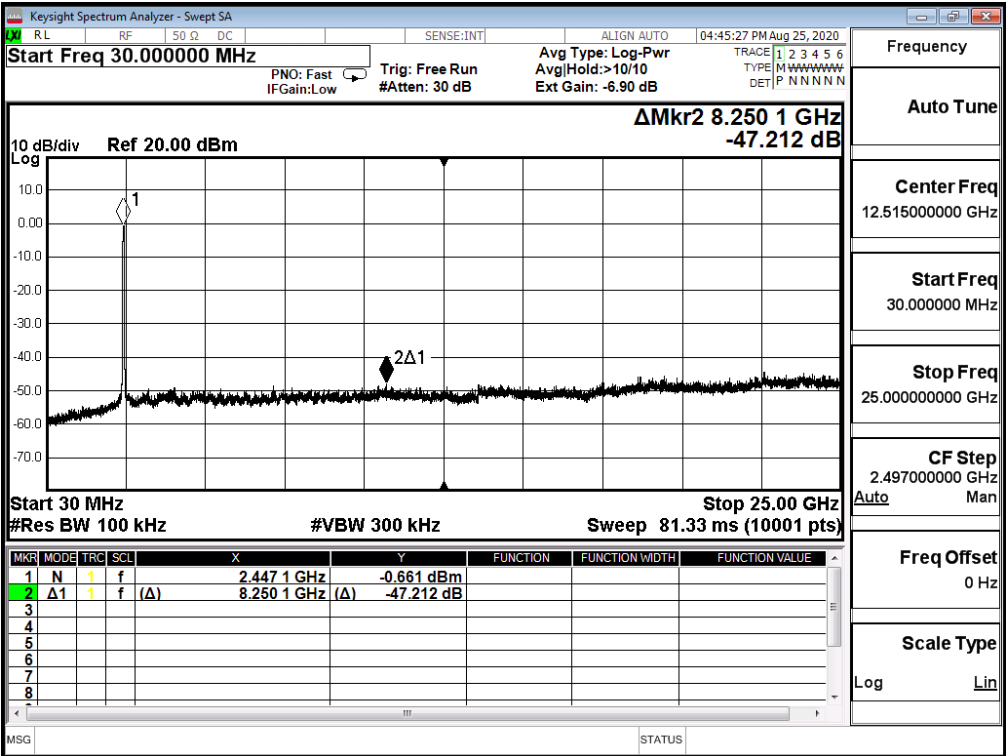


2422MHz (30MHz-25GHz)-11ax(40M)_Ant 1

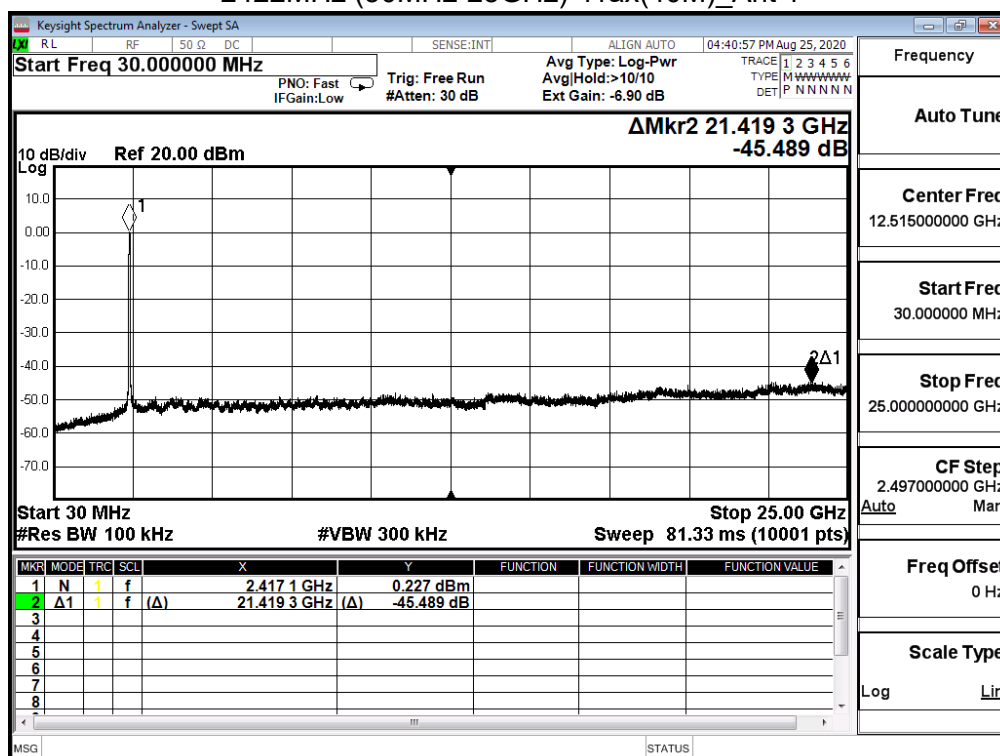

2437MHz (30MHz-25GHz)-11ax(40M)_Ant 1

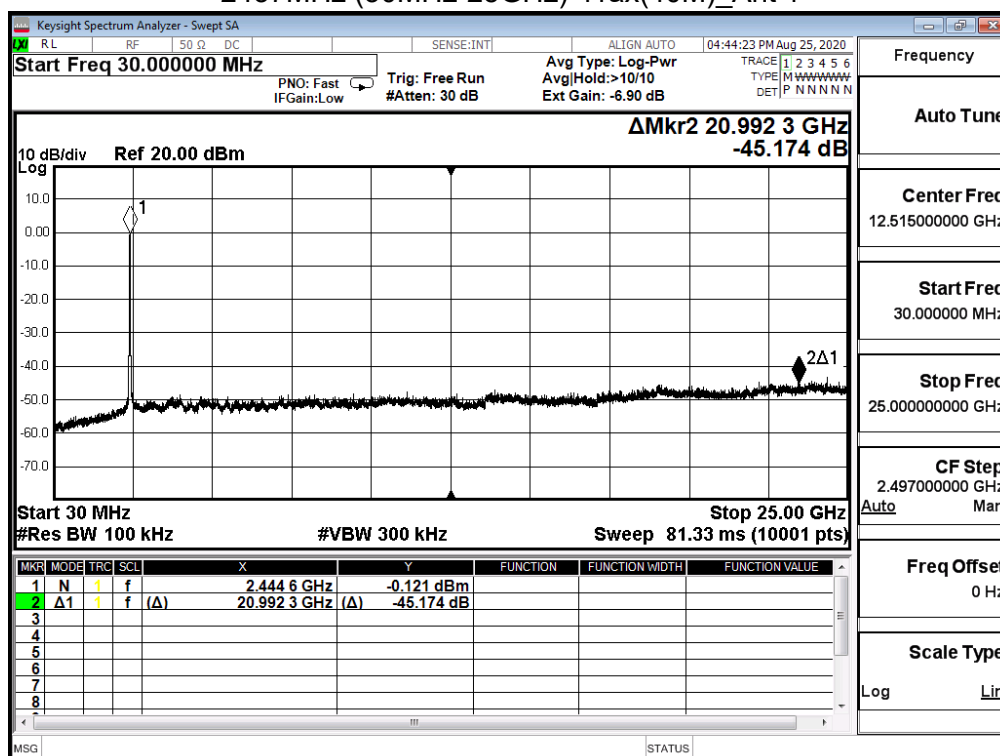


2452MHz (30MHz-25GHz)-11ax(40M)_Ant 1

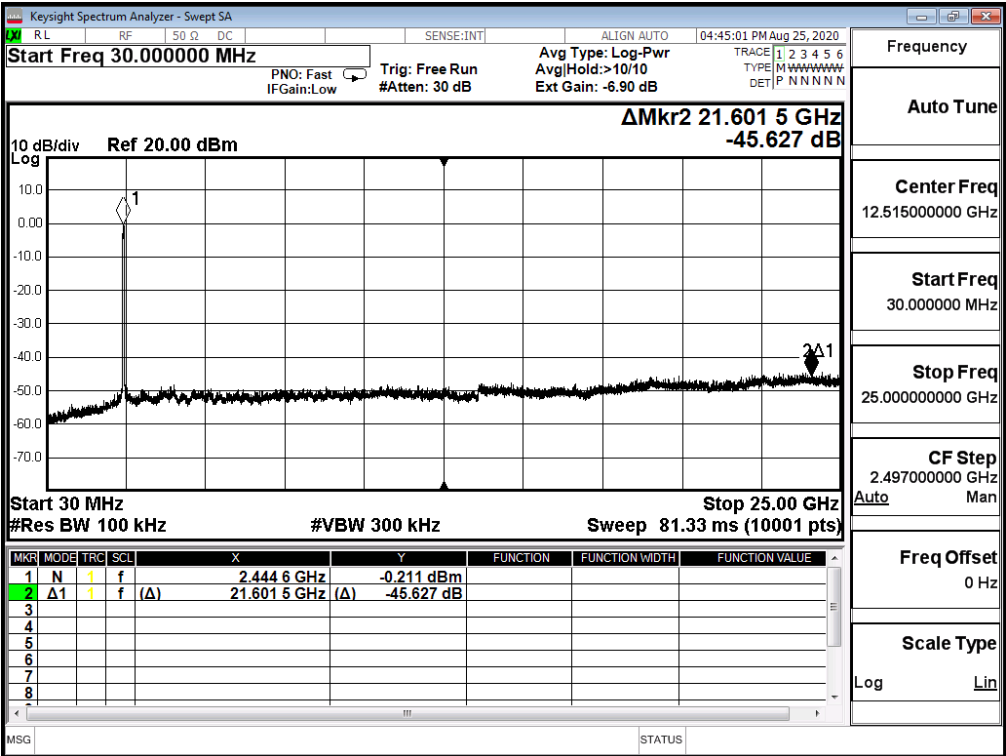

6. Radiated Emission Band Edge

6.1. Test Setup

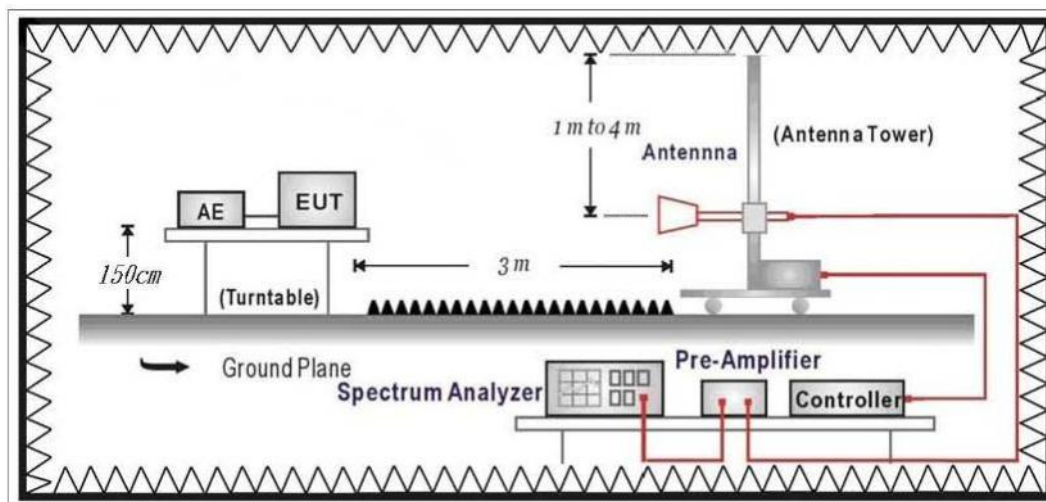

6.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements. The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

6.5. Test Result

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

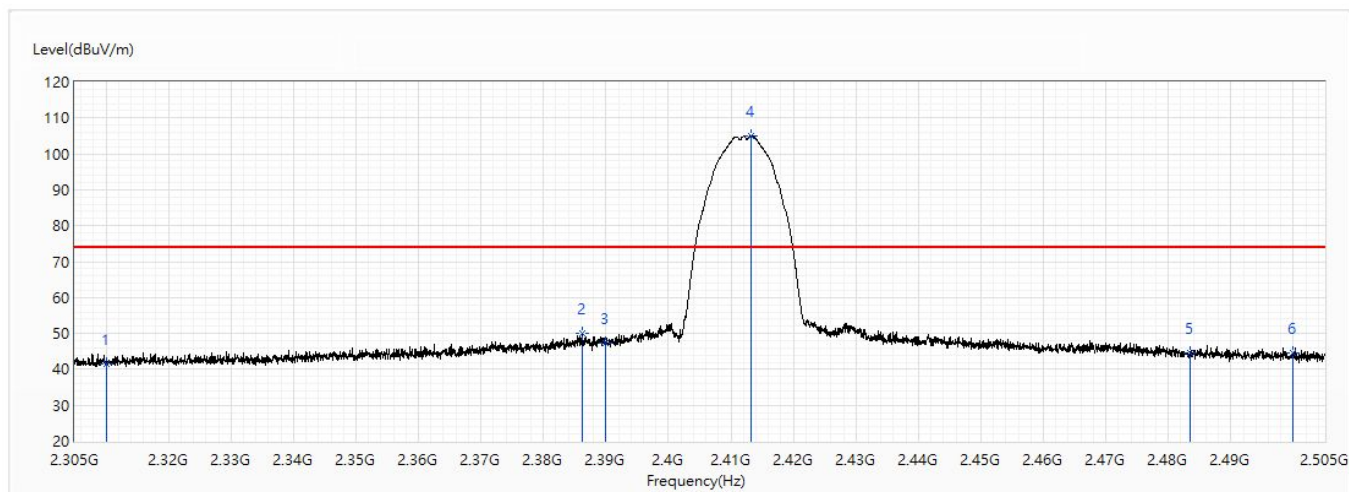


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.53	74.00	-32.47	28.38	13.15	PK
2	2386.2	49.88	74.00	-24.12	36.20	13.68	PK
3	2390	47.18	74.00	-26.82	33.48	13.70	PK
! 4	2413.15	105.09	74.00	31.09	91.22	13.87	PK
5	2483.5	44.44	74.00	-29.56	30.08	14.36	PK
6	2500	44.71	74.00	-29.29	30.23	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

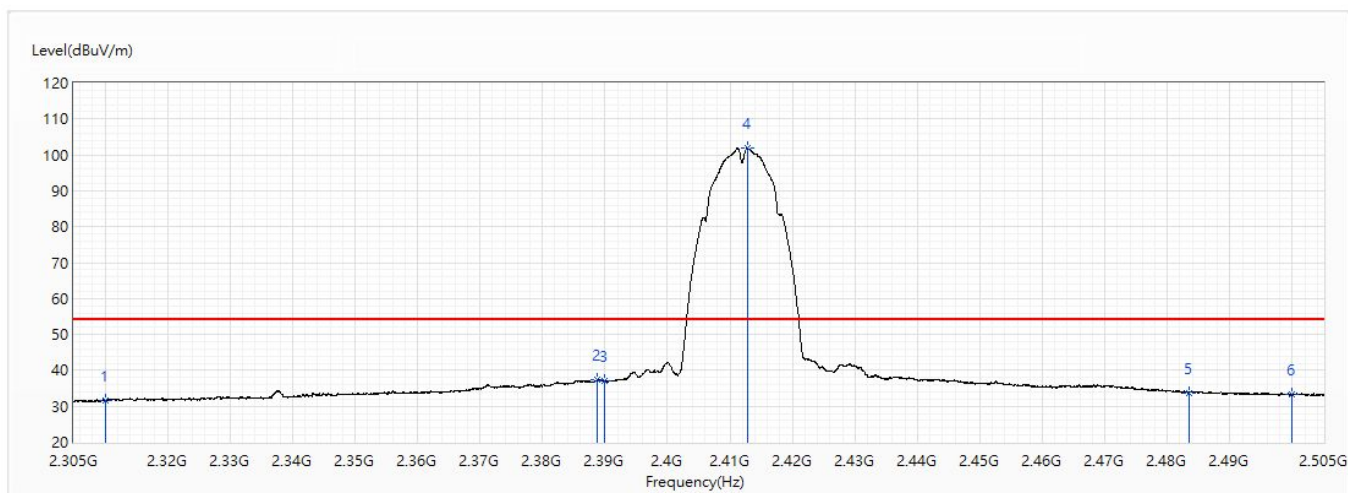


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	31.58	54.00	-22.42	18.43	13.15	AV
2	2388.8	37.37	54.00	-16.63	23.67	13.70	AV
3	2390	37.06	54.00	-16.94	23.36	13.70	AV
! 4	2412.75	101.86	54.00	47.86	87.99	13.87	AV
5	2483.5	33.82	54.00	-20.18	19.46	14.36	AV
6	2500	33.41	54.00	-20.59	18.93	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

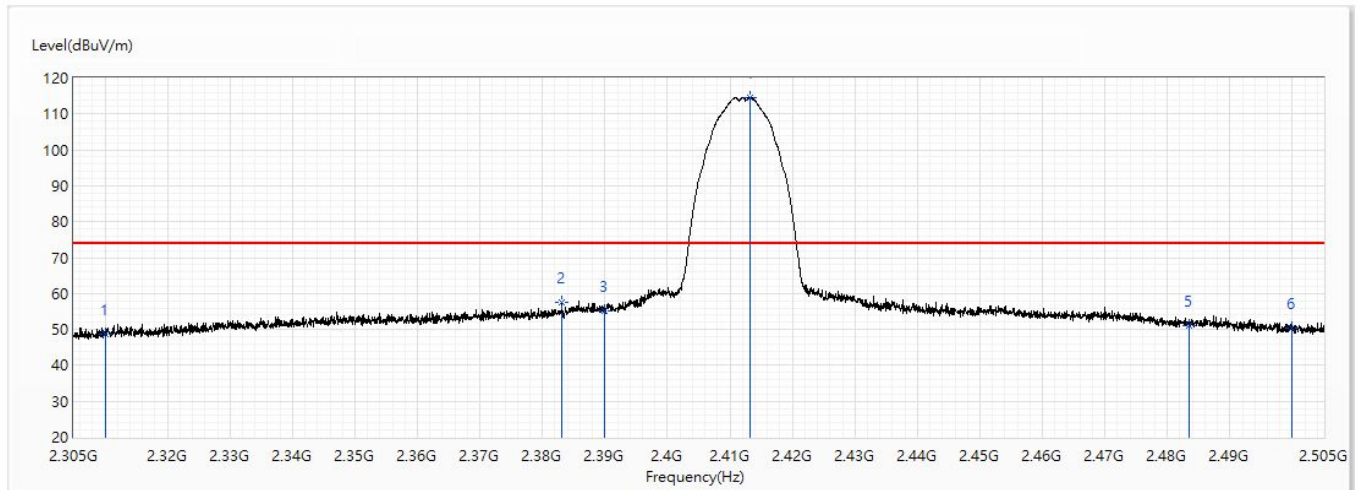


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	48.54	74.00	-25.46	35.39	13.15	PK
2	2383.05	57.54	74.00	-16.46	43.88	13.66	PK
3	2390	55.19	74.00	-18.81	41.49	13.70	PK
! 4	2413.15	114.70	74.00	40.70	100.83	13.87	PK
5	2483.5	51.07	74.00	-22.93	36.71	14.36	PK
6	2500	50.42	74.00	-23.58	35.94	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

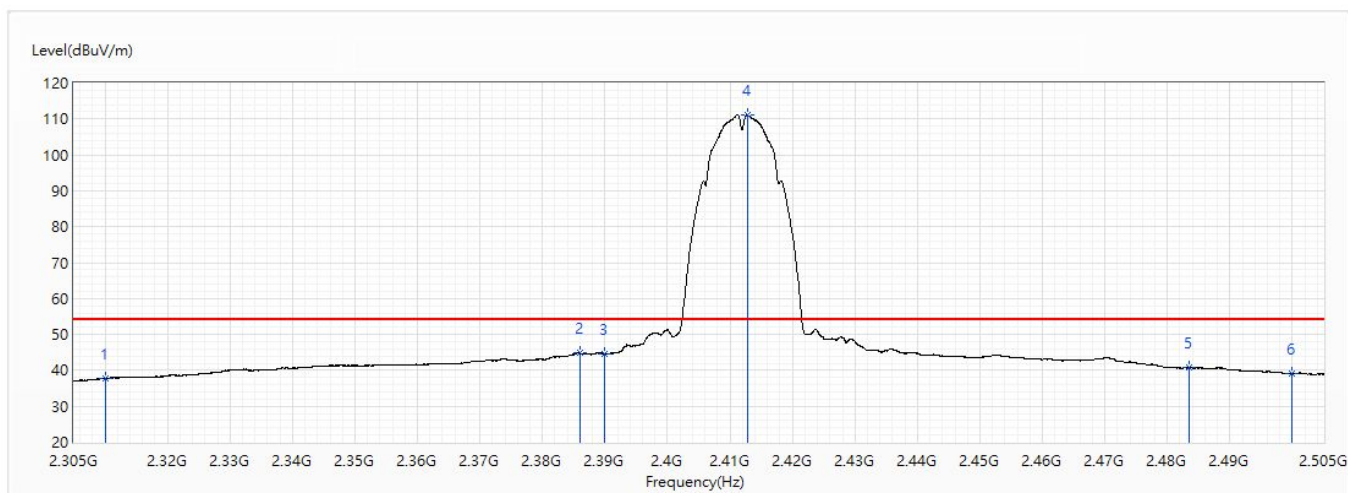


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.69	54.00	-16.31	24.54	13.15	AV
2	2385.95	44.75	54.00	-9.25	31.08	13.67	AV
3	2390	44.65	54.00	-9.35	30.95	13.70	AV
! 4	2412.75	111.29	54.00	57.29	97.42	13.87	AV
5	2483.5	40.75	54.00	-13.25	26.39	14.36	AV
6	2500	39.06	54.00	-14.94	24.58	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

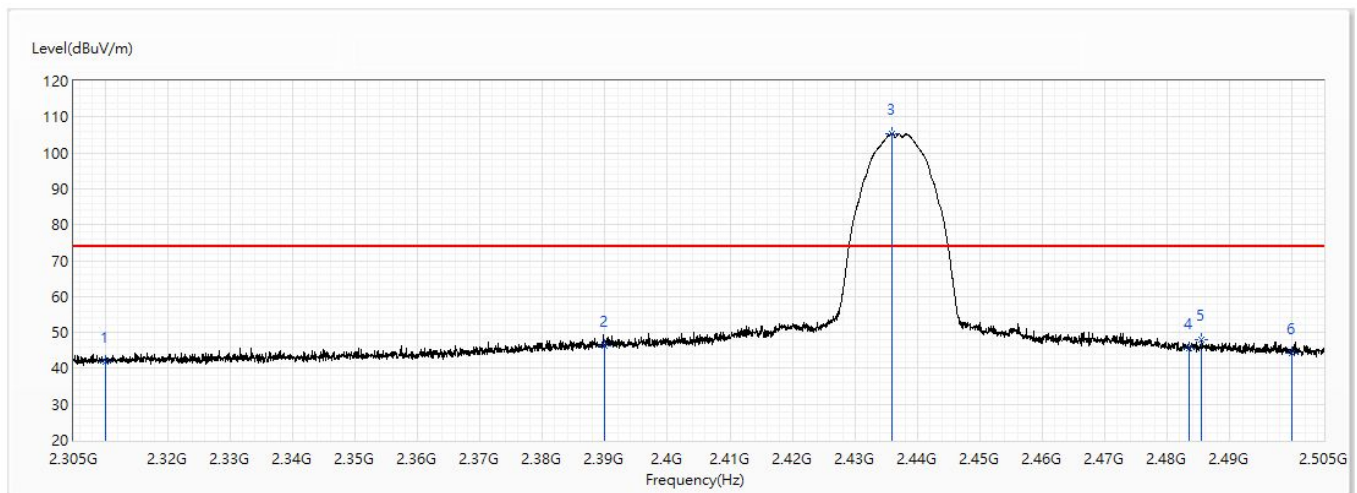


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.93	74.00	-32.07	28.78	13.15	PK
2	2390	46.21	74.00	-27.79	32.51	13.70	PK
! 3	2435.9	105.27	74.00	31.27	91.25	14.02	PK
4	2483.5	45.71	74.00	-28.29	31.35	14.36	PK
5	2485.5	48.07	74.00	-25.93	33.69	14.38	PK
6	2500	44.12	74.00	-29.88	29.64	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

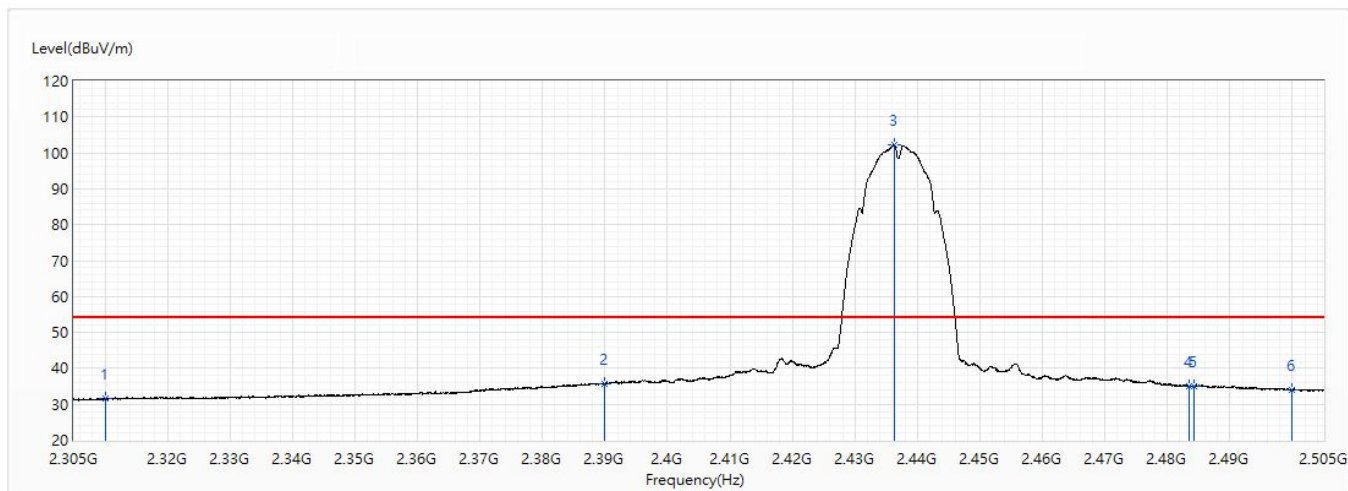


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	31.48	54.00	-22.52	18.33	13.15	AV
2	2390	35.68	54.00	-18.32	21.98	13.70	AV
! 3	2436.3	102.27	54.00	48.27	88.23	14.04	AV
4	2483.5	35.14	54.00	-18.86	20.78	14.36	AV
5	2484.3	35.05	54.00	-18.95	20.69	14.36	AV
6	2500	34.02	54.00	-19.98	19.54	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

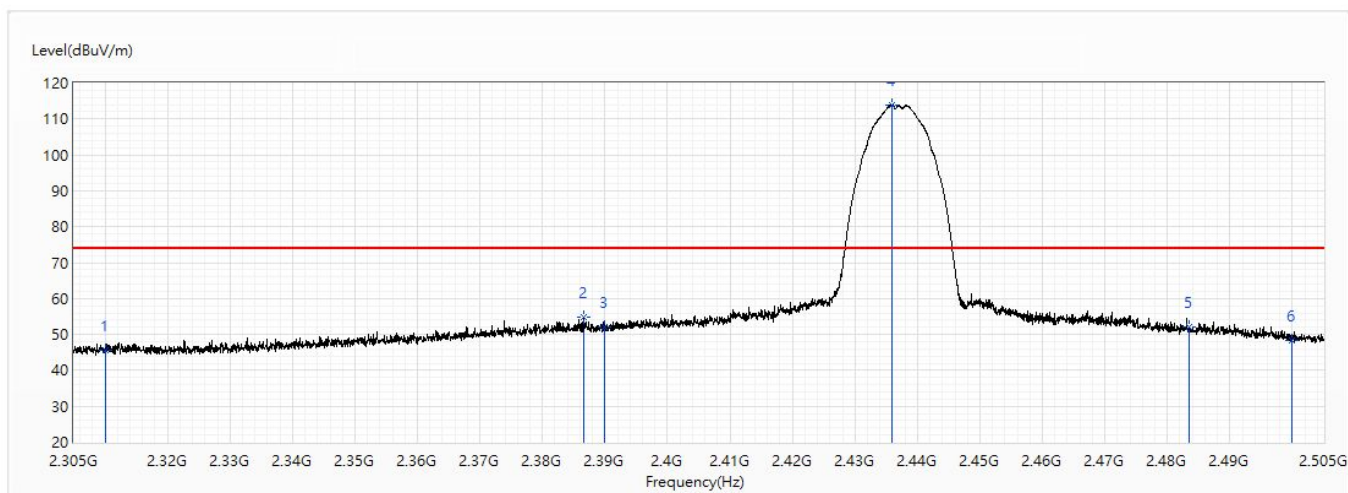


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	45.49	74.00	-28.51	32.34	13.15	PK
2	2386.55	54.92	74.00	-19.08	41.24	13.68	PK
3	2390	52.06	74.00	-21.94	38.36	13.70	PK
! 4	2435.9	113.83	74.00	39.83	99.81	14.02	PK
5	2483.5	51.93	74.00	-22.07	37.57	14.36	PK
6	2500	48.29	74.00	-25.71	33.81	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

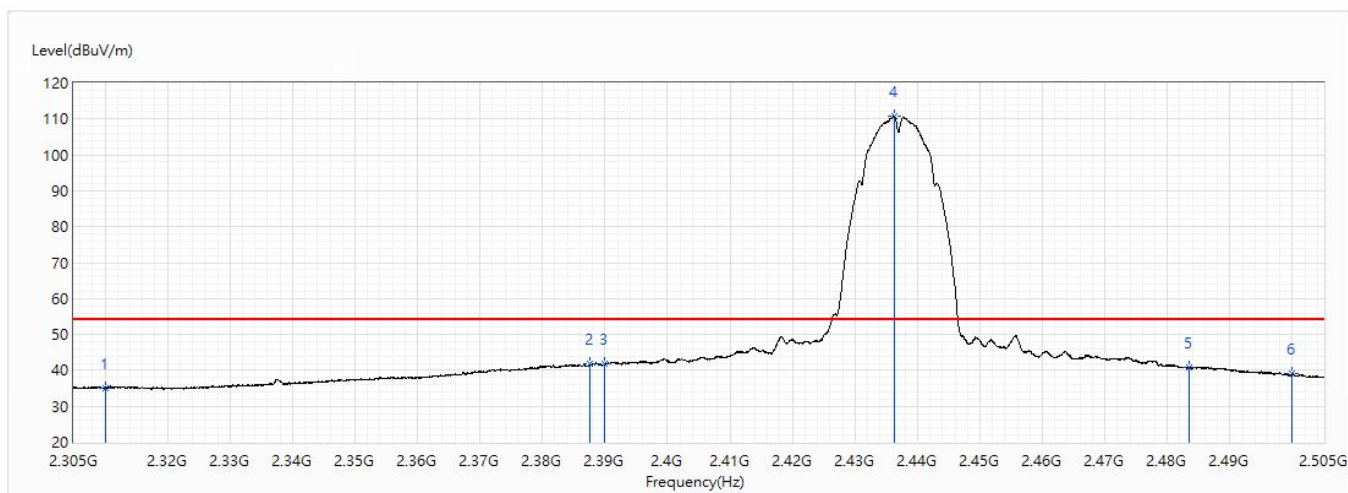


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	35.16	54.00	-18.84	22.01	13.15	AV
2	2387.65	41.71	54.00	-12.29	28.01	13.70	AV
3	2390	41.73	54.00	-12.27	28.03	13.70	AV
! 4	2436.3	110.78	54.00	56.78	96.74	14.04	AV
5	2483.5	40.69	54.00	-13.31	26.33	14.36	AV
6	2500	39.06	54.00	-14.94	24.58	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

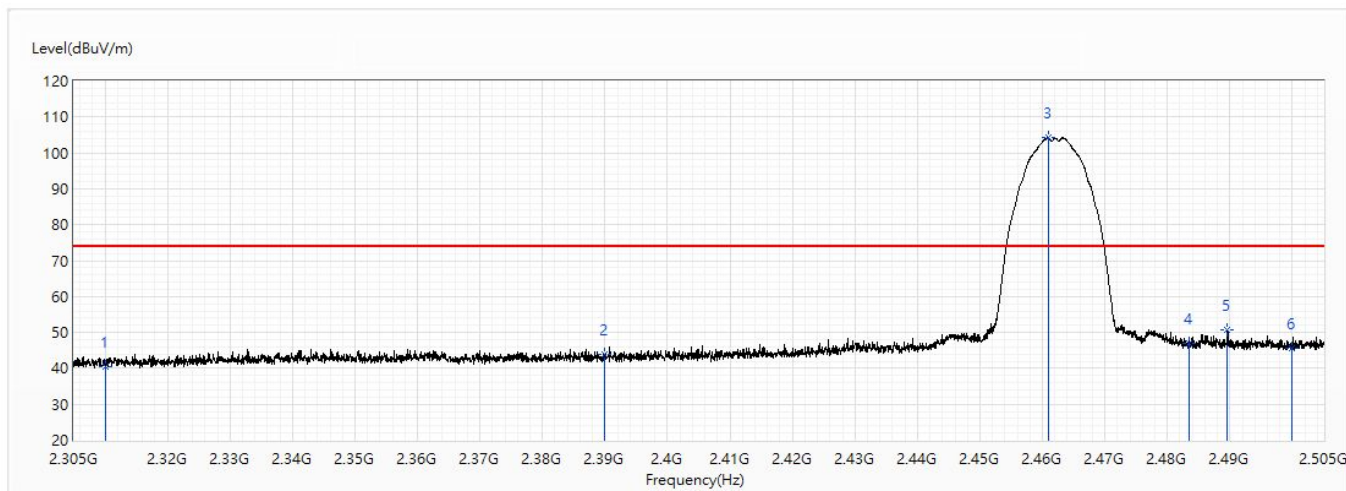


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	40.40	74.00	-33.60	27.25	13.15	PK
2	2390	43.76	74.00	-30.24	30.06	13.70	PK
! 3	2460.95	104.21	74.00	30.21	90.00	14.21	PK
4	2483.5	47.12	74.00	-26.88	32.76	14.36	PK
5	2489.6	50.57	74.00	-23.43	36.17	14.40	PK
6	2500	45.67	74.00	-28.33	31.19	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

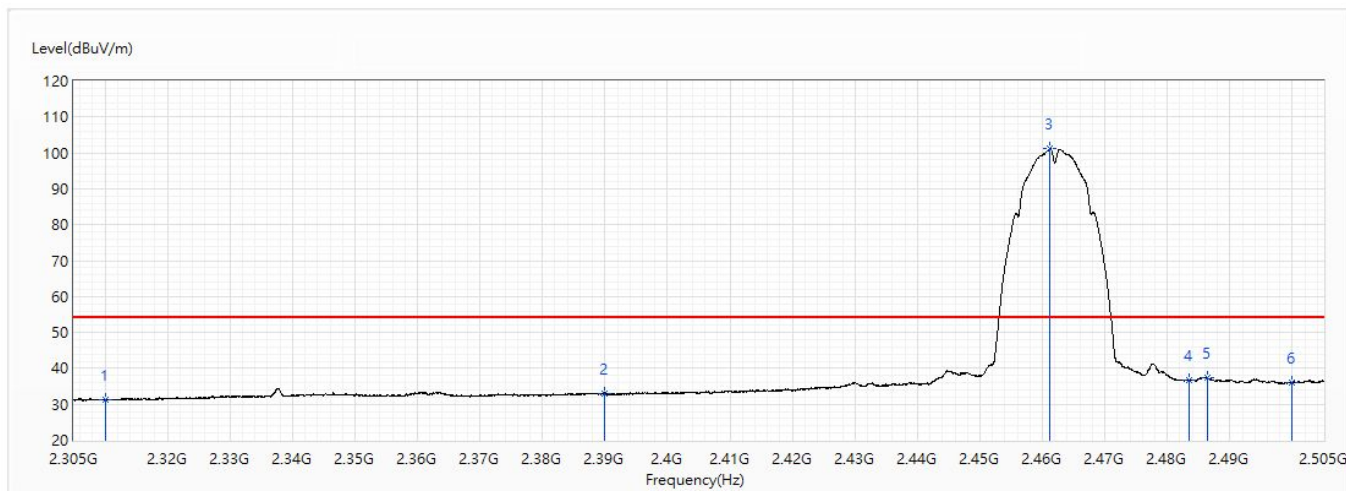


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	31.15	54.00	-22.85	18.00	13.15	AV
2	2390	33.05	54.00	-20.95	19.35	13.70	AV
! 3	2461.25	101.21	54.00	47.21	87.00	14.21	AV
4	2483.5	36.84	54.00	-17.16	22.48	14.36	AV
5	2486.4	37.37	54.00	-16.63	22.98	14.39	AV
6	2500	36.03	54.00	-17.97	21.55	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

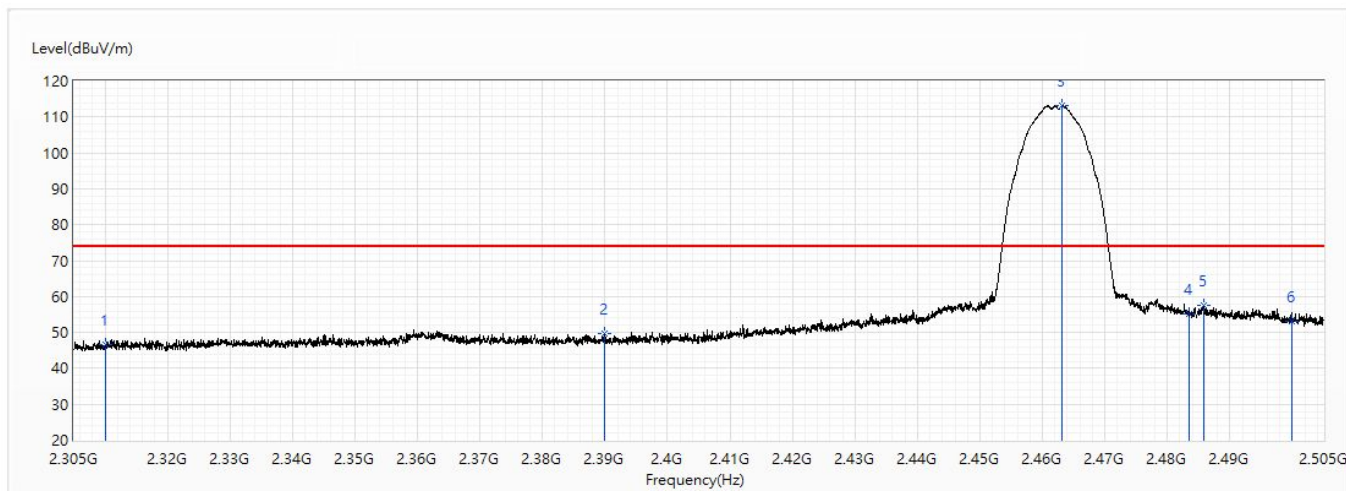


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	46.61	74.00	-27.39	33.46	13.15	PK
2	2390	49.59	74.00	-24.41	35.89	13.70	PK
! 3	2463.15	113.11	74.00	39.11	98.89	14.22	PK
4	2483.5	55.04	74.00	-18.96	40.68	14.36	PK
5	2485.75	57.49	74.00	-16.51	43.11	14.38	PK
6	2500	53.15	74.00	-20.85	38.67	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11b_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

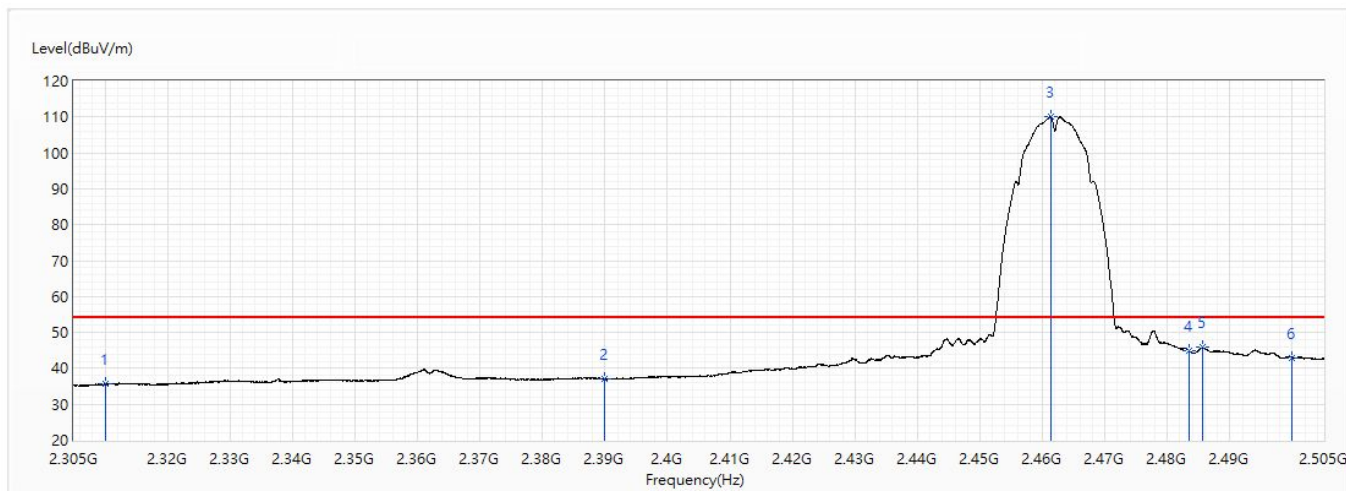


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	35.60	54.00	-18.40	22.45	13.15	AV
2	2390	36.99	54.00	-17.01	23.29	13.70	AV
! 3	2461.3	110.15	54.00	56.15	95.94	14.21	AV
4	2483.5	44.98	54.00	-9.02	30.62	14.36	AV
5	2485.55	45.79	54.00	-8.21	31.41	14.38	AV
6	2500	43.03	54.00	-10.97	28.55	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

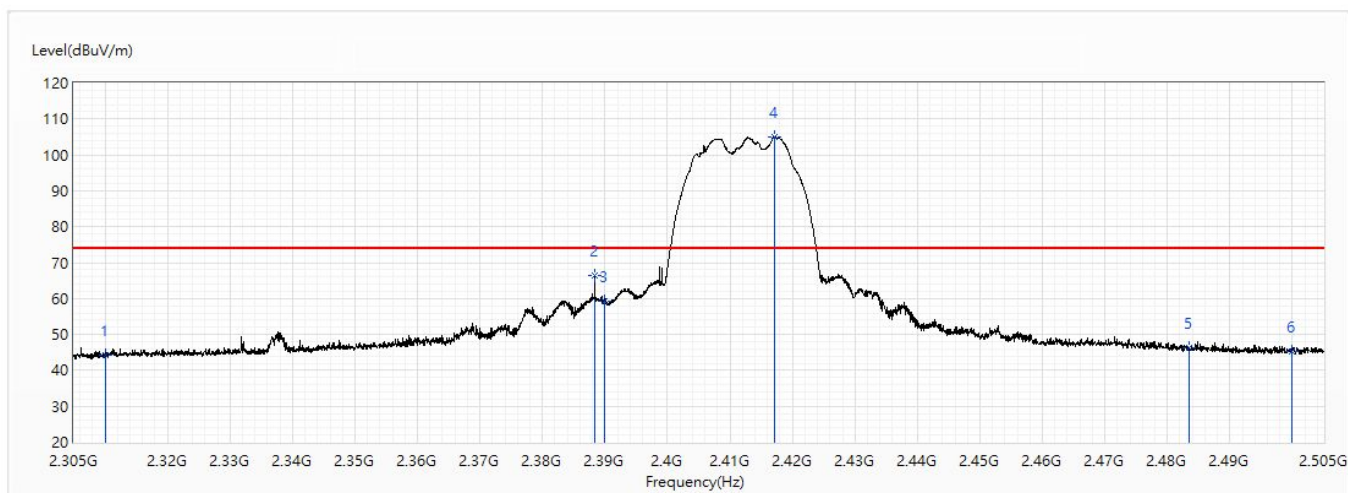


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	44.09	74.00	-29.91	30.94	13.15	PK
2	2388.35	66.32	74.00	-7.68	52.62	13.70	PK
3	2390	59.17	74.00	-14.83	45.47	13.70	PK
! 4	2417.15	104.99	74.00	30.99	91.10	13.89	PK
5	2483.5	46.17	74.00	-27.83	31.81	14.36	PK
6	2500	45.28	74.00	-28.72	30.80	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

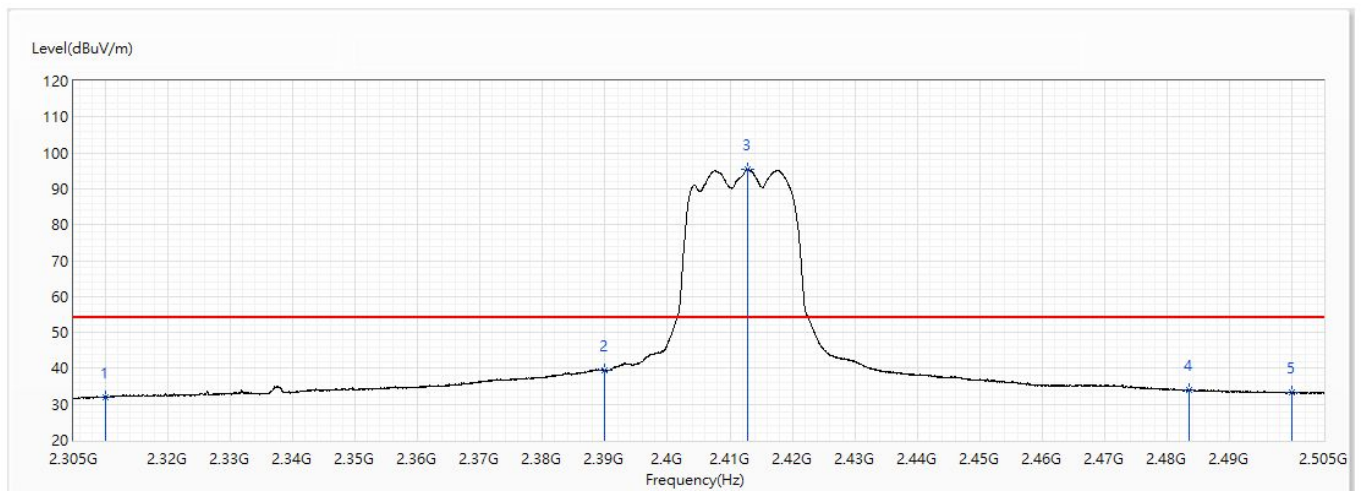


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	32.01	54.00	-21.99	18.86	13.15	AV
2	2390	39.40	54.00	-14.60	25.70	13.70	AV
! 3	2412.75	95.37	54.00	41.37	81.50	13.87	AV
4	2483.5	34.06	54.00	-19.94	19.70	14.36	AV
5	2500	33.32	54.00	-20.68	18.84	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

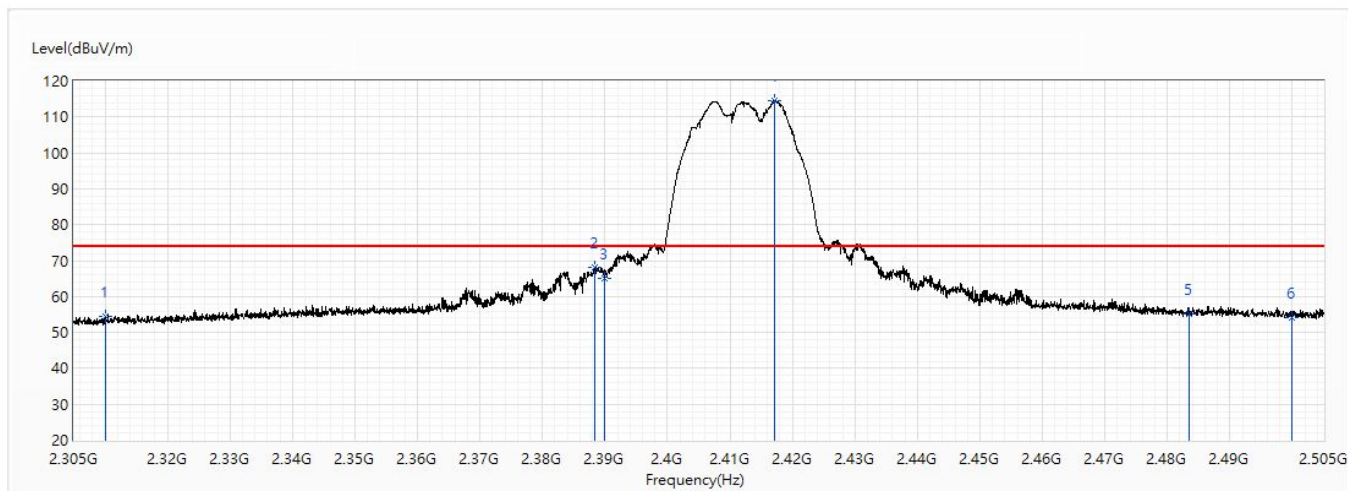


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	54.33	74.00	-19.67	41.18	13.15	PK
2	2388.4	67.97	74.00	-6.03	54.27	13.70	PK
3	2390	64.91	74.00	-9.09	51.21	13.70	PK
! 4	2417.05	114.60	74.00	40.60	100.71	13.89	PK
5	2483.5	55.04	74.00	-18.96	40.68	14.36	PK
6	2500	54.02	74.00	-19.98	39.54	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

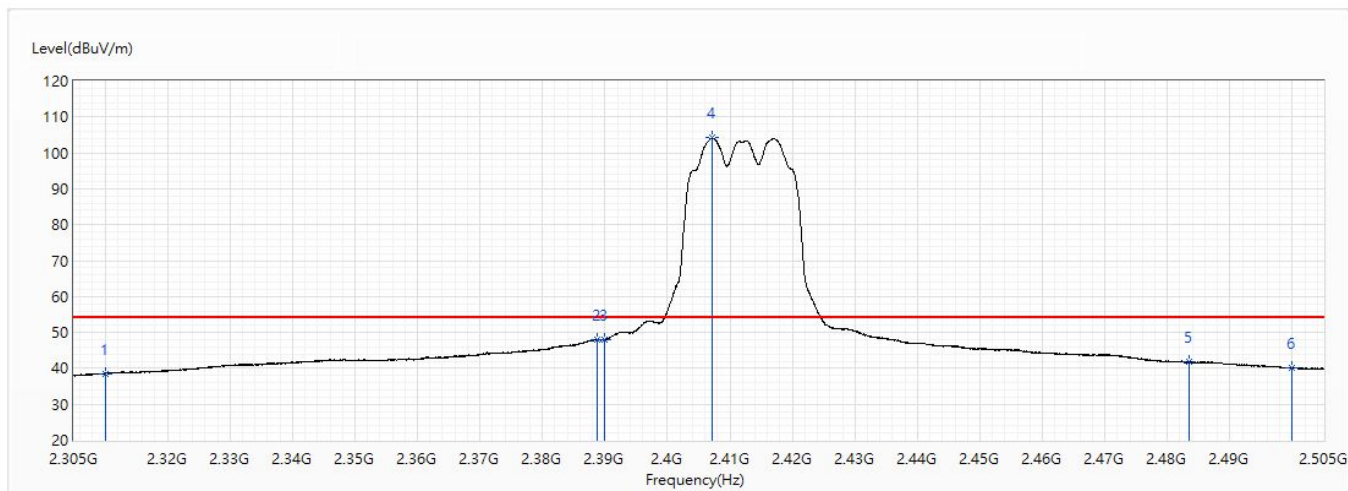


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.48	54.00	-15.52	25.33	13.15	AV
2	2388.85	48.04	54.00	-5.96	34.34	13.70	AV
3	2390	48.00	54.00	-6.00	34.30	13.70	AV
! 4	2407.15	104.14	54.00	50.14	90.31	13.83	AV
5	2483.5	41.78	54.00	-12.22	27.42	14.36	AV
6	2500	40.01	54.00	-13.99	25.53	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

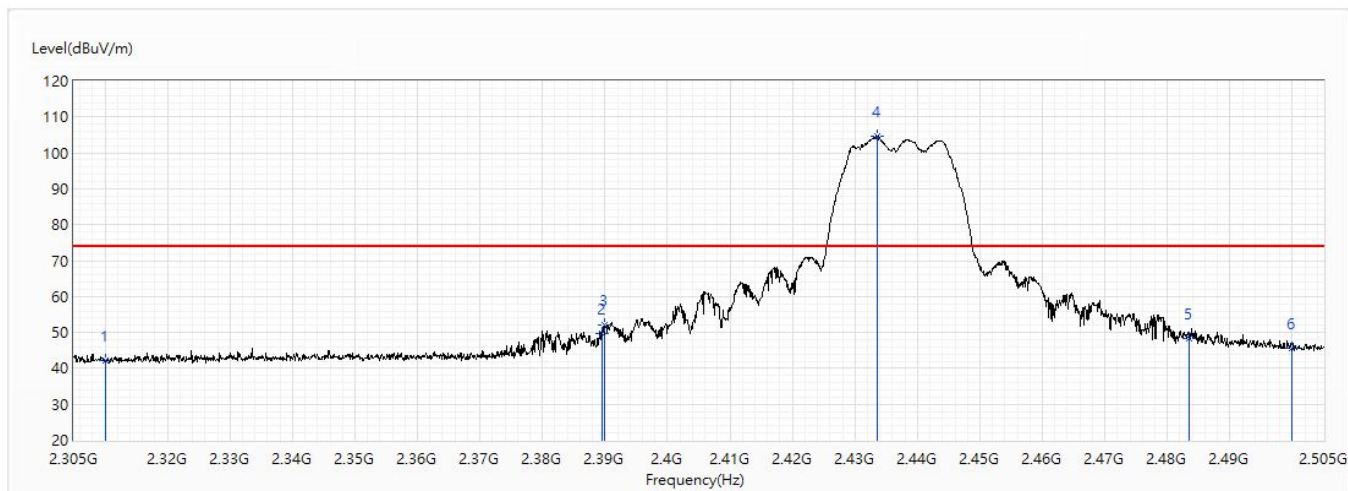


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	42.15	74.00	-31.85	29.00	13.15	PK
2	2389.6	49.62	74.00	-24.38	35.92	13.70	PK
3	2390	52.05	74.00	-21.95	38.35	13.70	PK
! 4	2433.6	104.78	74.00	30.78	90.77	14.01	PK
5	2483.5	48.35	74.00	-25.65	33.99	14.36	PK
6	2500	45.74	74.00	-28.26	31.26	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

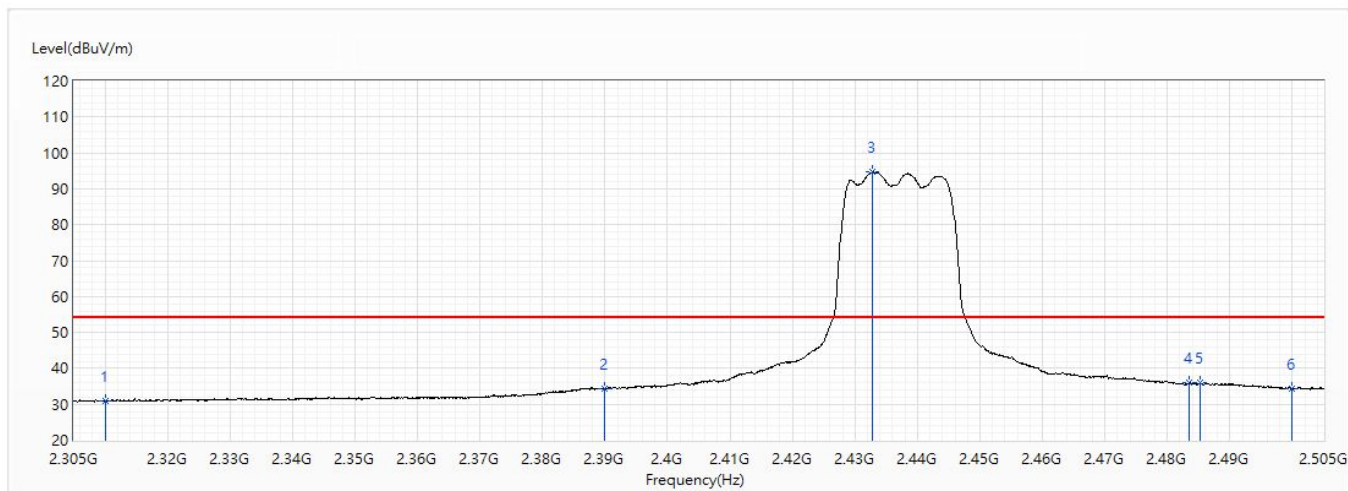


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	30.83	54.00	-23.17	17.68	13.15	AV
2	2390	34.30	54.00	-19.70	20.60	13.70	AV
! 3	2432.7	94.60	54.00	40.60	80.59	14.01	AV
4	2483.5	35.88	54.00	-18.12	21.52	14.36	AV
5	2485.3	35.96	54.00	-18.04	21.59	14.37	AV
6	2500	34.38	54.00	-19.62	19.90	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

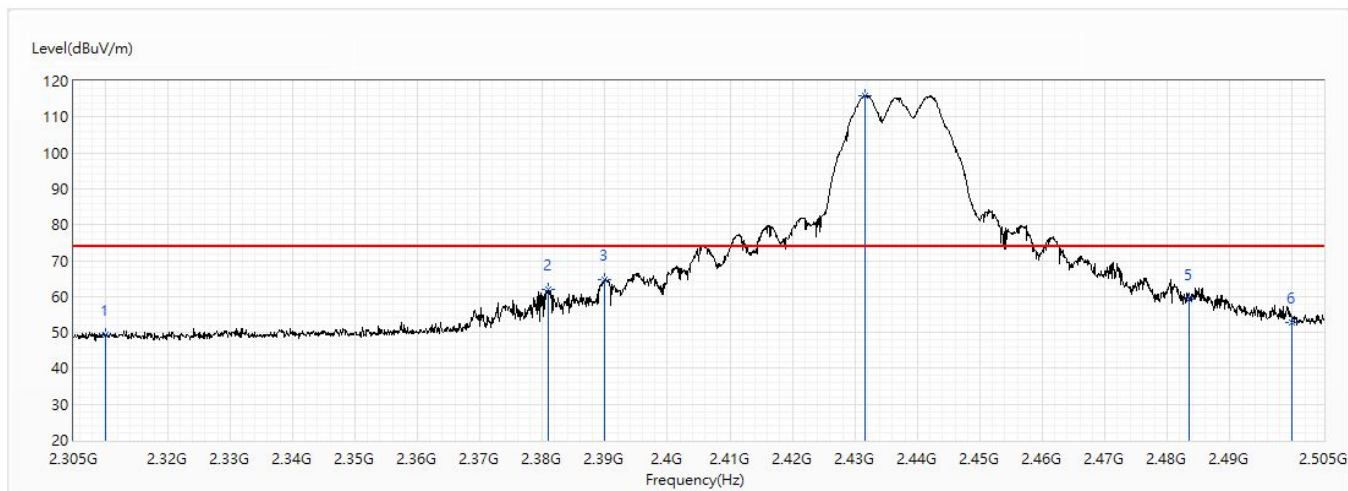


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.20	74.00	-24.80	36.05	13.15	PK
2	2380.9	61.98	74.00	-12.02	48.33	13.65	PK
3	2390	64.75	74.00	-9.25	51.05	13.70	PK
! 4	2431.7	115.92	74.00	41.92	101.92	14.00	PK
5	2483.5	59.32	74.00	-14.68	44.96	14.36	PK
6	2500	52.87	74.00	-21.13	38.39	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch6_2.437G	Humidity (%RH)	58.0

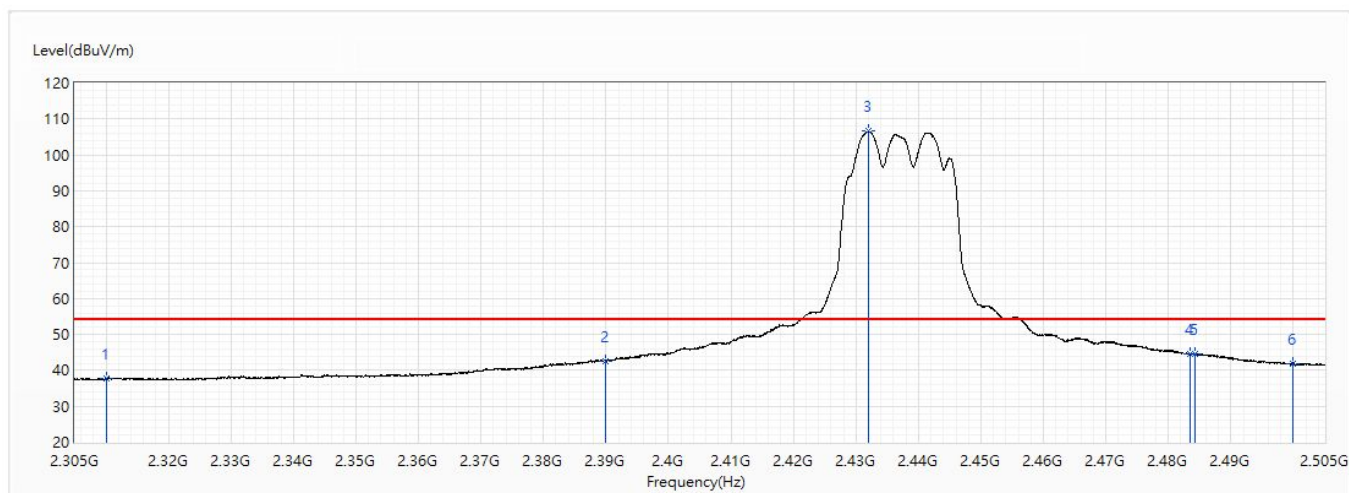


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.66	54.00	-16.34	24.51	13.15	AV
2	2390	42.59	54.00	-11.41	28.89	13.70	AV
! 3	2432	106.55	54.00	52.55	92.54	14.01	AV
4	2483.5	44.49	54.00	-9.51	30.13	14.36	AV
5	2484.3	44.53	54.00	-9.47	30.17	14.36	AV
6	2500	41.90	54.00	-12.10	27.42	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

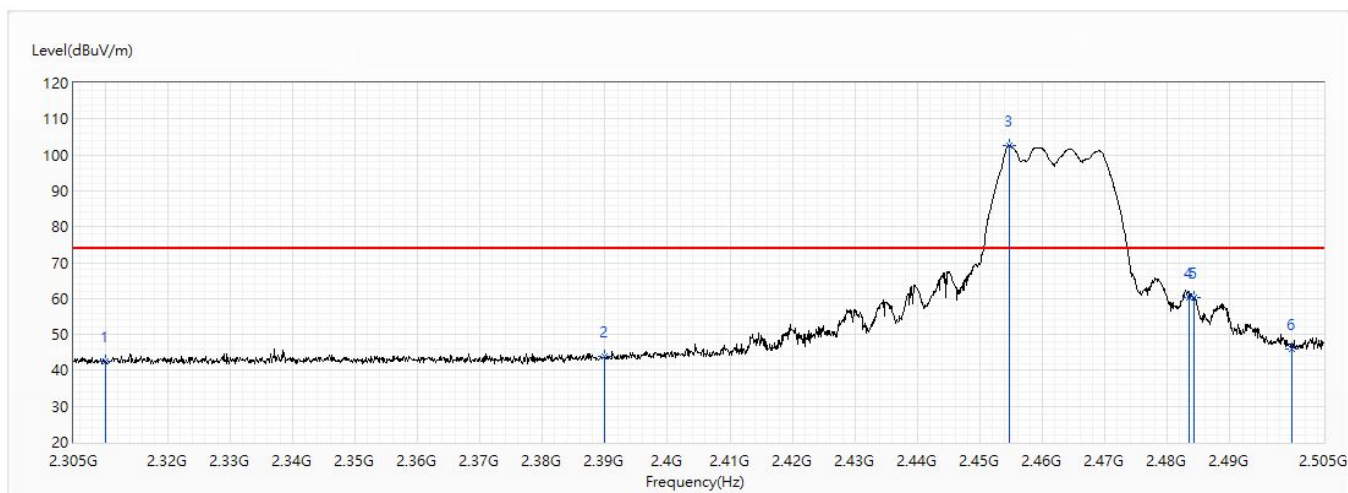


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	42.52	74.00	-31.48	29.37	13.15	PK
2	2390	43.80	74.00	-30.20	30.10	13.70	PK
! 3	2454.7	102.74	74.00	28.74	88.57	14.17	PK
4	2483.5	60.41	74.00	-13.59	46.05	14.36	PK
5	2484.2	60.12	74.00	-13.88	45.76	14.36	PK
6	2500	45.95	74.00	-28.05	31.47	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

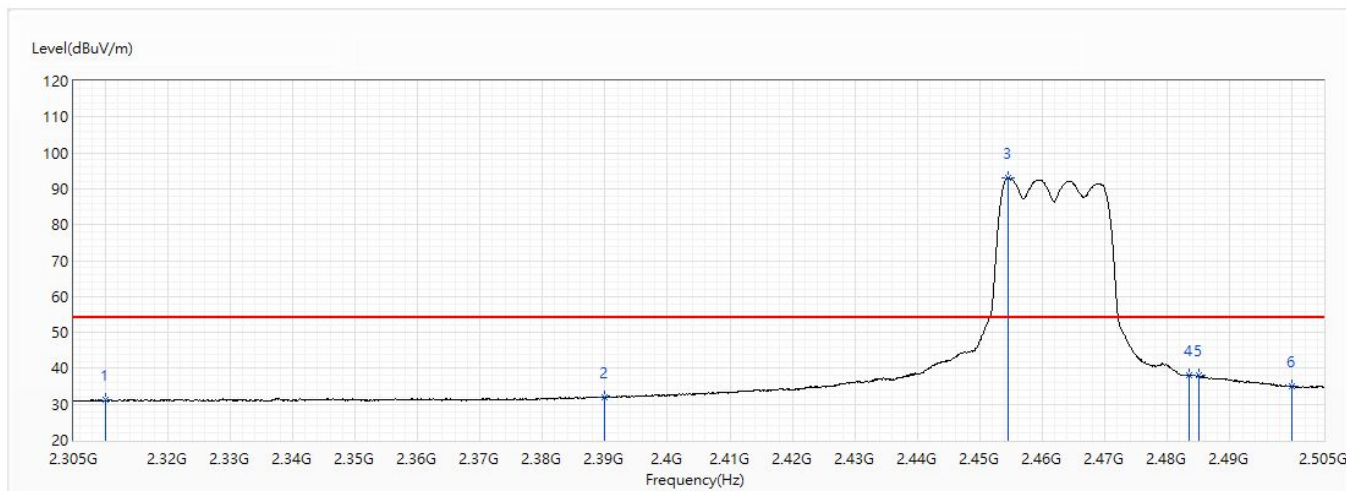


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	31.10	54.00	-22.90	17.95	13.15	AV
2	2390	31.98	54.00	-22.02	18.28	13.70	AV
! 3	2454.5	93.12	54.00	39.12	78.96	14.16	AV
4	2483.5	38.14	54.00	-15.86	23.78	14.36	AV
5	2485	37.97	54.00	-16.03	23.60	14.37	AV
6	2500	34.88	54.00	-19.12	20.40	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

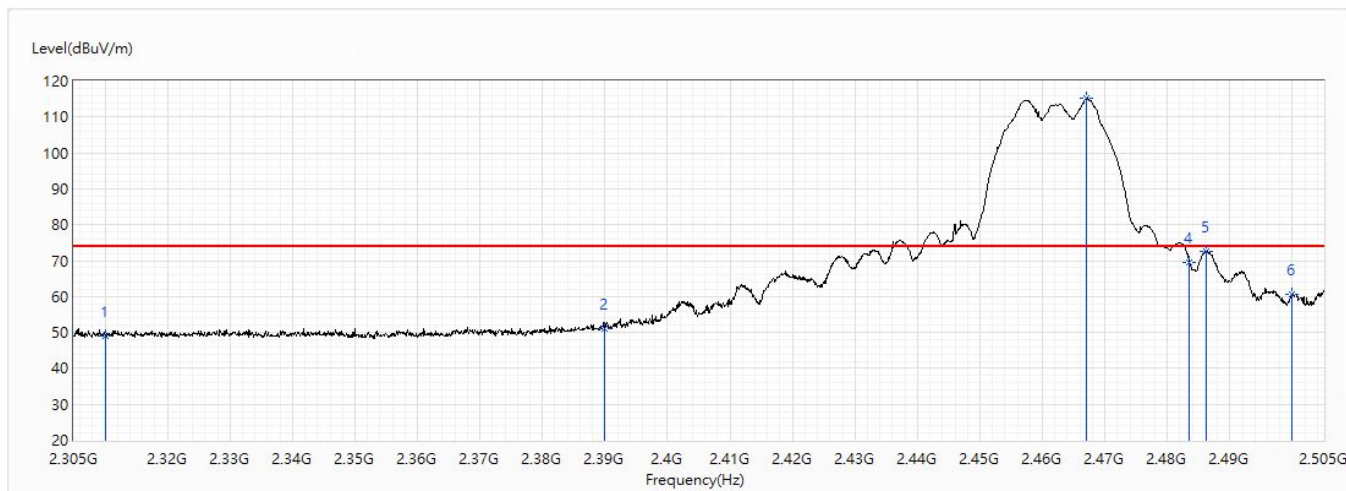


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.00	74.00	-25.00	35.85	13.15	PK
2	2390	51.12	74.00	-22.88	37.42	13.70	PK
! 3	2467.1	115.10	74.00	41.10	100.85	14.25	PK
4	2483.5	69.49	74.00	-4.51	55.13	14.36	PK
5	2486.2	72.52	74.00	-1.48	58.13	14.39	PK
6	2500	60.62	74.00	-13.38	46.14	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11g_BW20M_Ant0+1_Ch11_2.462G	Humidity (%RH)	58.0

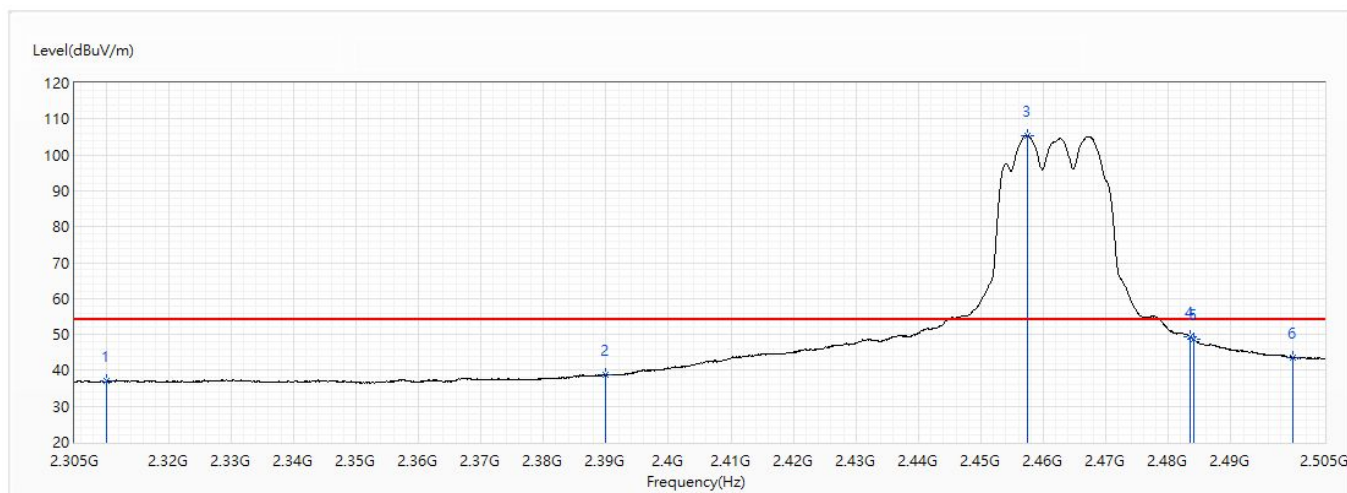


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	36.90	54.00	-17.10	23.75	13.15	AV
2	2390	38.70	54.00	-15.30	25.00	13.70	AV
! 3	2457.4	105.46	54.00	51.46	91.28	14.18	AV
4	2483.5	49.45	54.00	-4.55	35.09	14.36	AV
5	2484.1	48.61	54.00	-5.39	34.25	14.36	AV
6	2500	43.56	54.00	-10.44	29.08	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11n_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

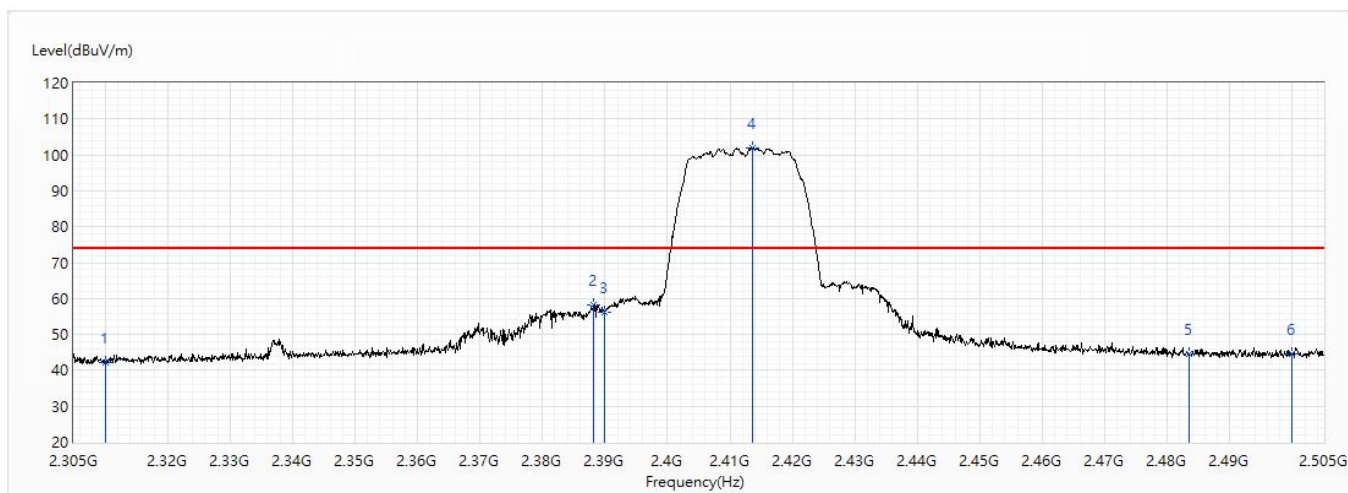


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	42.28	74.00	-31.72	29.13	13.15	PK
2	2388.2	58.31	74.00	-15.69	44.61	13.70	PK
3	2390	56.34	74.00	-17.66	42.64	13.70	PK
! 4	2413.6	102.00	74.00	28.00	88.13	13.87	PK
5	2483.5	44.48	74.00	-29.52	30.12	14.36	PK
6	2500	44.49	74.00	-29.51	30.01	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11n_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

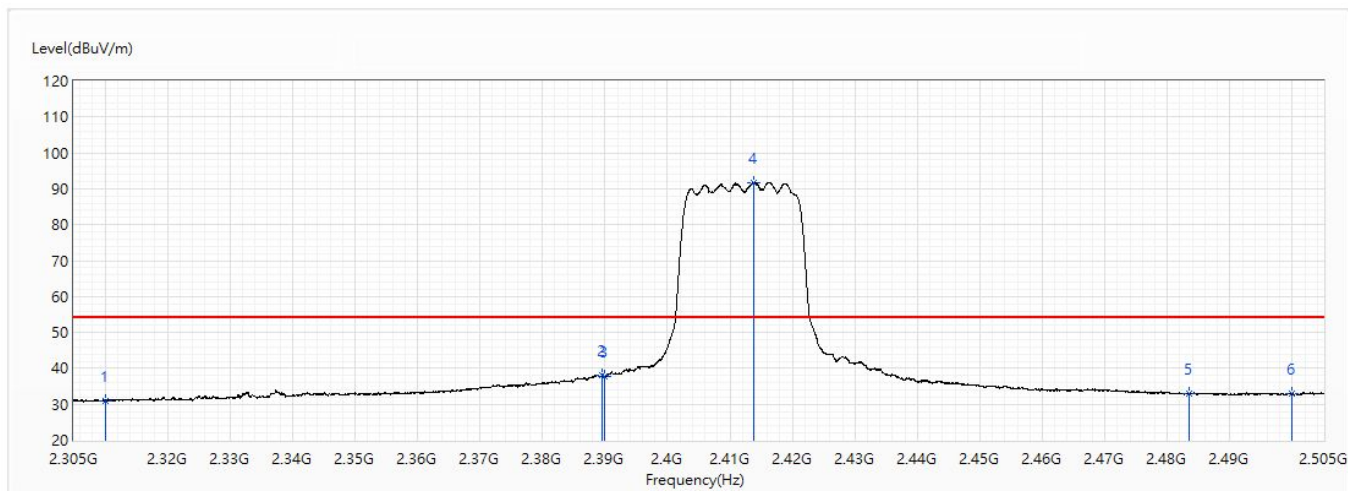


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	31.06	54.00	-22.94	17.91	13.15	AV
2	2389.6	37.96	54.00	-16.04	24.26	13.70	AV
3	2390	37.85	54.00	-16.15	24.15	13.70	AV
! 4	2413.9	91.83	54.00	37.83	77.95	13.88	AV
5	2483.5	32.85	54.00	-21.15	18.49	14.36	AV
6	2500	32.90	54.00	-21.10	18.42	14.48	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/11
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11n_BW20M_Ant0+1_Ch1_2.412G	Humidity (%RH)	58.0

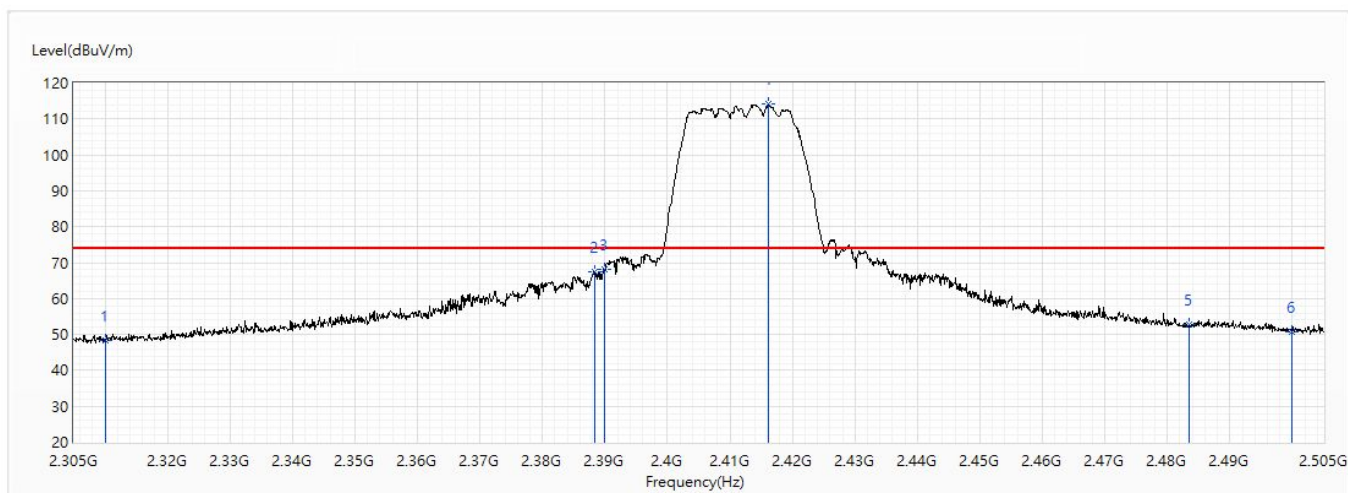

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	48.24	74.00	-25.76	35.09	13.15	PK
2	2388.4	67.55	74.00	-6.45	53.85	13.70	PK
3	2390	68.20	74.00	-5.80	54.50	13.70	PK
! 4	2416.1	114.09	74.00	40.09	100.20	13.89	PK
5	2483.5	52.68	74.00	-21.32	38.32	14.36	PK
6	2500	50.73	74.00	-23.27	36.25	14.48	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.