


|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch1_2.412G | Humidity (%RH)   | 58.0      |

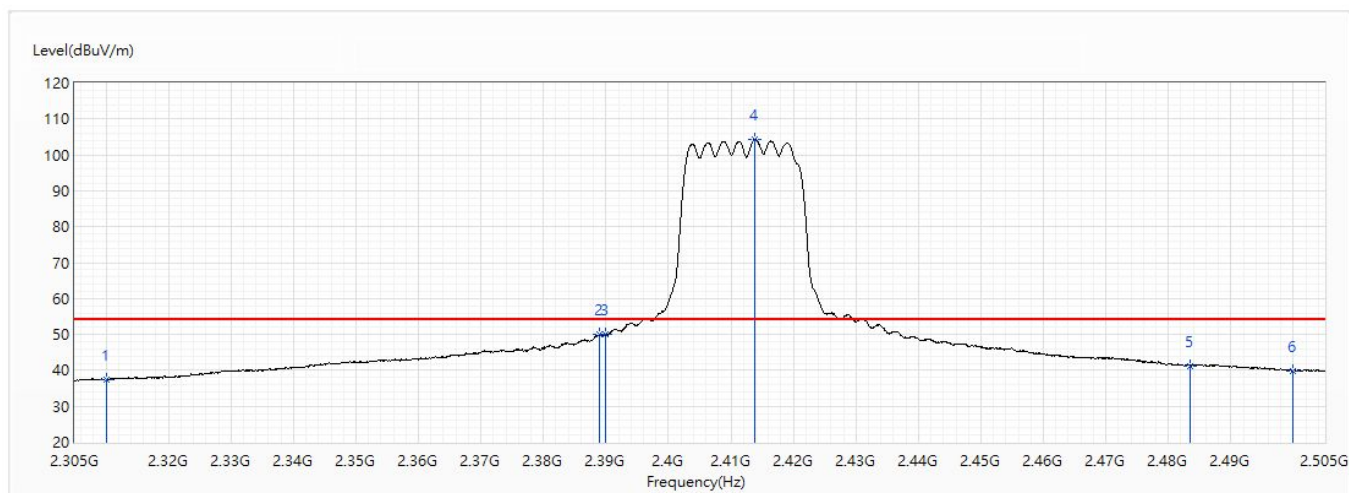


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 37.45                   | 54.00          | -16.55      | 24.30                | 13.15                 | AV            |
| 2   | 2388.9          | 50.08                   | 54.00          | -3.92       | 36.38                | 13.70                 | AV            |
| 3   | 2390            | 49.89                   | 54.00          | -4.11       | 36.19                | 13.70                 | AV            |
| ! 4 | 2413.9          | 104.35                  | 54.00          | 50.35       | 90.47                | 13.88                 | AV            |
| 5   | 2483.5          | 41.33                   | 54.00          | -12.67      | 26.97                | 14.36                 | AV            |
| 6   | 2500            | 39.94                   | 54.00          | -14.06      | 25.46                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

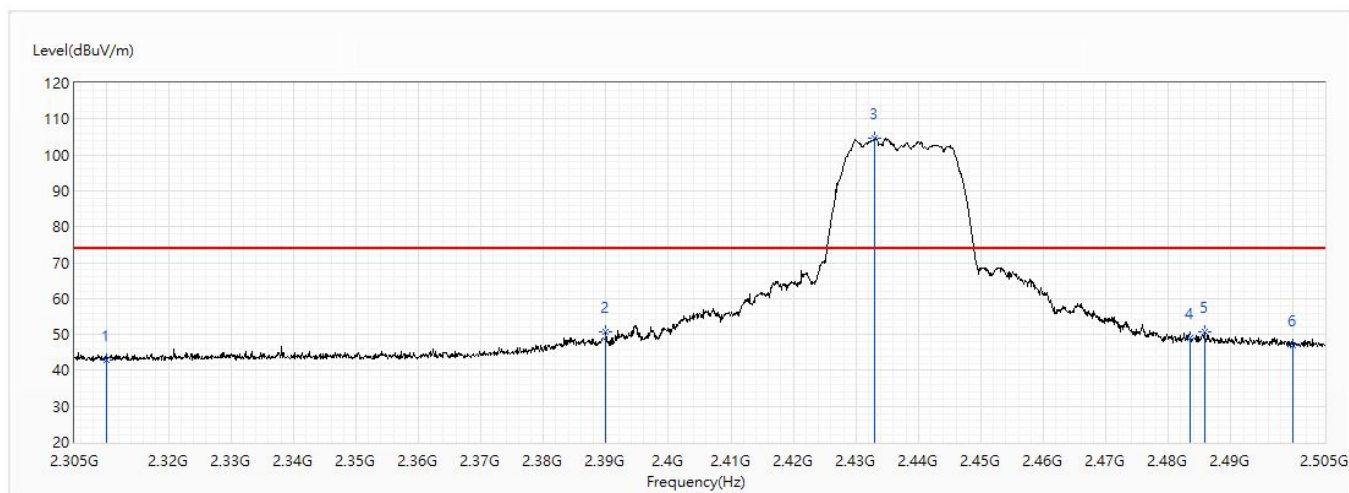


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 42.86                   | 74.00          | -31.14      | 29.71                | 13.15                 | PK            |
| 2   | 2390            | 50.61                   | 74.00          | -23.39      | 36.91                | 13.70                 | PK            |
| ! 3 | 2433            | 104.64                  | 74.00          | 30.64       | 90.63                | 14.01                 | PK            |
| 4   | 2483.5          | 48.88                   | 74.00          | -25.12      | 34.52                | 14.36                 | PK            |
| 5   | 2485.8          | 50.72                   | 74.00          | -23.28      | 36.34                | 14.38                 | PK            |
| 6   | 2500            | 46.85                   | 74.00          | -27.15      | 32.37                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

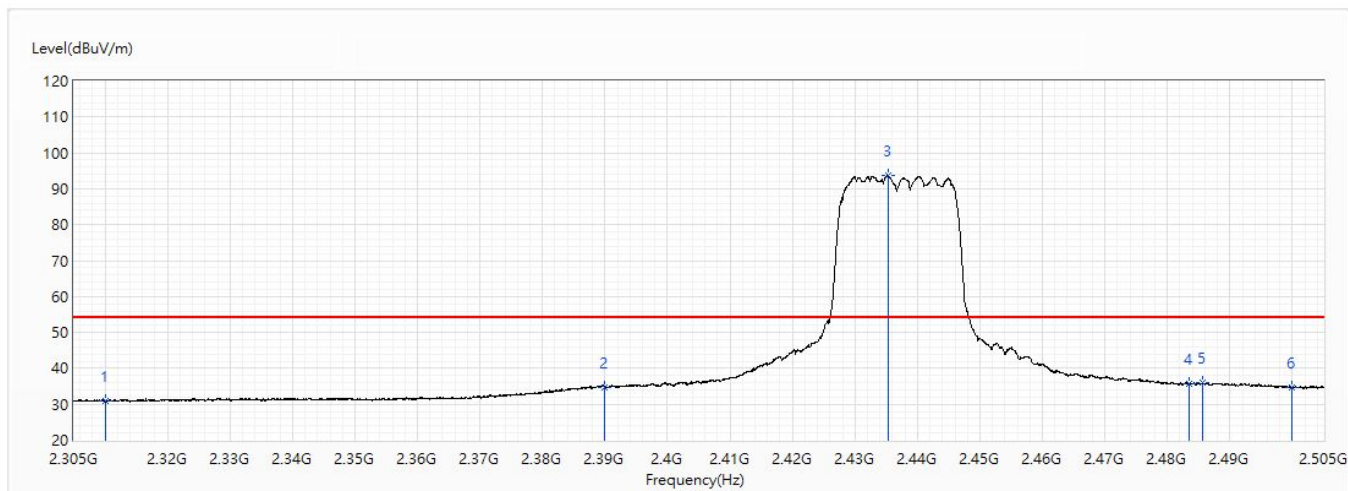


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 30.77                   | 54.00          | -23.23      | 17.62                | 13.15                 | AV            |
| 2   | 2390            | 34.81                   | 54.00          | -19.19      | 21.11                | 13.70                 | AV            |
| ! 3 | 2435.25         | 93.56                   | 54.00          | 39.56       | 79.54                | 14.02                 | AV            |
| 4   | 2483.5          | 35.57                   | 54.00          | -18.43      | 21.21                | 14.36                 | AV            |
| 5   | 2485.7          | 35.94                   | 54.00          | -18.06      | 21.56                | 14.38                 | AV            |
| 6   | 2500            | 34.68                   | 54.00          | -19.32      | 20.20                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

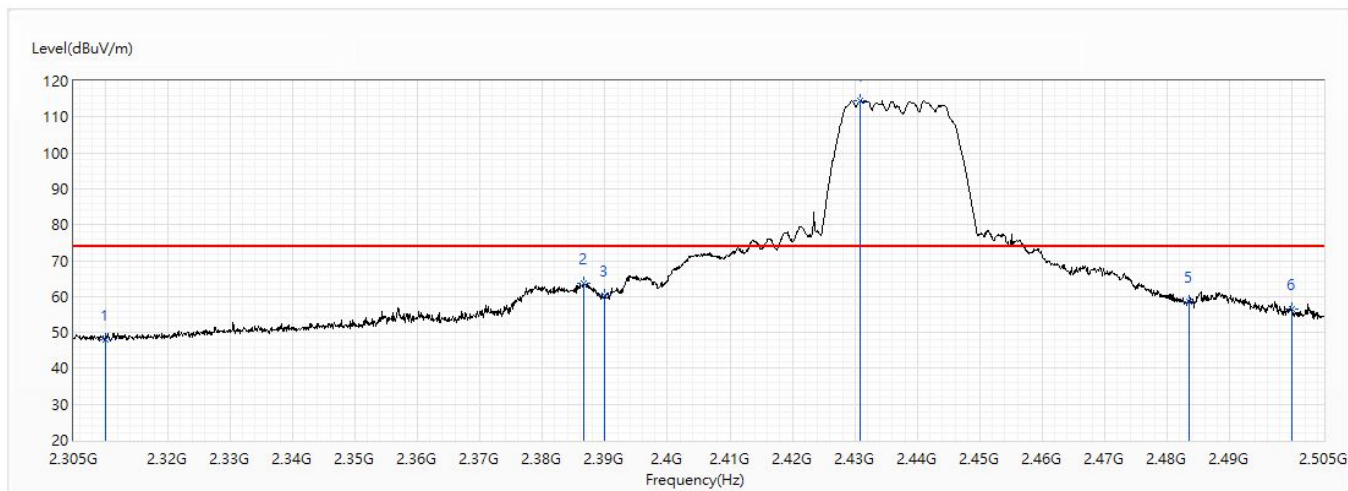


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 47.93                   | 74.00          | -26.07      | 34.78                | 13.15                 | PK            |
| 2   | 2386.7          | 63.81                   | 74.00          | -10.19      | 50.13                | 13.68                 | PK            |
| 3   | 2390            | 60.26                   | 74.00          | -13.74      | 46.56                | 13.70                 | PK            |
| ! 4 | 2430.9          | 114.55                  | 74.00          | 40.55       | 100.55               | 14.00                 | PK            |
| 5   | 2483.5          | 58.48                   | 74.00          | -15.52      | 44.12                | 14.36                 | PK            |
| 6   | 2500            | 56.62                   | 74.00          | -17.38      | 42.14                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

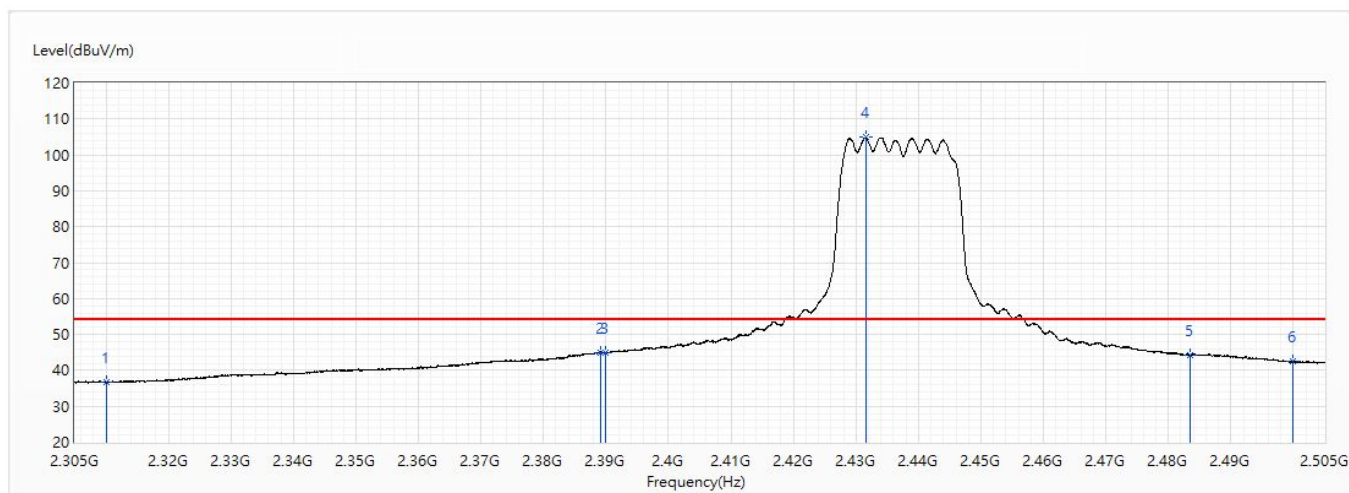


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 36.73                   | 54.00          | -17.27      | 23.58                | 13.15                 | AV            |
| 2   | 2389.2          | 44.87                   | 54.00          | -9.13       | 31.17                | 13.70                 | AV            |
| 3   | 2390            | 44.97                   | 54.00          | -9.03       | 31.27                | 13.70                 | AV            |
| ! 4 | 2431.55         | 104.83                  | 54.00          | 50.83       | 90.83                | 14.00                 | AV            |
| 5   | 2483.5          | 44.31                   | 54.00          | -9.69       | 29.95                | 14.36                 | AV            |
| 6   | 2500            | 42.40                   | 54.00          | -11.60      | 27.92                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

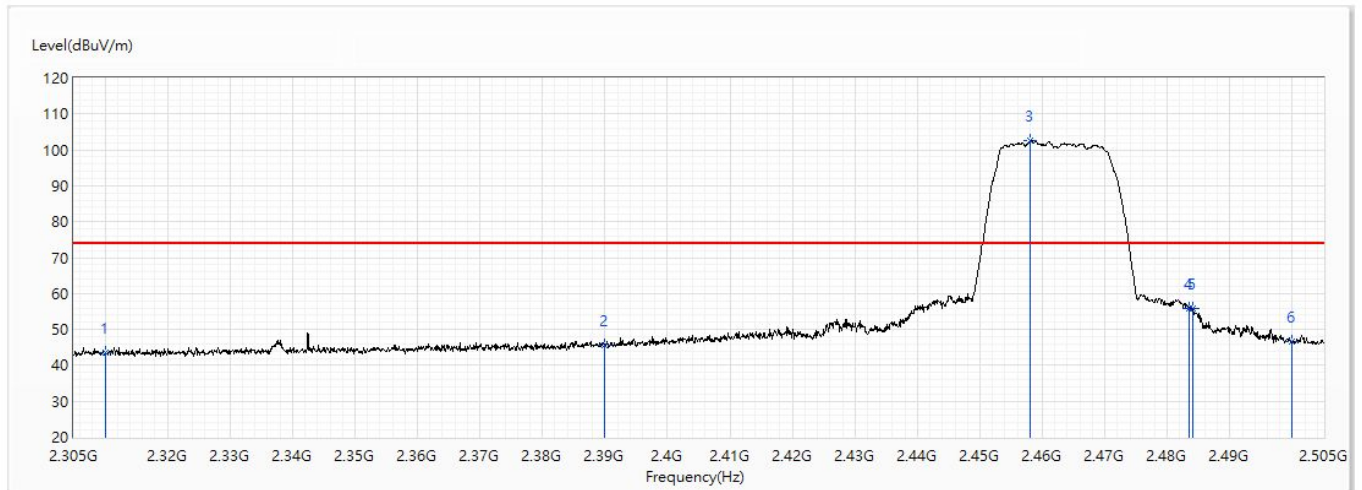


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.64                   | 74.00          | -30.36      | 30.49                | 13.15                 | PK            |
| 2   | 2390            | 45.48                   | 74.00          | -28.52      | 31.78                | 13.70                 | PK            |
| ! 3 | 2458.1          | 102.72                  | 74.00          | 28.72       | 88.54                | 14.18                 | PK            |
| 4   | 2483.5          | 55.94                   | 74.00          | -18.06      | 41.58                | 14.36                 | PK            |
| 5   | 2484.1          | 55.86                   | 74.00          | -18.14      | 41.50                | 14.36                 | PK            |
| 6   | 2500            | 46.48                   | 74.00          | -27.52      | 32.00                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

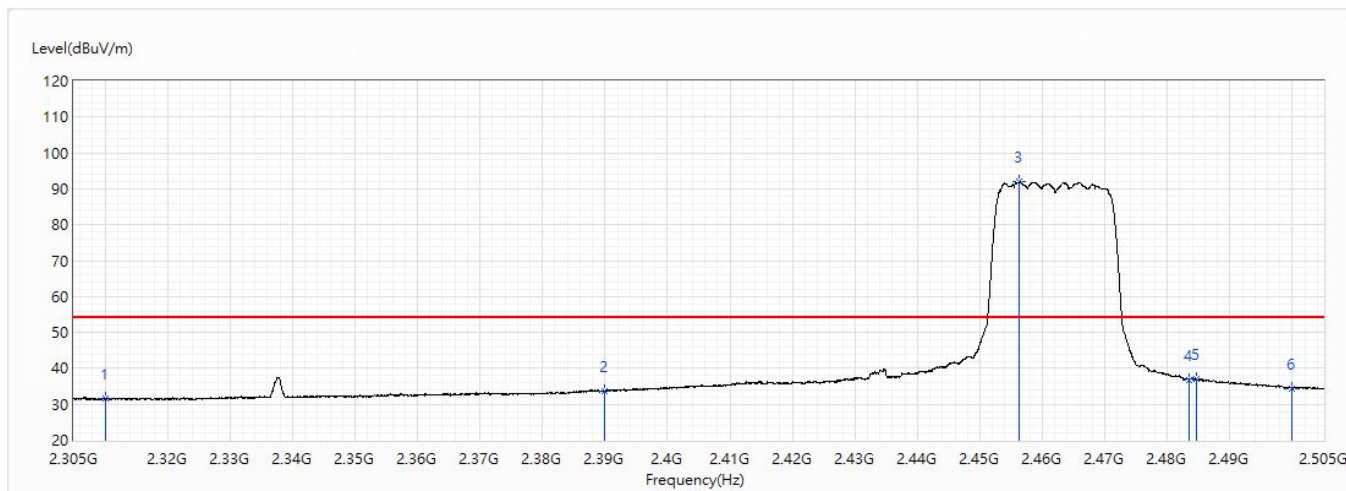


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 31.64                   | 54.00          | -22.36      | 18.49                | 13.15                 | AV            |
| 2   | 2390            | 33.71                   | 54.00          | -20.29      | 20.01                | 13.70                 | AV            |
| ! 3 | 2456.3          | 91.87                   | 54.00          | 37.87       | 77.70                | 14.17                 | AV            |
| 4   | 2483.5          | 36.84                   | 54.00          | -17.16      | 22.48                | 14.36                 | AV            |
| 5   | 2484.7          | 36.90                   | 54.00          | -17.10      | 22.54                | 14.36                 | AV            |
| 6   | 2500            | 34.47                   | 54.00          | -19.53      | 19.99                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

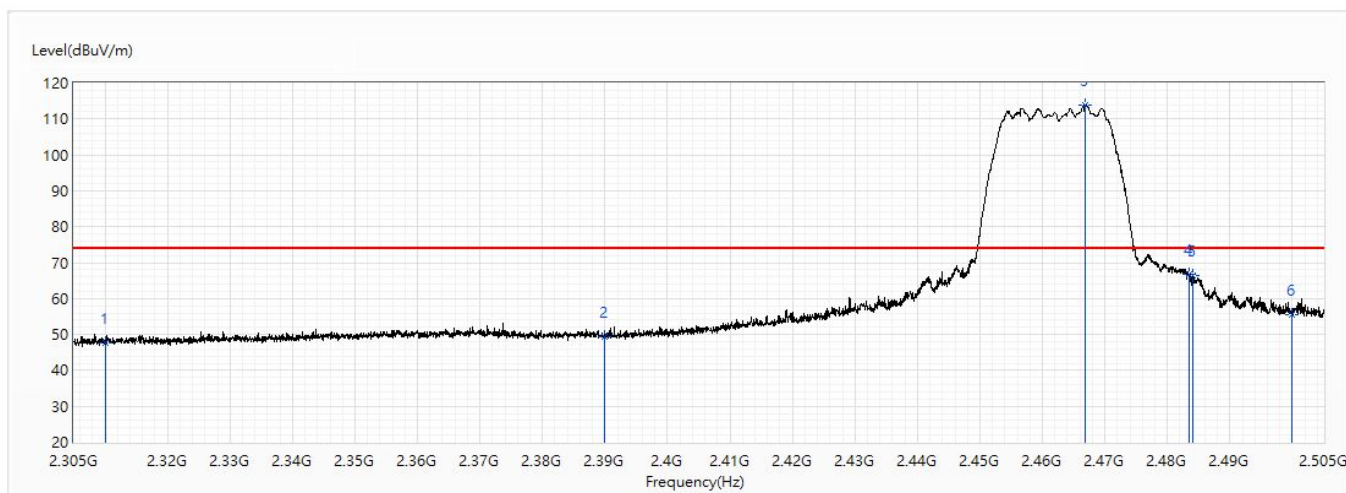


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 47.63                   | 74.00          | -26.37      | 34.48                | 13.15                 | PK            |
| 2   | 2390            | 49.19                   | 74.00          | -24.81      | 35.49                | 13.70                 | PK            |
| ! 3 | 2466.9          | 113.89                  | 74.00          | 39.89       | 99.65                | 14.24                 | PK            |
| 4   | 2483.5          | 66.62                   | 74.00          | -7.38       | 52.26                | 14.36                 | PK            |
| 5   | 2484.15         | 66.52                   | 74.00          | -7.48       | 52.16                | 14.36                 | PK            |
| 6   | 2500            | 55.66                   | 74.00          | -18.34      | 41.18                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

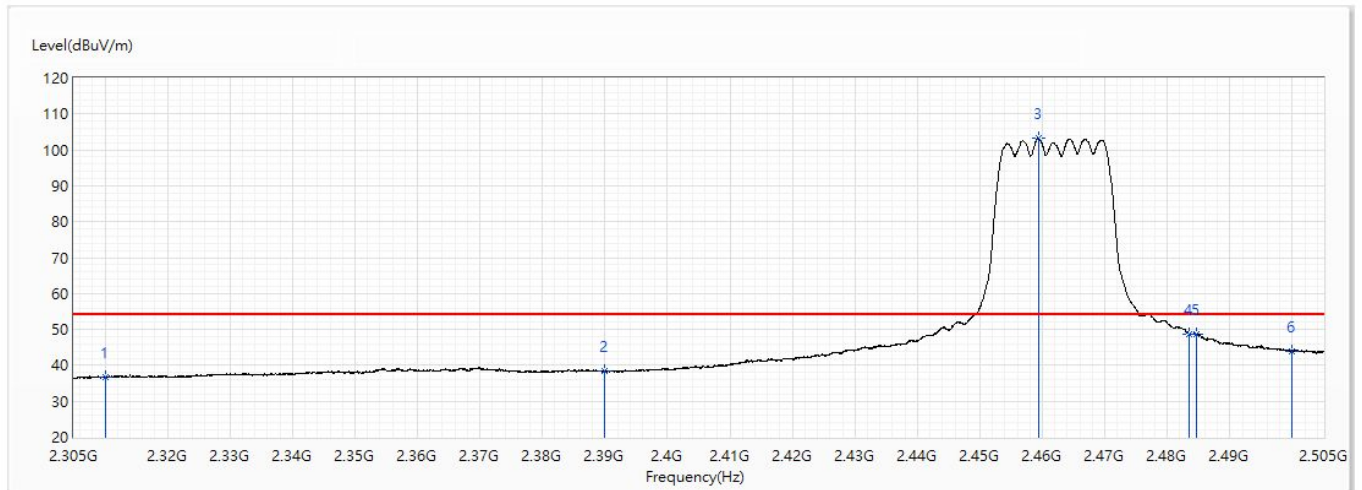


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 36.74                   | 54.00          | -17.26      | 23.59                | 13.15                 | AV            |
| 2   | 2390            | 38.36                   | 54.00          | -15.64      | 24.66                | 13.70                 | AV            |
| ! 3 | 2459.35         | 103.23                  | 54.00          | 49.23       | 89.04                | 14.19                 | AV            |
| 4   | 2483.5          | 48.78                   | 54.00          | -5.22       | 34.42                | 14.36                 | AV            |
| 5   | 2484.55         | 48.80                   | 54.00          | -5.20       | 34.44                | 14.36                 | AV            |
| 6   | 2500            | 44.02                   | 54.00          | -9.98       | 29.54                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

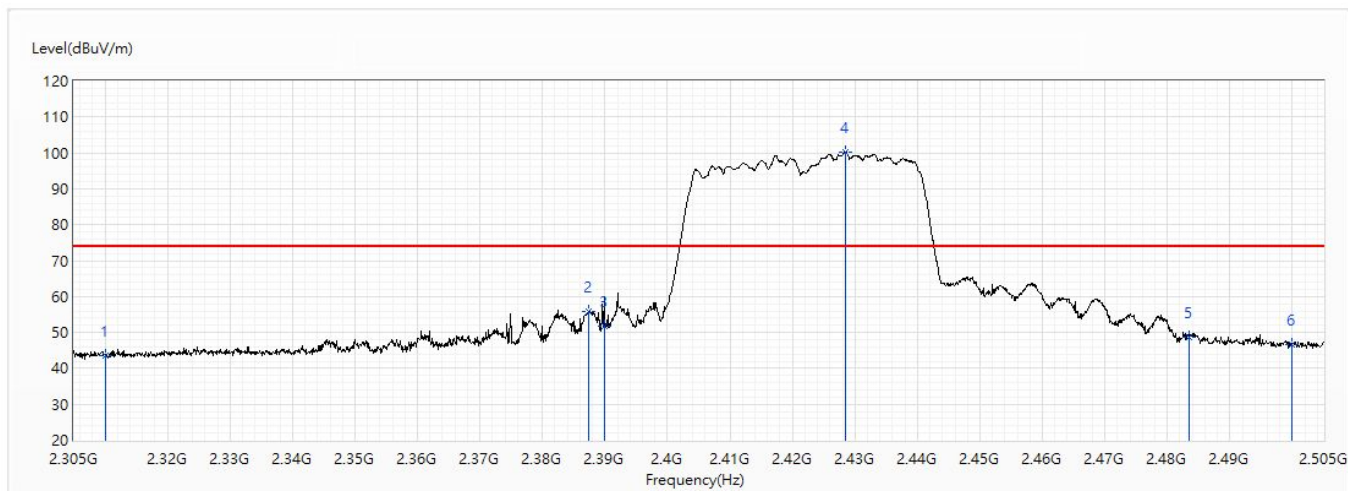


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.59                   | 74.00          | -30.41      | 30.44                | 13.15                 | PK            |
| 2   | 2387.3          | 55.78                   | 74.00          | -18.22      | 42.09                | 13.69                 | PK            |
| 3   | 2390            | 51.69                   | 74.00          | -22.31      | 37.99                | 13.70                 | PK            |
| ! 4 | 2428.4          | 100.11                  | 74.00          | 26.11       | 86.14                | 13.97                 | PK            |
| 5   | 2483.5          | 48.61                   | 74.00          | -25.39      | 34.25                | 14.36                 | PK            |
| 6   | 2500            | 46.55                   | 74.00          | -27.45      | 32.07                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

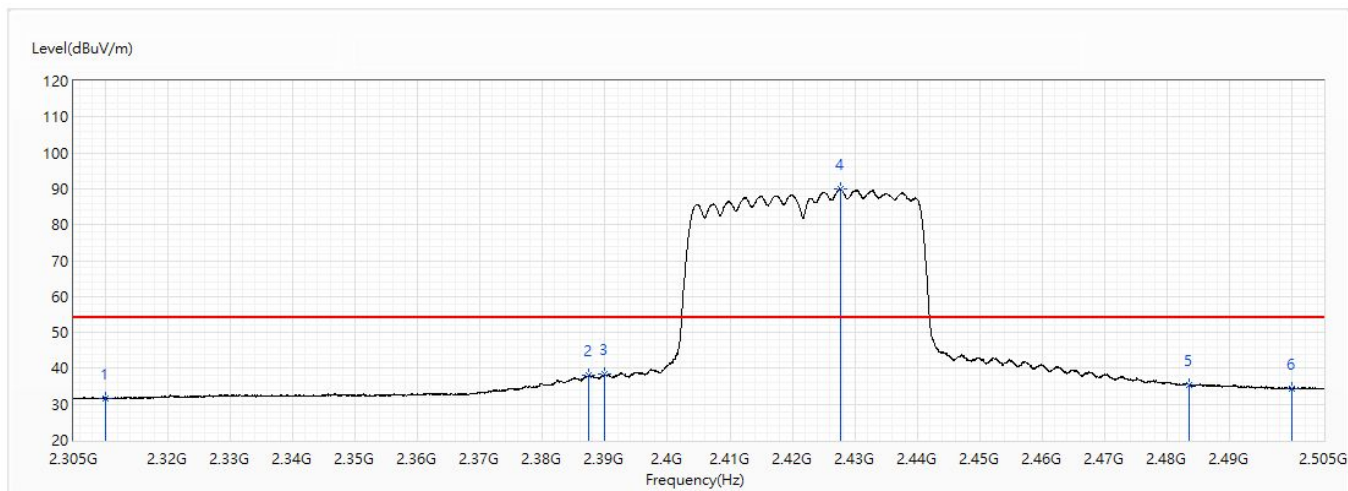


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 31.72                   | 54.00          | -22.28      | 18.57                | 13.15                 | AV            |
| 2   | 2387.4          | 38.05                   | 54.00          | -15.95      | 24.36                | 13.69                 | AV            |
| 3   | 2390            | 38.40                   | 54.00          | -15.60      | 24.70                | 13.70                 | AV            |
| ! 4 | 2427.7          | 89.83                   | 54.00          | 35.83       | 75.86                | 13.97                 | AV            |
| 5   | 2483.5          | 35.33                   | 54.00          | -18.67      | 20.97                | 14.36                 | AV            |
| 6   | 2500            | 34.36                   | 54.00          | -19.64      | 19.88                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

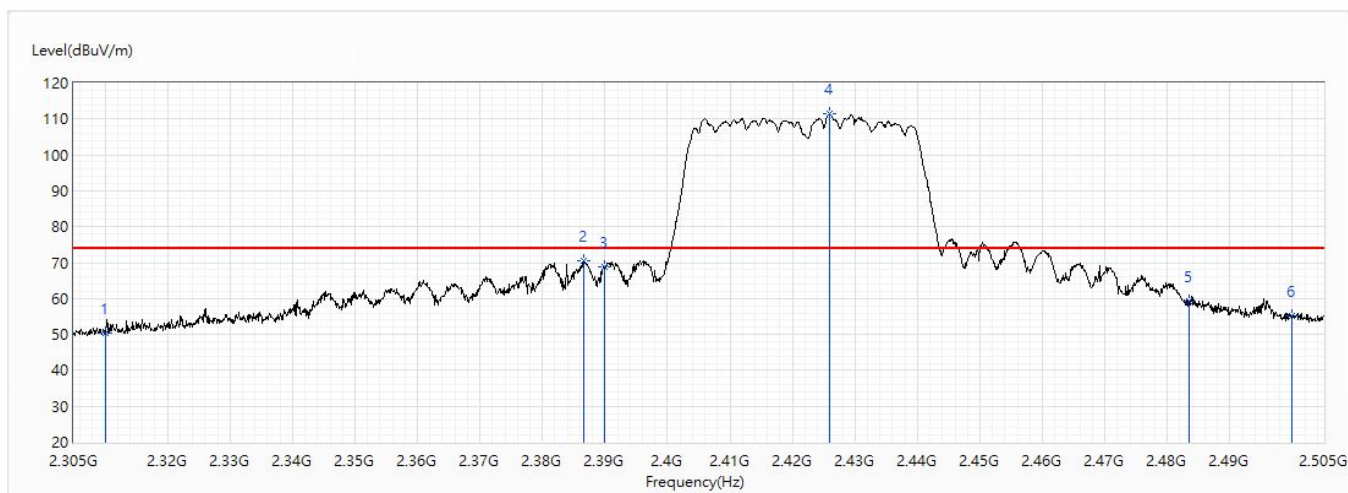


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 50.42                   | 74.00          | -23.58      | 37.27                | 13.15                 | PK            |
| 2   | 2386.6          | 70.36                   | 74.00          | -3.64       | 56.68                | 13.68                 | PK            |
| 3   | 2390            | 68.85                   | 74.00          | -5.15       | 55.15                | 13.70                 | PK            |
| ! 4 | 2426            | 111.36                  | 74.00          | 37.36       | 97.40                | 13.96                 | PK            |
| 5   | 2483.5          | 59.39                   | 74.00          | -14.61      | 45.03                | 14.36                 | PK            |
| 6   | 2500            | 55.06                   | 74.00          | -18.94      | 40.58                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

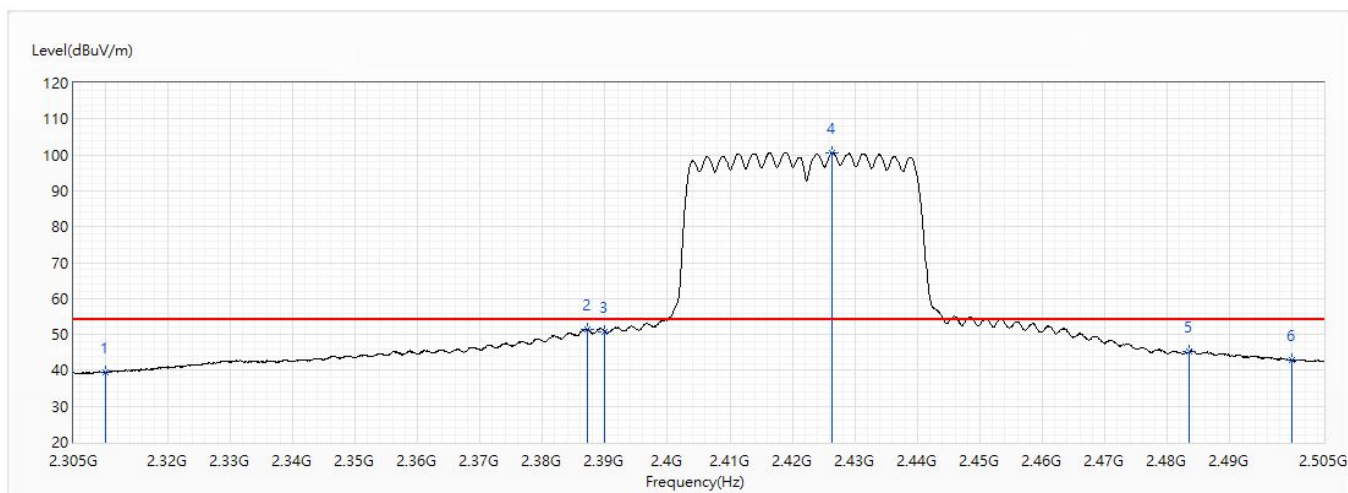


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 39.52                   | 54.00          | -14.48      | 26.37                | 13.15                 | AV            |
| 2   | 2387.1          | 51.37                   | 54.00          | -2.63       | 37.68                | 13.69                 | AV            |
| 3   | 2390            | 50.82                   | 54.00          | -3.18       | 37.12                | 13.70                 | AV            |
| ! 4 | 2426.4          | 100.63                  | 54.00          | 46.63       | 86.66                | 13.97                 | AV            |
| 5   | 2483.5          | 45.23                   | 54.00          | -8.77       | 30.87                | 14.36                 | AV            |
| 6   | 2500            | 42.78                   | 54.00          | -11.22      | 28.30                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

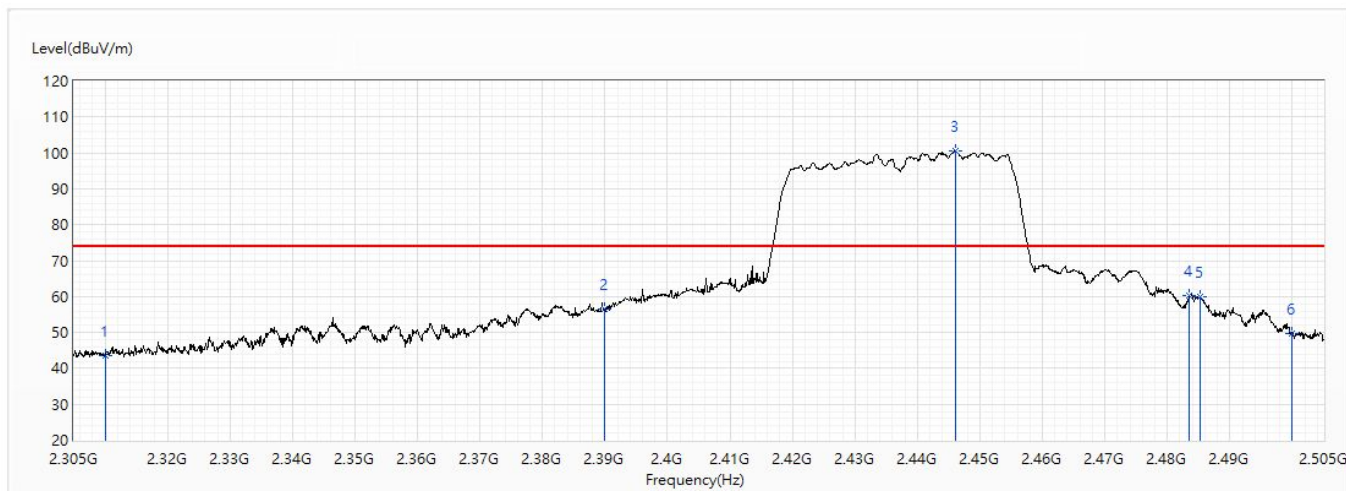


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.66                   | 74.00          | -30.34      | 30.51                | 13.15                 | PK            |
| 2   | 2390            | 56.39                   | 74.00          | -17.61      | 42.69                | 13.70                 | PK            |
| ! 3 | 2446.1          | 100.50                  | 74.00          | 26.50       | 86.40                | 14.10                 | PK            |
| 4   | 2483.5          | 60.26                   | 74.00          | -13.74      | 45.90                | 14.36                 | PK            |
| 5   | 2485.2          | 59.79                   | 74.00          | -14.21      | 45.42                | 14.37                 | PK            |
| 6   | 2500            | 49.81                   | 74.00          | -24.19      | 35.33                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

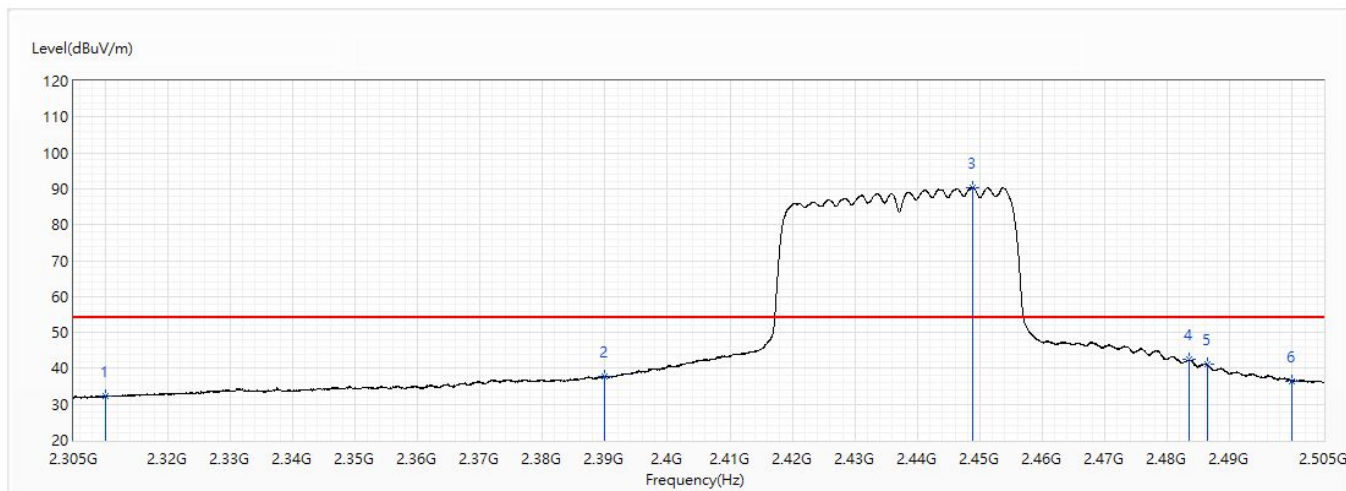


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 32.14                   | 54.00          | -21.86      | 18.99                | 13.15                 | AV            |
| 2   | 2390            | 37.68                   | 54.00          | -16.32      | 23.98                | 13.70                 | AV            |
| ! 3 | 2448.75         | 90.34                   | 54.00          | 36.34       | 76.21                | 14.13                 | AV            |
| 4   | 2483.5          | 42.37                   | 54.00          | -11.63      | 28.01                | 14.36                 | AV            |
| 5   | 2486.4          | 40.99                   | 54.00          | -13.01      | 26.60                | 14.39                 | AV            |
| 6   | 2500            | 36.47                   | 54.00          | -17.53      | 21.99                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

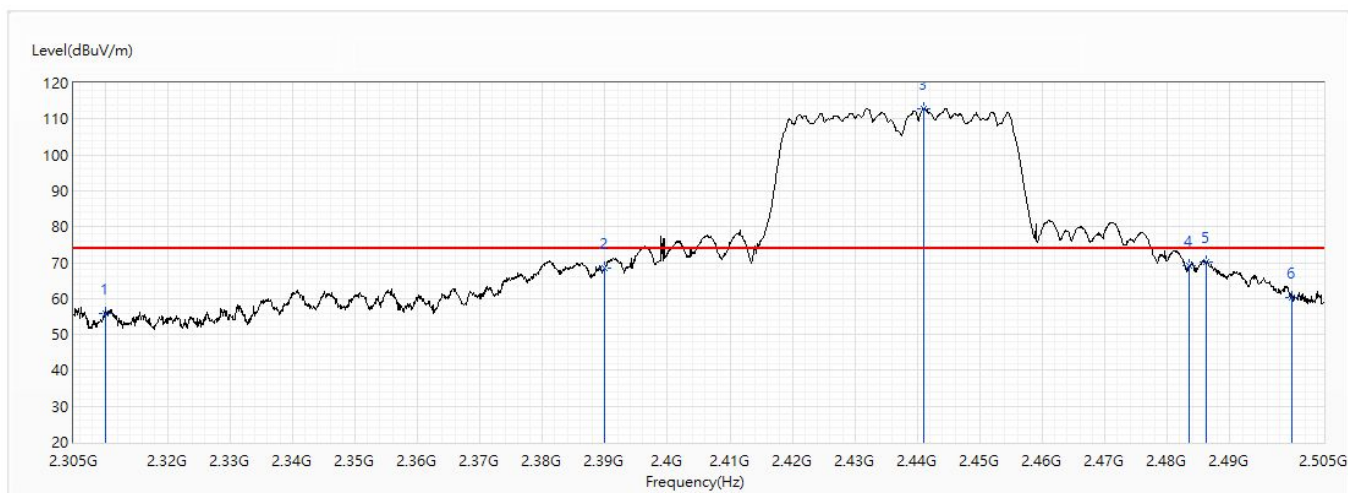


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 55.88                   | 74.00          | -18.12      | 42.73                | 13.15                 | PK            |
| 2   | 2390            | 68.42                   | 74.00          | -5.58       | 54.72                | 13.70                 | PK            |
| ! 3 | 2441.1          | 112.95                  | 74.00          | 38.95       | 98.89                | 14.06                 | PK            |
| 4   | 2483.5          | 69.05                   | 74.00          | -4.95       | 54.69                | 14.36                 | PK            |
| 5   | 2486.2          | 70.30                   | 74.00          | -3.70       | 55.91                | 14.39                 | PK            |
| 6   | 2500            | 60.37                   | 74.00          | -13.63      | 45.89                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

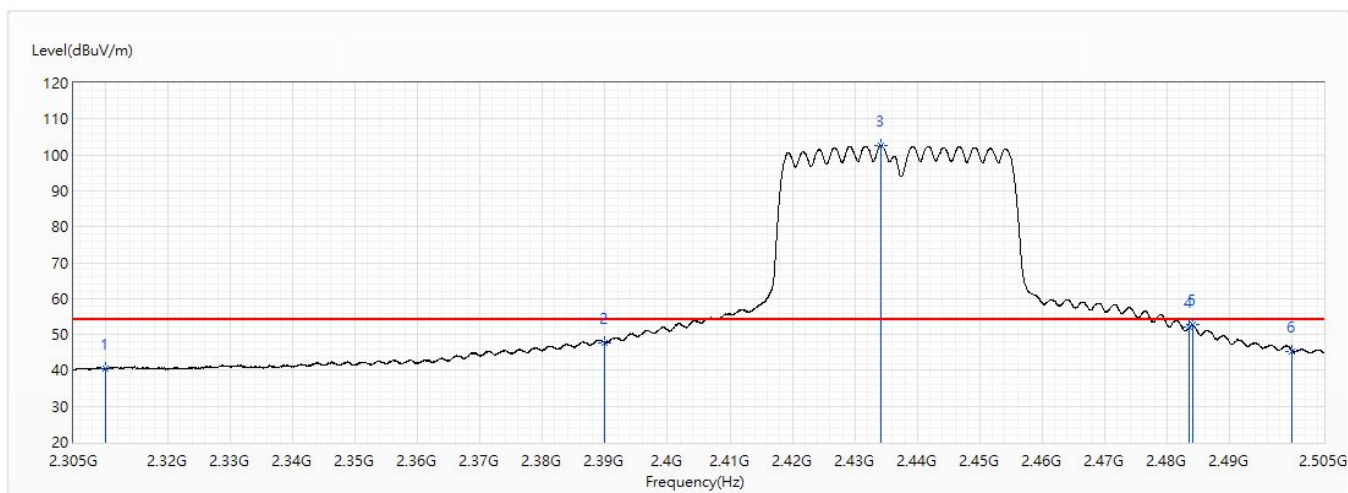


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 40.47                   | 54.00          | -13.53      | 27.32                | 13.15                 | AV            |
| 2   | 2390            | 47.78                   | 54.00          | -6.22       | 34.08                | 13.70                 | AV            |
| ! 3 | 2434.2          | 102.61                  | 54.00          | 48.61       | 88.60                | 14.01                 | AV            |
| 4   | 2483.5          | 52.21                   | 54.00          | -1.79       | 37.85                | 14.36                 | AV            |
| 5   | 2484.05         | 52.76                   | 54.00          | -1.24       | 38.40                | 14.36                 | AV            |
| 6   | 2500            | 45.40                   | 54.00          | -8.60       | 30.92                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

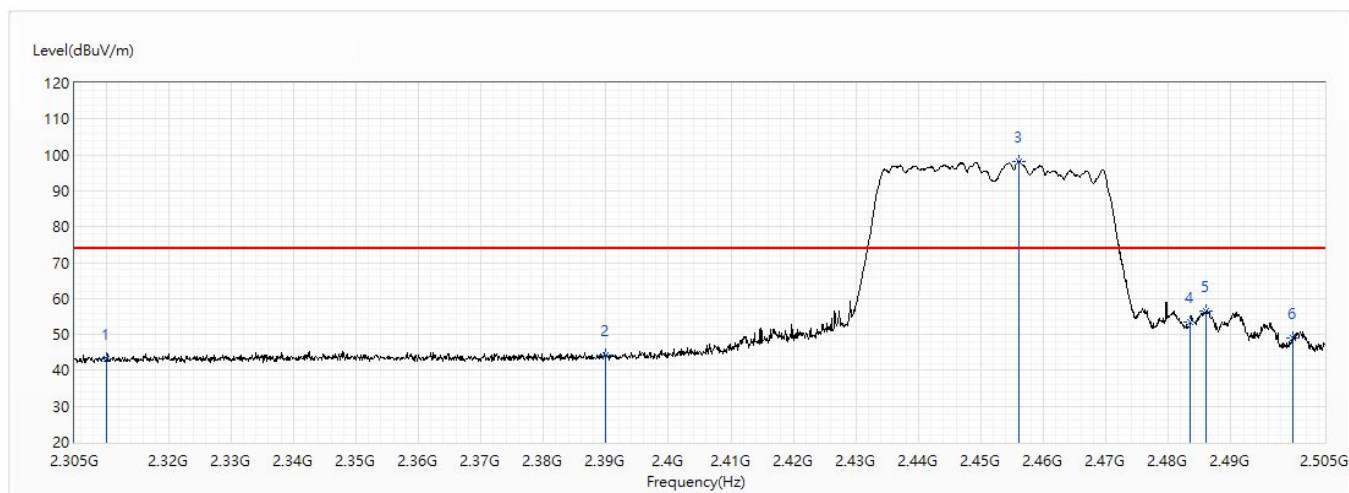


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.11                   | 74.00          | -30.89      | 29.96                | 13.15                 | PK            |
| 2   | 2390            | 44.16                   | 74.00          | -29.84      | 30.46                | 13.70                 | PK            |
| ! 3 | 2456            | 98.11                   | 74.00          | 24.11       | 83.94                | 14.17                 | PK            |
| 4   | 2483.5          | 53.34                   | 74.00          | -20.66      | 38.98                | 14.36                 | PK            |
| 5   | 2486            | 56.44                   | 74.00          | -17.56      | 42.06                | 14.38                 | PK            |
| 6   | 2500            | 48.90                   | 74.00          | -25.10      | 34.42                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Horizontal                      | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

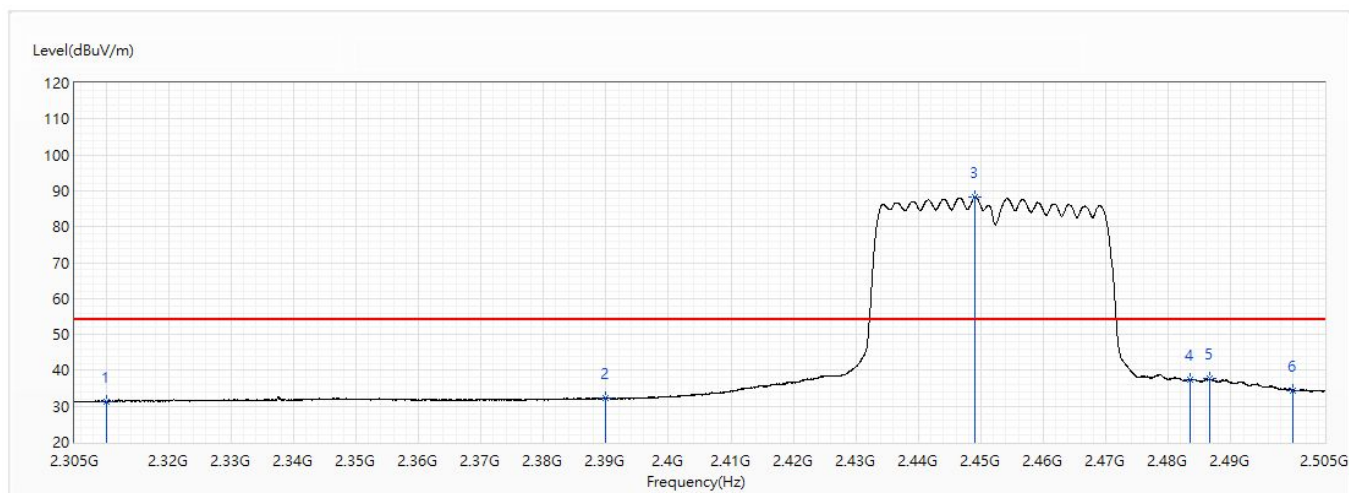


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 31.39                   | 54.00          | -22.61      | 18.24                | 13.15                 | AV            |
| 2   | 2390            | 32.16                   | 54.00          | -21.84      | 18.46                | 13.70                 | AV            |
| ! 3 | 2449.05         | 88.41                   | 54.00          | 34.41       | 74.28                | 14.13                 | AV            |
| 4   | 2483.5          | 37.52                   | 54.00          | -16.48      | 23.16                | 14.36                 | AV            |
| 5   | 2486.55         | 37.63                   | 54.00          | -16.37      | 23.24                | 14.39                 | AV            |
| 6   | 2500            | 34.42                   | 54.00          | -19.58      | 19.94                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

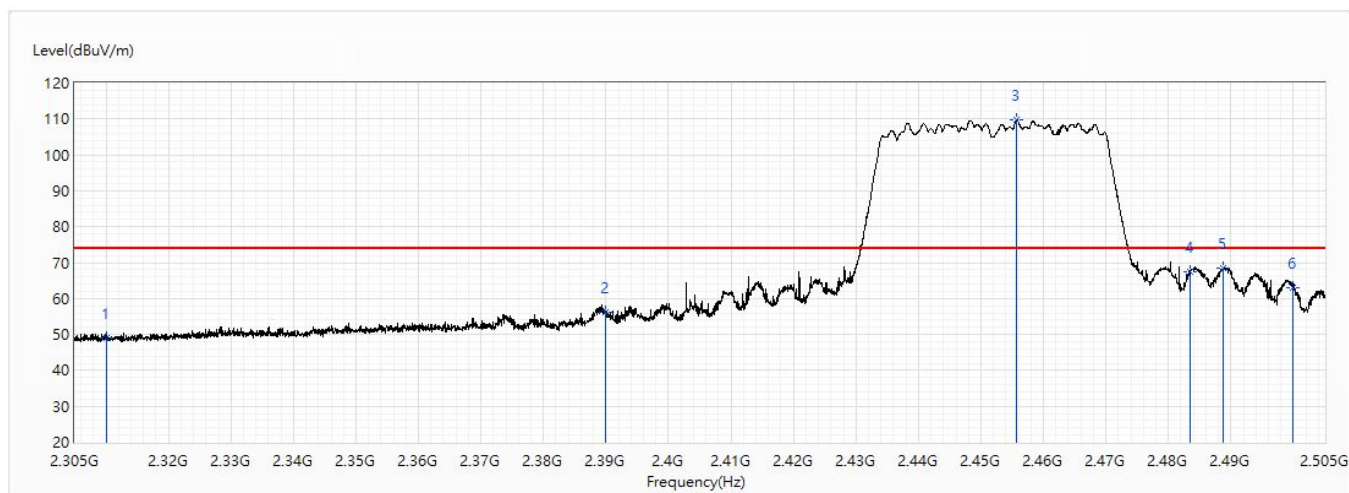


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 49.05                   | 74.00          | -24.95      | 35.90                | 13.15                 | PK            |
| 2   | 2390            | 56.04                   | 74.00          | -17.96      | 42.34                | 13.70                 | PK            |
| ! 3 | 2455.75         | 109.60                  | 74.00          | 35.60       | 95.43                | 14.17                 | PK            |
| 4   | 2483.5          | 67.58                   | 74.00          | -6.42       | 53.22                | 14.36                 | PK            |
| 5   | 2488.8          | 68.62                   | 74.00          | -5.38       | 54.22                | 14.40                 | PK            |
| 6   | 2500            | 63.06                   | 74.00          | -10.94      | 48.58                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                 |                  |           |
|----------------|---------------------------------|------------------|-----------|
| Model No       | D2260G                          | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                    | Test Date        | 2020/8/11 |
| Test Mode      | Mode 2: CDD Mode                | Engineer         | Scott     |
| Polarity       | Vertical                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11n_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

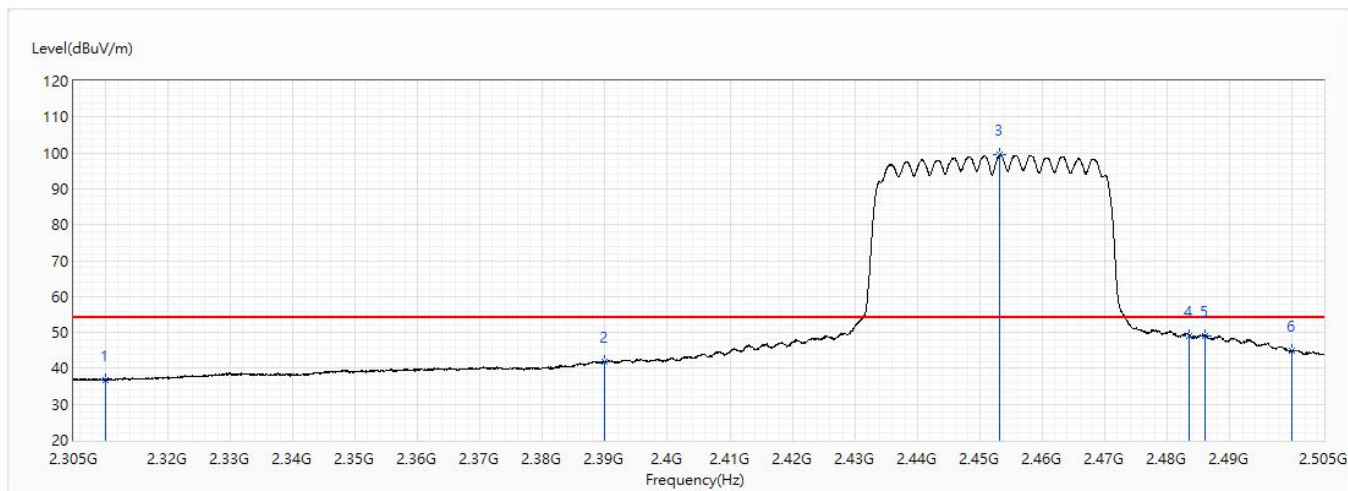


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 36.81                   | 54.00          | -17.19      | 23.66                | 13.15                 | AV            |
| 2   | 2390            | 41.90                   | 54.00          | -12.10      | 28.20                | 13.70                 | AV            |
| ! 3 | 2453.2          | 99.36                   | 54.00          | 45.36       | 85.21                | 14.15                 | AV            |
| 4   | 2483.5          | 49.16                   | 54.00          | -4.84       | 34.80                | 14.36                 | AV            |
| 5   | 2485.95         | 49.10                   | 54.00          | -4.90       | 34.72                | 14.38                 | AV            |
| 6   | 2500            | 44.82                   | 54.00          | -9.18       | 30.34                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch1_2.412G | Humidity (%RH)   | 58.0      |

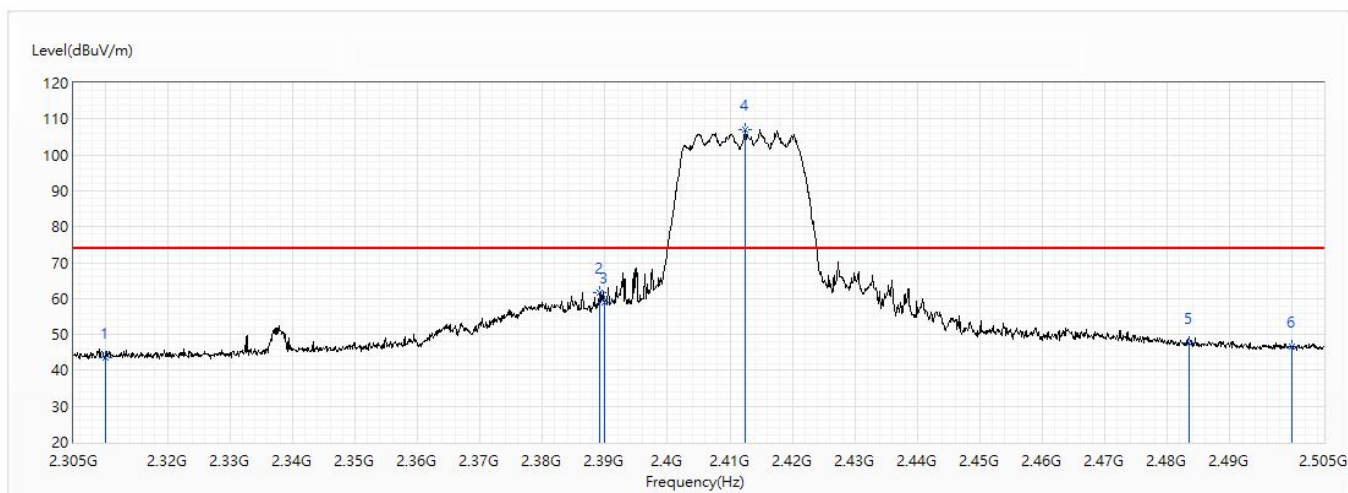


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.46                   | 74.00          | -30.54      | 30.31                | 13.15                 | PK            |
| 2   | 2389.2          | 61.79                   | 74.00          | -12.21      | 48.09                | 13.70                 | PK            |
| 3   | 2390            | 58.94                   | 74.00          | -15.06      | 45.24                | 13.70                 | PK            |
| ! 4 | 2412.5          | 107.16                  | 74.00          | 33.16       | 93.29                | 13.87                 | PK            |
| 5   | 2483.5          | 47.68                   | 74.00          | -26.32      | 33.32                | 14.36                 | PK            |
| 6   | 2500            | 46.47                   | 74.00          | -27.53      | 31.99                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch1_2.412G | Humidity (%RH)   | 58.0      |

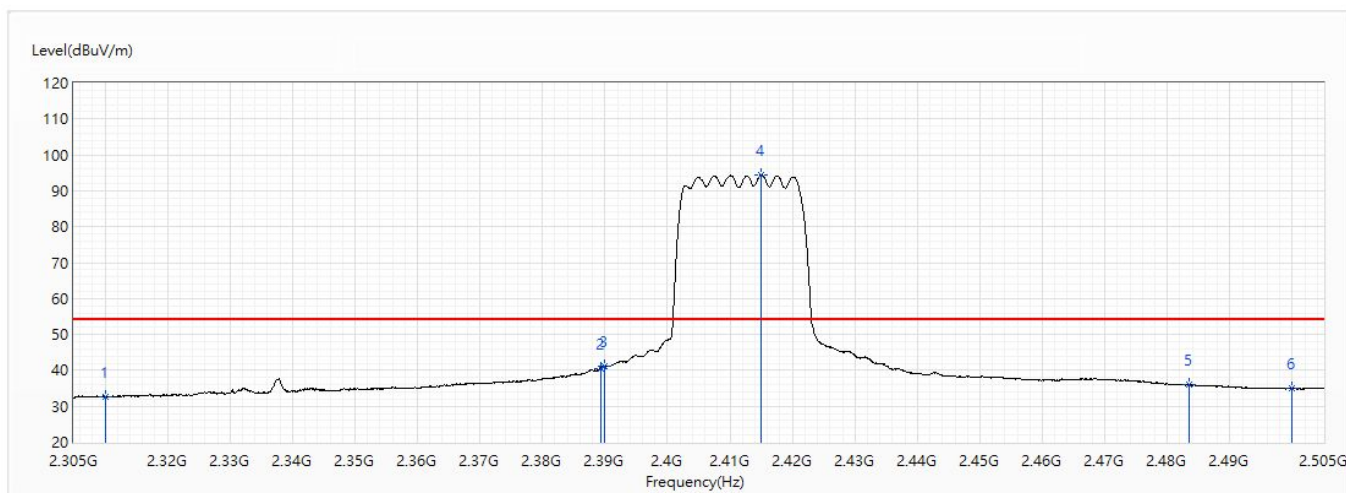


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 32.59                   | 54.00          | -21.41      | 19.44                | 13.15                 | AV            |
| 2   | 2389.4          | 40.52                   | 54.00          | -13.48      | 26.82                | 13.70                 | AV            |
| 3   | 2390            | 41.04                   | 54.00          | -12.96      | 27.34                | 13.70                 | AV            |
| ! 4 | 2415            | 94.53                   | 54.00          | 40.53       | 80.65                | 13.88                 | AV            |
| 5   | 2483.5          | 35.92                   | 54.00          | -18.08      | 21.56                | 14.36                 | AV            |
| 6   | 2500            | 35.03                   | 54.00          | -18.97      | 20.55                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch1_2.412G | Humidity (%RH)   | 58.0      |

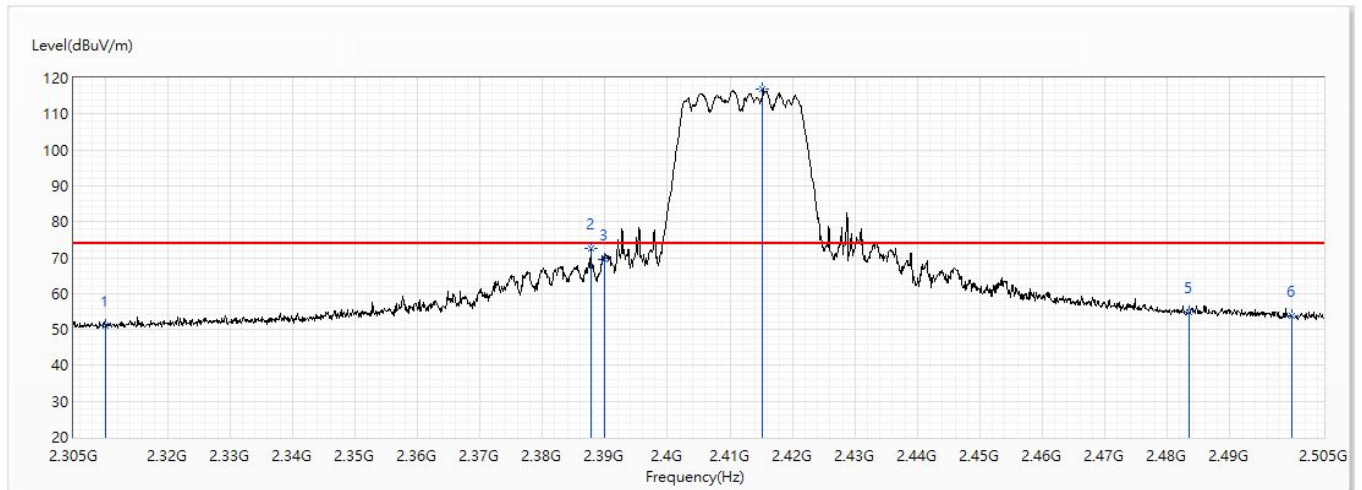


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 50.98                   | 74.00          | -23.02      | 37.83                | 13.15                 | PK            |
| 2   | 2387.7          | 72.66                   | 74.00          | -1.34       | 58.96                | 13.70                 | PK            |
| 3   | 2390            | 69.34                   | 74.00          | -4.66       | 55.64                | 13.70                 | PK            |
| ! 4 | 2415.2          | 116.91                  | 74.00          | 42.91       | 103.03               | 13.88                 | PK            |
| 5   | 2483.5          | 54.81                   | 74.00          | -19.19      | 40.45                | 14.36                 | PK            |
| 6   | 2500            | 53.63                   | 74.00          | -20.37      | 39.15                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch1_2.412G | Humidity (%RH)   | 58.0      |

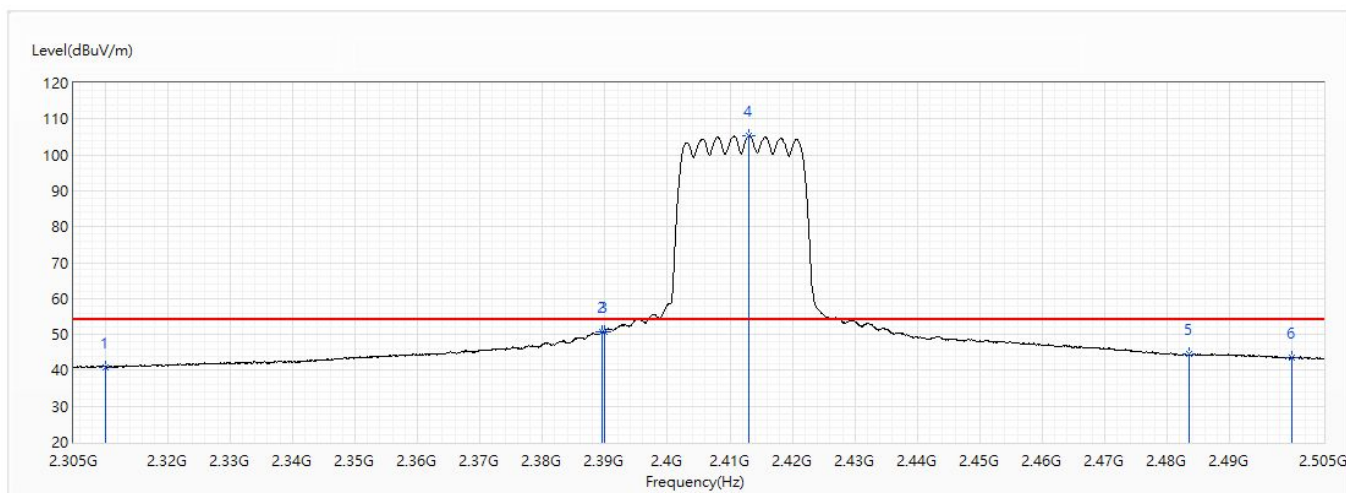


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 40.84                   | 54.00          | -13.16      | 27.69                | 13.15                 | AV            |
| 2   | 2389.5          | 50.59                   | 54.00          | -3.41       | 36.89                | 13.70                 | AV            |
| 3   | 2390            | 50.84                   | 54.00          | -3.16       | 37.14                | 13.70                 | AV            |
| ! 4 | 2413.1          | 105.31                  | 54.00          | 51.31       | 91.44                | 13.87                 | AV            |
| 5   | 2483.5          | 44.42                   | 54.00          | -9.58       | 30.06                | 14.36                 | AV            |
| 6   | 2500            | 43.43                   | 54.00          | -10.57      | 28.95                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

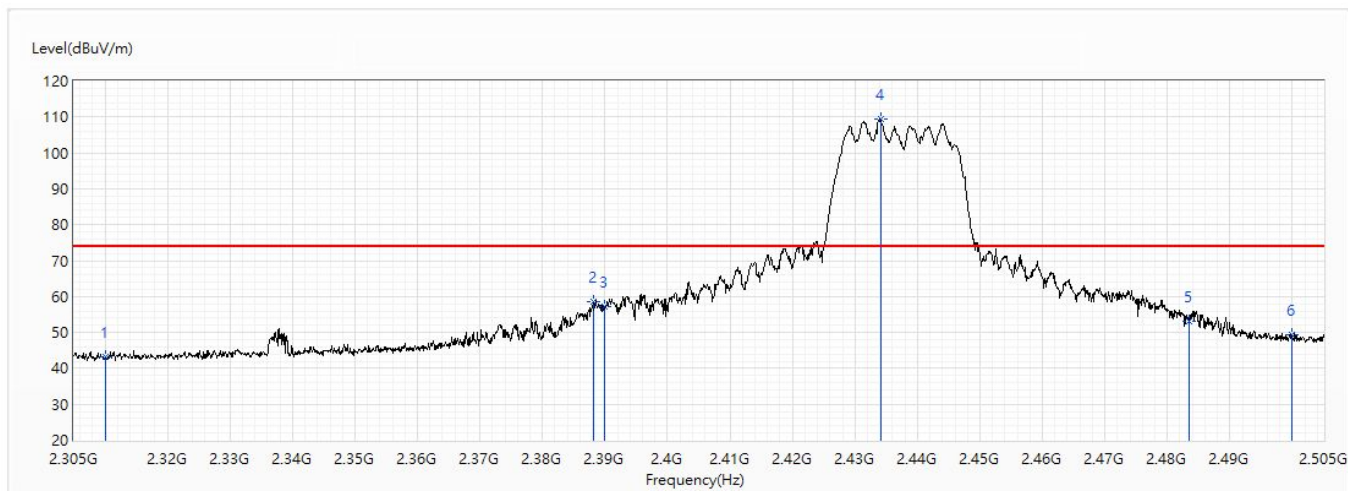


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 43.36                   | 74.00          | -30.64      | 30.21                | 13.15                 | PK            |
| 2   | 2388.1          | 58.67                   | 74.00          | -15.33      | 44.97                | 13.70                 | PK            |
| 3   | 2390            | 57.05                   | 74.00          | -16.95      | 43.35                | 13.70                 | PK            |
| ! 4 | 2434.1          | 109.29                  | 74.00          | 35.29       | 95.28                | 14.01                 | PK            |
| 5   | 2483.5          | 53.23                   | 74.00          | -20.77      | 38.87                | 14.36                 | PK            |
| 6   | 2500            | 49.26                   | 74.00          | -24.74      | 34.78                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

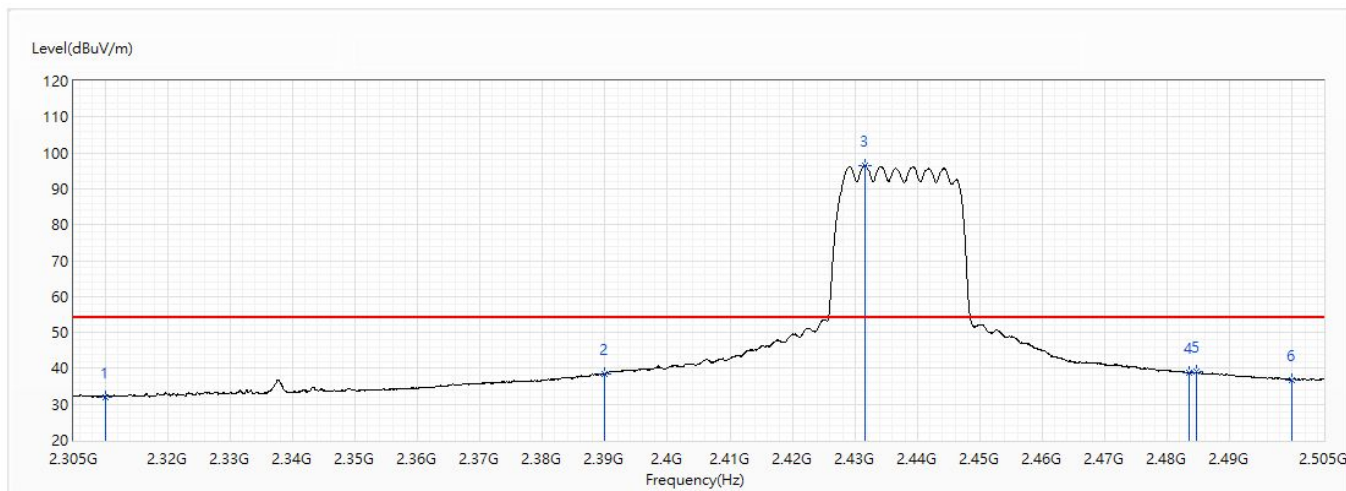


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 32.11                   | 54.00          | -21.89      | 18.96                | 13.15                 | AV            |
| 2   | 2390            | 38.41                   | 54.00          | -15.59      | 24.71                | 13.70                 | AV            |
| ! 3 | 2431.6          | 96.46                   | 54.00          | 42.46       | 82.46                | 14.00                 | AV            |
| 4   | 2483.5          | 38.85                   | 54.00          | -15.15      | 24.49                | 14.36                 | AV            |
| 5   | 2484.6          | 38.95                   | 54.00          | -15.05      | 24.59                | 14.36                 | AV            |
| 6   | 2500            | 36.85                   | 54.00          | -17.15      | 22.37                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

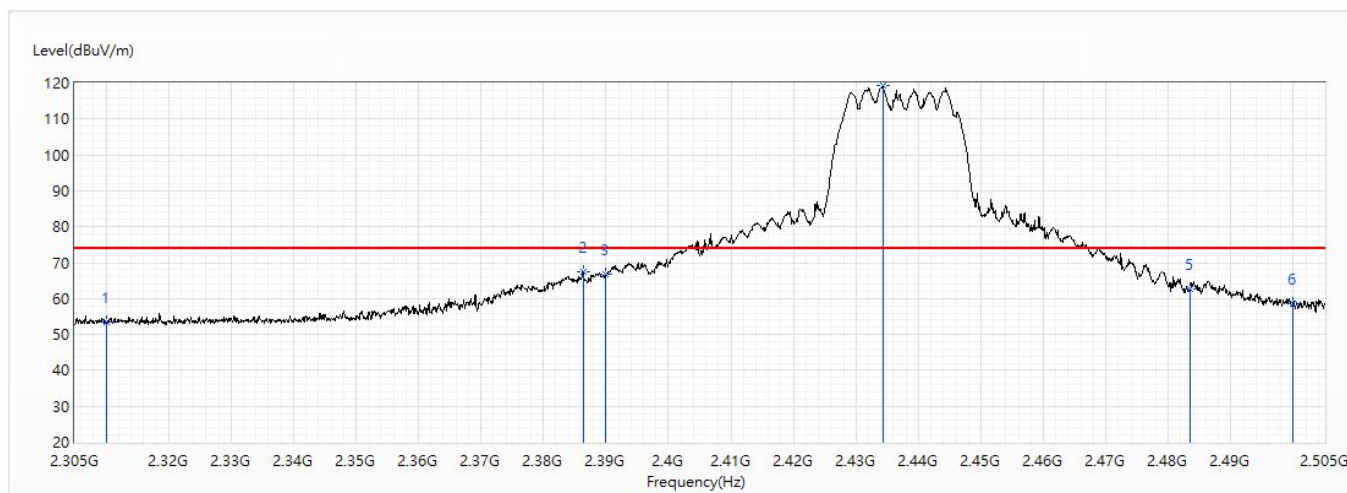


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 53.45                   | 74.00          | -20.55      | 40.30                | 13.15                 | PK            |
| 2   | 2386.4          | 67.61                   | 74.00          | -6.39       | 53.93                | 13.68                 | PK            |
| 3   | 2390            | 66.90                   | 74.00          | -7.10       | 53.20                | 13.70                 | PK            |
| ! 4 | 2434.3          | 119.23                  | 74.00          | 45.23       | 105.22               | 14.01                 | PK            |
| 5   | 2483.5          | 62.59                   | 74.00          | -11.41      | 48.23                | 14.36                 | PK            |
| 6   | 2500            | 58.66                   | 74.00          | -15.34      | 44.18                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

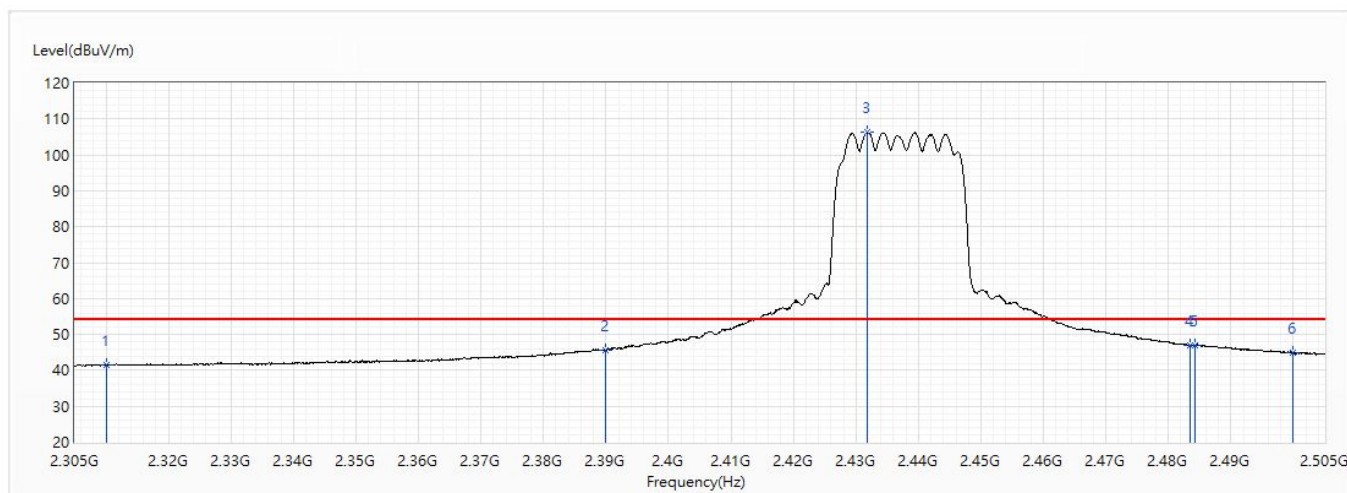


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 41.51                   | 54.00          | -12.49      | 28.36                | 13.15                 | AV            |
| 2   | 2390            | 45.70                   | 54.00          | -8.30       | 32.00                | 13.70                 | AV            |
| ! 3 | 2431.8          | 106.28                  | 54.00          | 52.28       | 92.28                | 14.00                 | AV            |
| 4   | 2483.5          | 47.08                   | 54.00          | -6.92       | 32.72                | 14.36                 | AV            |
| 5   | 2484.2          | 47.07                   | 54.00          | -6.93       | 32.71                | 14.36                 | AV            |
| 6   | 2500            | 44.90                   | 54.00          | -9.10       | 30.42                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                   |                  |           |
|----------------|-----------------------------------|------------------|-----------|
| Model No       | D2260G                            | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                      | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                  | Engineer         | Scott     |
| Polarity       | Horizontal                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

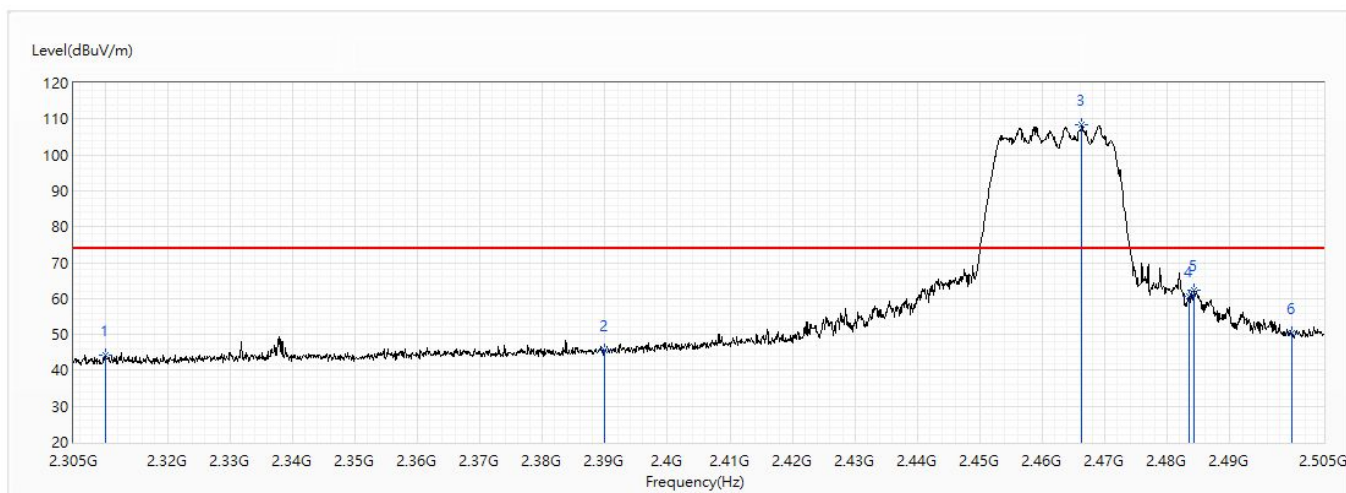


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 44.07                   | 74.00          | -29.93      | 30.92                | 13.15                 | PK            |
| 2   | 2390            | 45.61                   | 74.00          | -28.39      | 31.91                | 13.70                 | PK            |
| ! 3 | 2466.3          | 108.36                  | 74.00          | 34.36       | 94.12                | 14.24                 | PK            |
| 4   | 2483.5          | 60.53                   | 74.00          | -13.47      | 46.17                | 14.36                 | PK            |
| 5   | 2484.3          | 62.25                   | 74.00          | -11.75      | 47.89                | 14.36                 | PK            |
| 6   | 2500            | 50.29                   | 74.00          | -23.71      | 35.81                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                   |                  |           |
|----------------|-----------------------------------|------------------|-----------|
| Model No       | D2260G                            | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                      | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                  | Engineer         | Scott     |
| Polarity       | Horizontal                        | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

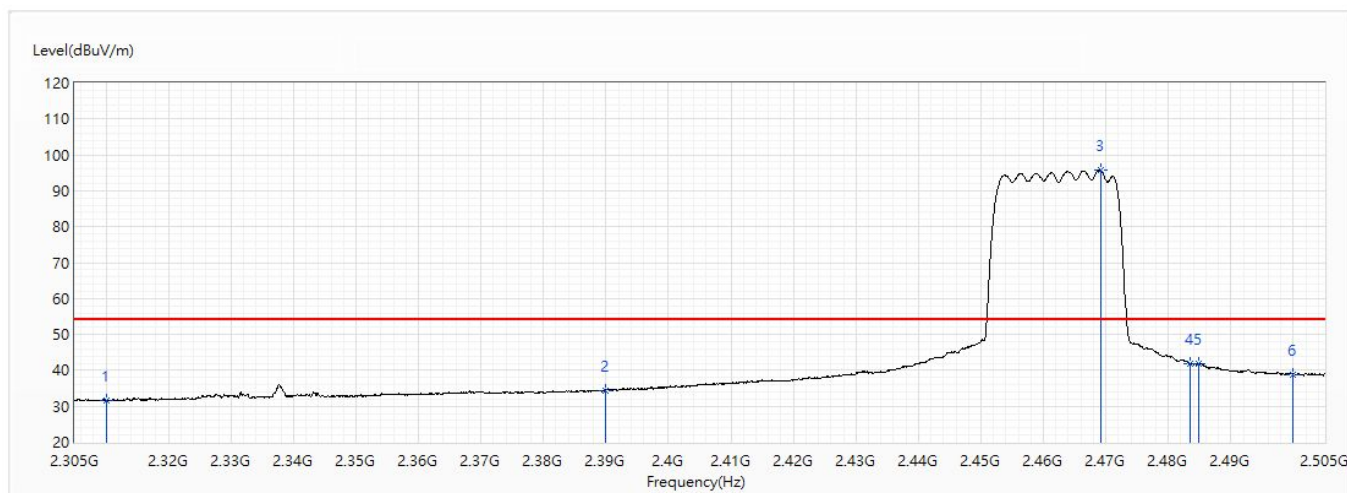


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 31.45                   | 54.00          | -22.55      | 18.30                | 13.15                 | AV            |
| 2   | 2390            | 34.44                   | 54.00          | -19.56      | 20.74                | 13.70                 | AV            |
| ! 3 | 2469.1          | 95.72                   | 54.00          | 41.72       | 81.46                | 14.26                 | AV            |
| 4   | 2483.5          | 41.85                   | 54.00          | -12.15      | 27.49                | 14.36                 | AV            |
| 5   | 2484.8          | 41.75                   | 54.00          | -12.25      | 27.38                | 14.37                 | AV            |
| 6   | 2500            | 38.94                   | 54.00          | -15.06      | 24.46                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                   |                  |           |
|----------------|-----------------------------------|------------------|-----------|
| Model No       | D2260G                            | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                      | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                  | Engineer         | Scott     |
| Polarity       | Vertical                          | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

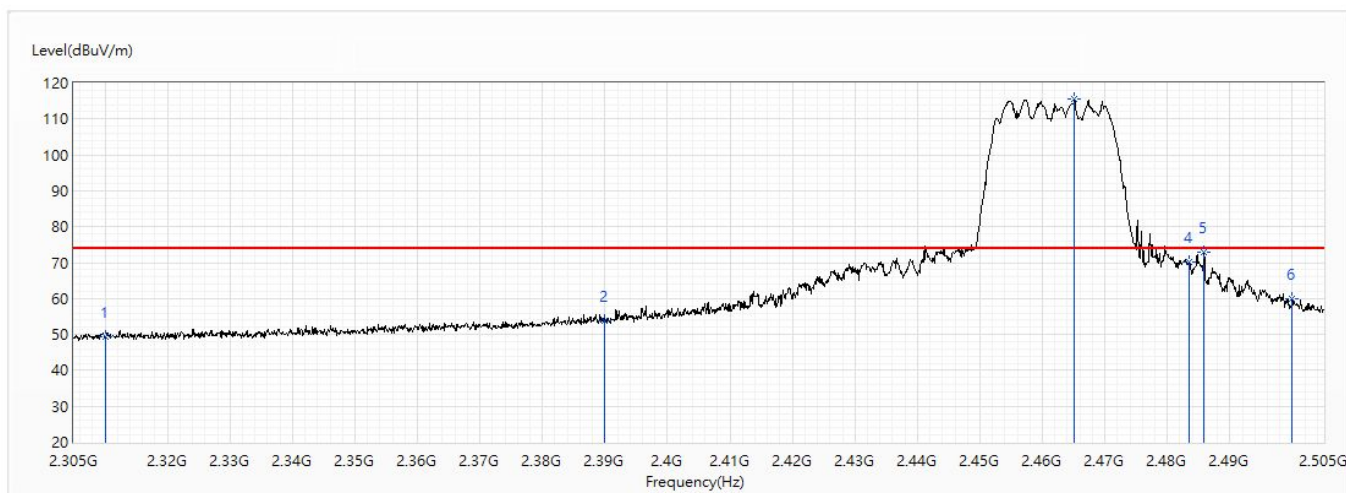


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 49.26                   | 74.00          | -24.74      | 36.11                | 13.15                 | PK            |
| 2   | 2390            | 53.86                   | 74.00          | -20.14      | 40.16                | 13.70                 | PK            |
| ! 3 | 2465.1          | 115.64                  | 74.00          | 41.64       | 101.41               | 14.23                 | PK            |
| 4   | 2483.5          | 70.03                   | 74.00          | -3.97       | 55.67                | 14.36                 | PK            |
| 5   | 2485.9          | 72.77                   | 74.00          | -1.23       | 58.39                | 14.38                 | PK            |
| 6   | 2500            | 60.05                   | 74.00          | -13.95      | 45.57                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                   |                  |           |
|----------------|-----------------------------------|------------------|-----------|
| Model No       | D2260G                            | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                      | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                  | Engineer         | Scott     |
| Polarity       | Vertical                          | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW20M_Ant0+1_Ch11_2.462G | Humidity (%RH)   | 58.0      |

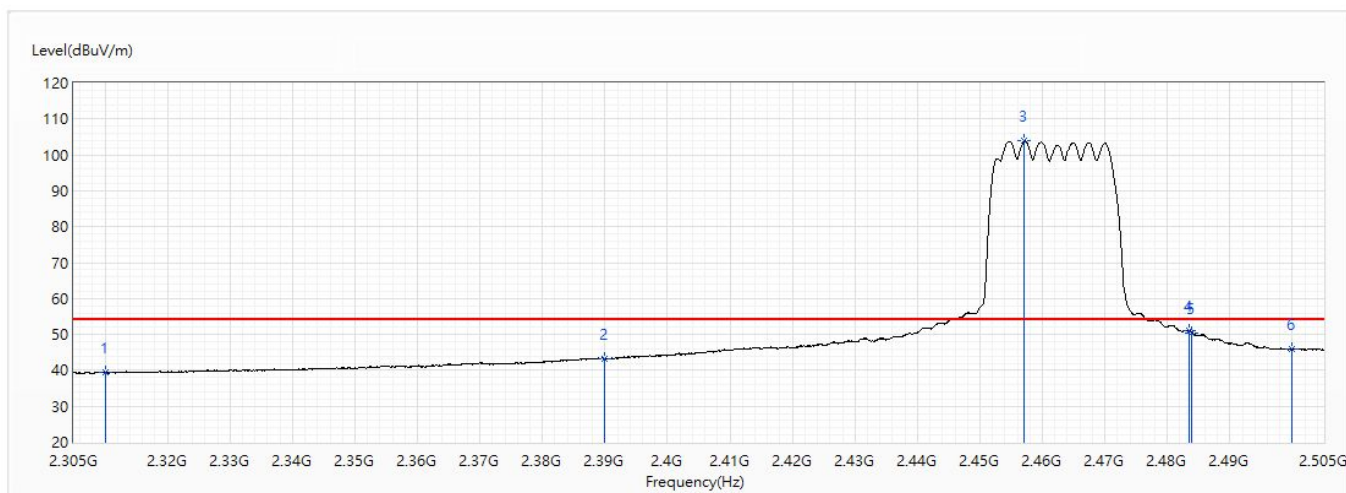


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 39.52                   | 54.00          | -14.48      | 26.37                | 13.15                 | AV            |
| 2   | 2390            | 43.32                   | 54.00          | -10.68      | 29.62                | 13.70                 | AV            |
| ! 3 | 2457.1          | 103.82                  | 54.00          | 49.82       | 89.64                | 14.18                 | AV            |
| 4   | 2483.5          | 50.93                   | 54.00          | -3.07       | 36.57                | 14.36                 | AV            |
| 5   | 2483.9          | 50.42                   | 54.00          | -3.58       | 36.06                | 14.36                 | AV            |
| 6   | 2500            | 45.78                   | 54.00          | -8.22       | 31.30                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

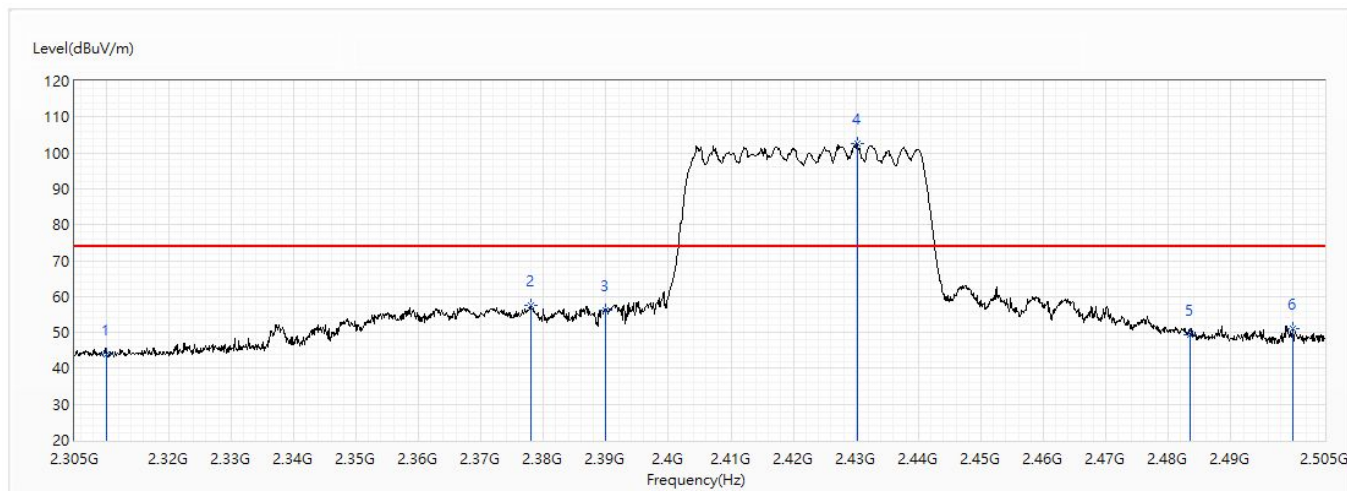


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 44.02                   | 74.00          | -29.98      | 30.87                | 13.15                 | PK            |
| 2   | 2377.9          | 57.40                   | 74.00          | -16.60      | 43.78                | 13.62                 | PK            |
| 3   | 2390            | 56.29                   | 74.00          | -17.71      | 42.59                | 13.70                 | PK            |
| ! 4 | 2430.2          | 102.53                  | 74.00          | 28.53       | 88.54                | 13.99                 | PK            |
| 5   | 2483.5          | 49.21                   | 74.00          | -24.79      | 34.85                | 14.36                 | PK            |
| 6   | 2500            | 50.99                   | 74.00          | -23.01      | 36.51                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

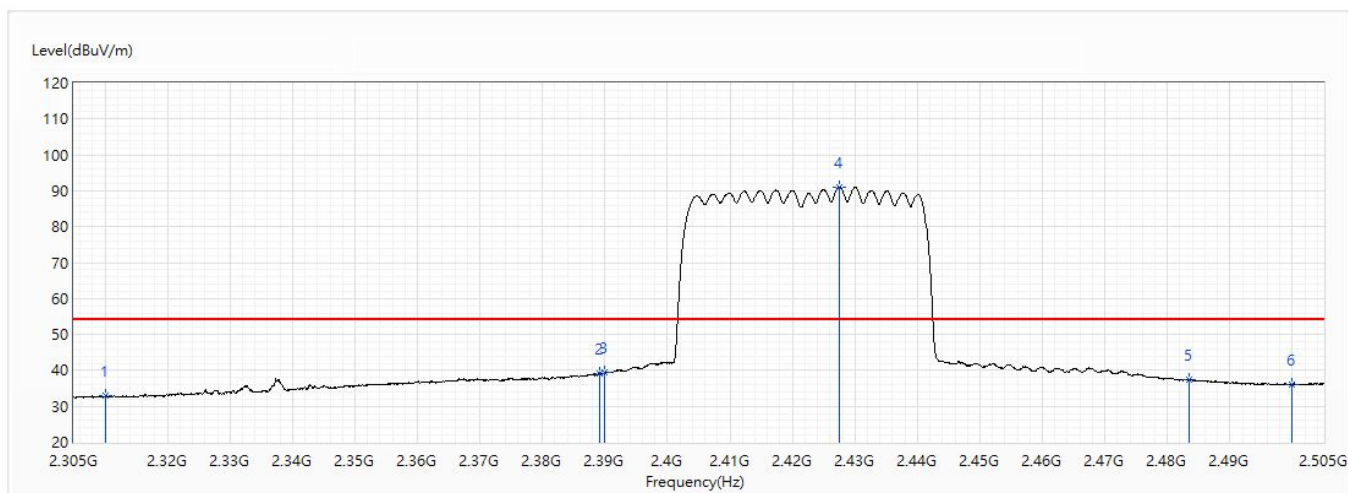


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 32.82                   | 54.00          | -21.18      | 19.67                | 13.15                 | AV            |
| 2   | 2389.2          | 39.07                   | 54.00          | -14.93      | 25.37                | 13.70                 | AV            |
| 3   | 2390            | 39.30                   | 54.00          | -14.70      | 25.60                | 13.70                 | AV            |
| ! 4 | 2427.5          | 91.10                   | 54.00          | 37.10       | 77.13                | 13.97                 | AV            |
| 5   | 2483.5          | 37.45                   | 54.00          | -16.55      | 23.09                | 14.36                 | AV            |
| 6   | 2500            | 35.99                   | 54.00          | -18.01      | 21.51                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

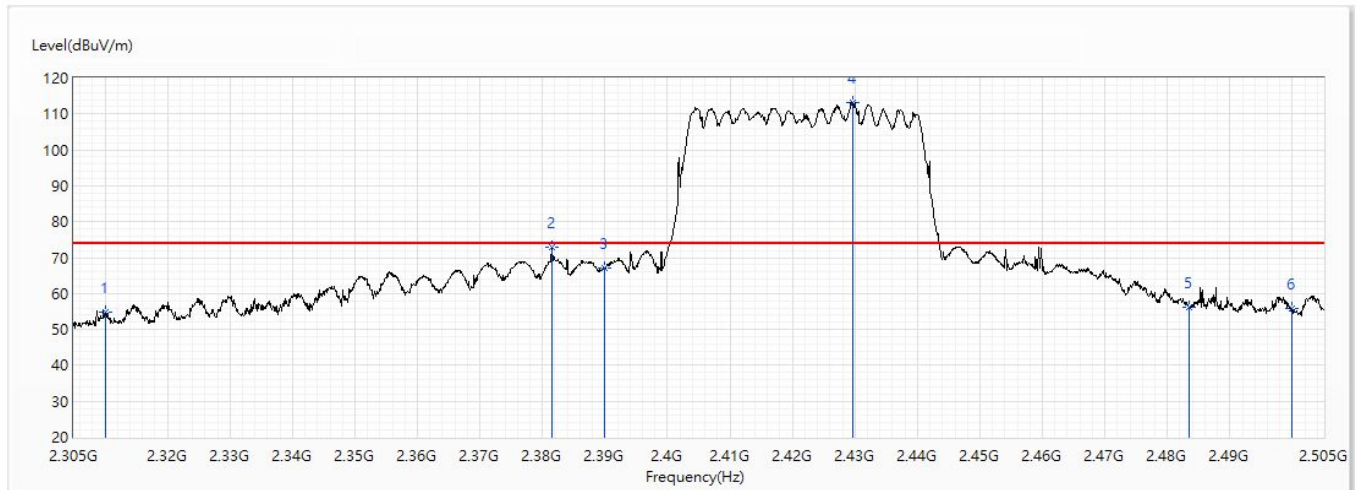


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 54.95                   | 74.00          | -19.05      | 41.80                | 13.15                 | PK            |
| 2   | 2381.5          | 72.89                   | 74.00          | -1.11       | 59.24                | 13.65                 | PK            |
| 3   | 2390            | 67.25                   | 74.00          | -6.75       | 53.55                | 13.70                 | PK            |
| ! 4 | 2429.6          | 113.26                  | 74.00          | 39.26       | 99.28                | 13.98                 | PK            |
| 5   | 2483.5          | 56.14                   | 74.00          | -17.86      | 41.78                | 14.36                 | PK            |
| 6   | 2500            | 55.81                   | 74.00          | -18.19      | 41.33                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch3_2.422G | Humidity (%RH)   | 58.0      |

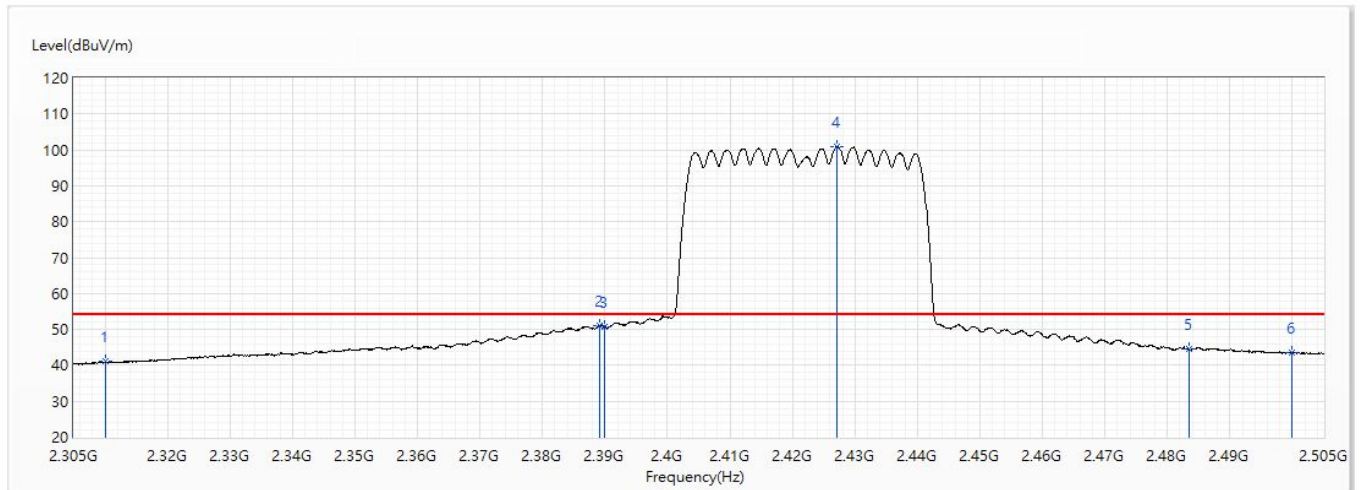


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 41.01                   | 54.00          | -12.99      | 27.86                | 13.15                 | AV            |
| 2   | 2389.2          | 51.04                   | 54.00          | -2.96       | 37.34                | 13.70                 | AV            |
| 3   | 2390            | 50.71                   | 54.00          | -3.29       | 37.01                | 13.70                 | AV            |
| ! 4 | 2427.2          | 101.01                  | 54.00          | 47.01       | 87.04                | 13.97                 | AV            |
| 5   | 2483.5          | 44.49                   | 54.00          | -9.51       | 30.13                | 14.36                 | AV            |
| 6   | 2500            | 43.49                   | 54.00          | -10.51      | 29.01                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

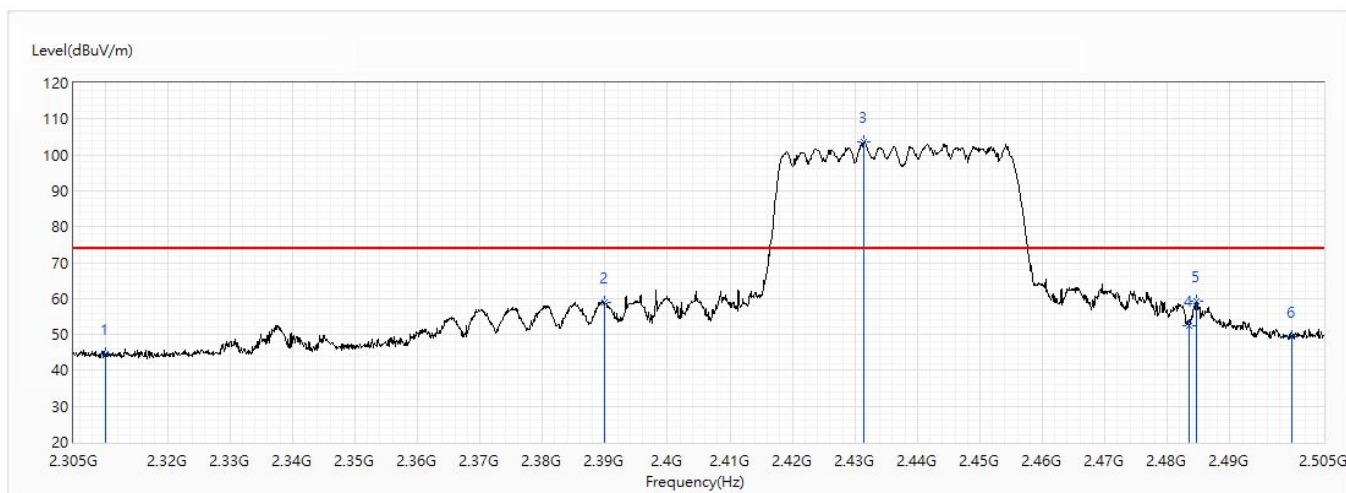


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 44.66                   | 74.00          | -29.34      | 31.51                | 13.15                 | PK            |
| 2   | 2390            | 58.98                   | 74.00          | -15.02      | 45.28                | 13.70                 | PK            |
| ! 3 | 2431.4          | 103.68                  | 74.00          | 29.68       | 89.68                | 14.00                 | PK            |
| 4   | 2483.5          | 52.48                   | 74.00          | -21.52      | 38.12                | 14.36                 | PK            |
| 5   | 2484.6          | 59.18                   | 74.00          | -14.82      | 44.82                | 14.36                 | PK            |
| 6   | 2500            | 49.29                   | 74.00          | -24.71      | 34.81                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

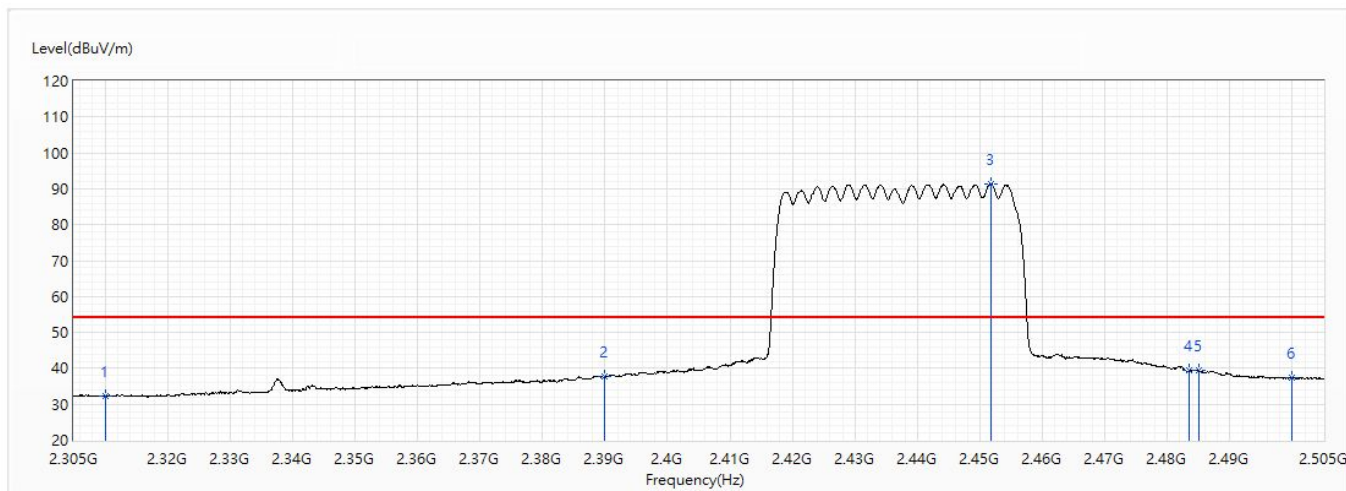


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 32.31                   | 54.00          | -21.69      | 19.16                | 13.15                 | AV            |
| 2   | 2390            | 37.60                   | 54.00          | -16.40      | 23.90                | 13.70                 | AV            |
| ! 3 | 2451.7          | 91.33                   | 54.00          | 37.33       | 77.19                | 14.14                 | AV            |
| 4   | 2483.5          | 39.35                   | 54.00          | -14.65      | 24.99                | 14.36                 | AV            |
| 5   | 2485            | 39.37                   | 54.00          | -14.63      | 25.00                | 14.37                 | AV            |
| 6   | 2500            | 37.30                   | 54.00          | -16.70      | 22.82                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

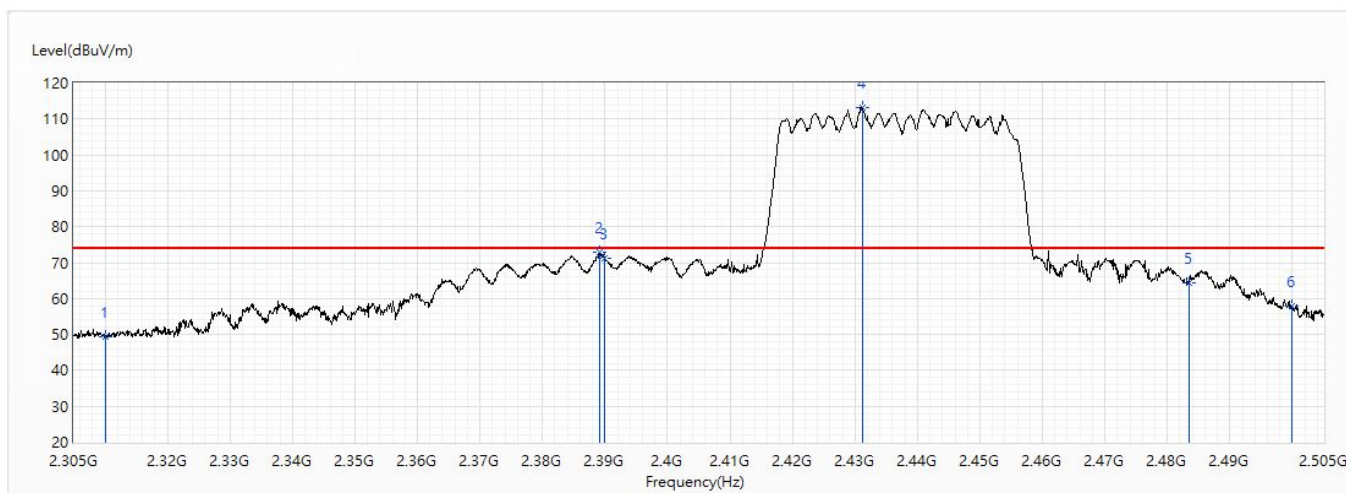


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 49.47                   | 74.00          | -24.53      | 36.32                | 13.15                 | PK            |
| 2   | 2389.1          | 72.80                   | 74.00          | -1.20       | 59.10                | 13.70                 | PK            |
| 3   | 2390            | 71.22                   | 74.00          | -2.78       | 57.52                | 13.70                 | PK            |
| ! 4 | 2431.2          | 113.26                  | 74.00          | 39.26       | 99.26                | 14.00                 | PK            |
| 5   | 2483.5          | 64.48                   | 74.00          | -9.52       | 50.12                | 14.36                 | PK            |
| 6   | 2500            | 57.81                   | 74.00          | -16.19      | 43.33                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch6_2.437G | Humidity (%RH)   | 58.0      |

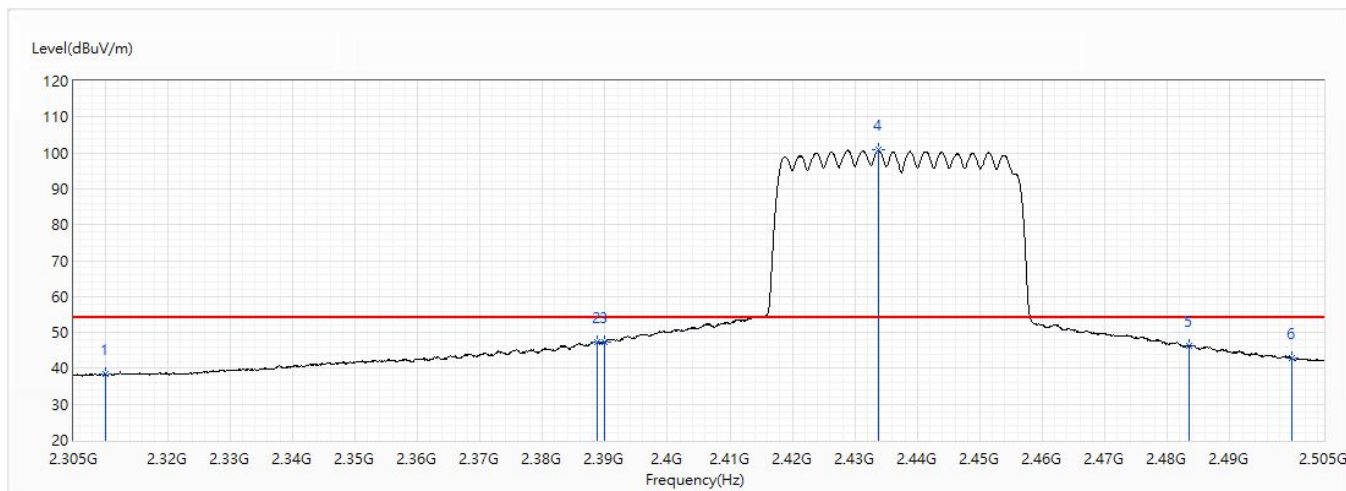


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 38.34                   | 54.00          | -15.66      | 25.19                | 13.15                 | AV            |
| 2   | 2388.8          | 47.38                   | 54.00          | -6.62       | 33.68                | 13.70                 | AV            |
| 3   | 2390            | 47.23                   | 54.00          | -6.77       | 33.53                | 13.70                 | AV            |
| ! 4 | 2433.7          | 100.80                  | 54.00          | 46.80       | 86.79                | 14.01                 | AV            |
| 5   | 2483.5          | 46.20                   | 54.00          | -7.80       | 31.84                | 14.36                 | AV            |
| 6   | 2500            | 42.79                   | 54.00          | -11.21      | 28.31                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

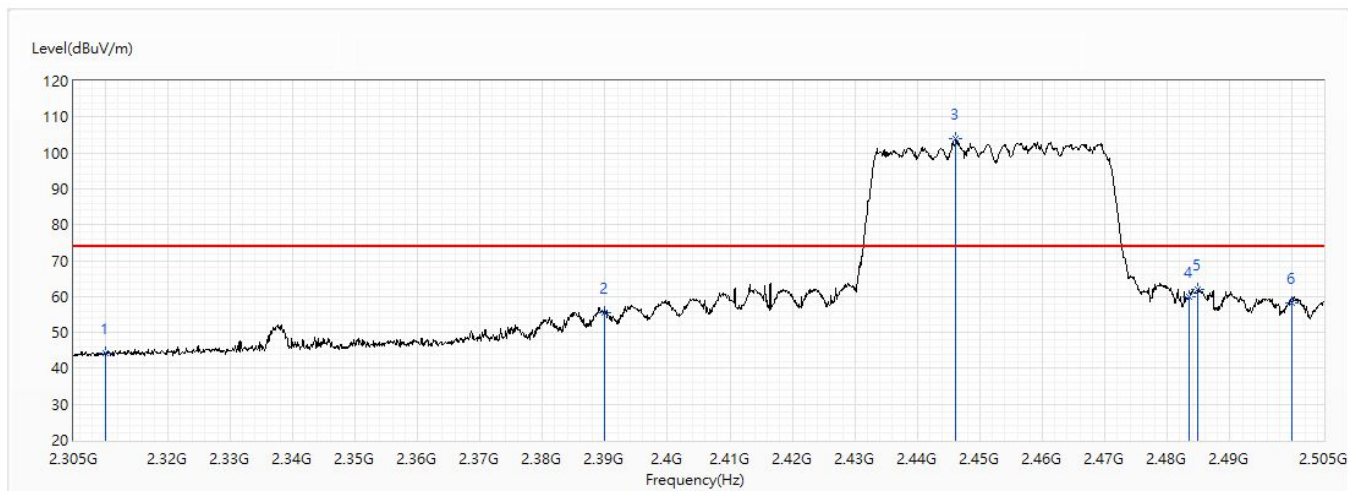


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 44.19                   | 74.00          | -29.81      | 31.04                | 13.15                 | PK            |
| 2   | 2390            | 55.37                   | 74.00          | -18.63      | 41.67                | 13.70                 | PK            |
| ! 3 | 2446.1          | 103.92                  | 74.00          | 29.92       | 89.82                | 14.10                 | PK            |
| 4   | 2483.5          | 60.08                   | 74.00          | -13.92      | 45.72                | 14.36                 | PK            |
| 5   | 2484.9          | 62.07                   | 74.00          | -11.93      | 47.70                | 14.37                 | PK            |
| 6   | 2500            | 58.27                   | 74.00          | -15.73      | 43.79                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Horizontal                       | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

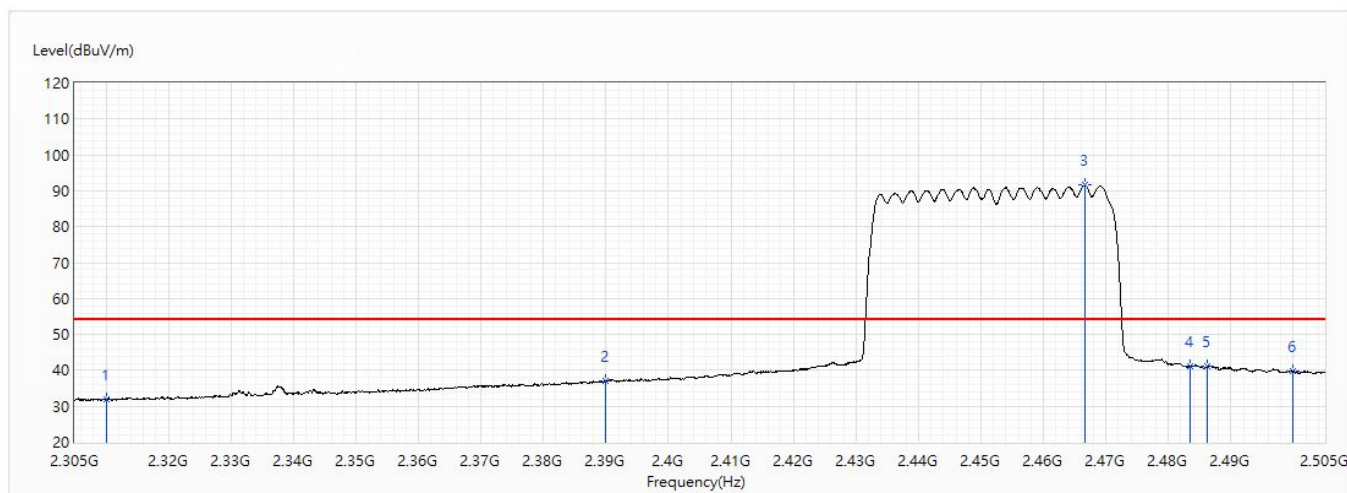


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 31.81                   | 54.00          | -22.19      | 18.66                | 13.15                 | AV            |
| 2   | 2390            | 37.04                   | 54.00          | -16.96      | 23.34                | 13.70                 | AV            |
| ! 3 | 2466.6          | 91.54                   | 54.00          | 37.54       | 77.30                | 14.24                 | AV            |
| 4   | 2483.5          | 41.09                   | 54.00          | -12.91      | 26.73                | 14.36                 | AV            |
| 5   | 2486.3          | 41.12                   | 54.00          | -12.88      | 26.73                | 14.39                 | AV            |
| 6   | 2500            | 39.65                   | 54.00          | -14.35      | 25.17                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

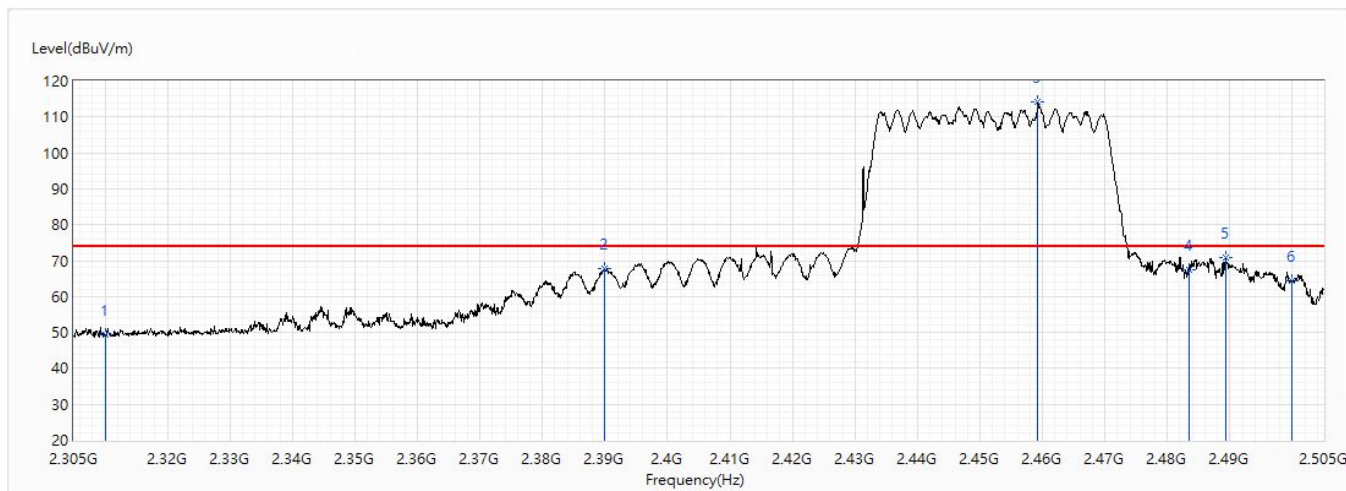


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 49.28                   | 74.00          | -24.72      | 36.13                | 13.15                 | PK            |
| 2   | 2390            | 67.76                   | 74.00          | -6.24       | 54.06                | 13.70                 | PK            |
| ! 3 | 2459.3          | 114.05                  | 74.00          | 40.05       | 99.86                | 14.19                 | PK            |
| 4   | 2483.5          | 67.45                   | 74.00          | -6.55       | 53.09                | 14.36                 | PK            |
| 5   | 2489.3          | 70.81                   | 74.00          | -3.19       | 56.41                | 14.40                 | PK            |
| 6   | 2500            | 64.24                   | 74.00          | -9.76       | 49.76                | 14.48                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                  |                  |           |
|----------------|----------------------------------|------------------|-----------|
| Model No       | D2260G                           | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                     | Test Date        | 2020/8/12 |
| Test Mode      | Mode 2: CDD Mode                 | Engineer         | Scott     |
| Polarity       | Vertical                         | Temperature (°C) | 25.0      |
| Test Condition | 802.11ax_BW40M_Ant0+1_Ch9_2.452G | Humidity (%RH)   | 58.0      |

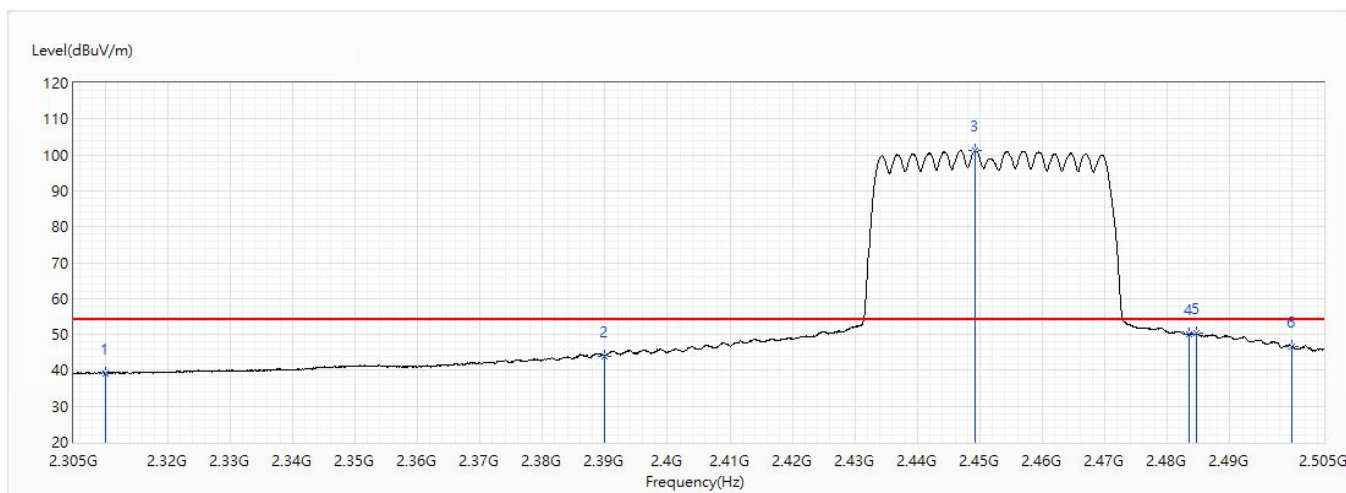


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 2310            | 39.28                   | 54.00          | -14.72      | 26.13                | 13.15                 | AV            |
| 2   | 2390            | 44.04                   | 54.00          | -9.96       | 30.34                | 13.70                 | AV            |
| ! 3 | 2449.3          | 101.18                  | 54.00          | 47.18       | 87.05                | 14.13                 | AV            |
| 4   | 2483.5          | 49.92                   | 54.00          | -4.08       | 35.56                | 14.36                 | AV            |
| 5   | 2484.6          | 50.24                   | 54.00          | -3.76       | 35.88                | 14.36                 | AV            |
| 6   | 2500            | 46.55                   | 54.00          | -7.45       | 32.07                | 14.48                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

## 7. DTS Bandwidth

### 7.1. Test Setup

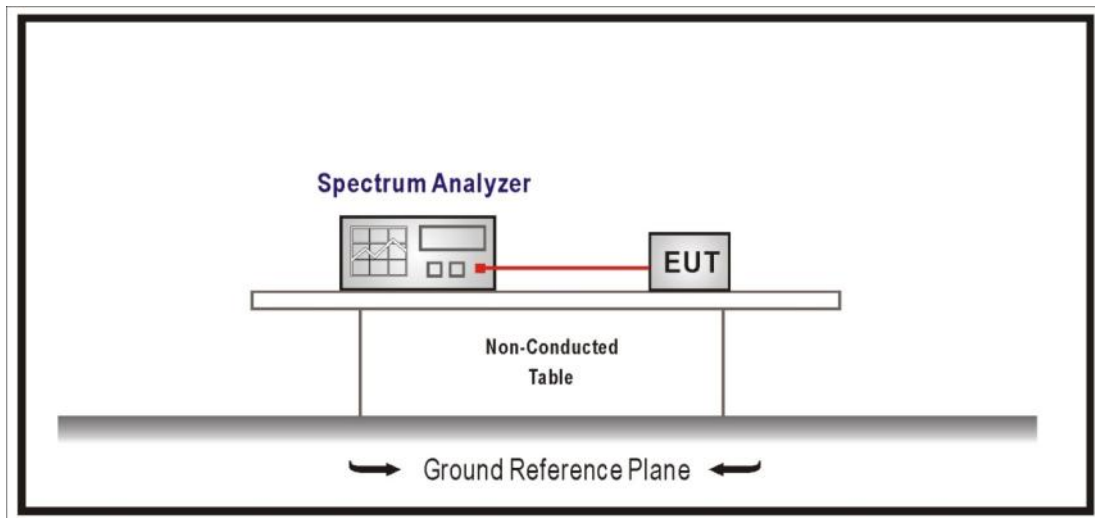

### 7.2. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested procedure section 8.1 of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100KHz, Set the VBW  $\geq 3 \times$  RBW, Sweep Time=Auto, Set Peak Detector.

### 7.3. Limits

The 6 dB bandwidth must be greater than 500 kHz.

### 7.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019


## 7.5. Test Result

|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |


### 802.11b (ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 1           | 2412            | 7.047               | $\geq 0.5$  | Pass   |
| 6           | 2437            | 7.054               | $\geq 0.5$  | Pass   |
| 11          | 2462            | 7.051               | $\geq 0.5$  | Pass   |


### Channel 1 (2412MHz)

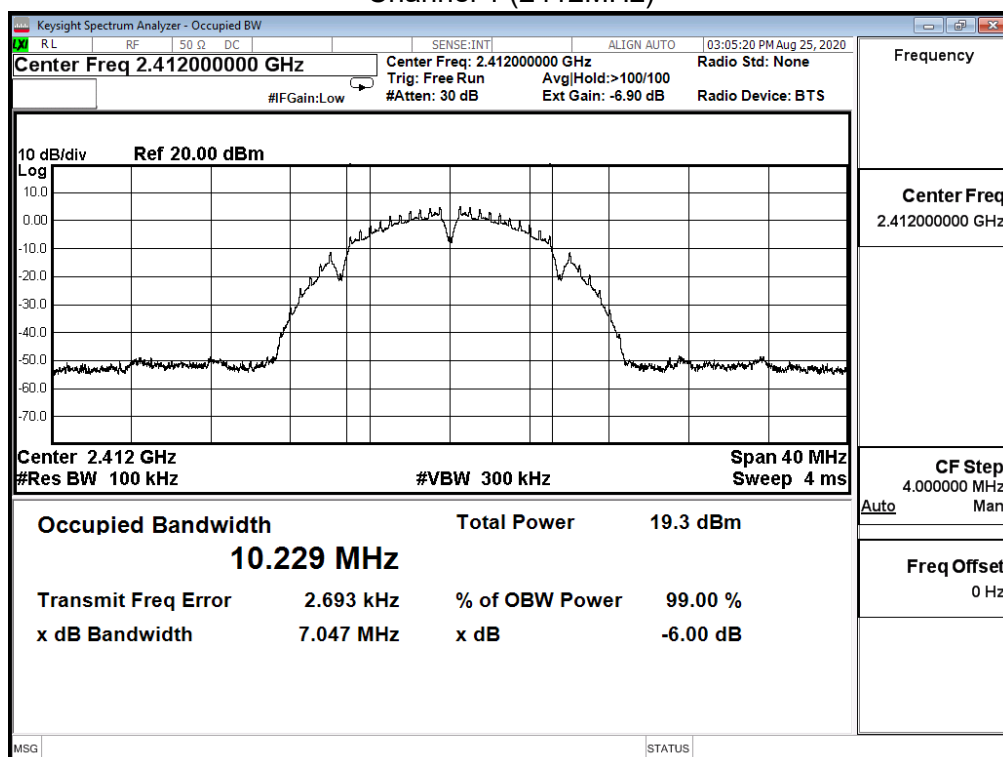

Channel 6 (2437MHz)

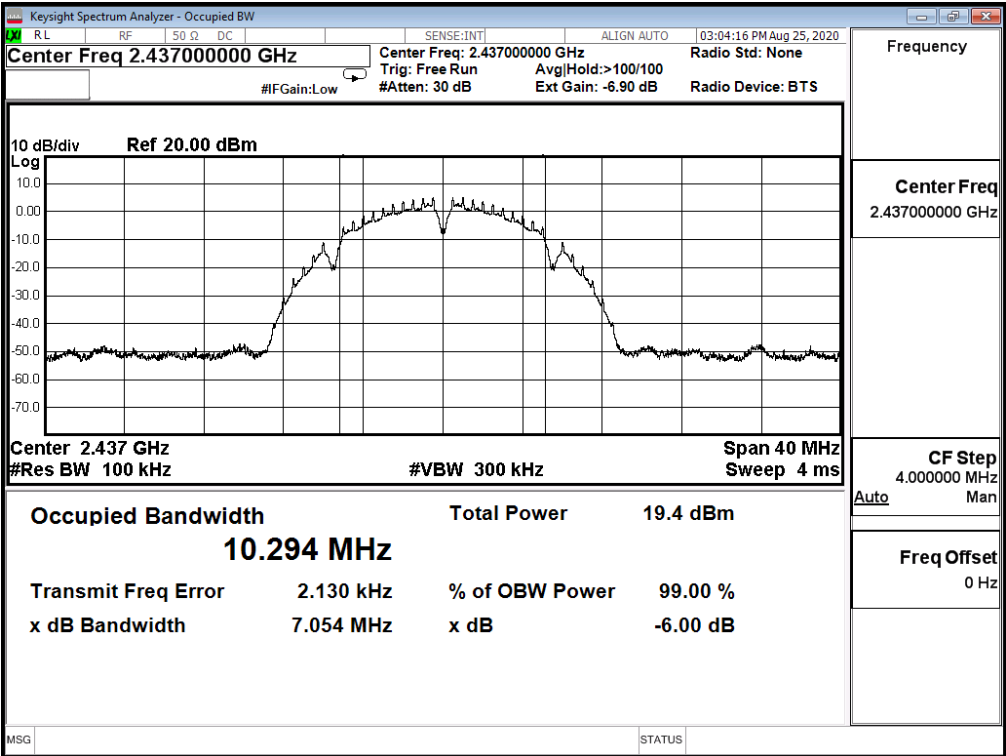


Channel 11 (2462MHz)

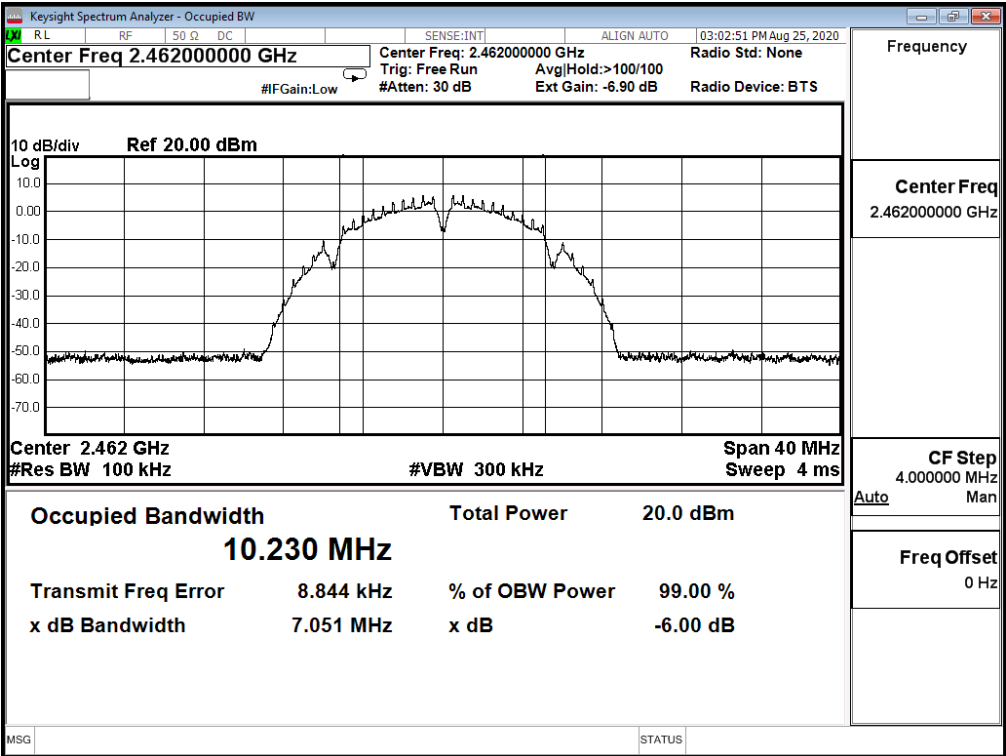


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| 802.11b (ANT 1) |                 |                     |             |        |
|-----------------|-----------------|---------------------|-------------|--------|
| Channel No.     | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1               | 2412            | 7.054               | $\geq 0.5$  | Pass   |
| 6               | 2437            | 7.064               | $\geq 0.5$  | Pass   |
| 11              | 2462            | 7.055               | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

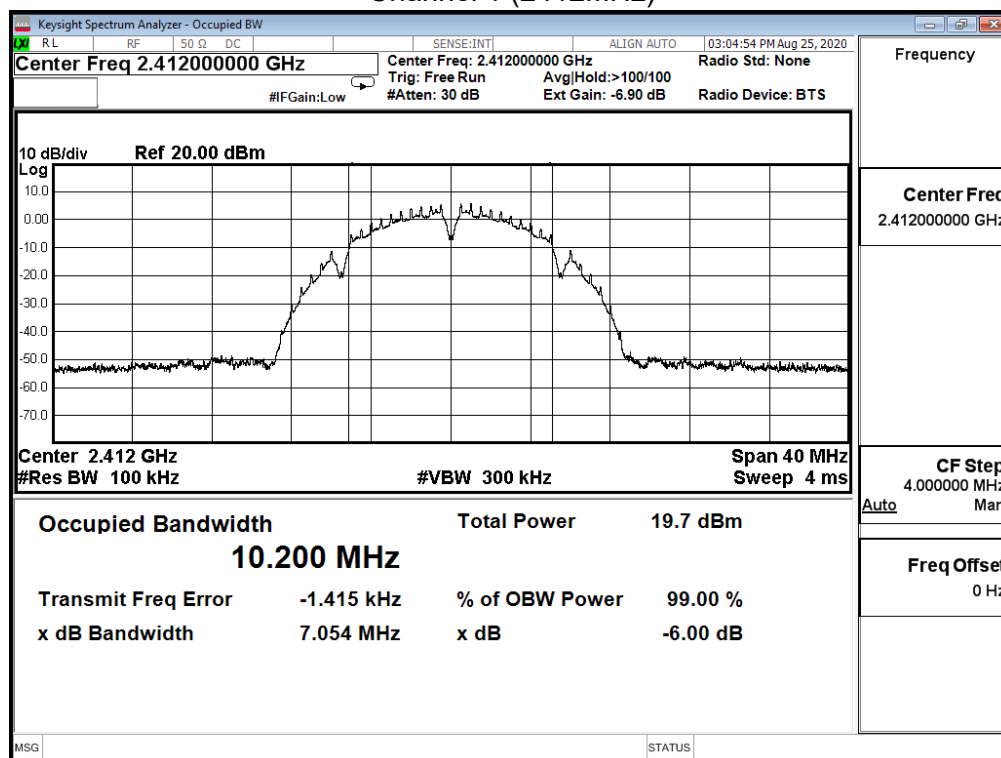

Channel 6 (2437MHz)

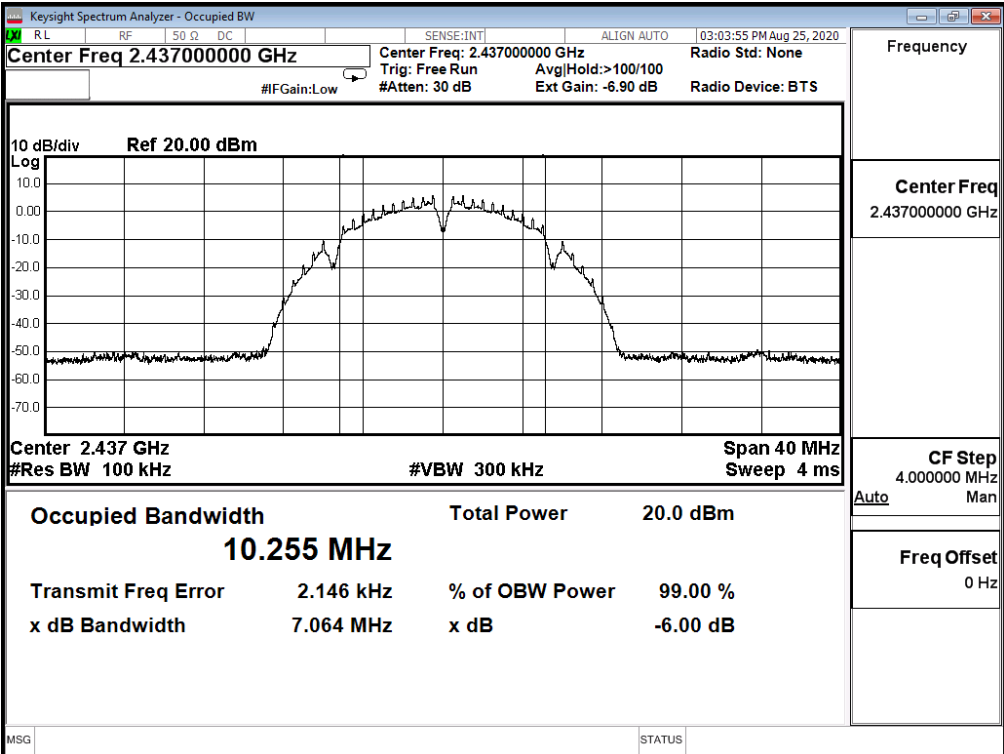

Channel 11 (2462MHz)

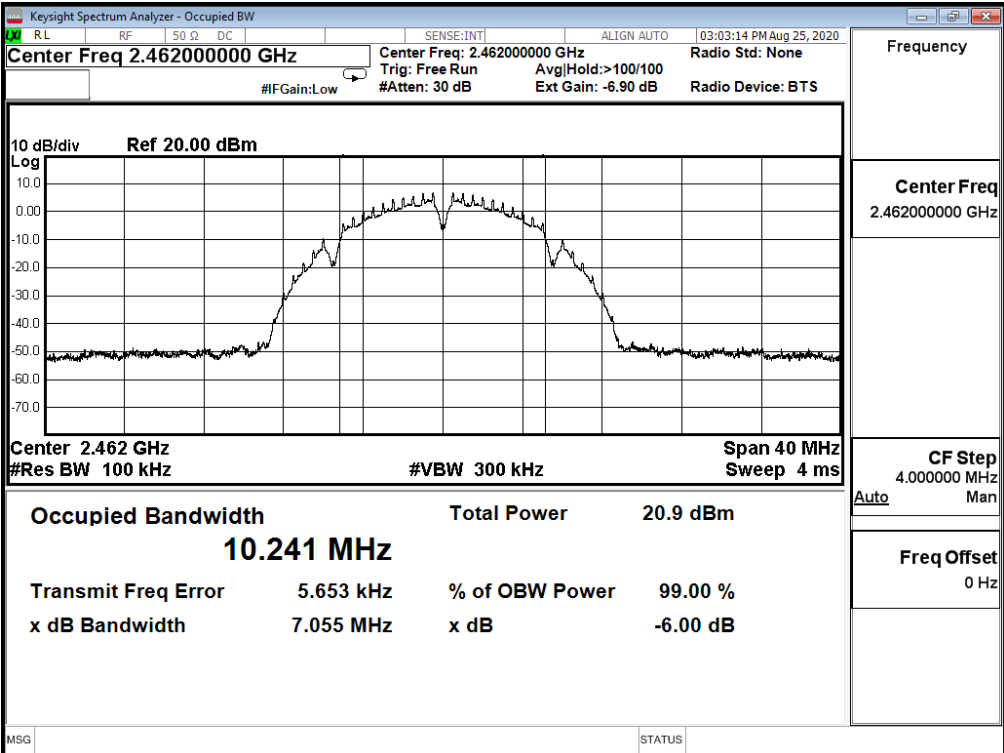


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |


## 802.11g (ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 1           | 2412            | 16.360              | $\geq 0.5$  | Pass   |
| 6           | 2437            | 16.360              | $\geq 0.5$  | Pass   |
| 11          | 2462            | 16.340              | $\geq 0.5$  | Pass   |


## Channel 1 (2412MHz)

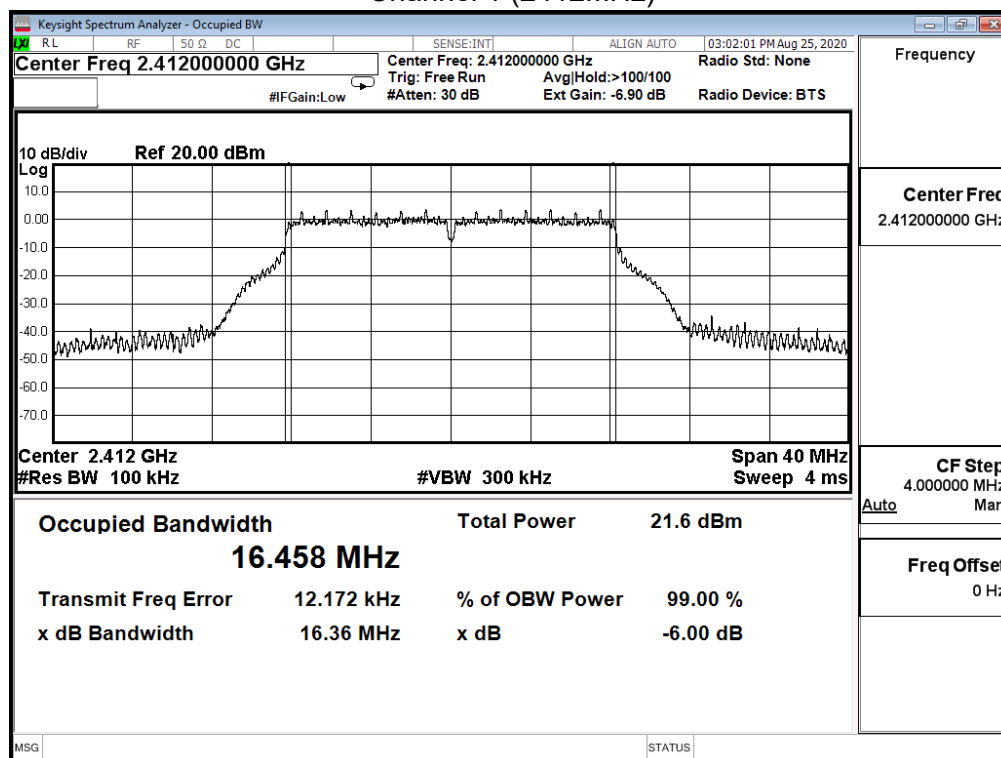

Channel 6 (2437MHz)

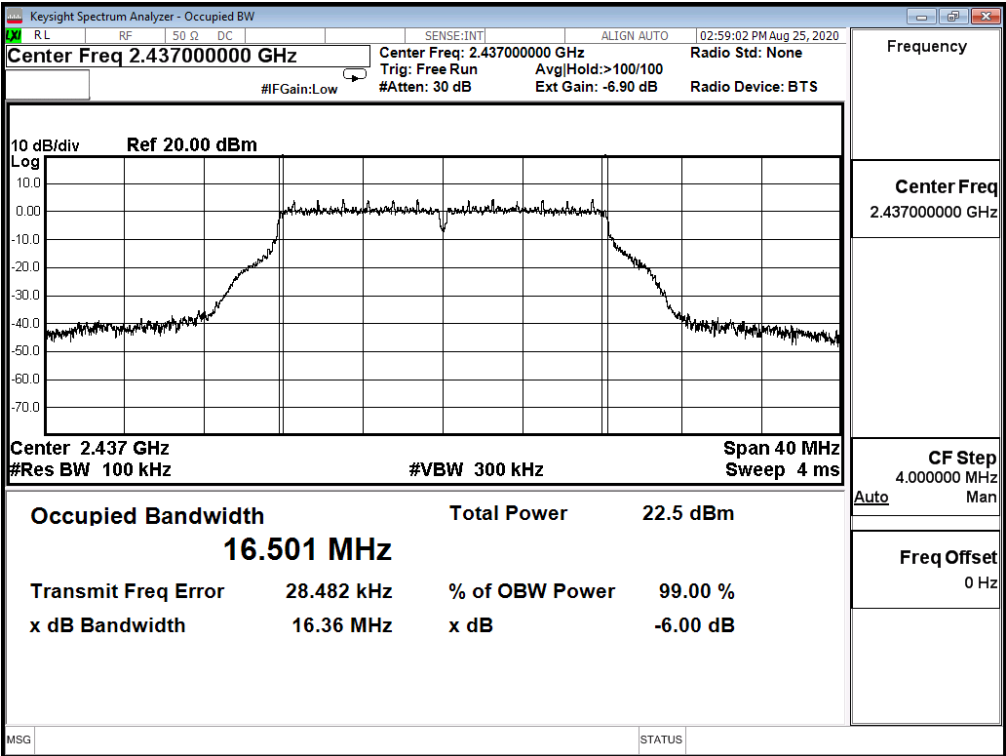


Channel 11 (2462MHz)

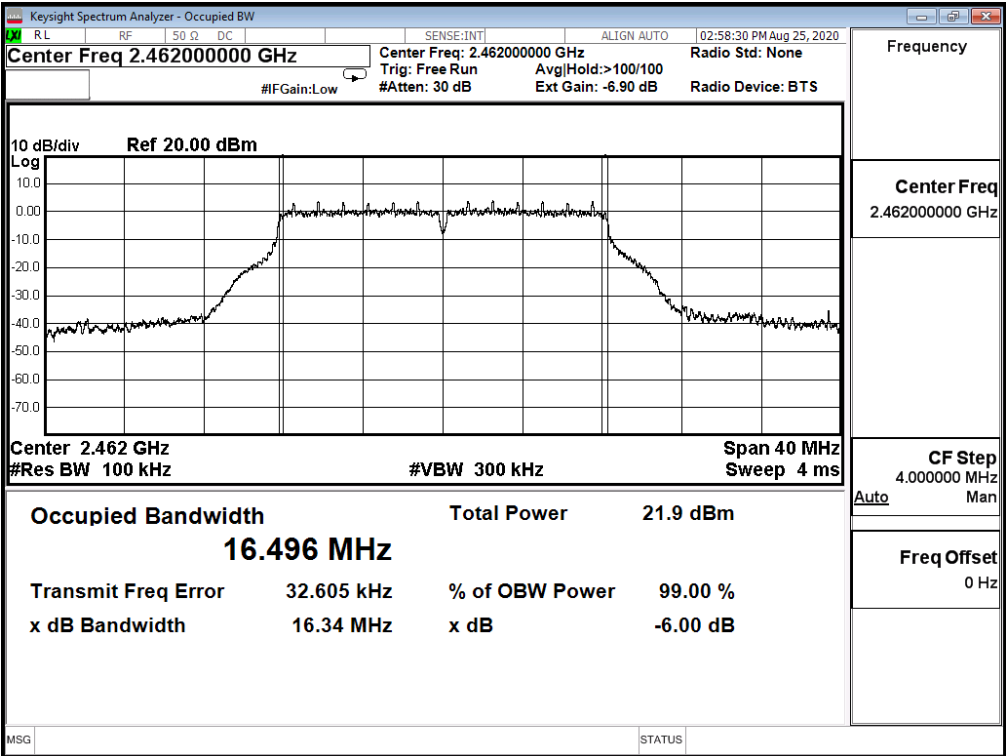


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| 802.11g (ANT 1) |                 |                     |             |        |
|-----------------|-----------------|---------------------|-------------|--------|
| Channel No.     | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1               | 2412            | 16.350              | $\geq 0.5$  | Pass   |
| 6               | 2437            | 16.340              | $\geq 0.5$  | Pass   |
| 11              | 2462            | 16.340              | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

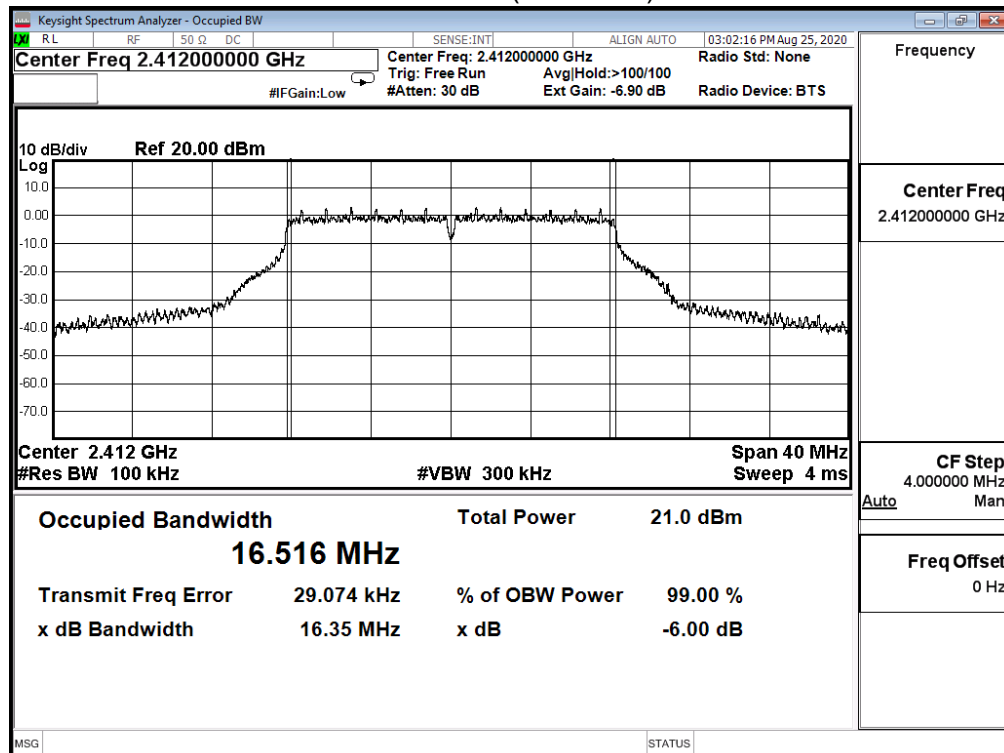

Channel 6 (2437MHz)

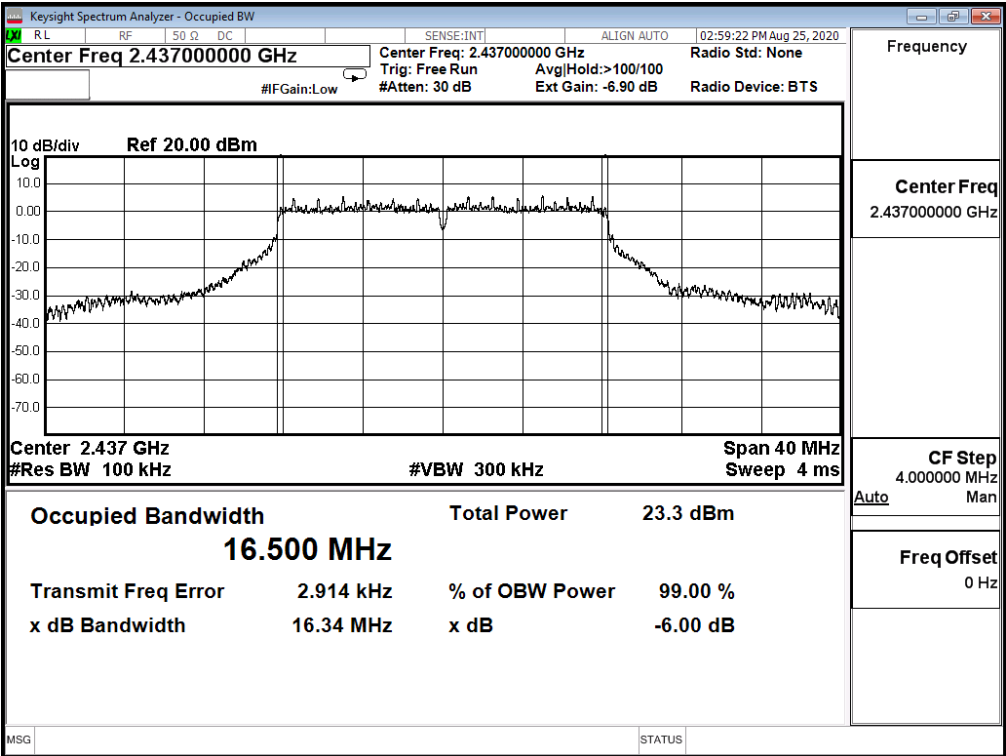


Channel 11 (2462MHz)

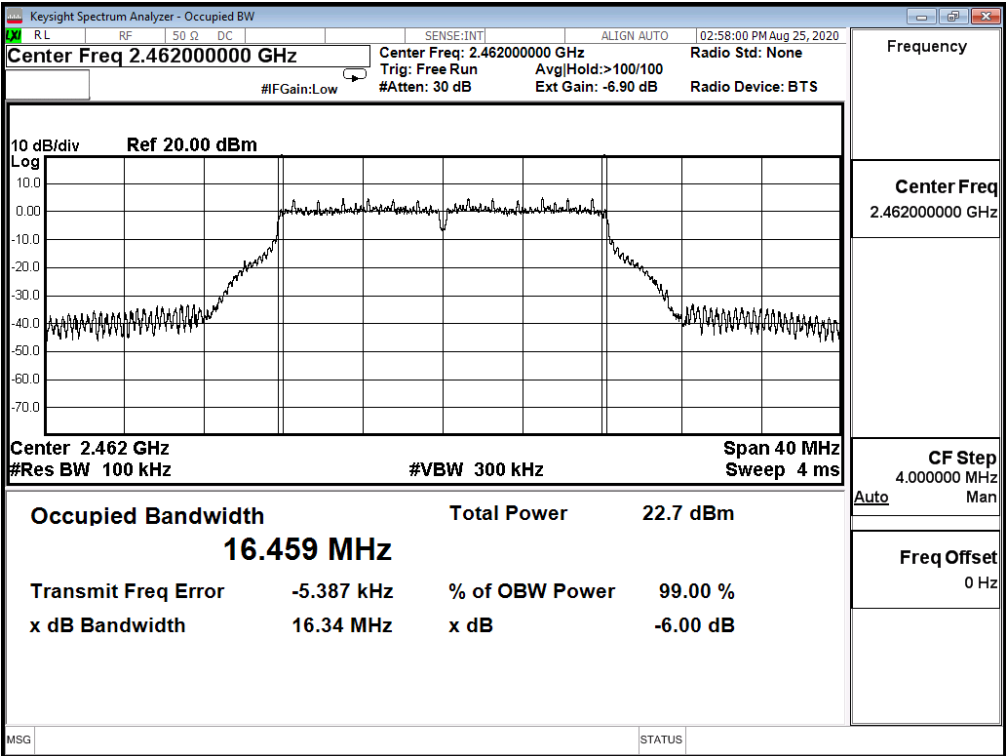


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11n(20M)(ANT 0) |                 |                     |             |        |
|--------------------------|-----------------|---------------------|-------------|--------|
| Channel No.              | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1                        | 2412            | 17.600              | $\geq 0.5$  | Pass   |
| 6                        | 2437            | 17.580              | $\geq 0.5$  | Pass   |
| 11                       | 2462            | 17.590              | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

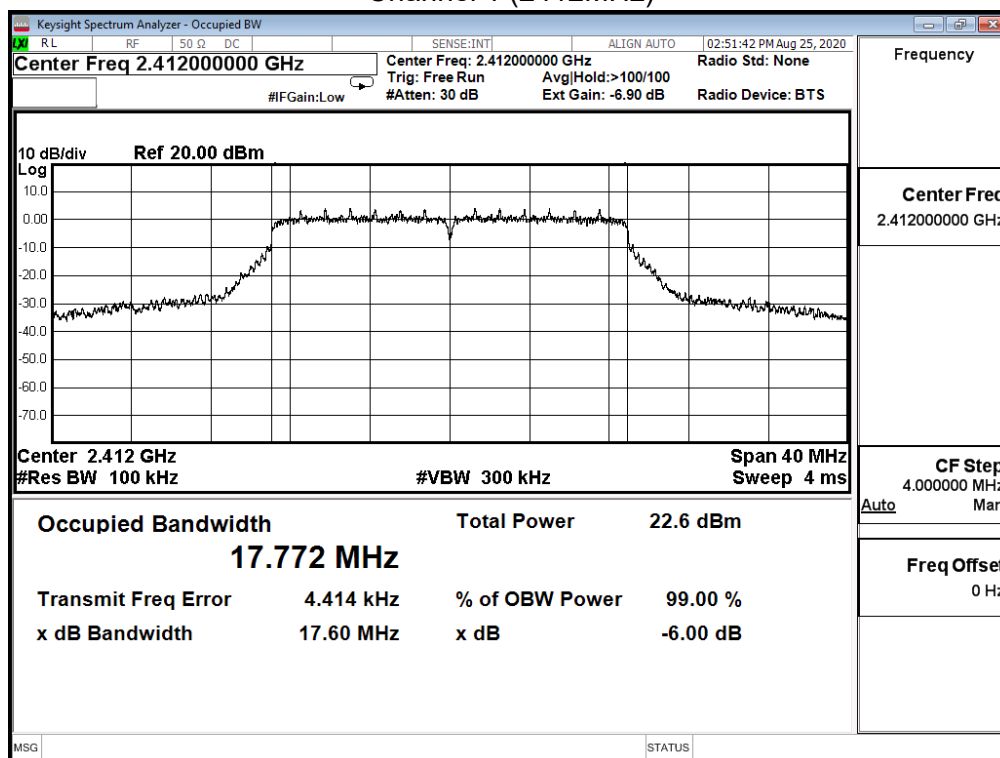

Channel 6 (2437MHz)

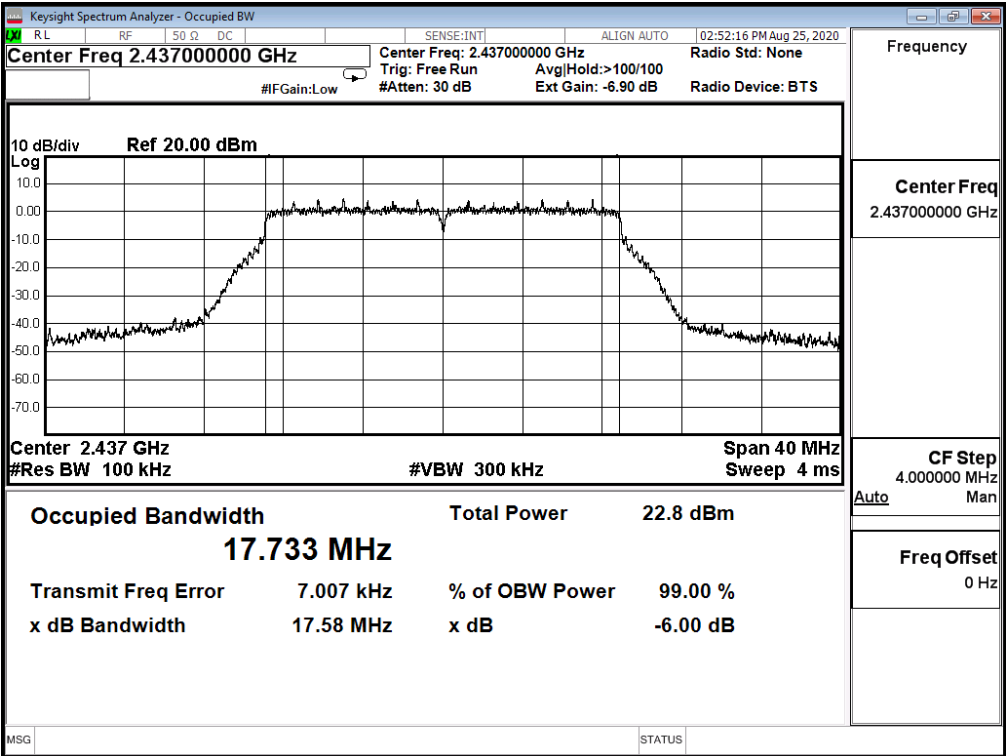


Channel 11 (2462MHz)

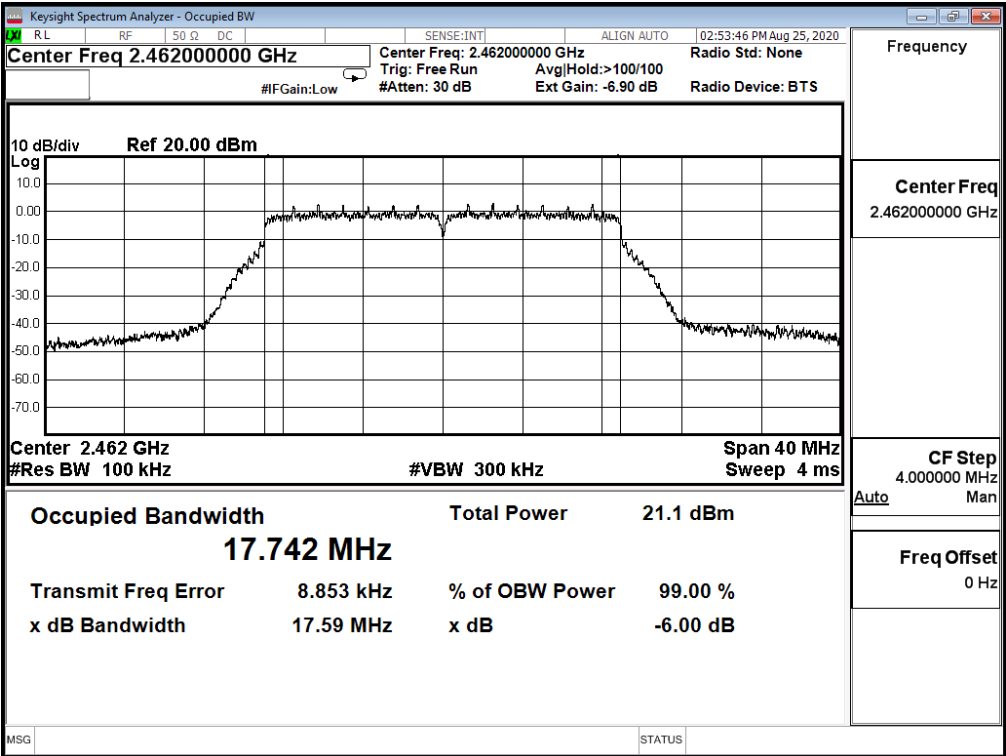


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11n(20M)(ANT 1) |                 |                     |             |        |
|--------------------------|-----------------|---------------------|-------------|--------|
| Channel No.              | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1                        | 2412            | 17.580              | $\geq 0.5$  | Pass   |
| 6                        | 2437            | 17.560              | $\geq 0.5$  | Pass   |
| 11                       | 2462            | 17.580              | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

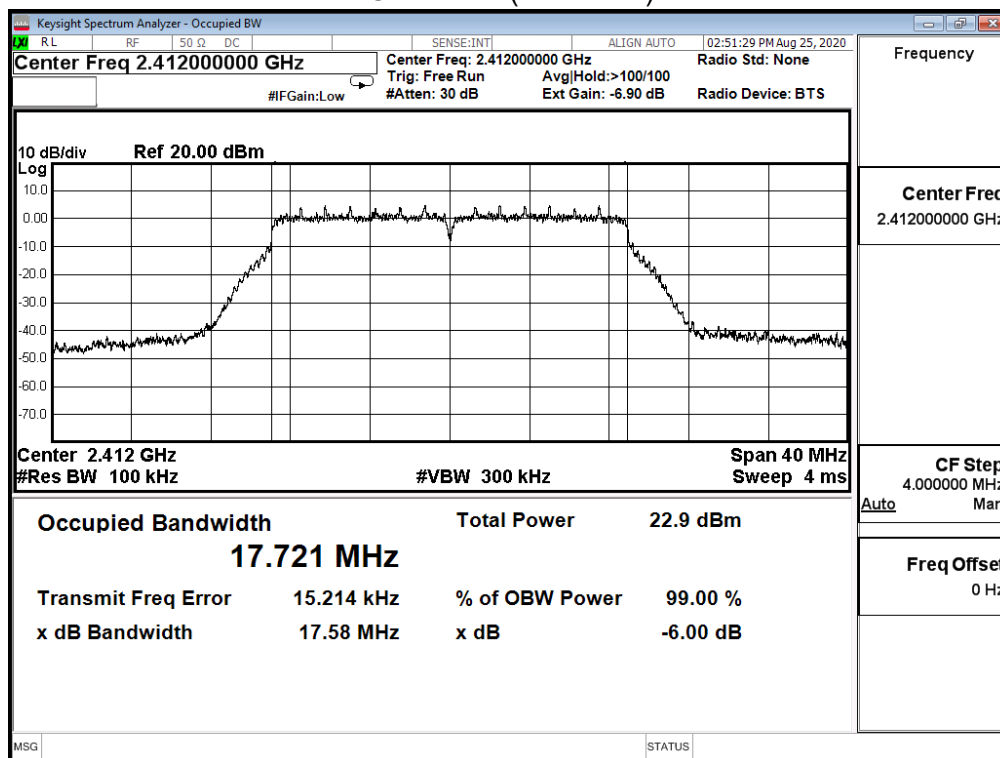

Channel 6 (2437MHz)

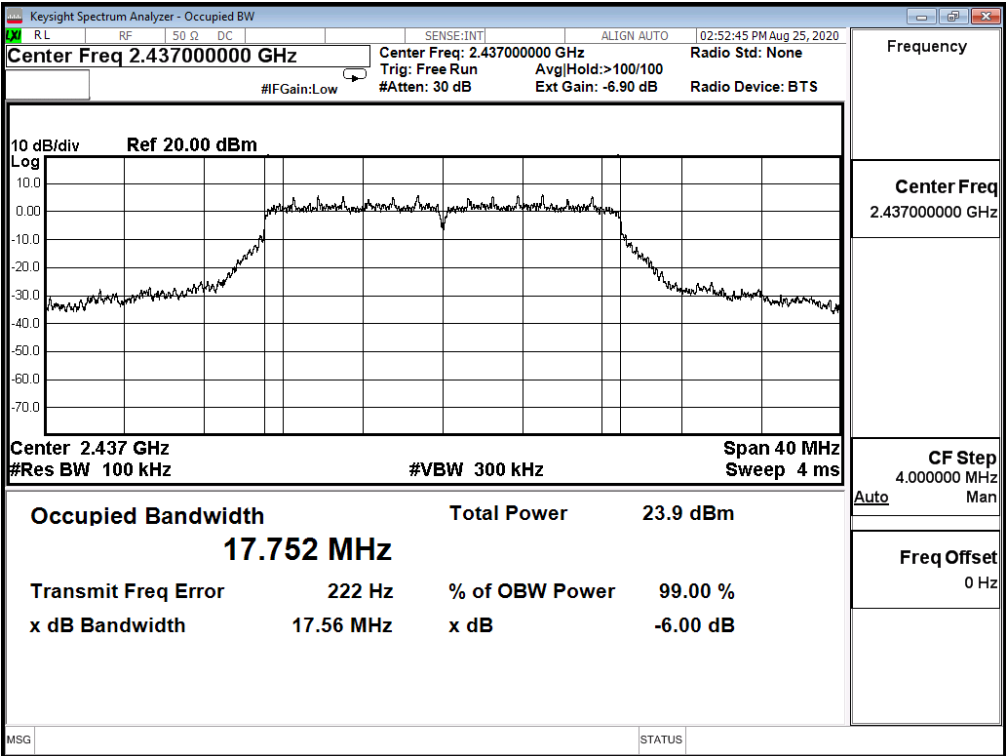


Channel 11 (2462MHz)

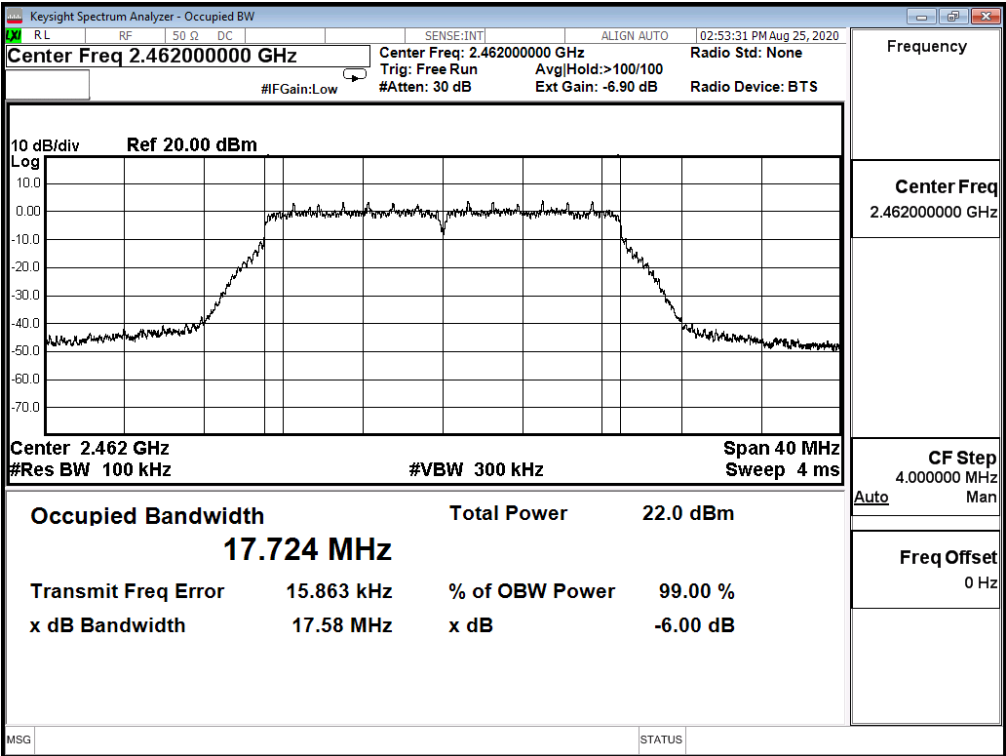


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11n(40M)(ANT 0) |                 |                     |             |        |
|--------------------------|-----------------|---------------------|-------------|--------|
| Channel No.              | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 3                        | 2422            | 36.430              | $\geq 0.5$  | Pass   |
| 6                        | 2437            | 36.300              | $\geq 0.5$  | Pass   |
| 9                        | 2452            | 36.320              | $\geq 0.5$  | Pass   |


Channel 3 (2422MHz)

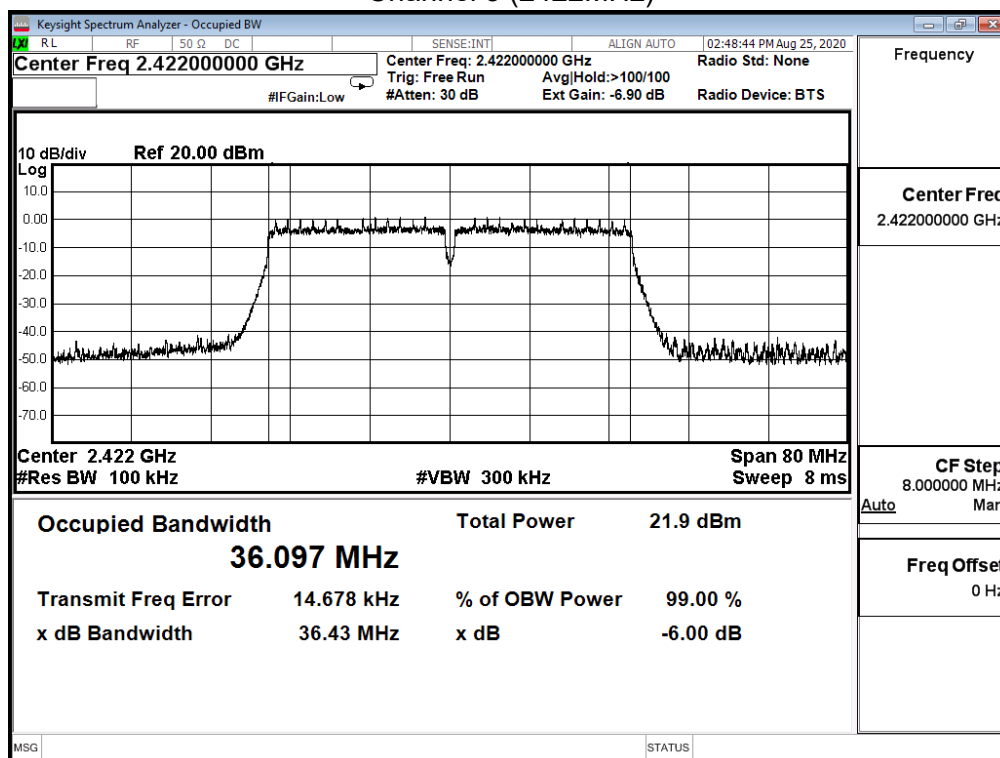

Channel 6 (2437MHz)

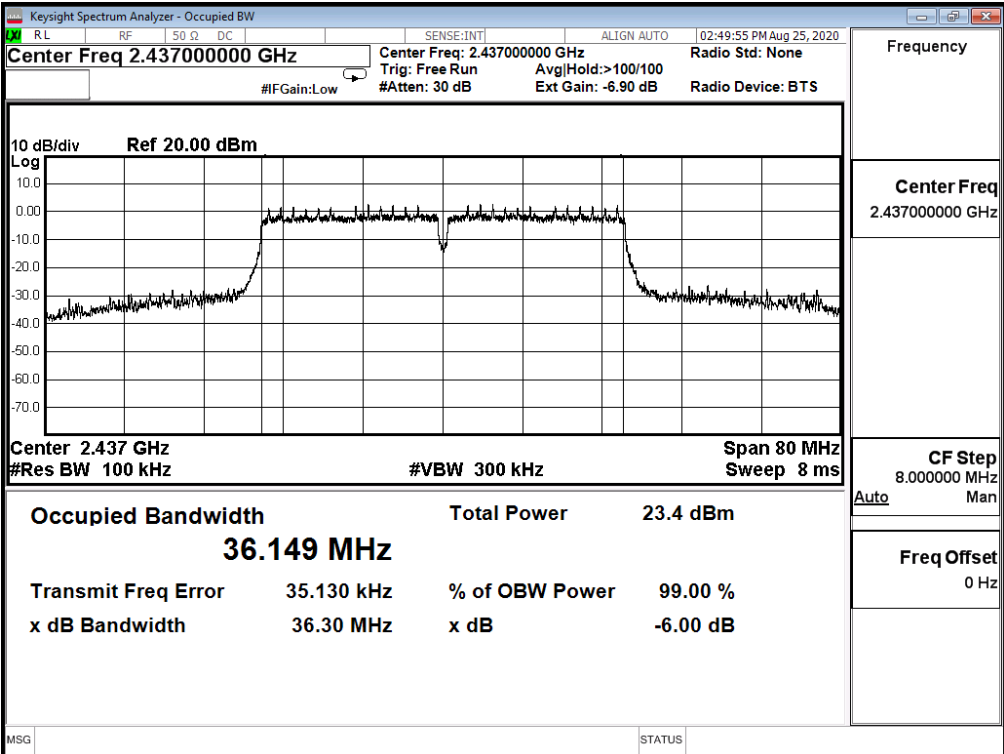


Channel 9 (2452MHz)

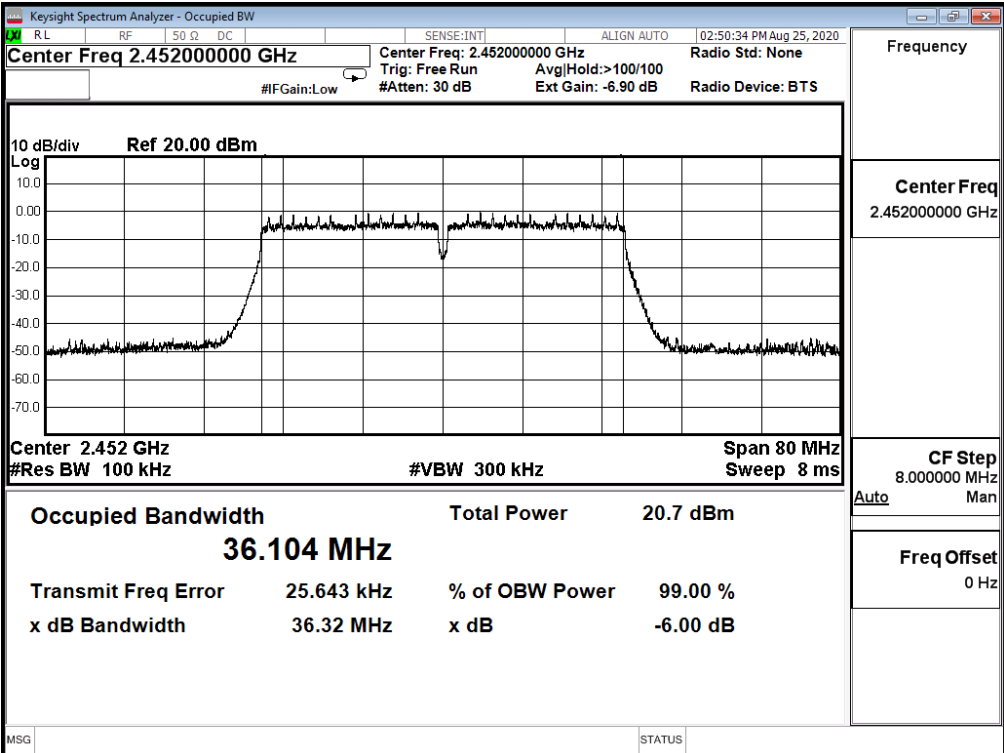


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11n(40M)(ANT 1) |                 |                     |             |        |
|--------------------------|-----------------|---------------------|-------------|--------|
| Channel No.              | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 3                        | 2422            | 36.150              | $\geq 0.5$  | Pass   |
| 6                        | 2437            | 36.180              | $\geq 0.5$  | Pass   |
| 9                        | 2452            | 36.190              | $\geq 0.5$  | Pass   |


Channel 3 (2422MHz)

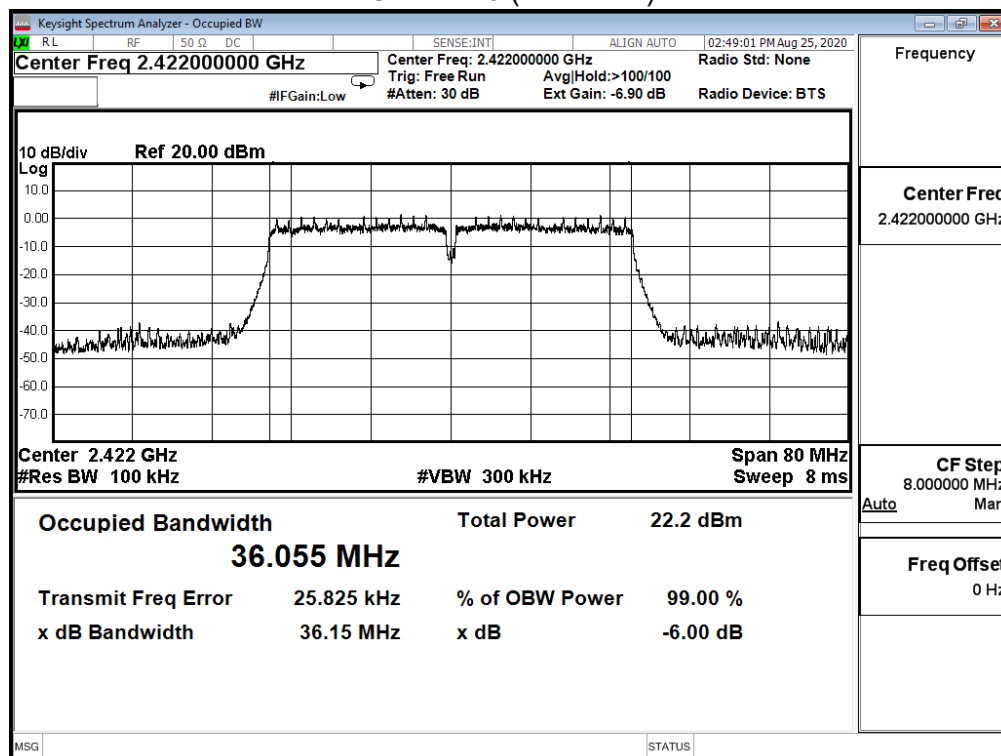

Channel 6 (2437MHz)

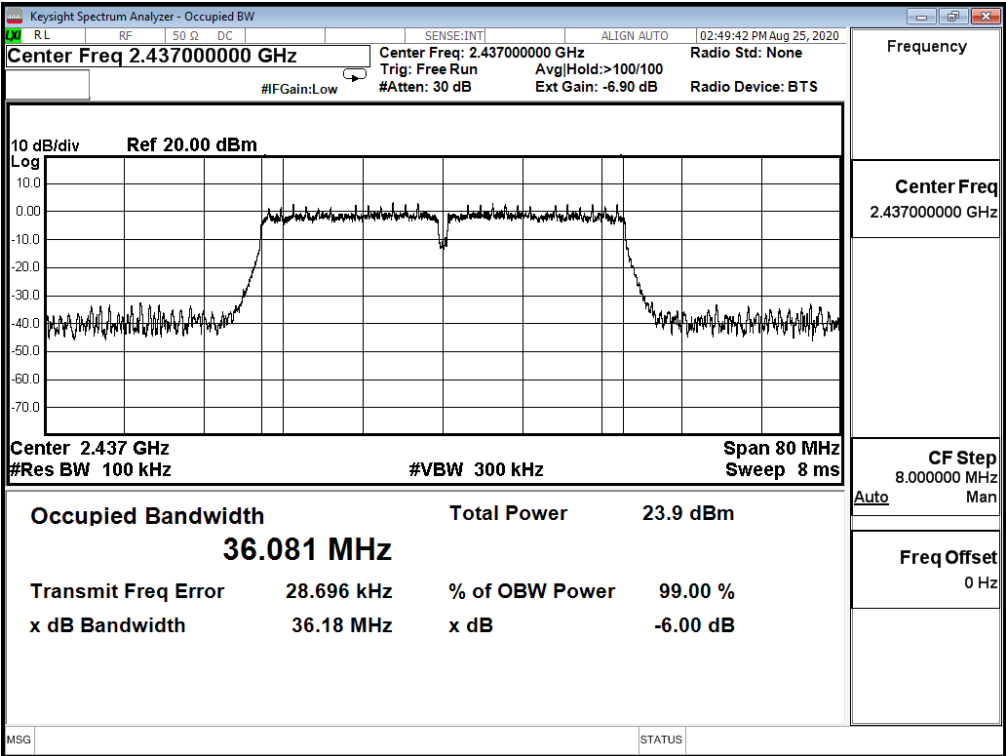


Channel 9 (2452MHz)

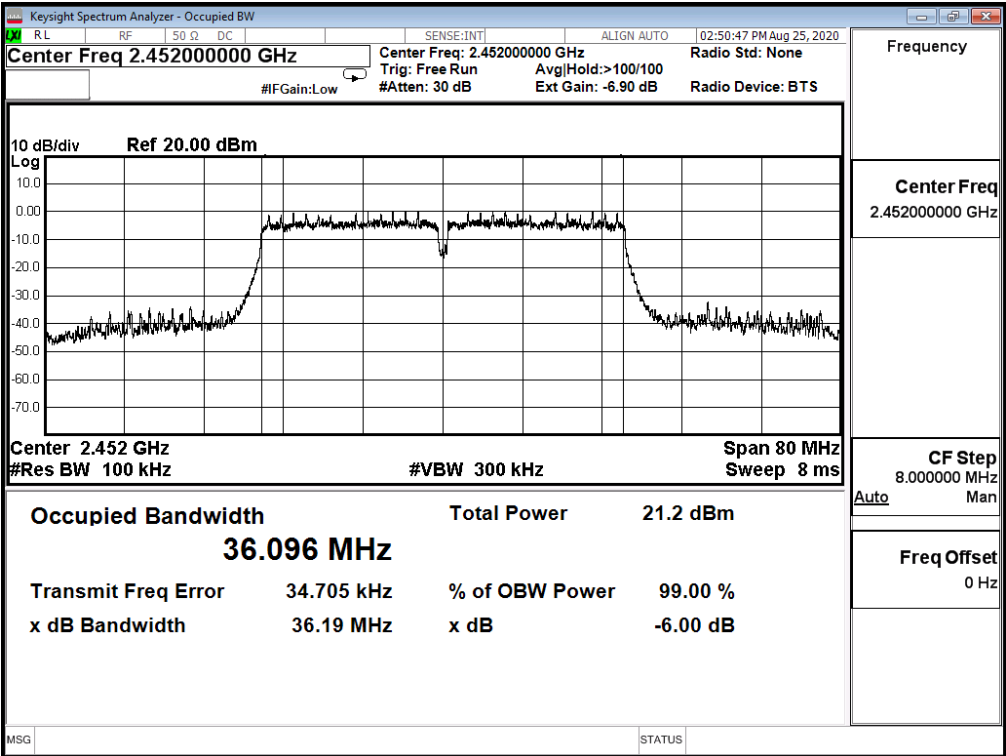


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11ax(20M)(ANT 0) |                 |                     |             |        |
|---------------------------|-----------------|---------------------|-------------|--------|
| Channel No.               | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1                         | 2412            | 18.910              | $\geq 0.5$  | Pass   |
| 6                         | 2437            | 18.800              | $\geq 0.5$  | Pass   |
| 11                        | 2462            | 18.970              | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

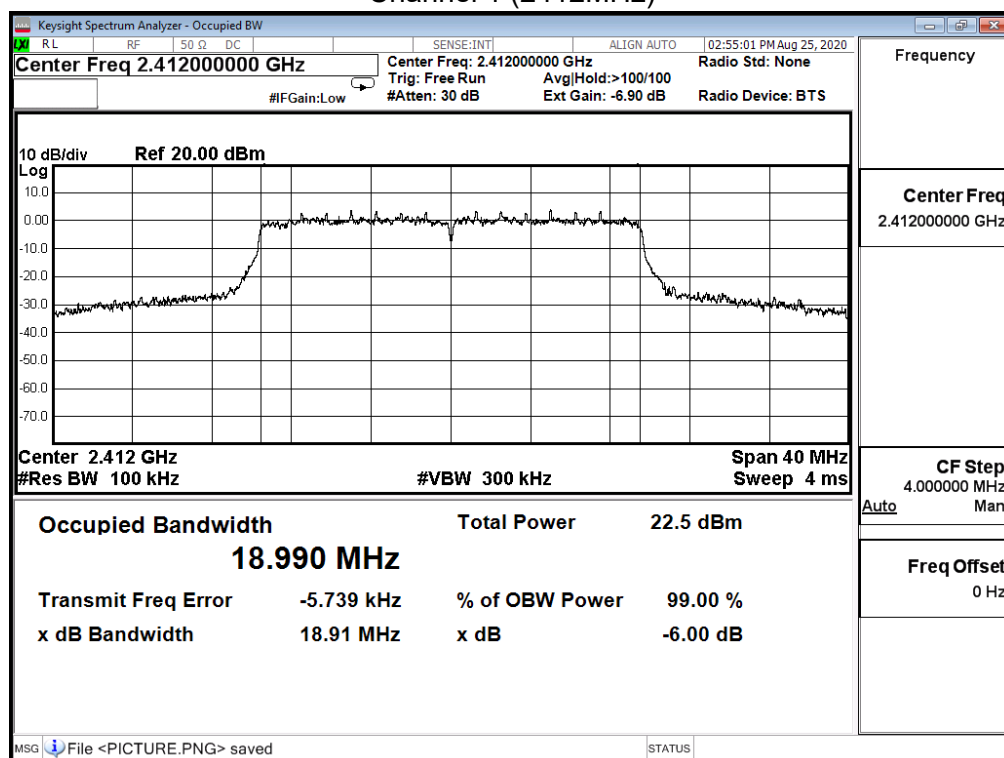

Channel 6 (2437MHz)

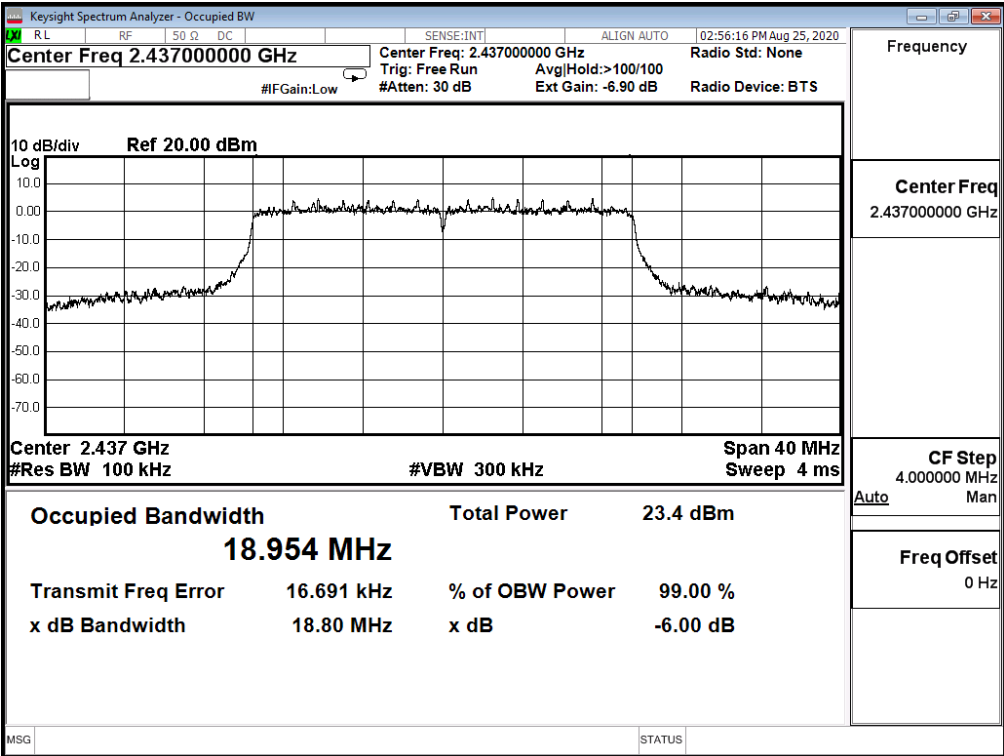


Channel 11 (2462MHz)

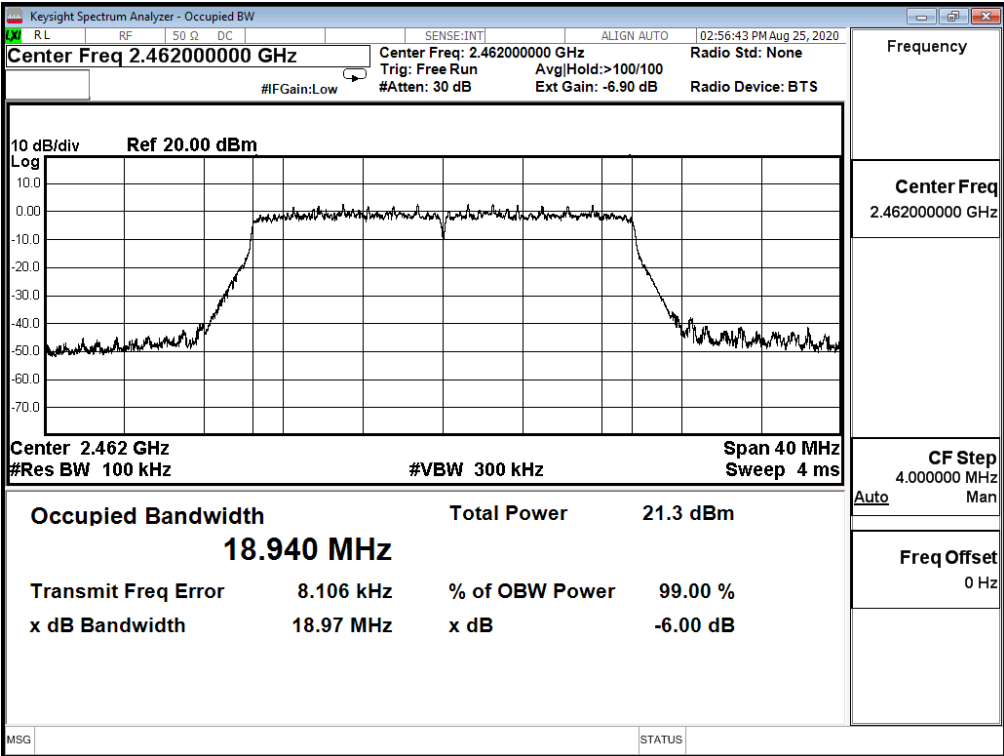


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11ax(20M)(ANT 1) |                 |                     |             |        |
|---------------------------|-----------------|---------------------|-------------|--------|
| Channel No.               | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 1                         | 2412            | 18.960              | $\geq 0.5$  | Pass   |
| 6                         | 2437            | 18.870              | $\geq 0.5$  | Pass   |
| 11                        | 2462            | 18.740              | $\geq 0.5$  | Pass   |


Channel 1 (2412MHz)

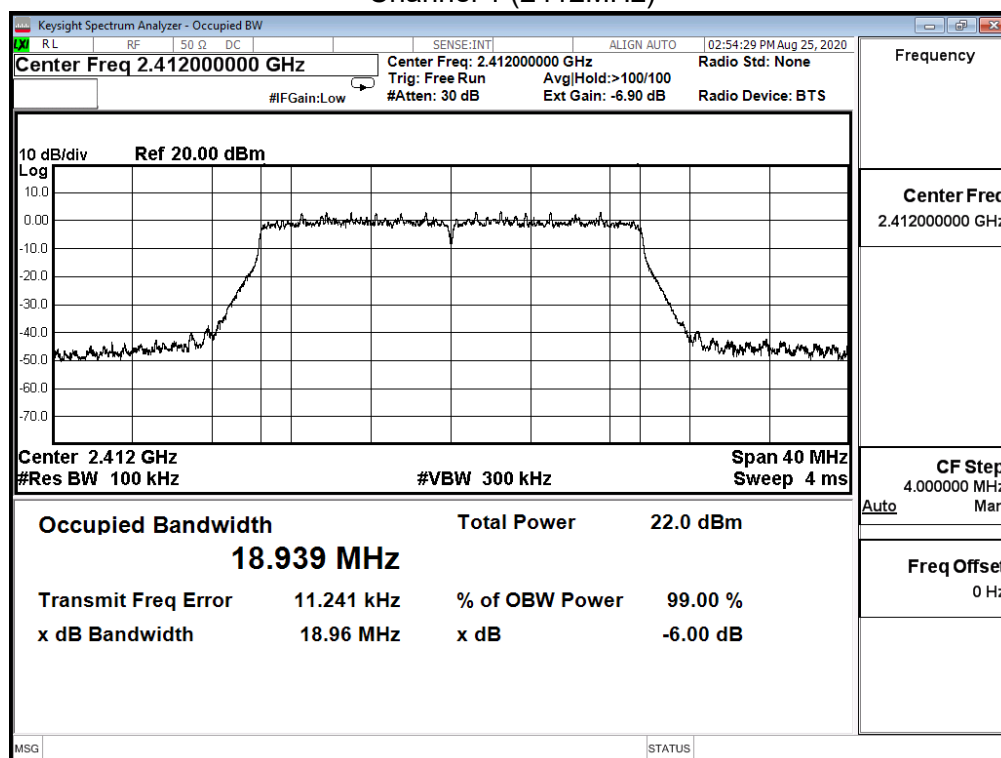

Channel 6 (2437MHz)

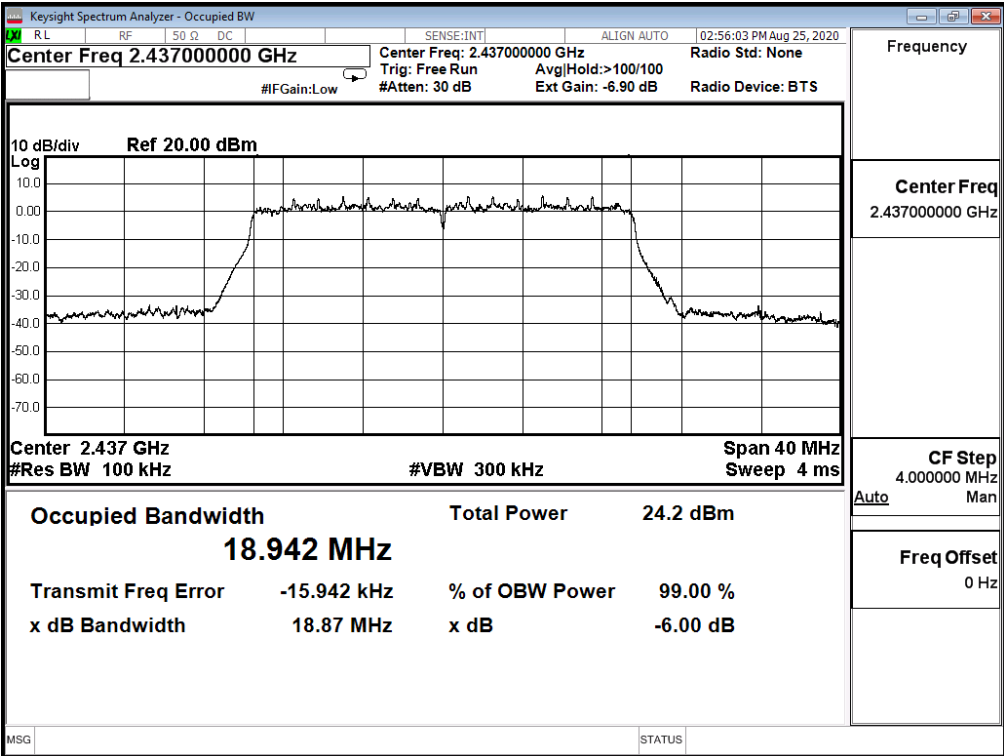


Channel 11 (2462MHz)

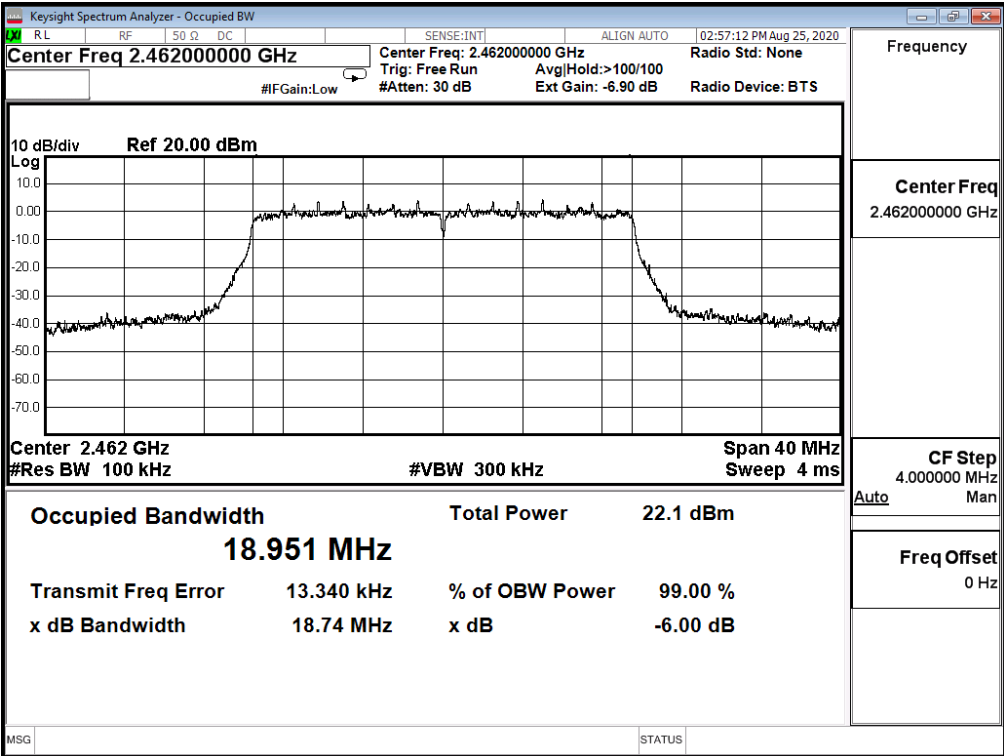


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11ax(40M)(ANT 0) |                 |                     |             |        |
|---------------------------|-----------------|---------------------|-------------|--------|
| Channel No.               | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 3                         | 2422            | 37.600              | $\geq 0.5$  | Pass   |
| 6                         | 2437            | 37.550              | $\geq 0.5$  | Pass   |
| 9                         | 2452            | 37.590              | $\geq 0.5$  | Pass   |


Channel 3 (2422MHz)

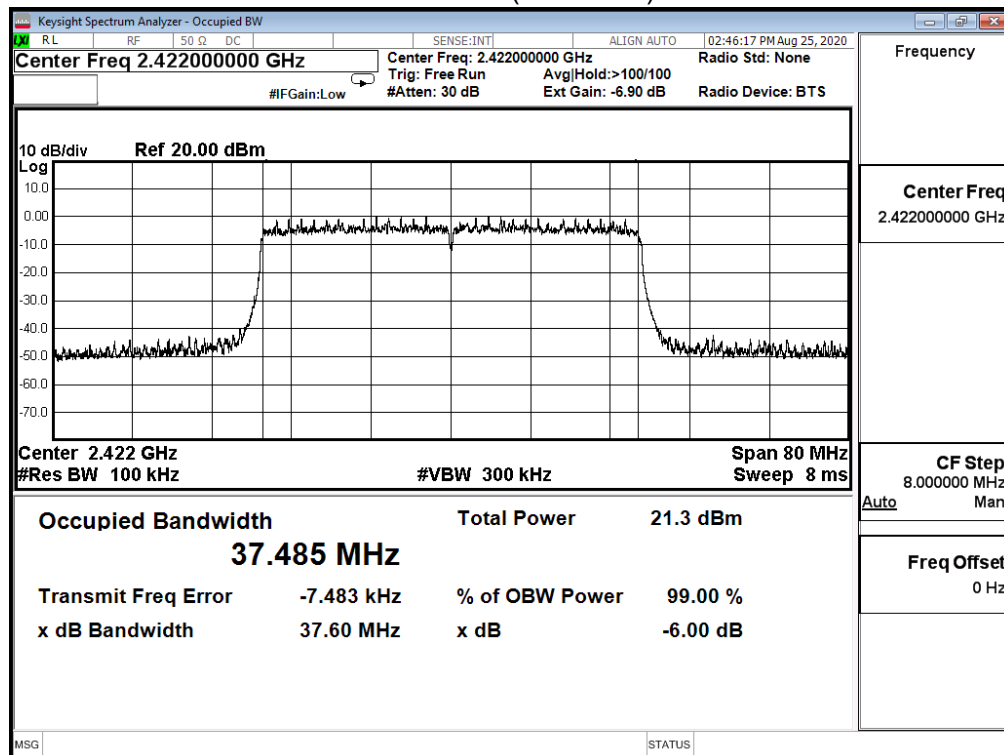

Channel 6 (2437MHz)

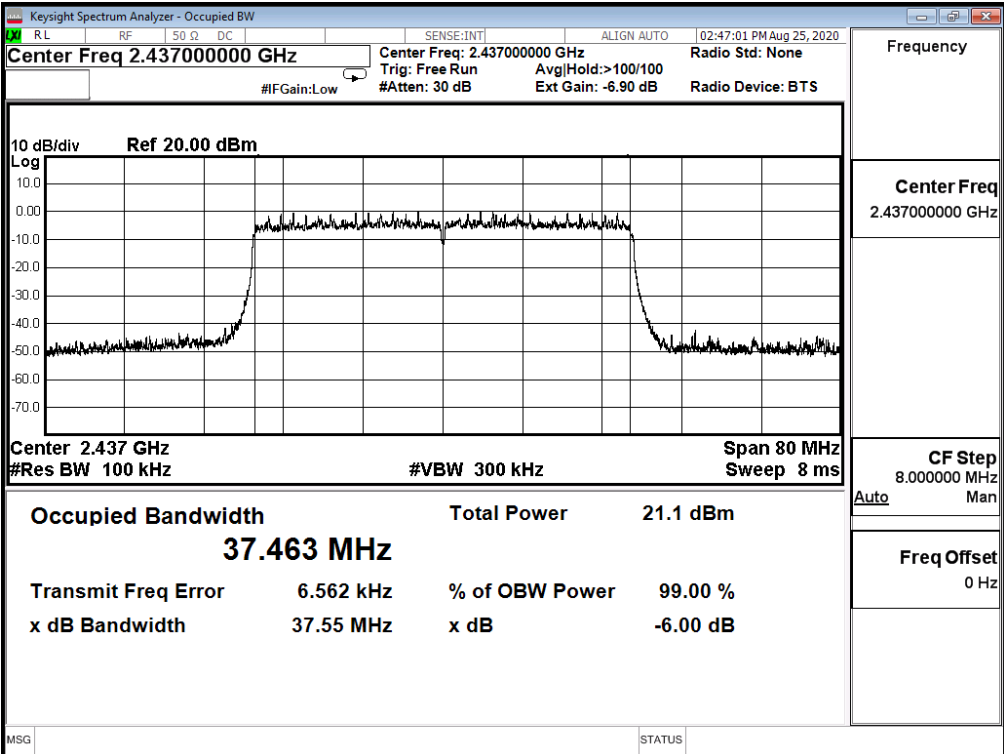


Channel 9 (2452MHz)

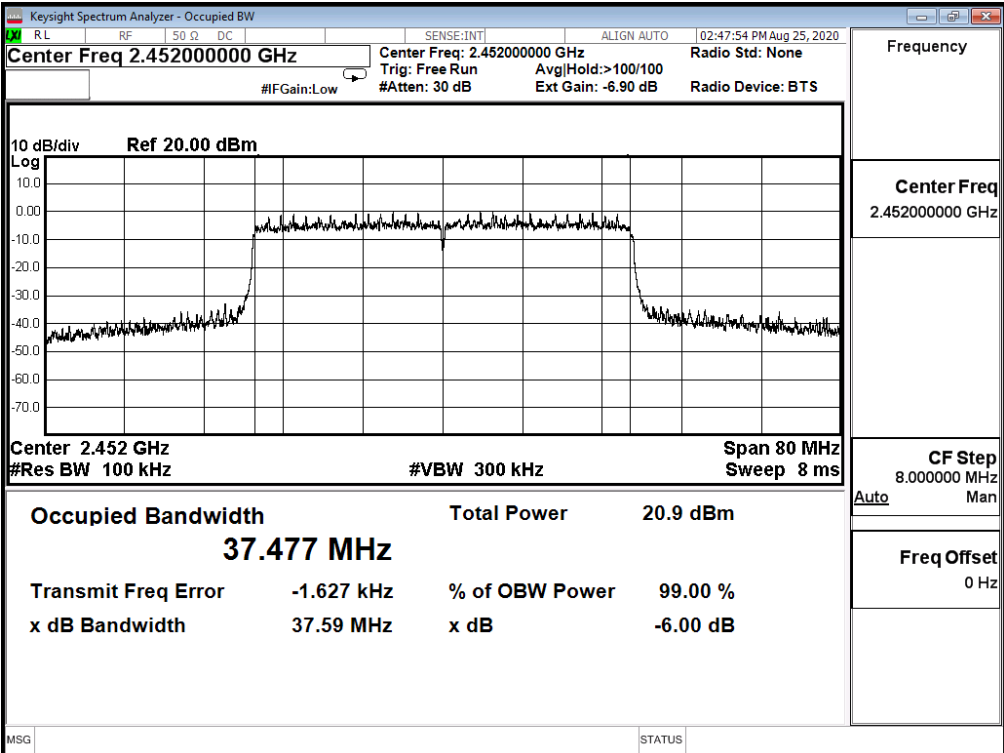


|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | DTS Bandwidth                          |               |        |
| Test Mode        | Mode 2: CDD Mode                       |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| IEEE 802.11ax(40M)(ANT 1) |                 |                     |             |        |
|---------------------------|-----------------|---------------------|-------------|--------|
| Channel No.               | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 3                         | 2422            | 36.750              | $\geq 0.5$  | Pass   |
| 6                         | 2437            | 37.460              | $\geq 0.5$  | Pass   |
| 9                         | 2452            | 37.460              | $\geq 0.5$  | Pass   |


Channel 3 (2422MHz)

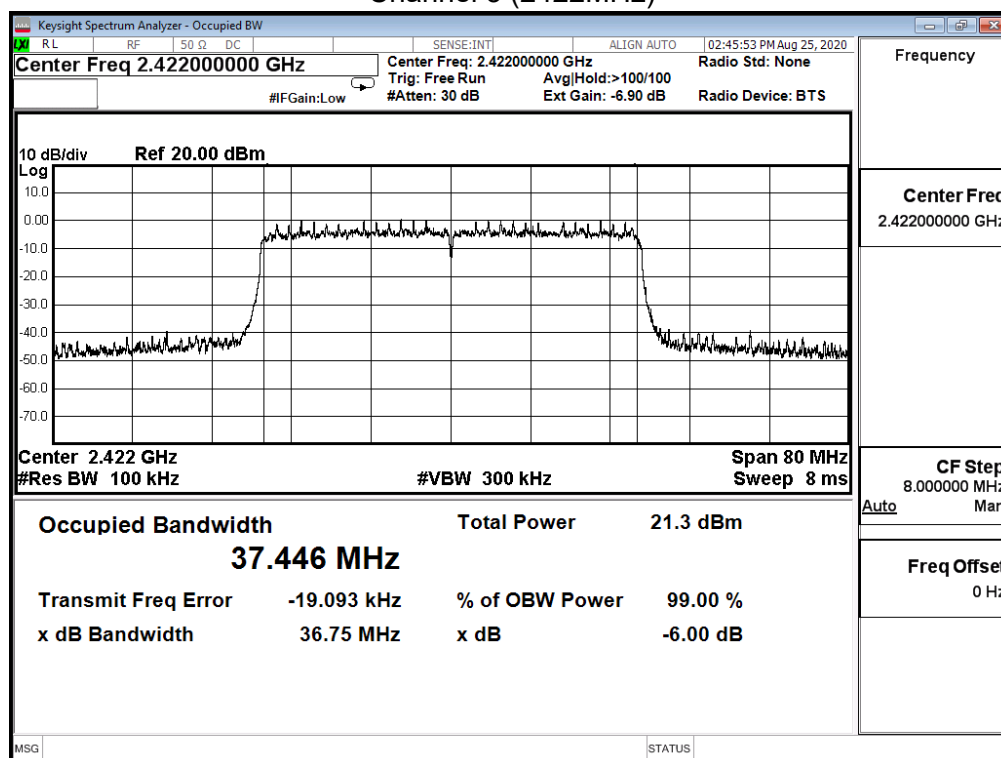

Channel 6 (2437MHz)

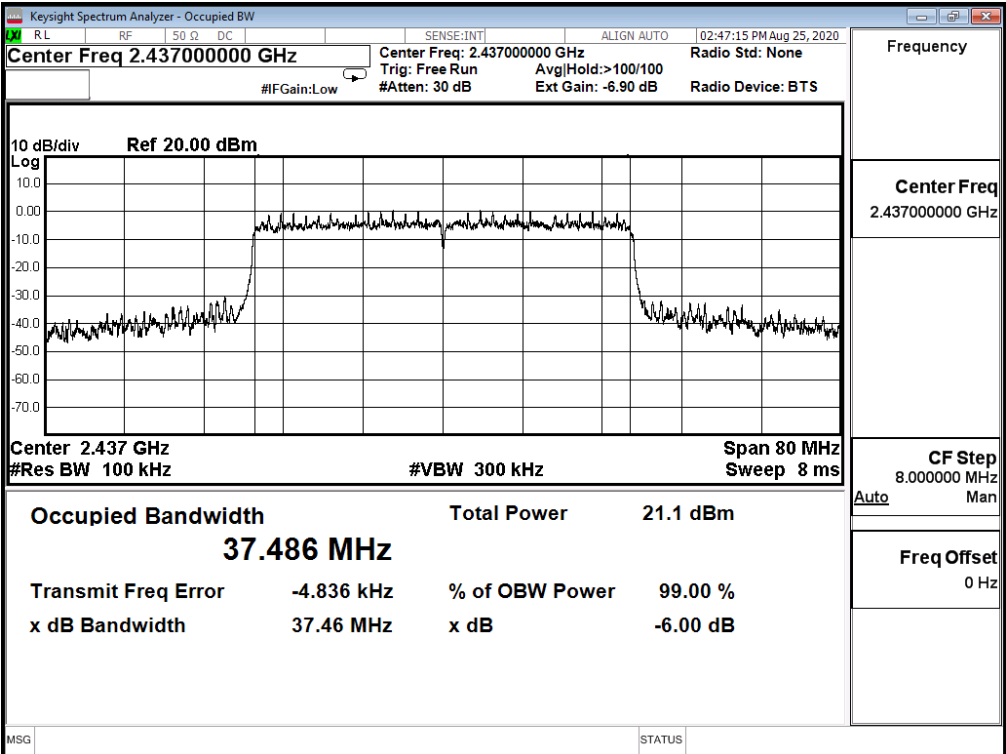


Channel 9 (2452MHz)

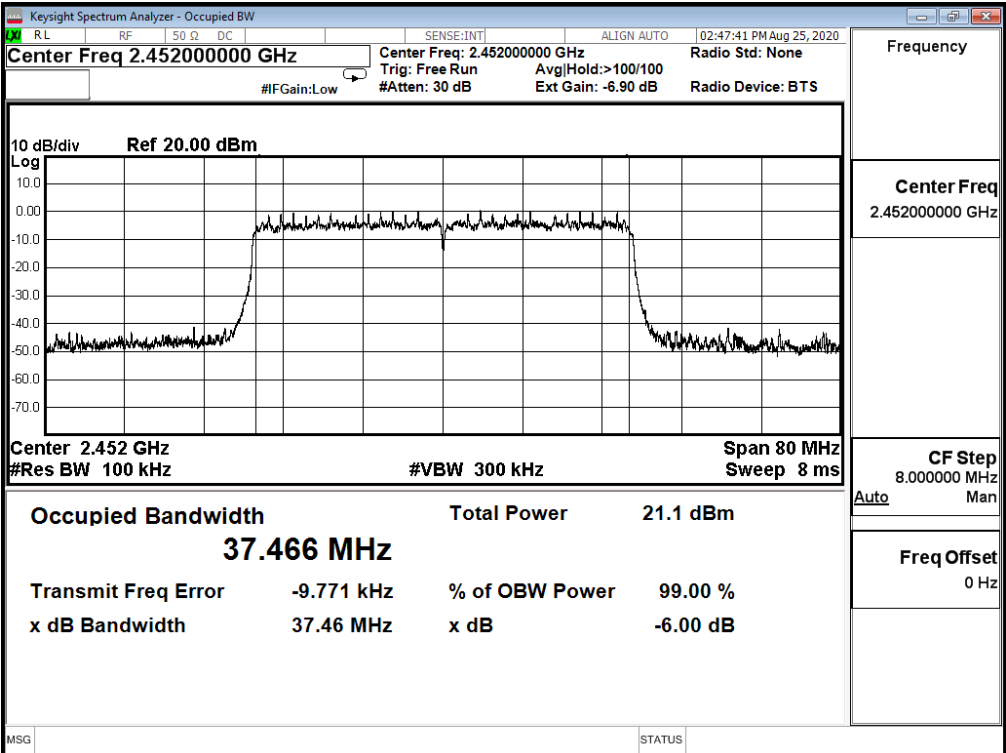

## 8. Occupied Bandwidth

### 8.1. Test Setup

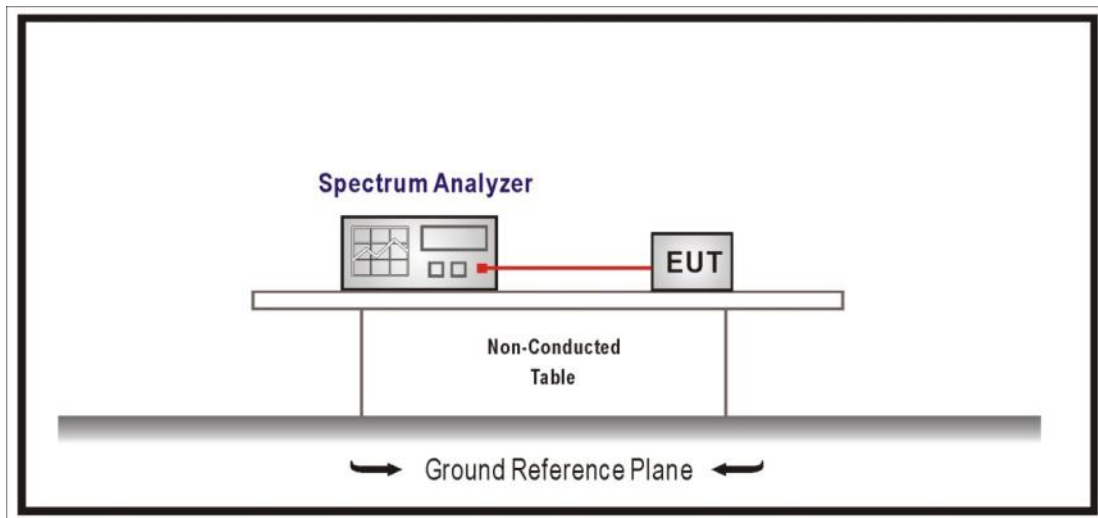

### 8.2. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the OBW, Set the VBW  $\geq 3 \times$  RBW, Sweep Time=Auto.

### 8.3. Limits

N/A

### 8.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019


## 8.5. Test Result

|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | Occupied Bandwidth                     |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |


### 802.11b (ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 1           | 2412            | 10.840              | ---         |
| 6           | 2437            | 10.907              | ---         |
| 11          | 2462            | 10.750              | ---         |


### Channel 1 (2412MHz)

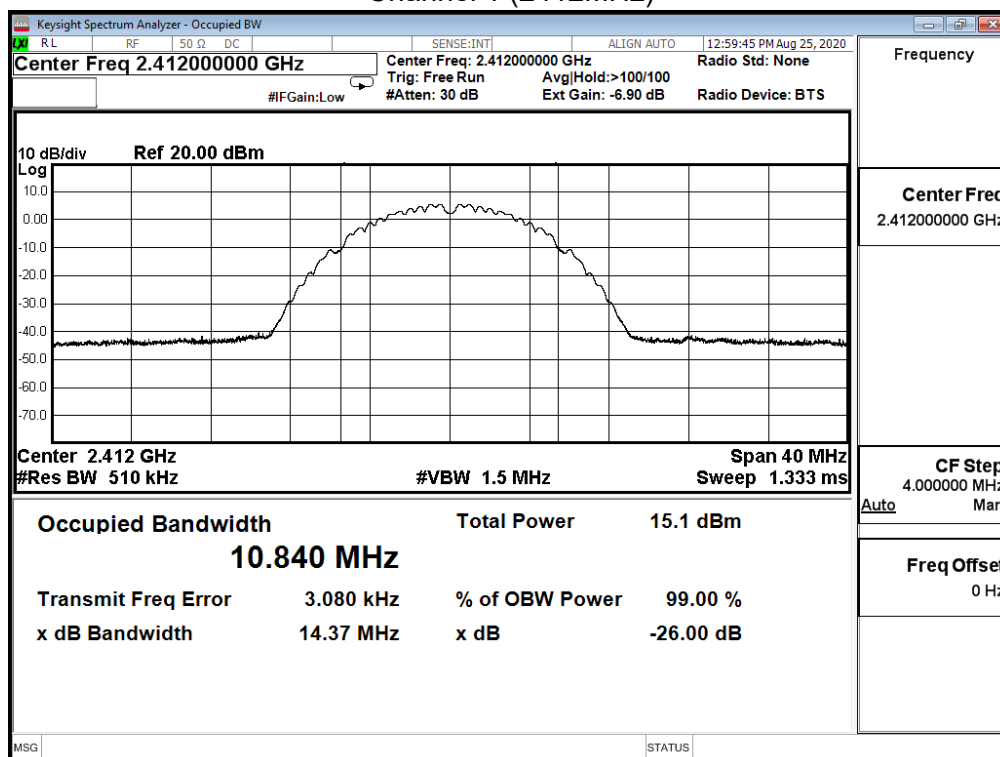

Channel 6 (2437MHz)

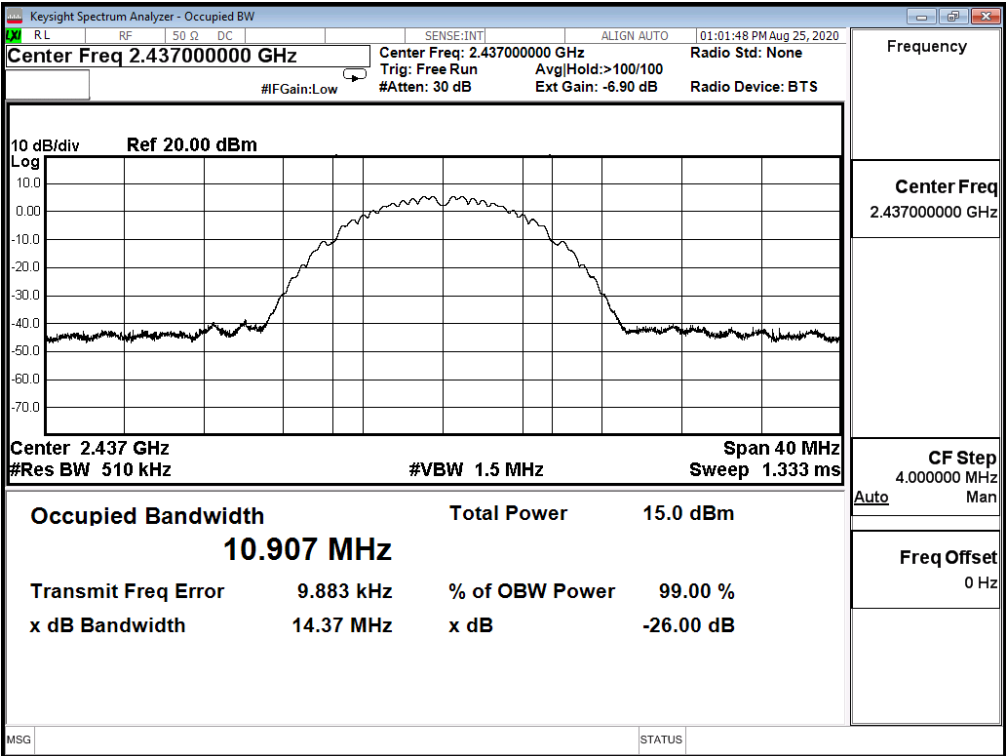

Channel 11 (2462MHz)

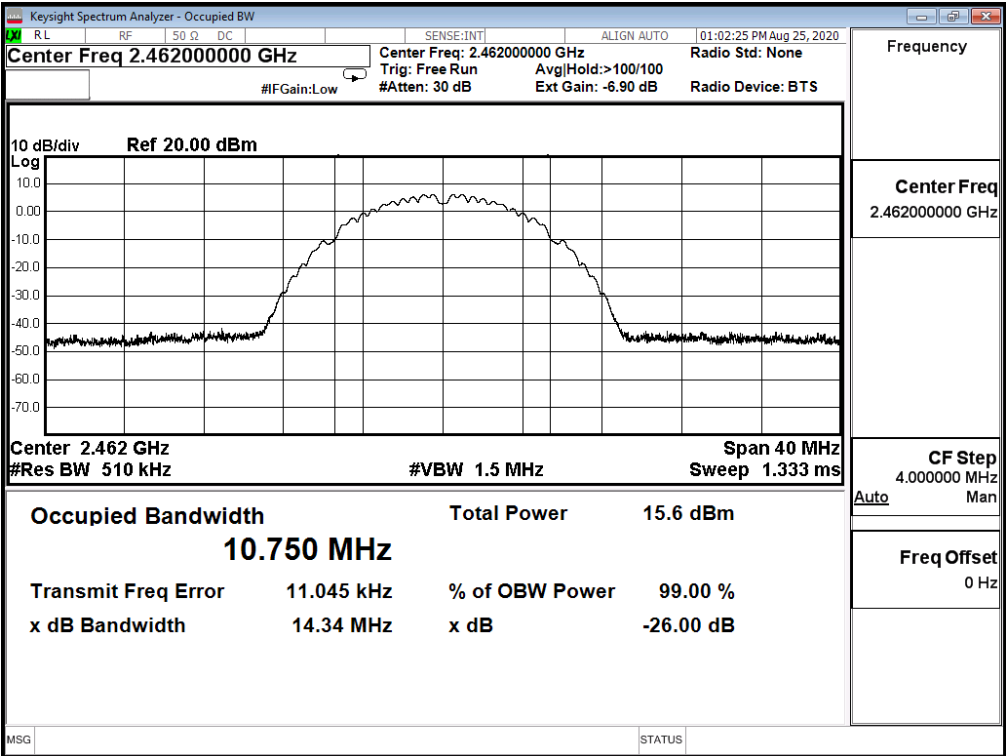

|                  |                                        |               |        |
|------------------|----------------------------------------|---------------|--------|
| Product          | DUAL BAND WI-FI 6 MESH EXTENDER DEVICE |               |        |
| Test Item        | Occupied Bandwidth                     |               |        |
| Test Mode        | Mode 1: SISO Mode                      |               |        |
| Date of Test     | 2020/08/25                             | Test Site     | SR12-H |
| Test Temperature | 23.0°C                                 | Test Humidity | 63.0%  |

| 802.11b (ANT 1) |                 |                     |             |
|-----------------|-----------------|---------------------|-------------|
| Channel No.     | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) |
| 1               | 2412            | 10.692              | ---         |
| 6               | 2437            | 10.766              | ---         |
| 11              | 2462            | 10.817              | ---         |

Channel 1 (2412MHz)

