



Channel 36 (5180MHz)

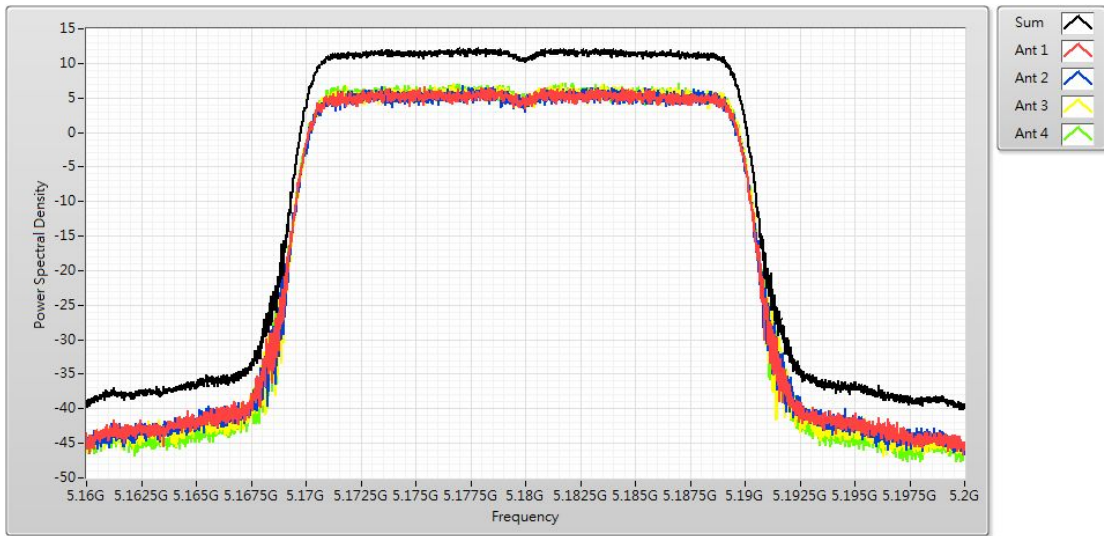


Channel 44 (5220MHz)

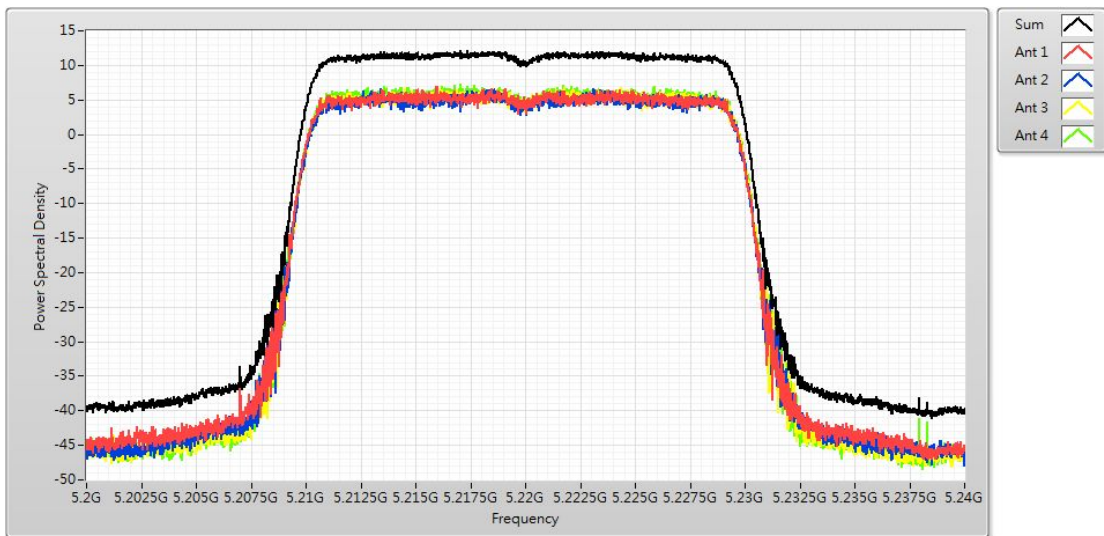


### Channel 48 (5240MHz)




Channel 149 (5745MHz)

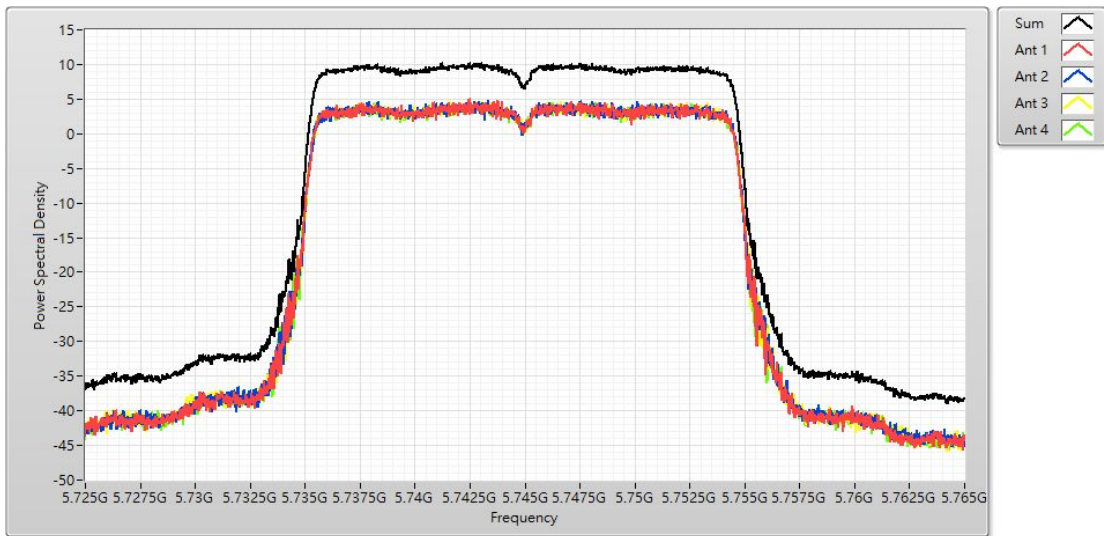

Channel 157 (5785MHz)

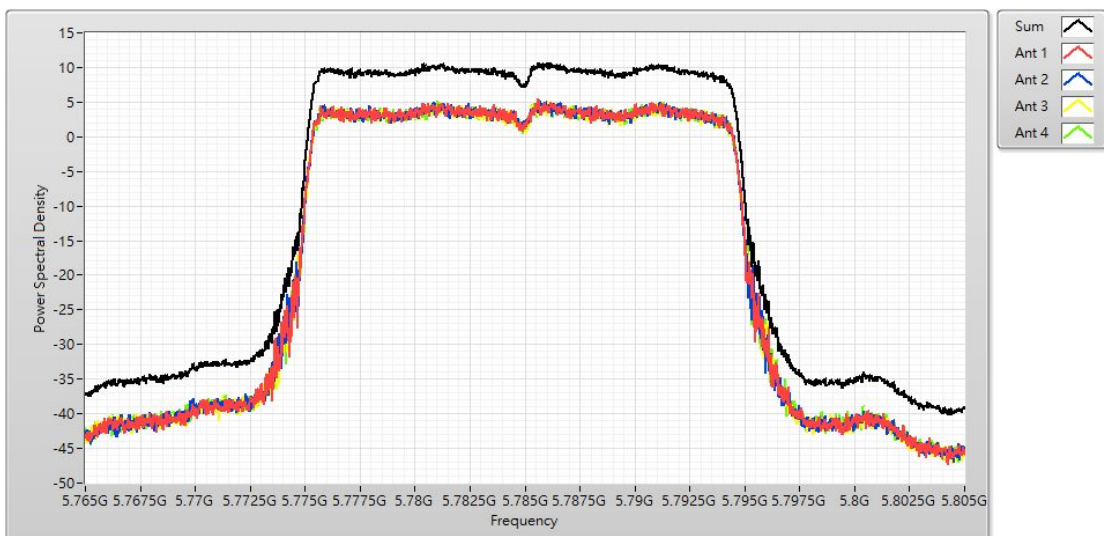

### Channel 165 (5825MHz)

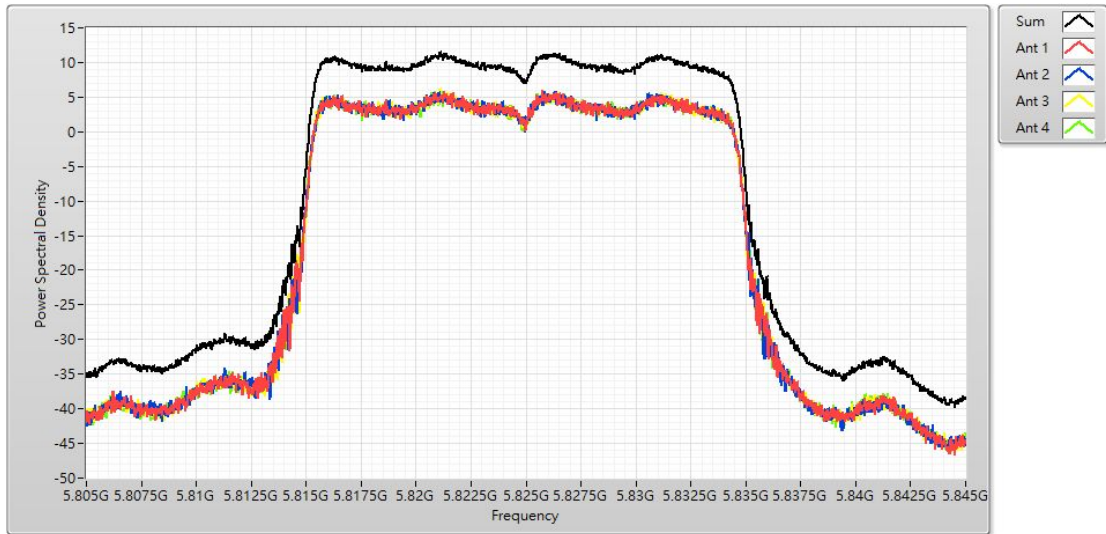

Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	Maximum power spectral density		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/09/11~2020/10/17	Test Site	SR12-H
Test Temperature	25.0°C	Test Humidity	60.0%

IEEE 802.11ax (40MHz)


5GHz UNII 1:

Channel No.	Frequency (MHz)	Measure Level (dBm)					Limit (dBm)
		Ant. 2	Ant. 3	Ant. 4	Ant. 5	Total	
38	5190	4.51	4.630	4.500	4.920	10.160	$\leq 12.200$
46	5230	6.56	7.170	6.390	7.040	12.070	$\leq 12.200$


5GHz UNII 3:

Channel No.	Frequency (MHz)	Measure Level (dBm)					Limit (dBm)
		Ant. 2	Ant. 3	Ant. 4	Ant. 5	Total	
151	5755	3.150	2.640	2.540	2.820	8.360	$\leq 27.979$
159	5795	4.370	4.170	4.500	4.250	9.950	$\leq 27.979$

Channel 38 (5190MHz)

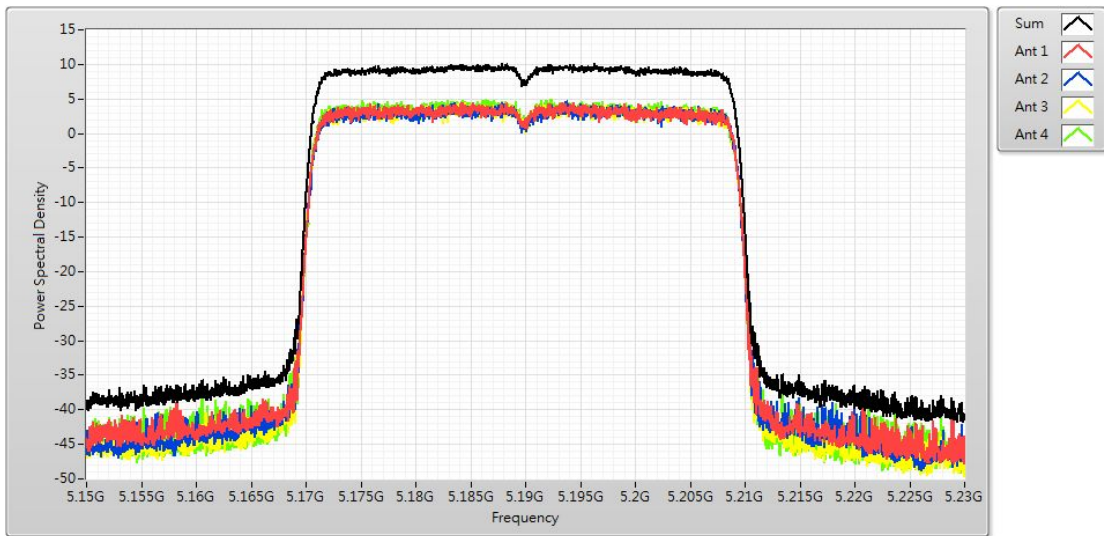


Channel 46 (5230MHz)

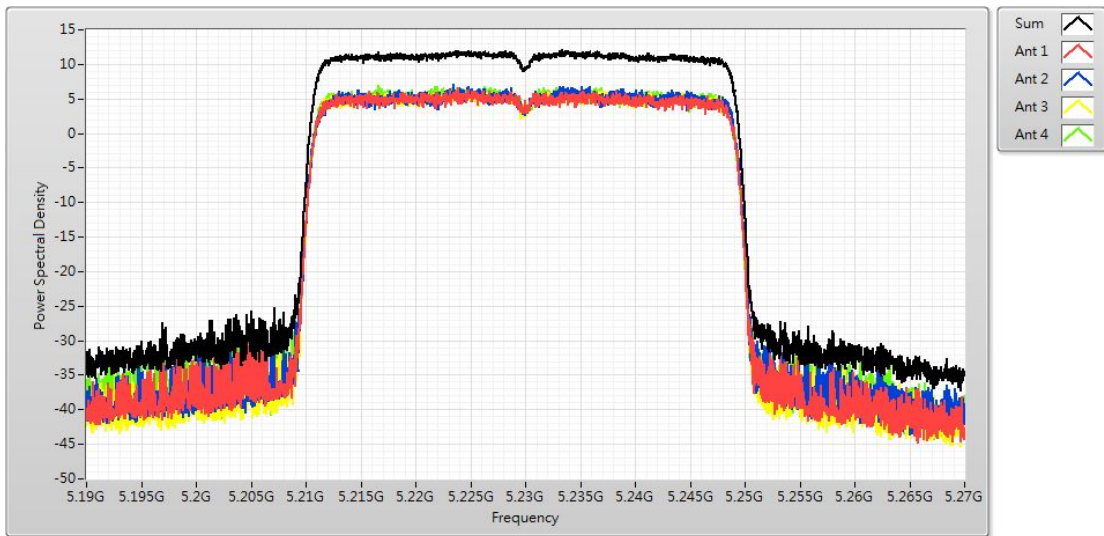



Channel 151 (5755MHz)

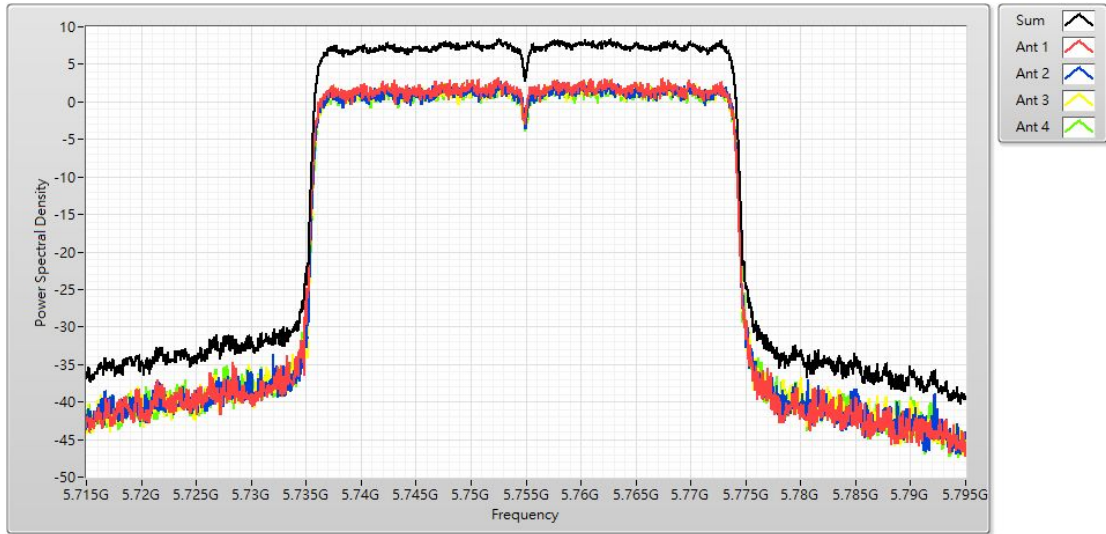

Channel 159 (5795MHz)



Product	DUAL BAND WI-FI 6 MESH EXTENDER DEVICE		
Test Item	Maximum power spectral density		
Test Mode	Mode 2: CDD Mode		
Date of Test	2020/09/12~2020/10/17	Test Site	SR12-H
Test Temperature	25.0°C	Test Humidity	61.0%

IEEE 802.11ax (80MHz)

5GHz UNII 1:


Channel No.	Frequency (MHz)	Measure Level (dBm)					Limit (dBm)
		Ant. 2	Ant. 3	Ant. 4	Ant. 5	Total	
42	5210	-0.850	-0.860	-0.650	-0.100	4.820	$\leq 12.200$

5GHz UNII 3:


Channel No.	Frequency (MHz)	Measure Level (dBm)					Limit (dBm)
		Ant. 2	Ant. 3	Ant. 4	Ant. 5	Total	
155	5775	-0.080	-0.320	-0.800	-0.780	5.050	$\leq 27.979$



Channel 42 (5210MHz)

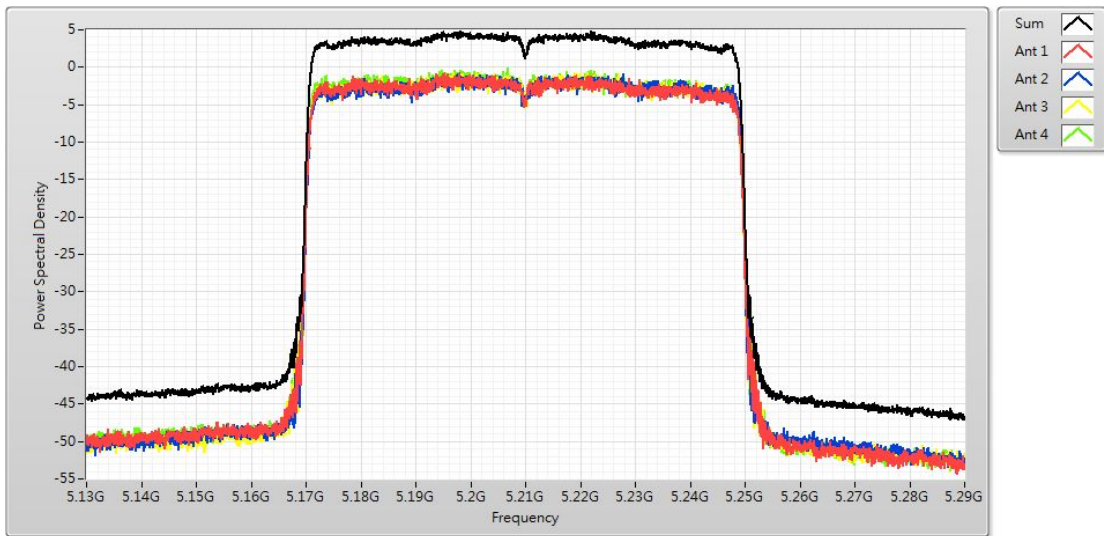


Channel 155 (5775MHz)

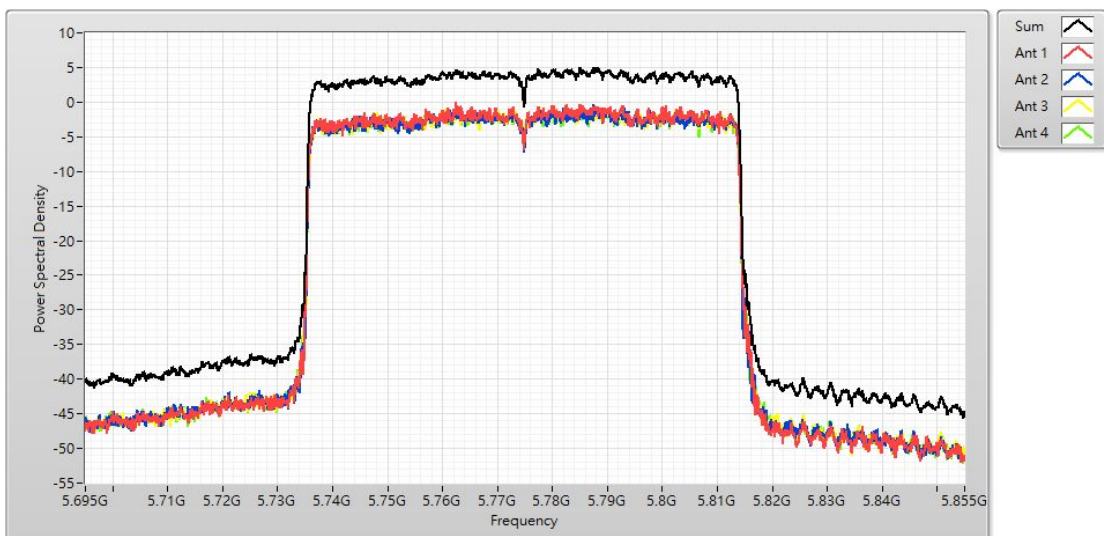


## 6. Radiated Emission

### 6.1. Test Setup


Under 30MHz Test Setup:

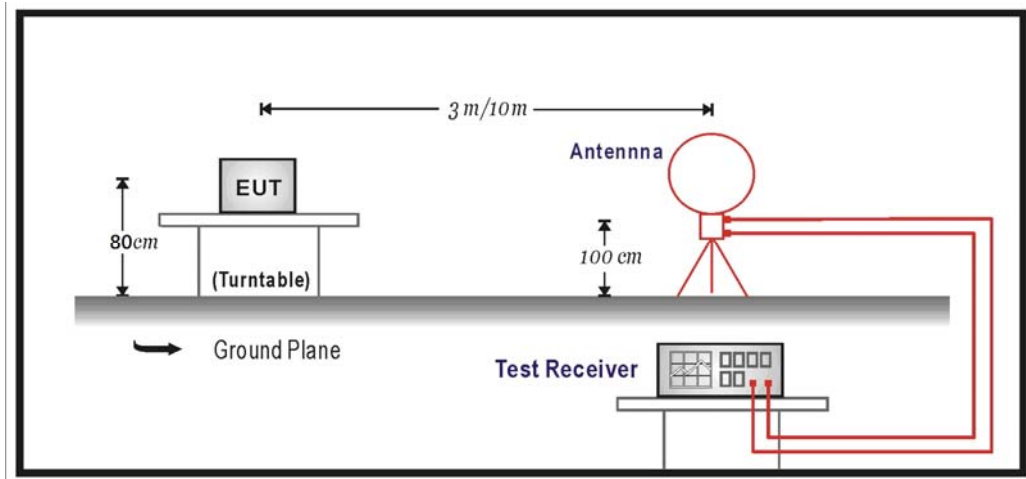

Under 1GHz Test Setup:

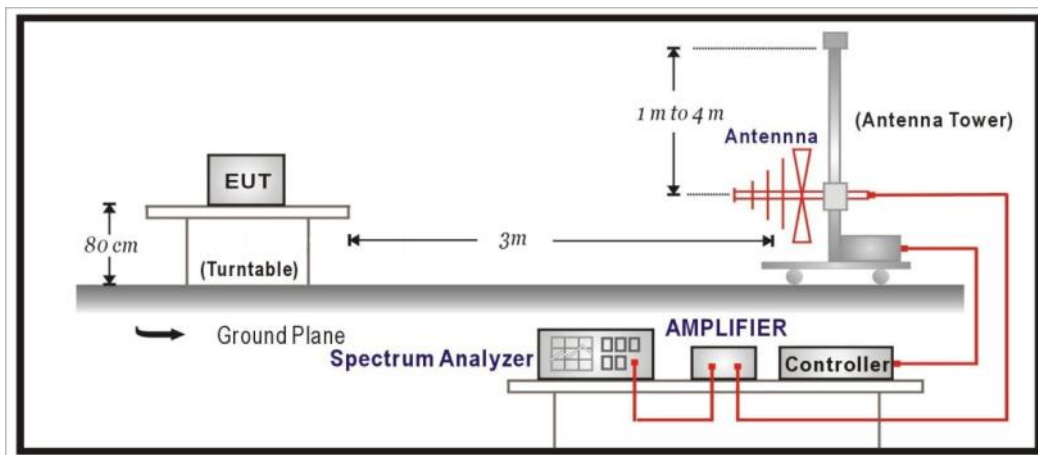

Above 1GHz Test Setup:

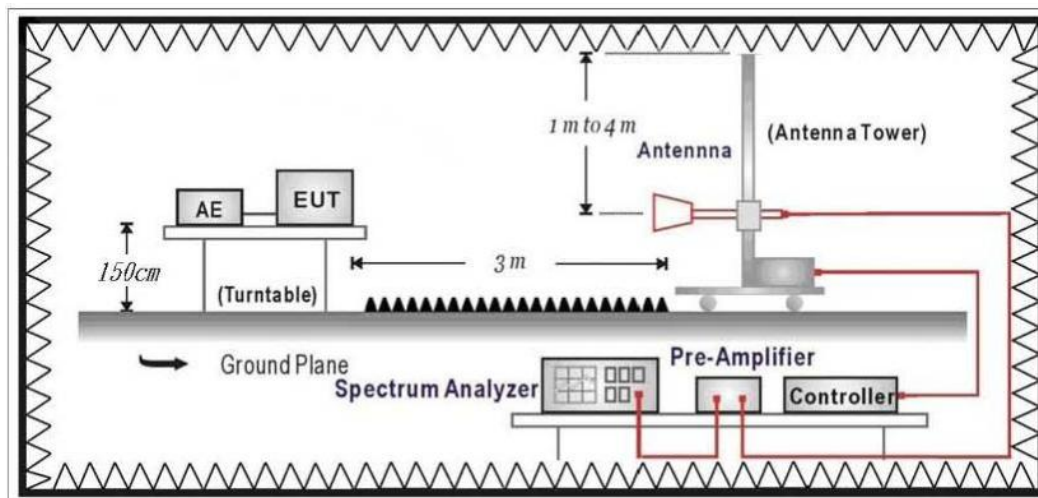

## 6.2. Limits

### ➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### ➤ Unwanted Emission out of the restricted bands Limits

FCC Part 15 Subpart C Paragraph 15.407(b) Limits		
Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5850	-27 (Note1)	68.3
	-17 (Note2)	78.3

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.

$$3. \quad uV/m = \frac{1000000\sqrt{30 \times EIRP}}{3}, \quad \text{RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)}$$

### 6.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.


The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

### 6.4. Test Result

#### 30MHz-1GHz Spurious

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

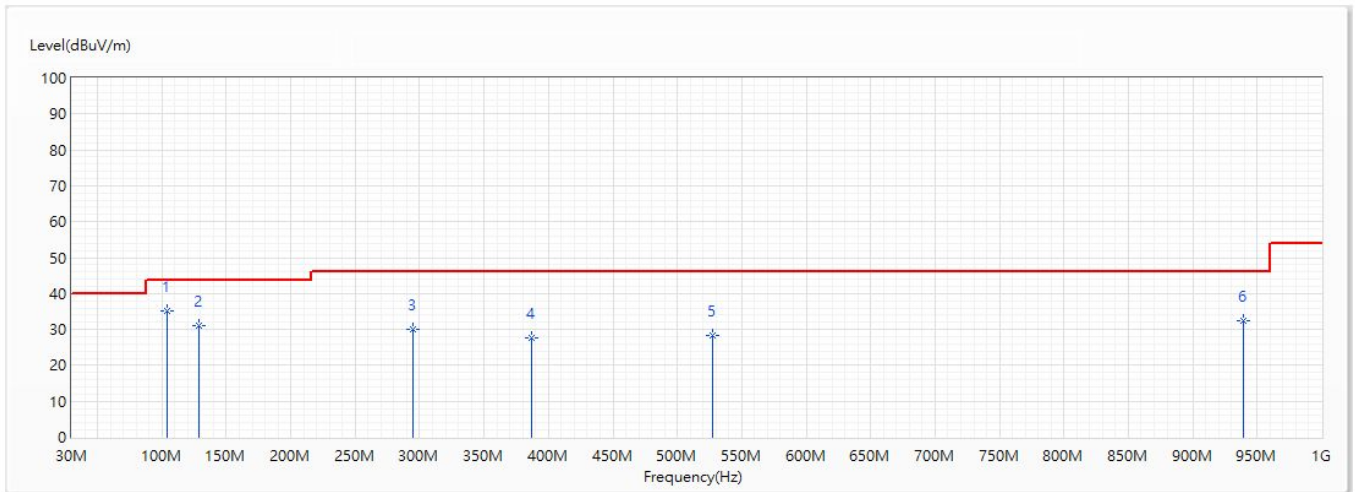


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.31	43.52	-8.21	38.65	-3.34	QP
2	129.134	31.09	43.52	-12.43	33.09	-2.00	QP
3	294.616	30.18	46.02	-15.84	30.70	-0.52	QP
4	386.572	27.54	46.02	-18.48	25.12	2.42	QP
5	527.028	28.24	46.02	-17.78	23.21	5.03	QP
6	939.181	32.44	46.02	-13.58	22.26	10.18	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

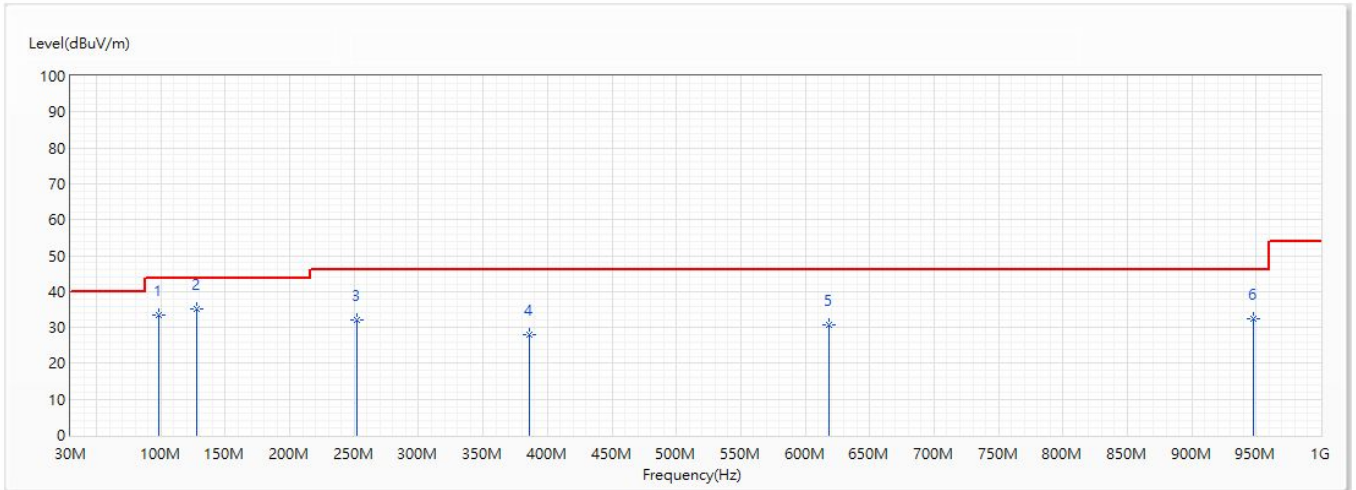


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.288	33.58	43.52	-9.94	37.73	-4.15	QP
* 2	127.97	35.20	43.52	-8.32	37.17	-1.97	QP
3	251.742	32.10	46.02	-13.92	33.42	-1.32	QP
4	385.796	27.82	46.02	-18.20	25.43	2.39	QP
5	618.887	30.84	46.02	-15.18	24.65	6.19	QP
6	948.202	32.42	46.02	-13.60	22.10	10.32	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

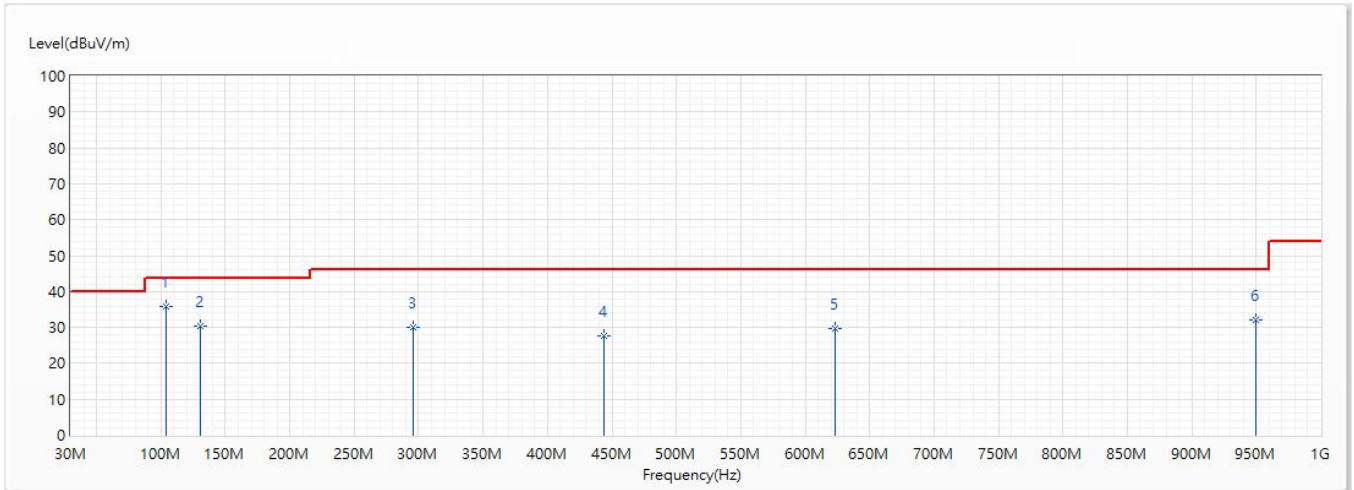


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.86	43.52	-7.66	39.20	-3.34	QP
2	130.492	30.47	43.52	-13.05	32.50	-2.03	QP
3	295.877	30.10	46.02	-15.92	30.61	-0.51	QP
4	444.093	27.70	46.02	-18.32	24.04	3.66	QP
5	623.349	29.56	46.02	-16.46	23.32	6.24	QP
6	949.56	32.09	46.02	-13.93	21.76	10.33	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

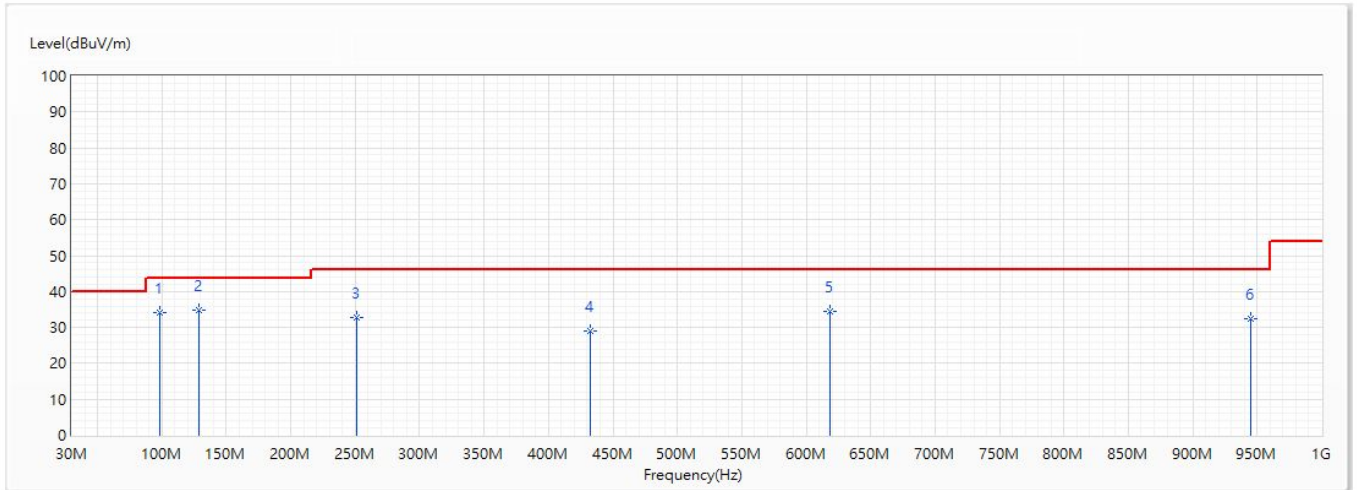


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.997	33.96	43.52	-9.56	38.17	-4.21	QP
* 2	128.649	34.86	43.52	-8.66	36.85	-1.99	QP
3	251.257	32.90	46.02	-13.12	34.24	-1.34	QP
4	432.55	28.84	46.02	-17.18	25.37	3.47	QP
5	618.596	34.54	46.02	-11.48	28.35	6.19	QP
6	945.001	32.42	46.02	-13.60	22.15	10.27	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac40_BW40M_Ant2+3+4+5_CH38_5.19G	Humidity (%RH)	55.0

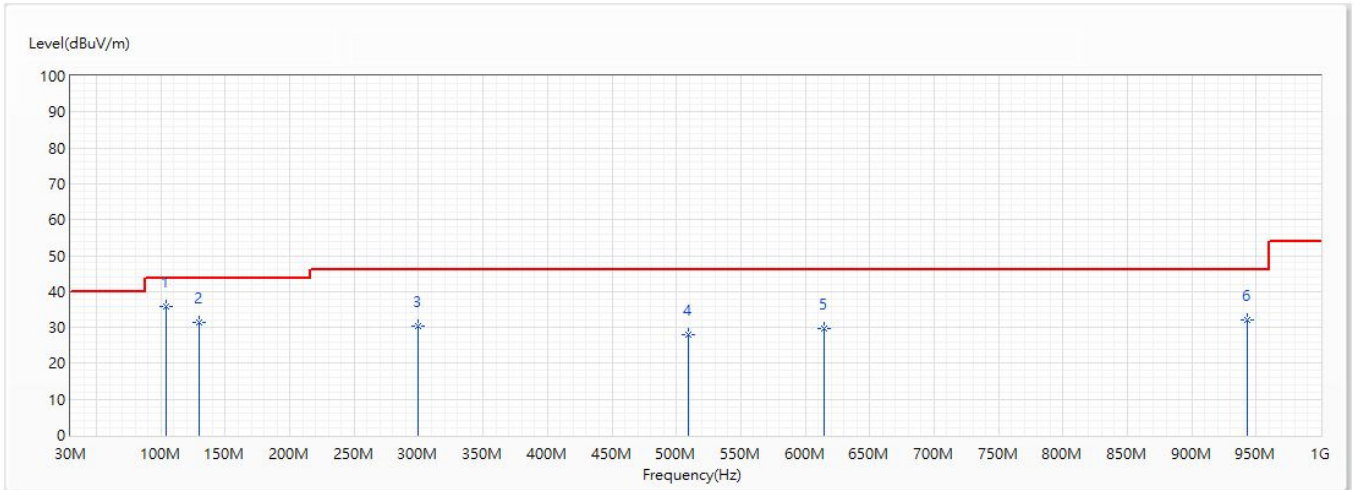


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.91	43.52	-7.61	39.25	-3.34	QP
2	129.328	31.29	43.52	-12.23	33.29	-2.00	QP
3	299.175	30.31	46.02	-15.71	30.74	-0.43	QP
4	509.374	28.13	46.02	-17.89	23.33	4.80	QP
5	614.813	29.78	46.02	-16.24	23.64	6.14	QP
6	943.158	31.98	46.02	-14.04	21.74	10.24	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac40_BW40M_Ant2+3+4+5_CH38_5.19G	Humidity (%RH)	55.0

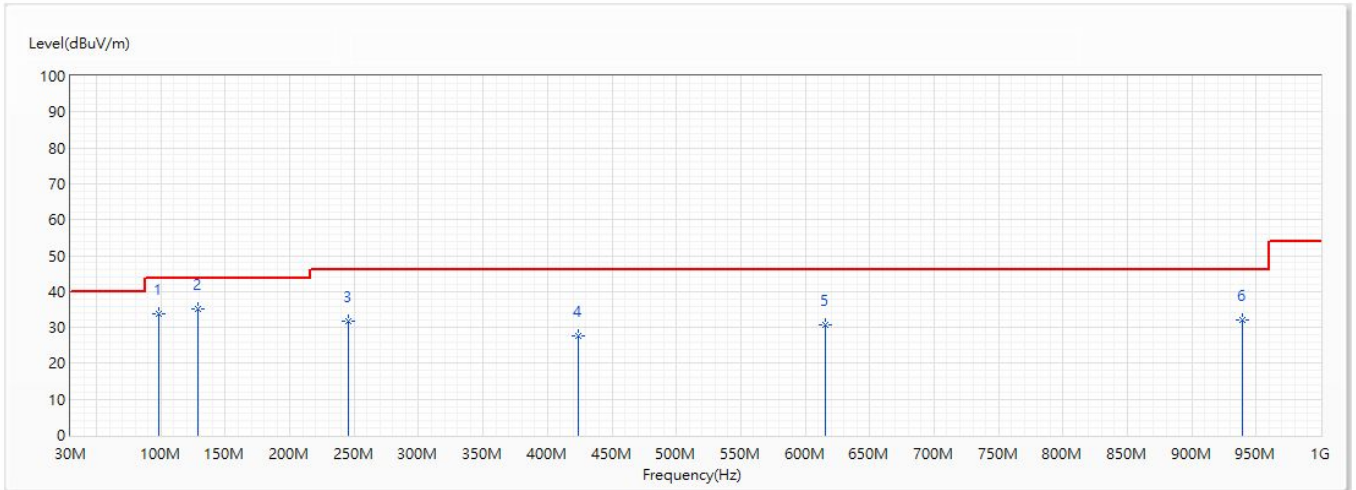


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.676	33.88	43.52	-9.64	37.99	-4.11	QP
* 2	128.552	35.15	43.52	-8.37	37.14	-1.99	QP
3	245.728	31.73	46.02	-14.29	33.31	-1.58	QP
4	424.208	27.50	46.02	-18.52	24.20	3.30	QP
5	615.589	30.71	46.02	-15.31	24.56	6.15	QP
6	939.666	32.13	46.02	-13.89	21.94	10.19	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac80_BW80M_Ant2+3+4+5_CH42_5.21G	Humidity (%RH)	55.0

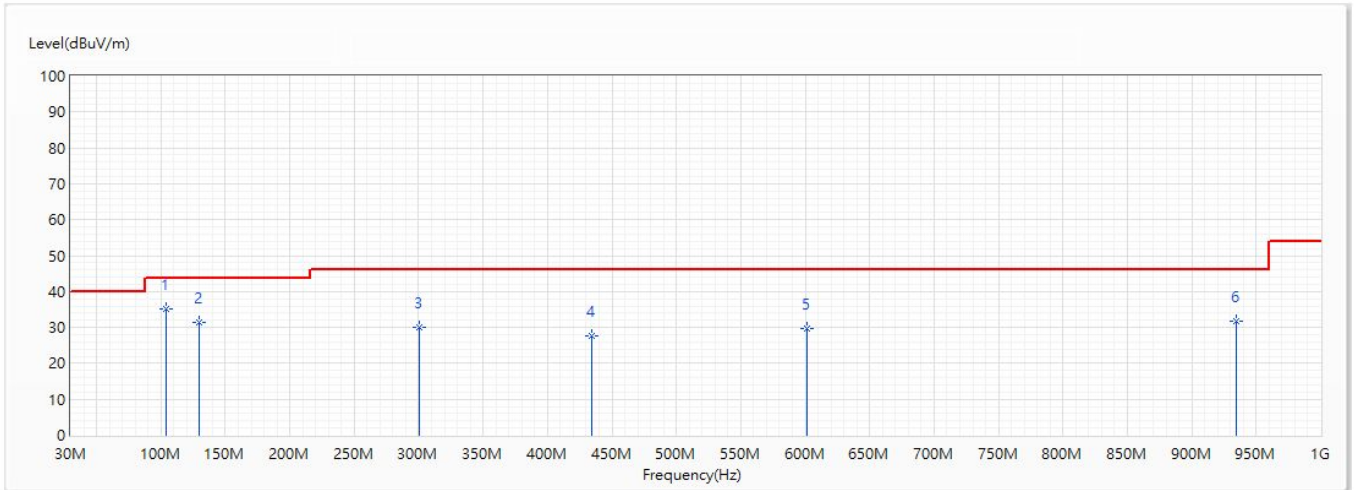


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.011	35.14	43.52	-8.38	38.49	-3.35	QP
2	129.328	31.48	43.52	-12.04	33.48	-2.00	QP
3	300.048	30.15	46.02	-15.87	30.56	-0.41	QP
4	434.684	27.72	46.02	-18.30	24.22	3.50	QP
5	601.233	29.53	46.02	-16.49	23.54	5.99	QP
6	934.137	31.89	46.02	-14.13	21.80	10.09	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac80_BW80M_Ant2+3+4+5_CH42_5.21G	Humidity (%RH)	55.0

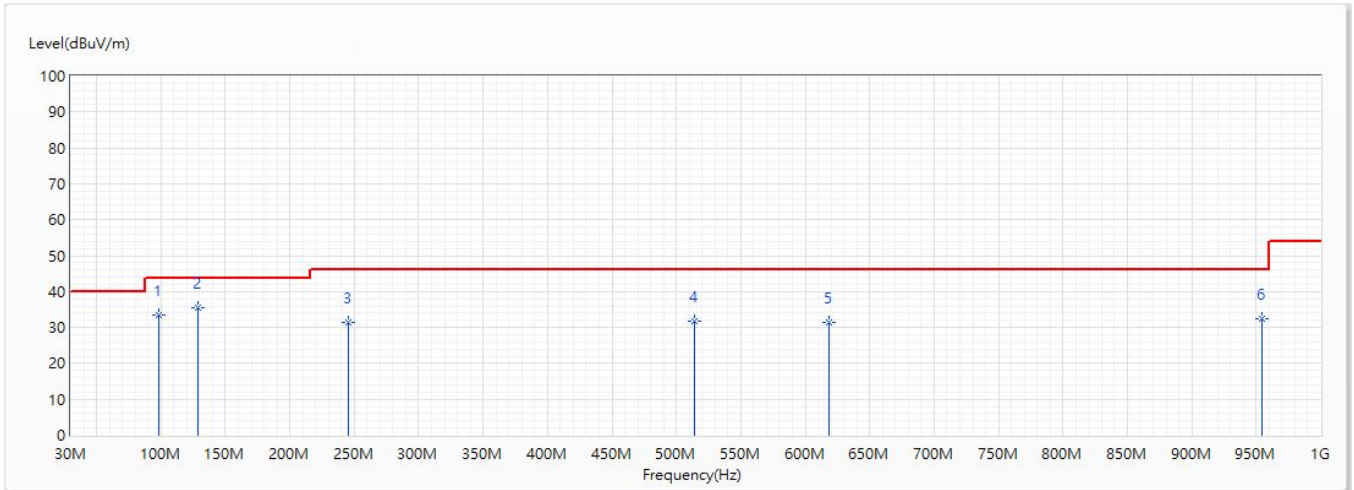


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.482	33.58	43.52	-9.94	37.71	-4.13	QP
* 2	128.94	35.42	43.52	-8.10	37.42	-2.00	QP
3	245.34	31.52	46.02	-14.50	33.12	-1.60	QP
4	514.127	31.84	46.02	-14.18	26.98	4.86	QP
5	618.111	31.43	46.02	-14.59	25.24	6.19	QP
6	954.507	32.29	46.02	-13.73	21.88	10.41	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

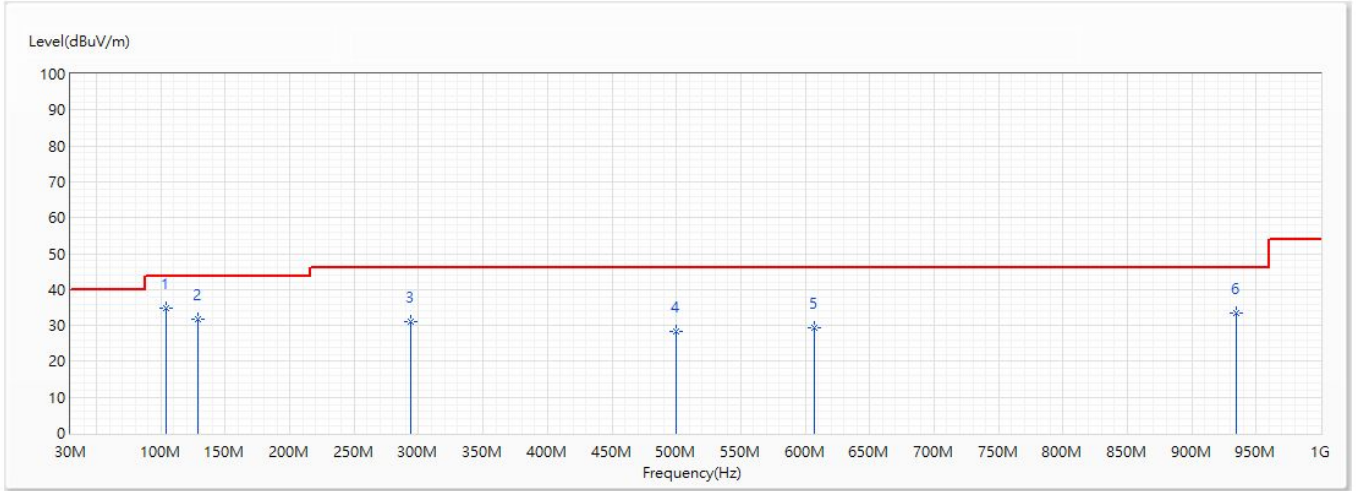


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	34.80	43.52	-8.72	38.14	-3.34	QP
2	128.843	31.61	43.52	-11.91	33.61	-2.00	QP
3	293.452	31.19	46.02	-14.83	31.74	-0.55	QP
4	499.771	28.17	46.02	-17.85	23.50	4.67	QP
5	607.247	29.52	46.02	-16.50	23.48	6.04	QP
6	934.525	33.36	46.02	-12.66	23.27	10.09	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax20_BW20M_Ant2+3+4+5_CH44_5.22G	Humidity (%RH)	55.0

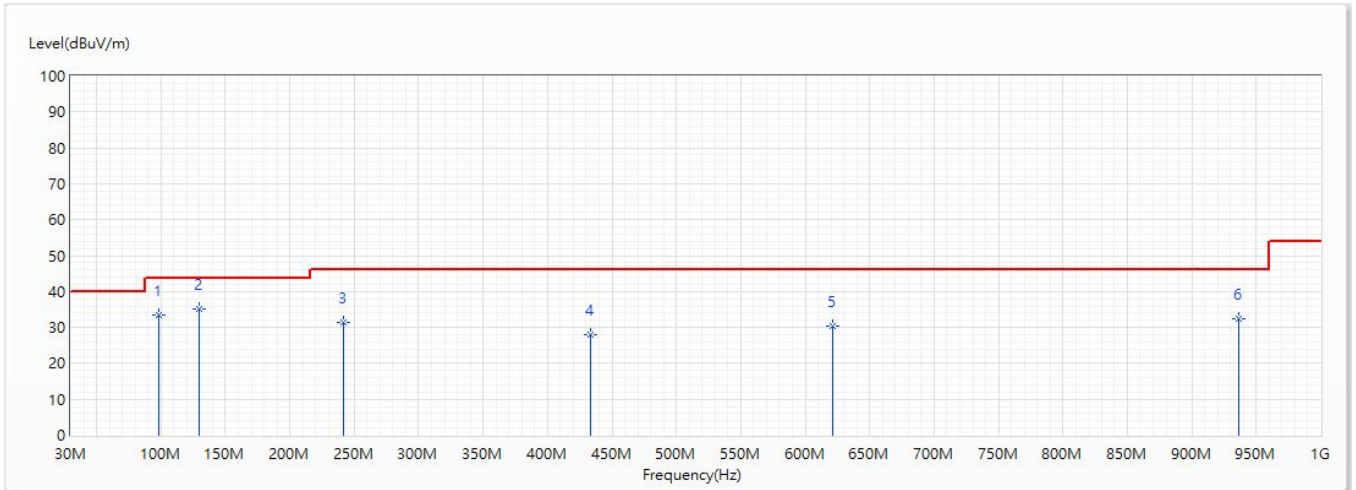


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.191	33.61	43.52	-9.91	37.78	-4.17	QP
* 2	129.716	35.26	43.52	-8.26	37.27	-2.01	QP
3	241.46	31.36	46.02	-14.66	33.18	-1.82	QP
4	432.938	28.11	46.02	-17.91	24.64	3.47	QP
5	620.827	30.41	46.02	-15.61	24.20	6.21	QP
6	935.98	32.40	46.02	-13.62	22.28	10.12	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax40_BW40M_Ant2+3+4+5_CH38_5.19G	Humidity (%RH)	55.0

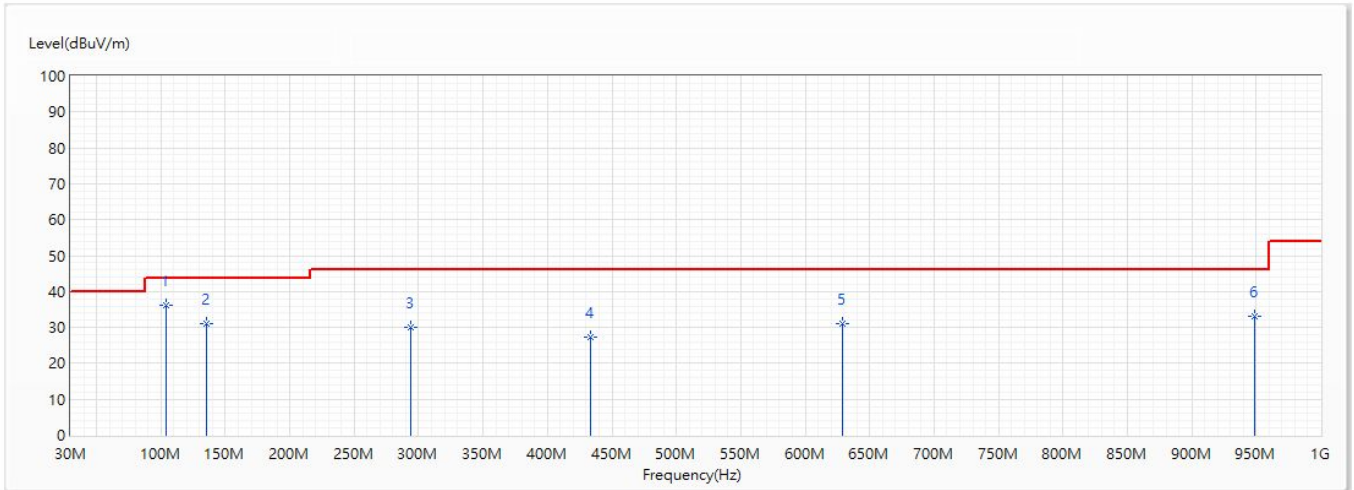


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	36.06	43.52	-7.46	39.40	-3.34	QP
2	135.148	31.17	43.52	-12.35	33.32	-2.15	QP
3	293.452	30.16	46.02	-15.86	30.71	-0.55	QP
4	433.326	27.38	46.02	-18.64	23.90	3.48	QP
5	629.169	31.07	46.02	-14.95	24.78	6.29	QP
6	948.978	33.03	46.02	-12.99	22.70	10.33	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax40_BW40M_Ant2+3+4+5_CH38_5.19G	Humidity (%RH)	55.0

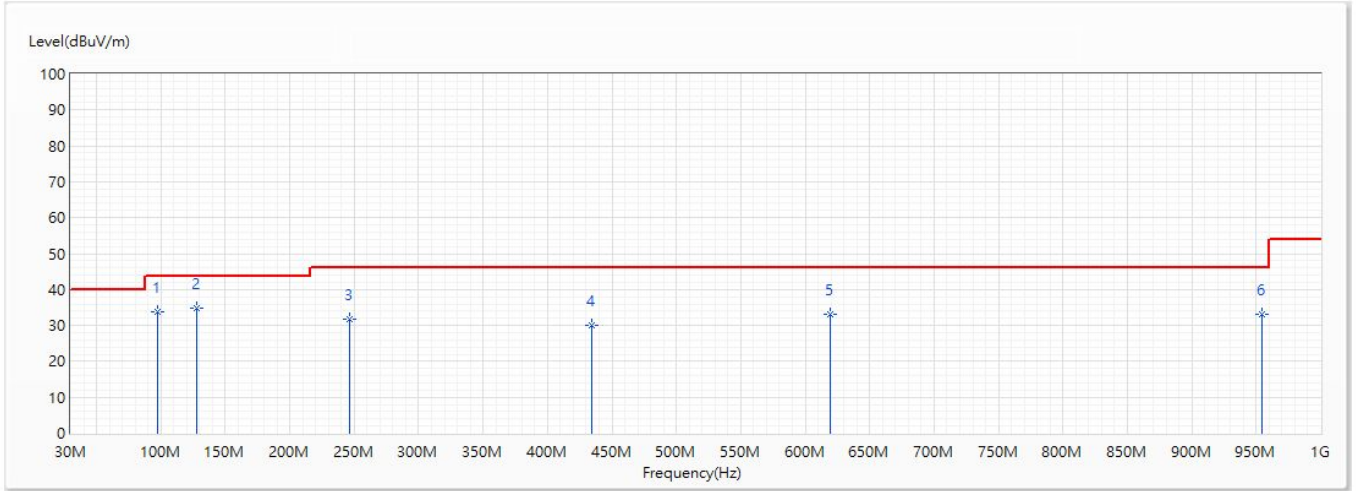


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.415	33.86	43.52	-9.66	38.18	-4.32	QP
* 2	127.582	34.87	43.52	-8.65	36.84	-1.97	QP
3	246.407	31.79	46.02	-14.23	33.34	-1.55	QP
4	434.684	29.88	46.02	-16.14	26.38	3.50	QP
5	619.76	33.16	46.02	-12.86	26.95	6.21	QP
6	954.41	33.10	46.02	-12.92	22.69	10.41	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax80_BW80M_Ant2+3+4+5_CH42_5.21G	Humidity (%RH)	55.0

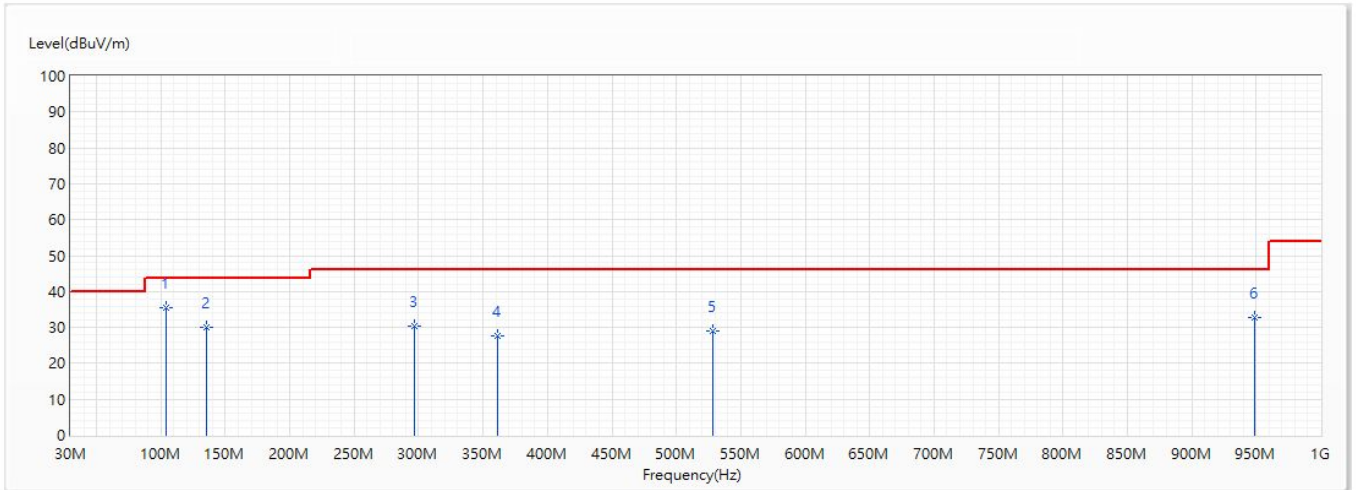


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.52	43.52	-8.00	38.86	-3.34	QP
2	135.051	30.19	43.52	-13.33	32.34	-2.15	QP
3	296.847	30.49	46.02	-15.53	30.97	-0.48	QP
4	361.158	27.60	46.02	-18.42	26.02	1.58	QP
5	528.289	29.16	46.02	-16.86	24.12	5.04	QP
6	949.075	32.85	46.02	-13.17	22.52	10.33	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax80_BW80M_Ant2+3+4+5_CH42_5.21G	Humidity (%RH)	55.0

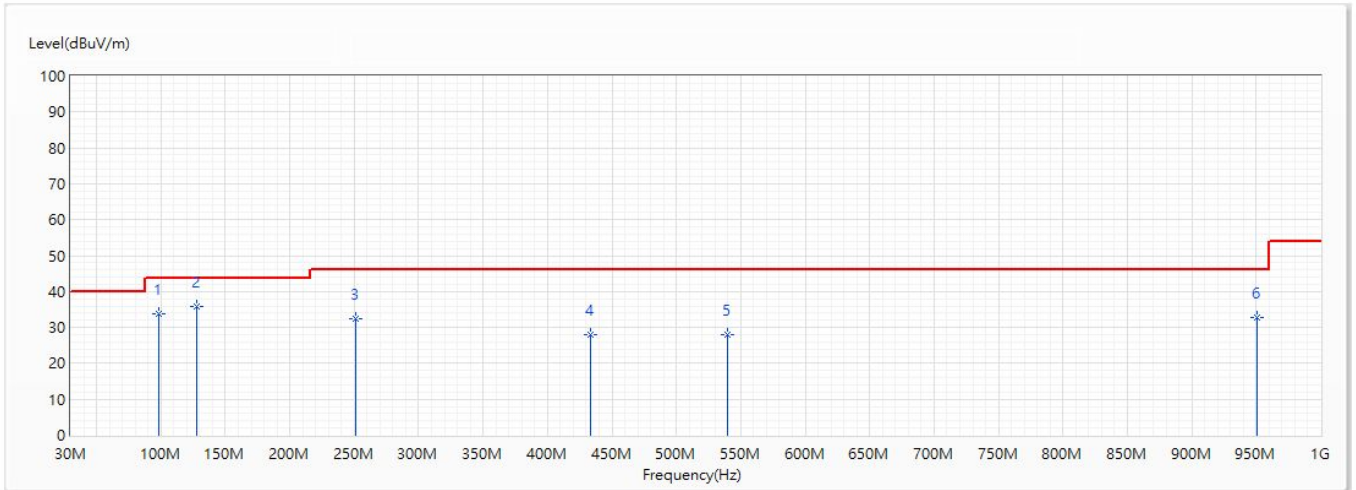


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.094	33.89	43.52	-9.63	38.08	-4.19	QP
* 2	127.873	35.82	43.52	-7.70	37.79	-1.97	QP
3	251.257	32.41	46.02	-13.61	33.75	-1.34	QP
4	433.326	27.82	46.02	-18.20	24.34	3.48	QP
5	539.444	28.06	46.02	-17.96	22.87	5.19	QP
6	951.112	32.78	46.02	-13.24	22.43	10.35	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

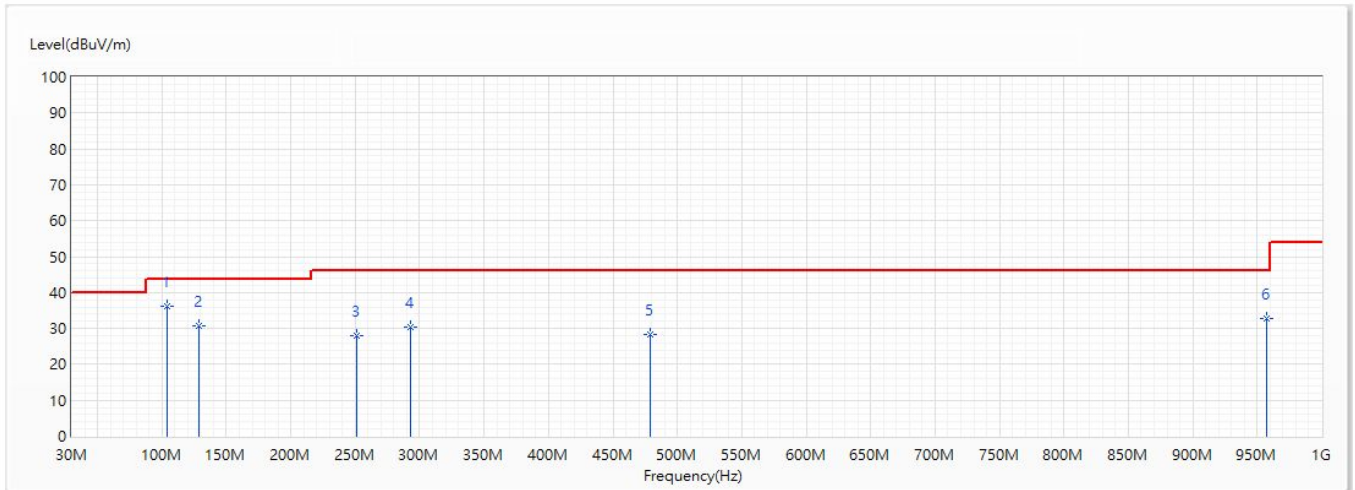


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.011	36.04	43.52	-7.48	39.39	-3.35	QP
2	128.94	30.75	43.52	-12.77	32.75	-2.00	QP
3	250.675	28.08	46.02	-17.94	29.44	-1.36	QP
4	292.967	30.38	46.02	-15.64	30.94	-0.56	QP
5	479.013	28.17	46.02	-17.85	23.88	4.29	QP
6	956.932	32.62	46.02	-13.40	22.17	10.45	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

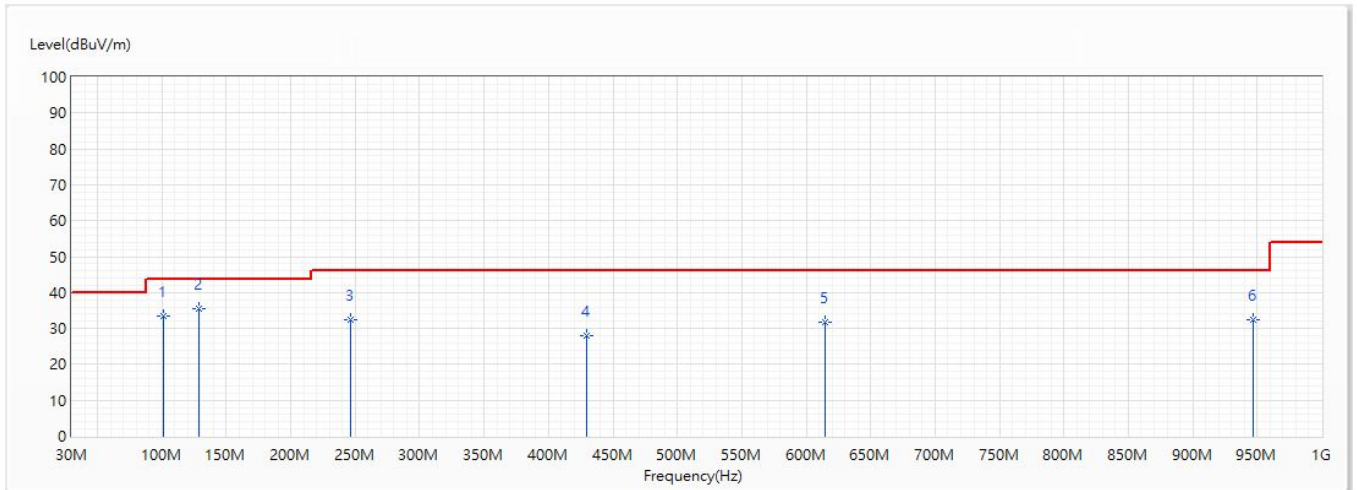


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	101.004	33.51	43.52	-10.01	37.26	-3.75	QP
* 2	128.455	35.37	43.52	-8.15	37.35	-1.98	QP
3	246.698	32.59	46.02	-13.43	34.12	-1.53	QP
4	429.64	27.88	46.02	-18.14	24.46	3.42	QP
5	614.91	31.81	46.02	-14.21	25.67	6.14	QP
6	946.747	32.32	46.02	-13.70	22.03	10.29	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

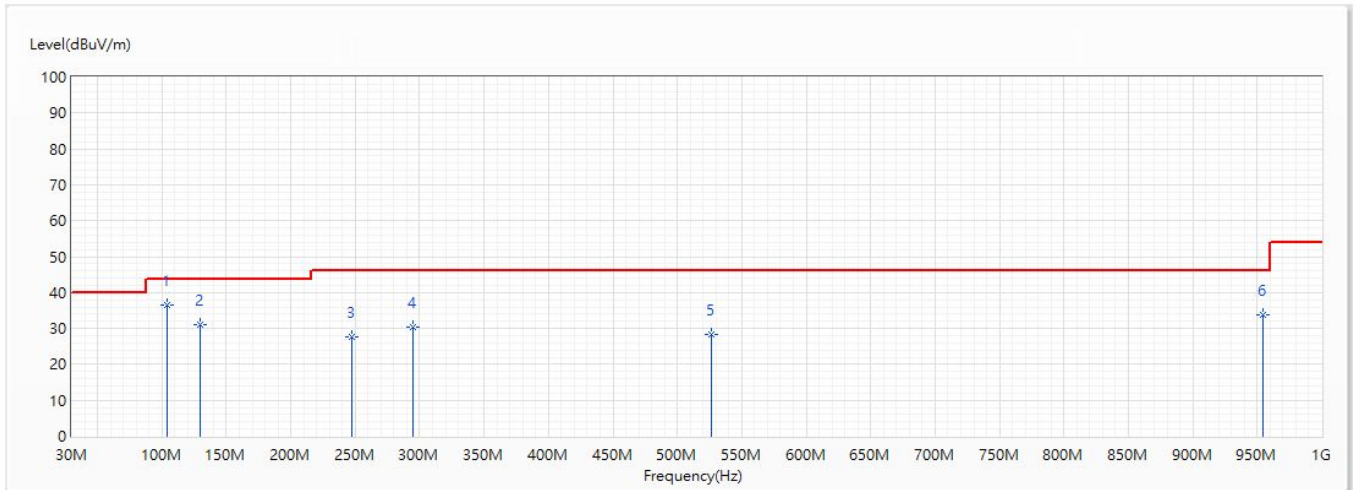


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.205	36.60	43.52	-6.92	39.93	-3.33	QP
2	129.231	30.98	43.52	-12.54	32.99	-2.01	QP
3	247.183	27.64	46.02	-18.38	29.14	-1.50	QP
4	294.519	30.24	46.02	-15.78	30.77	-0.53	QP
5	526.737	28.17	46.02	-17.85	23.14	5.03	QP
6	954.507	33.65	46.02	-12.37	23.24	10.41	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

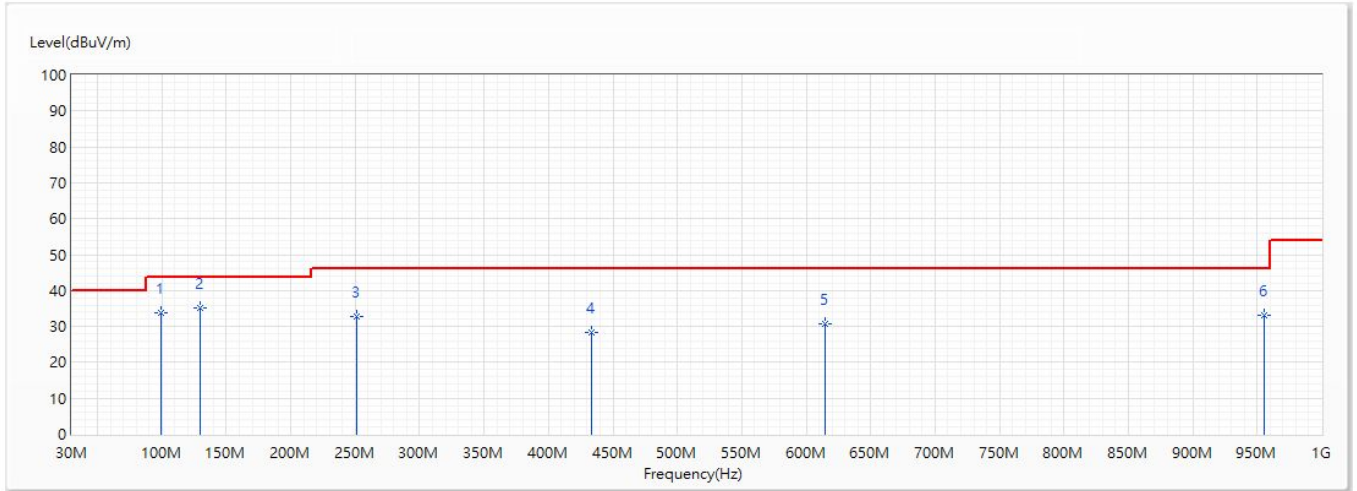


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	98.967	33.85	43.52	-9.67	37.91	-4.06	QP
* 2	130.007	35.18	43.52	-8.34	37.20	-2.02	QP
3	250.772	32.70	46.02	-13.32	34.06	-1.36	QP
4	433.52	28.49	46.02	-17.53	25.01	3.48	QP
5	615.104	30.60	46.02	-15.42	24.45	6.15	QP
6	954.992	33.02	46.02	-13.00	22.60	10.42	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac40_BW40M_Ant2+3+4+5_CH151_5.755 G	Humidity (%RH)	55.0

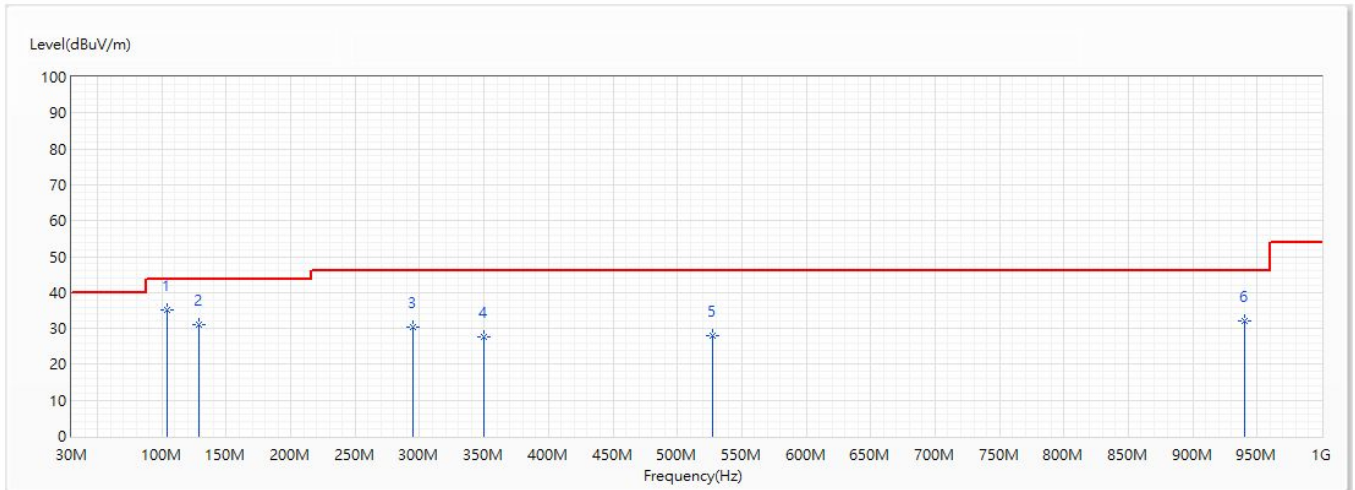


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.011	35.22	43.52	-8.30	38.57	-3.35	QP
2	128.261	31.10	43.52	-12.42	33.08	-1.98	QP
3	294.422	30.49	46.02	-15.53	31.02	-0.53	QP
4	350.003	27.70	46.02	-18.32	26.47	1.23	QP
5	527.707	28.08	46.02	-17.94	23.04	5.04	QP
6	939.957	32.07	46.02	-13.95	21.88	10.19	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac40_BW40M_Ant2+3+4+5_CH151_5.755 G	Humidity (%RH)	55.0

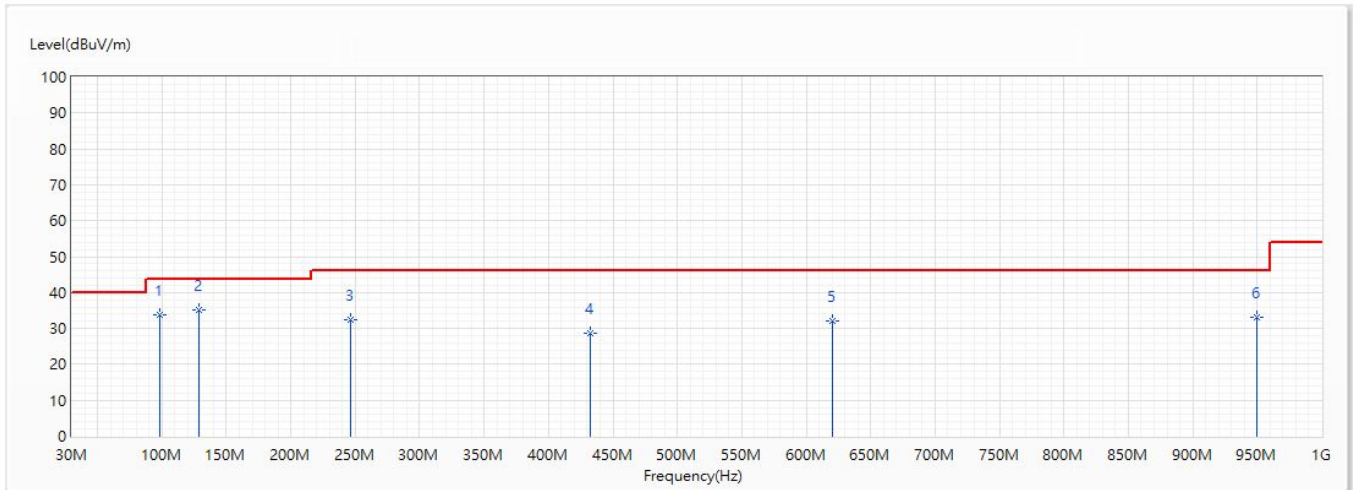


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.9	33.72	43.52	-9.80	37.94	-4.22	QP
* 2	128.649	35.18	43.52	-8.34	37.17	-1.99	QP
3	246.31	32.57	46.02	-13.45	34.12	-1.55	QP
4	432.841	28.51	46.02	-17.51	25.04	3.47	QP
5	620.73	31.98	46.02	-14.04	25.77	6.21	QP
6	949.754	33.07	46.02	-12.95	22.73	10.34	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac80_BW80M_Ant2+3+4+5_CH155_5.775 G	Humidity (%RH)	55.0

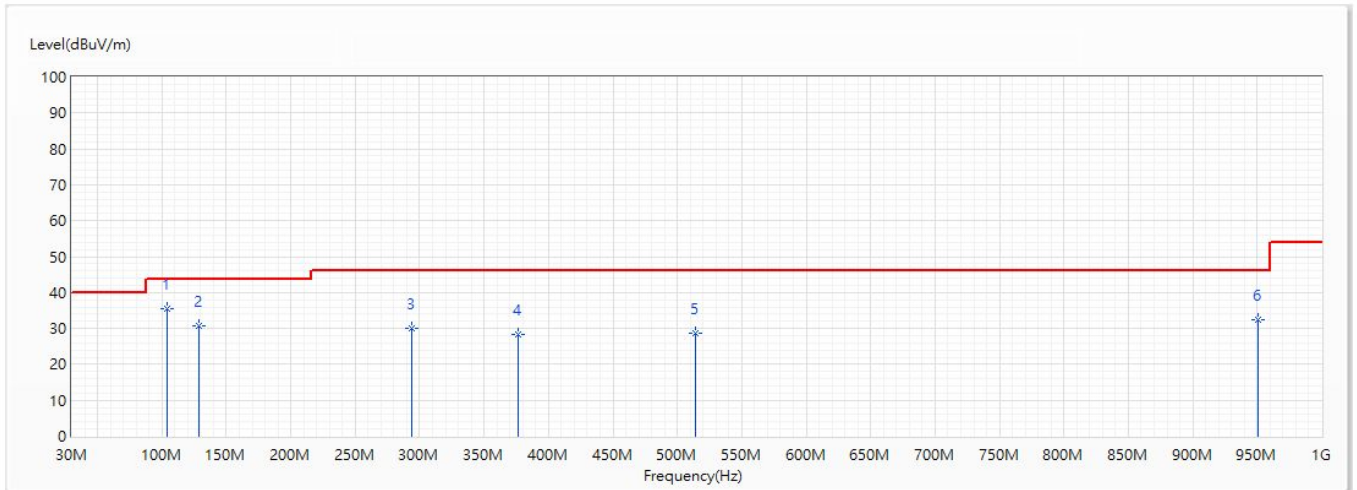


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.44	43.52	-8.08	38.78	-3.34	QP
2	128.94	30.55	43.52	-12.97	32.55	-2.00	QP
3	294.034	30.07	46.02	-15.95	30.60	-0.53	QP
4	376.387	28.27	46.02	-17.75	26.18	2.09	QP
5	514.127	28.75	46.02	-17.27	23.89	4.86	QP
6	950.433	32.49	46.02	-13.53	22.14	10.35	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac80_BW80M_Ant2+3+4+5_CH155_5.775 G	Humidity (%RH)	55.0

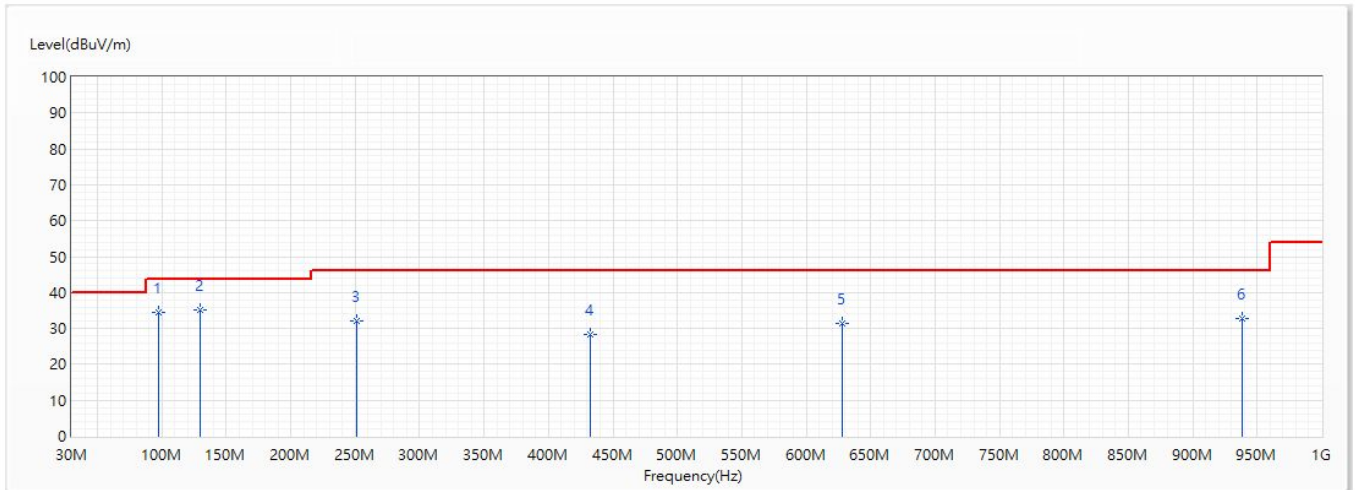


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.803	34.62	43.52	-8.90	38.86	-4.24	QP
* 2	129.522	35.12	43.52	-8.40	37.13	-2.01	QP
3	251.16	32.19	46.02	-13.83	33.54	-1.35	QP
4	432.744	28.42	46.02	-17.60	24.95	3.47	QP
5	627.811	31.42	46.02	-14.60	25.13	6.29	QP
6	938.405	32.66	46.02	-13.36	22.49	10.17	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

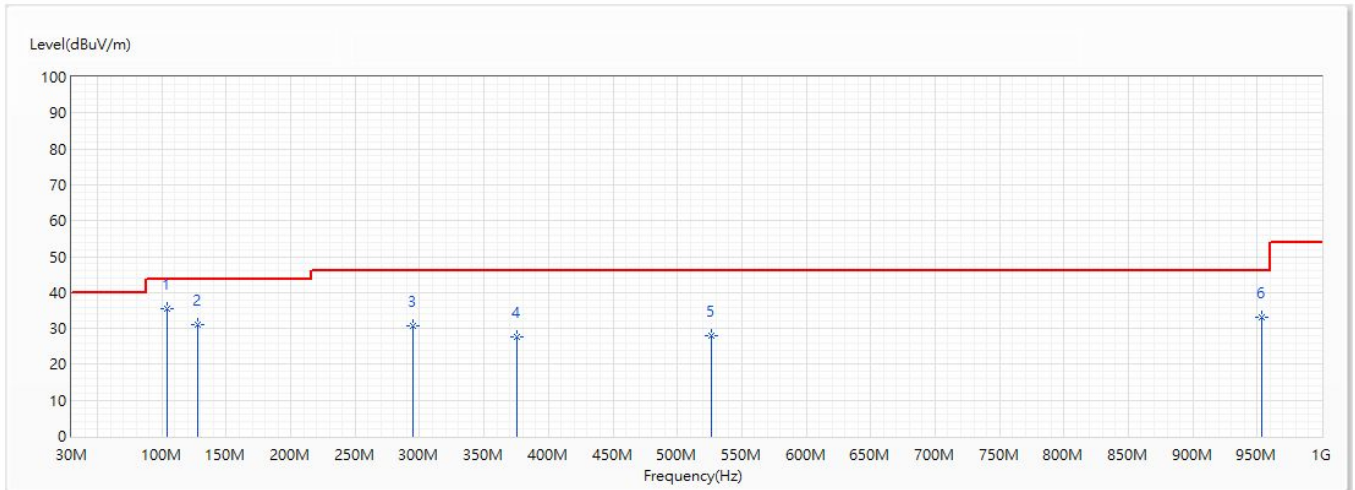


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.64	43.52	-7.88	38.98	-3.34	QP
2	127.97	30.98	43.52	-12.54	32.95	-1.97	QP
3	294.519	30.59	46.02	-15.43	31.12	-0.53	QP
4	375.902	27.50	46.02	-18.52	25.42	2.08	QP
5	526.155	28.13	46.02	-17.89	23.11	5.02	QP
6	953.828	33.05	46.02	-12.97	22.64	10.41	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax20_BW20M_Ant2+3+4+5_CH157_5.785 G	Humidity (%RH)	55.0

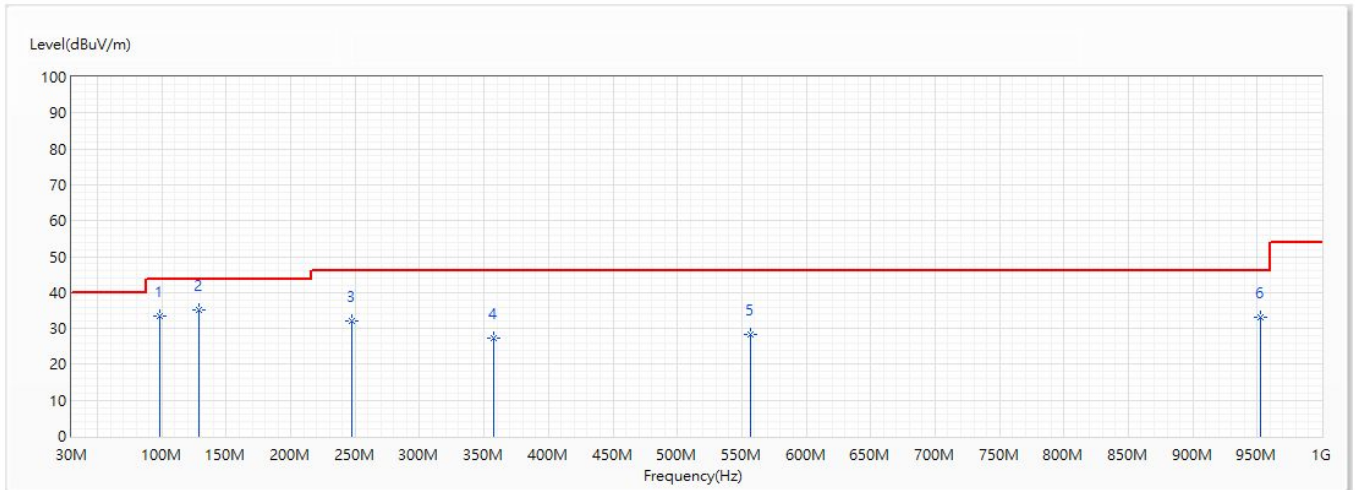


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.9	33.32	43.52	-10.20	37.54	-4.22	QP
* 2	128.358	35.16	43.52	-8.36	37.14	-1.98	QP
3	246.892	32.24	46.02	-13.78	33.76	-1.52	QP
4	357.666	27.40	46.02	-18.62	25.93	1.47	QP
5	556.807	28.41	46.02	-17.61	23.00	5.41	QP
6	952.47	33.11	46.02	-12.91	22.73	10.38	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax40_BW40M_Ant2+3+4+5_CH151_5.755 G	Humidity (%RH)	55.0

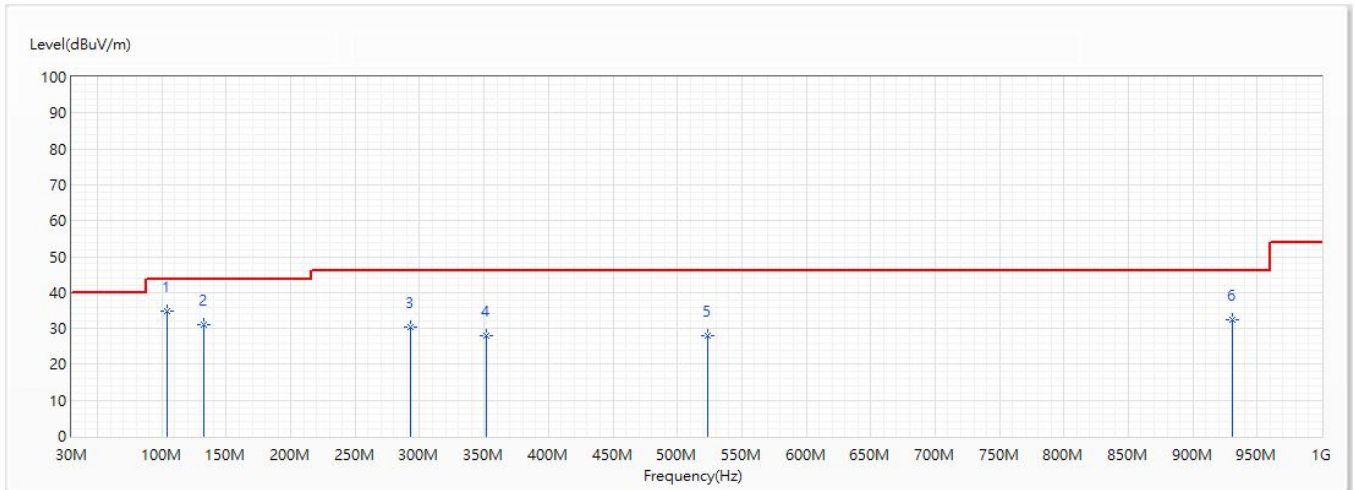


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.205	34.95	43.52	-8.57	38.28	-3.33	QP
2	132.335	31.04	43.52	-12.48	33.12	-2.08	QP
3	292.967	30.39	46.02	-15.63	30.95	-0.56	QP
4	352.04	27.86	46.02	-18.16	26.56	1.30	QP
5	523.924	28.03	46.02	-17.99	23.04	4.99	QP
6	930.451	32.45	46.02	-13.57	22.42	10.03	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax40_BW40M_Ant2+3+4+5_CH151_5.755 G	Humidity (%RH)	55.0

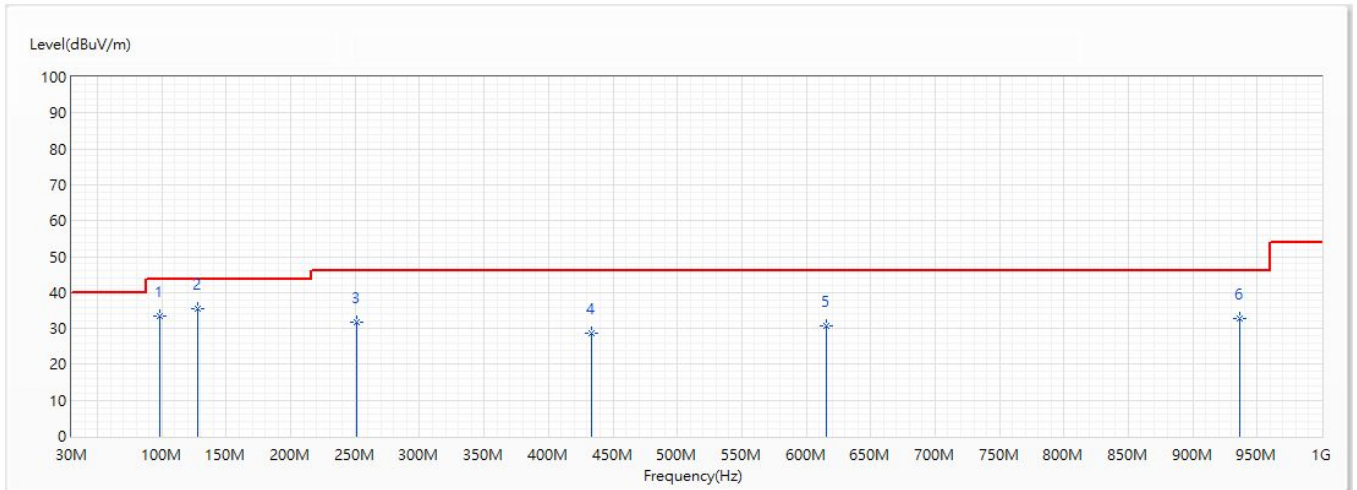


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	97.997	33.52	43.52	-10.00	37.73	-4.21	QP
* 2	127.679	35.35	43.52	-8.17	37.32	-1.97	QP
3	250.869	31.88	46.02	-14.14	33.24	-1.36	QP
4	433.52	28.76	46.02	-17.26	25.28	3.48	QP
5	615.589	30.80	46.02	-15.22	24.65	6.15	QP
6	936.077	32.73	46.02	-13.29	22.61	10.12	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax80_BW80M_Ant2+3+4+5_CH155_5.775 G	Humidity (%RH)	55.0

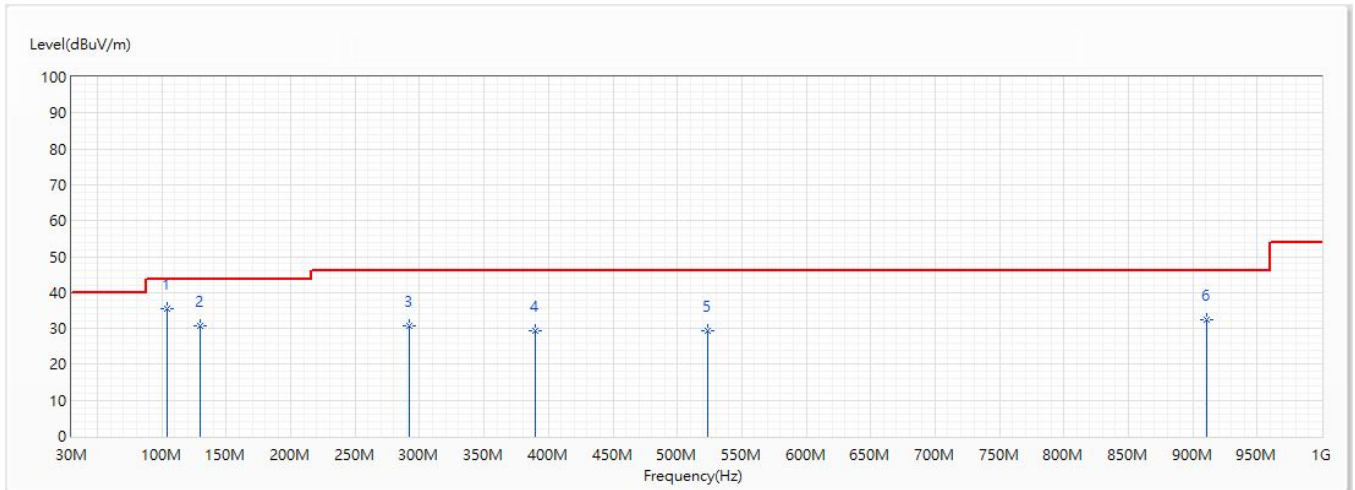


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	104.108	35.38	43.52	-8.14	38.72	-3.34	QP
2	129.813	30.87	43.52	-12.65	32.88	-2.01	QP
3	292.385	30.56	46.02	-15.46	31.13	-0.57	QP
4	389.676	29.32	46.02	-16.70	26.80	2.52	QP
5	523.439	29.44	46.02	-16.58	24.47	4.97	QP
6	910.469	32.43	46.02	-13.59	22.70	9.73	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/15
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax80_BW80M_Ant2+3+4+5_CH155_5.775 G	Humidity (%RH)	55.0

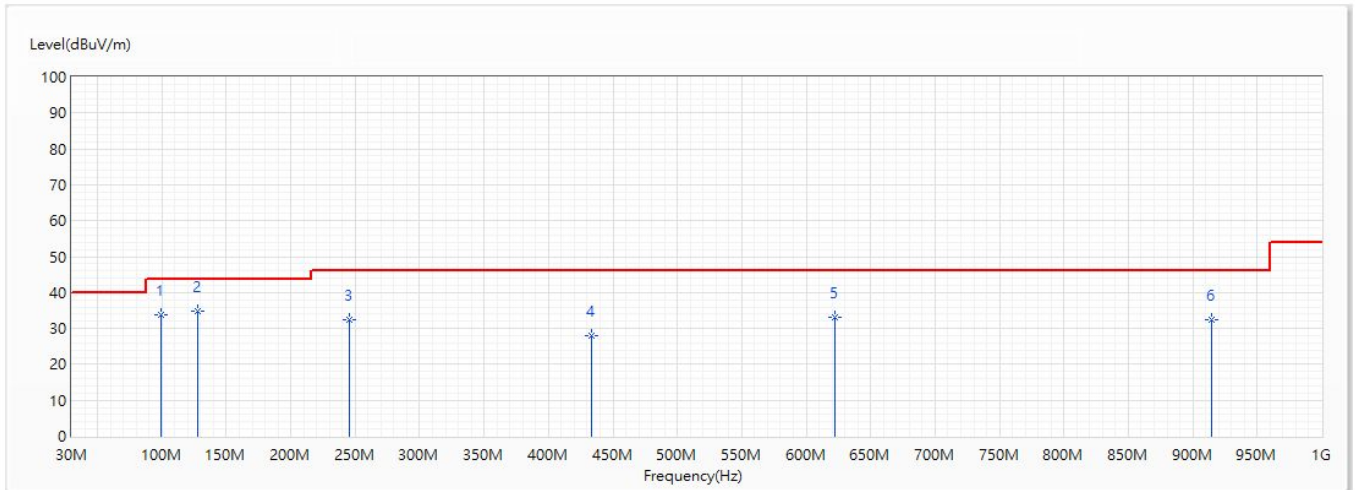


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	99.452	33.89	43.52	-9.63	37.87	-3.98	QP
* 2	127.582	34.92	43.52	-8.60	36.89	-1.97	QP
3	245.728	32.48	46.02	-13.54	34.06	-1.58	QP
4	433.714	28.12	46.02	-17.90	24.64	3.48	QP
5	622.573	33.07	46.02	-12.95	26.83	6.24	QP
6	914.252	32.40	46.02	-13.62	22.62	9.78	QP

**Note:**

1. All reading levels is Quasi-Peak value.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

**Harmonic & Spurious:**

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

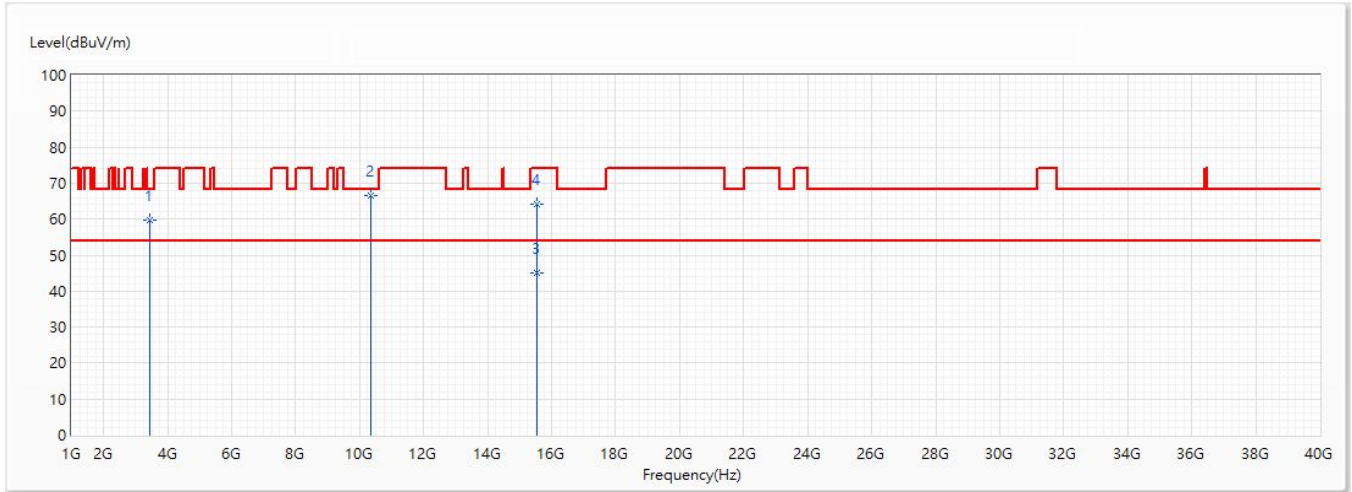


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	59.82	68.20	-8.38	76.69	-16.87	PK
* 2	10360	66.62	68.20	-1.58	66.28	0.34	PK
3	15540	45.13	54.00	-8.87	40.86	4.27	AV
4	15540	64.01	74.00	-9.99	59.74	4.27	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

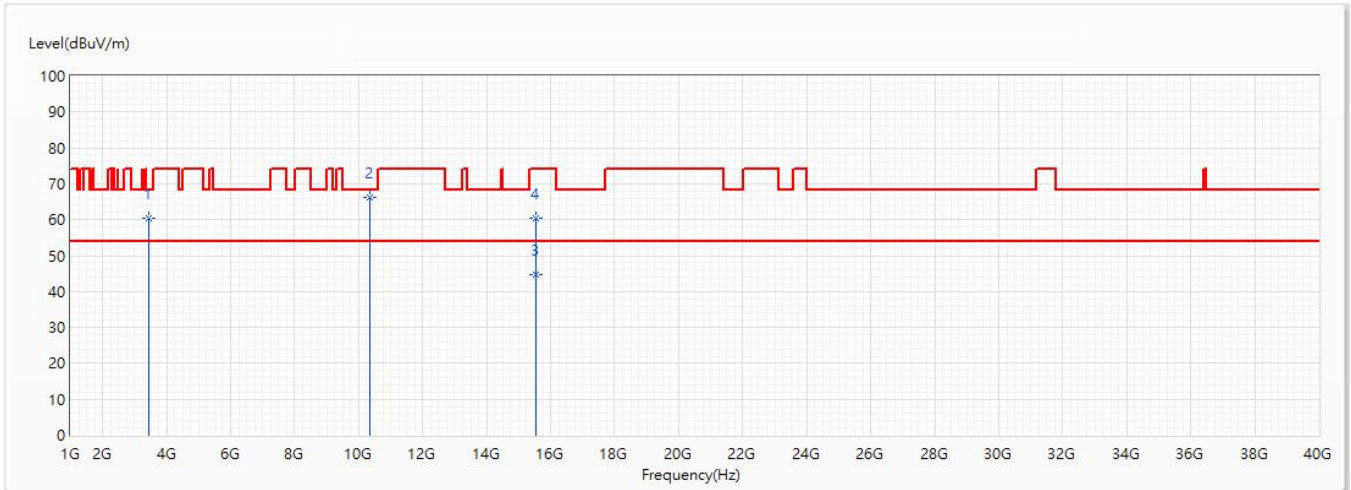


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	60.35	68.20	-7.85	77.22	-16.87	PK
* 2	10360	66.20	68.20	-2.00	65.86	0.34	PK
3	15540	44.58	54.00	-9.42	40.31	4.27	AV
4	15540	60.37	74.00	-13.63	56.10	4.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

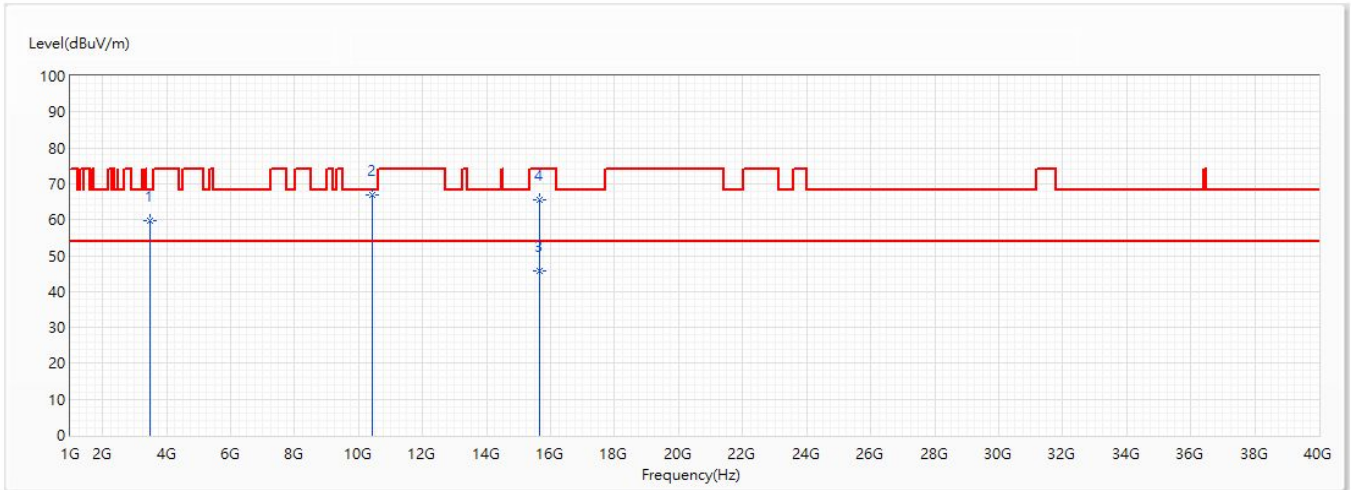


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	59.79	68.20	-8.41	76.61	-16.82	PK
* 2	10440	66.88	68.20	-1.32	66.19	0.69	PK
3	15660	45.57	54.00	-8.43	41.62	3.95	AV
4	15660	65.54	74.00	-8.46	61.59	3.95	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

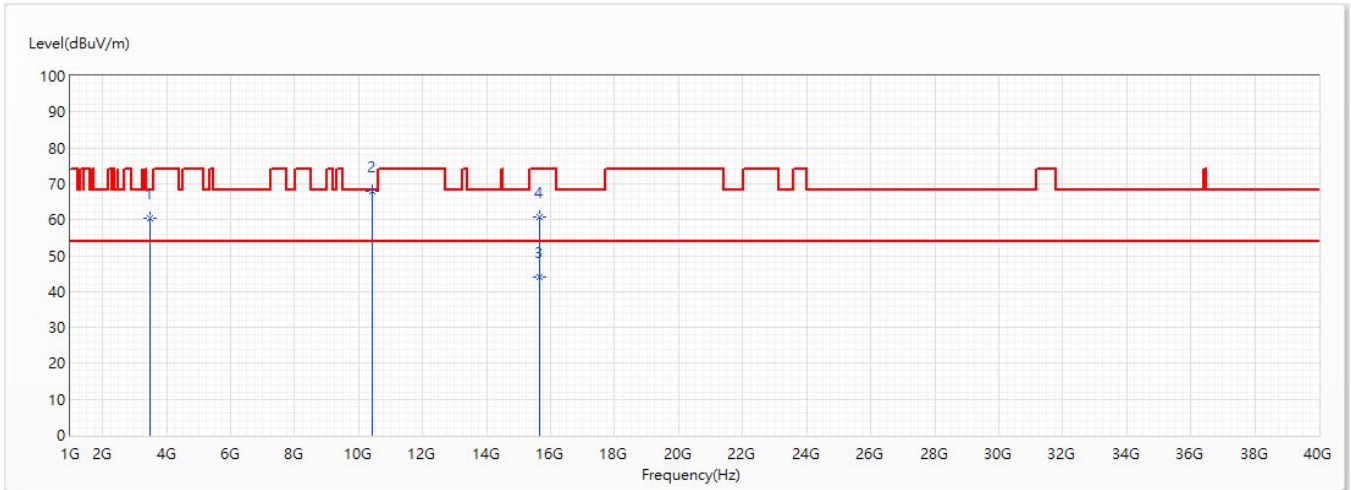


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	60.41	68.20	-7.79	77.23	-16.82	PK
* 2	10440	67.82	68.20	-0.38	67.13	0.69	PK
3	15660	44.19	54.00	-9.81	40.24	3.95	AV
4	15660	60.85	74.00	-13.15	56.90	3.95	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

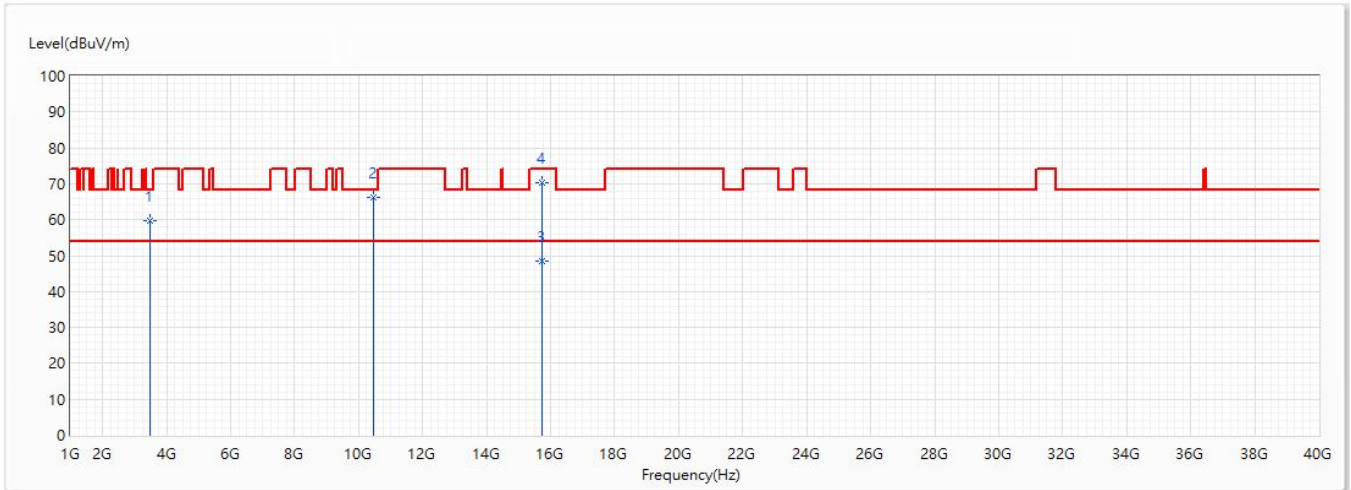


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	59.87	68.20	-8.33	76.68	-16.81	PK
* 2	10480	66.11	68.20	-2.09	65.25	0.86	PK
3	15720	48.44	54.00	-5.56	44.64	3.80	AV
4	15720	70.16	74.00	-3.84	66.36	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

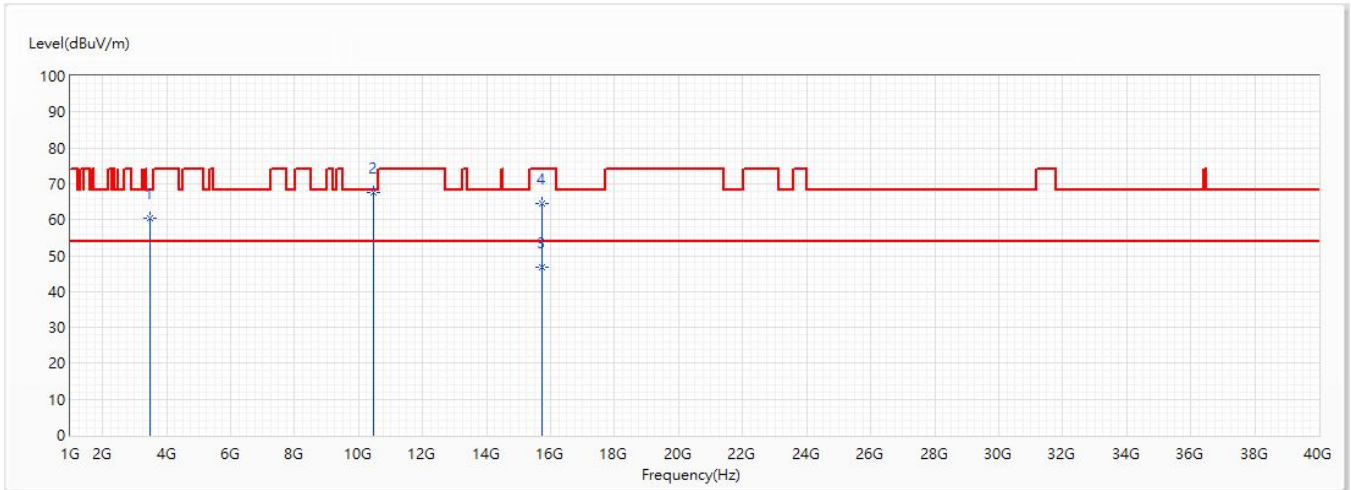


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	60.35	68.20	-7.85	77.16	-16.81	PK
* 2	10480	67.57	68.20	-0.63	66.71	0.86	PK
3	15720	46.62	54.00	-7.38	42.82	3.80	AV
4	15720	64.44	74.00	-9.56	60.64	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

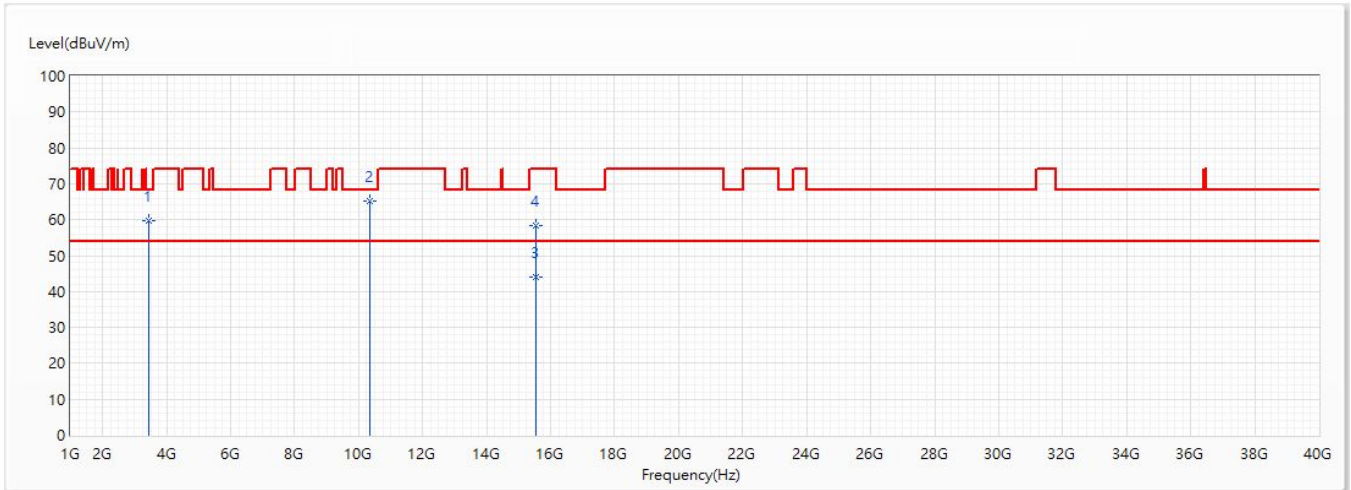


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	59.77	68.20	-8.43	76.64	-16.87	PK
* 2	10360	65.18	68.20	-3.02	64.84	0.34	PK
3	15540	44.15	54.00	-9.85	39.88	4.27	AV
4	15540	58.23	74.00	-15.77	53.96	4.27	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

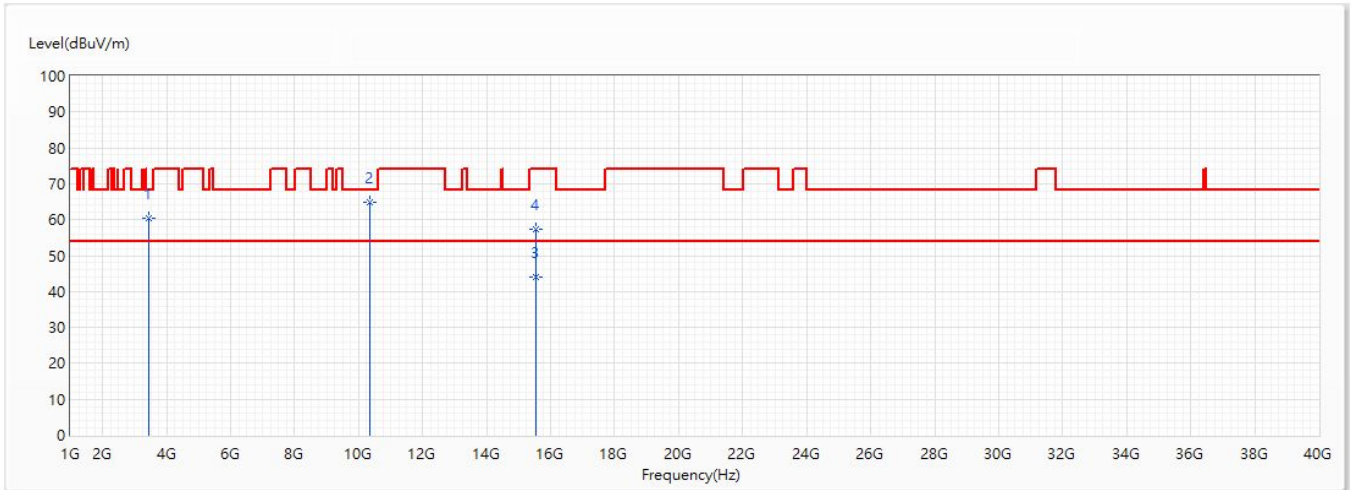


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	60.31	68.20	-7.89	77.18	-16.87	PK
* 2	10360	64.96	68.20	-3.24	64.62	0.34	PK
3	15540	44.12	54.00	-9.88	39.85	4.27	AV
4	15540	57.31	74.00	-16.69	53.04	4.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

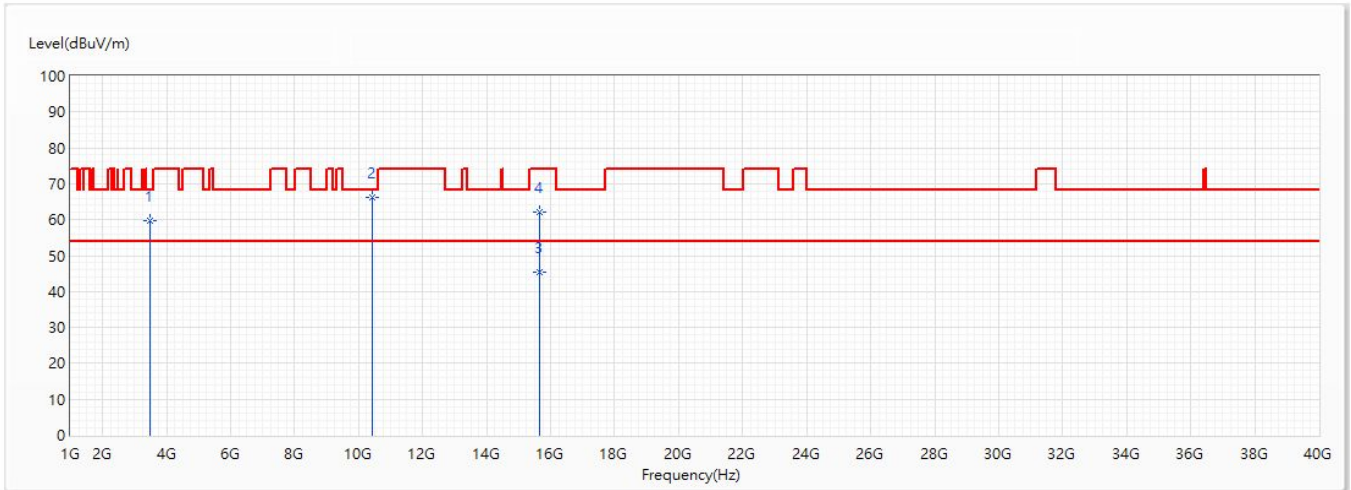


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	59.72	68.20	-8.48	76.54	-16.82	PK
* 2	10440	66.14	68.20	-2.06	65.45	0.69	PK
3	15660	45.39	54.00	-8.61	41.44	3.95	AV
4	15660	62.21	74.00	-11.79	58.26	3.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

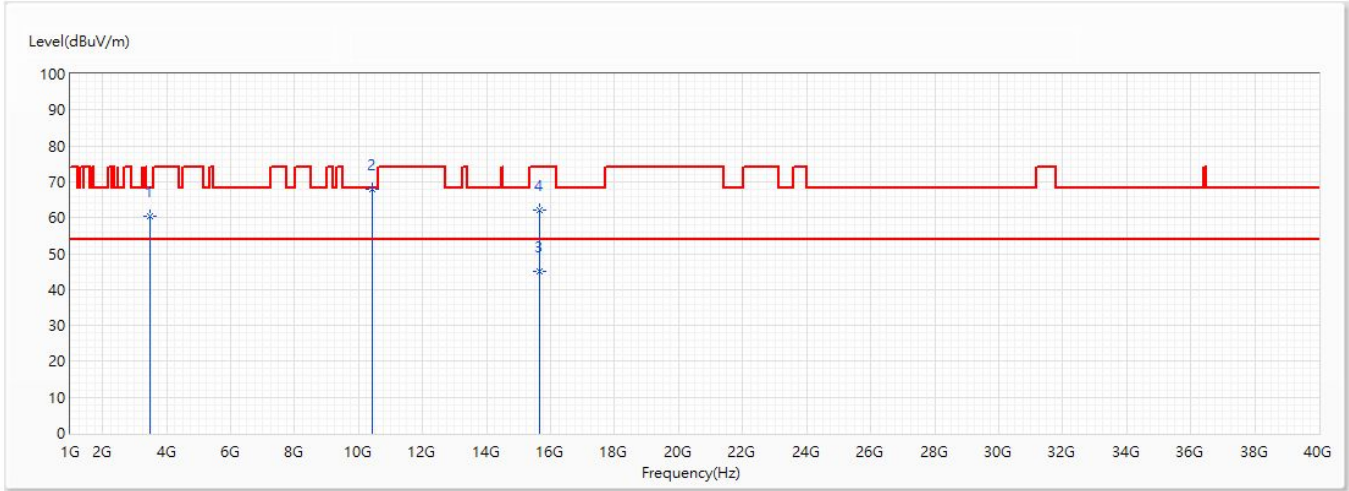


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	60.38	68.20	-7.82	77.20	-16.82	PK
* 2	10440	67.98	68.20	-0.22	67.29	0.69	PK
3	15660	44.97	54.00	-9.03	41.02	3.95	AV
4	15660	62.08	74.00	-11.92	58.13	3.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

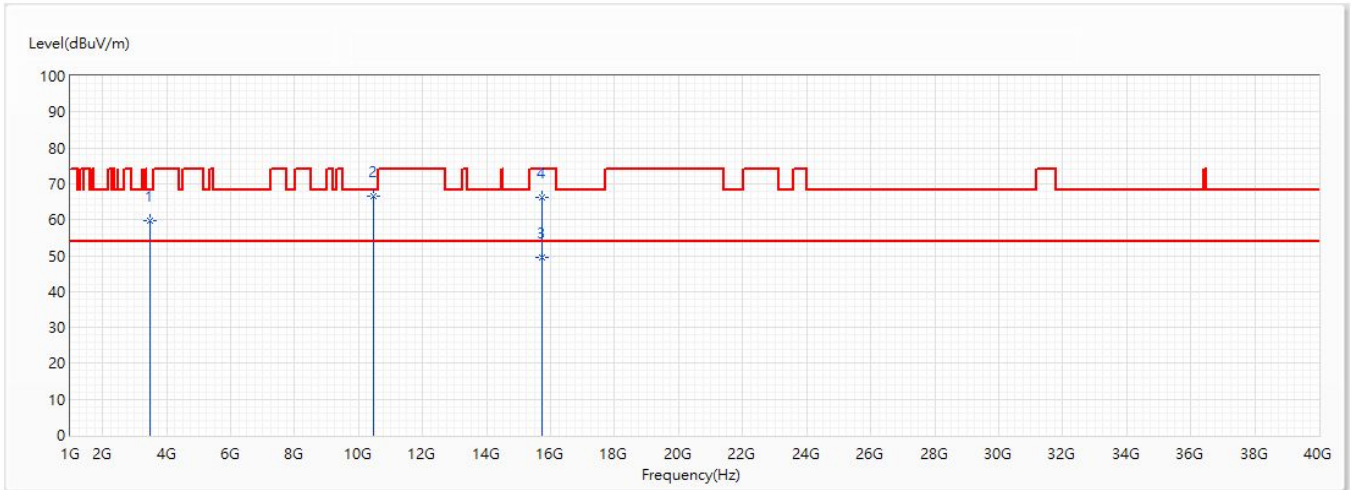


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	59.89	68.20	-8.31	76.70	-16.81	PK
* 2	10480	66.59	68.20	-1.61	65.73	0.86	PK
3	15720	49.38	54.00	-4.62	45.58	3.80	AV
4	15720	66.16	74.00	-7.84	62.36	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

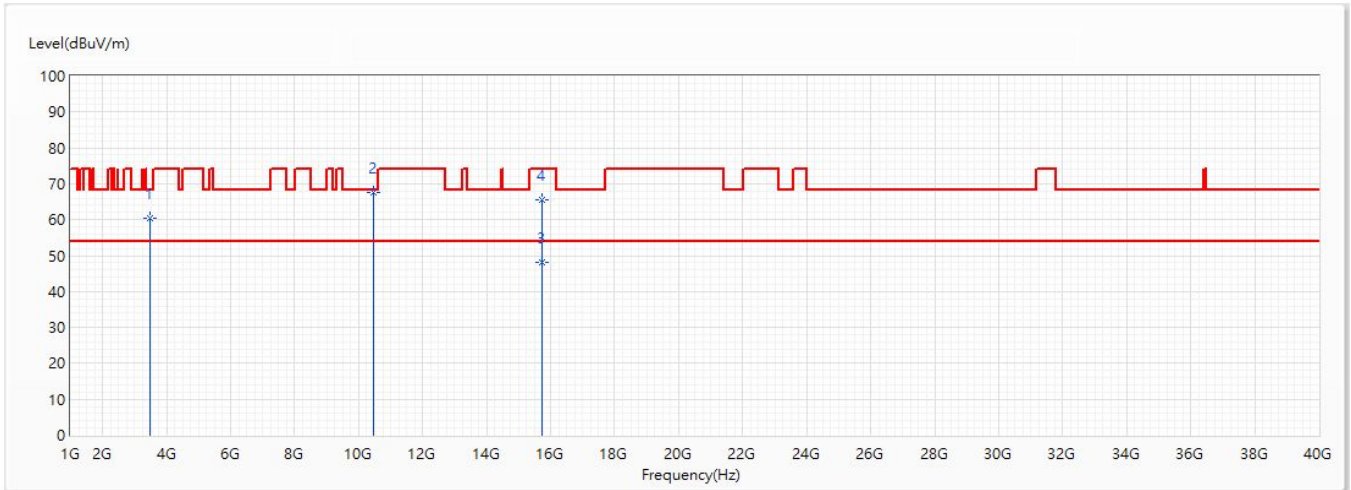


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	60.48	68.20	-7.72	77.29	-16.81	PK
* 2	10480	67.73	68.20	-0.47	66.87	0.86	PK
3	15720	48.01	54.00	-5.99	44.21	3.80	AV
4	15720	65.37	74.00	-8.63	61.57	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

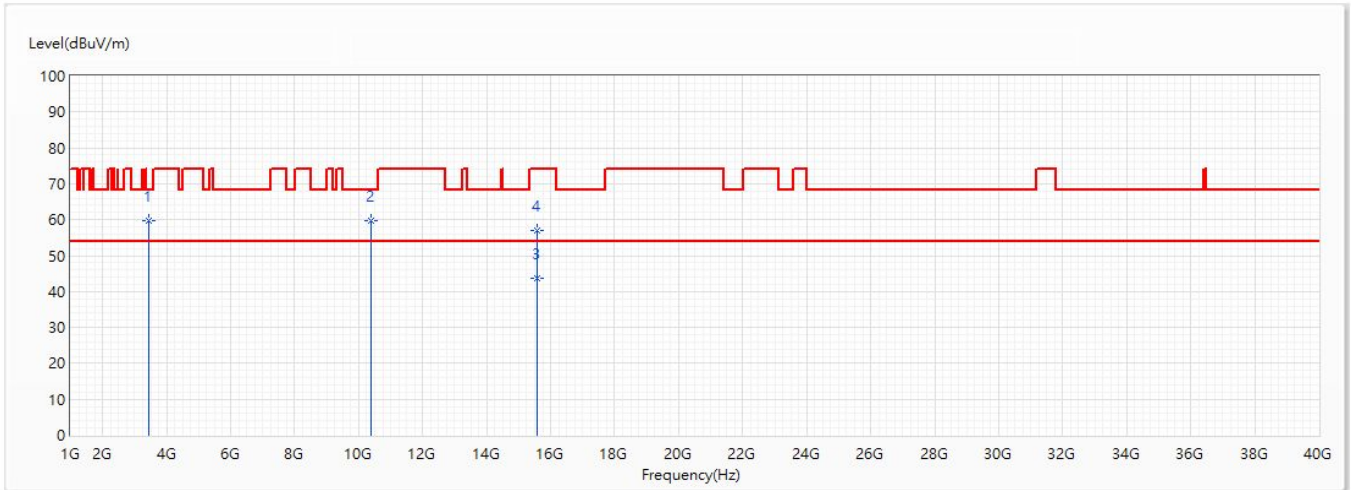


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	3460	59.86	68.20	-8.34	76.72	-16.86	PK
2	10380	59.56	68.20	-8.64	59.12	0.44	PK
3	15570	43.56	54.00	-10.44	39.37	4.19	AV
4	15570	56.85	74.00	-17.15	52.66	4.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

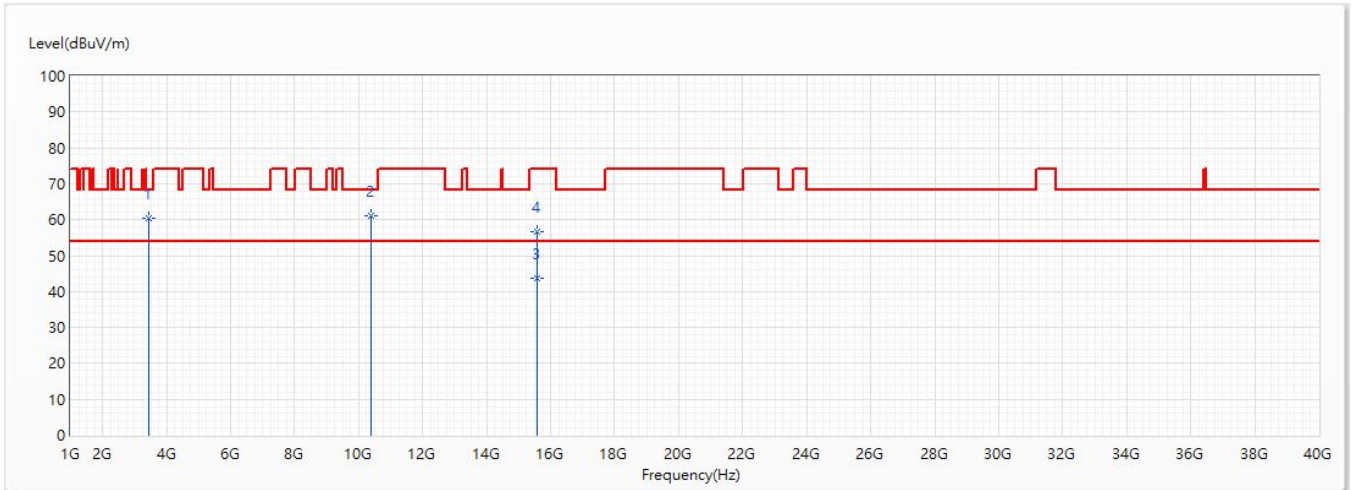


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3460	60.42	68.20	-7.78	77.28	-16.86	PK
* 2	10380	60.98	68.20	-7.22	60.54	0.44	PK
3	15570	43.62	54.00	-10.38	39.43	4.19	AV
4	15570	56.76	74.00	-17.24	52.57	4.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

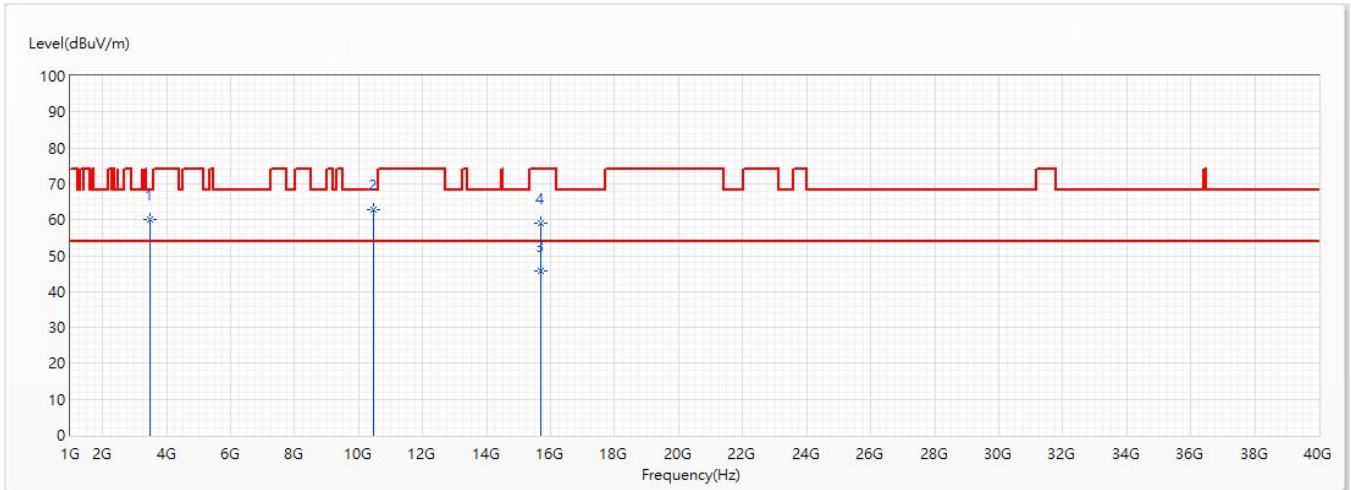


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3486.67	59.91	68.20	-8.29	76.72	-16.81	PK
* 2	10460	62.64	68.20	-5.56	61.88	0.76	PK
3	15690	45.82	54.00	-8.18	41.94	3.88	AV
4	15690	59.17	74.00	-14.83	55.29	3.88	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

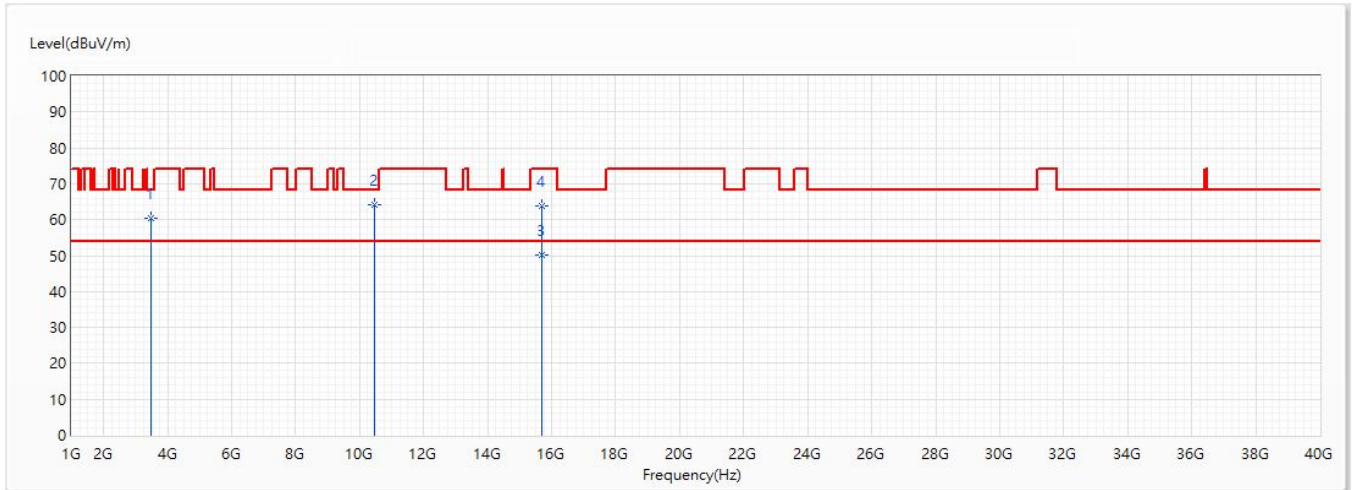


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3486.67	60.49	68.20	-7.71	77.30	-16.81	PK
2	10460	64.27	68.20	-3.93	63.51	0.76	PK
* 3	15690	50.18	54.00	-3.82	46.30	3.88	AV
4	15690	63.68	74.00	-10.32	59.80	3.88	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

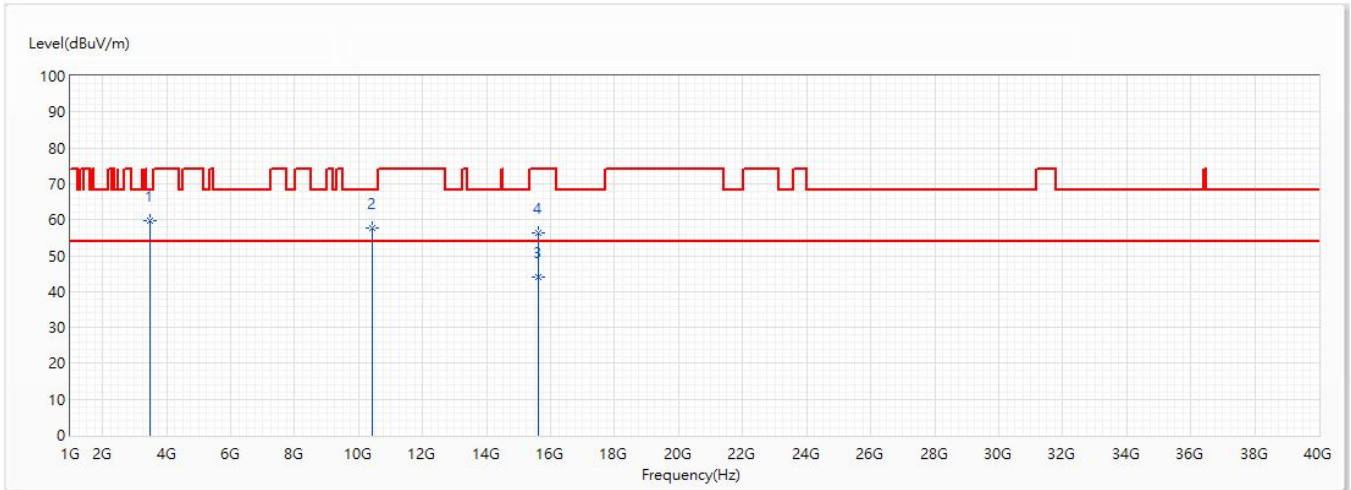


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	3473.33	59.86	68.20	-8.34	76.70	-16.84	PK
2	10420	57.61	68.20	-10.59	57.00	0.61	PK
3	15630	44.03	54.00	-9.97	40.00	4.03	AV
4	15630	56.20	74.00	-17.80	52.17	4.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ac_80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

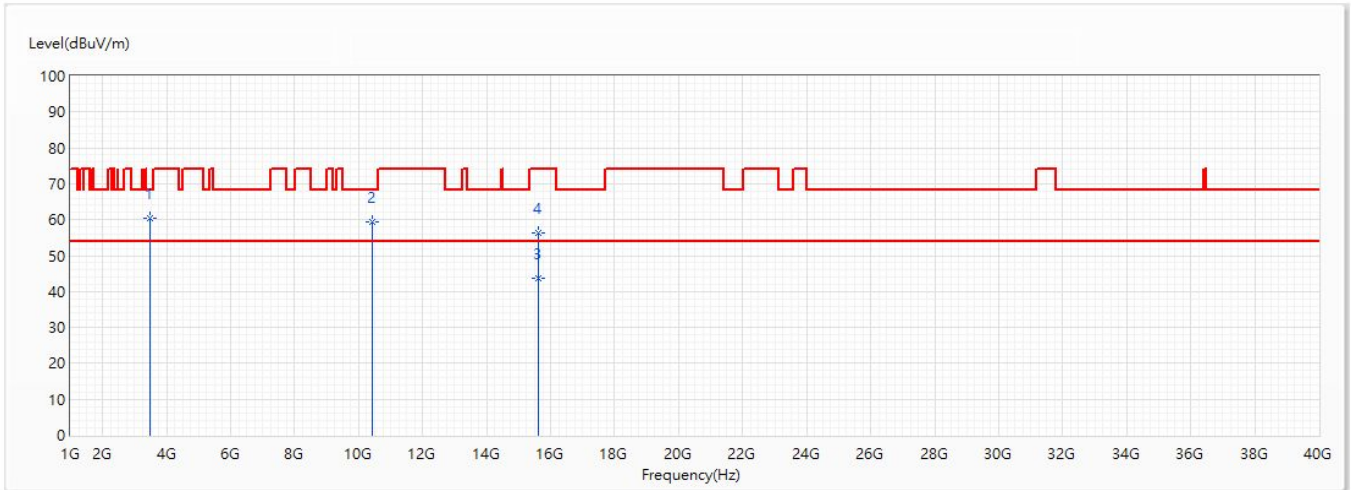


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	3473.33	60.58	68.20	-7.62	77.42	-16.84	PK
2	10420	59.48	68.20	-8.72	58.87	0.61	PK
3	15630	43.78	54.00	-10.22	39.75	4.03	AV
4	15630	56.48	74.00	-17.52	52.45	4.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

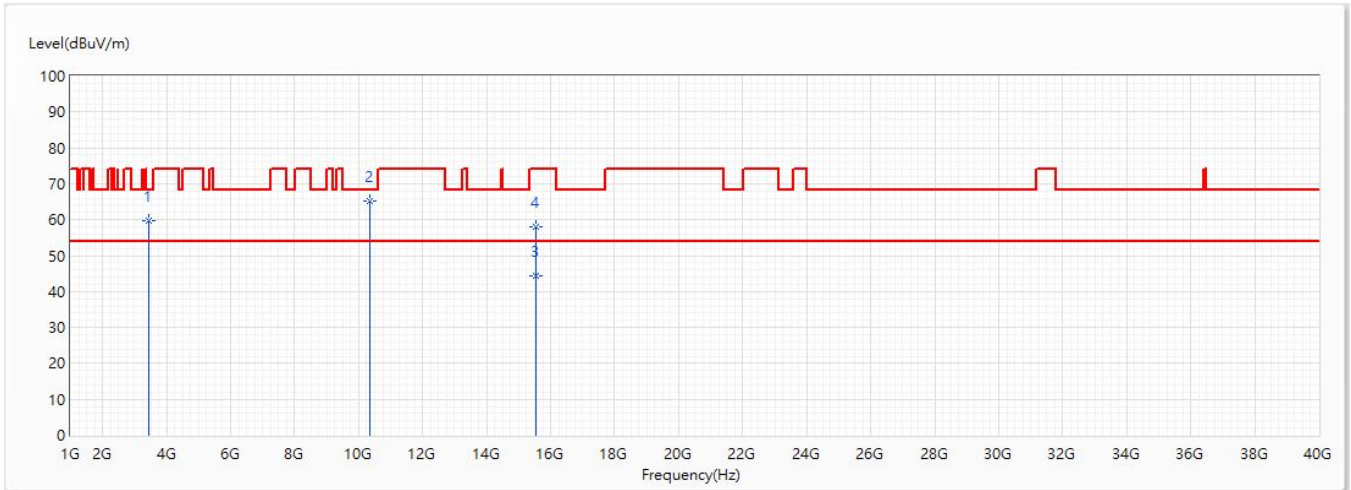


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	59.79	68.20	-8.41	76.66	-16.87	PK
* 2	10360	65.16	68.20	-3.04	64.82	0.34	PK
3	15540	44.38	54.00	-9.62	40.11	4.27	AV
4	15540	58.09	74.00	-15.91	53.82	4.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

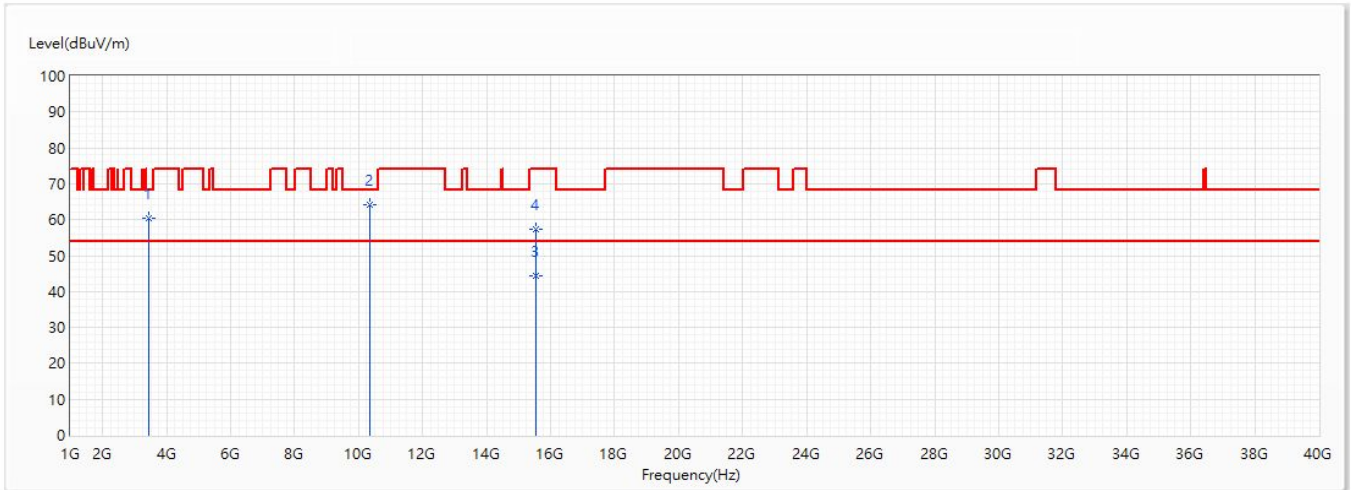


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3453.33	60.38	68.20	-7.82	77.25	-16.87	PK
* 2	10360	64.25	68.20	-3.95	63.91	0.34	PK
3	15540	44.26	54.00	-9.74	39.99	4.27	AV
4	15540	57.27	74.00	-16.73	53.00	4.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

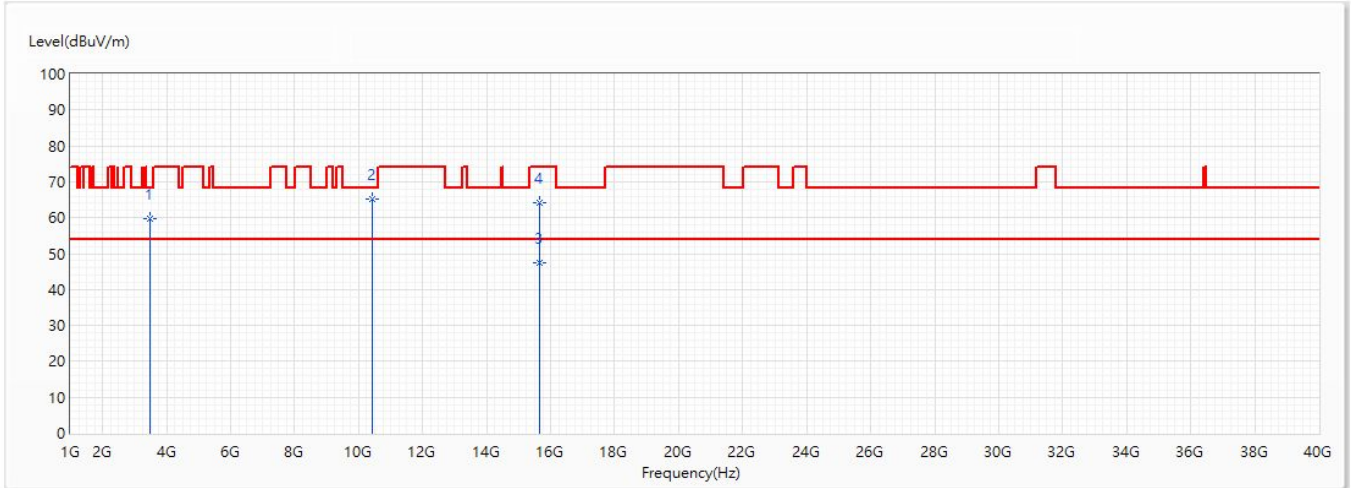


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	59.85	68.20	-8.35	76.67	-16.82	PK
* 2	10440	65.03	68.20	-3.17	64.34	0.69	PK
3	15660	47.40	54.00	-6.60	43.45	3.95	AV
4	15660	64.17	74.00	-9.83	60.22	3.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

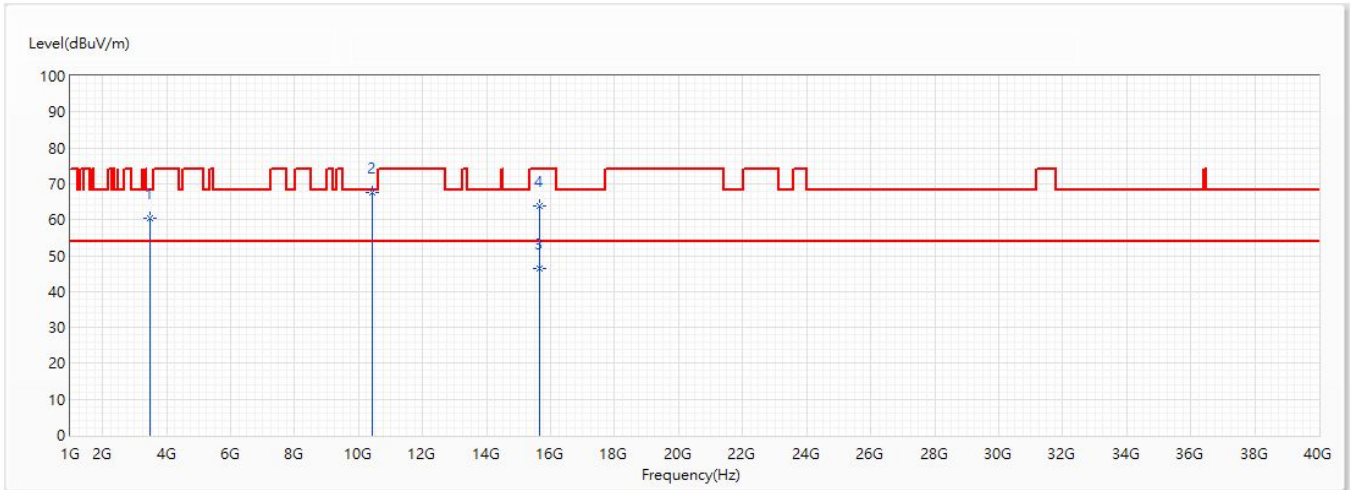


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3480	60.35	68.20	-7.85	77.17	-16.82	PK
* 2	10440	67.54	68.20	-0.66	66.85	0.69	PK
3	15660	46.26	54.00	-7.74	42.31	3.95	AV
4	15660	63.74	74.00	-10.26	59.79	3.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.



Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

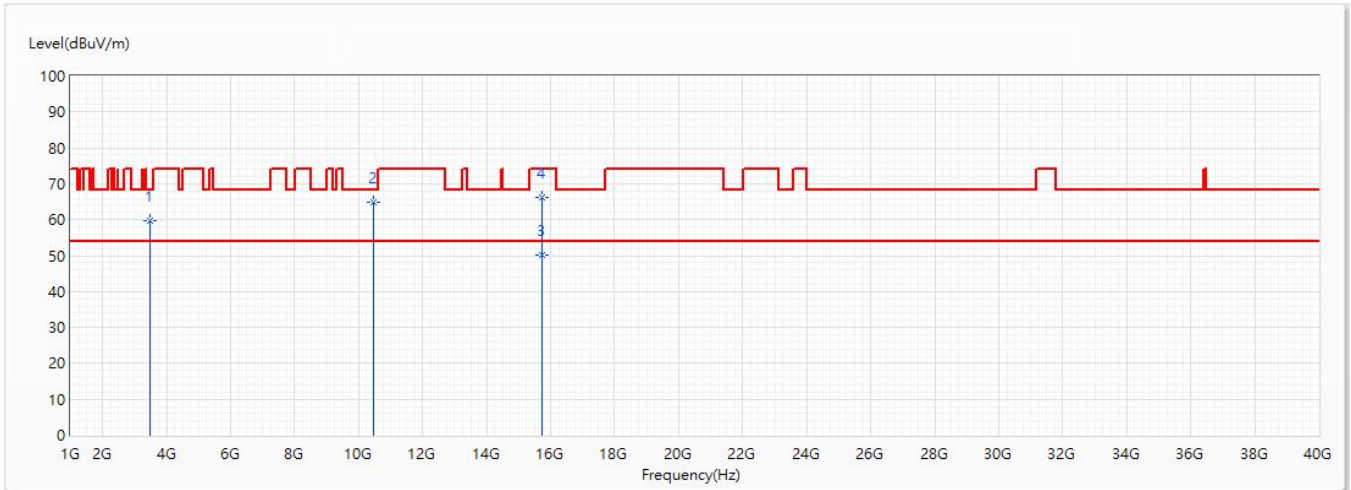


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	59.76	68.20	-8.44	76.57	-16.81	PK
* 2	10480	64.89	68.20	-3.31	64.03	0.86	PK
3	15720	50.02	54.00	-3.98	46.22	3.80	AV
4	15720	66.09	74.00	-7.91	62.29	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

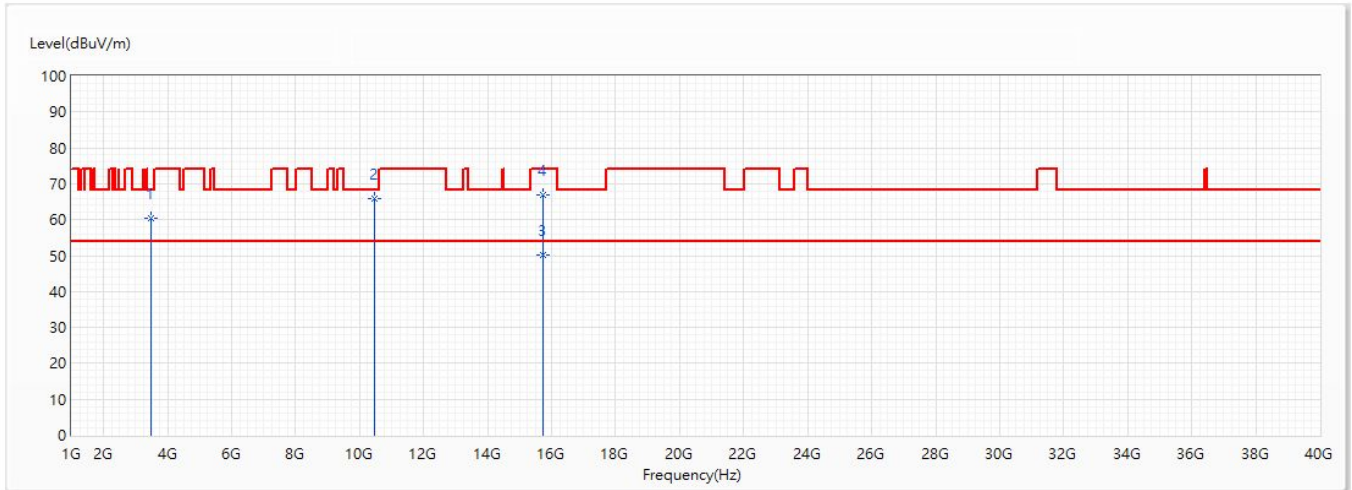


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3493.33	60.41	68.20	-7.79	77.22	-16.81	PK
* 2	10480	65.80	68.20	-2.40	64.94	0.86	PK
3	15720	50.18	54.00	-3.82	46.38	3.80	AV
4	15720	66.95	74.00	-7.05	63.15	3.80	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

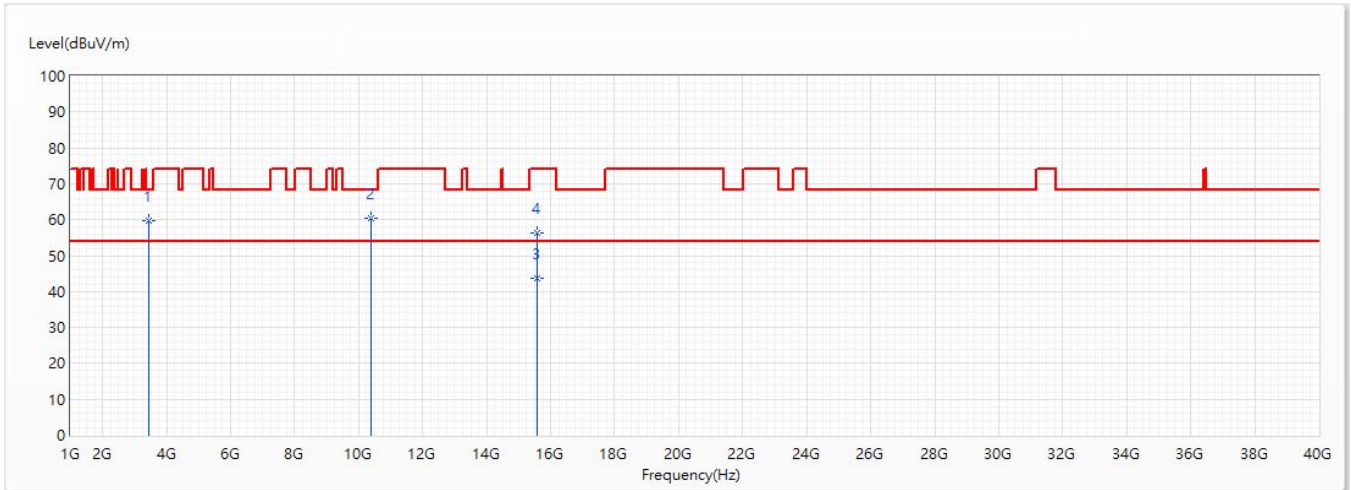


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3460	59.81	68.20	-8.39	76.67	-16.86	PK
* 2	10380	60.55	68.20	-7.65	60.11	0.44	PK
3	15570	43.63	54.00	-10.37	39.44	4.19	AV
4	15570	56.28	74.00	-17.72	52.09	4.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

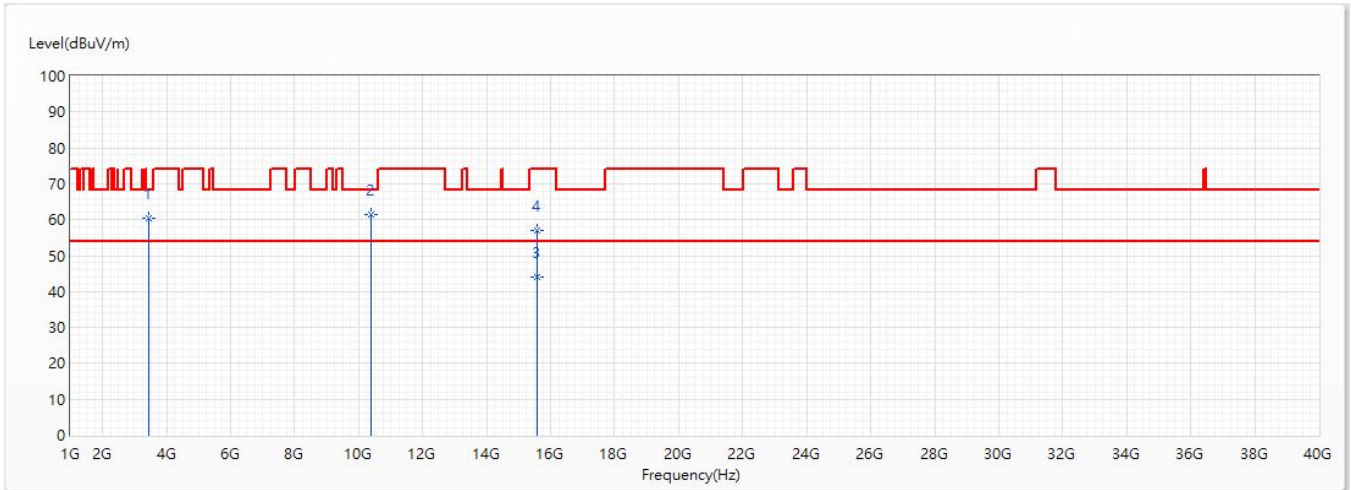


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3460	60.45	68.20	-7.75	77.31	-16.86	PK
* 2	10380	61.41	68.20	-6.79	60.97	0.44	PK
3	15570	44.18	54.00	-9.82	39.99	4.19	AV
4	15570	57.12	74.00	-16.88	52.93	4.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

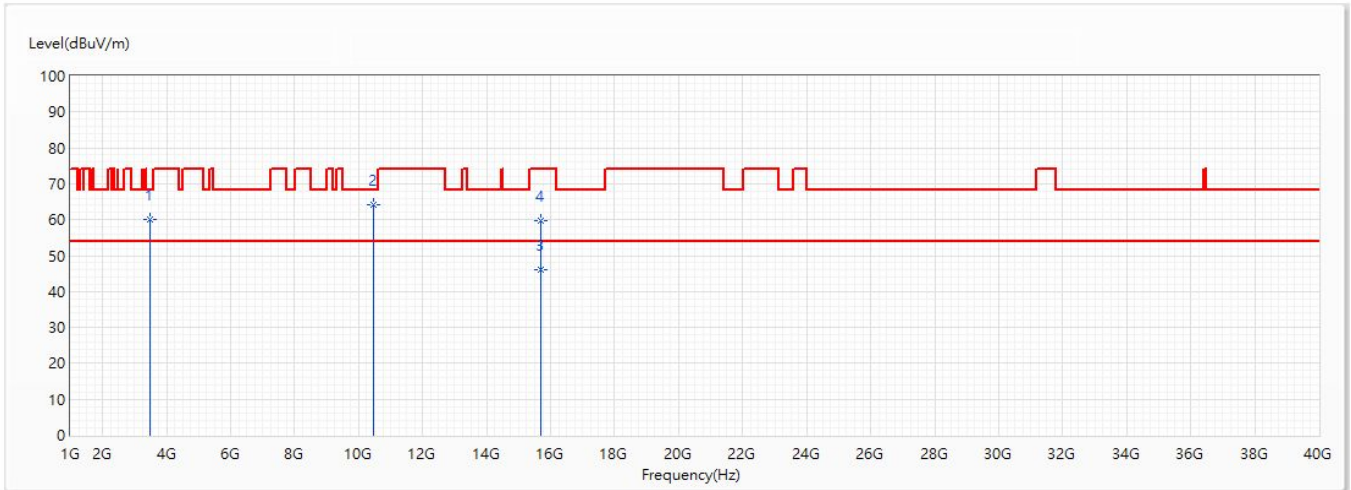


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3486.67	59.96	68.20	-8.24	76.77	-16.81	PK
* 2	10460	64.18	68.20	-4.02	63.42	0.76	PK
3	15690	45.94	54.00	-8.06	42.06	3.88	AV
4	15690	59.89	74.00	-14.11	56.01	3.88	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

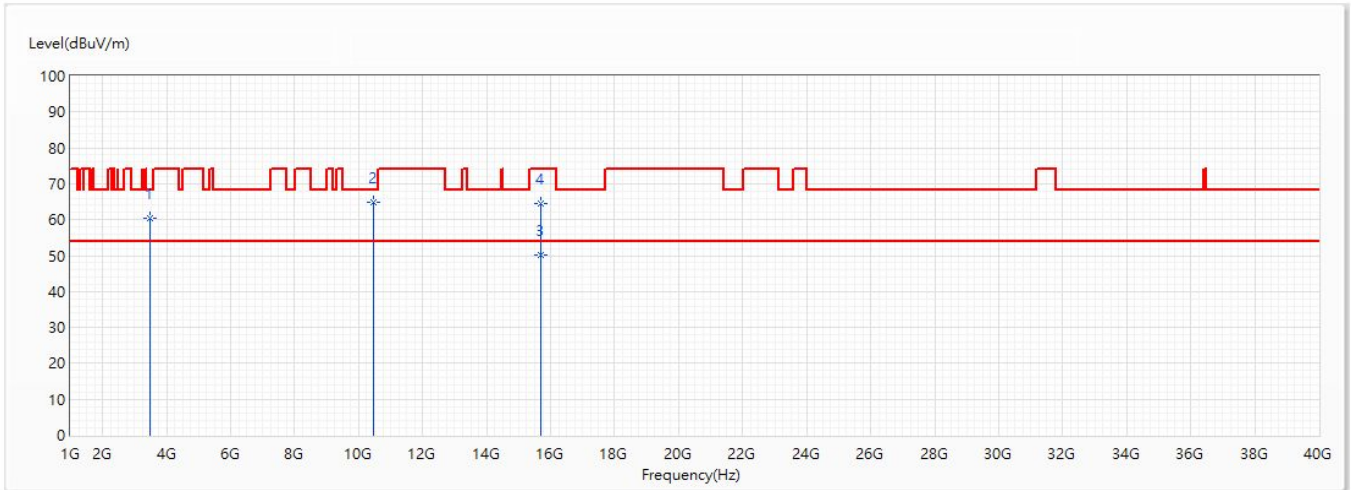

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3486.67	60.45	68.20	-7.75	77.26	-16.81	PK
* 2	10460	64.90	68.20	-3.30	64.14	0.76	PK
3	15690	50.16	54.00	-3.84	46.28	3.88	AV
4	15690	64.50	74.00	-9.50	60.62	3.88	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.