


Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

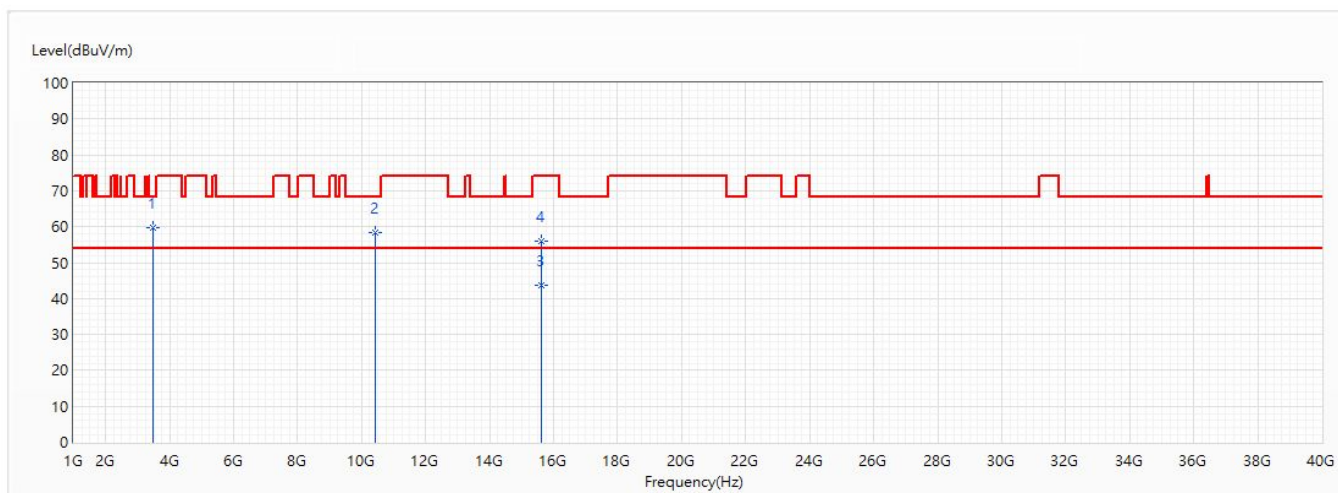


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	3473.33	59.81	68.20	-8.39	76.65	-16.84	PK
2	10420	58.31	68.20	-9.89	57.70	0.61	PK
3	15630	43.83	54.00	-10.17	39.80	4.03	AV
4	15630	56.09	74.00	-17.91	52.06	4.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/22
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	CDD_802.11ax_80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

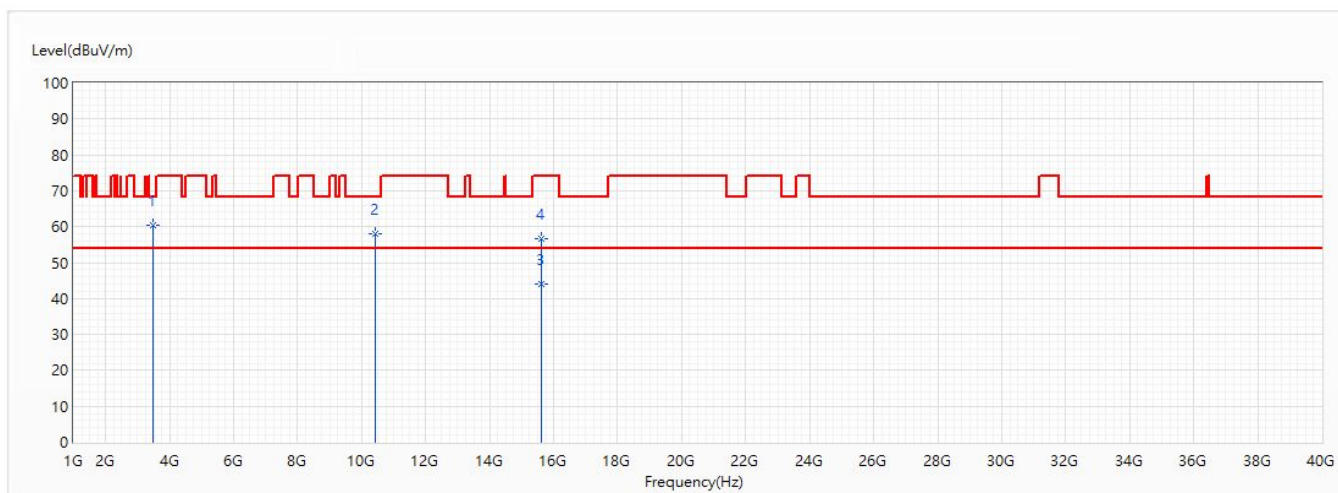


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	3473.33	60.54	68.20	-7.66	77.38	-16.84	PK
2	10420	58.03	68.20	-10.17	57.42	0.61	PK
3	15630	44.12	54.00	-9.88	40.09	4.03	AV
4	15630	56.61	74.00	-17.39	52.58	4.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/24
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

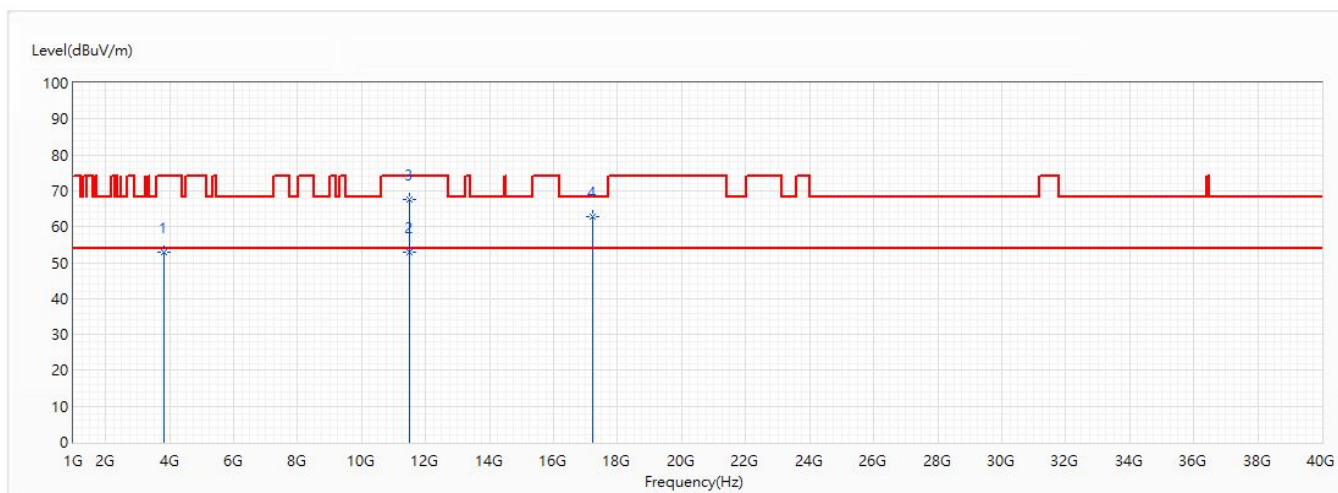


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	53.01	74.00	-20.99	68.69	-15.68	PK
* 2	11490	52.76	54.00	-1.24	50.04	2.72	AV
3	11490	67.63	74.00	-6.37	64.91	2.72	PK
4	17235	62.85	68.20	-5.35	57.35	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

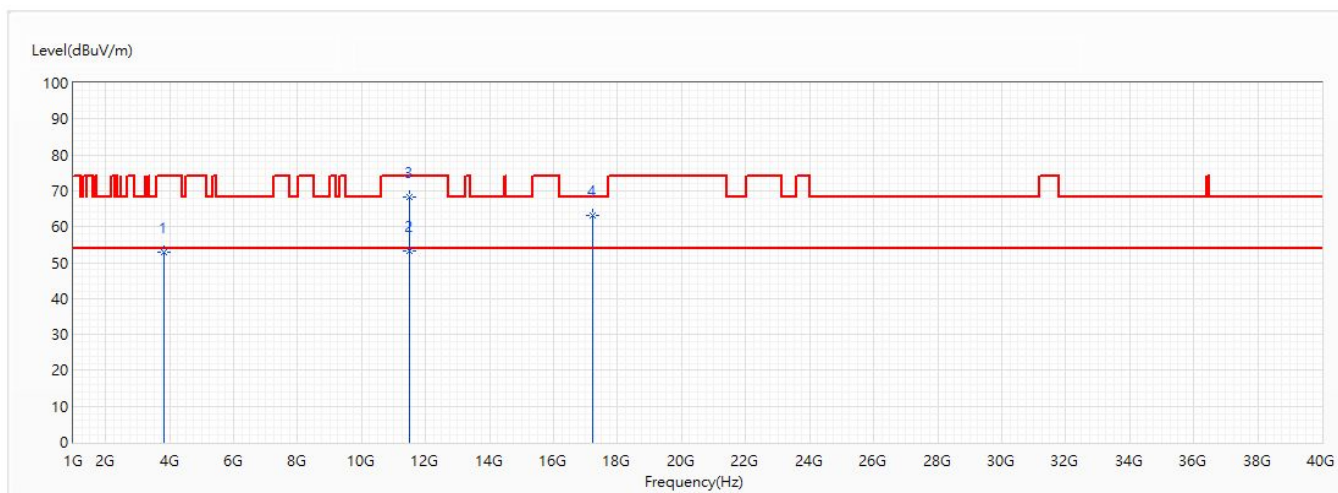


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	52.84	74.00	-21.16	68.52	-15.68	PK
* 2	11490	53.10	54.00	-0.90	50.38	2.72	AV
3	11490	68.11	74.00	-5.89	65.39	2.72	PK
4	17235	63.02	68.20	-5.18	57.52	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

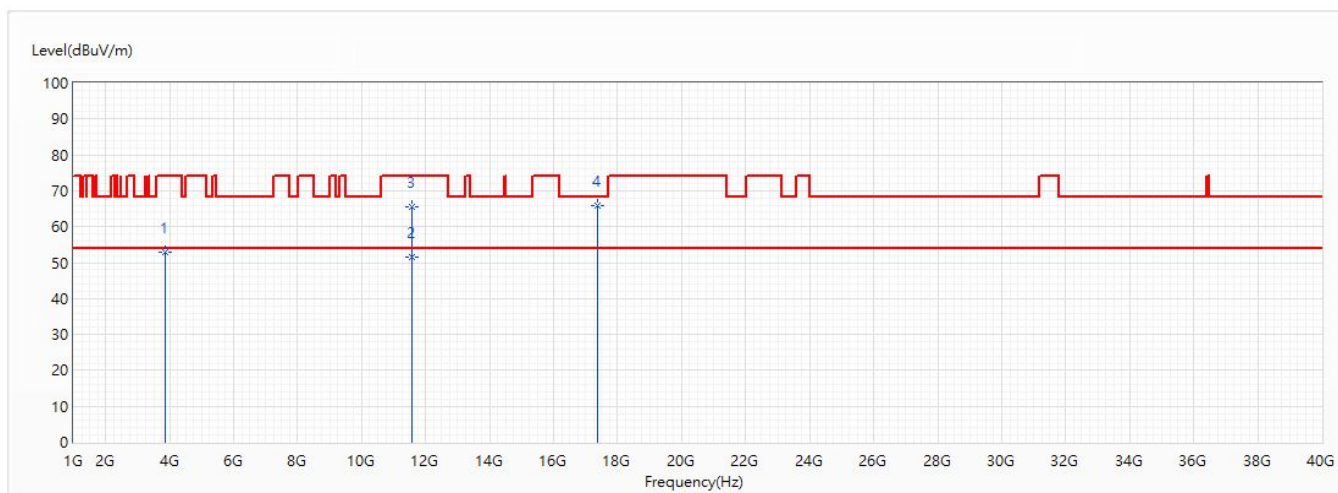


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.87	74.00	-21.13	68.48	-15.61	PK
2	11570	51.46	54.00	-2.54	48.71	2.75	AV
3	11570	65.63	74.00	-8.37	62.88	2.75	PK
* 4	17355	65.80	68.20	-2.40	59.89	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

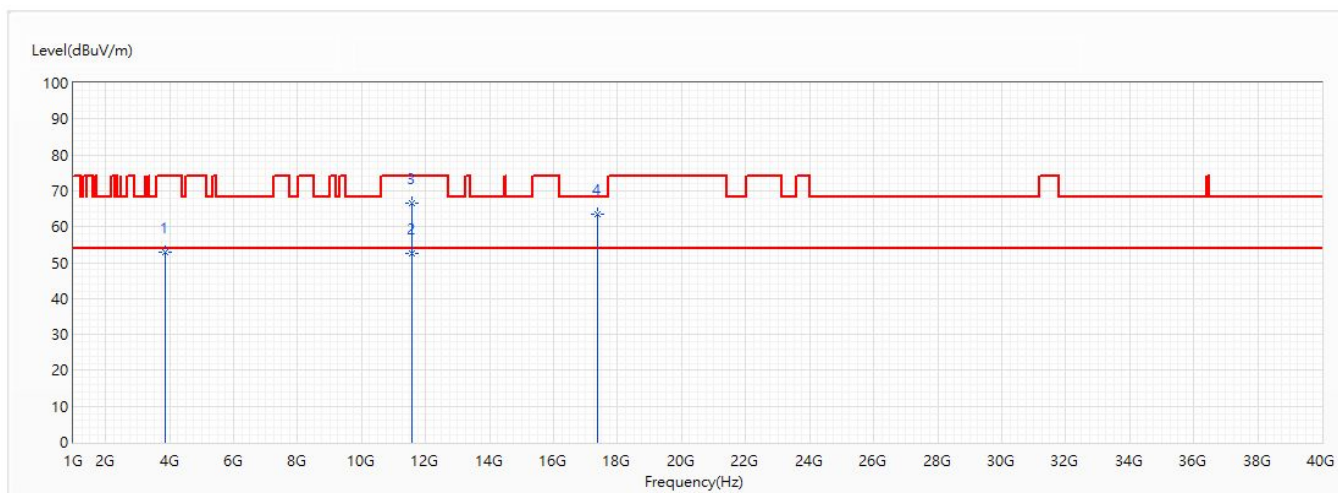


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.78	74.00	-21.22	68.39	-15.61	PK
* 2	11570	52.42	54.00	-1.58	49.67	2.75	AV
3	11570	66.51	74.00	-7.49	63.76	2.75	PK
4	17355	63.39	68.20	-4.81	57.48	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

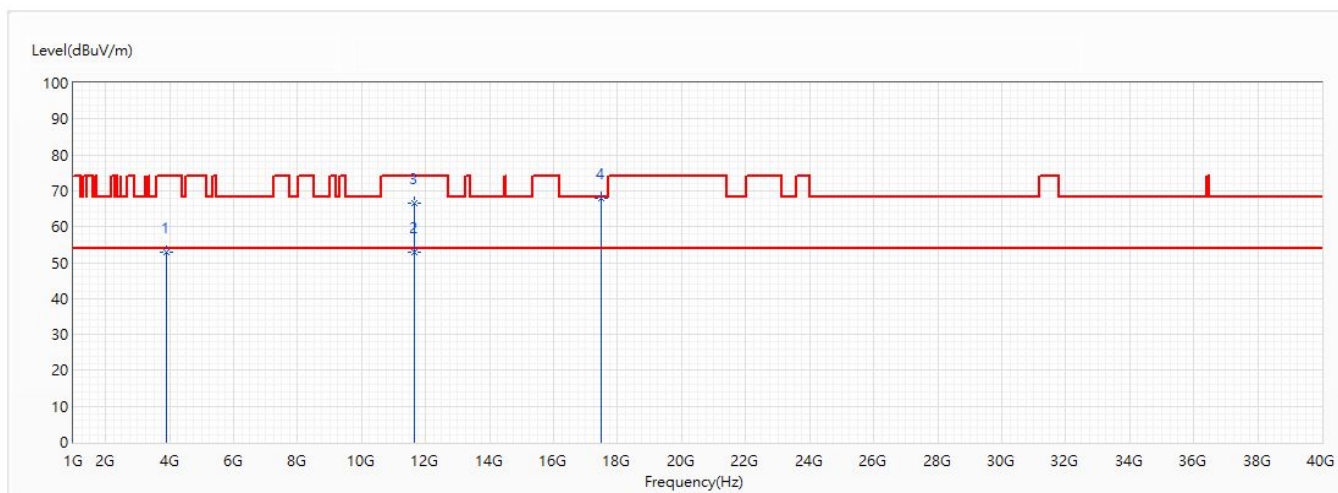


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.88	74.00	-21.12	68.39	-15.51	PK
2	11650	52.81	54.00	-1.19	50.05	2.76	AV
3	11650	66.55	74.00	-7.45	63.79	2.76	PK
* 4	17475	68.03	68.20	-0.17	61.70	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

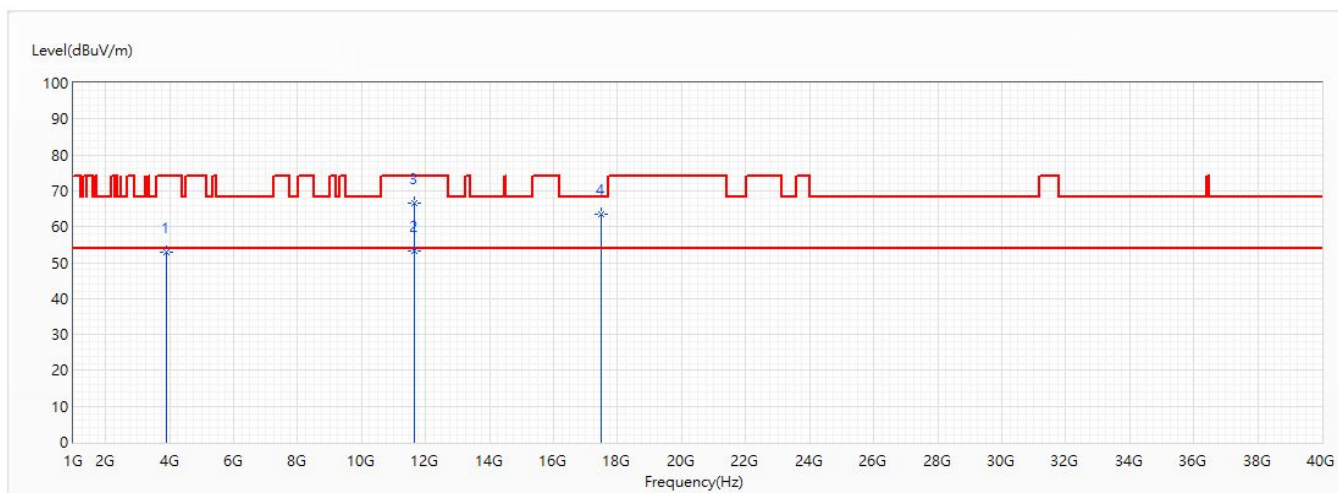


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.86	74.00	-21.14	68.37	-15.51	PK
* 2	11650	53.41	54.00	-0.59	50.65	2.76	AV
3	11650	66.40	74.00	-7.60	63.64	2.76	PK
4	17475	63.53	68.20	-4.67	57.20	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

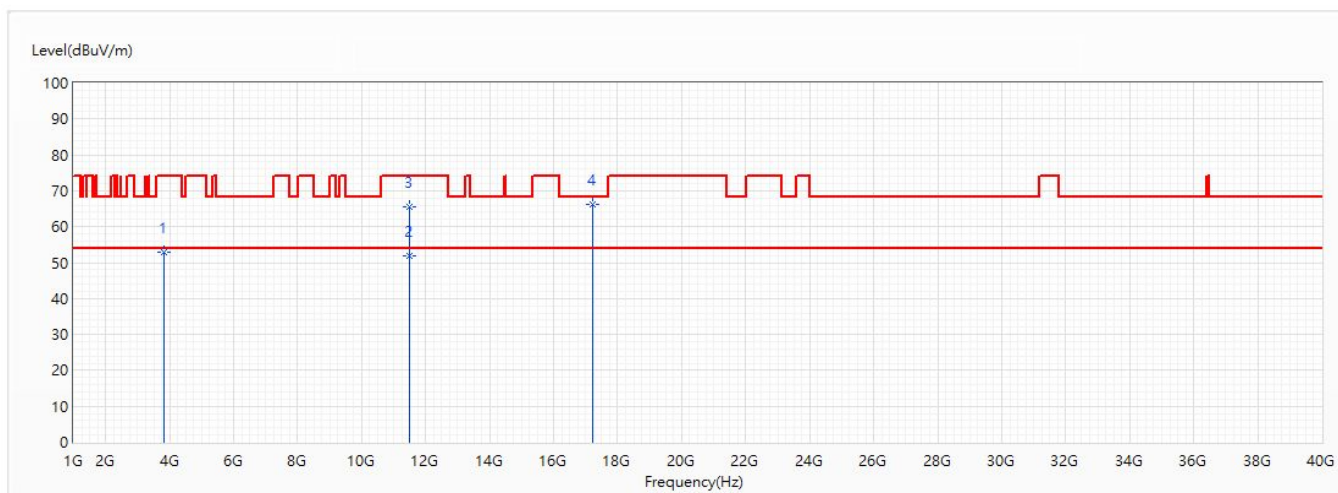


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	52.99	74.00	-21.01	68.67	-15.68	PK
2	11490	51.72	54.00	-2.28	49.00	2.72	AV
3	11490	65.67	74.00	-8.33	62.95	2.72	PK
* 4	17235	66.14	68.20	-2.06	60.64	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

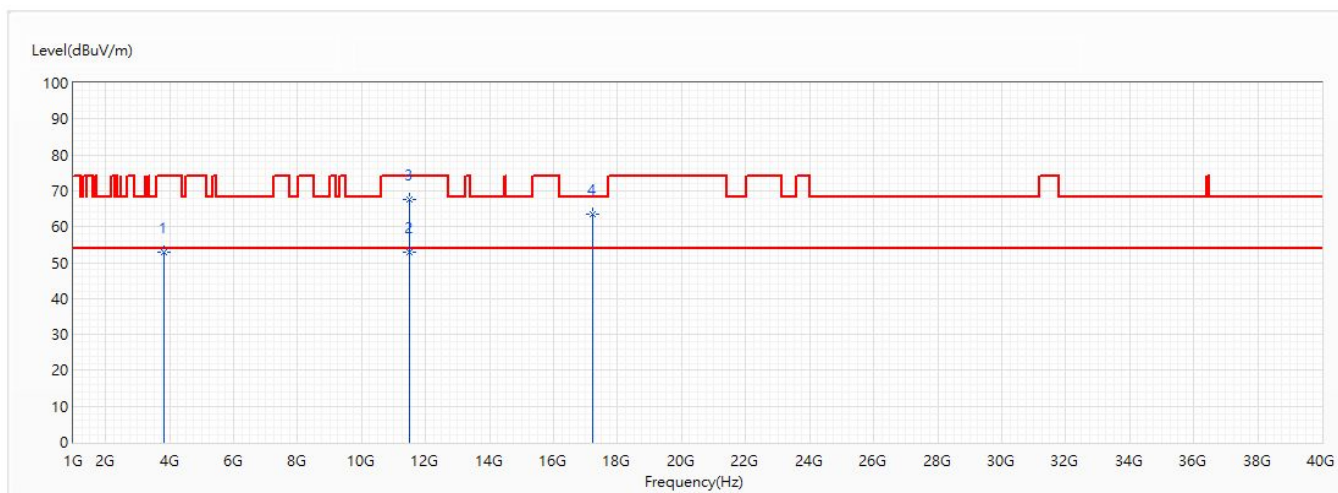


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	52.94	74.00	-21.06	68.62	-15.68	PK
* 2	11490	53.02	54.00	-0.98	50.30	2.72	AV
3	11490	67.72	74.00	-6.28	65.00	2.72	PK
4	17235	63.58	68.20	-4.62	58.08	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

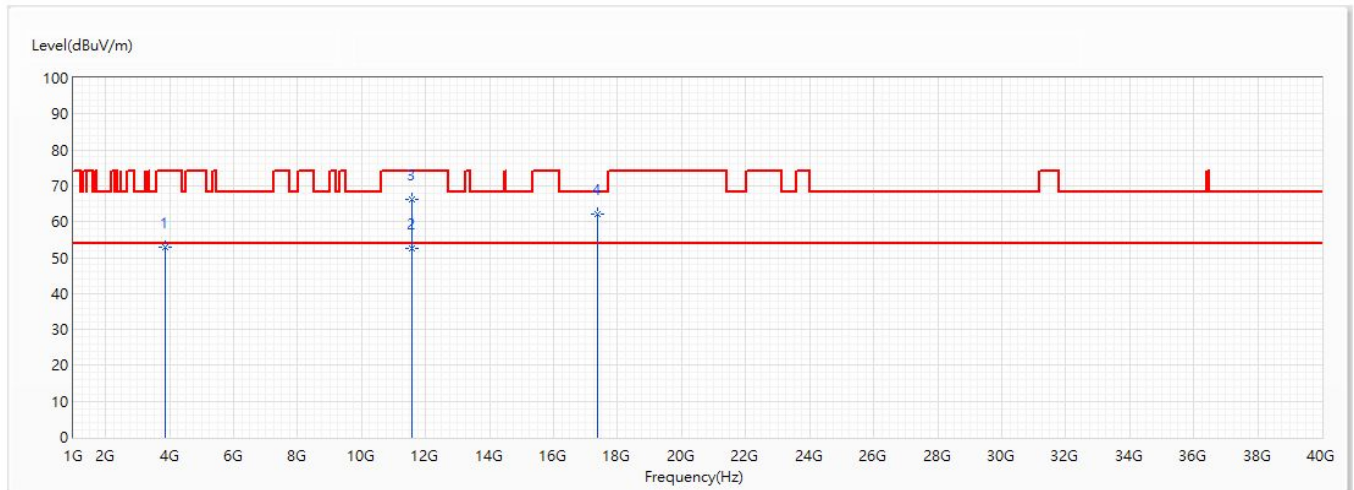


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.81	74.00	-21.19	68.42	-15.61	PK
* 2	11570	52.51	54.00	-1.49	49.76	2.75	AV
3	11570	66.21	74.00	-7.79	63.46	2.75	PK
4	17355	62.25	68.20	-5.95	56.34	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

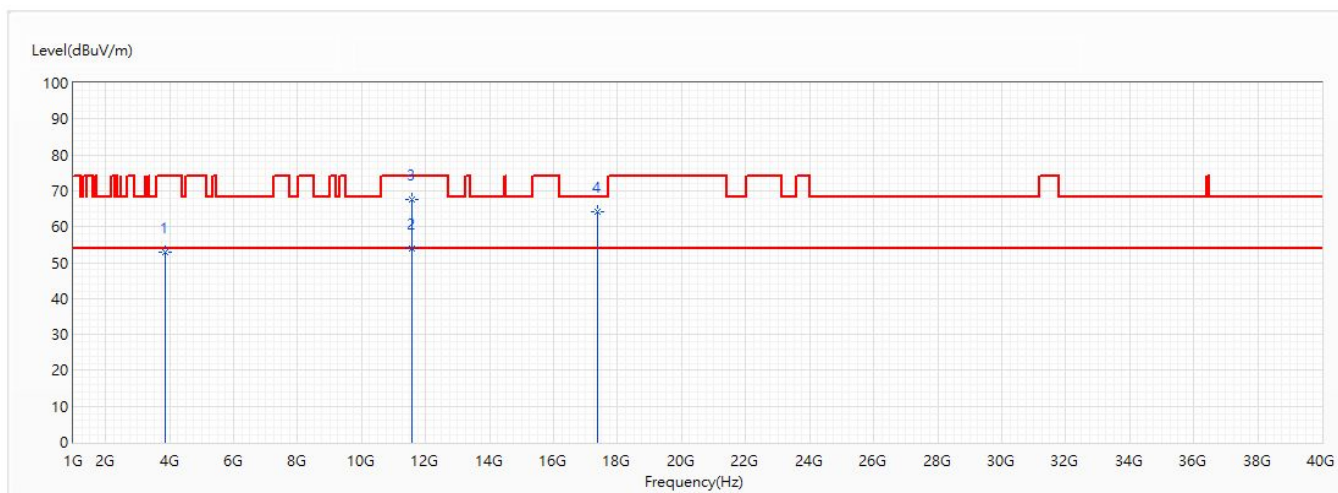


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.86	74.00	-21.14	68.47	-15.61	PK
* 2	11570	53.81	54.00	-0.19	51.06	2.75	AV
3	11570	67.49	74.00	-6.51	64.74	2.75	PK
4	17355	64.12	68.20	-4.08	58.21	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

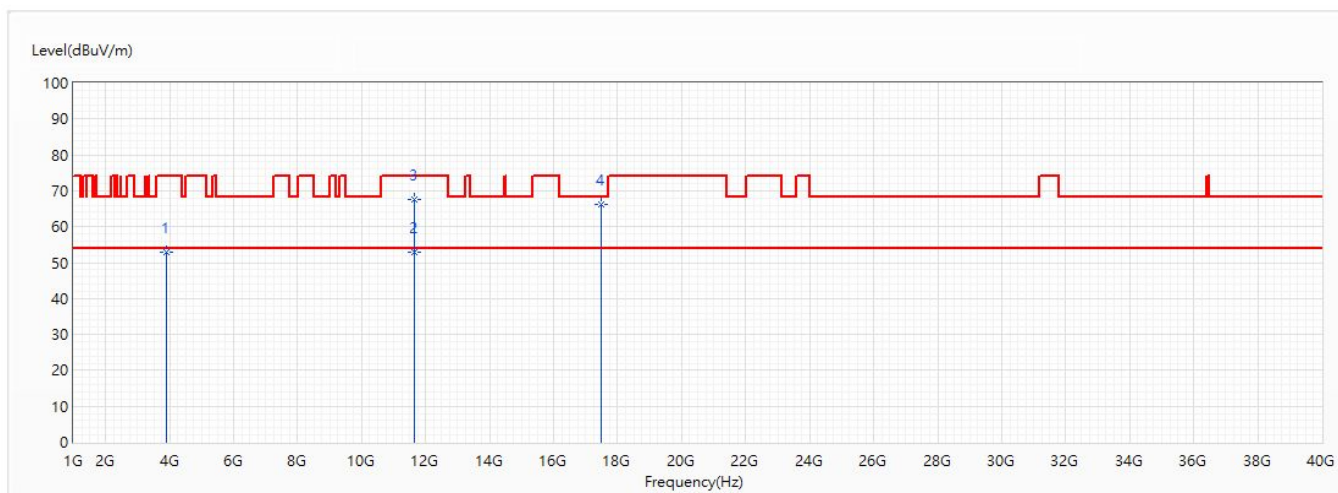


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.92	74.00	-21.08	68.43	-15.51	PK
* 2	11650	52.91	54.00	-1.09	50.15	2.76	AV
3	11650	67.54	74.00	-6.46	64.78	2.76	PK
4	17475	66.38	68.20	-1.82	60.05	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

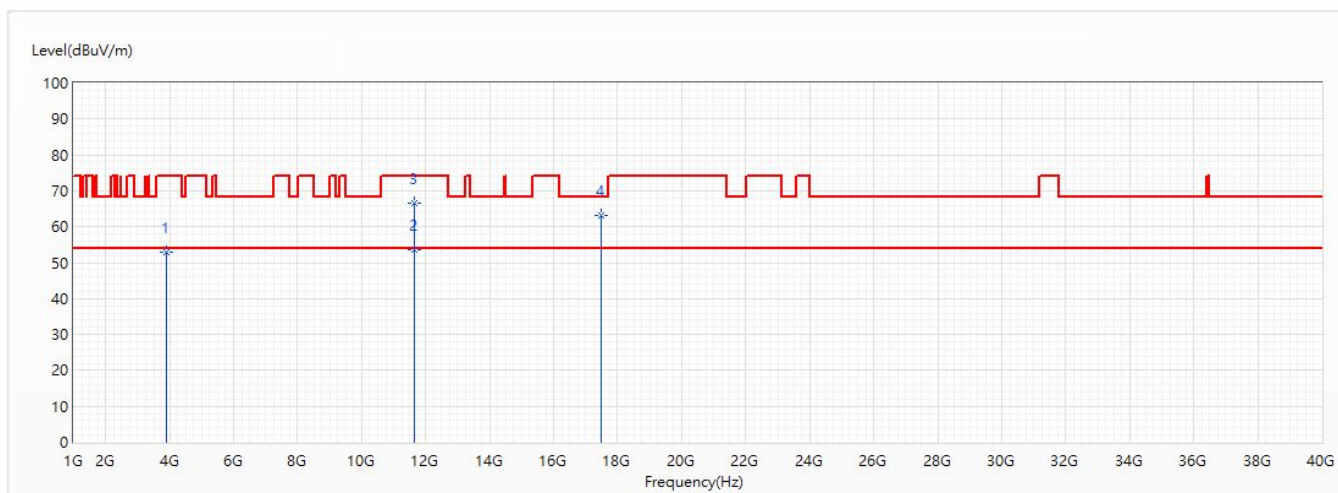


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.96	74.00	-21.04	68.47	-15.51	PK
* 2	11650	53.48	54.00	-0.52	50.72	2.76	AV
3	11650	66.41	74.00	-7.59	63.65	2.76	PK
4	17475	63.01	68.20	-5.19	56.68	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	54.0

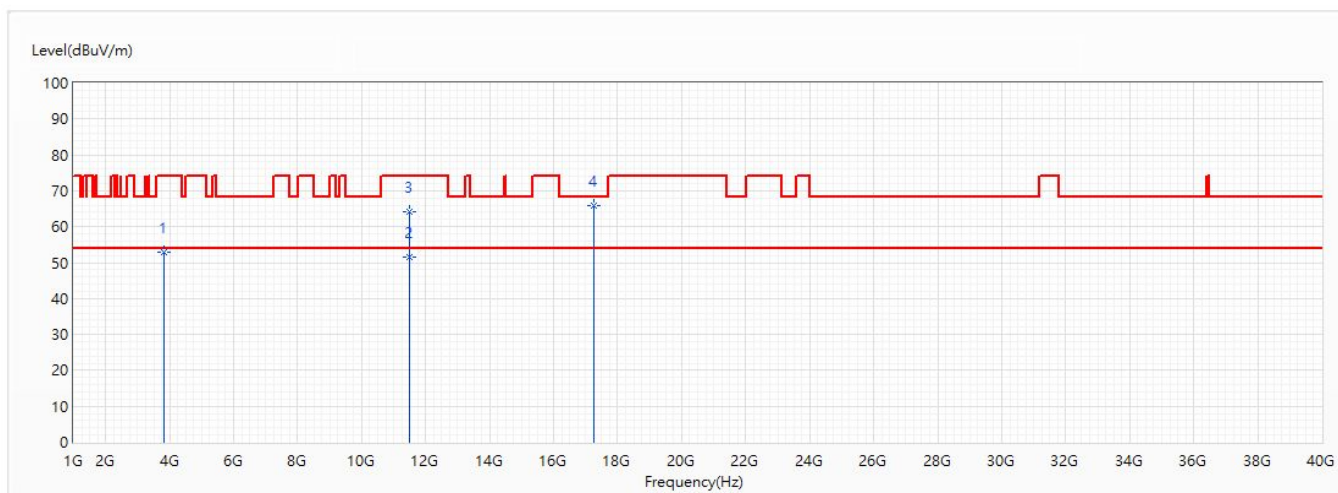


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3836.667	52.87	74.00	-21.13	68.54	-15.67	PK
2	11510	51.38	54.00	-2.62	48.65	2.73	AV
3	11510	64.30	74.00	-9.70	61.57	2.73	PK
* 4	17265	65.92	68.20	-2.28	60.33	5.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	54.0

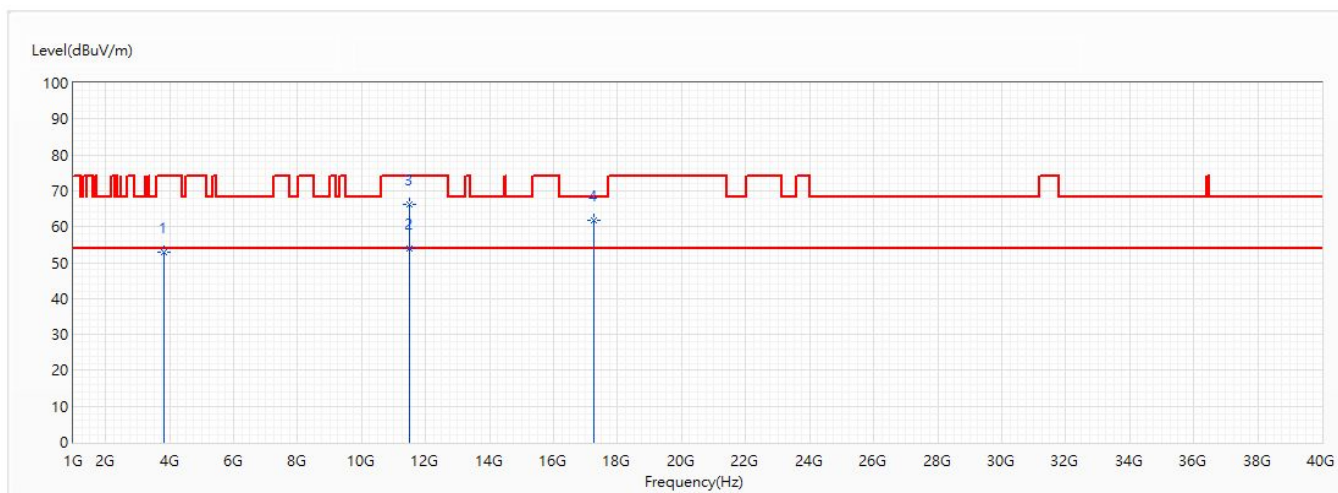


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3836.667	52.82	74.00	-21.18	68.49	-15.67	PK
* 2	11510	53.84	54.00	-0.16	51.11	2.73	AV
3	11510	66.27	74.00	-7.73	63.54	2.73	PK
4	17265	61.80	68.20	-6.40	56.21	5.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	54.0

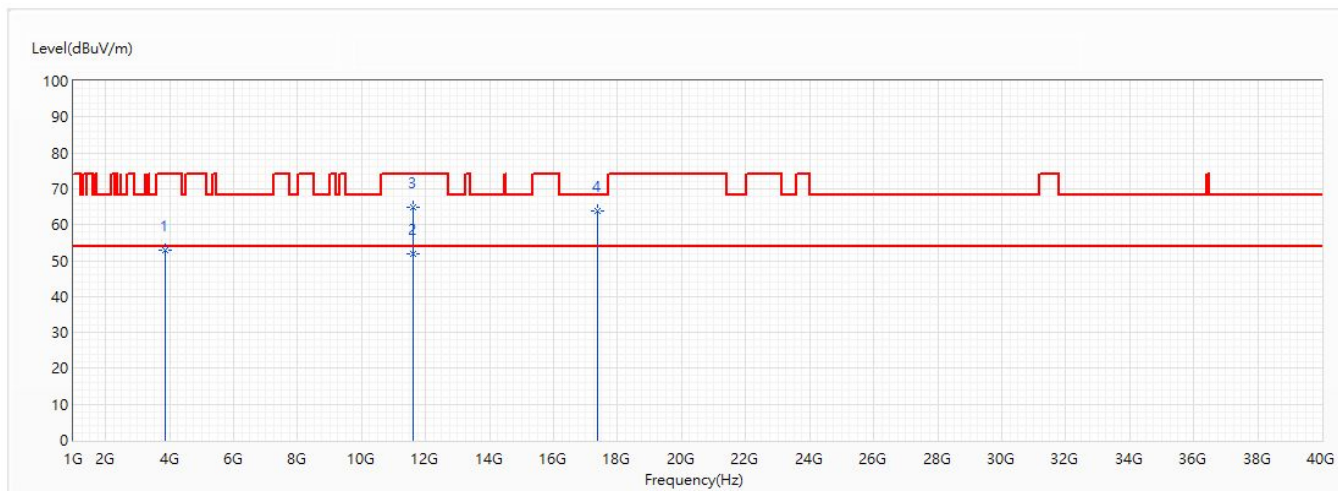


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3863.333	52.85	74.00	-21.15	68.42	-15.57	PK
* 2	11590	51.93	54.00	-2.07	49.18	2.75	AV
3	11590	64.86	74.00	-9.14	62.11	2.75	PK
4	17385	63.80	68.20	-4.40	57.78	6.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	54.0

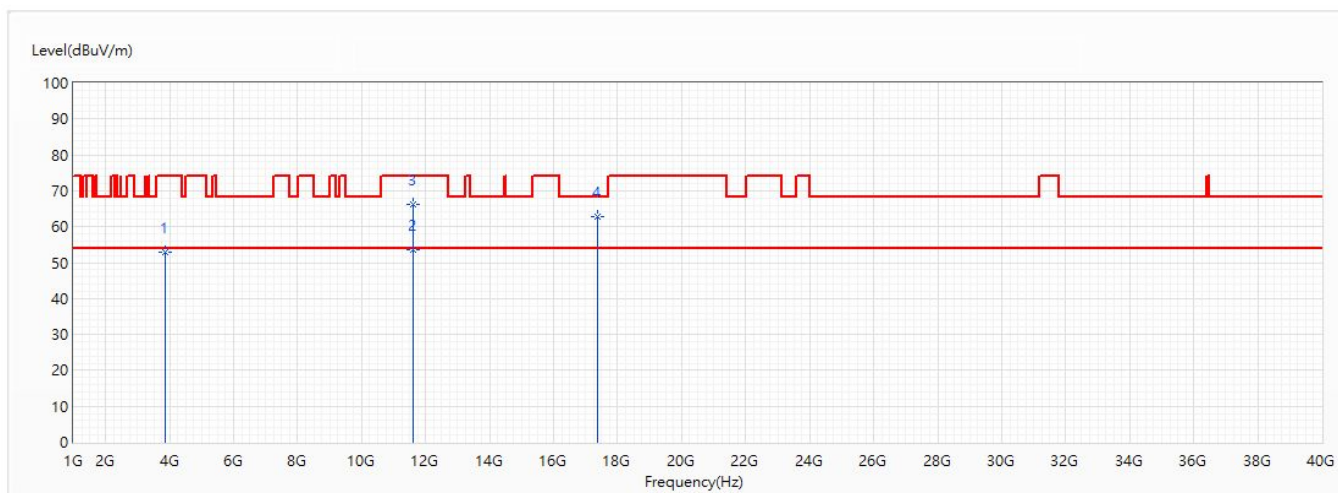


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3863.333	52.98	74.00	-21.02	68.55	-15.57	PK
* 2	11590	53.60	54.00	-0.40	50.85	2.75	AV
3	11590	66.34	74.00	-7.66	63.59	2.75	PK
4	17385	62.78	68.20	-5.42	56.76	6.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	54.0

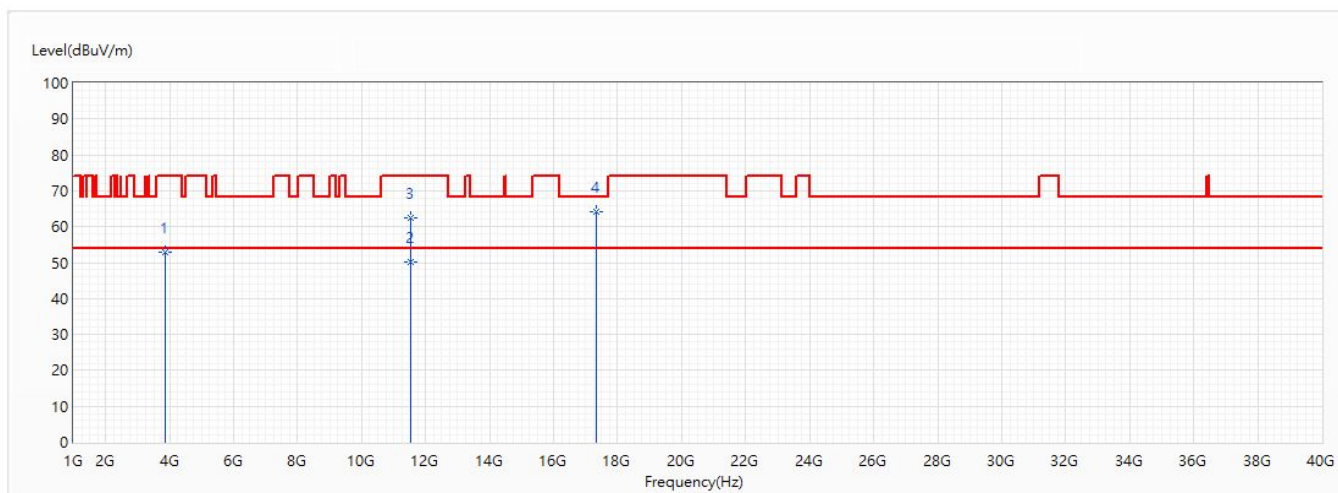


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3850	52.87	74.00	-21.13	68.49	-15.62	PK
* 2	11550	50.28	54.00	-3.72	47.54	2.74	AV
3	11550	62.59	74.00	-11.41	59.85	2.74	PK
4	17325	64.07	68.20	-4.13	58.26	5.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	54.0

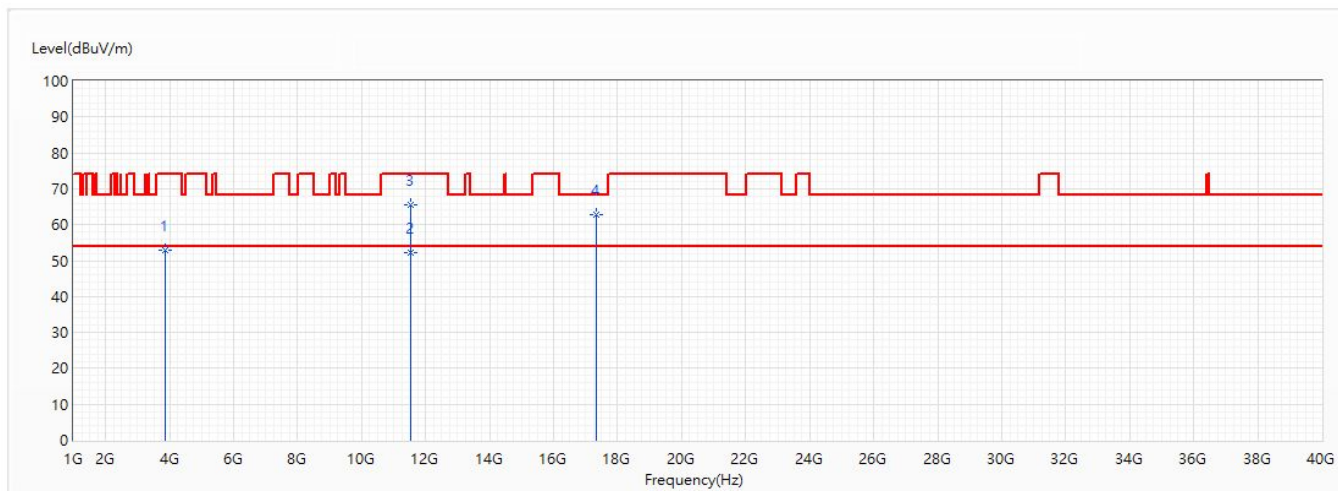


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3850	52.79	74.00	-21.21	68.41	-15.62	PK
* 2	11550	52.38	54.00	-1.62	49.64	2.74	AV
3	11550	65.47	74.00	-8.53	62.73	2.74	PK
4	17325	62.90	68.20	-5.30	57.09	5.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

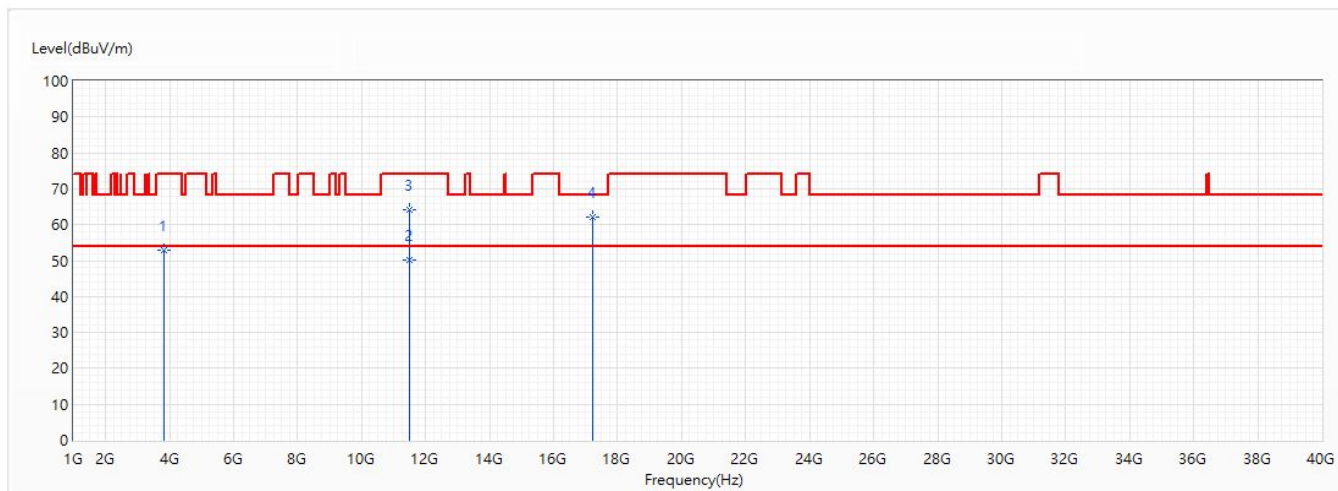


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	52.85	74.00	-21.15	68.53	-15.68	PK
* 2	11490	50.18	54.00	-3.82	47.46	2.72	AV
3	11490	64.14	74.00	-9.86	61.42	2.72	PK
4	17235	62.20	68.20	-6.00	56.70	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	54.0

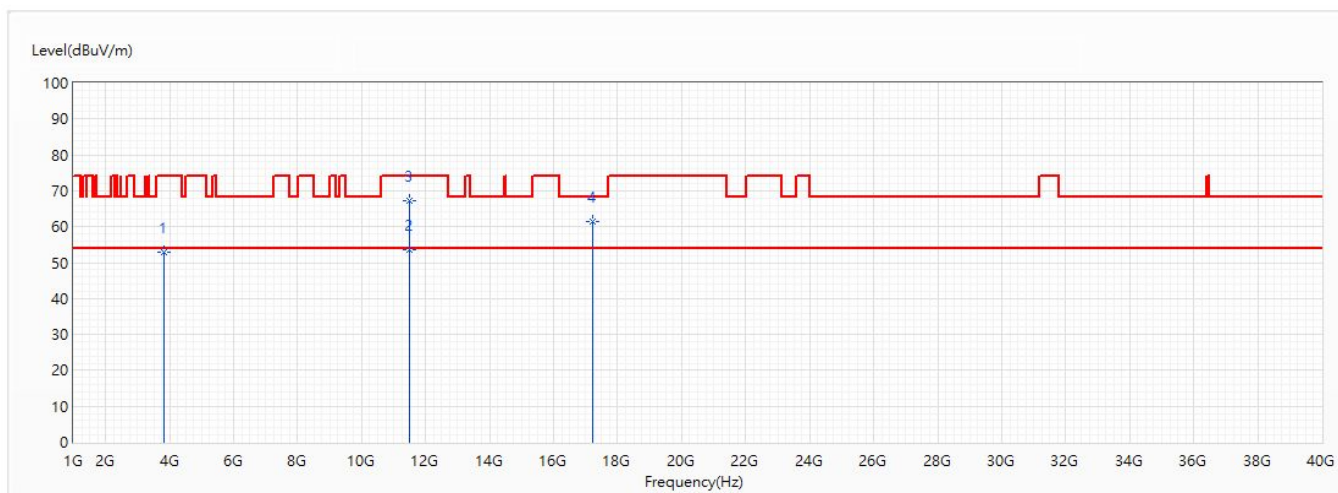


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3830	52.91	74.00	-21.09	68.59	-15.68	PK
* 2	11490	53.75	54.00	-0.25	51.03	2.72	AV
3	11490	67.10	74.00	-6.90	64.38	2.72	PK
4	17235	61.53	68.20	-6.67	56.03	5.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

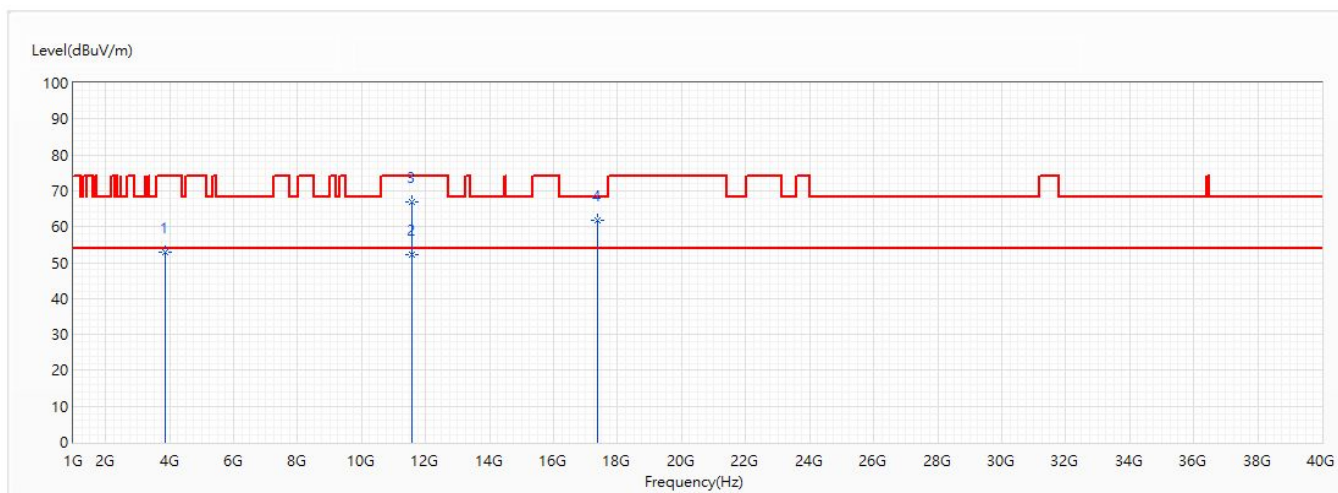


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.82	74.00	-21.18	68.43	-15.61	PK
* 2	11570	52.18	54.00	-1.82	49.43	2.75	AV
3	11570	66.95	74.00	-7.05	64.20	2.75	PK
4	17355	61.90	68.20	-6.30	55.99	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	54.0

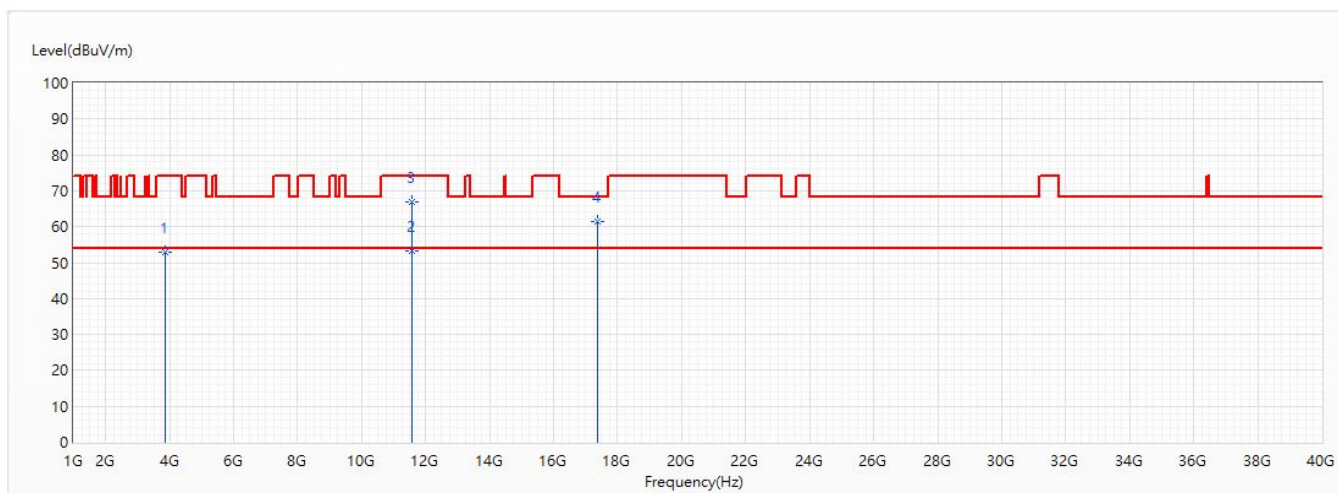


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3856.667	52.76	74.00	-21.24	68.37	-15.61	PK
* 2	11570	53.27	54.00	-0.73	50.52	2.75	AV
3	11570	67.02	74.00	-6.98	64.27	2.75	PK
4	17355	61.60	68.20	-6.60	55.69	5.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

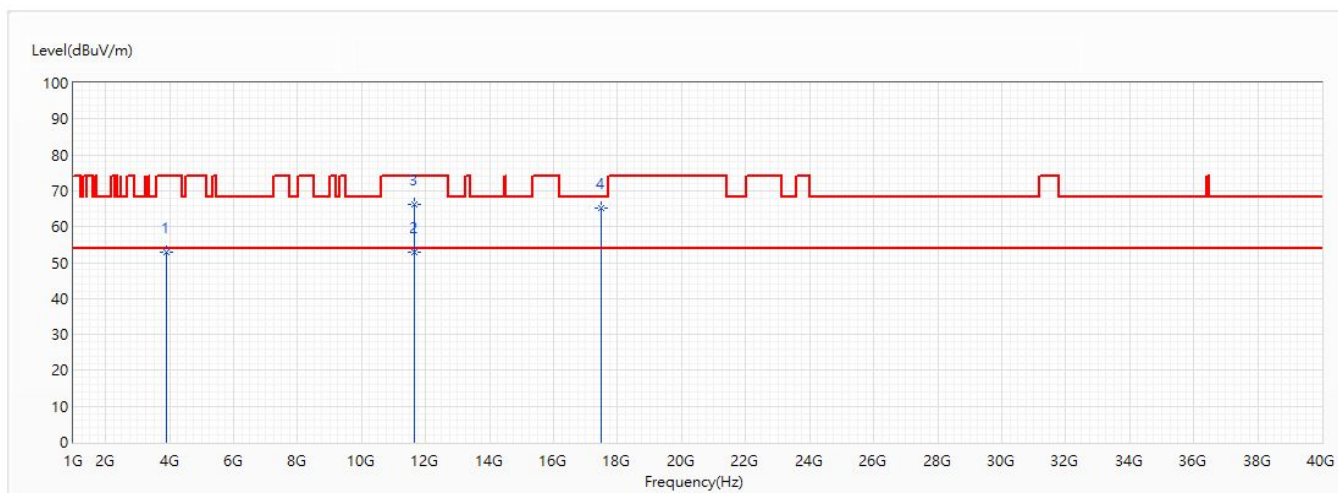


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.87	74.00	-21.13	68.38	-15.51	PK
* 2	11650	52.88	54.00	-1.12	50.12	2.76	AV
3	11650	66.35	74.00	-7.65	63.59	2.76	PK
4	17475	65.13	68.20	-3.07	58.80	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	54.0

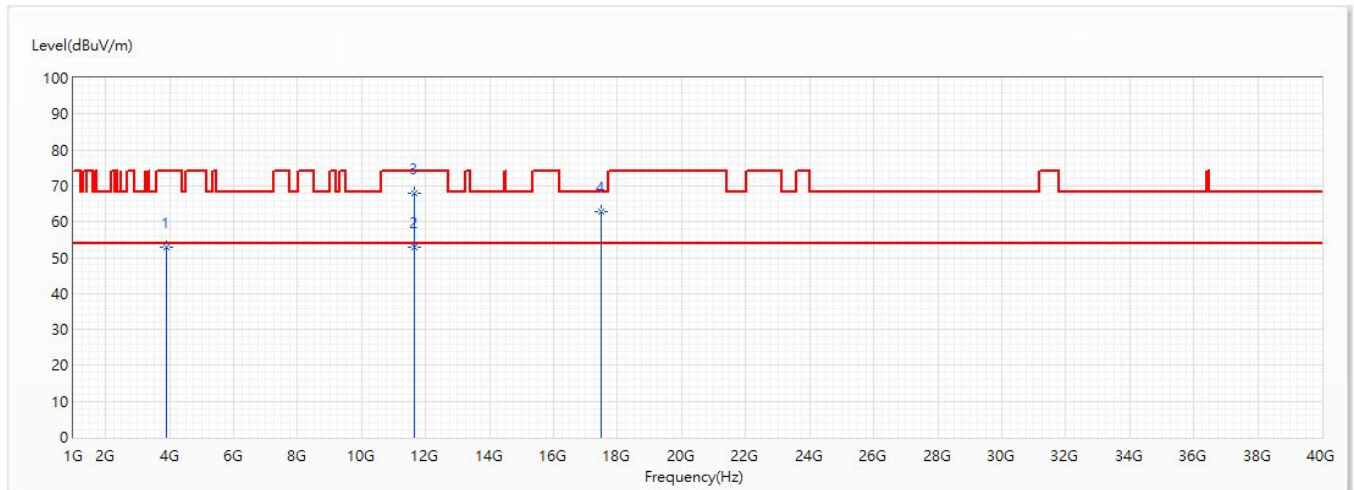


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3883.333	52.83	74.00	-21.17	68.34	-15.51	PK
* 2	11650	53.07	54.00	-0.93	50.31	2.76	AV
3	11650	68.04	74.00	-5.96	65.28	2.76	PK
4	17475	62.63	68.20	-5.57	56.30	6.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	54.0

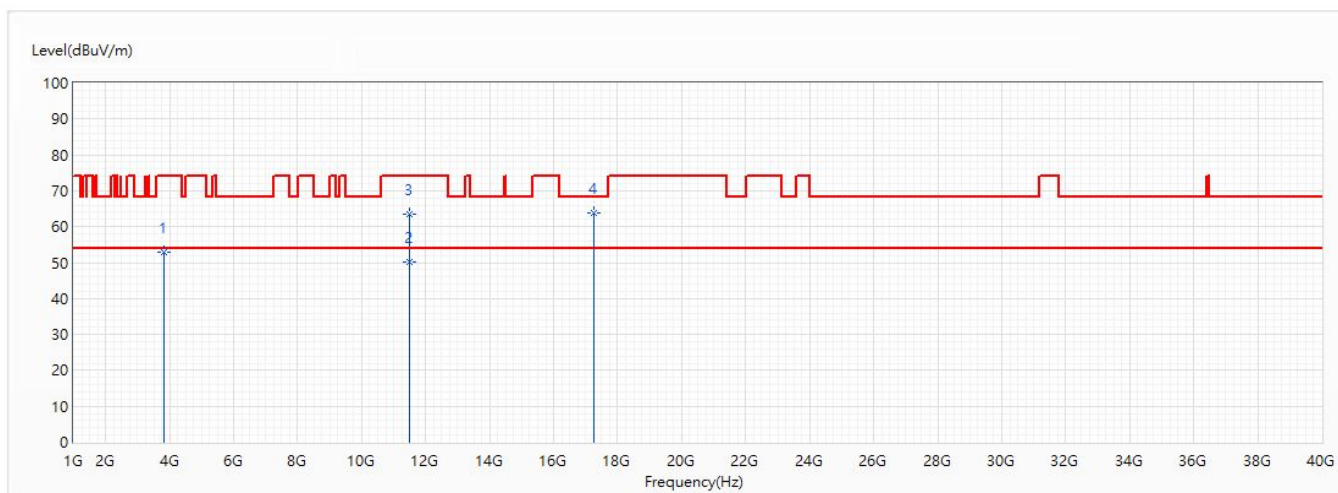


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3836.667	52.91	74.00	-21.09	68.58	-15.67	PK
* 2	11510	50.19	54.00	-3.81	47.46	2.73	AV
3	11510	63.62	74.00	-10.38	60.89	2.73	PK
4	17265	63.75	68.20	-4.45	58.16	5.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	54.0

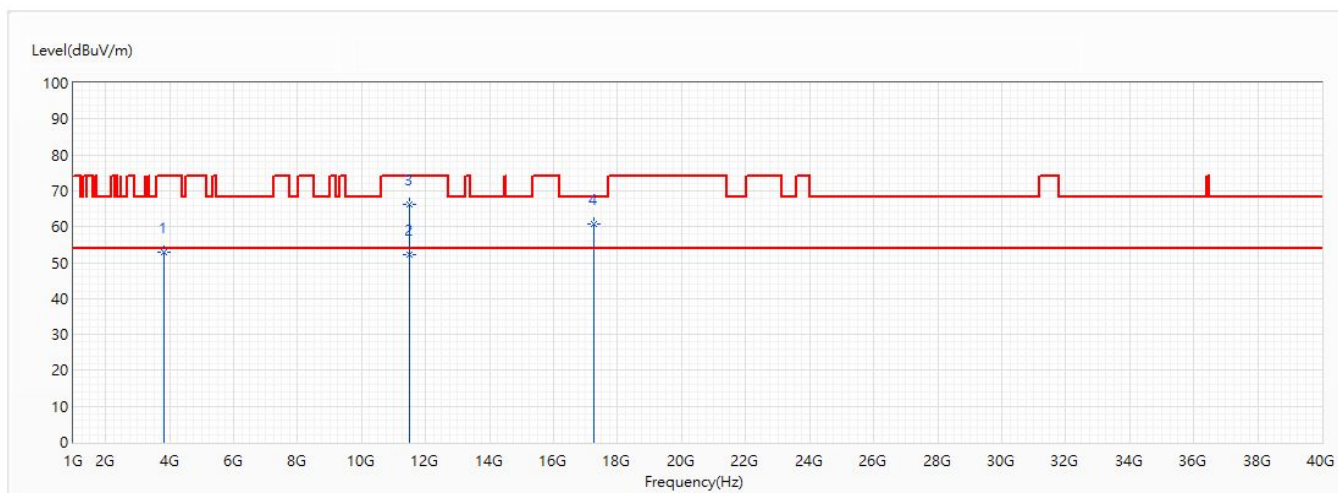


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3836.667	52.96	74.00	-21.04	68.63	-15.67	PK
* 2	11510	52.37	54.00	-1.63	49.64	2.73	AV
3	11510	66.24	74.00	-7.76	63.51	2.73	PK
4	17265	60.85	68.20	-7.35	55.26	5.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	54.0

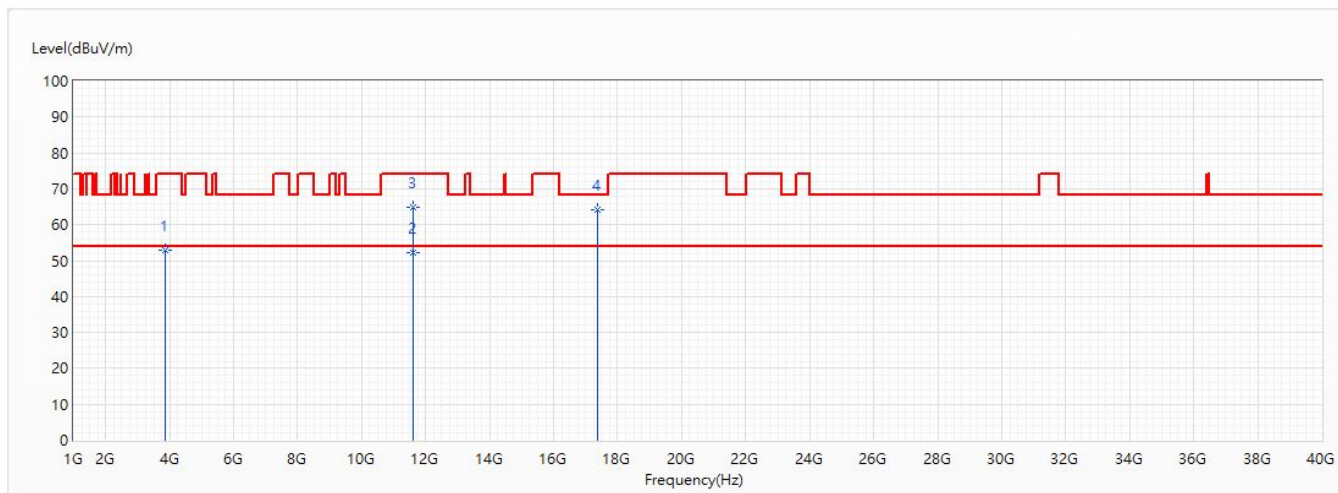


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3863.333	52.79	74.00	-21.21	68.36	-15.57	PK
* 2	11590	52.07	54.00	-1.93	49.32	2.75	AV
3	11590	64.92	74.00	-9.08	62.17	2.75	PK
4	17385	64.14	68.20	-4.06	58.12	6.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	54.0

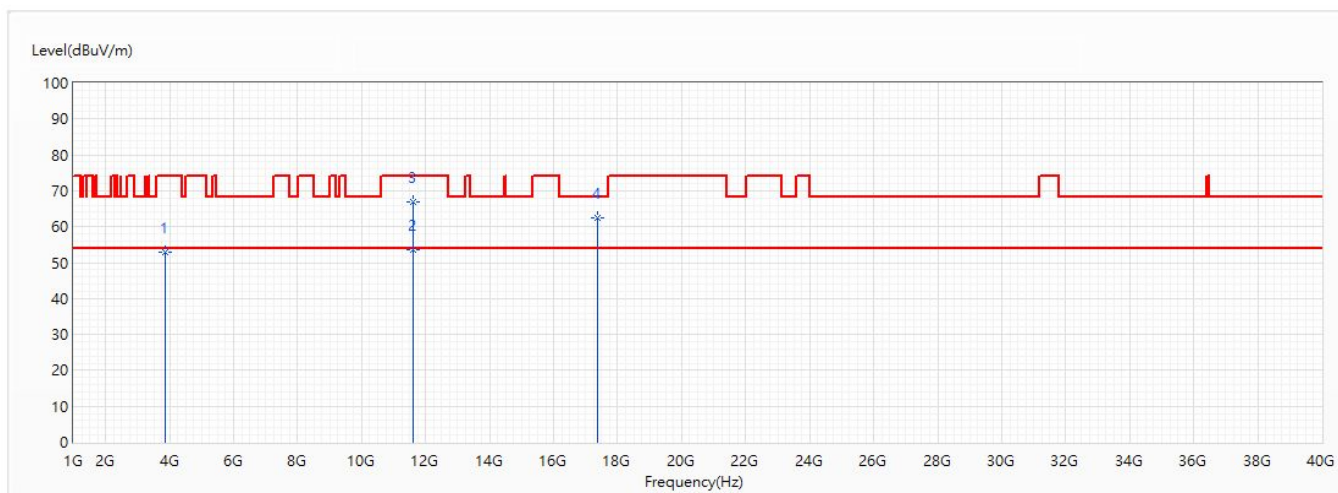


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3863.333	52.86	74.00	-21.14	68.43	-15.57	PK
* 2	11590	53.71	54.00	-0.29	50.96	2.75	AV
3	11590	66.89	74.00	-7.11	64.14	2.75	PK
4	17385	62.50	68.20	-5.70	56.48	6.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 18GHz were not included is because their levels are lower than 20dB from limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/25
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	54.0

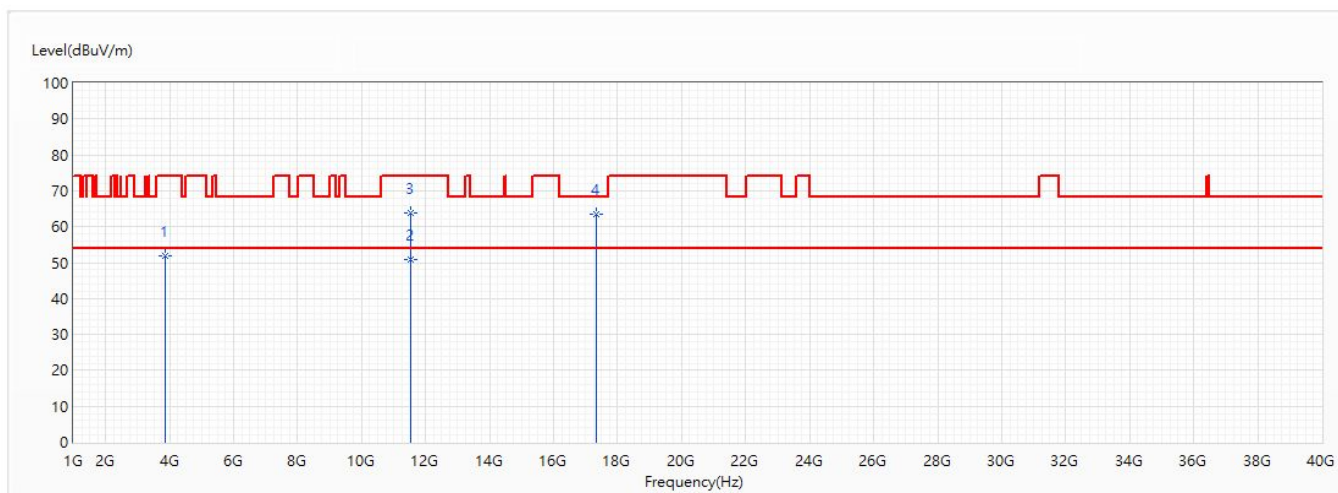


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3850	51.72	74.00	-22.28	67.34	-15.62	PK
* 2	11550	50.96	54.00	-3.04	48.22	2.74	AV
3	11550	63.70	74.00	-10.30	60.96	2.74	PK
4	17325	63.56	68.20	-4.64	57.75	5.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/25
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	54.0

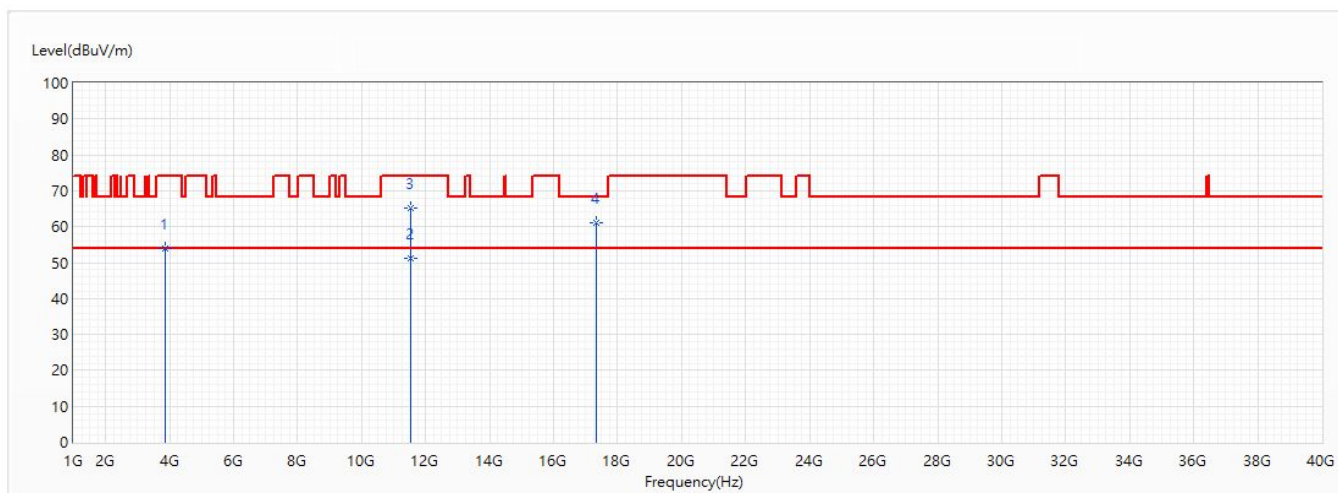

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3850	53.89	74.00	-20.11	69.51	-15.62	PK
* 2	11550	51.34	54.00	-2.66	48.60	2.74	AV
3	11550	65.02	74.00	-8.98	62.28	2.74	PK
4	17325	61.21	68.20	-6.99	55.40	5.81	PK


Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

7. Band Edge

7.1. Test Setup

RF Radiated Measurement:

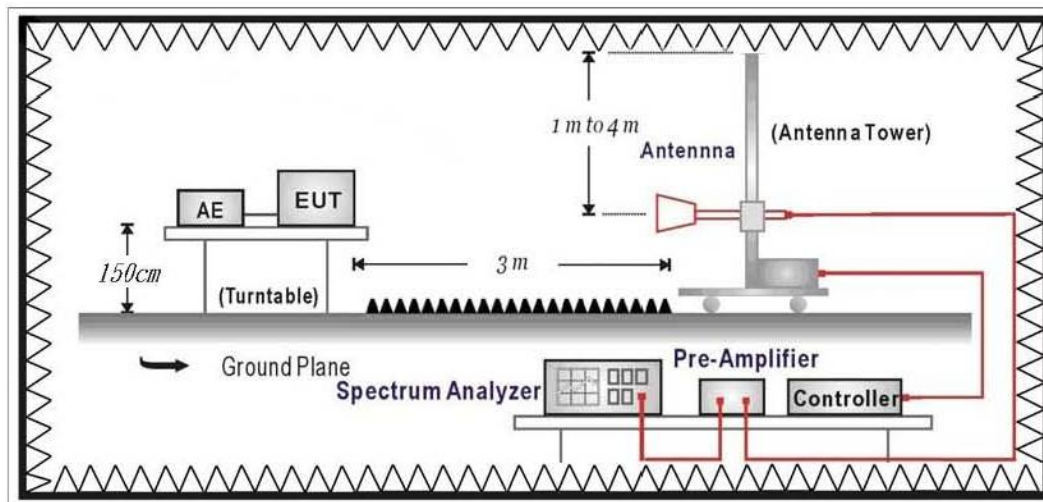

7.2. Limits

➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ **Unwanted Emission out of the restricted bands Limits**

FCC Part 15 Subpart E Paragraph 15.407(b) Limits		
Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5850	-27 (Note1)	68.3
	-17 (Note2)	78.3


4. For transmitters operating in the 5.725-5.85 GHz band

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the

band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2019 with antenna gain greater than 10 dBi may demonstrate

compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

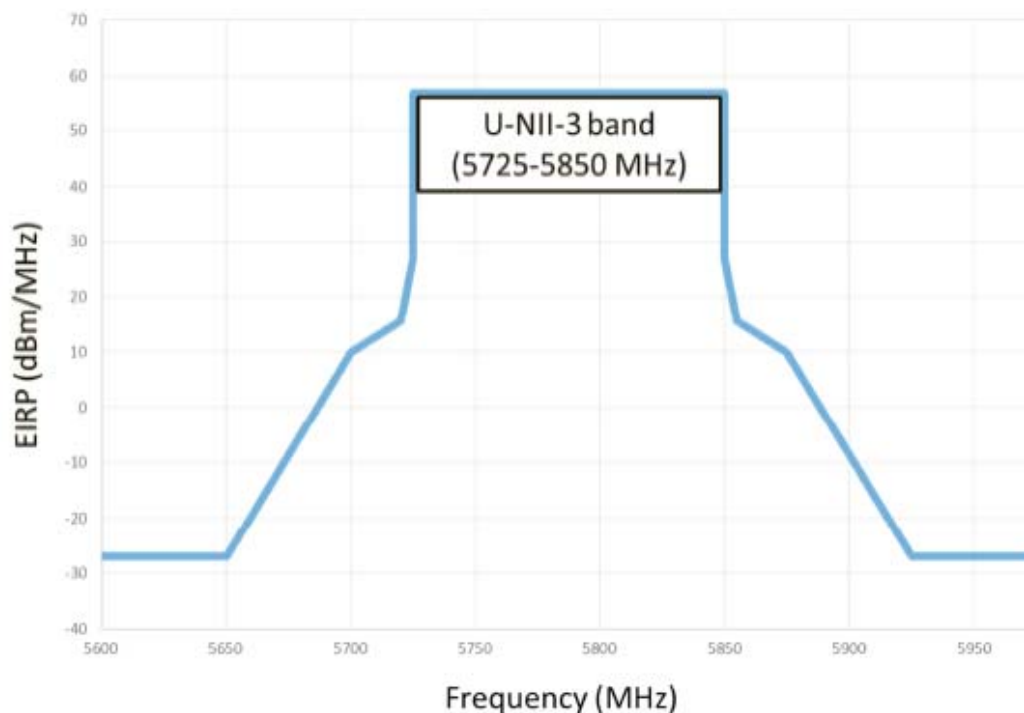

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.

$$3. \quad \mu\text{V/m} = \frac{1000000 \sqrt{30 \times EIRP}}{3}, \quad \text{RF Voltage (dBuV/m)} = 20 \log \text{RF Voltage (}\mu\text{V/m)}$$

7.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

7.4. Test Result

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

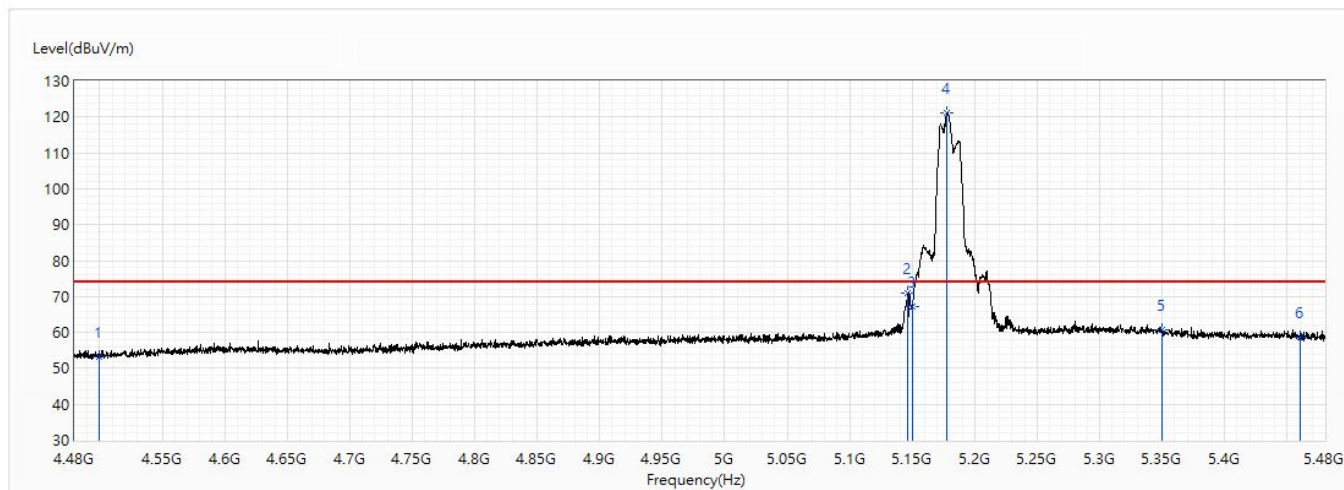


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.10	74.00	-20.90	29.43	23.67	PK
2	5146.75	71.12	74.00	-2.88	46.68	24.44	PK
3	5150	67.15	74.00	-6.85	42.71	24.44	PK
! 4	5177.75	121.12	74.00	47.12	96.62	24.50	PK
5	5350	60.59	74.00	-13.41	35.79	24.80	PK
6	5460	58.55	74.00	-15.45	33.56	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

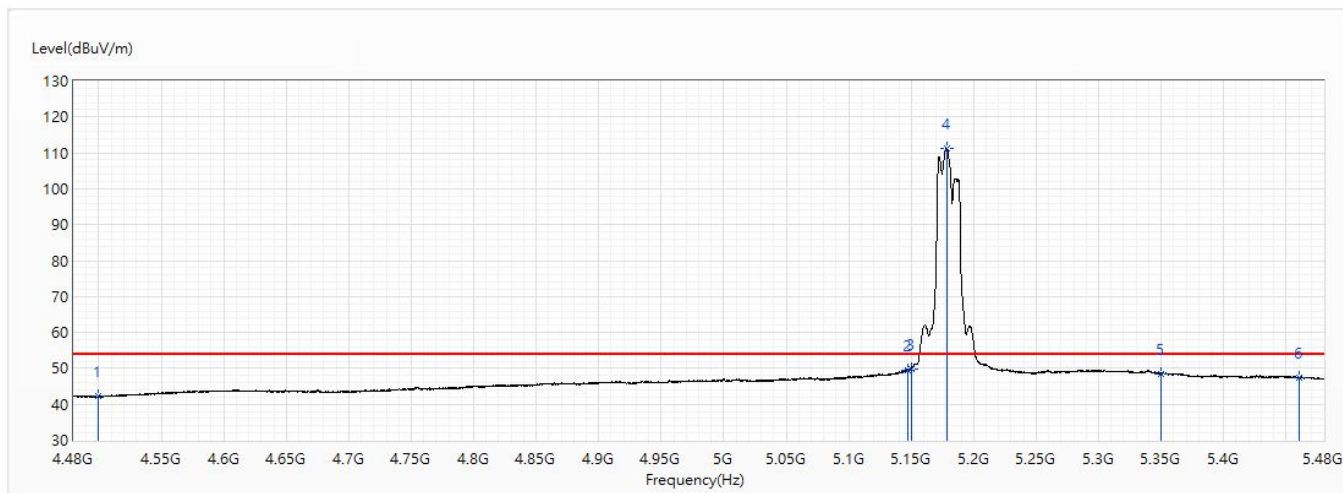


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.18	54.00	-11.82	18.51	23.67	AV
2	5147.25	49.52	54.00	-4.48	25.08	24.44	AV
3	5150	49.96	54.00	-4.04	25.52	24.44	AV
! 4	5178.25	111.28	54.00	57.28	86.78	24.50	AV
5	5350	48.56	54.00	-5.44	23.76	24.80	AV
6	5460	47.38	54.00	-6.62	22.39	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

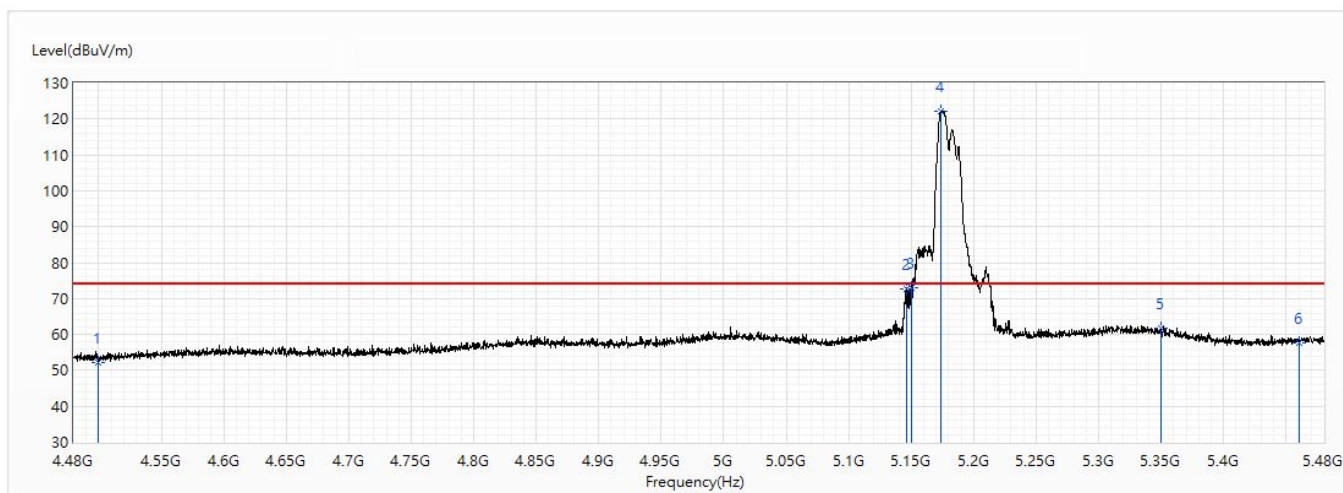


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.15	74.00	-21.85	28.48	23.67	PK
2	5146	72.70	74.00	-1.30	48.26	24.44	PK
3	5150	72.96	74.00	-1.04	48.52	24.44	PK
! 4	5174	122.15	74.00	48.15	97.67	24.48	PK
5	5350	61.59	74.00	-12.41	36.79	24.80	PK
6	5460	57.70	74.00	-16.30	32.71	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

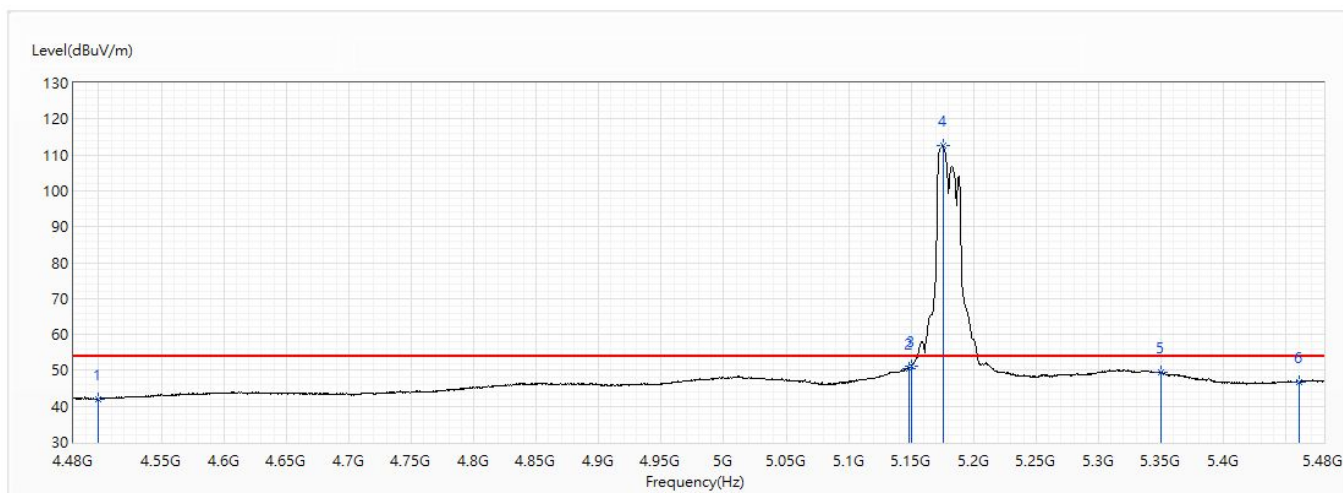


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.92	54.00	-12.08	18.25	23.67	AV
2	5148.5	50.62	54.00	-3.38	26.18	24.44	AV
3	5150	51.23	54.00	-2.77	26.79	24.44	AV
! 4	5175.5	112.55	54.00	58.55	88.05	24.50	AV
5	5350	49.30	54.00	-4.70	24.50	24.80	AV
6	5460	46.74	54.00	-7.26	21.75	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

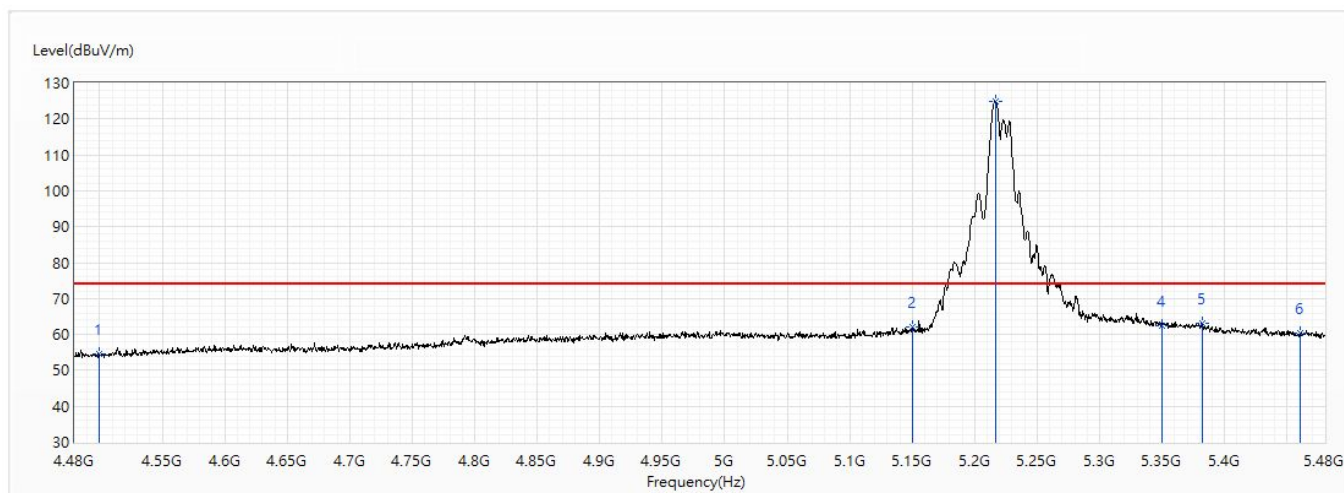


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.53	74.00	-19.47	30.86	23.67	PK
2	5150	62.15	74.00	-11.85	37.71	24.44	PK
! 3	5216.5	124.91	74.00	50.91	100.35	24.56	PK
4	5350	62.36	74.00	-11.64	37.56	24.80	PK
5	5382.5	63.24	74.00	-10.76	38.38	24.86	PK
6	5460	60.43	74.00	-13.57	35.44	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

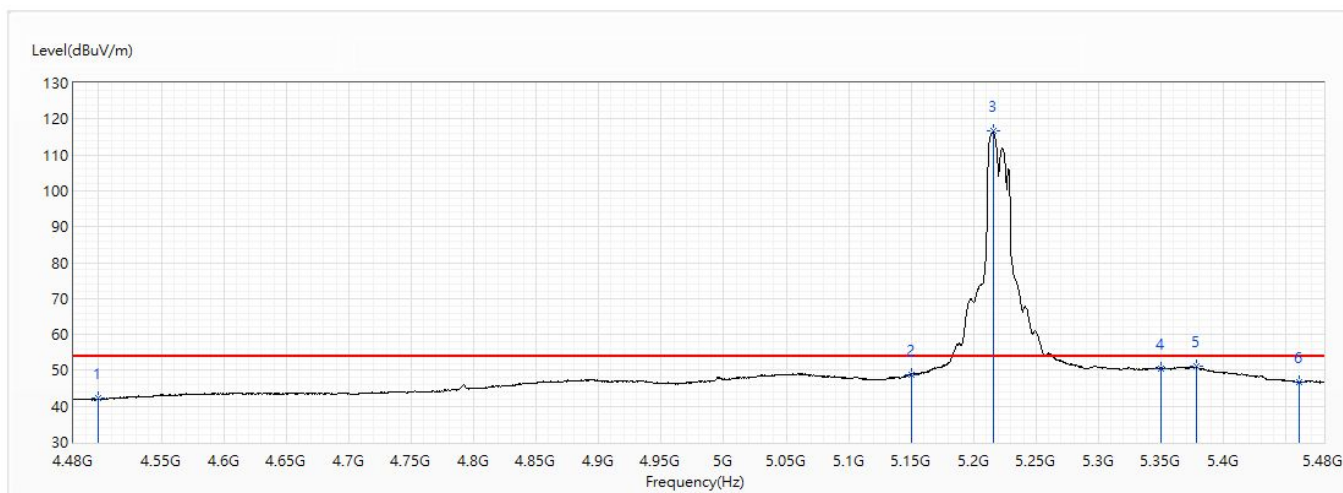


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.13	54.00	-11.87	18.46	23.67	AV
2	5150	48.93	54.00	-5.07	24.49	24.44	AV
! 3	5215.5	116.52	54.00	62.52	91.96	24.56	AV
4	5350	50.57	54.00	-3.43	25.77	24.80	AV
5	5378	51.01	54.00	-2.99	26.15	24.86	AV
6	5460	46.80	54.00	-7.20	21.81	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

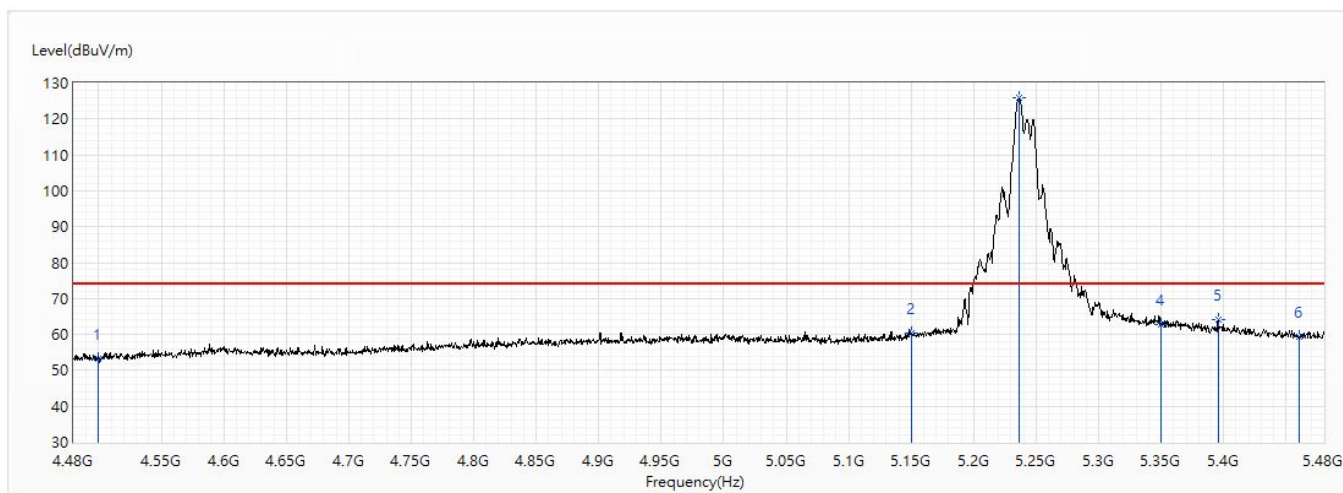


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.19	74.00	-20.81	29.52	23.67	PK
2	5150	60.26	74.00	-13.74	35.82	24.44	PK
! 3	5236	125.75	74.00	51.75	101.15	24.60	PK
4	5350	62.62	74.00	-11.38	37.82	24.80	PK
5	5395.5	64.16	74.00	-9.84	39.27	24.89	PK
6	5460	59.22	74.00	-14.78	34.23	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

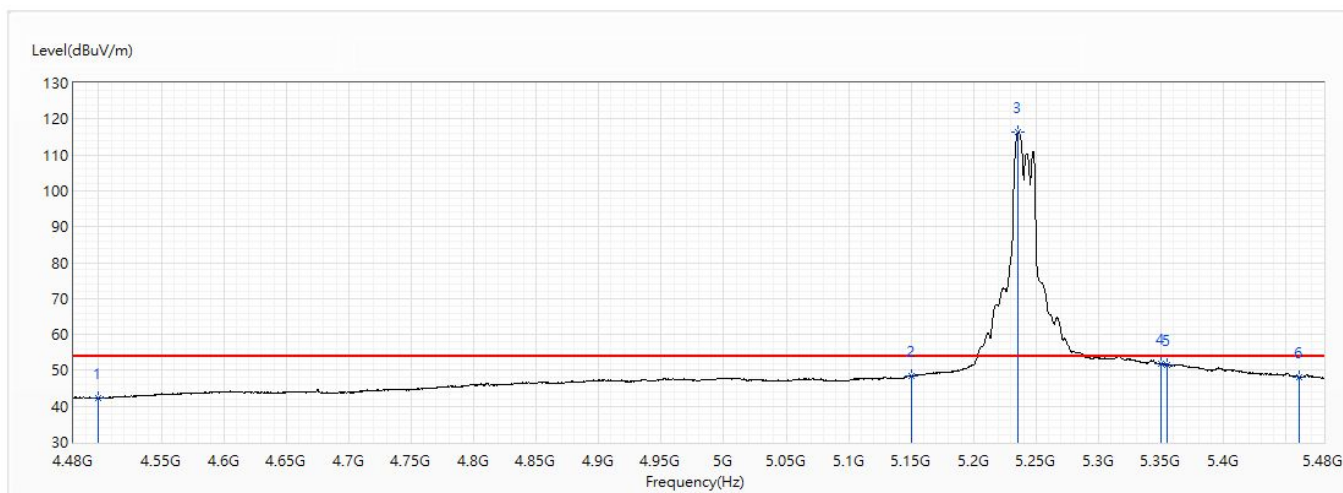


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.26	54.00	-11.74	18.59	23.67	AV
2	5150	48.45	54.00	-5.55	24.01	24.44	AV
! 3	5235.5	116.51	54.00	62.51	91.91	24.60	AV
4	5350	51.92	54.00	-2.08	27.12	24.80	AV
5	5354.5	51.58	54.00	-2.42	26.78	24.80	AV
6	5460	48.19	54.00	-5.81	23.20	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

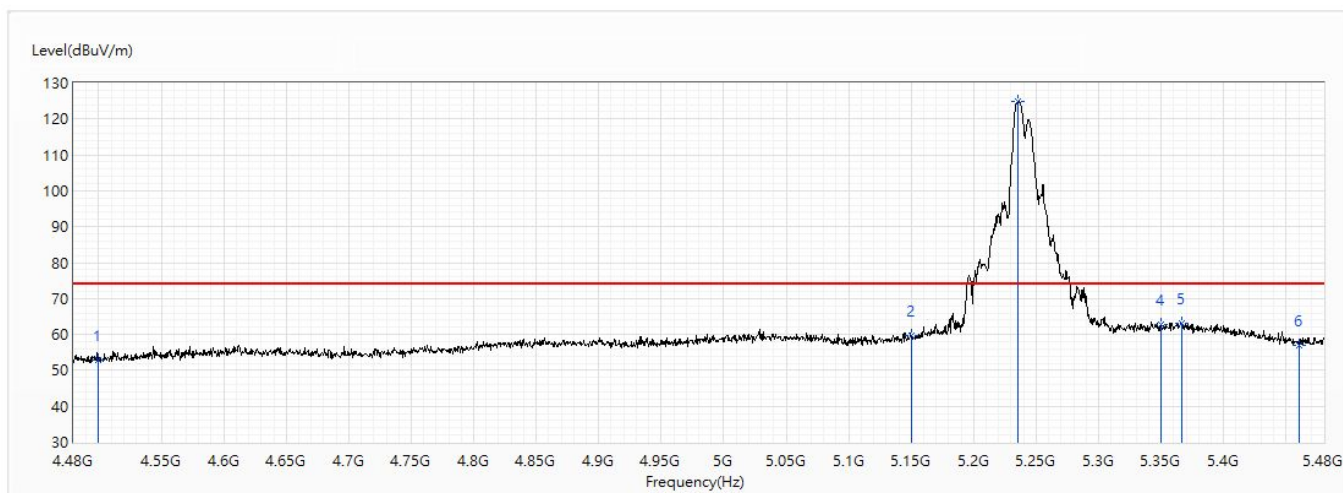


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.88	74.00	-21.12	29.21	23.67	PK
2	5150	59.63	74.00	-14.37	35.19	24.44	PK
! 3	5235.5	124.97	74.00	50.97	100.37	24.60	PK
4	5350	62.72	74.00	-11.28	37.92	24.80	PK
5	5366.5	63.09	74.00	-10.91	38.26	24.83	PK
6	5460	56.82	74.00	-17.18	31.83	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11a_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

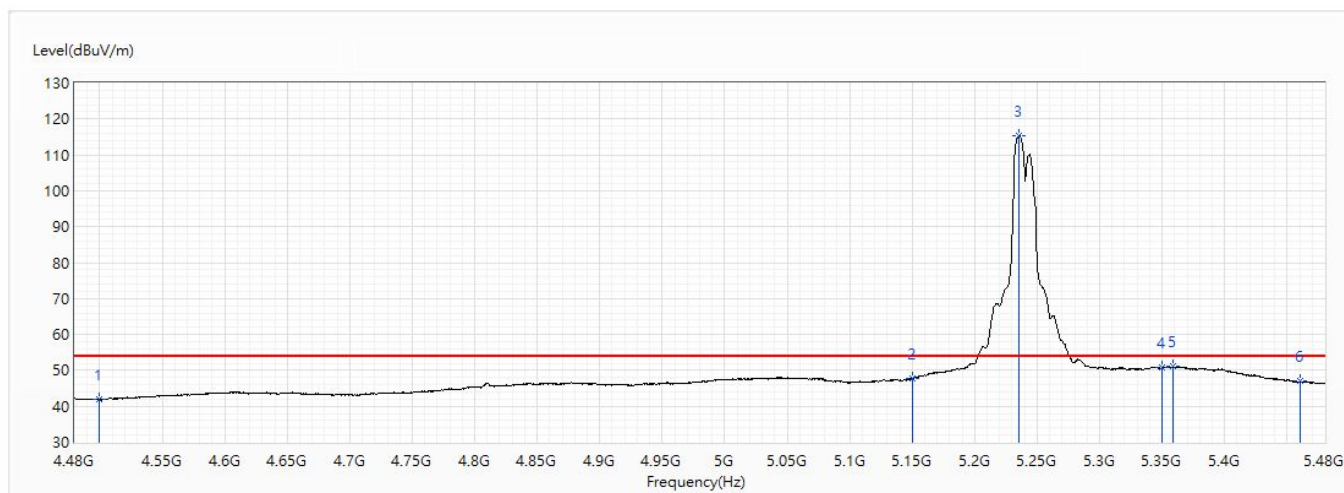


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.87	54.00	-12.13	18.20	23.67	AV
2	5150	47.68	54.00	-6.32	23.24	24.44	AV
! 3	5235.5	115.38	54.00	61.38	90.78	24.60	AV
4	5350	50.70	54.00	-3.30	25.90	24.80	AV
5	5359	51.04	54.00	-2.96	26.23	24.81	AV
6	5460	46.93	54.00	-7.07	21.94	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

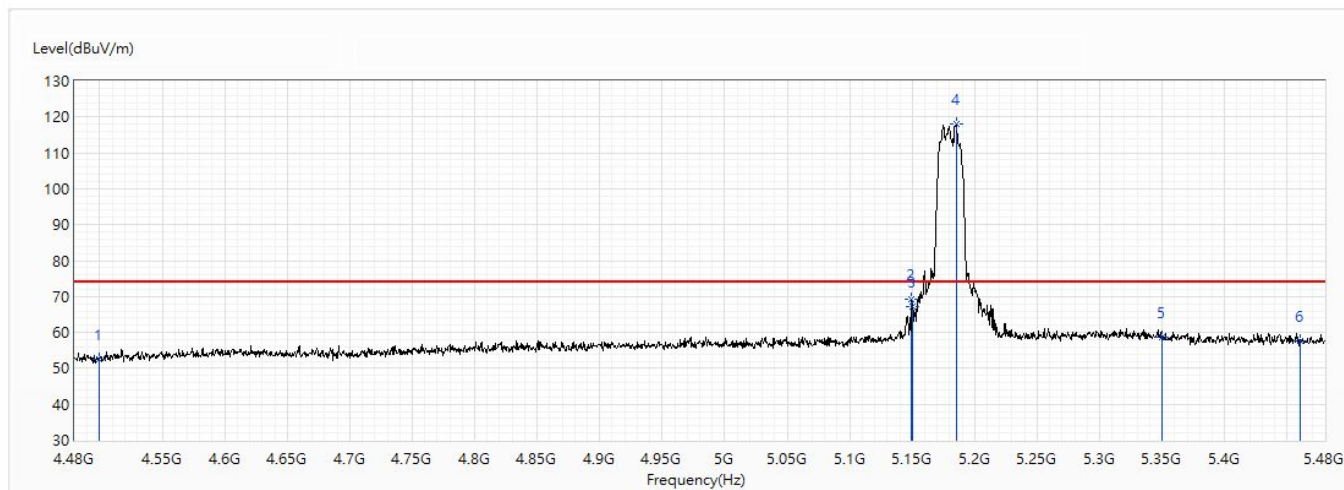


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.50	74.00	-21.50	28.83	23.67	PK
2	5149.5	69.29	74.00	-4.71	44.85	24.44	PK
3	5150	67.25	74.00	-6.75	42.81	24.44	PK
! 4	5185	117.99	74.00	43.99	93.48	24.51	PK
5	5350	58.61	74.00	-15.39	33.81	24.80	PK
6	5460	57.77	74.00	-16.23	32.78	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

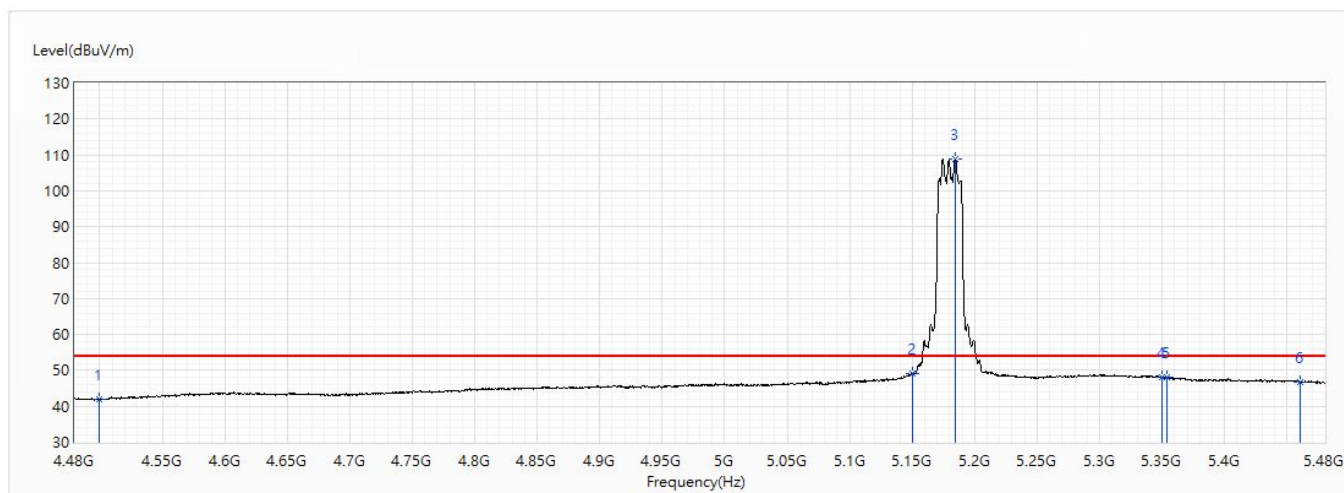


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.84	54.00	-12.16	18.17	23.67	AV
2	5150	49.27	54.00	-4.73	24.83	24.44	AV
! 3	5184.5	108.79	54.00	54.79	84.29	24.50	AV
4	5350	48.02	54.00	-5.98	23.22	24.80	AV
5	5353.5	47.95	54.00	-6.05	23.15	24.80	AV
6	5460	46.83	54.00	-7.17	21.84	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

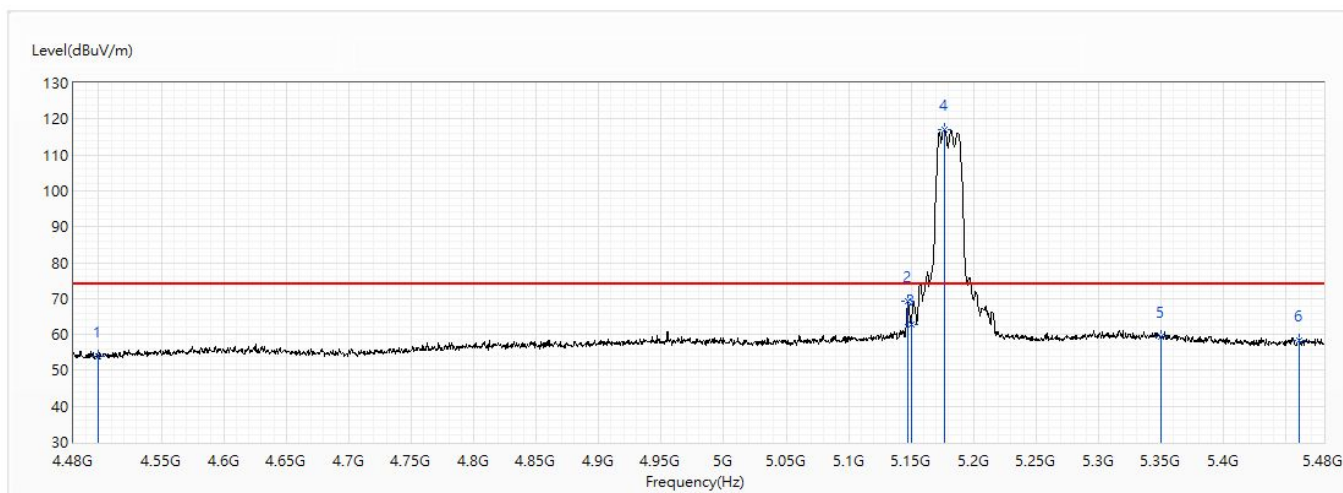


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.91	74.00	-20.09	30.24	23.67	PK
2	5147.5	69.11	74.00	-4.89	44.67	24.44	PK
3	5150	62.62	74.00	-11.38	38.18	24.44	PK
! 4	5177	117.04	74.00	43.04	92.54	24.50	PK
5	5350	59.49	74.00	-14.51	34.69	24.80	PK
6	5460	58.43	74.00	-15.57	33.44	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

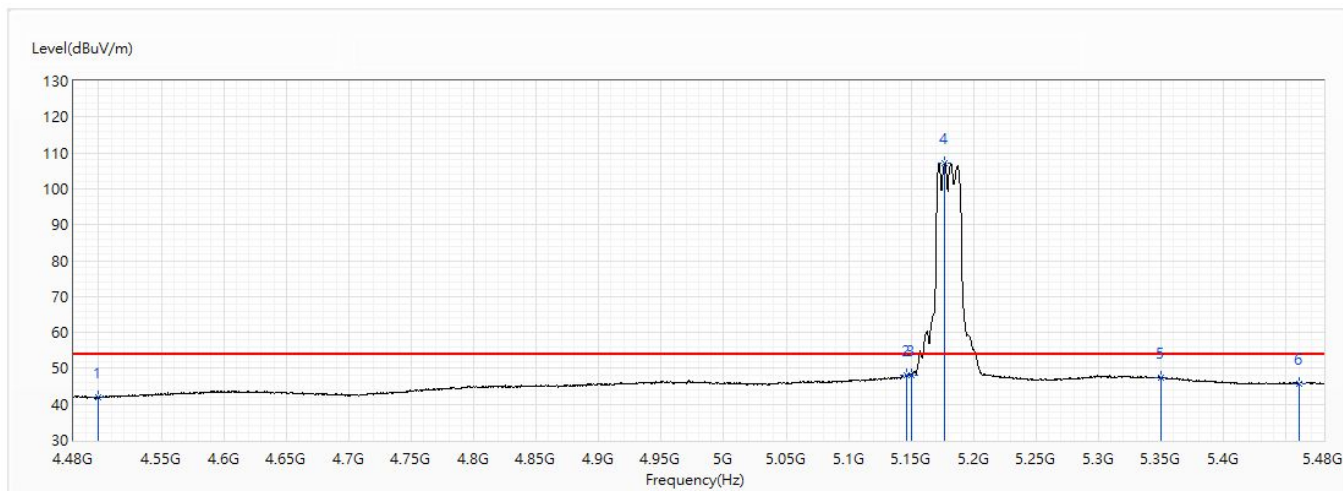


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.92	54.00	-12.08	18.25	23.67	AV
2	5146.5	47.94	54.00	-6.06	23.50	24.44	AV
3	5150	48.12	54.00	-5.88	23.68	24.44	AV
! 4	5177	107.24	54.00	53.24	82.74	24.50	AV
5	5350	47.55	54.00	-6.45	22.75	24.80	AV
6	5460	45.74	54.00	-8.26	20.75	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

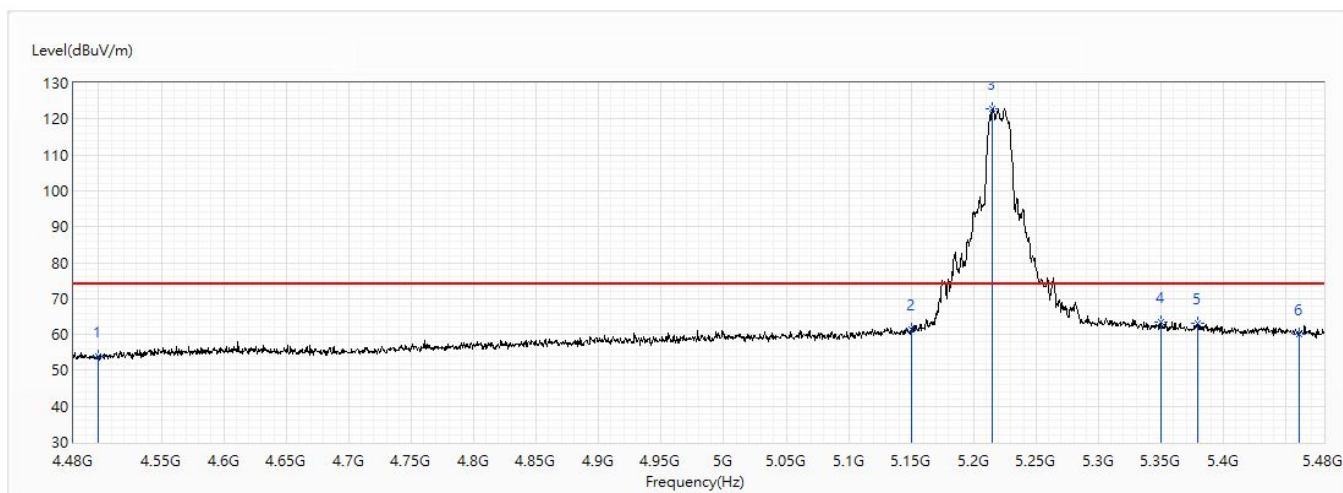


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.74	74.00	-20.26	30.07	23.67	PK
2	5150	61.56	74.00	-12.44	37.12	24.44	PK
! 3	5215	123.00	74.00	49.00	98.44	24.56	PK
4	5350	63.49	74.00	-10.51	38.69	24.80	PK
5	5379	63.06	74.00	-10.94	38.20	24.86	PK
6	5460	60.04	74.00	-13.96	35.05	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

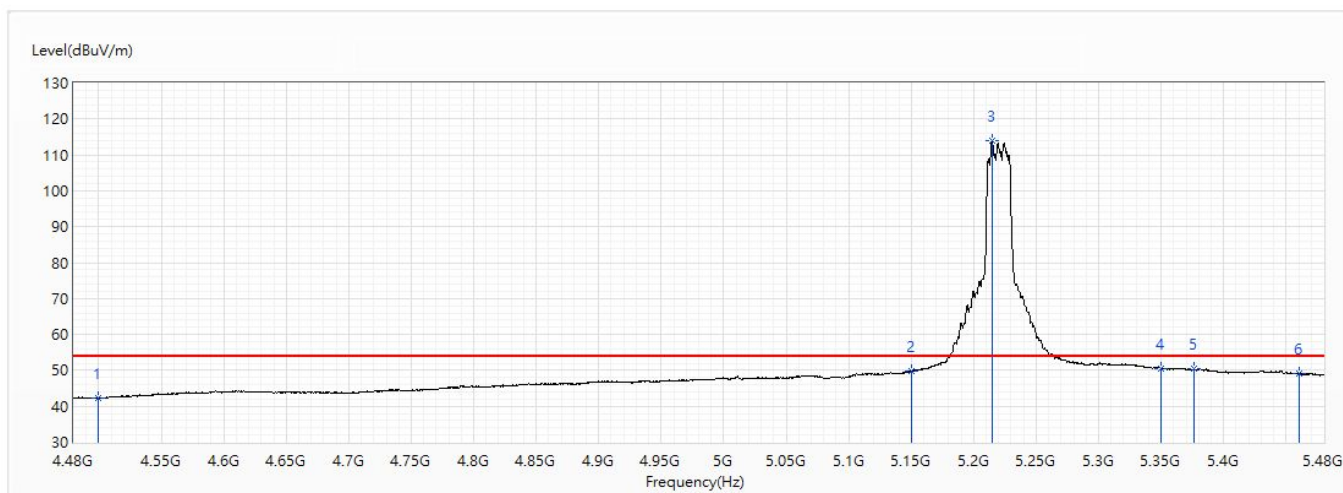


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.26	54.00	-11.74	18.59	23.67	AV
2	5150	49.91	54.00	-4.09	25.47	24.44	AV
! 3	5214.5	114.06	54.00	60.06	89.51	24.55	AV
4	5350	50.62	54.00	-3.38	25.82	24.80	AV
5	5376.5	50.36	54.00	-3.64	25.51	24.85	AV
6	5460	49.07	54.00	-4.93	24.08	24.99	AV
7	5500	48.72	54.00	-5.28	23.65	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

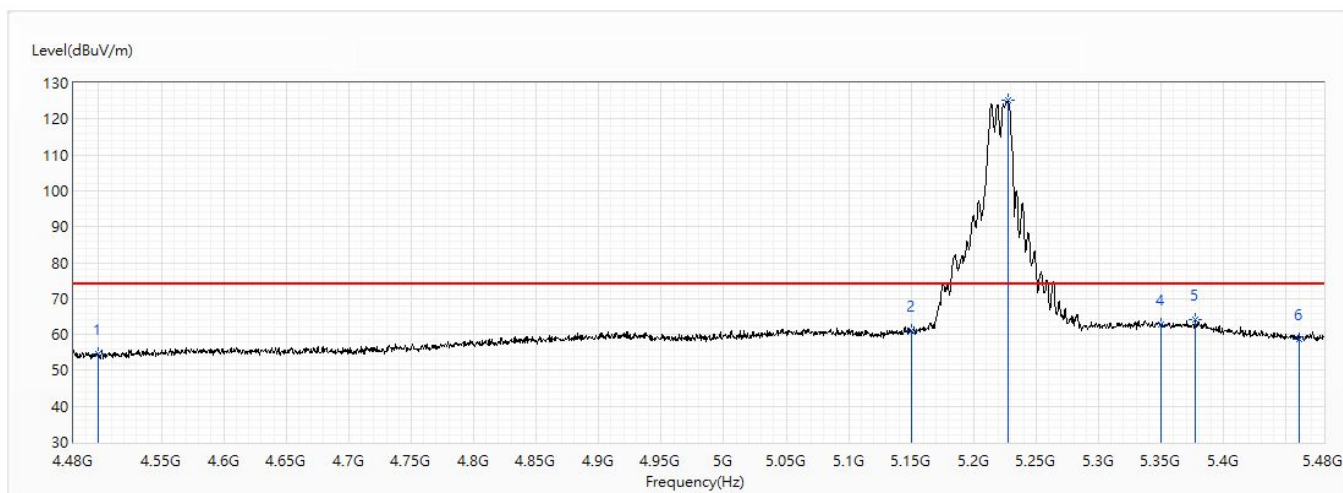


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.60	74.00	-19.40	30.93	23.67	PK
2	5150	61.04	74.00	-12.96	36.60	24.44	PK
! 3	5227.5	125.06	74.00	51.06	100.47	24.59	PK
4	5350	62.88	74.00	-11.12	38.08	24.80	PK
5	5377.5	64.00	74.00	-10.00	39.14	24.86	PK
6	5460	58.83	74.00	-15.17	33.84	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

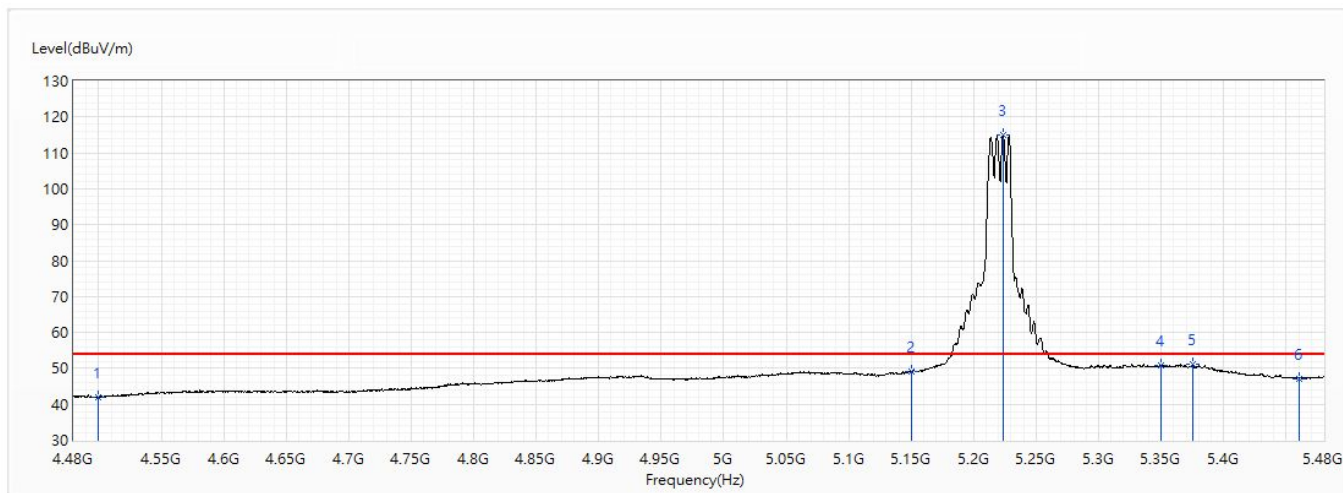


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.87	54.00	-12.13	18.20	23.67	AV
2	5150	49.01	54.00	-4.99	24.57	24.44	AV
! 3	5223.5	115.12	54.00	61.12	90.56	24.56	AV
4	5350	50.67	54.00	-3.33	25.87	24.80	AV
5	5375	51.07	54.00	-2.93	26.24	24.83	AV
6	5460	47.18	54.00	-6.82	22.19	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

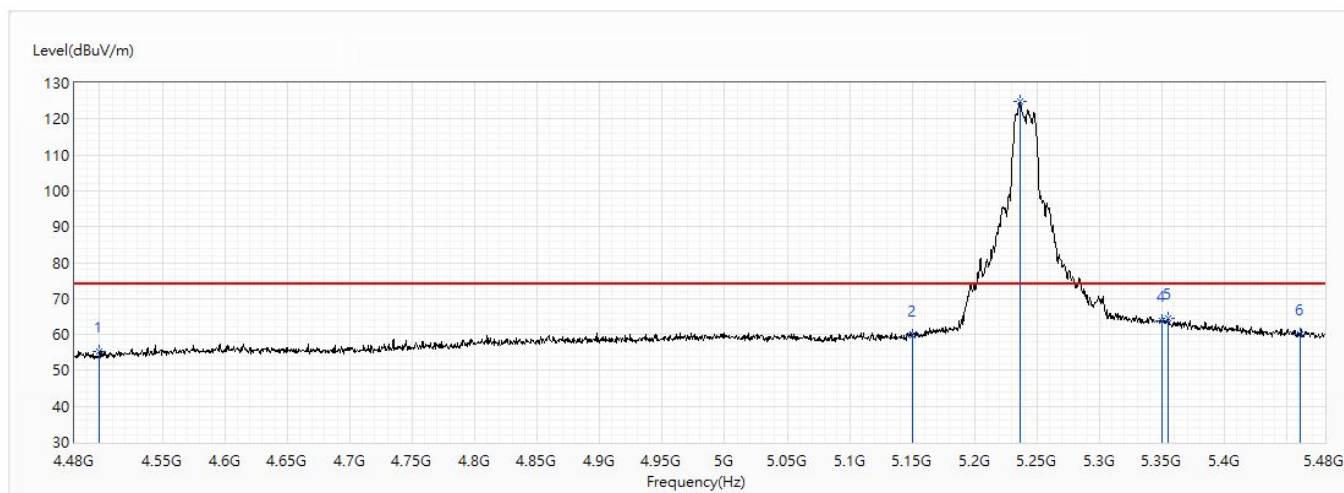


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.12	74.00	-18.88	31.45	23.67	PK
2	5150	59.85	74.00	-14.15	35.41	24.44	PK
! 3	5236.5	124.78	74.00	50.78	100.18	24.60	PK
4	5350	63.63	74.00	-10.37	38.83	24.80	PK
5	5355	64.31	74.00	-9.69	39.50	24.81	PK
6	5460	60.02	74.00	-13.98	35.03	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

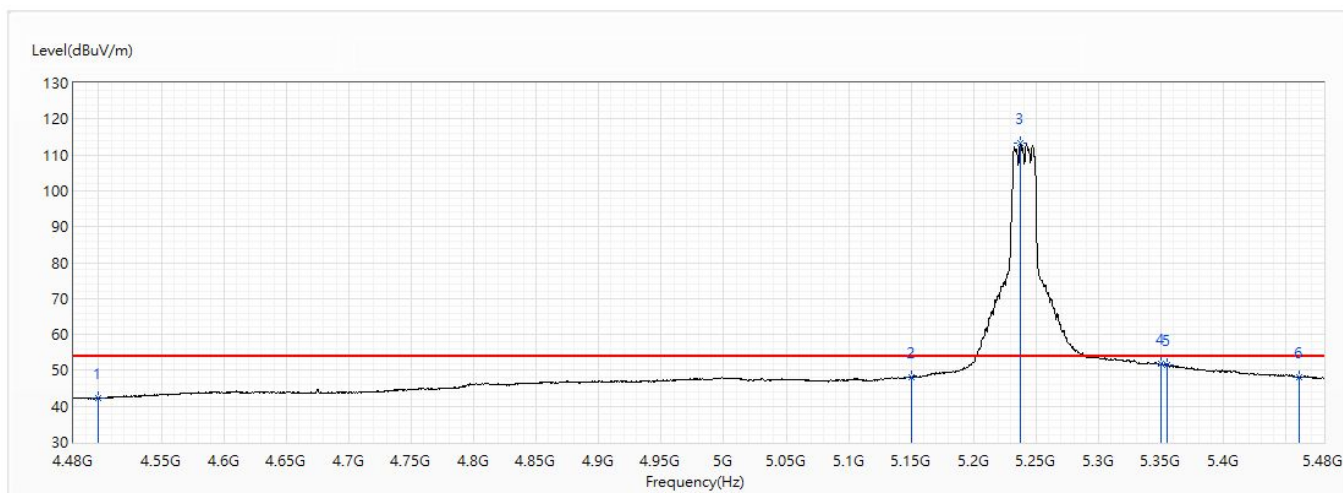


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.21	54.00	-11.79	18.54	23.67	AV
2	5150	48.21	54.00	-5.79	23.77	24.44	AV
! 3	5237.5	113.39	54.00	59.39	88.79	24.60	AV
4	5350	51.92	54.00	-2.08	27.12	24.80	AV
5	5354.5	51.47	54.00	-2.53	26.67	24.80	AV
6	5460	48.06	54.00	-5.94	23.07	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

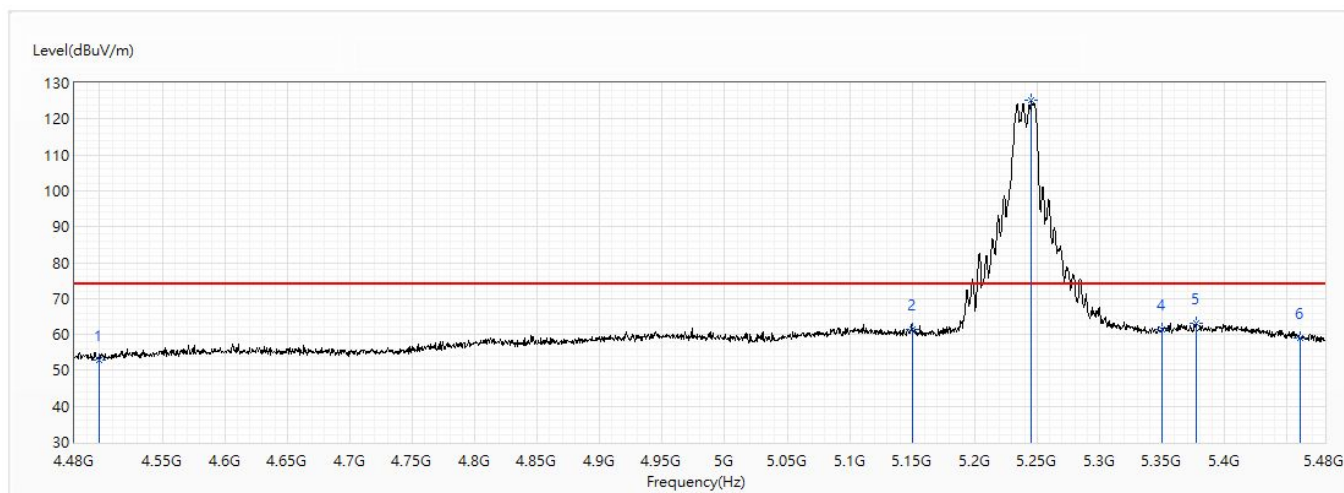


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.98	74.00	-21.02	29.31	23.67	PK
2	5150	61.30	74.00	-12.70	36.86	24.44	PK
! 3	5245.5	125.08	74.00	51.08	100.46	24.62	PK
4	5350	61.33	74.00	-12.67	36.53	24.80	PK
5	5377	63.07	74.00	-10.93	38.22	24.85	PK
6	5460	58.87	74.00	-15.13	33.88	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

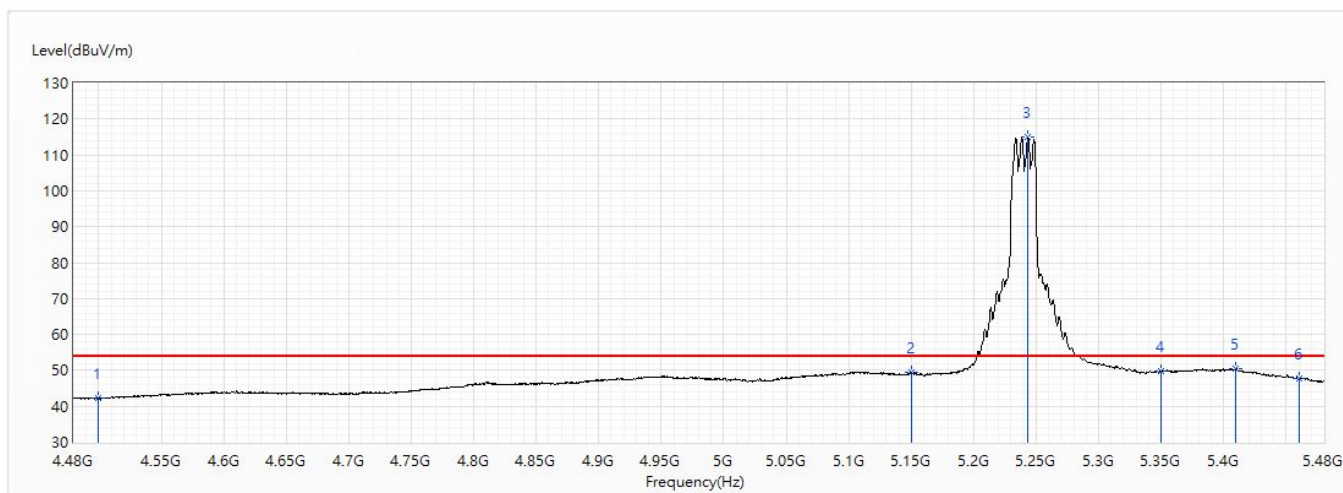


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.14	54.00	-11.86	18.47	23.67	AV
2	5150	49.31	54.00	-4.69	24.87	24.44	AV
! 3	5243.5	115.01	54.00	61.01	90.40	24.61	AV
4	5350	49.69	54.00	-4.31	24.89	24.80	AV
5	5409.5	50.35	54.00	-3.65	25.45	24.90	AV
6	5460	47.84	54.00	-6.16	22.85	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

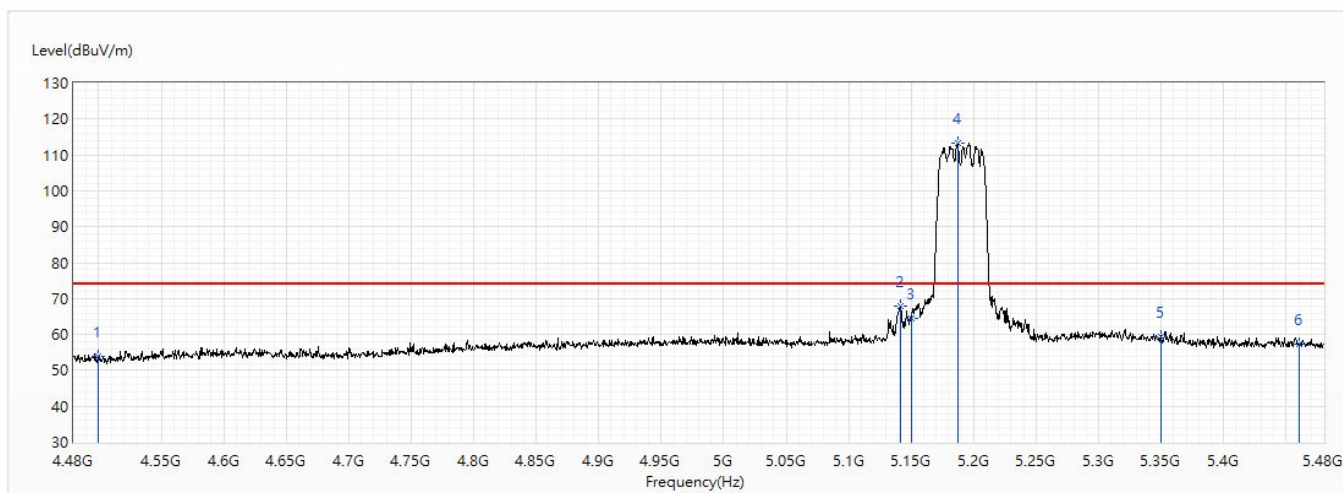


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.81	74.00	-20.19	30.14	23.67	PK
2	5141.5	67.78	74.00	-6.22	43.35	24.43	PK
3	5150	64.43	74.00	-9.57	39.99	24.44	PK
! 4	5187	113.24	74.00	39.24	88.73	24.51	PK
5	5350	59.21	74.00	-14.79	34.41	24.80	PK
6	5460	57.43	74.00	-16.57	32.44	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

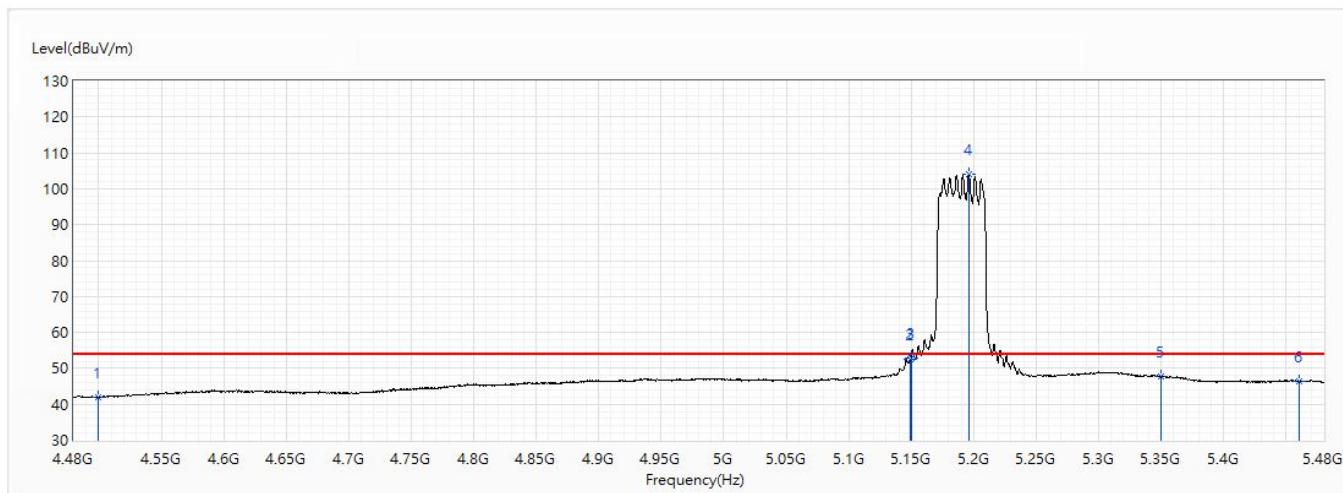


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.83	54.00	-12.17	18.16	23.67	AV
2	5149.5	52.46	54.00	-1.54	28.02	24.44	AV
3	5150	52.88	54.00	-1.12	28.44	24.44	AV
! 4	5196	104.16	54.00	50.16	79.63	24.53	AV
5	5350	47.64	54.00	-6.36	22.84	24.80	AV
6	5460	46.42	54.00	-7.58	21.43	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

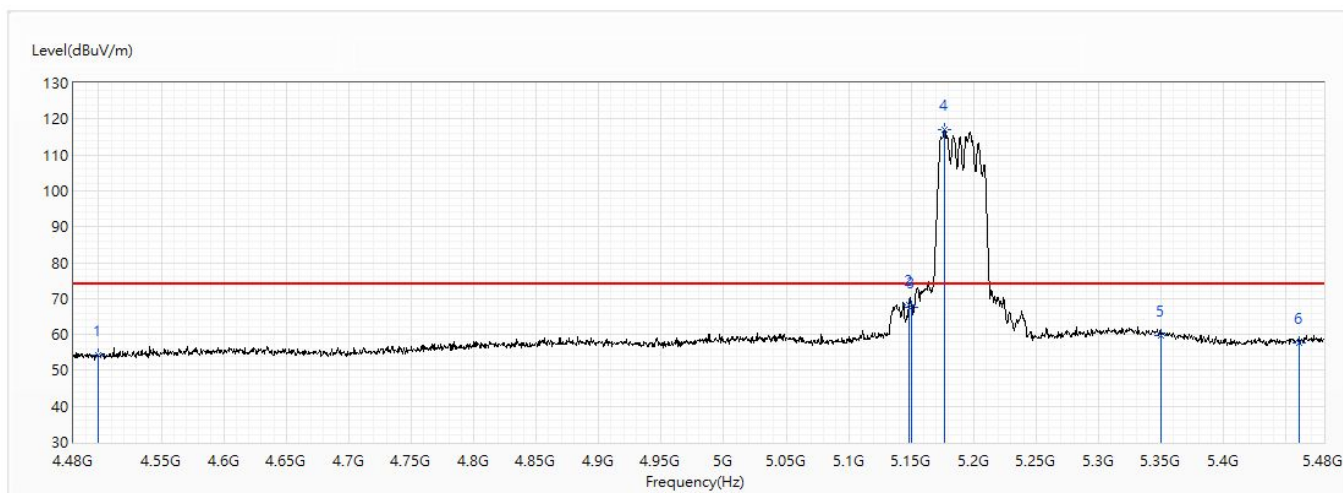


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.08	74.00	-19.92	30.41	23.67	PK
2	5148	68.19	74.00	-5.81	43.75	24.44	PK
3	5150	67.46	74.00	-6.54	43.02	24.44	PK
! 4	5177	117.05	74.00	43.05	92.55	24.50	PK
5	5350	59.86	74.00	-14.14	35.06	24.80	PK
6	5460	57.72	74.00	-16.28	32.73	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

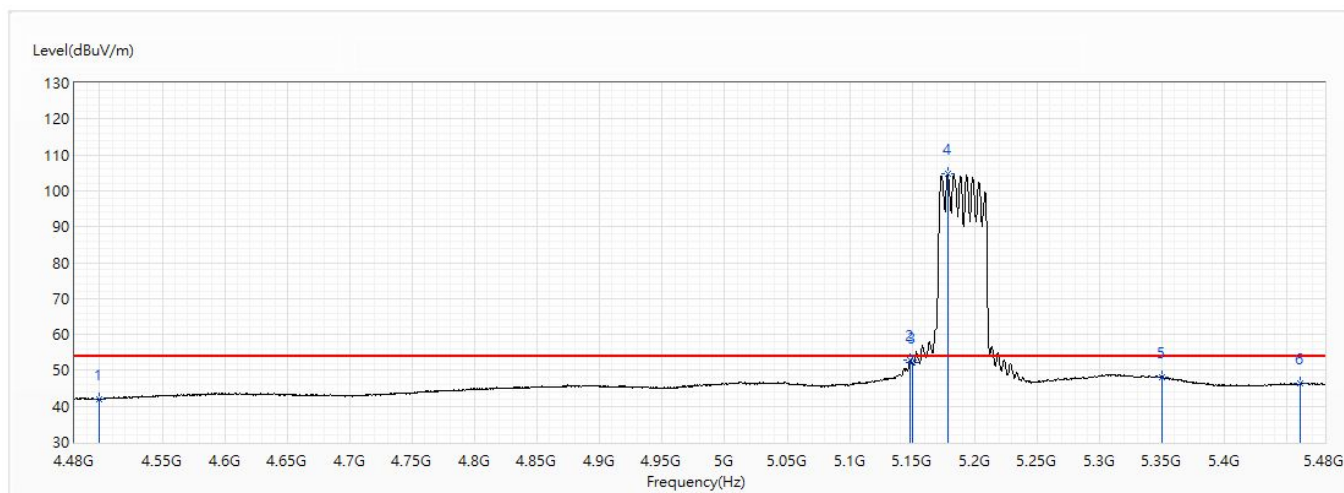


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.96	54.00	-12.04	18.29	23.67	AV
2	5148.5	52.94	54.00	-1.06	28.50	24.44	AV
3	5150	52.09	54.00	-1.91	27.65	24.44	AV
! 4	5178.5	104.77	54.00	50.77	80.27	24.50	AV
5	5350	48.21	54.00	-5.79	23.41	24.80	AV
6	5460	46.23	54.00	-7.77	21.24	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

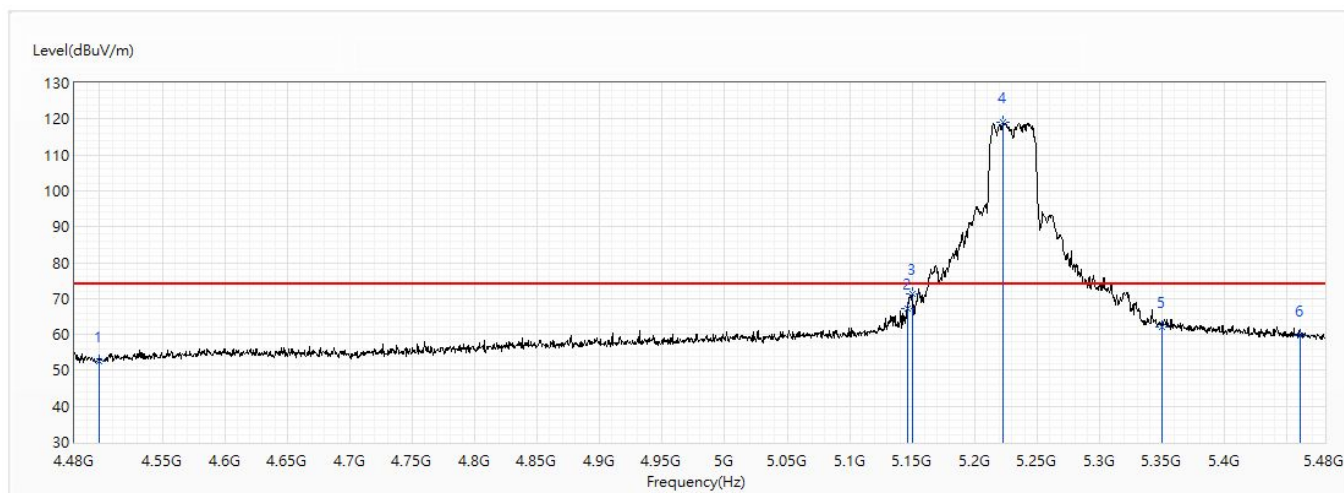


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.64	74.00	-21.36	28.97	23.67	PK
2	5146.5	67.29	74.00	-6.71	42.85	24.44	PK
3	5150	71.38	74.00	-2.62	46.94	24.44	PK
! 4	5223	119.11	74.00	45.11	94.55	24.56	PK
5	5350	62.04	74.00	-11.96	37.24	24.80	PK
6	5460	59.84	74.00	-14.16	34.85	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

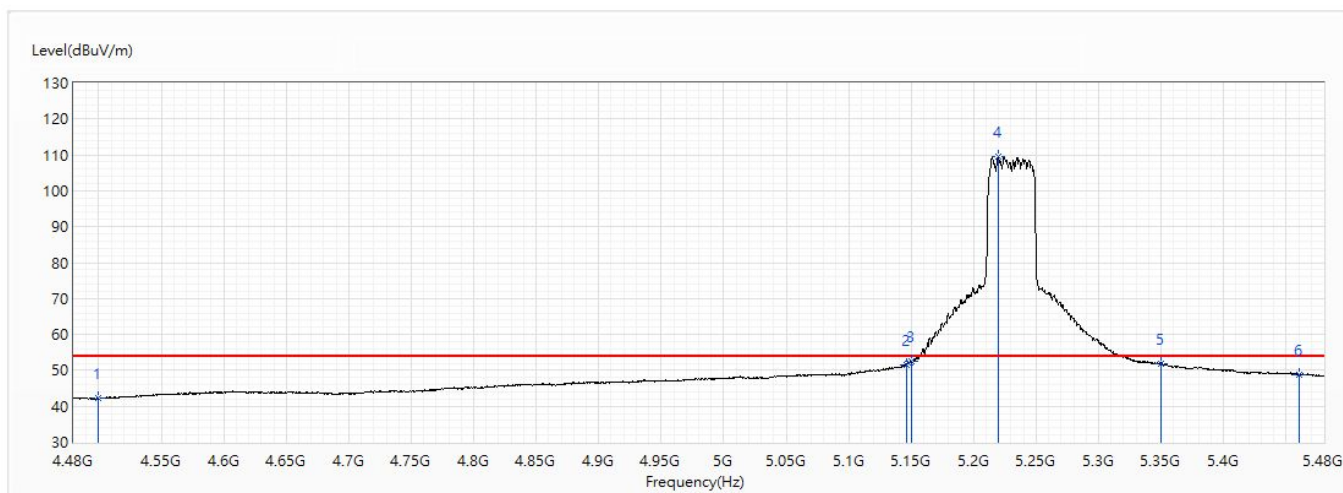


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.31	54.00	-11.69	18.64	23.67	AV
2	5146.5	51.57	54.00	-2.43	27.13	24.44	AV
3	5150	52.53	54.00	-1.47	28.09	24.44	AV
! 4	5219.5	109.61	54.00	55.61	85.05	24.56	AV
5	5350	51.81	54.00	-2.19	27.01	24.80	AV
6	5460	48.75	54.00	-5.25	23.76	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

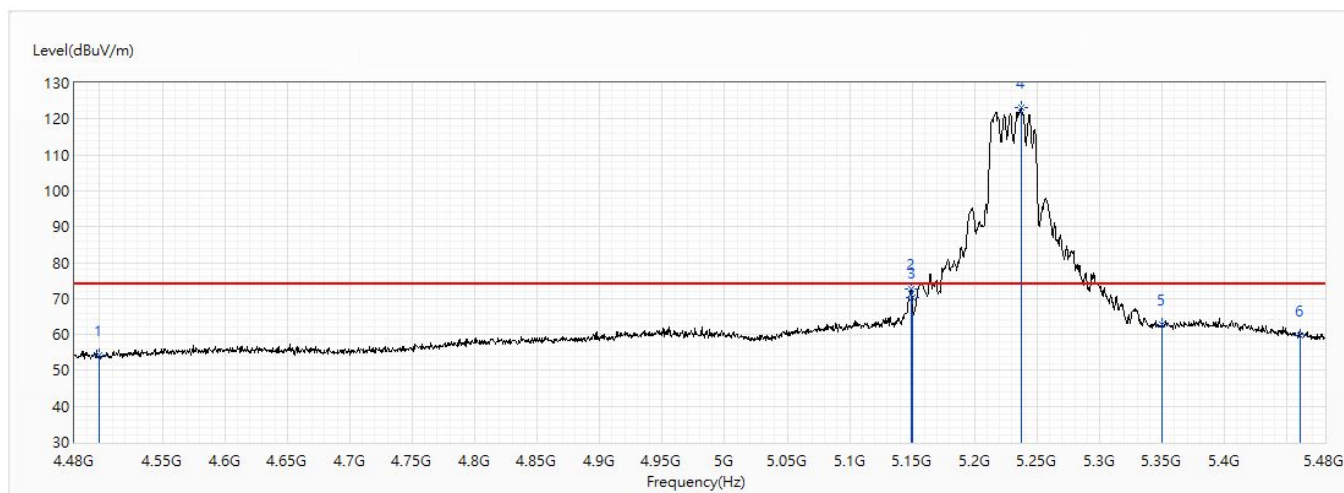


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.18	74.00	-19.82	30.51	23.67	PK
2	5149	72.81	74.00	-1.19	48.37	24.44	PK
3	5150	70.26	74.00	-3.74	45.82	24.44	PK
! 4	5237	123.27	74.00	49.27	98.67	24.60	PK
5	5350	62.87	74.00	-11.13	38.07	24.80	PK
6	5460	59.82	74.00	-14.18	34.83	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

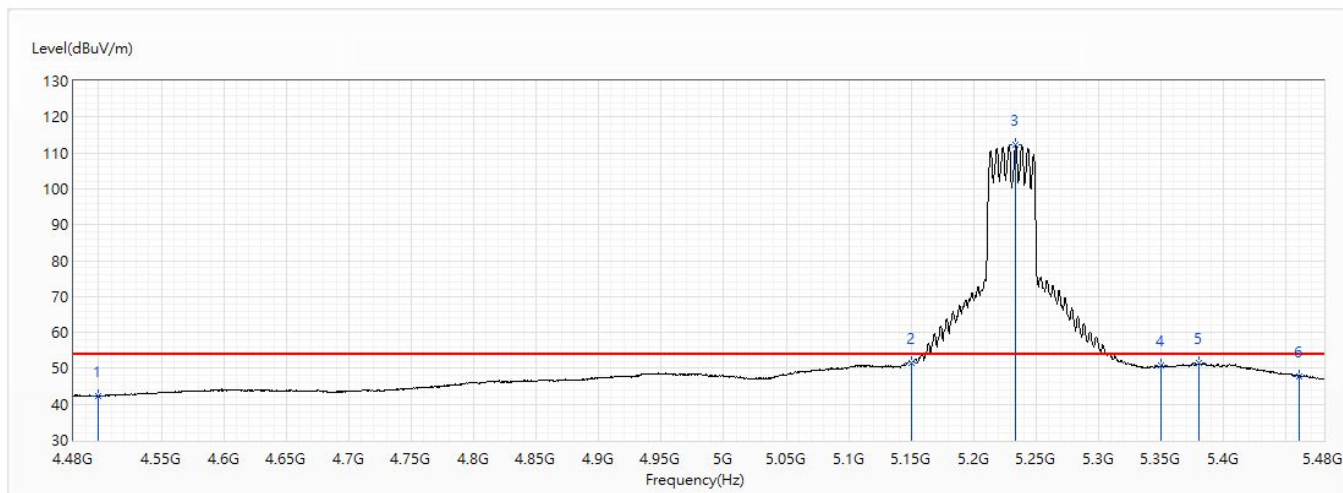


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.28	54.00	-11.72	18.61	23.67	AV
2	5150	51.36	54.00	-2.64	26.92	24.44	AV
! 3	5233.5	112.18	54.00	58.18	87.59	24.59	AV
4	5350	50.78	54.00	-3.22	25.98	24.80	AV
5	5380	51.53	54.00	-2.47	26.67	24.86	AV
6	5460	47.88	54.00	-6.12	22.89	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

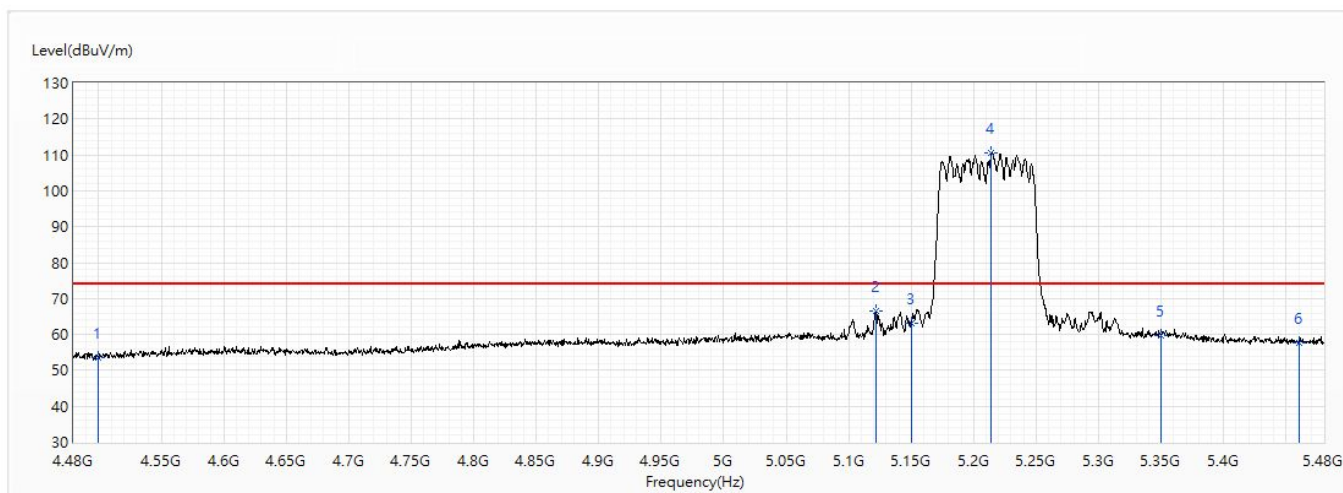


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.43	74.00	-20.57	29.76	23.67	PK
2	5121.5	66.58	74.00	-7.42	42.20	24.38	PK
3	5150	62.98	74.00	-11.02	38.54	24.44	PK
! 4	5214	110.51	74.00	36.51	85.96	24.55	PK
5	5350	59.71	74.00	-14.29	34.91	24.80	PK
6	5460	57.70	74.00	-16.30	32.71	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

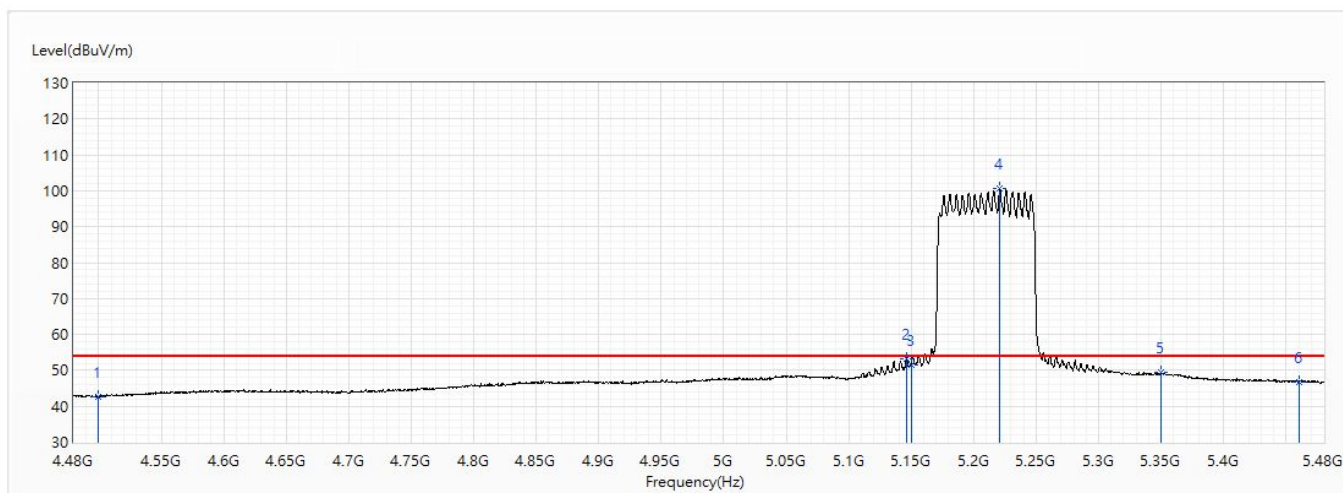


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.56	54.00	-11.44	18.89	23.67	AV
2	5146	53.34	54.00	-0.66	28.90	24.44	AV
3	5150	51.61	54.00	-2.39	27.17	24.44	AV
! 4	5221	100.68	54.00	46.68	76.12	24.56	AV
5	5350	49.33	54.00	-4.67	24.53	24.80	AV
6	5460	46.85	54.00	-7.15	21.86	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

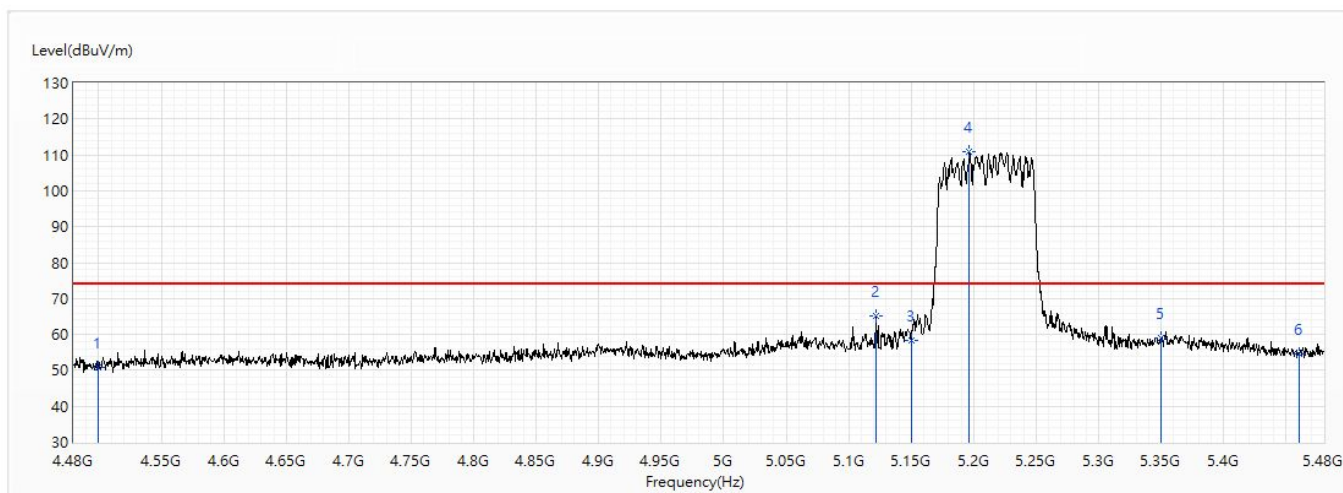


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	50.76	74.00	-23.24	27.09	23.67	PK
2	5122	65.20	74.00	-8.80	40.82	24.38	PK
3	5150	58.37	74.00	-15.63	33.93	24.44	PK
! 4	5196.5	110.81	74.00	36.81	86.28	24.53	PK
5	5350	59.06	74.00	-14.94	34.26	24.80	PK
6	5460	54.56	74.00	-19.44	29.57	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

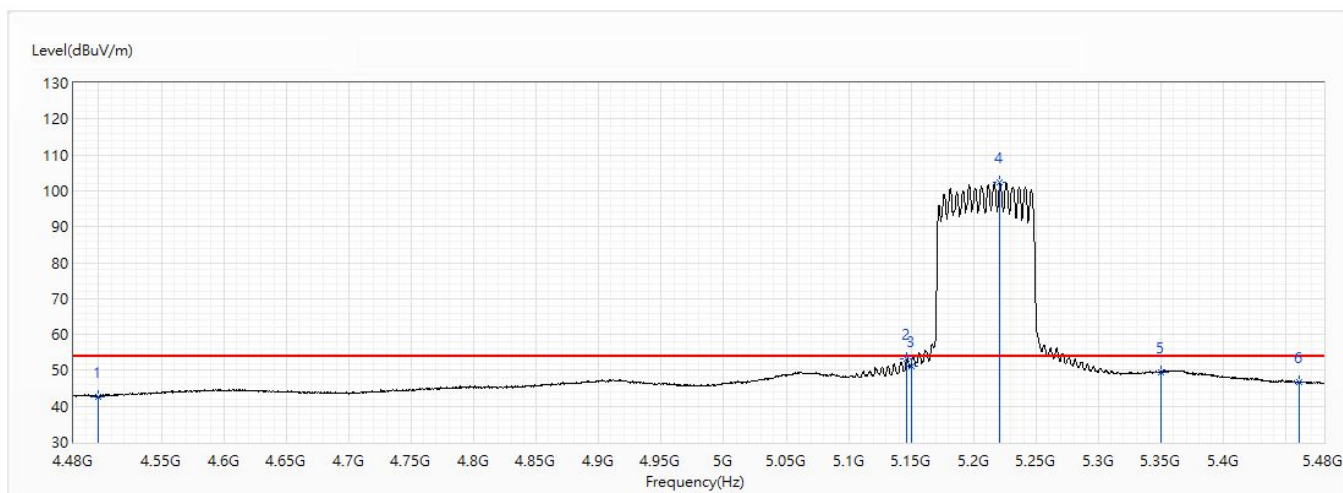


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.74	54.00	-11.26	19.07	23.67	AV
2	5146.5	53.30	54.00	-0.70	28.86	24.44	AV
3	5150	51.26	54.00	-2.74	26.82	24.44	AV
! 4	5221	102.30	54.00	48.30	77.74	24.56	AV
5	5350	49.42	54.00	-4.58	24.62	24.80	AV
6	5460	46.59	54.00	-7.41	21.60	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

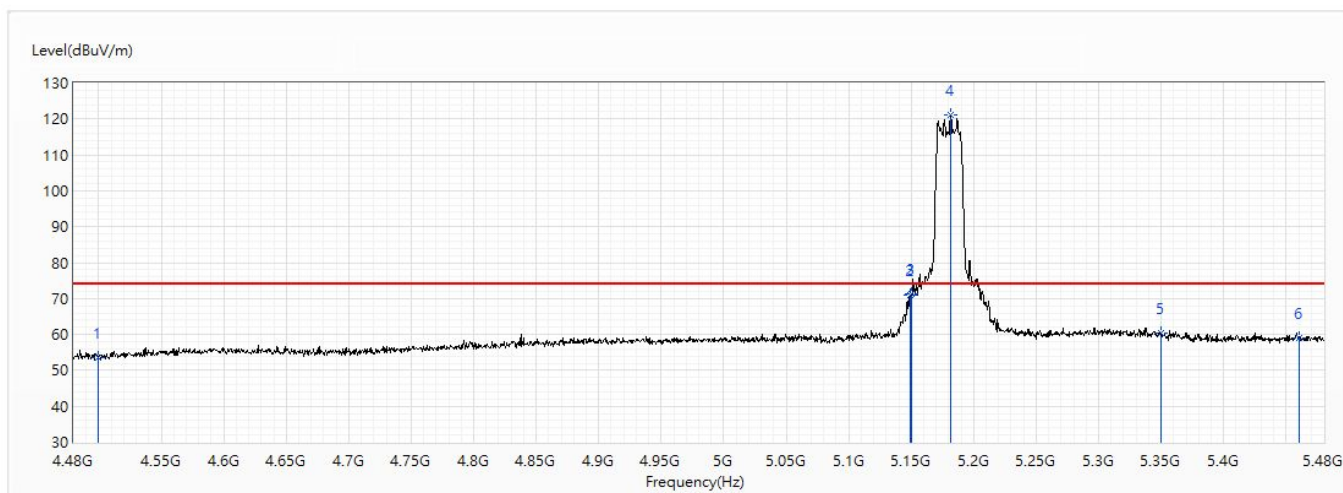


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.70	74.00	-20.30	30.03	23.67	PK
2	5149	71.03	74.00	-2.97	46.59	24.44	PK
3	5150	71.36	74.00	-2.64	46.92	24.44	PK
! 4	5181.5	121.07	74.00	47.07	96.57	24.50	PK
5	5350	60.49	74.00	-13.51	35.69	24.80	PK
6	5460	59.08	74.00	-14.92	34.09	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

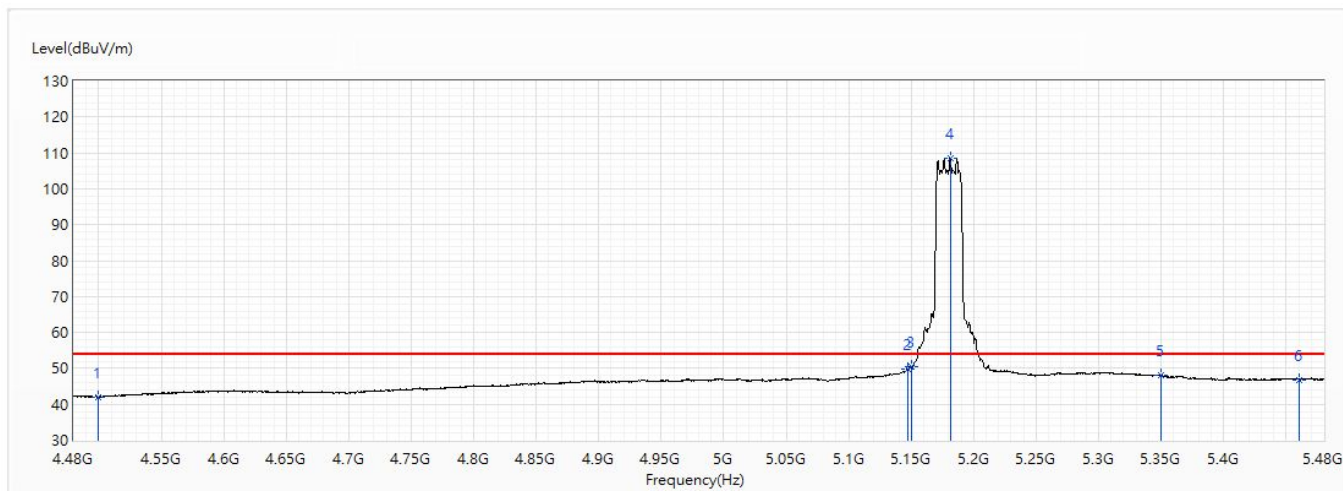

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	41.96	54.00	-12.04	18.29	23.67	AV
2	5147.5	49.82	54.00	-4.18	25.38	24.44	AV
3	5150	50.38	54.00	-3.62	25.94	24.44	AV
! 4	5181.5	108.51	54.00	54.51	84.01	24.50	AV
5	5350	48.15	54.00	-5.85	23.35	24.80	AV
6	5460	46.83	54.00	-7.17	21.84	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.