


|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G | Humidity (%RH)   | 55.0      |

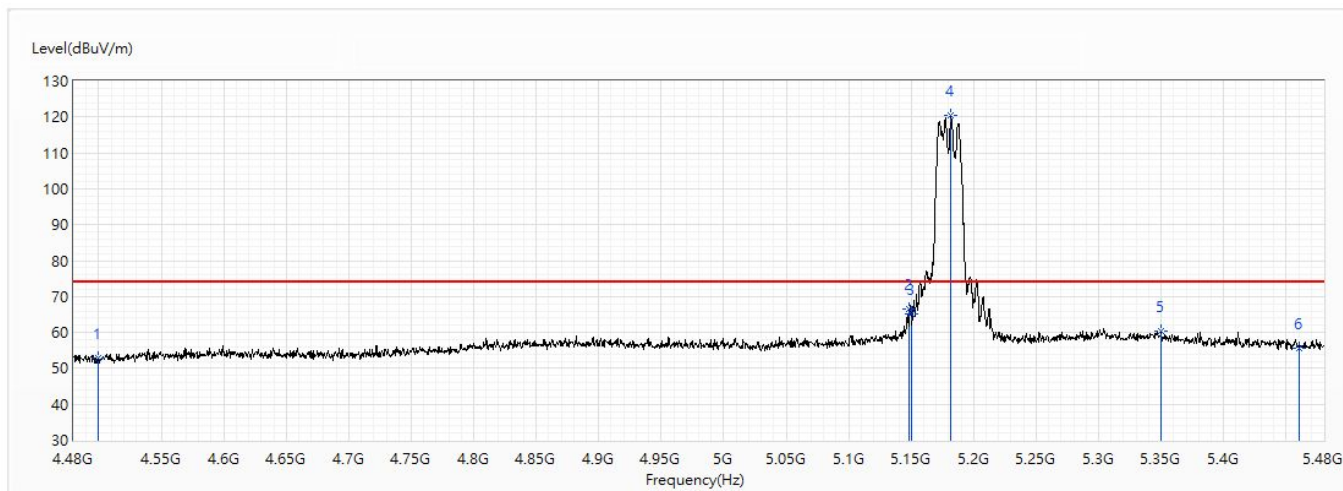


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 52.92                   | 74.00          | -21.08      | 29.25                | 23.67                 | PK            |
| 2   | 5148            | 66.38                   | 74.00          | -7.62       | 41.94                | 24.44                 | PK            |
| 3   | 5150            | 65.21                   | 74.00          | -8.79       | 40.77                | 24.44                 | PK            |
| ! 4 | 5182            | 120.34                  | 74.00          | 46.34       | 95.84                | 24.50                 | PK            |
| 5   | 5350            | 60.47                   | 74.00          | -13.53      | 35.67                | 24.80                 | PK            |
| 6   | 5460            | 55.75                   | 74.00          | -18.25      | 30.76                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G | Humidity (%RH)   | 55.0      |

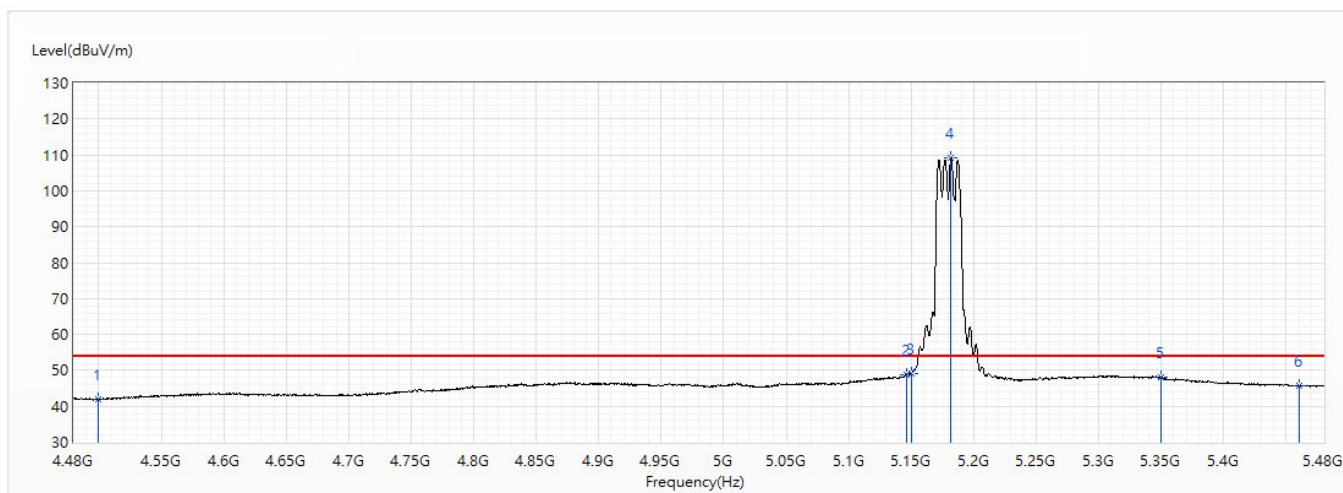


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.10                   | 54.00          | -11.90      | 18.43                | 23.67                 | AV            |
| 2   | 5146.5          | 48.84                   | 54.00          | -5.16       | 24.40                | 24.44                 | AV            |
| 3   | 5150            | 48.97                   | 54.00          | -5.03       | 24.53                | 24.44                 | AV            |
| ! 4 | 5182            | 109.21                  | 54.00          | 55.21       | 84.71                | 24.50                 | AV            |
| 5   | 5350            | 47.96                   | 54.00          | -6.04       | 23.16                | 24.80                 | AV            |
| 6   | 5460            | 45.60                   | 54.00          | -8.40       | 20.61                | 24.99                 | AV            |

## Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G | Humidity (%RH)   | 55.0      |

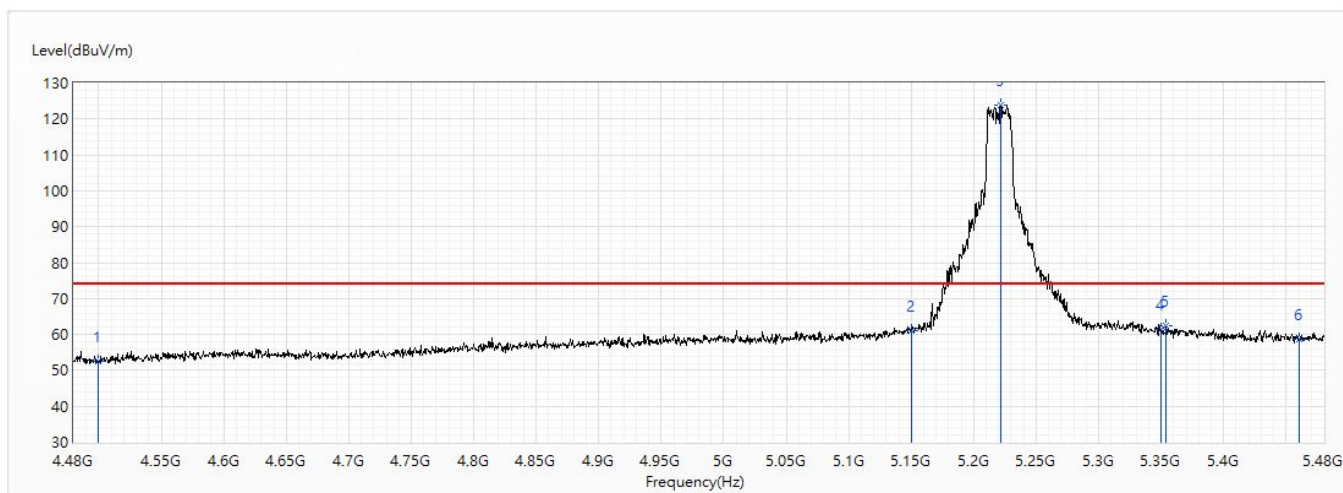


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 52.57                   | 74.00          | -21.43      | 28.90                | 23.67                 | PK            |
| 2   | 5150            | 61.14                   | 74.00          | -12.86      | 36.70                | 24.44                 | PK            |
| ! 3 | 5222            | 123.81                  | 74.00          | 49.81       | 99.25                | 24.56                 | PK            |
| 4   | 5350            | 61.54                   | 74.00          | -12.46      | 36.74                | 24.80                 | PK            |
| 5   | 5354            | 62.37                   | 74.00          | -11.63      | 37.57                | 24.80                 | PK            |
| 6   | 5460            | 58.57                   | 74.00          | -15.43      | 33.58                | 24.99                 | PK            |

## Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G | Humidity (%RH)   | 55.0      |

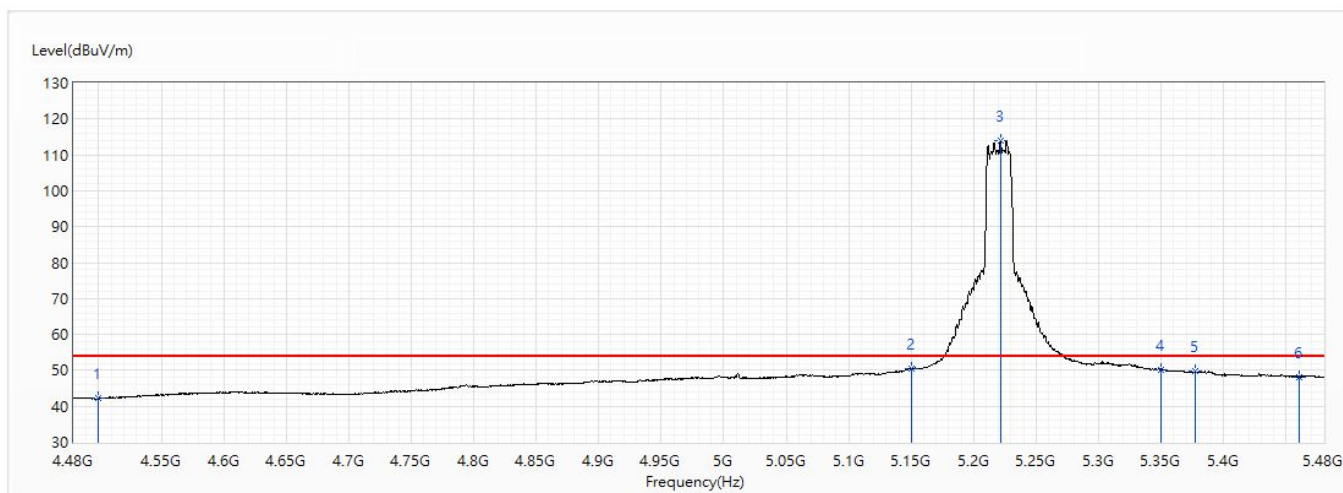


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.19                   | 54.00          | -11.81      | 18.52                | 23.67                 | AV            |
| 2   | 5150            | 50.45                   | 54.00          | -3.55       | 26.01                | 24.44                 | AV            |
| ! 3 | 5221.5          | 114.12                  | 54.00          | 60.12       | 89.56                | 24.56                 | AV            |
| 4   | 5350            | 50.17                   | 54.00          | -3.83       | 25.37                | 24.80                 | AV            |
| 5   | 5377.5          | 49.76                   | 54.00          | -4.24       | 24.90                | 24.86                 | AV            |
| 6   | 5460            | 48.11                   | 54.00          | -5.89       | 23.12                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G | Humidity (%RH)   | 55.0      |

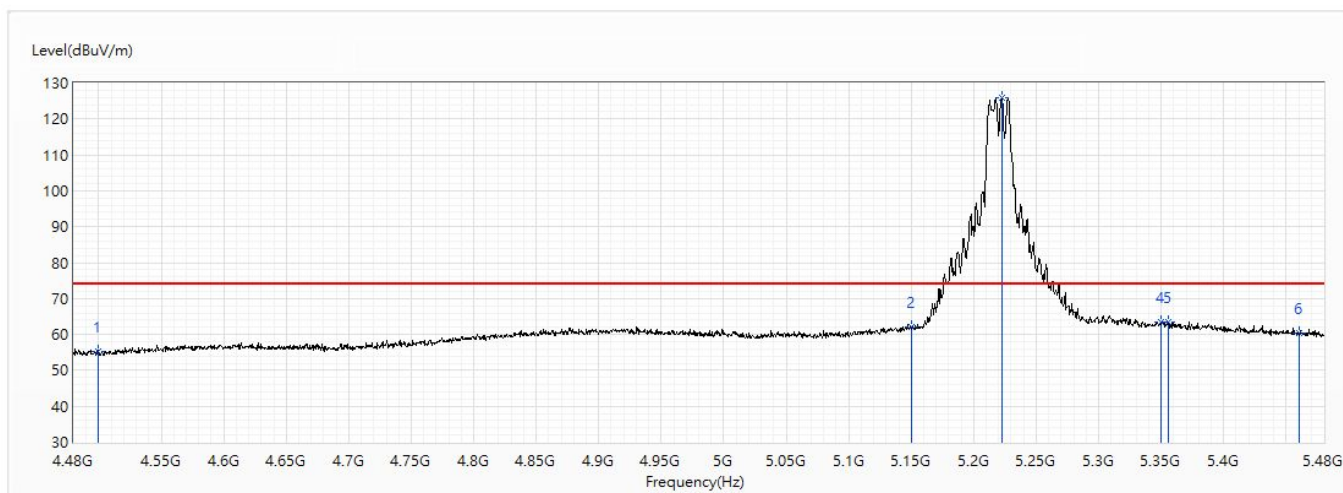


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 55.17                   | 74.00          | -18.83      | 31.50                | 23.67                 | PK            |
| 2   | 5150            | 62.19                   | 74.00          | -11.81      | 37.75                | 24.44                 | PK            |
| ! 3 | 5222.5          | 125.81                  | 74.00          | 51.81       | 101.25               | 24.56                 | PK            |
| 4   | 5350            | 63.30                   | 74.00          | -10.70      | 38.50                | 24.80                 | PK            |
| 5   | 5356            | 63.50                   | 74.00          | -10.50      | 38.69                | 24.81                 | PK            |
| 6   | 5460            | 60.41                   | 74.00          | -13.59      | 35.42                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G | Humidity (%RH)   | 55.0      |

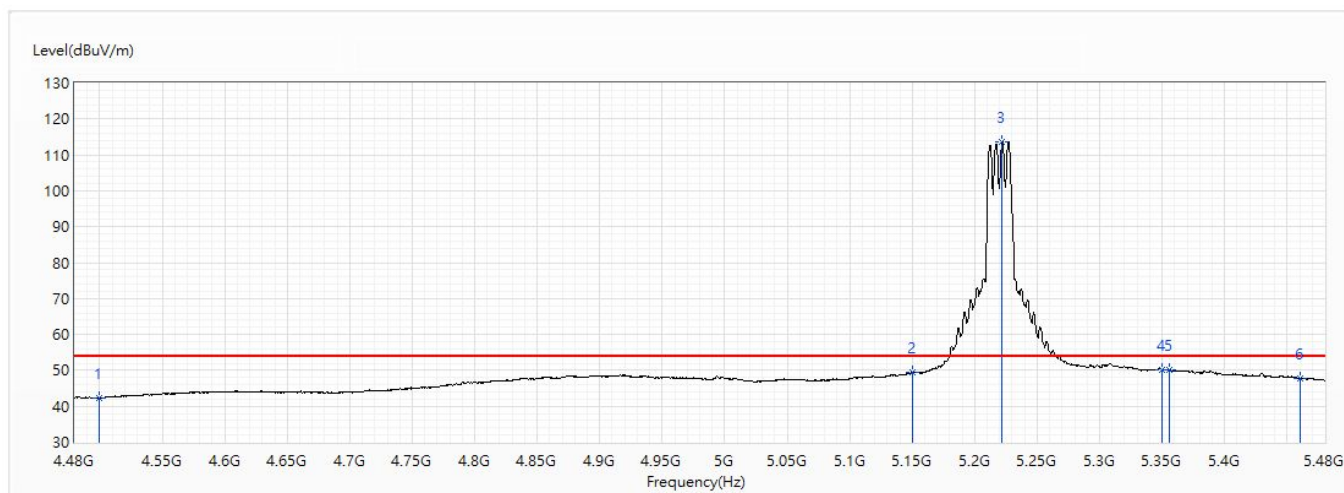


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.32                   | 54.00          | -11.68      | 18.65                | 23.67                 | AV            |
| 2   | 5150            | 49.48                   | 54.00          | -4.52       | 25.04                | 24.44                 | AV            |
| ! 3 | 5222            | 113.71                  | 54.00          | 59.71       | 89.15                | 24.56                 | AV            |
| 4   | 5350            | 50.30                   | 54.00          | -3.70       | 25.50                | 24.80                 | AV            |
| 5   | 5356            | 50.05                   | 54.00          | -3.95       | 25.24                | 24.81                 | AV            |
| 6   | 5460            | 47.78                   | 54.00          | -6.22       | 22.79                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G | Humidity (%RH)   | 55.0      |

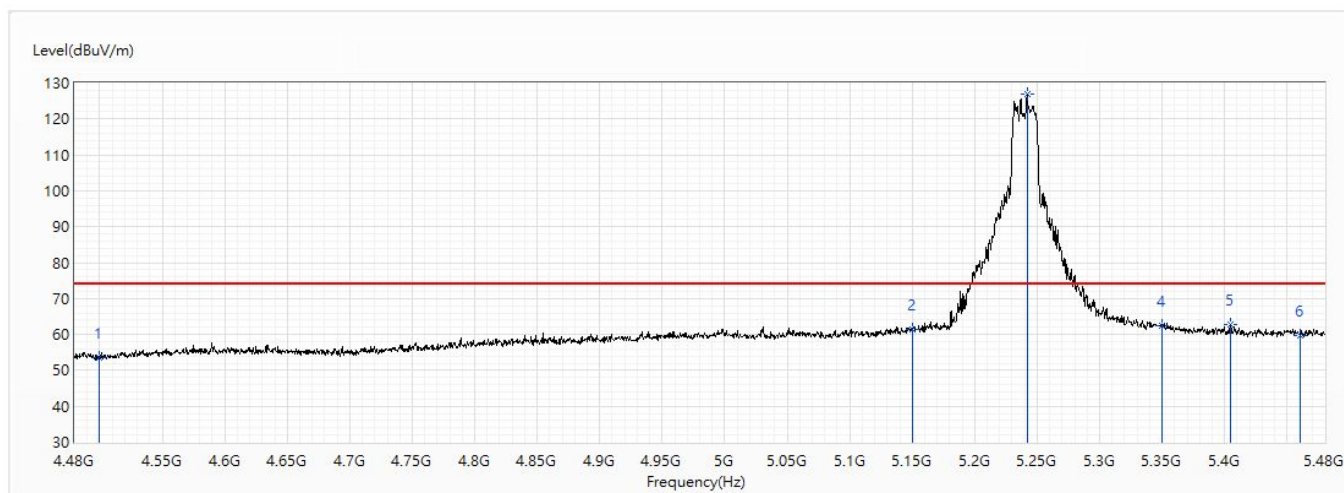


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 53.45                   | 74.00          | -20.55      | 29.78                | 23.67                 | PK            |
| 2   | 5150            | 61.50                   | 74.00          | -12.50      | 37.06                | 24.44                 | PK            |
| ! 3 | 5242            | 126.79                  | 74.00          | 52.79       | 102.18               | 24.61                 | PK            |
| 4   | 5350            | 62.39                   | 74.00          | -11.61      | 37.59                | 24.80                 | PK            |
| 5   | 5404.5          | 62.81                   | 74.00          | -11.19      | 37.92                | 24.89                 | PK            |
| 6   | 5460            | 59.72                   | 74.00          | -14.28      | 34.73                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G | Humidity (%RH)   | 55.0      |

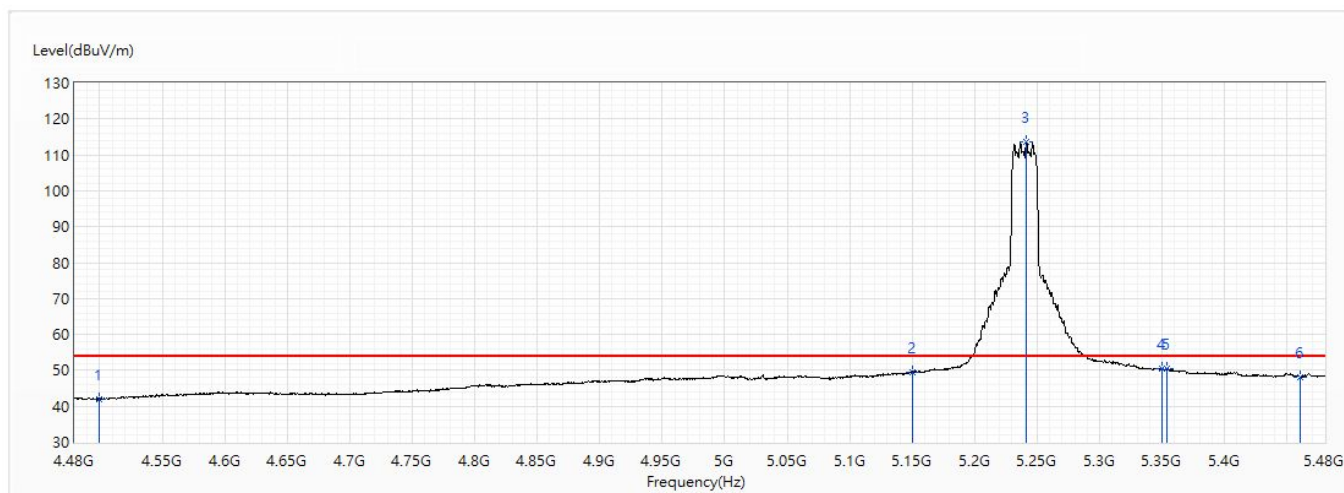


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.00                   | 54.00          | -12.00      | 18.33                | 23.67                 | AV            |
| 2   | 5150            | 49.46                   | 54.00          | -4.54       | 25.02                | 24.44                 | AV            |
| ! 3 | 5241.5          | 113.61                  | 54.00          | 59.61       | 89.00                | 24.61                 | AV            |
| 4   | 5350            | 50.31                   | 54.00          | -3.69       | 25.51                | 24.80                 | AV            |
| 5   | 5354            | 50.32                   | 54.00          | -3.68       | 25.52                | 24.80                 | AV            |
| 6   | 5460            | 48.14                   | 54.00          | -5.86       | 23.15                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G | Humidity (%RH)   | 55.0      |

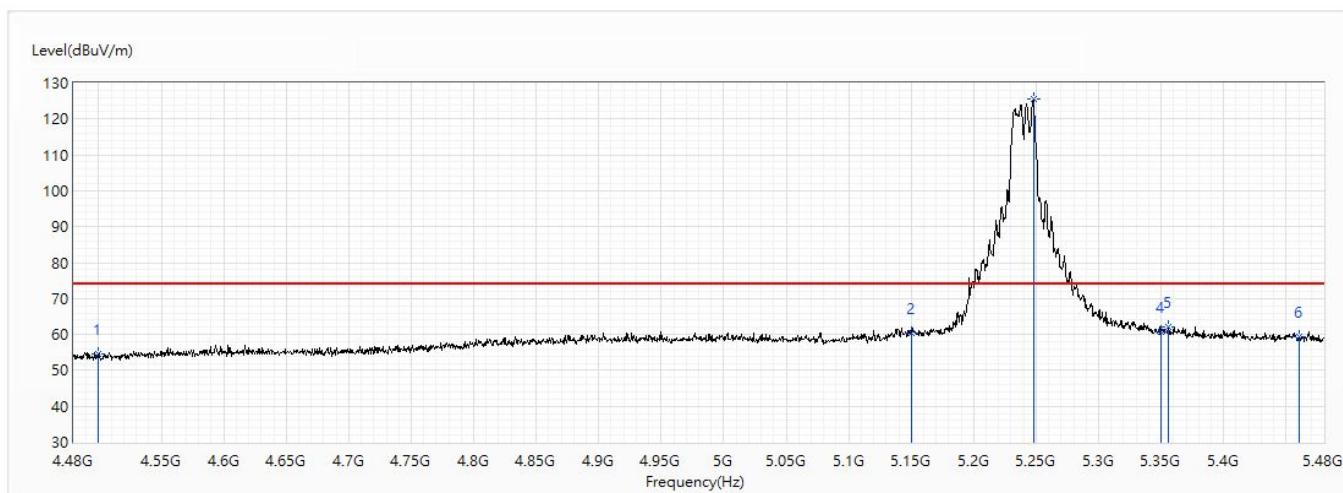


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 54.54                   | 74.00          | -19.46      | 30.87                | 23.67                 | PK            |
| 2   | 5150            | 60.53                   | 74.00          | -13.47      | 36.09                | 24.44                 | PK            |
| ! 3 | 5248            | 125.43                  | 74.00          | 51.43       | 100.81               | 24.62                 | PK            |
| 4   | 5350            | 60.84                   | 74.00          | -13.16      | 36.04                | 24.80                 | PK            |
| 5   | 5356            | 62.08                   | 74.00          | -11.92      | 37.27                | 24.81                 | PK            |
| 6   | 5460            | 59.25                   | 74.00          | -14.75      | 34.26                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G | Humidity (%RH)   | 55.0      |

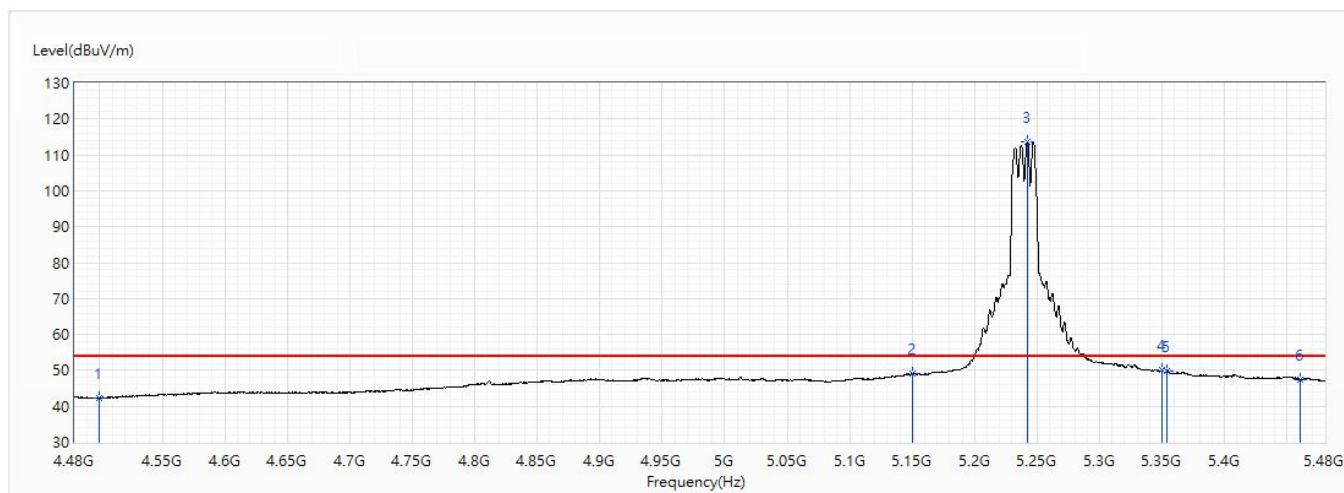


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.17                   | 54.00          | -11.83      | 18.50                | 23.67                 | AV            |
| 2   | 5150            | 49.11                   | 54.00          | -4.89       | 24.67                | 24.44                 | AV            |
| ! 3 | 5242            | 113.65                  | 54.00          | 59.65       | 89.04                | 24.61                 | AV            |
| 4   | 5350            | 50.12                   | 54.00          | -3.88       | 25.32                | 24.80                 | AV            |
| 5   | 5354            | 49.65                   | 54.00          | -4.35       | 24.85                | 24.80                 | AV            |
| 6   | 5460            | 47.40                   | 54.00          | -6.60       | 22.41                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G | Humidity (%RH)   | 55.0      |

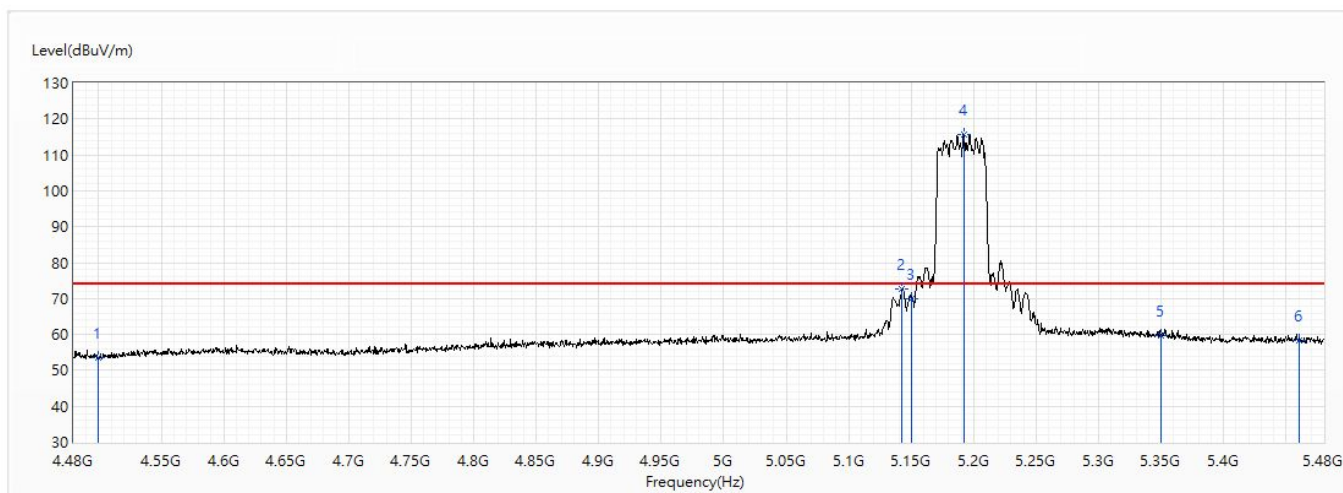


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 53.66                   | 74.00          | -20.34      | 29.99                | 23.67                 | PK            |
| 2   | 5142.5          | 72.63                   | 74.00          | -1.37       | 48.20                | 24.43                 | PK            |
| 3   | 5150            | 70.03                   | 74.00          | -3.97       | 45.59                | 24.44                 | PK            |
| ! 4 | 5192            | 115.64                  | 74.00          | 41.64       | 91.12                | 24.52                 | PK            |
| 5   | 5350            | 59.79                   | 74.00          | -14.21      | 34.99                | 24.80                 | PK            |
| 6   | 5460            | 58.40                   | 74.00          | -15.60      | 33.41                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G | Humidity (%RH)   | 55.0      |

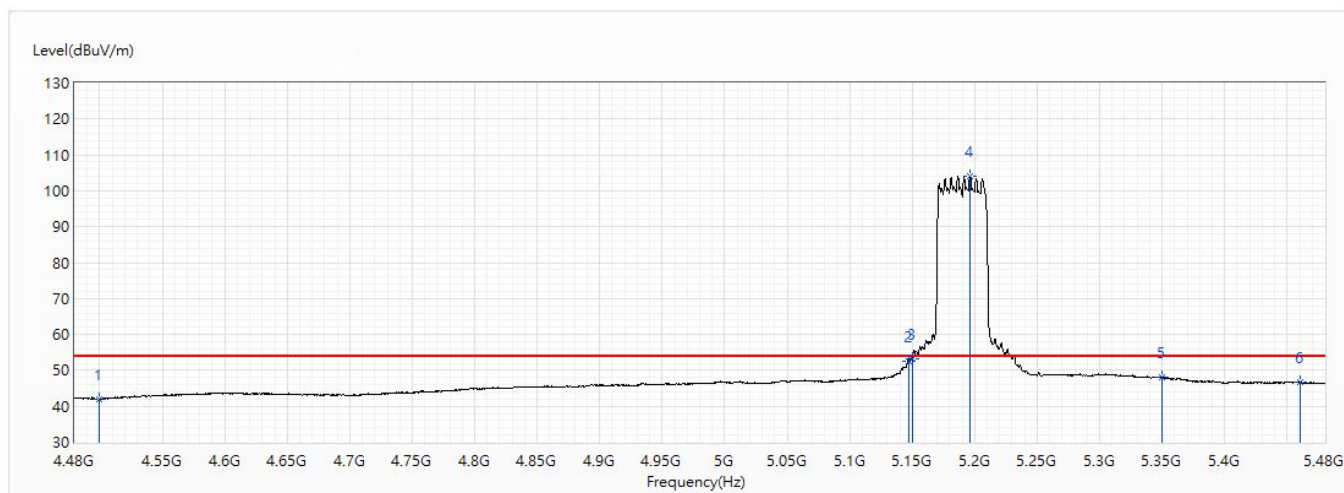


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.10                   | 54.00          | -11.90      | 18.43                | 23.67                 | AV            |
| 2   | 5147.5          | 52.45                   | 54.00          | -1.55       | 28.01                | 24.44                 | AV            |
| 3   | 5150            | 53.28                   | 54.00          | -0.72       | 28.84                | 24.44                 | AV            |
| ! 4 | 5196.5          | 104.14                  | 54.00          | 50.14       | 79.61                | 24.53                 | AV            |
| 5   | 5350            | 47.99                   | 54.00          | -6.01       | 23.19                | 24.80                 | AV            |
| 6   | 5460            | 46.61                   | 54.00          | -7.39       | 21.62                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G | Humidity (%RH)   | 55.0      |

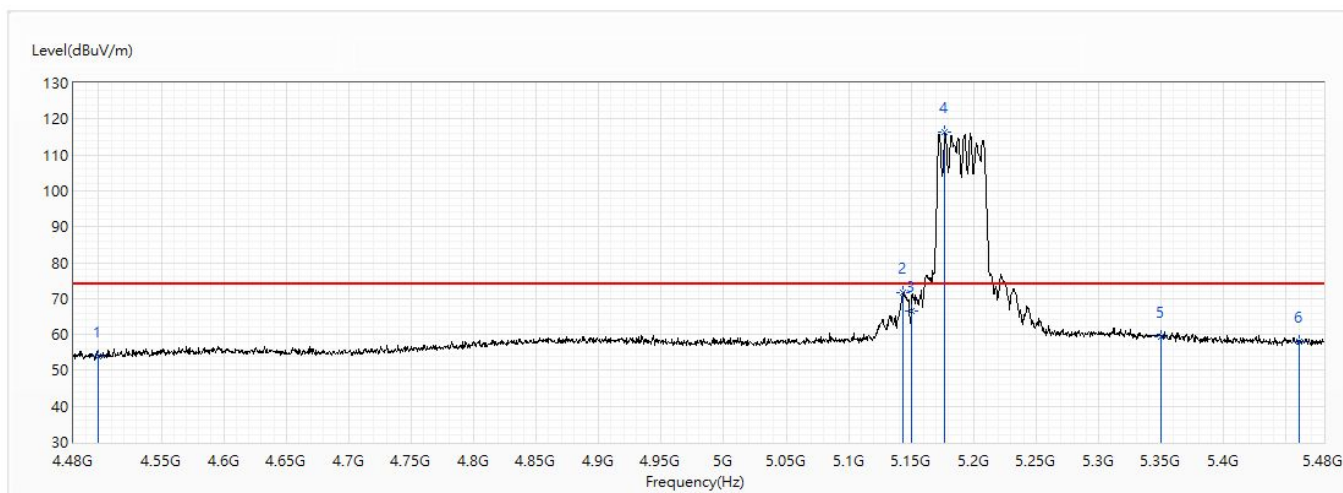


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 54.03                   | 74.00          | -19.97      | 30.36                | 23.67                 | PK            |
| 2   | 5143.5          | 71.48                   | 74.00          | -2.52       | 47.05                | 24.43                 | PK            |
| 3   | 5150            | 66.41                   | 74.00          | -7.59       | 41.97                | 24.44                 | PK            |
| ! 4 | 5177            | 116.18                  | 74.00          | 42.18       | 91.68                | 24.50                 | PK            |
| 5   | 5350            | 59.26                   | 74.00          | -14.74      | 34.46                | 24.80                 | PK            |
| 6   | 5460            | 57.99                   | 74.00          | -16.01      | 33.00                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G | Humidity (%RH)   | 55.0      |

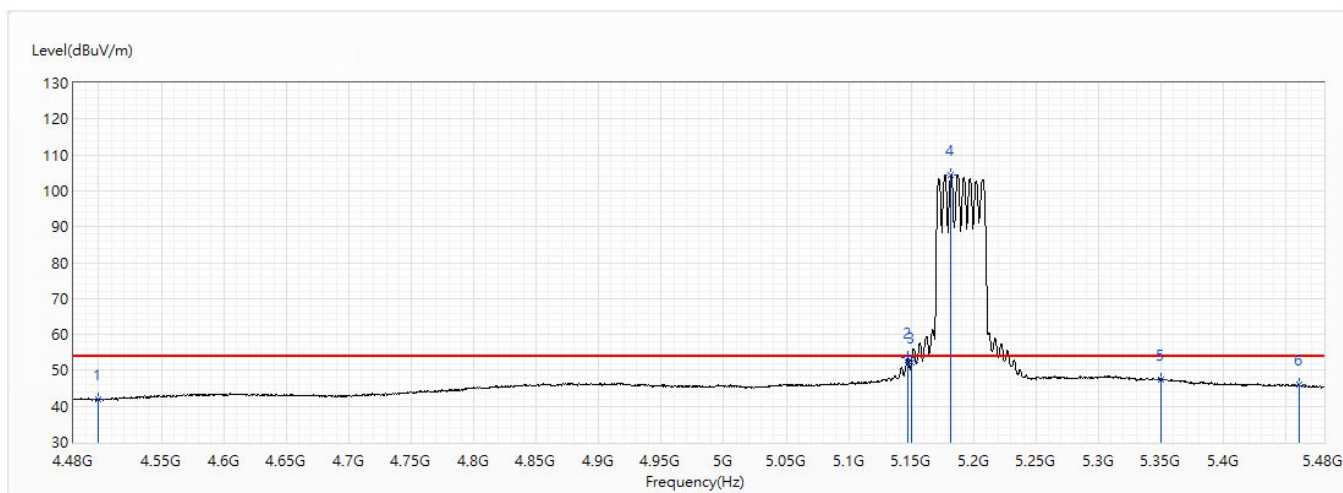


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.00                   | 54.00          | -12.00      | 18.33                | 23.67                 | AV            |
| 2   | 5147            | 53.65                   | 54.00          | -0.35       | 29.21                | 24.44                 | AV            |
| 3   | 5150            | 52.14                   | 54.00          | -1.86       | 27.70                | 24.44                 | AV            |
| ! 4 | 5182            | 104.43                  | 54.00          | 50.43       | 79.93                | 24.50                 | AV            |
| 5   | 5350            | 47.45                   | 54.00          | -6.55       | 22.65                | 24.80                 | AV            |
| 6   | 5460            | 45.97                   | 54.00          | -8.03       | 20.98                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G | Humidity (%RH)   | 55.0      |

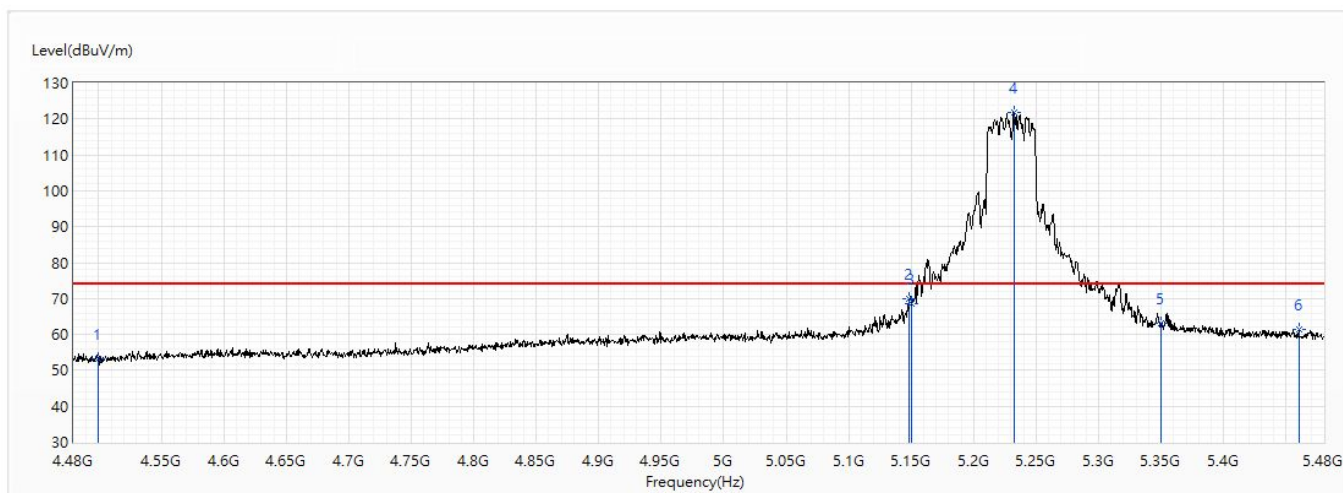


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 53.07                   | 74.00          | -20.93      | 29.40                | 23.67                 | PK            |
| 2   | 5148.5          | 69.85                   | 74.00          | -4.15       | 45.41                | 24.44                 | PK            |
| 3   | 5150            | 68.59                   | 74.00          | -5.41       | 44.15                | 24.44                 | PK            |
| ! 4 | 5232            | 121.91                  | 74.00          | 47.91       | 97.32                | 24.59                 | PK            |
| 5   | 5350            | 63.10                   | 74.00          | -10.90      | 38.30                | 24.80                 | PK            |
| 6   | 5460            | 61.29                   | 74.00          | -12.71      | 36.30                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G | Humidity (%RH)   | 55.0      |

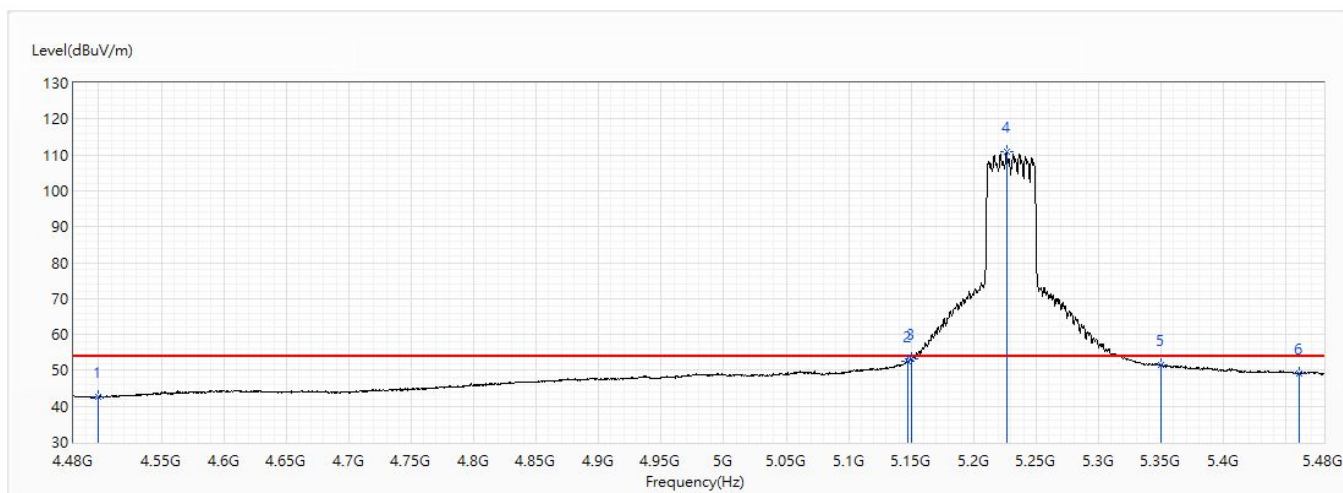


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.60                   | 54.00          | -11.40      | 18.93                | 23.67                 | AV            |
| 2   | 5147.5          | 52.57                   | 54.00          | -1.43       | 28.13                | 24.44                 | AV            |
| 3   | 5150            | 53.24                   | 54.00          | -0.76       | 28.80                | 24.44                 | AV            |
| ! 4 | 5226.5          | 110.97                  | 54.00          | 56.97       | 86.38                | 24.59                 | AV            |
| 5   | 5350            | 51.56                   | 54.00          | -2.44       | 26.76                | 24.80                 | AV            |
| 6   | 5460            | 49.08                   | 54.00          | -4.92       | 24.09                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| est Voltage    | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G | Humidity (%RH)   | 55.0      |

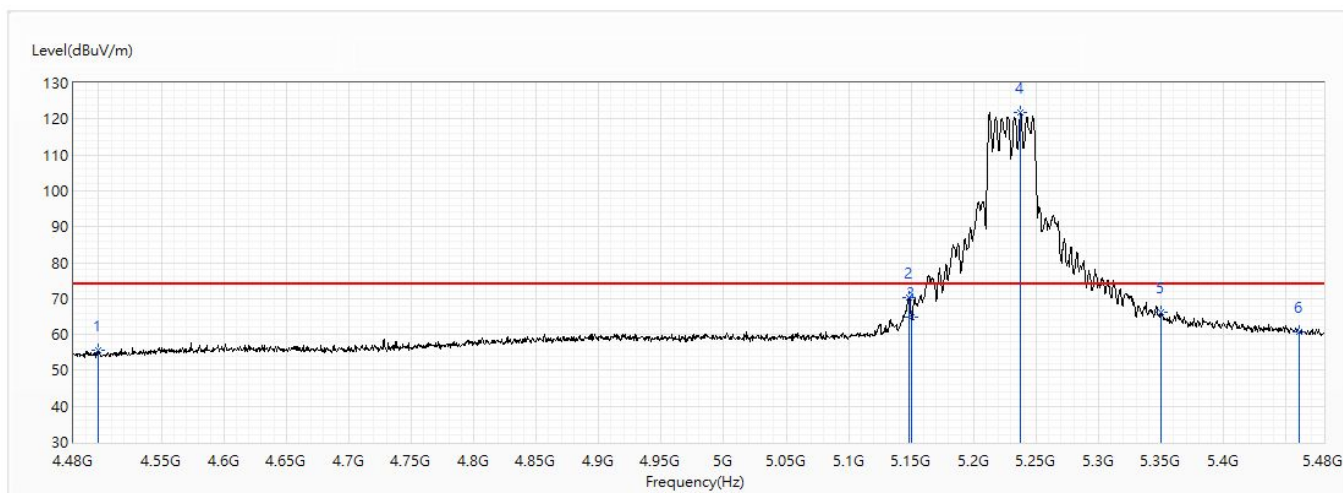


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 55.50                   | 74.00          | -18.50      | 31.83                | 23.67                 | PK            |
| 2   | 5148            | 70.17                   | 74.00          | -3.83       | 45.73                | 24.44                 | PK            |
| 3   | 5150            | 64.94                   | 74.00          | -9.06       | 40.50                | 24.44                 | PK            |
| ! 4 | 5237            | 121.80                  | 74.00          | 47.80       | 97.20                | 24.60                 | PK            |
| 5   | 5350            | 66.15                   | 74.00          | -7.85       | 41.35                | 24.80                 | PK            |
| 6   | 5460            | 60.73                   | 74.00          | -13.27      | 35.74                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G | Humidity (%RH)   | 55.0      |

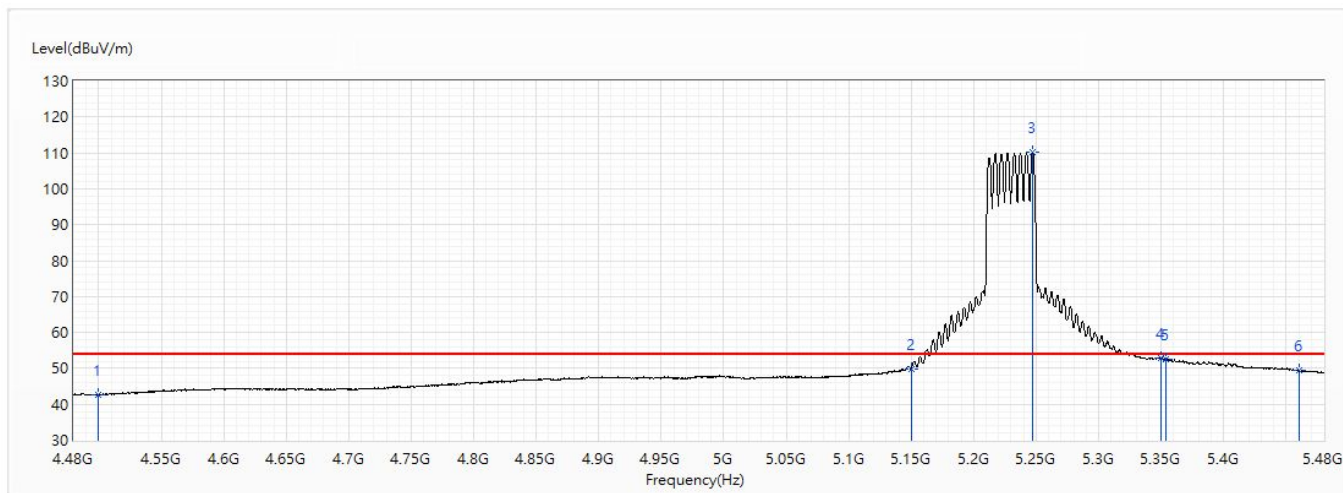


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.59                   | 54.00          | -11.41      | 18.92                | 23.67                 | AV            |
| 2   | 5150            | 49.95                   | 54.00          | -4.05       | 25.51                | 24.44                 | AV            |
| ! 3 | 5247.5          | 110.19                  | 54.00          | 56.19       | 85.57                | 24.62                 | AV            |
| 4   | 5350            | 52.86                   | 54.00          | -1.14       | 28.06                | 24.80                 | AV            |
| 5   | 5353.5          | 52.55                   | 54.00          | -1.45       | 27.75                | 24.80                 | AV            |
| 6   | 5460            | 49.32                   | 54.00          | -4.68       | 24.33                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G | Humidity (%RH)   | 55.0      |

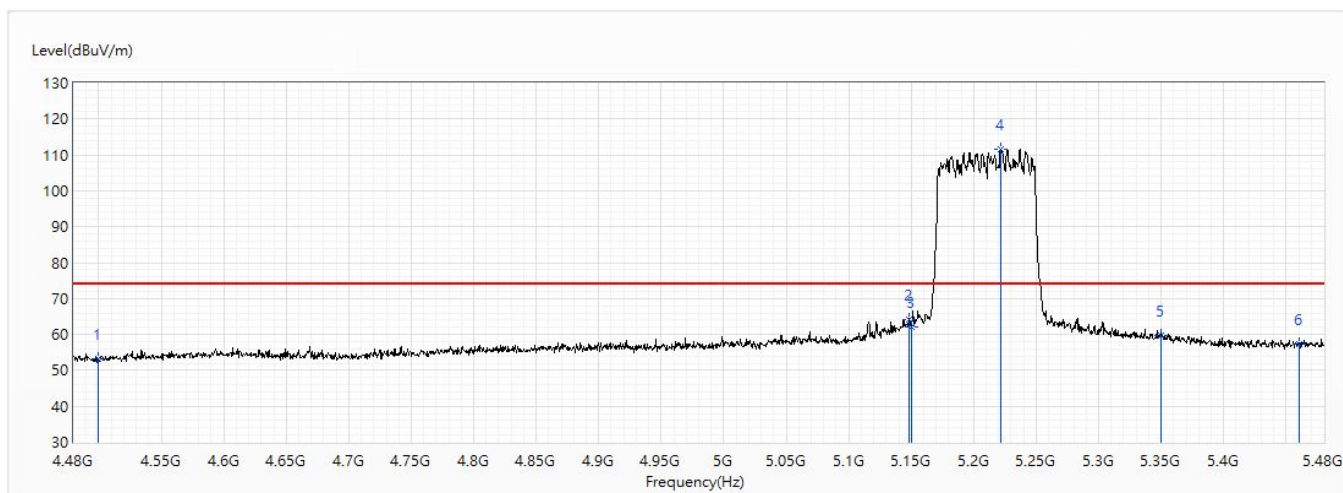


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 53.23                   | 74.00          | -20.77      | 29.56                | 23.67                 | PK            |
| 2   | 5148            | 64.26                   | 74.00          | -9.74       | 39.82                | 24.44                 | PK            |
| 3   | 5150            | 62.17                   | 74.00          | -11.83      | 37.73                | 24.44                 | PK            |
| ! 4 | 5221.5          | 111.69                  | 74.00          | 37.69       | 87.13                | 24.56                 | PK            |
| 5   | 5350            | 59.78                   | 74.00          | -14.22      | 34.98                | 24.80                 | PK            |
| 6   | 5460            | 57.23                   | 74.00          | -16.77      | 32.24                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Horizontal                               | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G | Humidity (%RH)   | 55.0      |

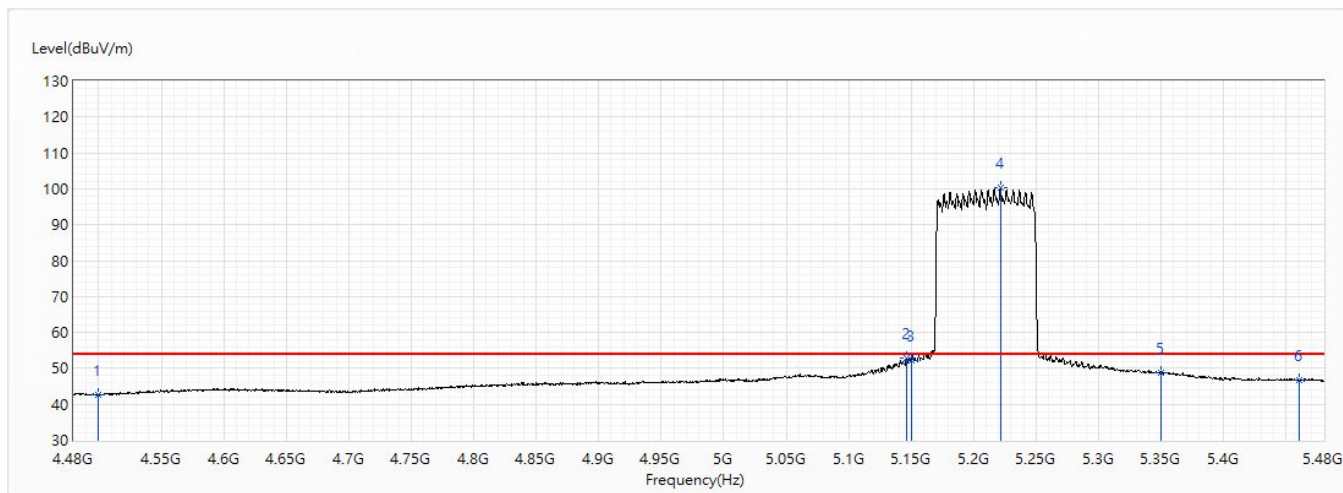


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.53                   | 54.00          | -11.47      | 18.86                | 23.67                 | AV            |
| 2   | 5146            | 52.71                   | 54.00          | -1.29       | 28.27                | 24.44                 | AV            |
| 3   | 5150            | 52.20                   | 54.00          | -1.80       | 27.76                | 24.44                 | AV            |
| ! 4 | 5221.5          | 100.23                  | 54.00          | 46.23       | 75.67                | 24.56                 | AV            |
| 5   | 5350            | 48.69                   | 54.00          | -5.31       | 23.89                | 24.80                 | AV            |
| 6   | 5460            | 46.63                   | 54.00          | -7.37       | 21.64                | 24.99                 | AV            |

## Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G | Humidity (%RH)   | 55.0      |

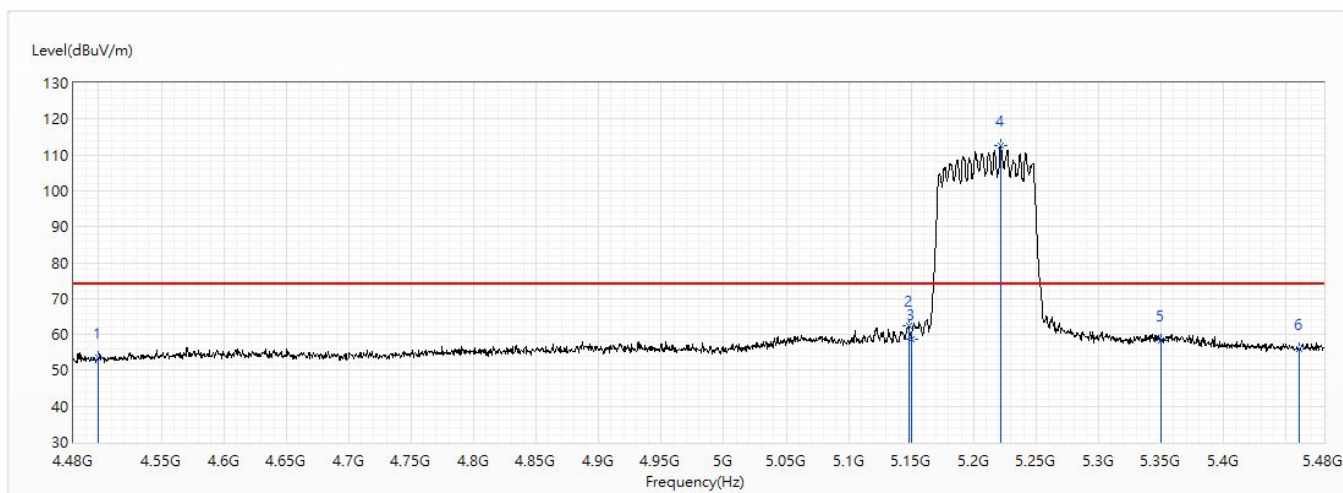


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 53.45                   | 74.00          | -20.55      | 29.78                | 23.67                 | PK            |
| 2   | 5148            | 62.50                   | 74.00          | -11.50      | 38.06                | 24.44                 | PK            |
| 3   | 5150            | 58.78                   | 74.00          | -15.22      | 34.34                | 24.44                 | PK            |
| ! 4 | 5221.5          | 112.52                  | 74.00          | 38.52       | 87.96                | 24.56                 | PK            |
| 5   | 5350            | 58.41                   | 74.00          | -15.59      | 33.61                | 24.80                 | PK            |
| 6   | 5460            | 55.97                   | 74.00          | -18.03      | 30.98                | 24.99                 | PK            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                          |                  |           |
|----------------|------------------------------------------|------------------|-----------|
| Model No       | D2260G                                   | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                             | Test Date        | 2020/8/21 |
| Test Mode      | Mode 2: CDD Mode                         | Engineer         | Scott     |
| Polarity       | Vertical                                 | Temperature (°C) | 24.5      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G | Humidity (%RH)   | 55.0      |

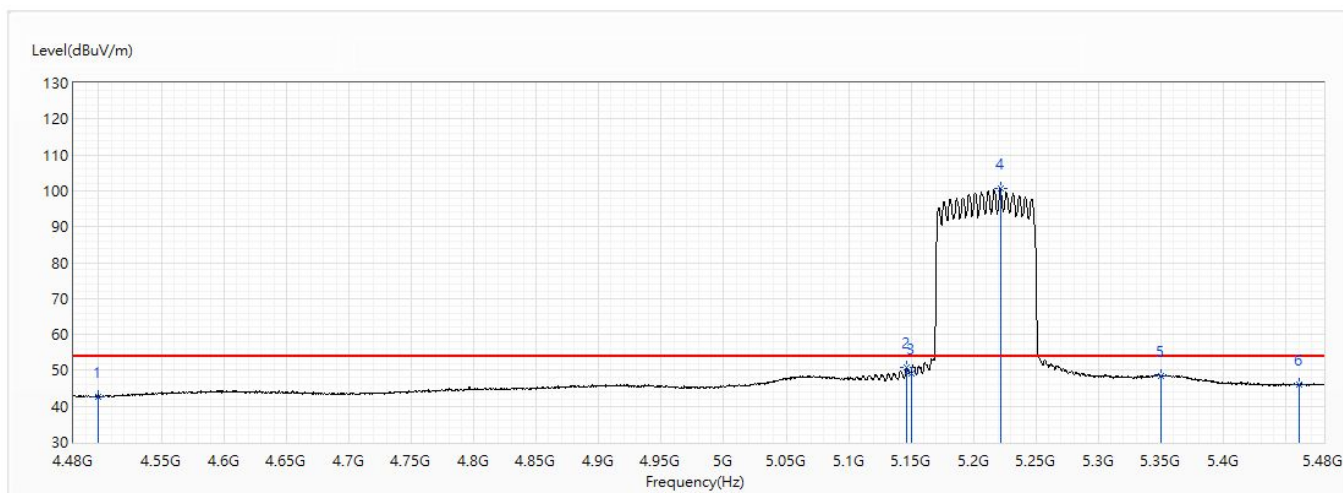


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 4500            | 42.64                   | 54.00          | -11.36      | 18.97                | 23.67                 | AV            |
| 2   | 5146.5          | 50.91                   | 54.00          | -3.09       | 26.47                | 24.44                 | AV            |
| 3   | 5150            | 49.13                   | 54.00          | -4.87       | 24.69                | 24.44                 | AV            |
| ! 4 | 5221.5          | 100.61                  | 54.00          | 46.61       | 76.05                | 24.56                 | AV            |
| 5   | 5350            | 48.49                   | 54.00          | -5.51       | 23.69                | 24.80                 | AV            |
| 6   | 5460            | 46.04                   | 54.00          | -7.96       | 21.05                | 24.99                 | AV            |

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Horizontal                          | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

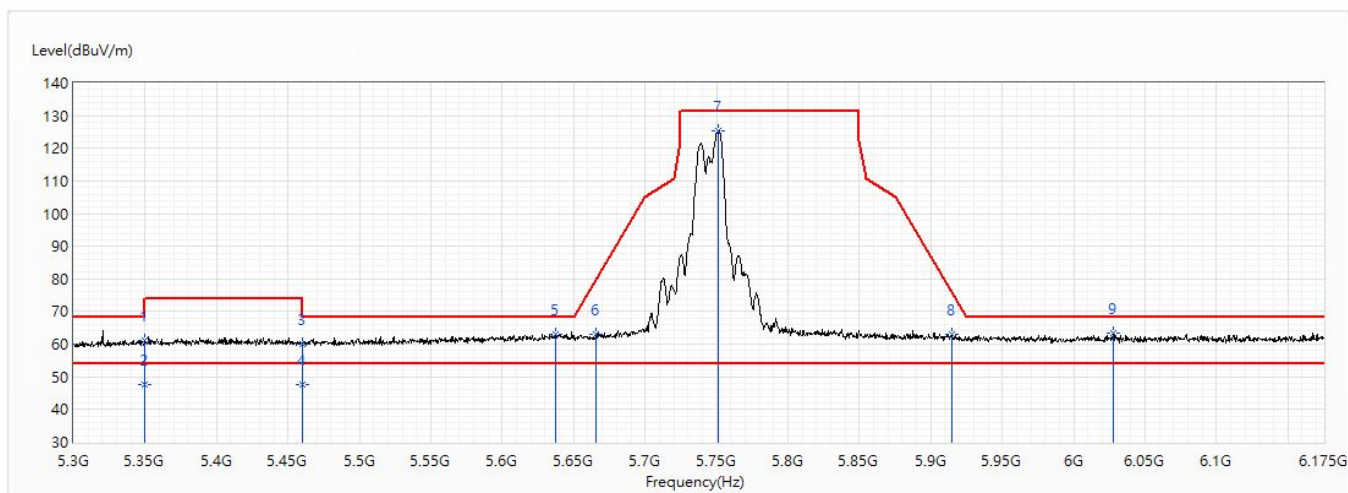


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 61.08                   | 74.00          | -12.92      | 36.28                | 24.80                 | PK            |
| 2   | 5350            | 47.56                   | 54.00          | -6.44       | 22.76                | 24.80                 | AV            |
| 3   | 5460            | 60.14                   | 74.00          | -13.86      | 35.15                | 24.99                 | PK            |
| 4   | 5460            | 47.59                   | 54.00          | -6.41       | 22.60                | 24.99                 | AV            |
| 5   | 5637.313        | 62.89                   | 68.20          | -5.31       | 37.42                | 25.47                 | PK            |
| 6   | 5665.75         | 63.07                   | 79.89          | -16.82      | 37.52                | 25.55                 | PK            |
| 7   | 5751.5          | 125.50                  | 131.20         | -5.70       | 99.70                | 25.80                 | PK            |
| 8   | 5914.688        | 62.86                   | 75.81          | -12.95      | 36.58                | 26.28                 | PK            |
| * 9 | 6028            | 63.30                   | 68.20          | -4.90       | 36.64                | 26.66                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Vertical                            | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

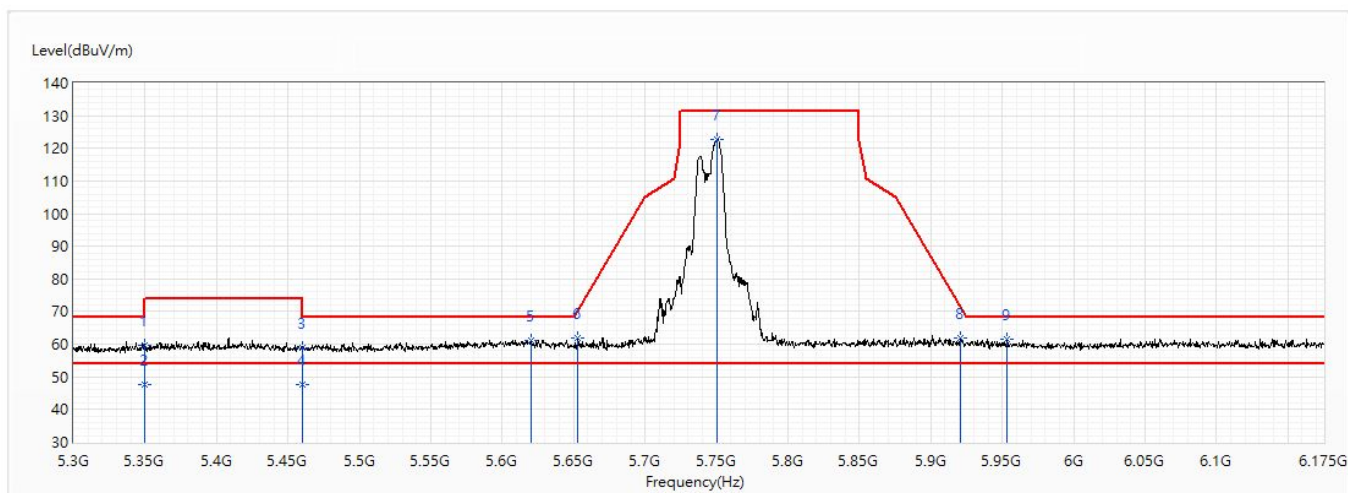


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.54                   | 74.00          | -14.46      | 34.74                | 24.80                 | PK            |
| 2   | 5350            | 47.49                   | 54.00          | -6.51       | 22.69                | 24.80                 | AV            |
| 3   | 5460            | 58.97                   | 74.00          | -15.03      | 33.98                | 24.99                 | PK            |
| * 4 | 5460            | 47.66                   | 54.00          | -6.34       | 22.67                | 24.99                 | AV            |
| 5   | 5619.813        | 61.13                   | 68.20          | -7.07       | 35.71                | 25.42                 | PK            |
| 6   | 5653.063        | 61.76                   | 70.48          | -8.71       | 36.24                | 25.52                 | PK            |
| 7   | 5750.625        | 122.79                  | 131.20         | -8.41       | 96.99                | 25.80                 | PK            |
| 8   | 5920.375        | 61.75                   | 71.61          | -9.86       | 35.46                | 26.29                 | PK            |
| 9   | 5953.625        | 61.66                   | 68.20          | -6.54       | 35.27                | 26.39                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Horizontal                          | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

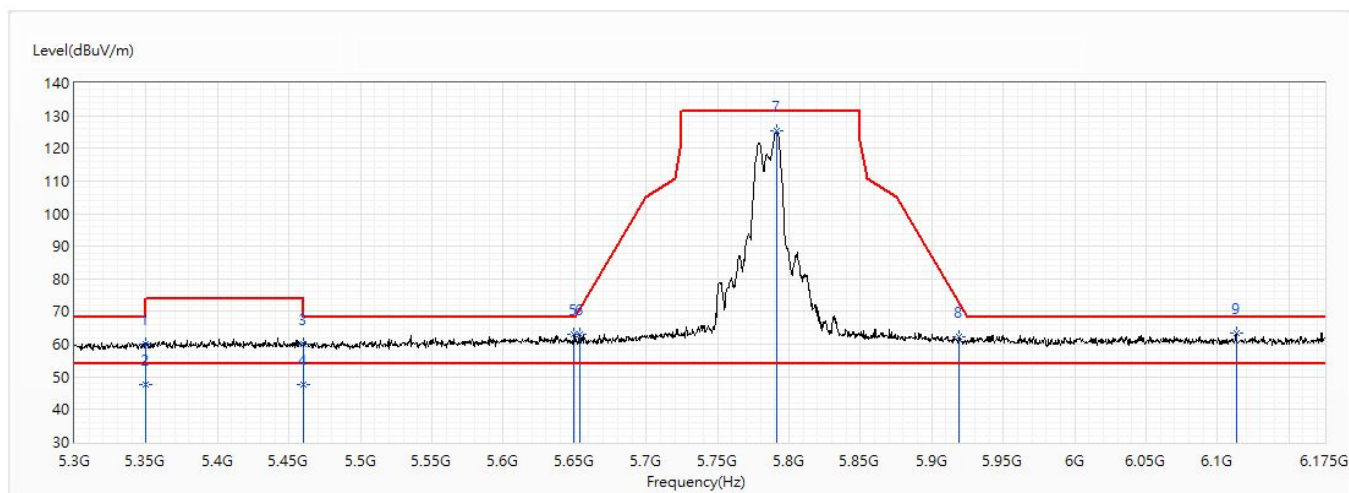


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.01                   | 74.00          | -13.99      | 35.21                | 24.80                 | PK            |
| 2   | 5350            | 47.48                   | 54.00          | -6.52       | 22.68                | 24.80                 | AV            |
| 3   | 5460            | 60.11                   | 74.00          | -13.89      | 35.12                | 24.99                 | PK            |
| 4   | 5460            | 47.57                   | 54.00          | -6.43       | 22.58                | 24.99                 | AV            |
| 5   | 5649.563        | 63.04                   | 68.20          | -5.16       | 37.54                | 25.50                 | PK            |
| 6   | 5653.5          | 63.13                   | 70.80          | -7.67       | 37.61                | 25.52                 | PK            |
| 7   | 5791.75         | 125.32                  | 131.20         | -5.88       | 99.39                | 25.93                 | PK            |
| 8   | 5918.625        | 62.30                   | 72.90          | -10.60      | 36.02                | 26.28                 | PK            |
| * 9 | 6113.313        | 63.25                   | 68.20          | -4.95       | 36.21                | 27.04                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Vertical                            | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

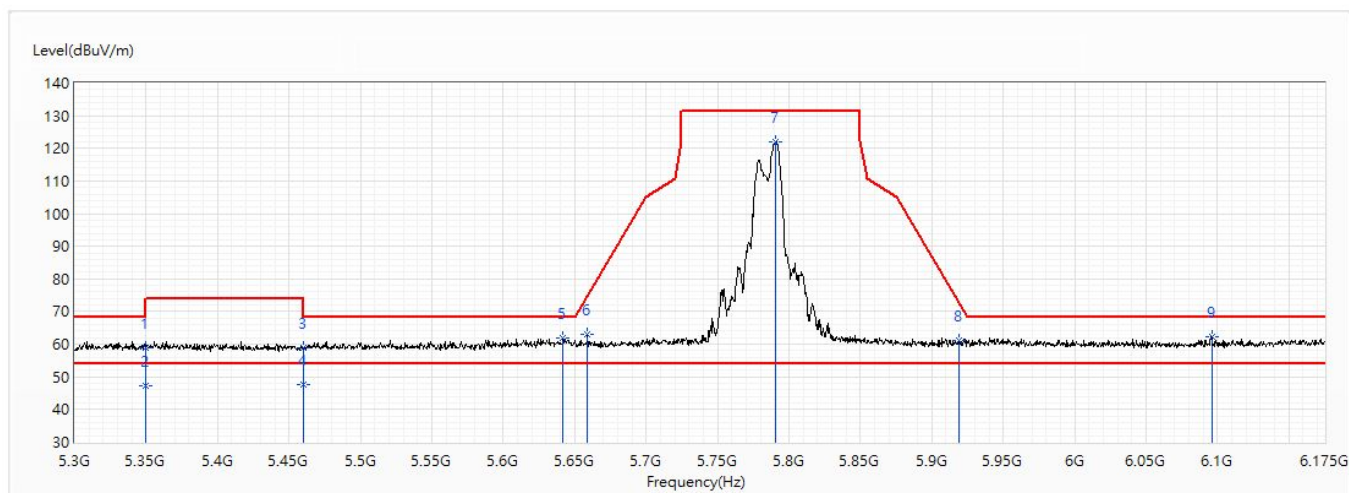


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.05                   | 74.00          | -14.95      | 34.25                | 24.80                 | PK            |
| 2   | 5350            | 47.45                   | 54.00          | -6.55       | 22.65                | 24.80                 | AV            |
| 3   | 5460            | 58.83                   | 74.00          | -15.17      | 33.84                | 24.99                 | PK            |
| 4   | 5460            | 47.58                   | 54.00          | -6.42       | 22.59                | 24.99                 | AV            |
| 5   | 5641.688        | 62.02                   | 68.20          | -6.18       | 36.53                | 25.49                 | PK            |
| 6   | 5658.75         | 62.98                   | 74.70          | -11.72      | 37.44                | 25.54                 | PK            |
| 7   | 5790.875        | 121.94                  | 131.20         | -9.26       | 96.03                | 25.91                 | PK            |
| 8   | 5919.063        | 61.27                   | 72.58          | -11.31      | 34.99                | 26.28                 | PK            |
| * 9 | 6095.813        | 62.35                   | 68.20          | -5.85       | 35.39                | 26.96                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Horizontal                          | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

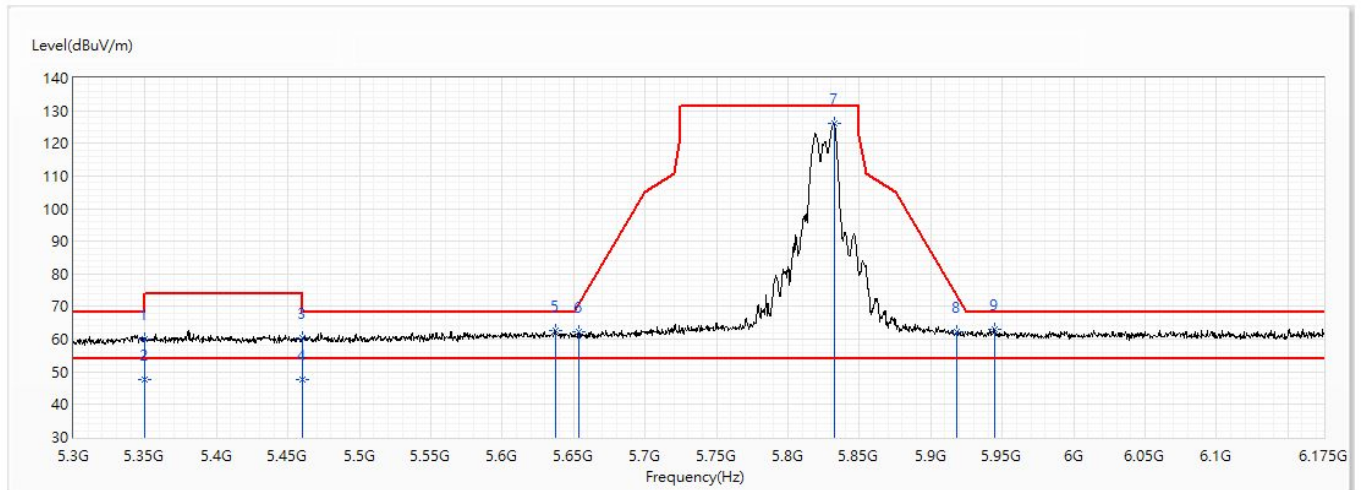


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.99                   | 74.00          | -14.01      | 35.19                | 24.80                 | PK            |
| 2   | 5350            | 47.49                   | 54.00          | -6.51       | 22.69                | 24.80                 | AV            |
| 3   | 5460            | 60.50                   | 74.00          | -13.50      | 35.51                | 24.99                 | PK            |
| 4   | 5460            | 47.62                   | 54.00          | -6.38       | 22.63                | 24.99                 | AV            |
| 5   | 5637.313        | 62.70                   | 68.20          | -5.50       | 37.23                | 25.47                 | PK            |
| 6   | 5653.5          | 62.39                   | 70.80          | -8.41       | 36.87                | 25.52                 | PK            |
| 7   | 5832.438        | 126.05                  | 131.20         | -5.15       | 100.01               | 26.04                 | PK            |
| 8   | 5918.188        | 62.38                   | 73.22          | -10.84      | 36.10                | 26.28                 | PK            |
| * 9 | 5944.875        | 63.15                   | 68.20          | -5.05       | 36.79                | 26.36                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                     |                  |           |
|----------------|-------------------------------------|------------------|-----------|
| Model No       | D2260G                              | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                        | Test Date        | 2020/10/8 |
| Test Mode      | Mode 1: SISO Mode                   | Engineer         | Lion      |
| Polarity       | Vertical                            | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11a_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

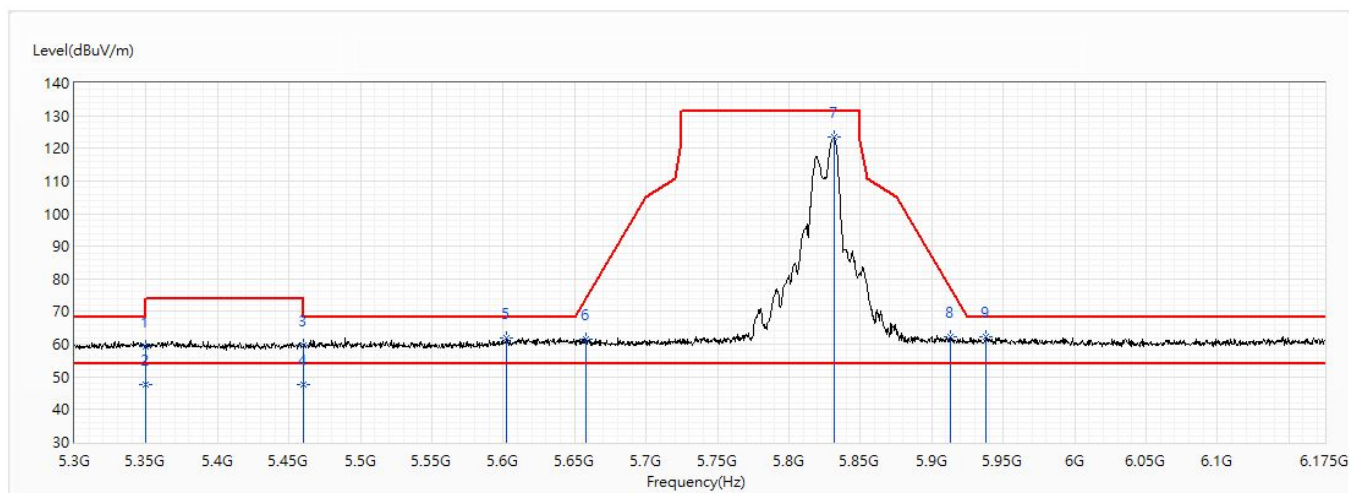


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.34                   | 74.00          | -14.66      | 34.54                | 24.80                 | PK            |
| 2   | 5350            | 47.54                   | 54.00          | -6.46       | 22.74                | 24.80                 | AV            |
| 3   | 5460            | 59.55                   | 74.00          | -14.45      | 34.56                | 24.99                 | PK            |
| 4   | 5460            | 47.61                   | 54.00          | -6.39       | 22.62                | 24.99                 | AV            |
| 5   | 5602.313        | 62.00                   | 68.20          | -6.20       | 36.64                | 25.36                 | PK            |
| 6   | 5657.875        | 61.71                   | 74.05          | -12.34      | 36.19                | 25.52                 | PK            |
| 7   | 5831.563        | 123.43                  | 131.20         | -7.77       | 97.39                | 26.04                 | PK            |
| 8   | 5912.938        | 62.31                   | 77.10          | -14.78      | 36.04                | 26.27                 | PK            |
| * 9 | 5937.875        | 62.41                   | 68.20          | -5.79       | 36.07                | 26.34                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

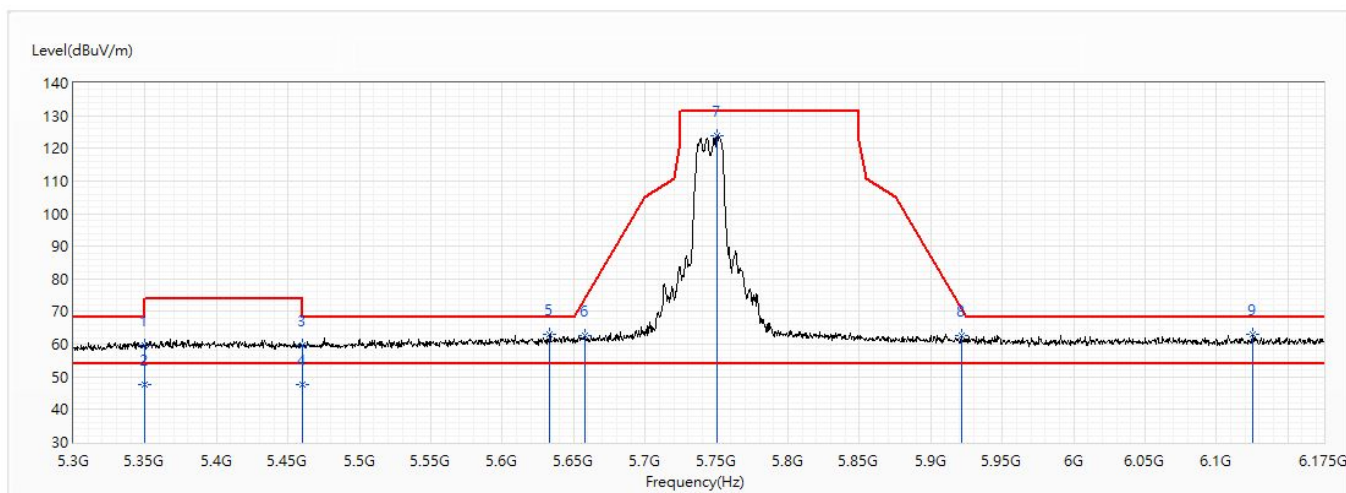


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.69                   | 74.00          | -14.31      | 34.89                | 24.80                 | PK            |
| 2   | 5350            | 47.51                   | 54.00          | -6.49       | 22.71                | 24.80                 | AV            |
| 3   | 5460            | 59.68                   | 74.00          | -14.32      | 34.69                | 24.99                 | PK            |
| 4   | 5460            | 47.62                   | 54.00          | -6.38       | 22.63                | 24.99                 | AV            |
| 5   | 5633.375        | 63.06                   | 68.20          | -5.14       | 37.60                | 25.46                 | PK            |
| 6   | 5657.875        | 62.65                   | 74.05          | -11.40      | 37.13                | 25.52                 | PK            |
| 7   | 5750.188        | 124.01                  | 131.20         | -7.19       | 98.22                | 25.79                 | PK            |
| 8   | 5921.25         | 62.73                   | 70.96          | -8.23       | 36.44                | 26.29                 | PK            |
| * 9 | 6125.563        | 63.08                   | 68.20          | -5.12       | 35.98                | 27.10                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

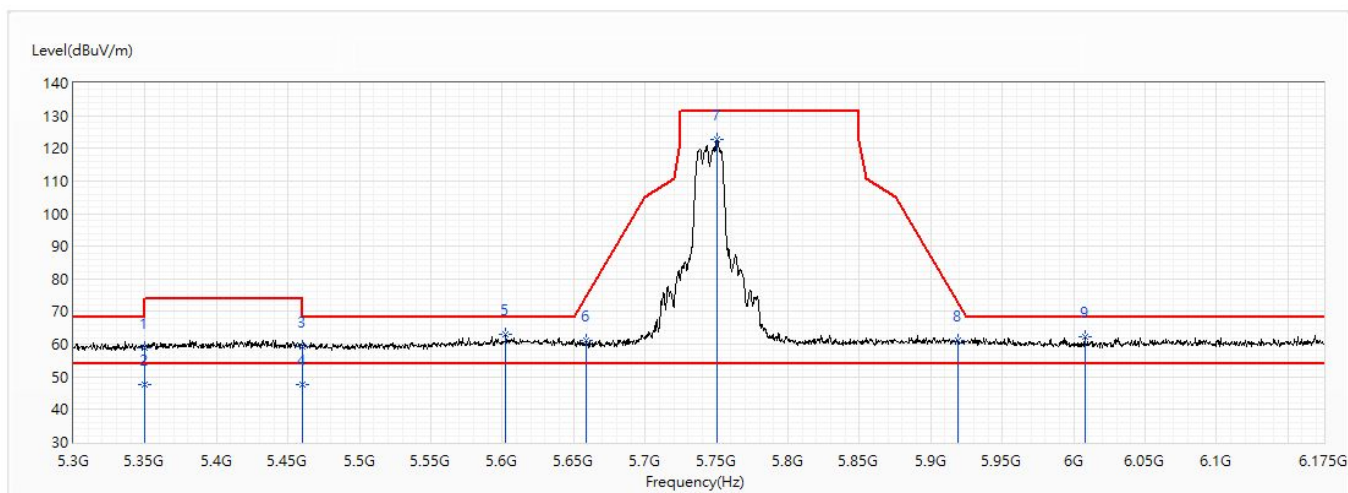


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 58.98                   | 74.00          | -15.02      | 34.18                | 24.80                 | PK            |
| 2   | 5350            | 47.54                   | 54.00          | -6.46       | 22.74                | 24.80                 | AV            |
| 3   | 5460            | 59.17                   | 74.00          | -14.83      | 34.18                | 24.99                 | PK            |
| 4   | 5460            | 47.62                   | 54.00          | -6.38       | 22.63                | 24.99                 | AV            |
| * 5 | 5602.313        | 62.92                   | 68.20          | -5.28       | 37.56                | 25.36                 | PK            |
| 6   | 5658.75         | 61.01                   | 74.70          | -13.69      | 35.47                | 25.54                 | PK            |
| 7   | 5750.625        | 122.73                  | 131.20         | -8.47       | 96.93                | 25.80                 | PK            |
| 8   | 5918.625        | 60.99                   | 72.90          | -11.91      | 34.71                | 26.28                 | PK            |
| 9   | 6007.875        | 62.26                   | 68.20          | -5.94       | 35.70                | 26.56                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

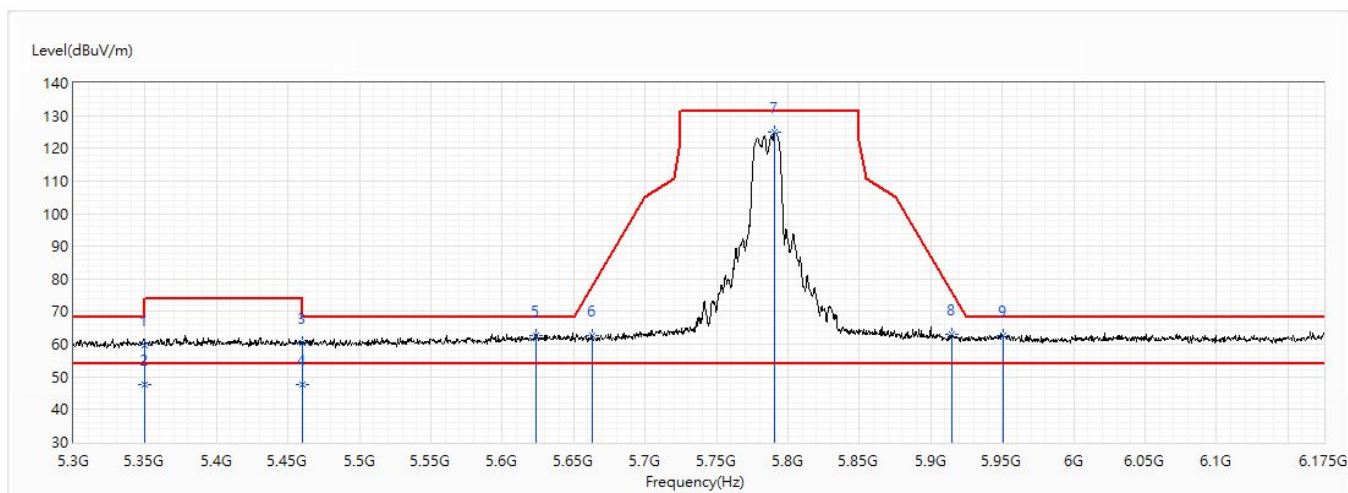


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.60                   | 74.00          | -14.40      | 34.80                | 24.80                 | PK            |
| 2   | 5350            | 47.52                   | 54.00          | -6.48       | 22.72                | 24.80                 | AV            |
| 3   | 5460            | 60.50                   | 74.00          | -13.50      | 35.51                | 24.99                 | PK            |
| 4   | 5460            | 47.68                   | 54.00          | -6.32       | 22.69                | 24.99                 | AV            |
| 5   | 5623.75         | 62.82                   | 68.20          | -5.38       | 37.40                | 25.42                 | PK            |
| 6   | 5662.688        | 62.69                   | 77.62          | -14.93      | 37.15                | 25.54                 | PK            |
| 7   | 5790.438        | 125.11                  | 131.20         | -6.09       | 99.20                | 25.91                 | PK            |
| 8   | 5915.125        | 63.17                   | 75.48          | -12.32      | 36.89                | 26.28                 | PK            |
| * 9 | 5951            | 62.83                   | 68.20          | -5.37       | 36.45                | 26.38                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

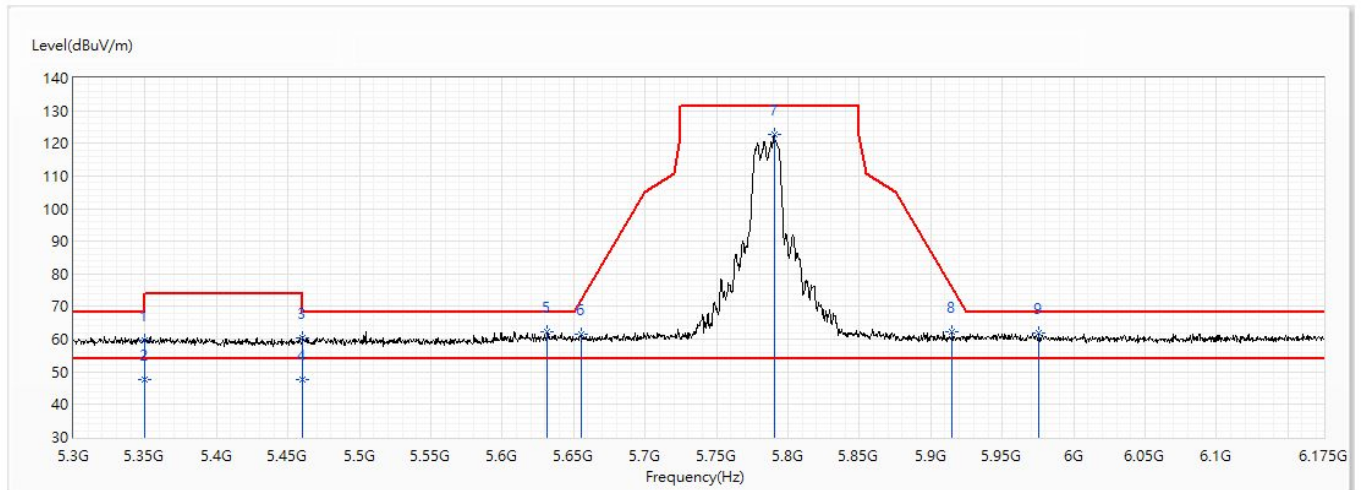


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.79                   | 74.00          | -14.21      | 34.99                | 24.80                 | PK            |
| 2   | 5350            | 47.56                   | 54.00          | -6.44       | 22.76                | 24.80                 | AV            |
| 3   | 5460            | 60.47                   | 74.00          | -13.53      | 35.48                | 24.99                 | PK            |
| 4   | 5460            | 47.63                   | 54.00          | -6.37       | 22.64                | 24.99                 | AV            |
| * 5 | 5631.625        | 62.46                   | 68.20          | -5.74       | 37.01                | 25.45                 | PK            |
| 6   | 5655.25         | 61.38                   | 72.10          | -10.72      | 35.86                | 25.52                 | PK            |
| 7   | 5790.438        | 122.63                  | 131.20         | -8.57       | 96.72                | 25.91                 | PK            |
| 8   | 5915.125        | 62.16                   | 75.48          | -13.33      | 35.88                | 26.28                 | PK            |
| 9   | 5975.938        | 61.84                   | 68.20          | -6.36       | 35.38                | 26.46                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

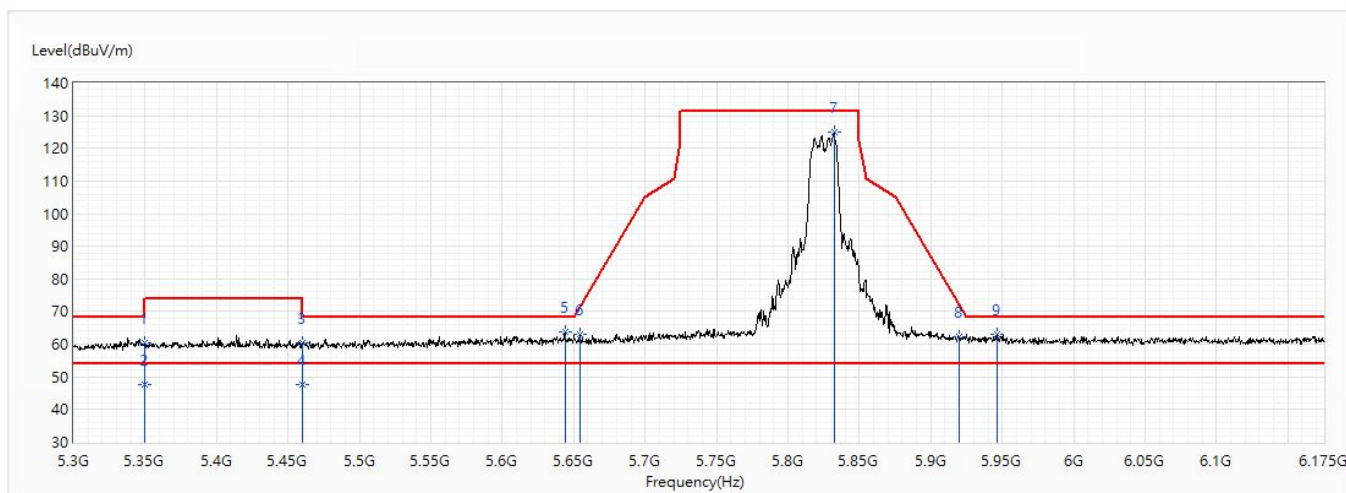


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.38                   | 74.00          | -13.62      | 35.58                | 24.80                 | PK            |
| 2   | 5350            | 47.52                   | 54.00          | -6.48       | 22.72                | 24.80                 | AV            |
| 3   | 5460            | 60.43                   | 74.00          | -13.57      | 35.44                | 24.99                 | PK            |
| 4   | 5460            | 47.61                   | 54.00          | -6.39       | 22.62                | 24.99                 | AV            |
| * 5 | 5643.875        | 63.69                   | 68.20          | -4.51       | 38.20                | 25.49                 | PK            |
| 6   | 5654.375        | 62.88                   | 71.45          | -8.57       | 37.36                | 25.52                 | PK            |
| 7   | 5832.438        | 124.95                  | 131.20         | -6.25       | 98.91                | 26.04                 | PK            |
| 8   | 5919.5          | 62.35                   | 72.25          | -9.90       | 36.06                | 26.29                 | PK            |
| 9   | 5946.188        | 63.05                   | 68.20          | -5.15       | 36.69                | 26.36                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW20M_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

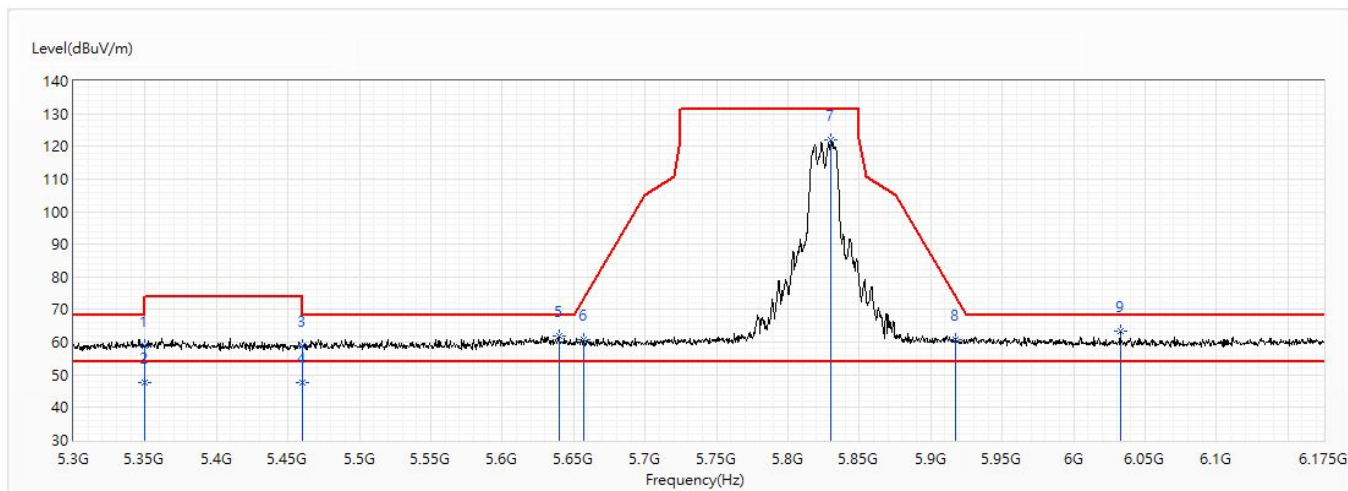


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 58.90                   | 74.00          | -15.10      | 34.10                | 24.80                 | PK            |
| 2   | 5350            | 47.57                   | 54.00          | -6.43       | 22.77                | 24.80                 | AV            |
| 3   | 5460            | 58.95                   | 74.00          | -15.05      | 33.96                | 24.99                 | PK            |
| 4   | 5460            | 47.69                   | 54.00          | -6.31       | 22.70                | 24.99                 | AV            |
| 5   | 5639.5          | 61.99                   | 68.20          | -6.21       | 36.52                | 25.47                 | PK            |
| 6   | 5657.438        | 60.73                   | 73.72          | -12.99      | 35.21                | 25.52                 | PK            |
| 7   | 5830.25         | 121.85                  | 131.20         | -9.35       | 95.82                | 26.03                 | PK            |
| 8   | 5917.313        | 60.95                   | 73.87          | -12.92      | 34.67                | 26.28                 | PK            |
| * 9 | 6032.813        | 63.26                   | 68.20          | -4.94       | 36.59                | 26.67                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW40M_Ant2+3+4+5_Ch151_5.755G | Humidity (%RH)   | 57.0      |

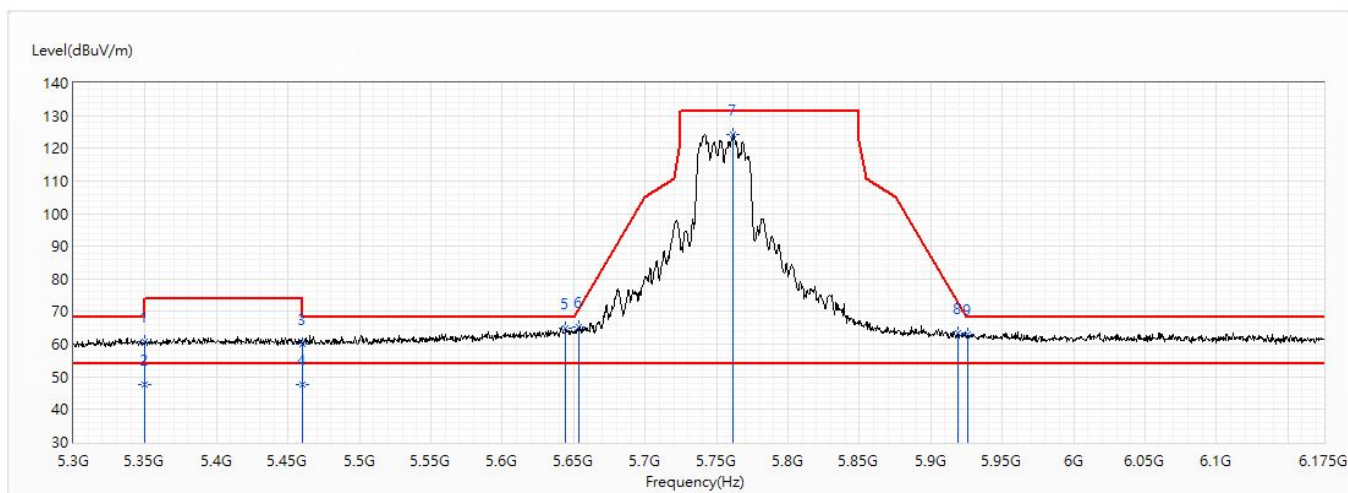


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.62                   | 74.00          | -13.38      | 35.82                | 24.80                 | PK            |
| 2   | 5350            | 47.56                   | 54.00          | -6.44       | 22.76                | 24.80                 | AV            |
| 3   | 5460            | 60.10                   | 74.00          | -13.90      | 35.11                | 24.99                 | PK            |
| 4   | 5460            | 47.69                   | 54.00          | -6.31       | 22.70                | 24.99                 | AV            |
| * 5 | 5644.313        | 64.96                   | 68.20          | -3.24       | 39.47                | 25.49                 | PK            |
| 6   | 5653.5          | 65.40                   | 70.80          | -5.40       | 39.88                | 25.52                 | PK            |
| 7   | 5761.563        | 124.39                  | 131.20         | -6.81       | 98.56                | 25.83                 | PK            |
| 8   | 5919.063        | 63.44                   | 72.58          | -9.14       | 37.16                | 26.28                 | PK            |
| 9   | 5925.625        | 63.08                   | 68.20          | -5.12       | 36.77                | 26.31                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW40M_Ant2+3+4+5_Ch151_5.755G | Humidity (%RH)   | 57.0      |

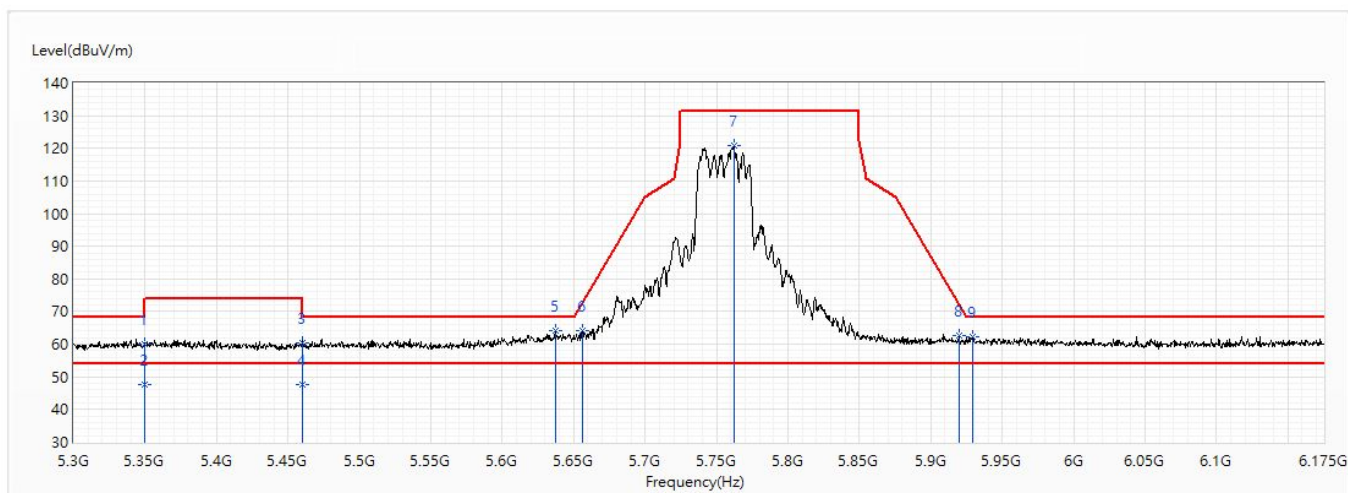


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.07                   | 74.00          | -13.93      | 35.27                | 24.80                 | PK            |
| 2   | 5350            | 47.55                   | 54.00          | -6.45       | 22.75                | 24.80                 | AV            |
| 3   | 5460            | 60.32                   | 74.00          | -13.68      | 35.33                | 24.99                 | PK            |
| 4   | 5460            | 47.58                   | 54.00          | -6.42       | 22.59                | 24.99                 | AV            |
| * 5 | 5637.313        | 64.20                   | 68.20          | -4.00       | 38.73                | 25.47                 | PK            |
| 6   | 5656.125        | 64.21                   | 72.75          | -8.54       | 38.69                | 25.52                 | PK            |
| 7   | 5762            | 120.73                  | 131.20         | -10.47      | 94.90                | 25.83                 | PK            |
| 8   | 5919.5          | 62.59                   | 72.25          | -9.66       | 36.30                | 26.29                 | PK            |
| 9   | 5929.125        | 62.33                   | 68.20          | -5.87       | 36.01                | 26.32                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW40M_Ant2+3+4+5_Ch159_5.795G | Humidity (%RH)   | 57.0      |

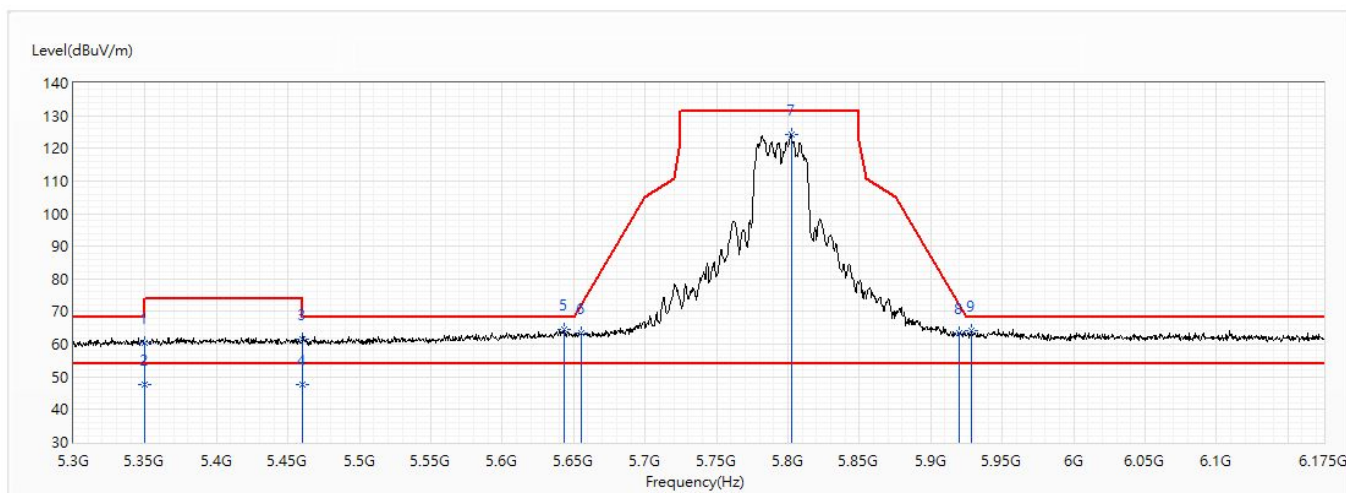


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.43                   | 74.00          | -13.57      | 35.63                | 24.80                 | PK            |
| 2   | 5350            | 47.58                   | 54.00          | -6.42       | 22.78                | 24.80                 | AV            |
| 3   | 5460            | 61.67                   | 74.00          | -12.33      | 36.68                | 24.99                 | PK            |
| 4   | 5460            | 47.62                   | 54.00          | -6.38       | 22.63                | 24.99                 | AV            |
| * 5 | 5643            | 64.60                   | 68.20          | -3.60       | 39.11                | 25.49                 | PK            |
| 6   | 5655.25         | 63.44                   | 72.10          | -8.66       | 37.92                | 25.52                 | PK            |
| 7   | 5802.25         | 124.10                  | 131.20         | -7.10       | 98.16                | 25.94                 | PK            |
| 8   | 5919.938        | 63.45                   | 71.93          | -8.48       | 37.16                | 26.29                 | PK            |
| 9   | 5928.688        | 64.19                   | 68.20          | -4.01       | 37.87                | 26.32                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW40M_Ant2+3+4+5_Ch159_5.795G | Humidity (%RH)   | 57.0      |

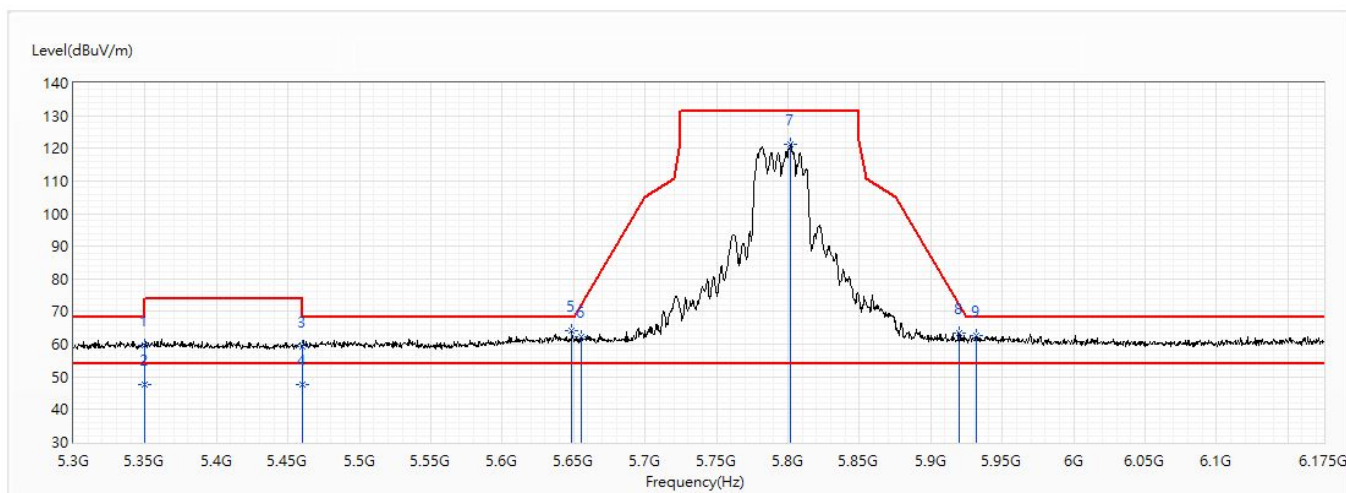


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.68                   | 74.00          | -14.32      | 34.88                | 24.80                 | PK            |
| 2   | 5350            | 47.59                   | 54.00          | -6.41       | 22.79                | 24.80                 | AV            |
| 3   | 5460            | 59.32                   | 74.00          | -14.68      | 34.33                | 24.99                 | PK            |
| 4   | 5460            | 47.67                   | 54.00          | -6.33       | 22.68                | 24.99                 | AV            |
| * 5 | 5648.688        | 64.03                   | 68.20          | -4.17       | 38.53                | 25.50                 | PK            |
| 6   | 5655.688        | 62.36                   | 72.43          | -10.07      | 36.84                | 25.52                 | PK            |
| 7   | 5801.813        | 121.38                  | 131.20         | -9.82       | 95.44                | 25.94                 | PK            |
| 8   | 5919.5          | 63.32                   | 72.25          | -8.94       | 37.03                | 26.29                 | PK            |
| 9   | 5932.188        | 62.79                   | 68.20          | -5.41       | 36.46                | 26.33                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW80M_Ant2+3+4+5_Ch155_5.775G | Humidity (%RH)   | 57.0      |

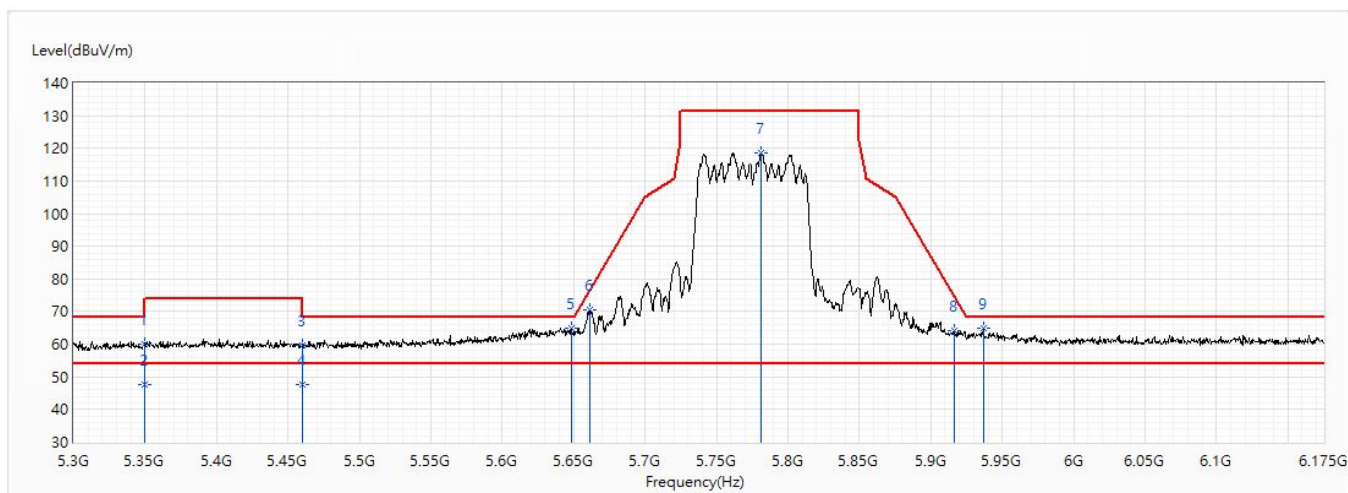


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.08                   | 74.00          | -13.92      | 35.28                | 24.80                 | PK            |
| 2   | 5350            | 47.57                   | 54.00          | -6.43       | 22.77                | 24.80                 | AV            |
| 3   | 5460            | 59.75                   | 74.00          | -14.25      | 34.76                | 24.99                 | PK            |
| 4   | 5460            | 47.66                   | 54.00          | -6.34       | 22.67                | 24.99                 | AV            |
| 5   | 5648.25         | 64.85                   | 68.20          | -3.35       | 39.35                | 25.50                 | PK            |
| 6   | 5661.375        | 70.60                   | 76.65          | -6.05       | 45.06                | 25.54                 | PK            |
| 7   | 5780.813        | 118.46                  | 131.20         | -12.74      | 92.57                | 25.89                 | PK            |
| 8   | 5916.438        | 64.22                   | 74.51          | -10.29      | 37.94                | 26.28                 | PK            |
| * 9 | 5936.563        | 65.05                   | 68.20          | -3.15       | 38.71                | 26.34                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ac_BW80M_Ant2+3+4+5_Ch155_5.775G | Humidity (%RH)   | 57.0      |

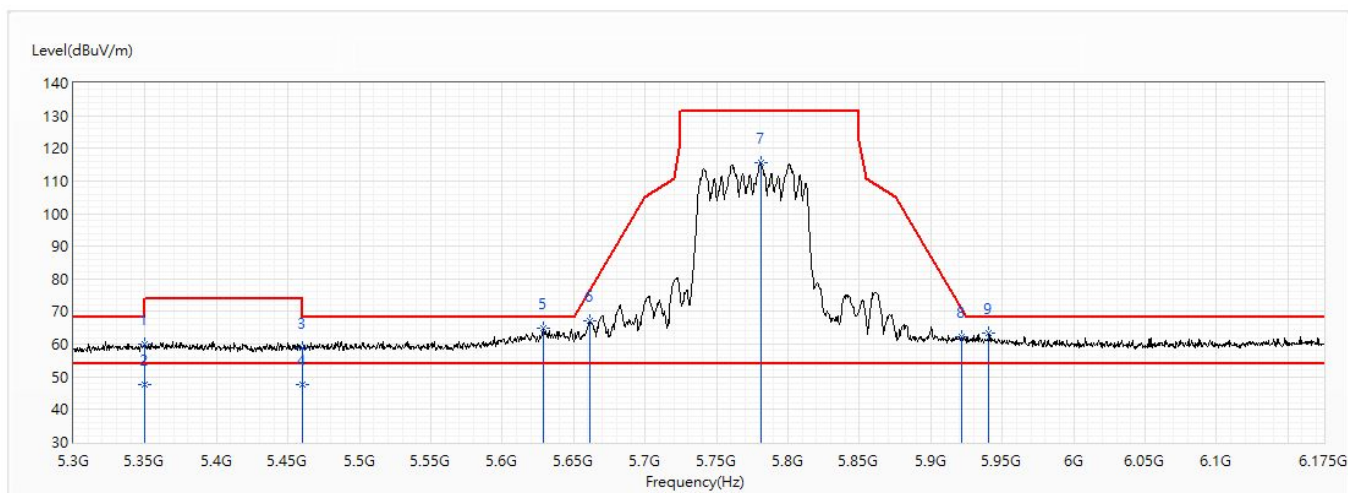


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.89                   | 74.00          | -14.11      | 35.09                | 24.80                 | PK            |
| 2   | 5350            | 47.61                   | 54.00          | -6.39       | 22.81                | 24.80                 | AV            |
| 3   | 5460            | 58.80                   | 74.00          | -15.20      | 33.81                | 24.99                 | PK            |
| 4   | 5460            | 47.69                   | 54.00          | -6.31       | 22.70                | 24.99                 | AV            |
| * 5 | 5629            | 64.94                   | 68.20          | -3.26       | 39.50                | 25.44                 | PK            |
| 6   | 5660.938        | 67.22                   | 76.32          | -9.10       | 41.68                | 25.54                 | PK            |
| 7   | 5780.813        | 115.62                  | 131.20         | -15.58      | 89.73                | 25.89                 | PK            |
| 8   | 5921.688        | 62.35                   | 70.64          | -8.29       | 36.06                | 26.29                 | PK            |
| 9   | 5940.5          | 63.33                   | 68.20          | -4.87       | 36.99                | 26.34                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

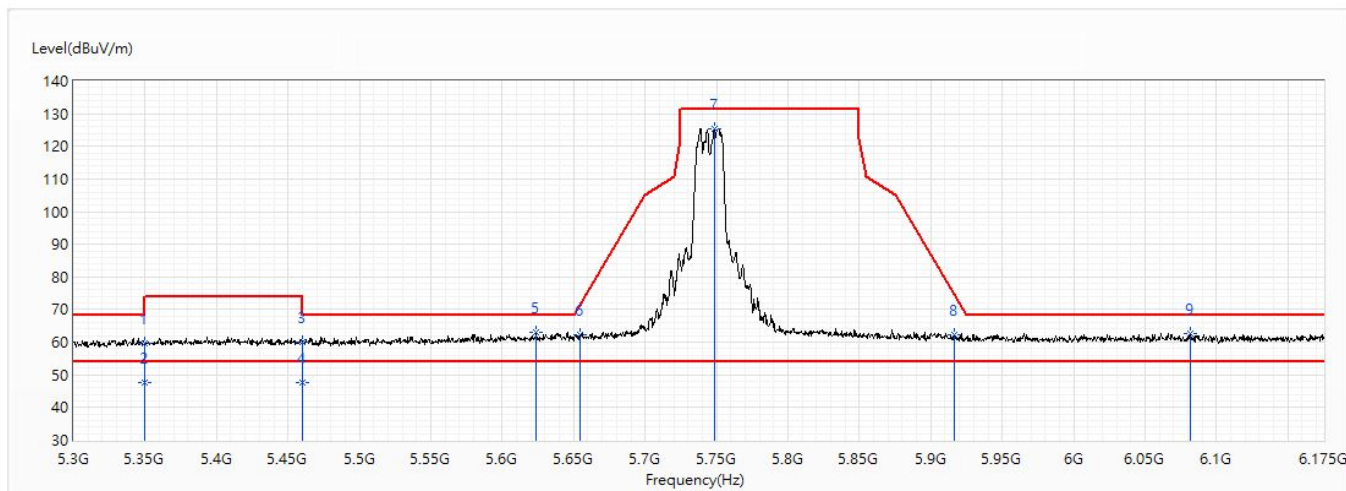


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.68                   | 74.00          | -14.32      | 34.88                | 24.80                 | PK            |
| 2   | 5350            | 47.63                   | 54.00          | -6.37       | 22.83                | 24.80                 | AV            |
| 3   | 5460            | 60.20                   | 74.00          | -13.80      | 35.21                | 24.99                 | PK            |
| 4   | 5460            | 47.69                   | 54.00          | -6.31       | 22.70                | 24.99                 | AV            |
| * 5 | 5623.75         | 63.16                   | 68.20          | -5.04       | 37.74                | 25.42                 | PK            |
| 6   | 5654.375        | 62.46                   | 71.45          | -8.99       | 36.94                | 25.52                 | PK            |
| 7   | 5748.438        | 125.41                  | 131.20         | -5.79       | 99.62                | 25.79                 | PK            |
| 8   | 5916.438        | 62.13                   | 74.51          | -12.38      | 35.85                | 26.28                 | PK            |
| 9   | 6081.375        | 62.84                   | 68.20          | -5.36       | 35.94                | 26.90                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch149_5.745G | Humidity (%RH)   | 57.0      |

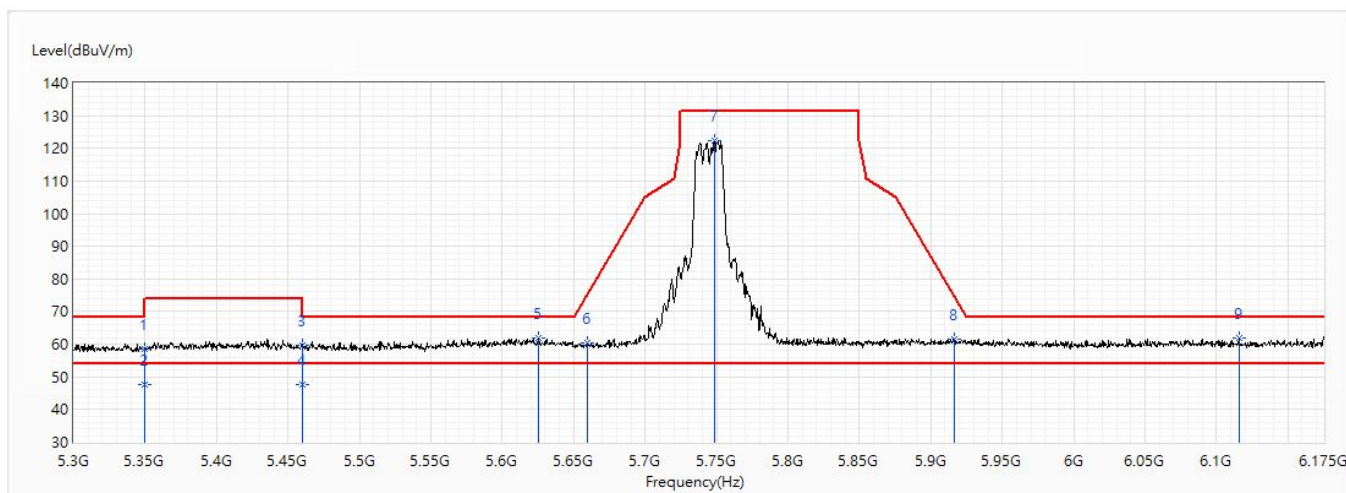


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 58.66                   | 74.00          | -15.34      | 33.86                | 24.80                 | PK            |
| 2   | 5350            | 47.49                   | 54.00          | -6.51       | 22.69                | 24.80                 | AV            |
| 3   | 5460            | 59.74                   | 74.00          | -14.26      | 34.75                | 24.99                 | PK            |
| 4   | 5460            | 47.53                   | 54.00          | -6.47       | 22.54                | 24.99                 | AV            |
| * 5 | 5625.5          | 61.81                   | 68.20          | -6.39       | 36.37                | 25.44                 | PK            |
| 6   | 5659.188        | 60.56                   | 75.02          | -14.47      | 35.02                | 25.54                 | PK            |
| 7   | 5748.438        | 122.37                  | 131.20         | -8.83       | 96.58                | 25.79                 | PK            |
| 8   | 5916.438        | 61.63                   | 74.51          | -12.89      | 35.35                | 26.28                 | PK            |
| 9   | 6115.5          | 61.77                   | 68.20          | -6.43       | 34.72                | 27.05                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

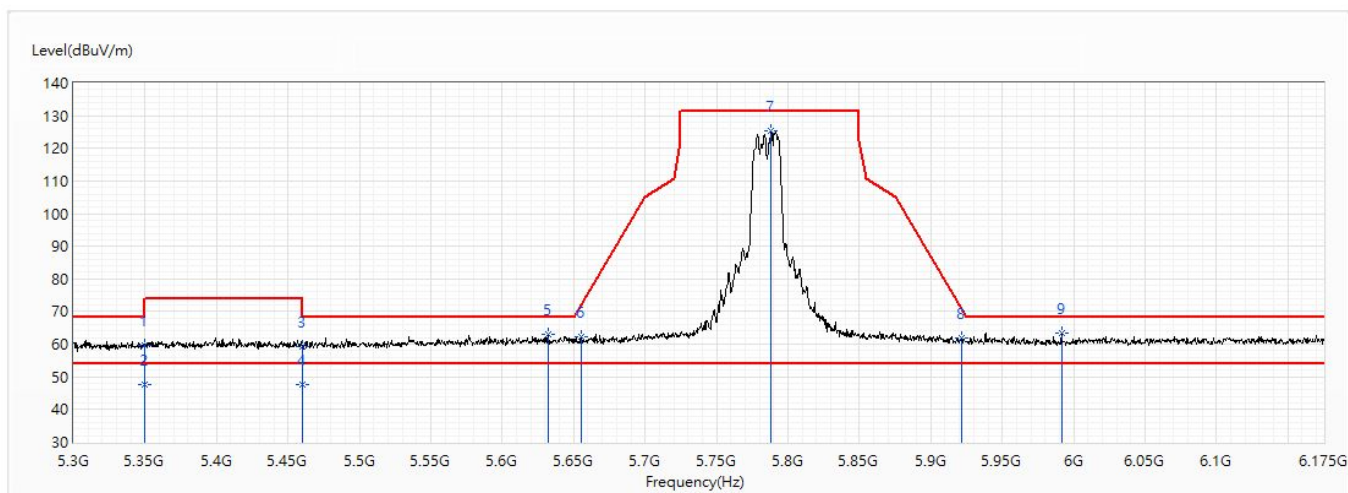


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.52                   | 74.00          | -14.48      | 34.72                | 24.80                 | PK            |
| 2   | 5350            | 47.59                   | 54.00          | -6.41       | 22.79                | 24.80                 | AV            |
| 3   | 5460            | 59.23                   | 74.00          | -14.77      | 34.24                | 24.99                 | PK            |
| 4   | 5460            | 47.63                   | 54.00          | -6.37       | 22.64                | 24.99                 | AV            |
| 5   | 5632.063        | 63.12                   | 68.20          | -5.08       | 37.67                | 25.45                 | PK            |
| 6   | 5655.25         | 62.11                   | 72.10          | -9.99       | 36.59                | 25.52                 | PK            |
| 7   | 5788.25         | 125.37                  | 131.20         | -5.83       | 99.47                | 25.90                 | PK            |
| 8   | 5921.25         | 62.00                   | 70.96          | -8.96       | 35.71                | 26.29                 | PK            |
| * 9 | 5991.688        | 63.24                   | 68.20          | -4.96       | 36.73                | 26.51                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch157_5.785G | Humidity (%RH)   | 57.0      |

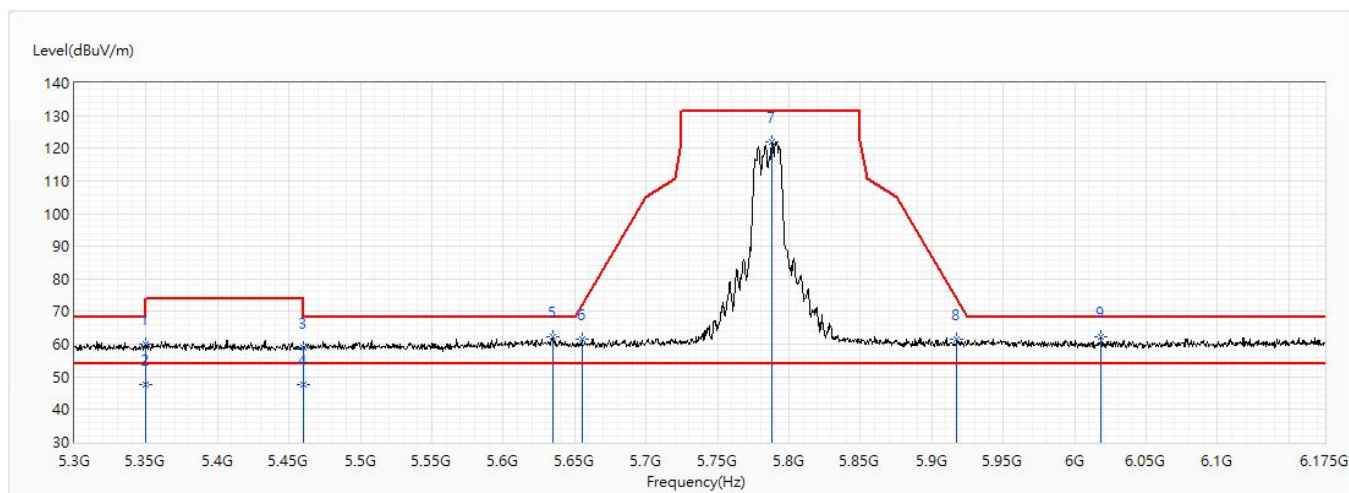


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.01                   | 74.00          | -13.99      | 35.21                | 24.80                 | PK            |
| 2   | 5350            | 47.53                   | 54.00          | -6.47       | 22.73                | 24.80                 | AV            |
| 3   | 5460            | 59.08                   | 74.00          | -14.92      | 34.09                | 24.99                 | PK            |
| 4   | 5460            | 47.67                   | 54.00          | -6.33       | 22.68                | 24.99                 | AV            |
| 5   | 5635.125        | 62.33                   | 68.20          | -5.87       | 36.87                | 25.46                 | PK            |
| 6   | 5655.25         | 61.43                   | 72.10          | -10.67      | 35.91                | 25.52                 | PK            |
| 7   | 5788.25         | 121.99                  | 131.20         | -9.21       | 96.09                | 25.90                 | PK            |
| 8   | 5917.313        | 61.55                   | 73.87          | -12.32      | 35.27                | 26.28                 | PK            |
| * 9 | 6018.375        | 62.45                   | 68.20          | -5.75       | 35.85                | 26.60                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

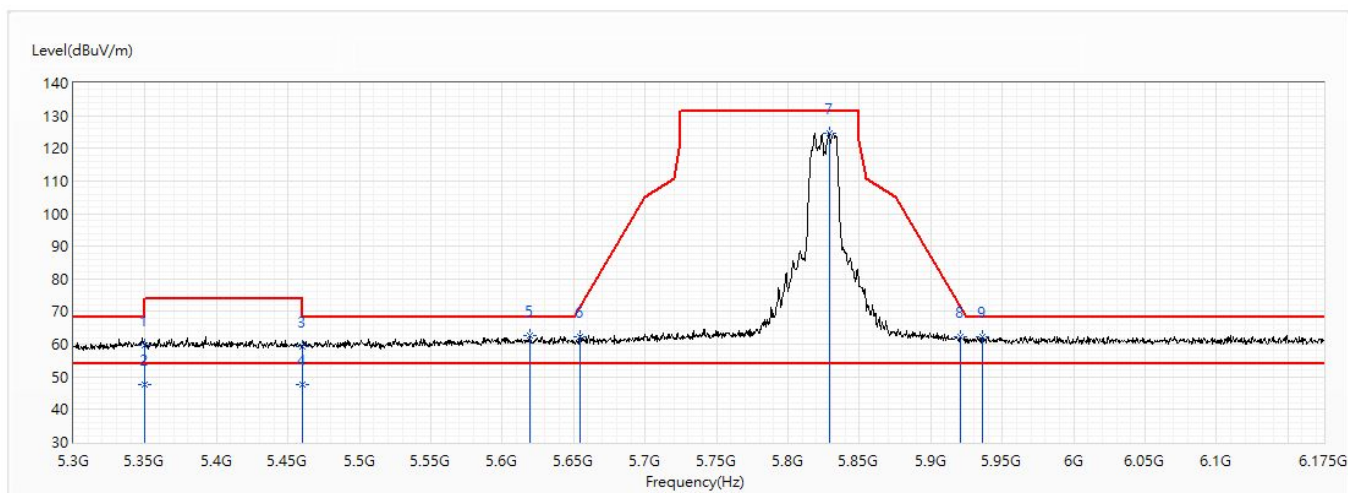


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.50                   | 74.00          | -14.50      | 34.70                | 24.80                 | PK            |
| 2   | 5350            | 47.54                   | 54.00          | -6.46       | 22.74                | 24.80                 | AV            |
| 3   | 5460            | 59.39                   | 74.00          | -14.61      | 34.40                | 24.99                 | PK            |
| 4   | 5460            | 47.65                   | 54.00          | -6.35       | 22.66                | 24.99                 | AV            |
| * 5 | 5618.938        | 62.54                   | 68.20          | -5.66       | 37.13                | 25.41                 | PK            |
| 6   | 5654.375        | 62.46                   | 71.45          | -8.99       | 36.94                | 25.52                 | PK            |
| 7   | 5828.938        | 124.73                  | 131.20         | -6.47       | 98.70                | 26.03                 | PK            |
| 8   | 5920.813        | 62.38                   | 71.29          | -8.91       | 36.09                | 26.29                 | PK            |
| 9   | 5936.125        | 62.38                   | 68.20          | -5.82       | 36.04                | 26.34                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW20M_Ant2+3+4+5_Ch165_5.825G | Humidity (%RH)   | 57.0      |

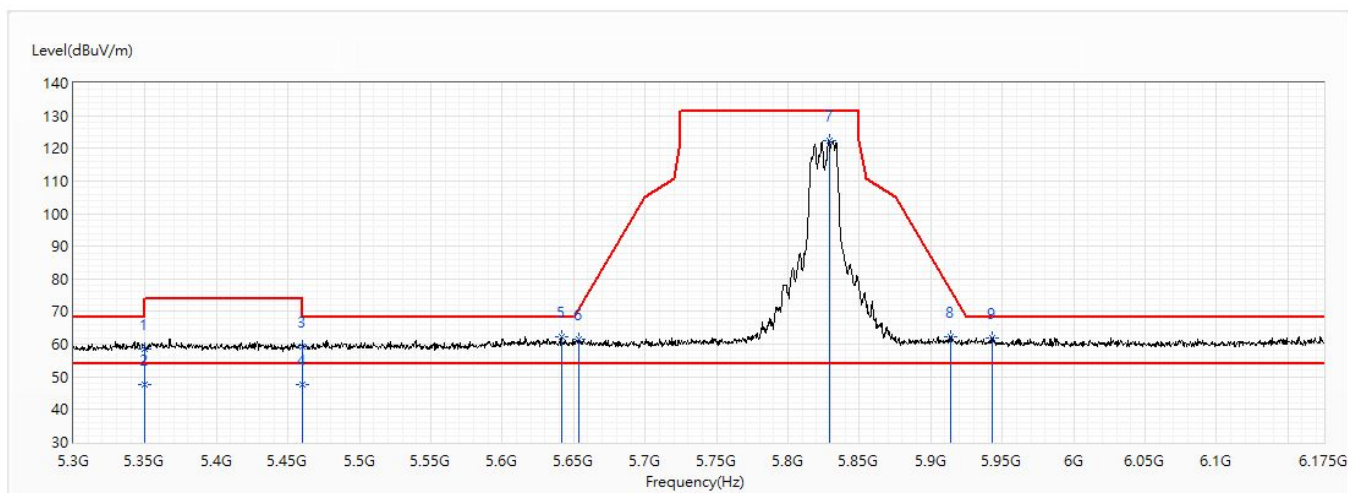


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 58.64                   | 74.00          | -15.36      | 33.84                | 24.80                 | PK            |
| 2   | 5350            | 47.52                   | 54.00          | -6.48       | 22.72                | 24.80                 | AV            |
| 3   | 5460            | 59.34                   | 74.00          | -14.66      | 34.35                | 24.99                 | PK            |
| 4   | 5460            | 47.67                   | 54.00          | -6.33       | 22.68                | 24.99                 | AV            |
| * 5 | 5641.25         | 62.43                   | 68.20          | -5.77       | 36.96                | 25.47                 | PK            |
| 6   | 5653.5          | 61.48                   | 70.80          | -9.33       | 35.96                | 25.52                 | PK            |
| 7   | 5828.938        | 122.42                  | 131.20         | -8.78       | 96.39                | 26.03                 | PK            |
| 8   | 5914.25         | 62.37                   | 76.13          | -13.76      | 36.09                | 26.28                 | PK            |
| 9   | 5942.688        | 62.04                   | 68.20          | -6.16       | 35.68                | 26.36                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch151_5.755G | Humidity (%RH)   | 57.0      |

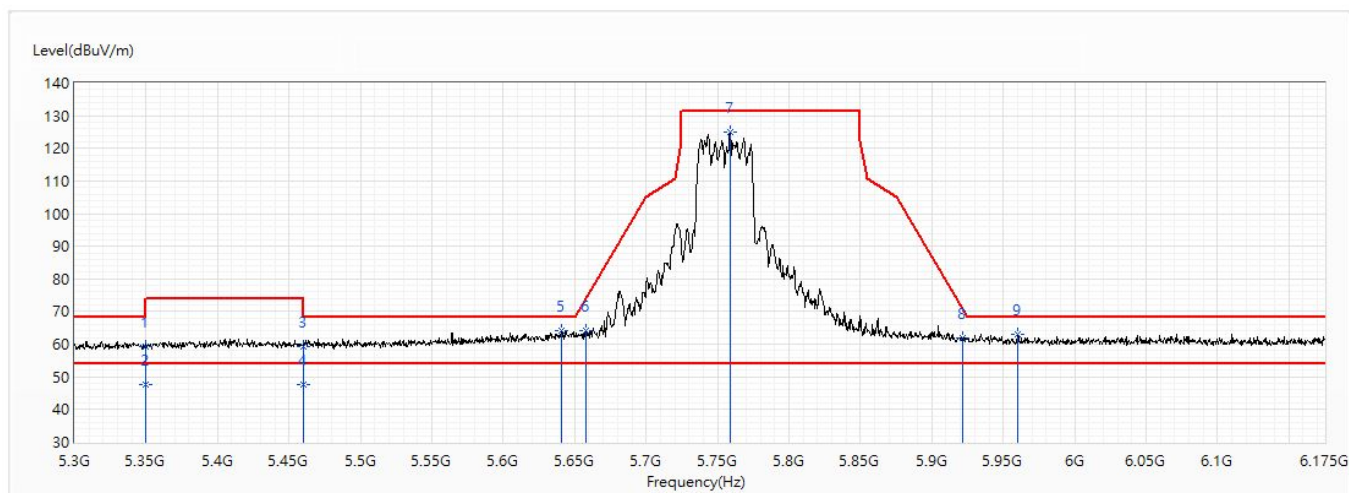


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.15                   | 74.00          | -14.85      | 34.35                | 24.80                 | PK            |
| 2   | 5350            | 47.52                   | 54.00          | -6.48       | 22.72                | 24.80                 | AV            |
| 3   | 5460            | 59.42                   | 74.00          | -14.58      | 34.43                | 24.99                 | PK            |
| 4   | 5460            | 47.63                   | 54.00          | -6.37       | 22.64                | 24.99                 | AV            |
| * 5 | 5640.813        | 64.34                   | 68.20          | -3.86       | 38.87                | 25.47                 | PK            |
| 6   | 5657.875        | 64.24                   | 74.05          | -9.81       | 38.72                | 25.52                 | PK            |
| 7   | 5758.5          | 124.95                  | 131.20         | -6.25       | 99.12                | 25.83                 | PK            |
| 8   | 5921.688        | 62.00                   | 70.64          | -8.64       | 35.71                | 26.29                 | PK            |
| 9   | 5959.75         | 62.98                   | 68.20          | -5.22       | 36.57                | 26.41                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch151_5.755G | Humidity (%RH)   | 57.0      |

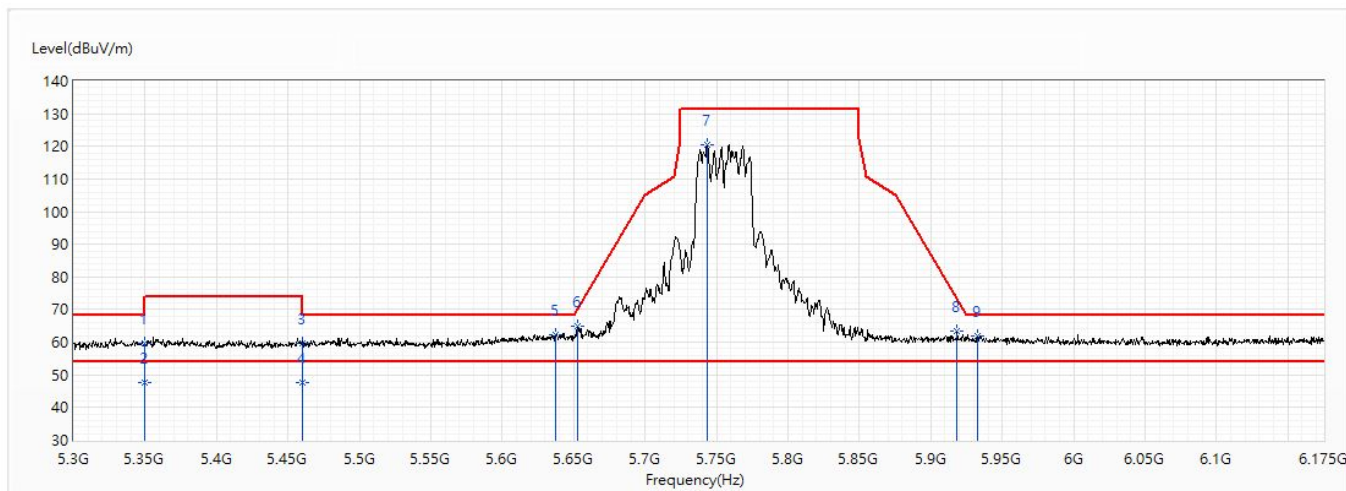


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.56                   | 74.00          | -14.44      | 34.76                | 24.80                 | PK            |
| 2   | 5350            | 47.54                   | 54.00          | -6.46       | 22.74                | 24.80                 | AV            |
| 3   | 5460            | 59.63                   | 74.00          | -14.37      | 34.64                | 24.99                 | PK            |
| 4   | 5460            | 47.61                   | 54.00          | -6.39       | 22.62                | 24.99                 | AV            |
| 5   | 5637.75         | 62.41                   | 68.20          | -5.79       | 36.94                | 25.47                 | PK            |
| * 6 | 5653.063        | 64.86                   | 70.48          | -5.62       | 39.34                | 25.52                 | PK            |
| 7   | 5743.188        | 120.61                  | 131.20         | -10.59      | 94.83                | 25.78                 | PK            |
| 8   | 5918.188        | 63.60                   | 73.22          | -9.63       | 37.32                | 26.28                 | PK            |
| 9   | 5932.625        | 62.05                   | 68.20          | -6.15       | 35.72                | 26.33                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch159_5.795G | Humidity (%RH)   | 57.0      |

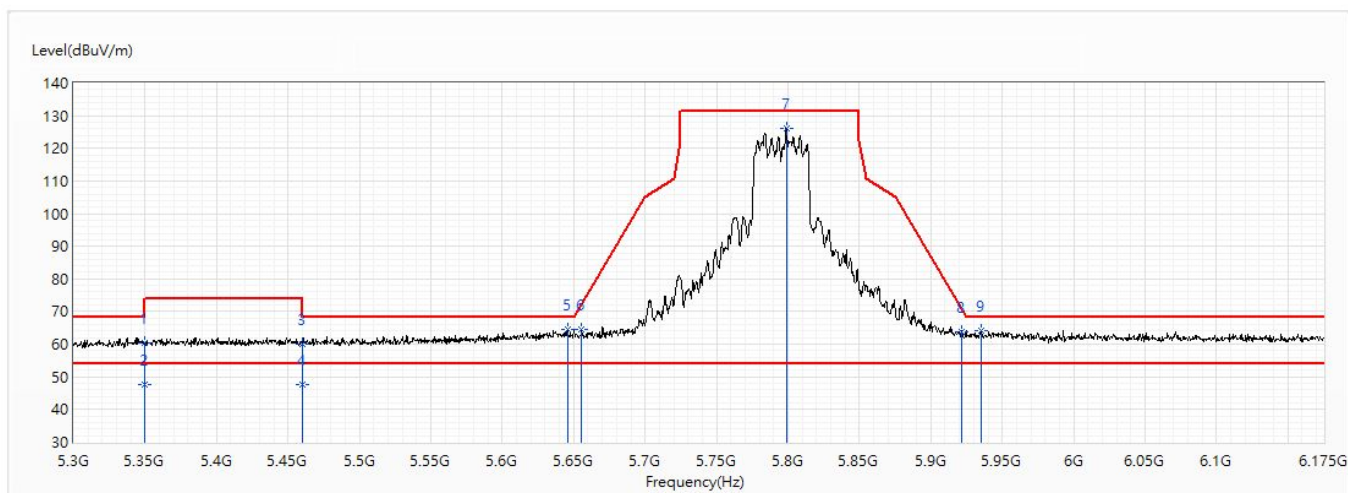


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 60.53                   | 74.00          | -13.47      | 35.73                | 24.80                 | PK            |
| 2   | 5350            | 47.56                   | 54.00          | -6.44       | 22.76                | 24.80                 | AV            |
| 3   | 5460            | 60.14                   | 74.00          | -13.86      | 35.15                | 24.99                 | PK            |
| 4   | 5460            | 47.64                   | 54.00          | -6.36       | 22.65                | 24.99                 | AV            |
| * 5 | 5645.625        | 64.43                   | 68.20          | -3.77       | 38.94                | 25.49                 | PK            |
| 6   | 5655.688        | 64.50                   | 72.43          | -7.93       | 38.98                | 25.52                 | PK            |
| 7   | 5798.75         | 126.15                  | 131.20         | -5.05       | 100.21               | 25.94                 | PK            |
| 8   | 5921.688        | 63.83                   | 70.64          | -6.81       | 37.54                | 26.29                 | PK            |
| 9   | 5935.688        | 63.98                   | 68.20          | -4.22       | 37.65                | 26.33                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW40M_Ant2+3+4+5_Ch159_5.795G | Humidity (%RH)   | 57.0      |

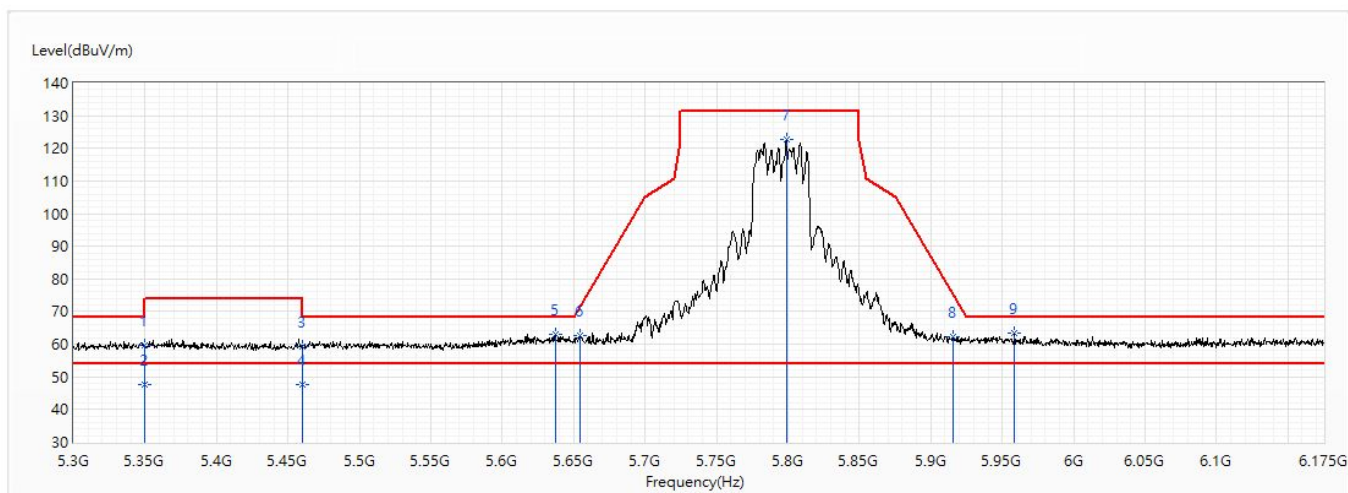


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.65                   | 74.00          | -14.35      | 34.85                | 24.80                 | PK            |
| 2   | 5350            | 47.58                   | 54.00          | -6.42       | 22.78                | 24.80                 | AV            |
| 3   | 5460            | 59.21                   | 74.00          | -14.79      | 34.22                | 24.99                 | PK            |
| 4   | 5460            | 47.69                   | 54.00          | -6.31       | 22.70                | 24.99                 | AV            |
| 5   | 5637.313        | 63.02                   | 68.20          | -5.18       | 37.55                | 25.47                 | PK            |
| 6   | 5654.813        | 62.50                   | 71.78          | -9.27       | 36.98                | 25.52                 | PK            |
| 7   | 5798.75         | 122.62                  | 131.20         | -8.58       | 96.68                | 25.94                 | PK            |
| 8   | 5916            | 62.40                   | 74.84          | -12.43      | 36.12                | 26.28                 | PK            |
| * 9 | 5958.438        | 63.51                   | 68.20          | -4.69       | 37.10                | 26.41                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Horizontal                                 | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch155_5.775G | Humidity (%RH)   | 57.0      |

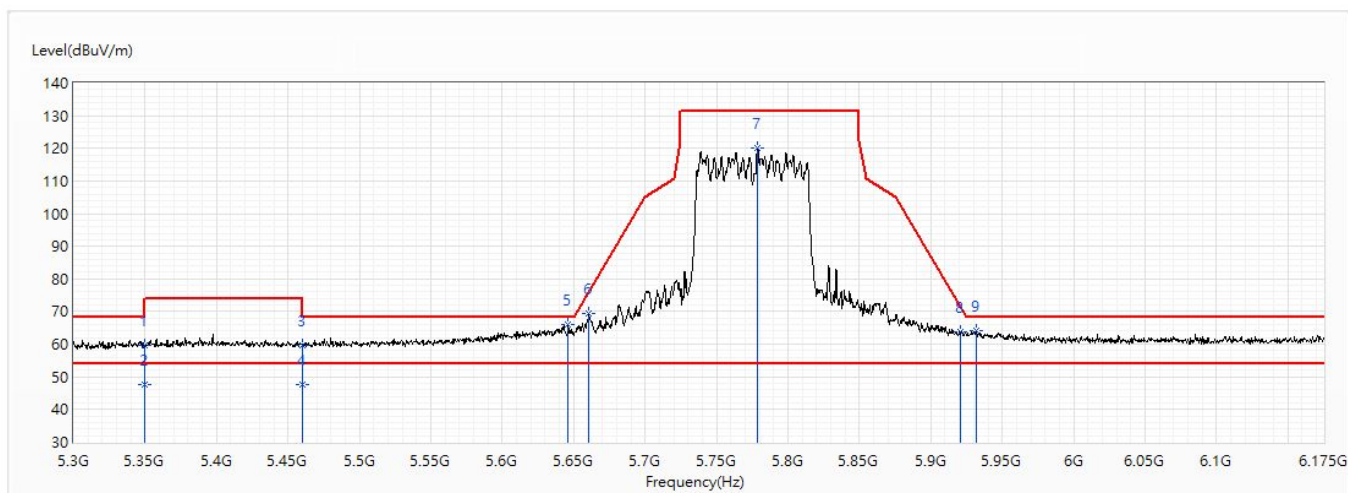


| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.81                   | 74.00          | -14.19      | 35.01                | 24.80                 | PK            |
| 2   | 5350            | 47.52                   | 54.00          | -6.48       | 22.72                | 24.80                 | AV            |
| 3   | 5460            | 59.82                   | 74.00          | -14.18      | 34.83                | 24.99                 | PK            |
| 4   | 5460            | 47.63                   | 54.00          | -6.37       | 22.64                | 24.99                 | AV            |
| * 5 | 5646.063        | 66.17                   | 68.20          | -2.03       | 40.68                | 25.49                 | PK            |
| 6   | 5660.5          | 69.45                   | 76.00          | -6.55       | 43.91                | 25.54                 | PK            |
| 7   | 5778.625        | 120.17                  | 131.20         | -11.03      | 94.29                | 25.88                 | PK            |
| 8   | 5920.375        | 63.86                   | 71.61          | -7.75       | 37.57                | 26.29                 | PK            |
| 9   | 5931.75         | 64.00                   | 68.20          | -4.20       | 37.67                | 26.33                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

|                |                                            |                  |           |
|----------------|--------------------------------------------|------------------|-----------|
| Model No       | D2260G                                     | Site             | CB2-H     |
| Test Voltage   | AC 120V/60Hz                               | Test Date        | 2020/10/8 |
| Test Mode      | Mode 2: CDD Mode                           | Engineer         | Lion      |
| Polarity       | Vertical                                   | Temperature (°C) | 24.0      |
| Test Condition | CDD_802.11ax_BW80M_Ant2+3+4+5_Ch155_5.775G | Humidity (%RH)   | 57.0      |

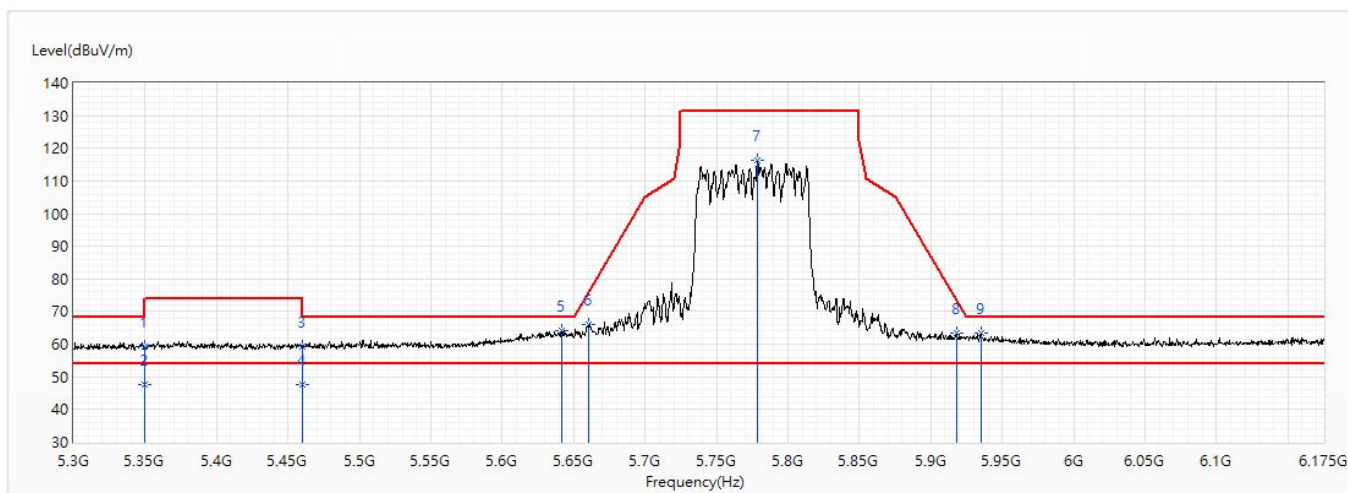

| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB/m) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|-----------------------|---------------|
| 1   | 5350            | 59.21                   | 74.00          | -14.79      | 34.41                | 24.80                 | PK            |
| 2   | 5350            | 47.57                   | 54.00          | -6.43       | 22.77                | 24.80                 | AV            |
| 3   | 5460            | 59.41                   | 74.00          | -14.59      | 34.42                | 24.99                 | PK            |
| 4   | 5460            | 47.63                   | 54.00          | -6.37       | 22.64                | 24.99                 | AV            |
| * 5 | 5641.25         | 64.00                   | 68.20          | -4.20       | 38.53                | 25.47                 | PK            |
| 6   | 5660.5          | 66.01                   | 76.00          | -9.99       | 40.47                | 25.54                 | PK            |
| 7   | 5778.625        | 116.20                  | 131.20         | -15.00      | 90.32                | 25.88                 | PK            |
| 8   | 5917.75         | 63.49                   | 73.55          | -10.06      | 37.21                | 26.28                 | PK            |
| 9   | 5935.25         | 63.45                   | 68.20          | -4.75       | 37.12                | 26.33                 | PK            |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.