


Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch1_2.412G	Humidity (%RH)	56.0

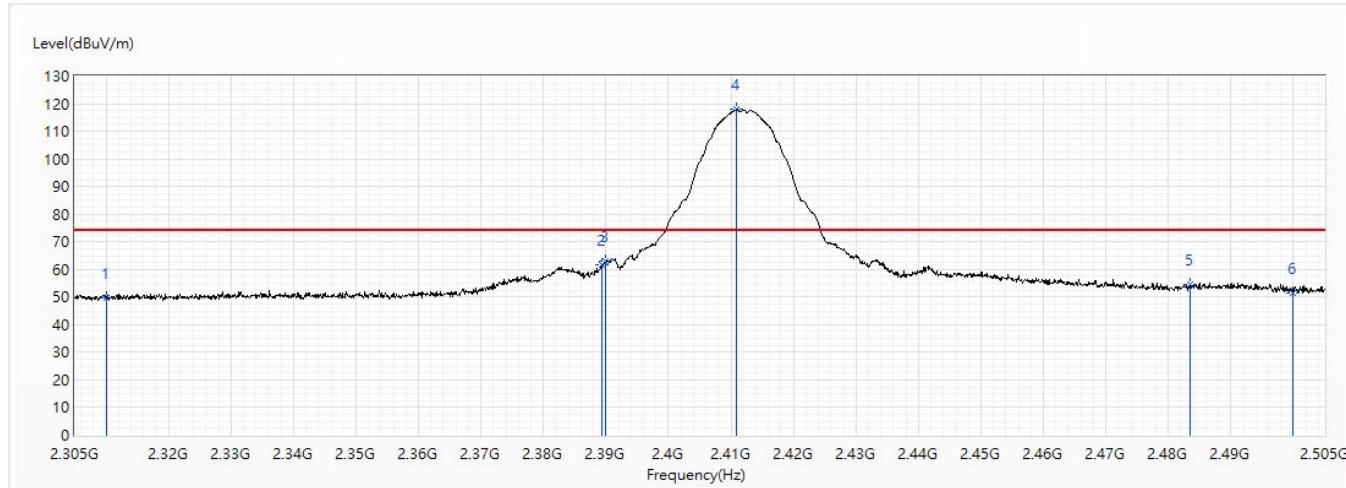


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.77	74.00	-24.23	38.15	11.62	PK
2	2389.4	61.68	74.00	-12.32	49.66	12.02	PK
3	2390	62.99	74.00	-11.01	50.96	12.03	PK
4	2410.9	117.81	74.00	43.81	105.66	12.15	PK
5	2483.5	54.58	74.00	-19.42	42.07	12.51	PK
6	2500	51.67	74.00	-22.33	39.07	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch1_2.412G	Humidity (%RH)	56.0

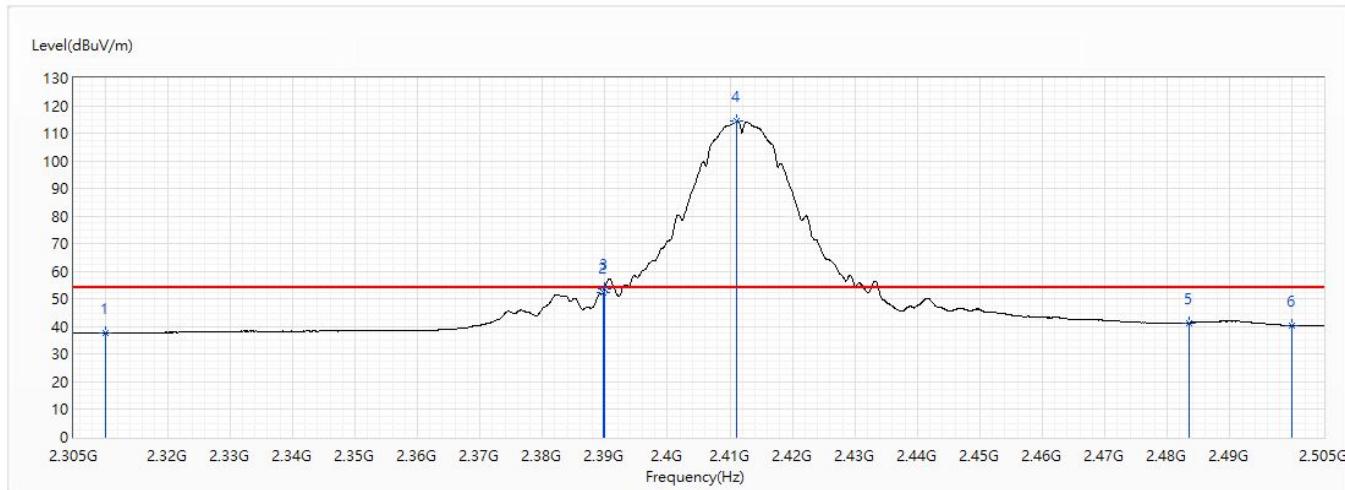


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.79	54.00	-16.21	26.17	11.62	AV
2	2389.8	52.15	54.00	-1.85	40.12	12.03	AV
3	2390	53.52	54.00	-0.48	41.49	12.03	AV
4	2411.1	114.64	54.00	60.64	102.49	12.15	AV
5	2483.5	41.45	54.00	-12.55	28.94	12.51	AV
6	2500	40.42	54.00	-13.58	27.82	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11b_Ch6_2.437G	Humidity (%RH)	56.0

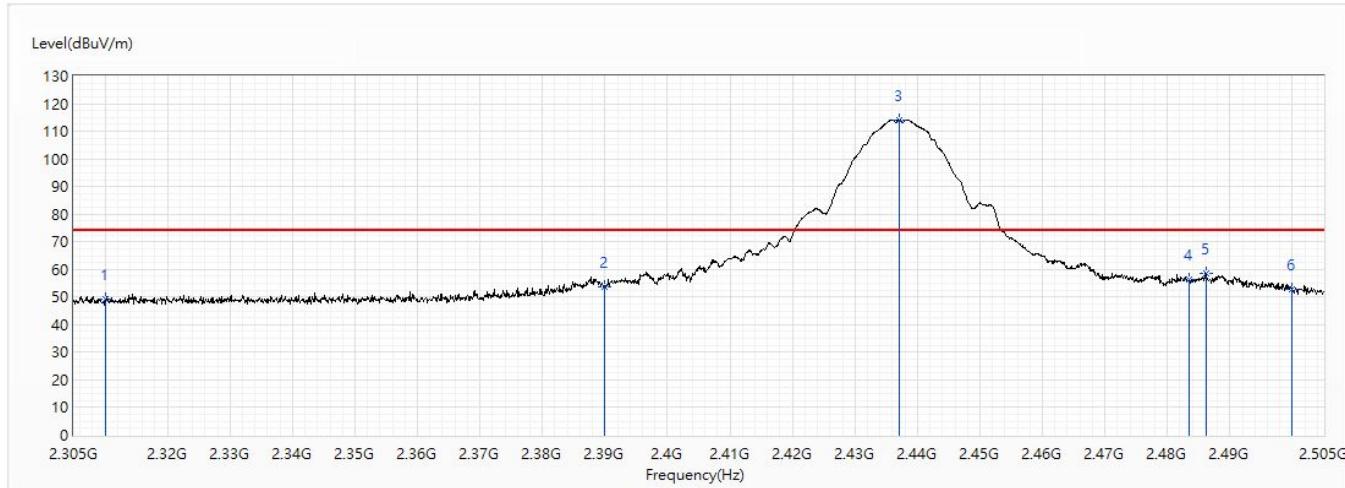


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.27	74.00	-24.73	37.65	11.62	PK
2	2390	53.76	74.00	-20.24	41.73	12.03	PK
3	2437.1	114.16	74.00	40.16	101.88	12.28	PK
4	2483.5	56.14	74.00	-17.86	43.63	12.51	PK
5	2486.2	58.74	74.00	-15.26	46.21	12.53	PK
6	2500	52.72	74.00	-21.28	40.12	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11b_Ch6_2.437G	Humidity (%RH)	56.0

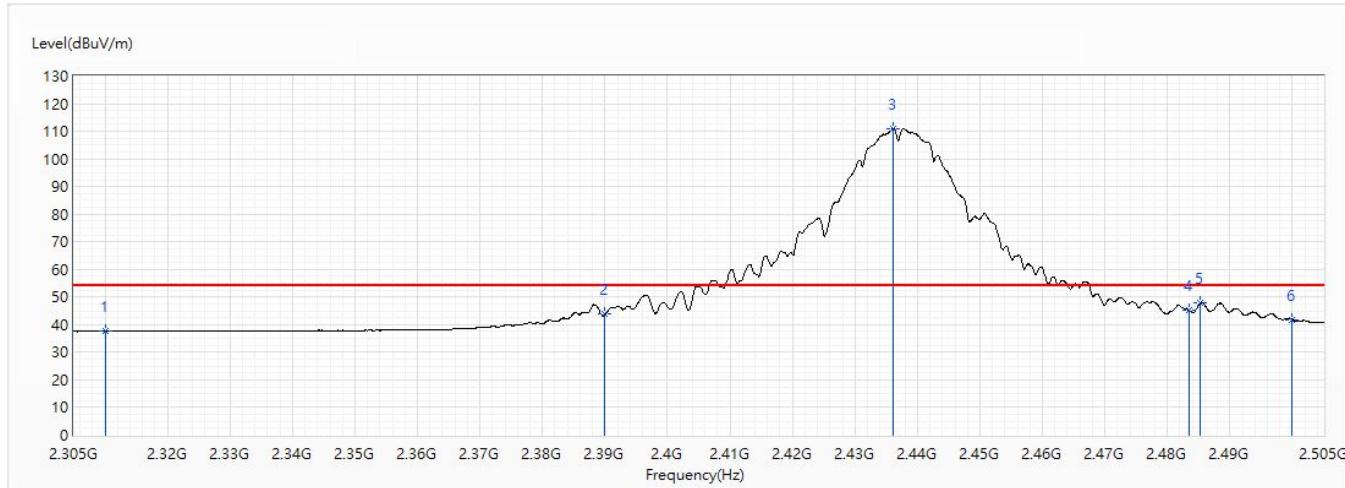


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.55	54.00	-16.45	25.93	11.62	AV
2	2390	43.77	54.00	-10.23	31.74	12.03	AV
3	2436.2	111.00	54.00	57.00	98.72	12.28	AV
4	2483.5	45.14	54.00	-8.86	32.63	12.51	AV
5	2485.3	47.79	54.00	-6.21	35.27	12.52	AV
6	2500	41.89	54.00	-12.11	29.29	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch6_2.437G	Humidity (%RH)	56.0

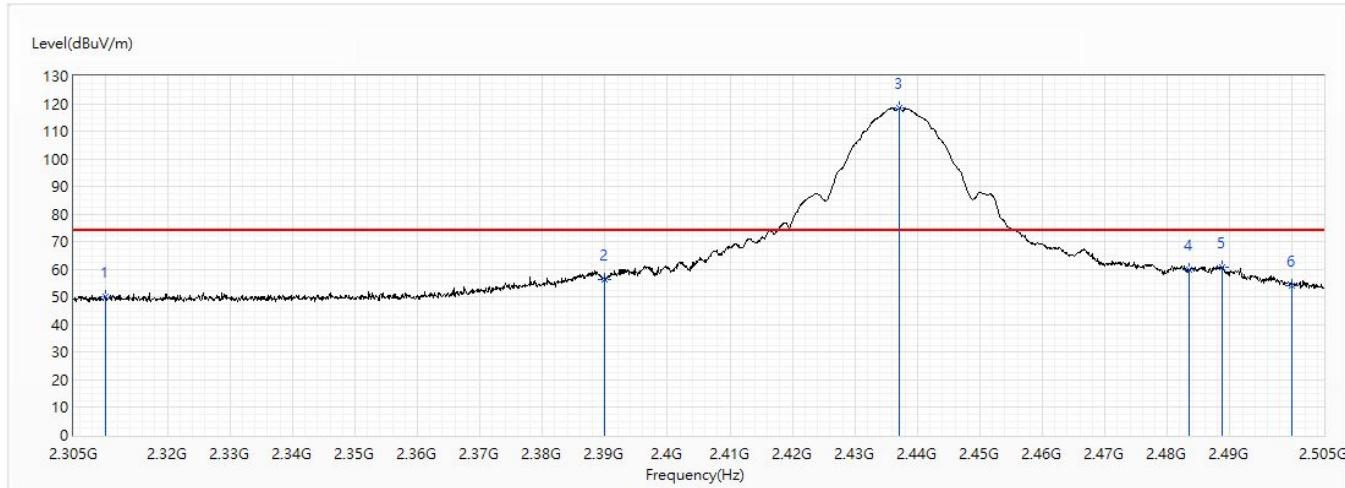


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.94	74.00	-24.06	38.32	11.62	PK
2	2390	56.13	74.00	-17.87	44.10	12.03	PK
3	2437	118.31	74.00	44.31	106.03	12.28	PK
4	2483.5	60.02	74.00	-13.98	47.51	12.51	PK
5	2488.7	60.96	74.00	-13.04	48.42	12.54	PK
6	2500	54.26	74.00	-19.74	41.66	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch6_2.437G	Humidity (%RH)	56.0

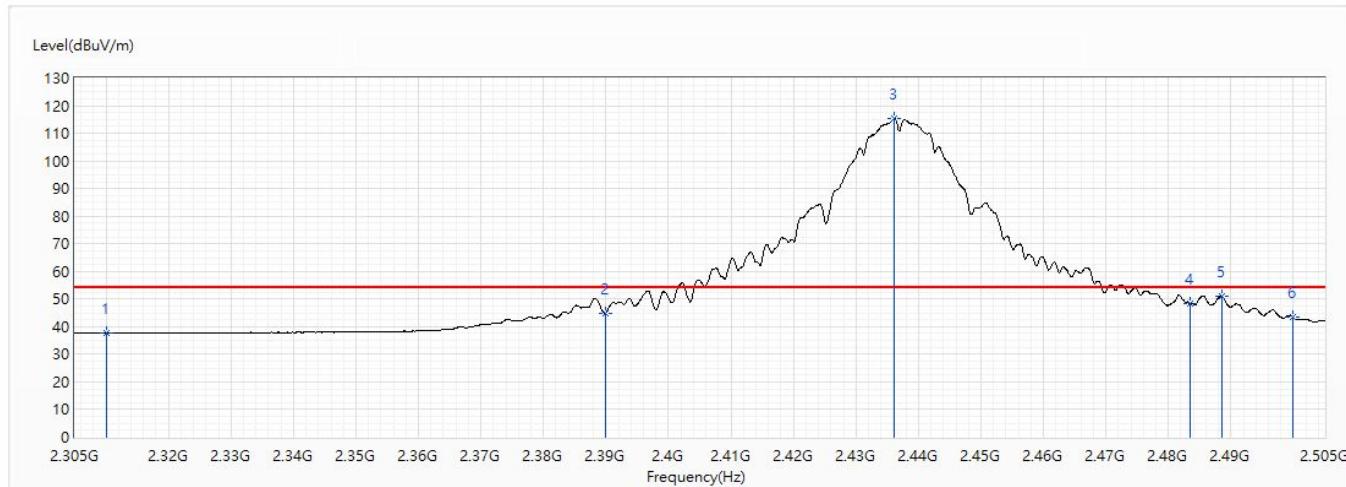


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.67	54.00	-16.33	26.05	11.62	AV
2	2390	45.00	54.00	-9.00	32.97	12.03	AV
3	2436.2	115.26	54.00	61.26	102.98	12.28	AV
4	2483.5	48.41	54.00	-5.59	35.90	12.51	AV
5	2488.5	50.90	54.00	-3.10	38.36	12.54	AV
6	2500	43.37	54.00	-10.63	30.77	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11b_Ch11_2.462G	Humidity (%RH)	56.0

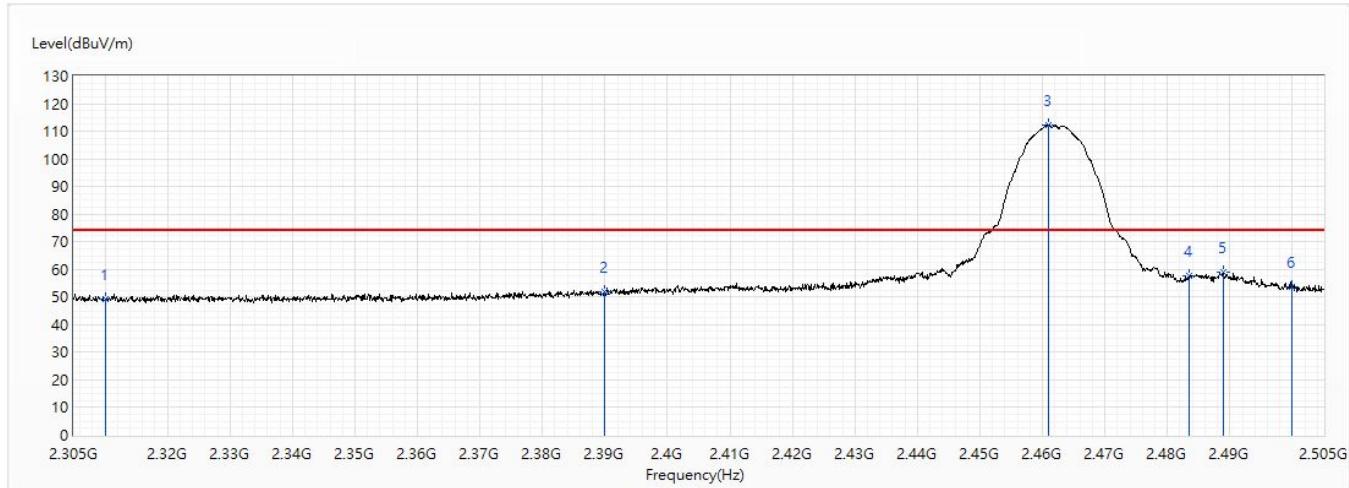


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.43	74.00	-24.57	37.81	11.62	PK
2	2390	51.79	74.00	-22.21	39.76	12.03	PK
3	2461	112.15	74.00	38.15	99.75	12.40	PK
4	2483.5	57.61	74.00	-16.39	45.10	12.51	PK
5	2488.9	58.94	74.00	-15.06	46.40	12.54	PK
6	2500	53.76	74.00	-20.24	41.16	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11b_Ch11_2.462G	Humidity (%RH)	56.0

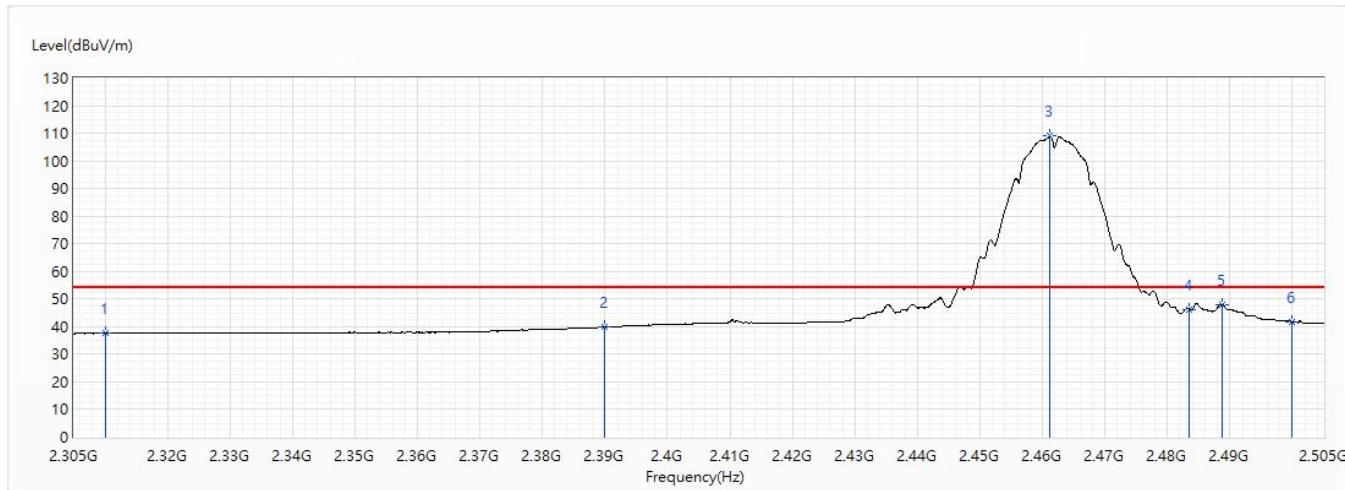


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.61	54.00	-16.39	25.99	11.62	AV
2	2390	39.83	54.00	-14.17	27.80	12.03	AV
3	2461.2	108.98	54.00	54.98	96.58	12.40	AV
4	2483.5	46.25	54.00	-7.75	33.74	12.51	AV
5	2488.7	48.01	54.00	-5.99	35.47	12.54	AV
6	2500	41.86	54.00	-12.14	29.26	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch11_2.462G	Humidity (%RH)	56.0

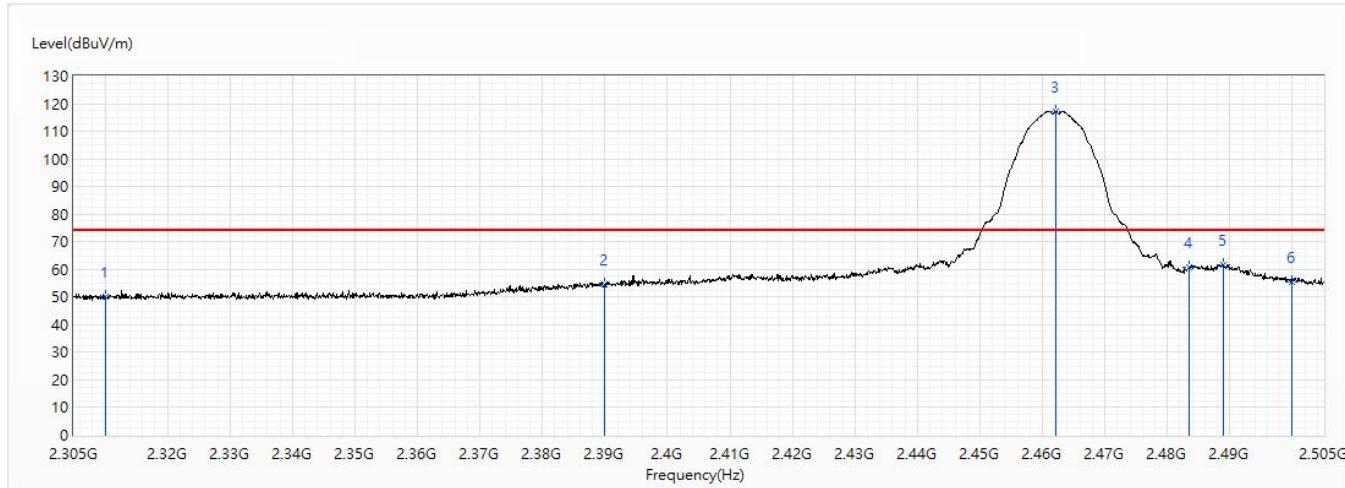


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.96	74.00	-24.04	38.34	11.62	PK
2	2390	54.47	74.00	-19.53	42.44	12.03	PK
3	2462.1	117.13	74.00	43.13	104.72	12.41	PK
4	2483.5	60.67	74.00	-13.33	48.16	12.51	PK
5	2489	61.73	74.00	-12.27	49.19	12.54	PK
6	2500	55.48	74.00	-18.52	42.88	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11b_Ch11_2.462G	Humidity (%RH)	56.0

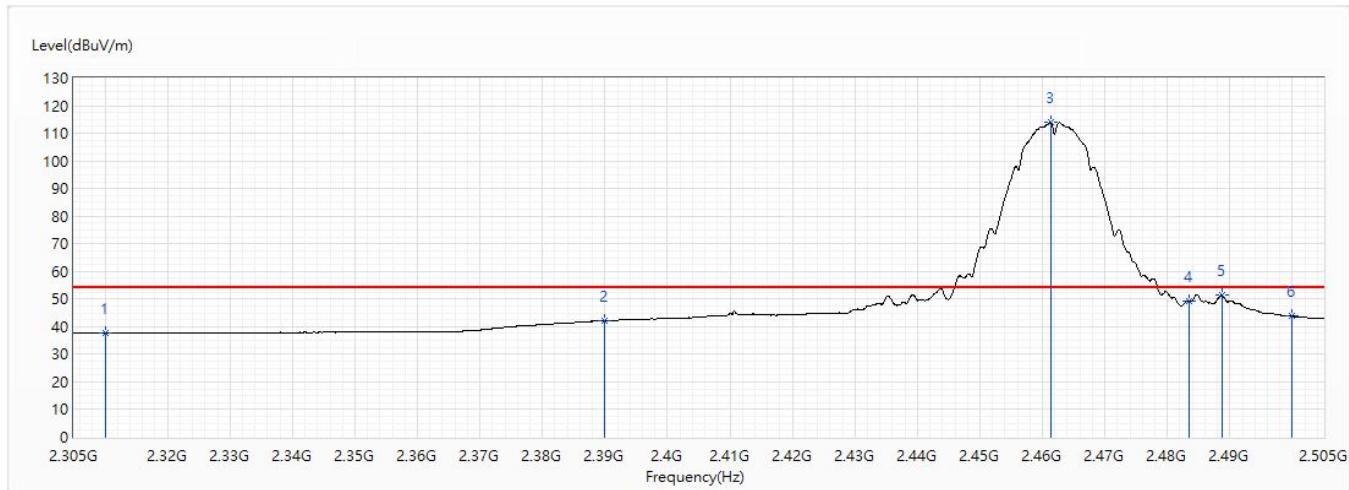


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.62	54.00	-16.38	26.00	11.62	AV
2	2390	42.17	54.00	-11.83	30.14	12.03	AV
3	2461.3	113.94	54.00	59.94	101.53	12.41	AV
4	2483.5	49.42	54.00	-4.58	36.91	12.51	AV
5	2488.7	51.26	54.00	-2.74	38.72	12.54	AV
6	2500	43.90	54.00	-10.10	31.30	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch1_2.412G	Humidity (%RH)	56.0

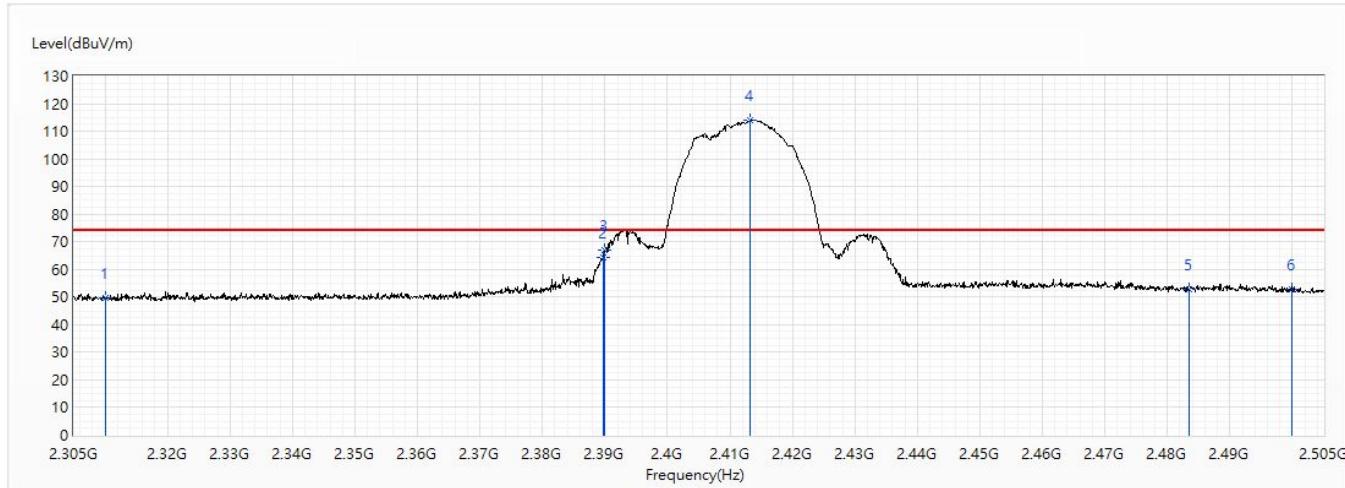


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.80	74.00	-24.20	38.18	11.62	PK
2	2389.7	64.53	74.00	-9.47	52.50	12.03	PK
3	2390	66.80	74.00	-7.20	54.77	12.03	PK
4	2413.3	113.94	74.00	39.94	101.79	12.15	PK
5	2483.5	52.75	74.00	-21.25	40.24	12.51	PK
6	2500	52.88	74.00	-21.12	40.28	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch1_2.412G	Humidity (%RH)	56.0

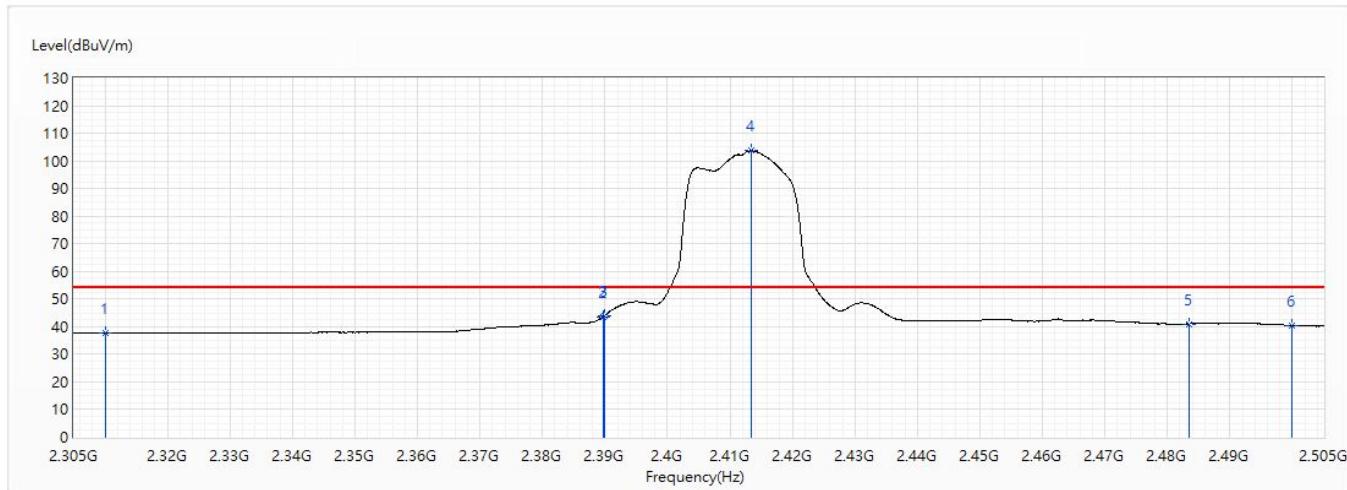


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.61	54.00	-16.39	25.99	11.62	AV
2	2389.7	43.57	54.00	-10.43	31.54	12.03	AV
3	2390	44.02	54.00	-9.98	31.99	12.03	AV
4	2413.5	103.70	54.00	49.70	91.55	12.15	AV
5	2483.5	41.04	54.00	-12.96	28.53	12.51	AV
6	2500	40.42	54.00	-13.58	27.82	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch1_2.412G	Humidity (%RH)	56.0

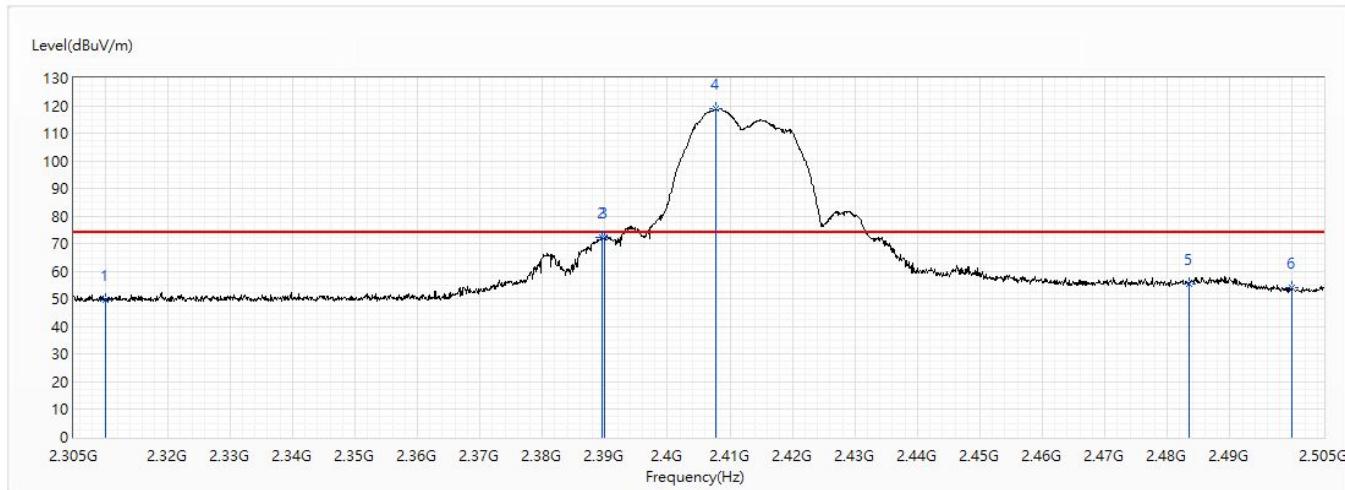


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.49	74.00	-24.51	37.87	11.62	PK
2	2389.6	72.35	74.00	-1.65	60.32	12.03	PK
3	2390	72.34	74.00	-1.66	60.31	12.03	PK
4	2407.7	119.02	74.00	45.02	106.90	12.12	PK
5	2483.5	55.61	74.00	-18.39	43.10	12.51	PK
6	2500	54.15	74.00	-19.85	41.55	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/12
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch1_2.412G	Humidity (%RH)	56.0

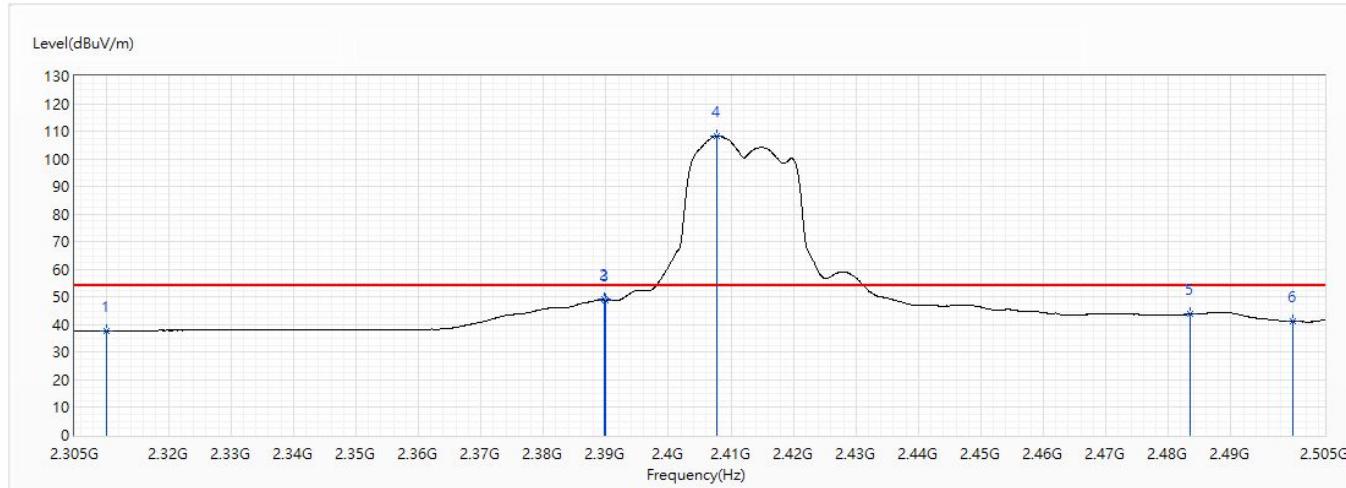


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.79	54.00	-16.21	26.17	11.62	AV
2	2389.7	49.04	54.00	-4.96	37.01	12.03	AV
3	2390	49.01	54.00	-4.99	36.98	12.03	AV
4	2407.7	108.17	54.00	54.17	96.05	12.12	AV
5	2483.5	43.84	54.00	-10.16	31.33	12.51	AV
6	2500	41.12	54.00	-12.88	28.52	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch6_2.437G	Humidity (%RH)	56.0

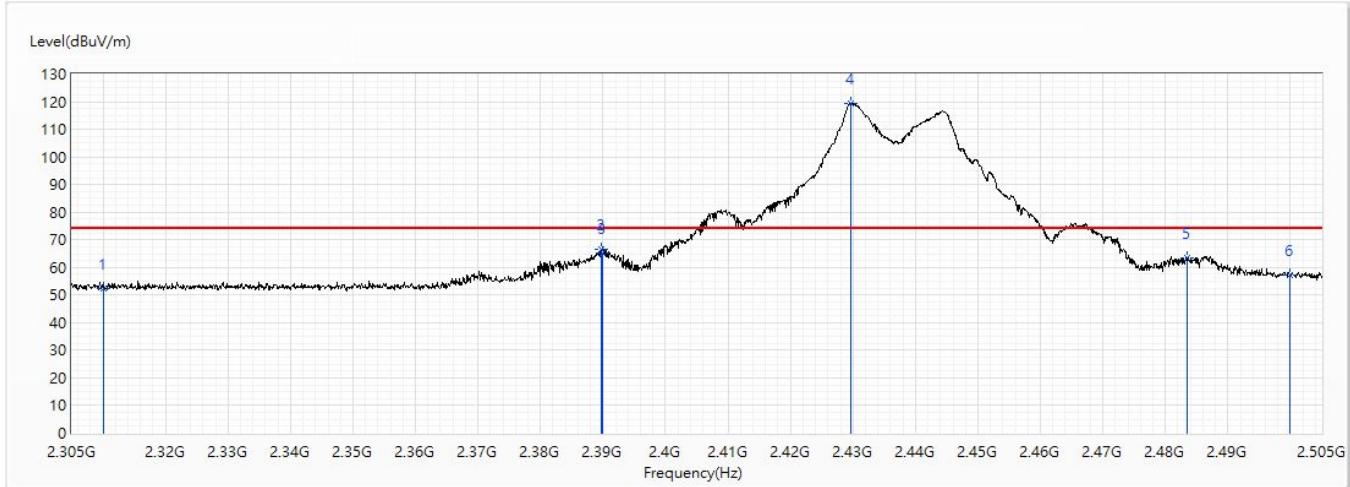


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	52.50	74.00	-21.50	40.88	11.62	PK
2	2389.7	66.49	74.00	-7.51	54.46	12.03	PK
3	2390	65.33	74.00	-8.67	53.30	12.03	PK
4	2429.6	119.39	74.00	45.39	107.15	12.24	PK
5	2483.5	63.52	74.00	-10.48	51.01	12.51	PK
6	2500	57.12	74.00	-16.88	44.52	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch6_2.437G	Humidity (%RH)	56.0

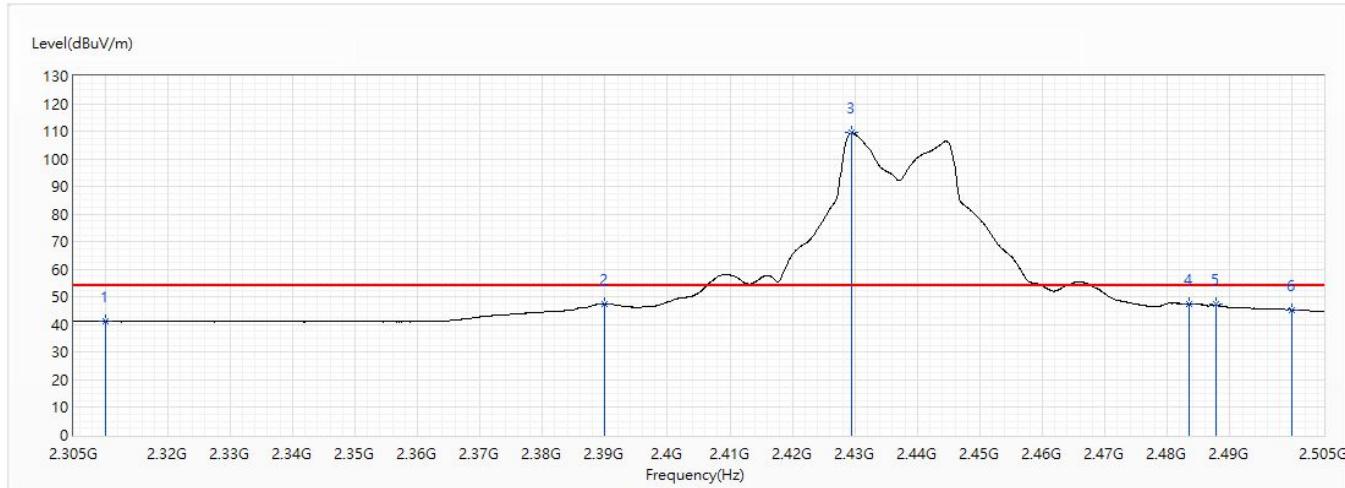


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.13	54.00	-12.87	29.51	11.62	AV
2	2390	47.46	54.00	-6.54	35.43	12.03	AV
3	2429.5	109.42	54.00	55.42	97.18	12.24	AV
4	2483.5	47.60	54.00	-6.40	35.09	12.51	AV
5	2487.8	47.39	54.00	-6.61	34.85	12.54	AV
6	2500	45.44	54.00	-8.56	32.84	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch6_2.437G	Humidity (%RH)	56.0

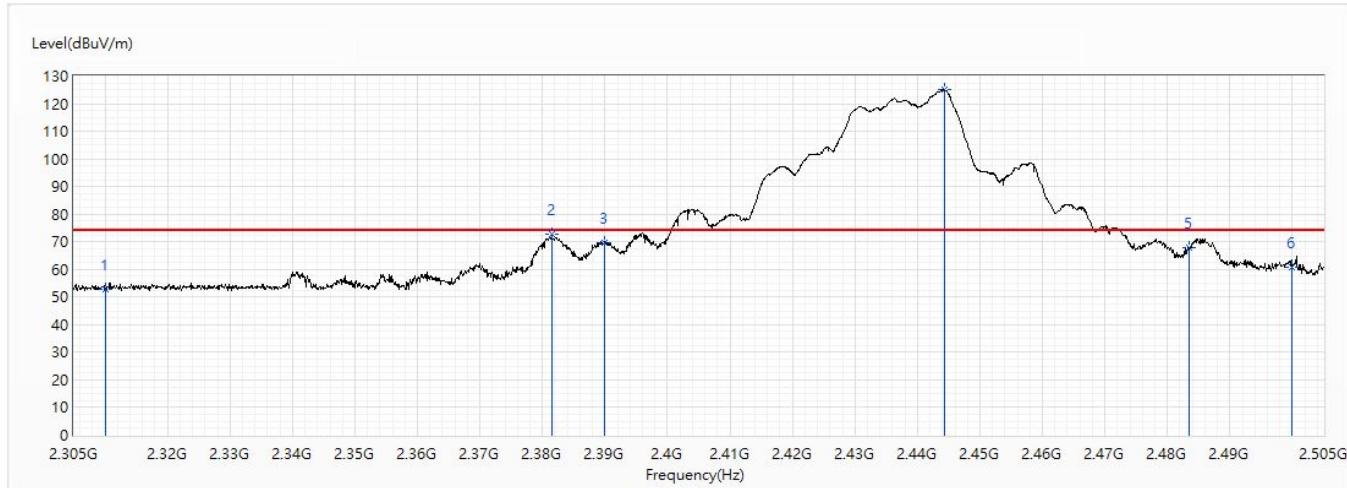


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	52.88	74.00	-21.12	41.26	11.62	PK
2	2381.6	72.67	74.00	-1.33	60.68	11.99	PK
3	2390	69.68	74.00	-4.32	57.65	12.03	PK
4	2444.3	125.02	74.00	51.02	112.70	12.32	PK
5	2483.5	67.99	74.00	-6.01	55.48	12.51	PK
6	2500	60.63	74.00	-13.37	48.03	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch6_2.437G	Humidity (%RH)	56.0

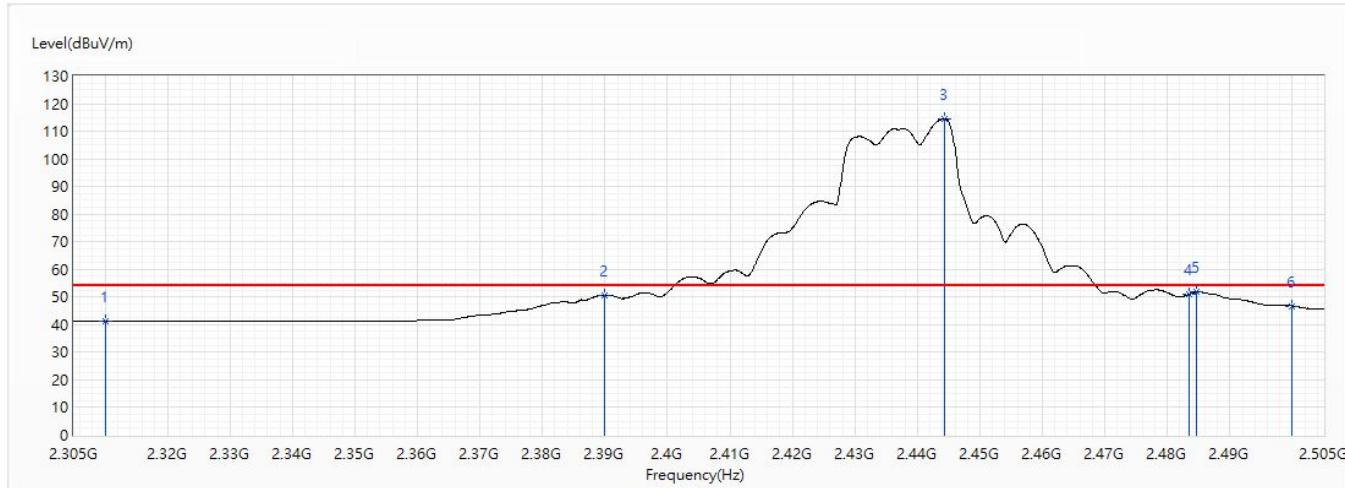


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.17	54.00	-12.83	29.55	11.62	AV
2	2390	50.73	54.00	-3.27	38.70	12.03	AV
3	2444.3	114.61	54.00	60.61	102.29	12.32	AV
4	2483.5	51.05	54.00	-2.95	38.54	12.51	AV
5	2484.6	51.88	54.00	-2.12	39.36	12.52	AV
6	2500	46.80	54.00	-7.20	34.20	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch11_2.462G	Humidity (%RH)	56.0

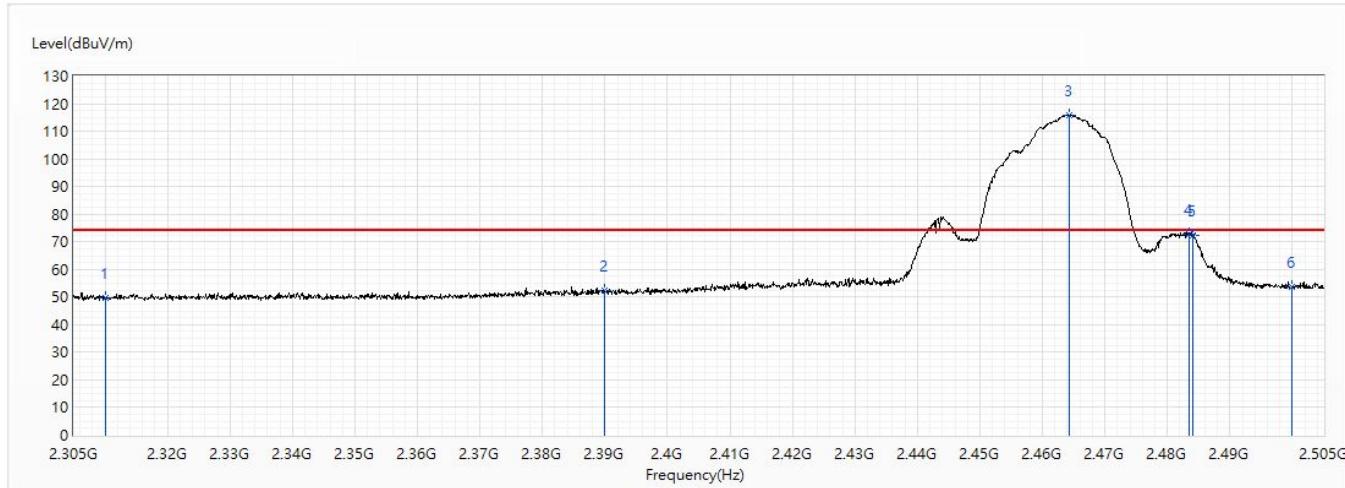


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.64	74.00	-24.36	38.02	11.62	PK
2	2390	52.25	74.00	-21.75	40.22	12.03	PK
3	2464.2	115.79	74.00	41.79	103.38	12.41	PK
4	2483.5	72.79	74.00	-1.21	60.28	12.51	PK
5	2484.1	72.23	74.00	-1.77	59.72	12.51	PK
6	2500	53.78	74.00	-20.22	41.18	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11g_Ch11_2.462G	Humidity (%RH)	56.0

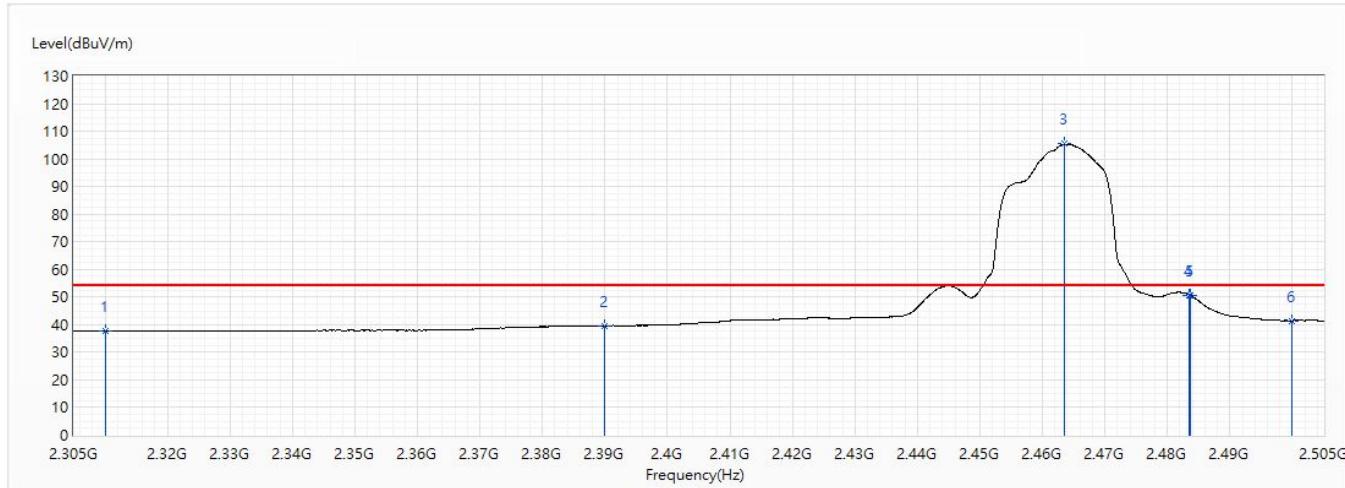


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.67	54.00	-16.33	26.05	11.62	AV
2	2390	39.63	54.00	-14.37	27.60	12.03	AV
3	2463.6	105.38	54.00	51.38	92.97	12.41	AV
4	2483.5	50.65	54.00	-3.35	38.14	12.51	AV
5	2483.6	50.57	54.00	-3.43	38.06	12.51	AV
6	2500	41.47	54.00	-12.53	28.87	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch11_2.462G	Humidity (%RH)	56.0

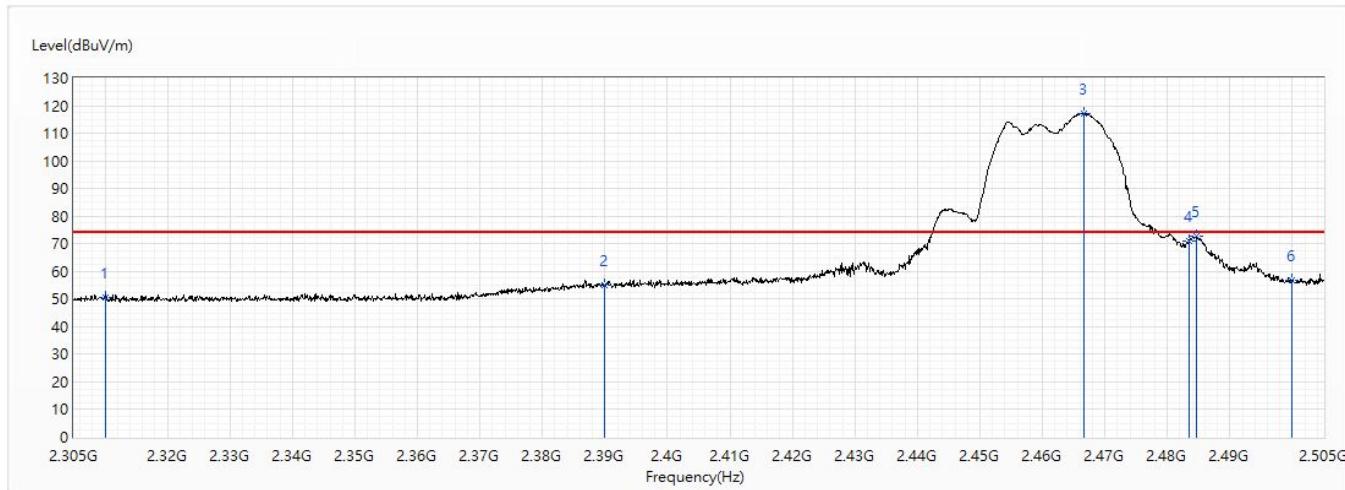


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.48	74.00	-23.52	38.86	11.62	PK
2	2390	55.01	74.00	-18.99	42.98	12.03	PK
3	2466.7	117.06	74.00	43.06	104.63	12.43	PK
4	2483.5	71.21	74.00	-2.79	58.70	12.51	PK
5	2484.7	72.71	74.00	-1.29	60.19	12.52	PK
6	2500	56.84	74.00	-17.16	44.24	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 1: SISO Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11g_Ch11_2.462G	Humidity (%RH)	56.0

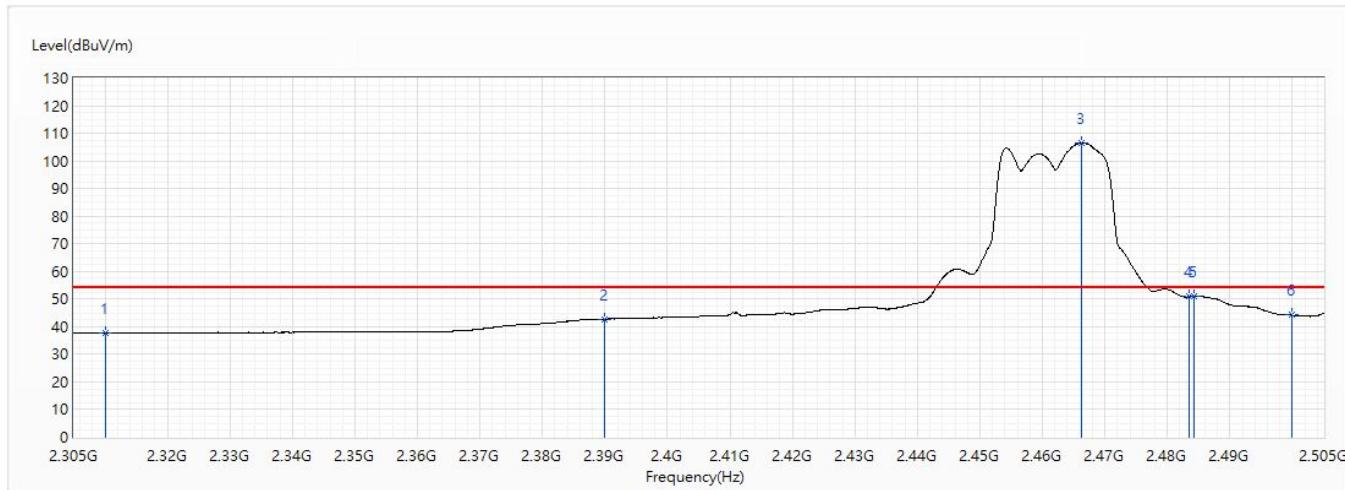


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.77	54.00	-16.23	26.15	11.62	AV
2	2390	42.80	54.00	-11.20	30.77	12.03	AV
3	2466.2	106.58	54.00	52.58	94.15	12.43	AV
4	2483.5	50.86	54.00	-3.14	38.35	12.51	AV
5	2484.3	51.20	54.00	-2.80	38.69	12.51	AV
6	2500	44.15	54.00	-9.85	31.55	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch1_2.412G	Humidity (%RH)	56.0

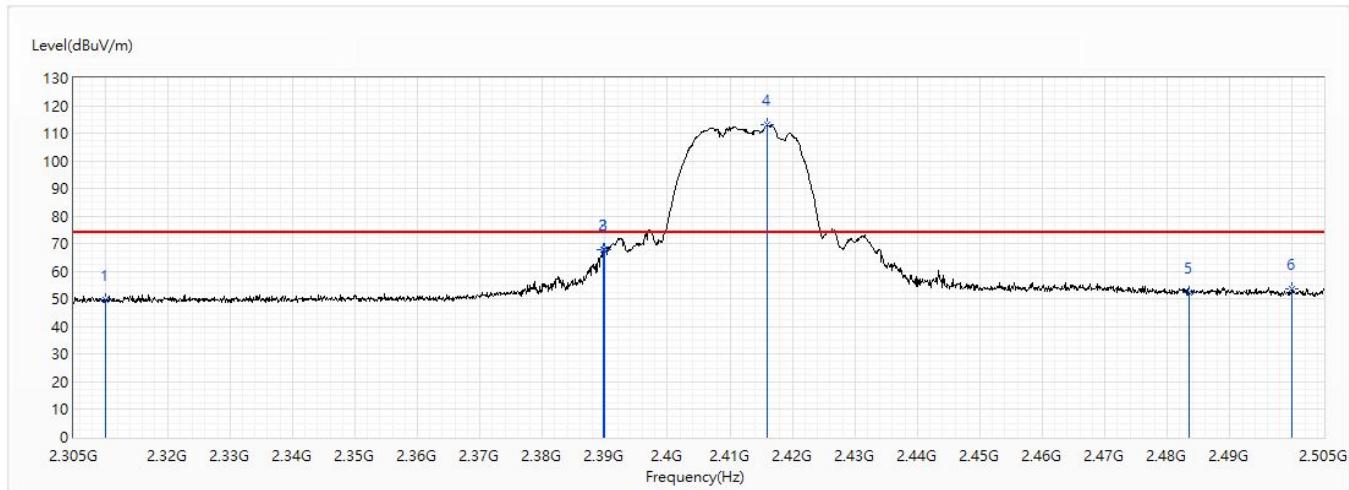


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.86	74.00	-24.14	38.24	11.62	PK
2	2389.7	67.75	74.00	-6.25	55.72	12.03	PK
3	2390	67.91	74.00	-6.09	55.88	12.03	PK
4	2416	112.96	74.00	38.96	100.79	12.17	PK
5	2483.5	52.33	74.00	-21.67	39.82	12.51	PK
6	2500	53.87	74.00	-20.13	41.27	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch1_2.412G	Humidity (%RH)	56.0

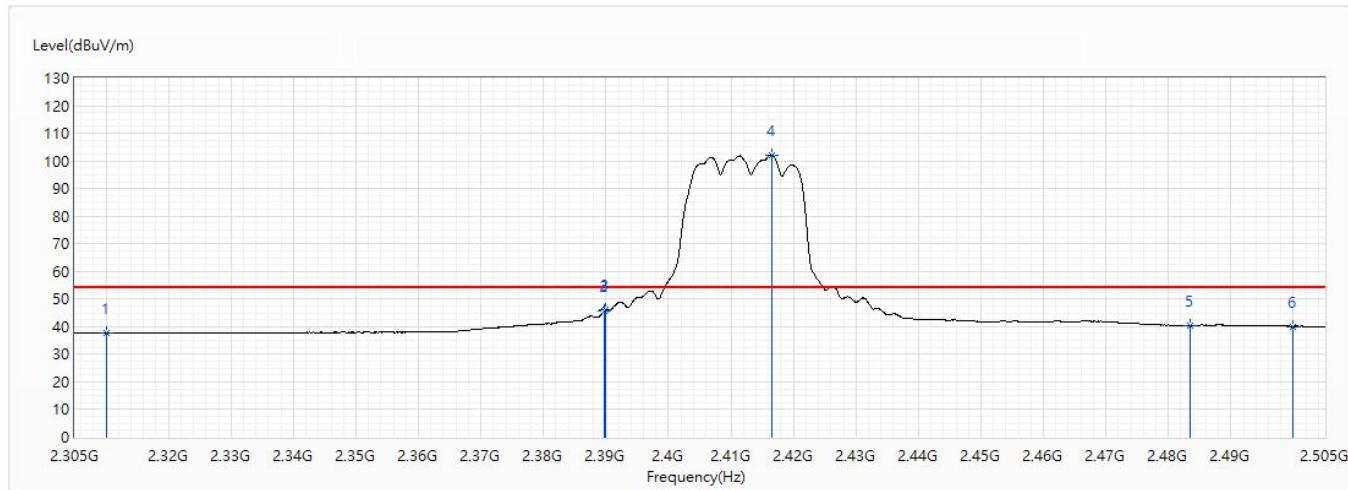


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.66	54.00	-16.34	26.04	11.62	AV
2	2389.8	45.72	54.00	-8.28	33.69	12.03	AV
3	2390	46.00	54.00	-8.00	33.97	12.03	AV
4	2416.5	102.23	54.00	48.23	90.06	12.17	AV
5	2483.5	40.48	54.00	-13.52	27.97	12.51	AV
6	2500	40.09	54.00	-13.91	27.49	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch1_2.412G	Humidity (%RH)	56.0

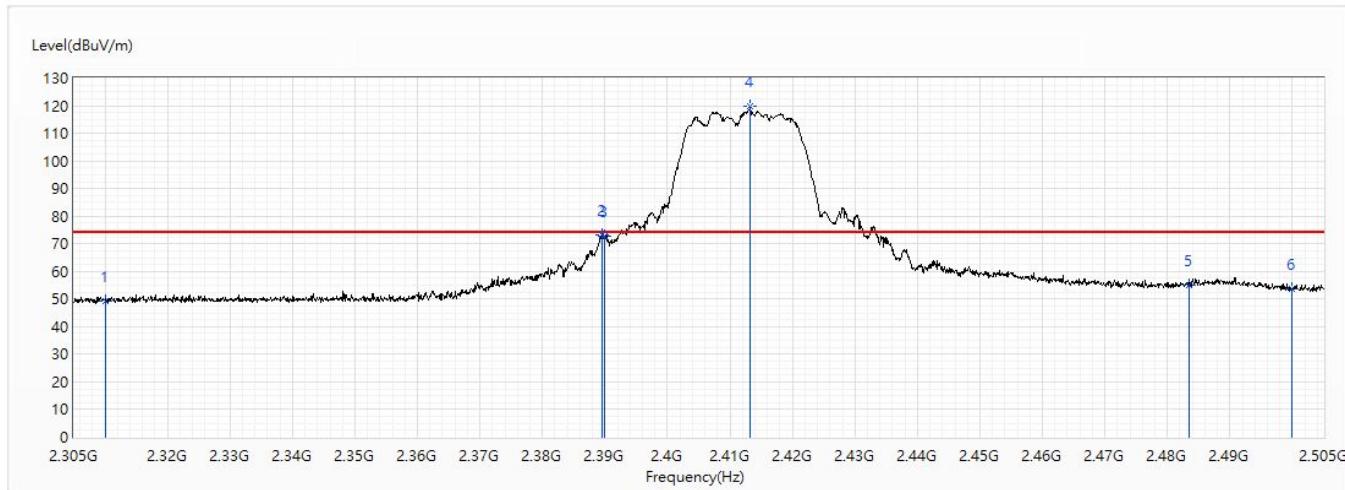


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.21	74.00	-24.79	37.59	11.62	PK
2	2389.5	73.28	74.00	-0.72	61.26	12.02	PK
3	2390	72.85	74.00	-1.15	60.82	12.03	PK
4	2413.3	119.66	74.00	45.66	107.51	12.15	PK
5	2483.5	55.15	74.00	-18.85	42.64	12.51	PK
6	2500	53.71	74.00	-20.29	41.11	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch1_2.412G	Humidity (%RH)	56.0

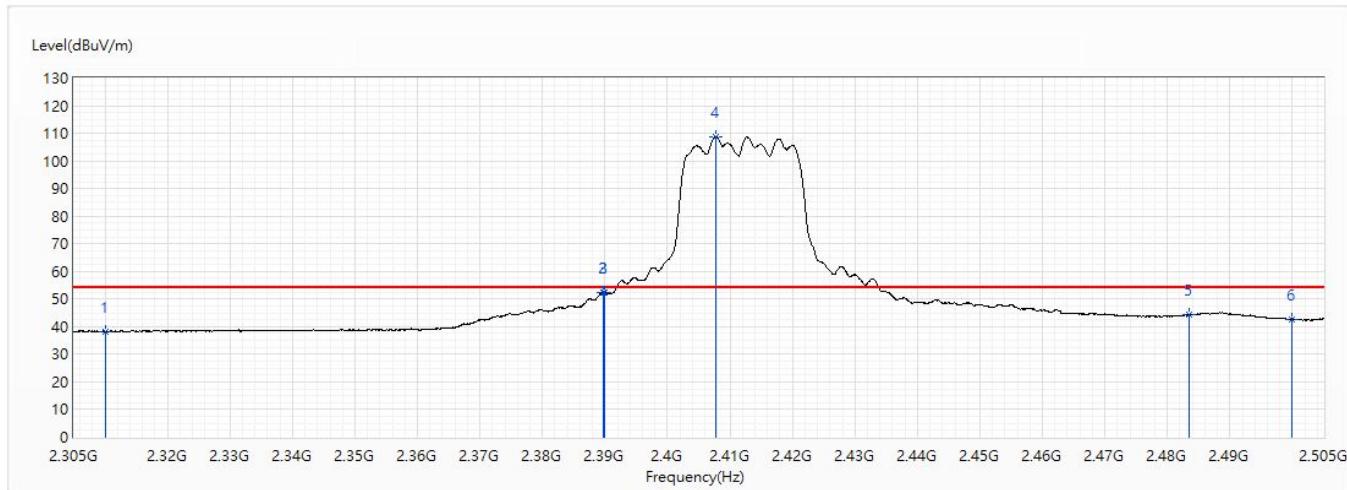


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.35	54.00	-15.65	26.73	11.62	AV
2	2389.7	52.29	54.00	-1.71	40.26	12.03	AV
3	2390	52.29	54.00	-1.71	40.26	12.03	AV
4	2407.7	108.76	54.00	54.76	96.64	12.12	AV
5	2483.5	44.24	54.00	-9.76	31.73	12.51	AV
6	2500	42.81	54.00	-11.19	30.21	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch6_2.437G	Humidity (%RH)	56.0

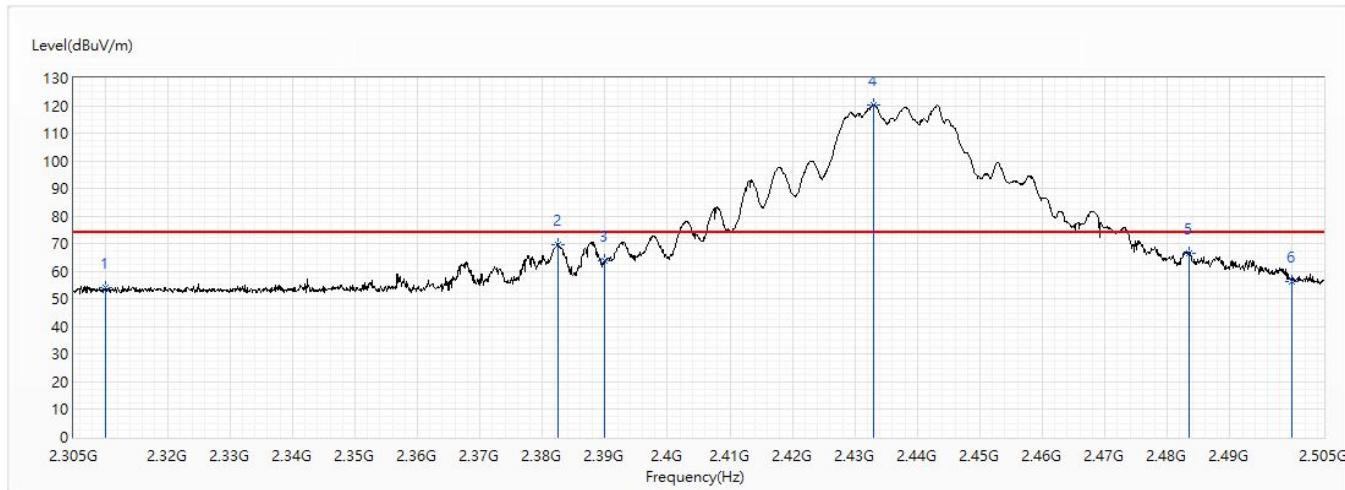


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	54.06	74.00	-19.94	42.44	11.62	PK
2	2382.4	69.88	74.00	-4.12	57.89	11.99	PK
3	2390	63.83	74.00	-10.17	51.80	12.03	PK
4	2433	120.21	74.00	46.21	107.96	12.25	PK
5	2483.5	66.34	74.00	-7.66	53.83	12.51	PK
6	2500	56.44	74.00	-17.56	43.84	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch6_2.437G	Humidity (%RH)	56.0

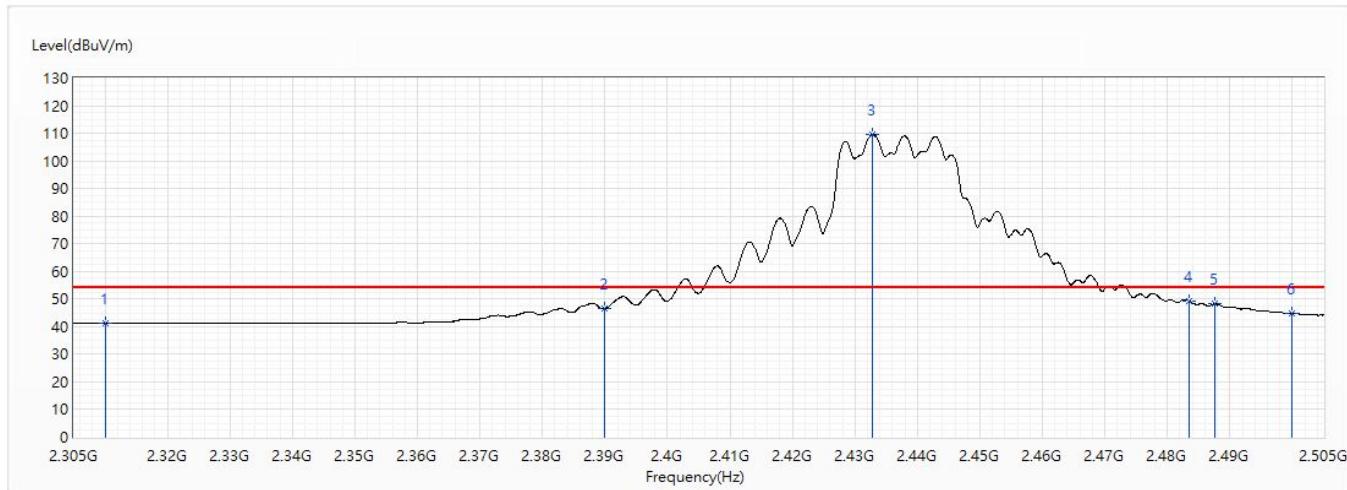


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.12	54.00	-12.88	29.50	11.62	AV
2	2390	46.53	54.00	-7.47	34.50	12.03	AV
3	2432.8	109.68	54.00	55.68	97.43	12.25	AV
4	2483.5	49.29	54.00	-4.71	36.78	12.51	AV
5	2487.6	48.37	54.00	-5.63	35.83	12.54	AV
6	2500	44.71	54.00	-9.29	32.11	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch6_2.437G	Humidity (%RH)	56.0

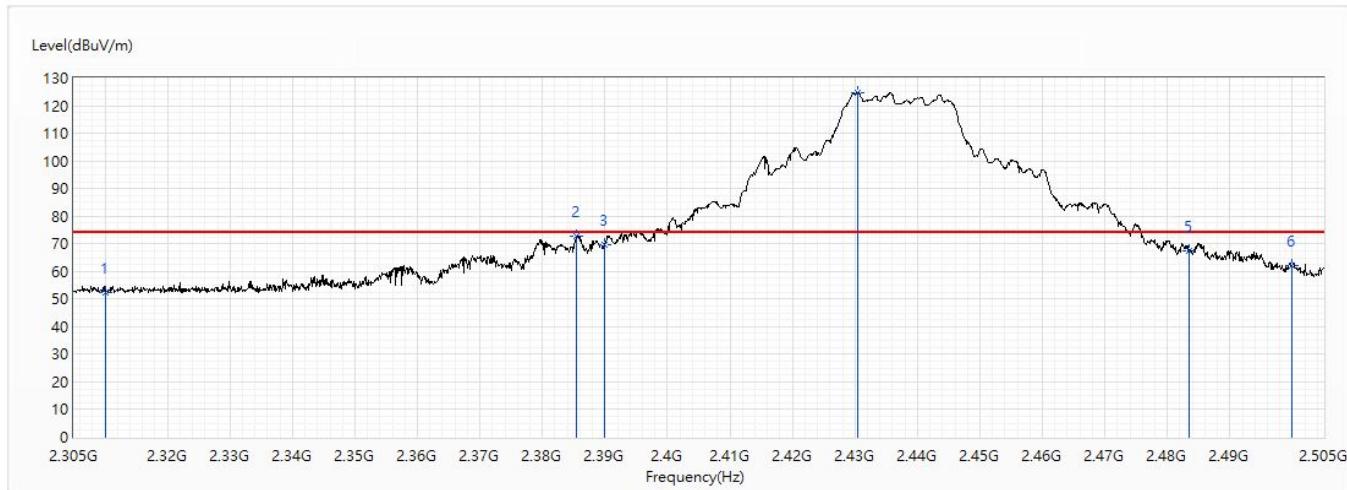


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	52.50	74.00	-21.50	40.88	11.62	PK
2	2385.5	72.95	74.00	-1.05	60.93	12.02	PK
3	2390	69.81	74.00	-4.19	57.78	12.03	PK
4	2430.5	124.65	74.00	50.65	112.41	12.24	PK
5	2483.5	67.60	74.00	-6.40	55.09	12.51	PK
6	2500	62.16	74.00	-11.84	49.56	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch6_2.437G	Humidity (%RH)	56.0

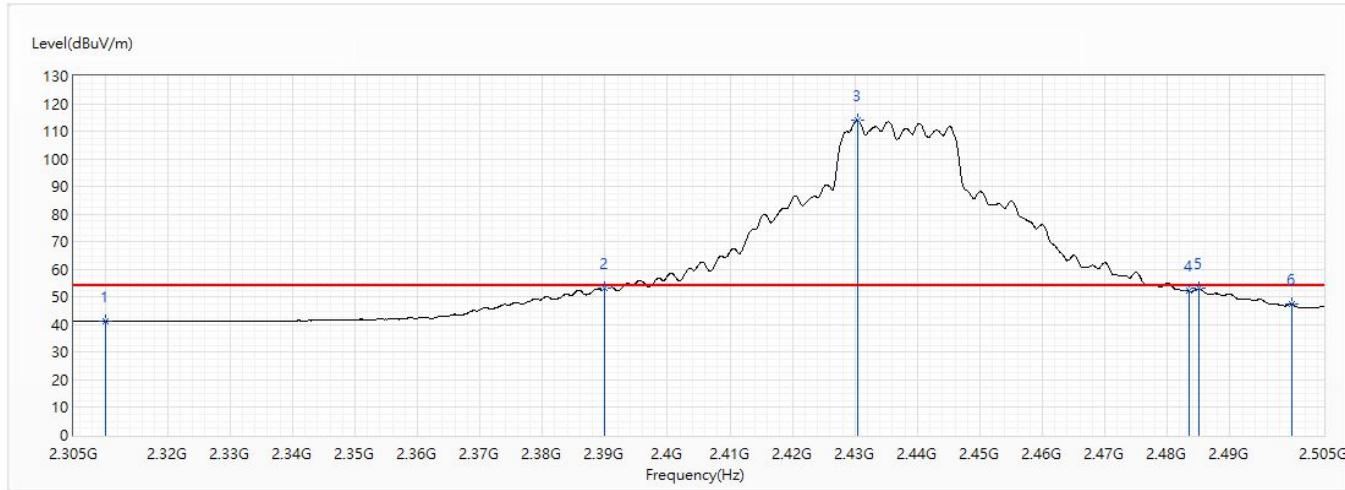


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.21	54.00	-12.79	29.59	11.62	AV
2	2390	53.33	54.00	-0.67	41.30	12.03	AV
3	2430.4	114.00	54.00	60.00	101.76	12.24	AV
4	2483.5	52.19	54.00	-1.81	39.68	12.51	AV
5	2485	53.03	54.00	-0.97	40.51	12.52	AV
6	2500	47.33	54.00	-6.67	34.73	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch11_2.462G	Humidity (%RH)	56.0

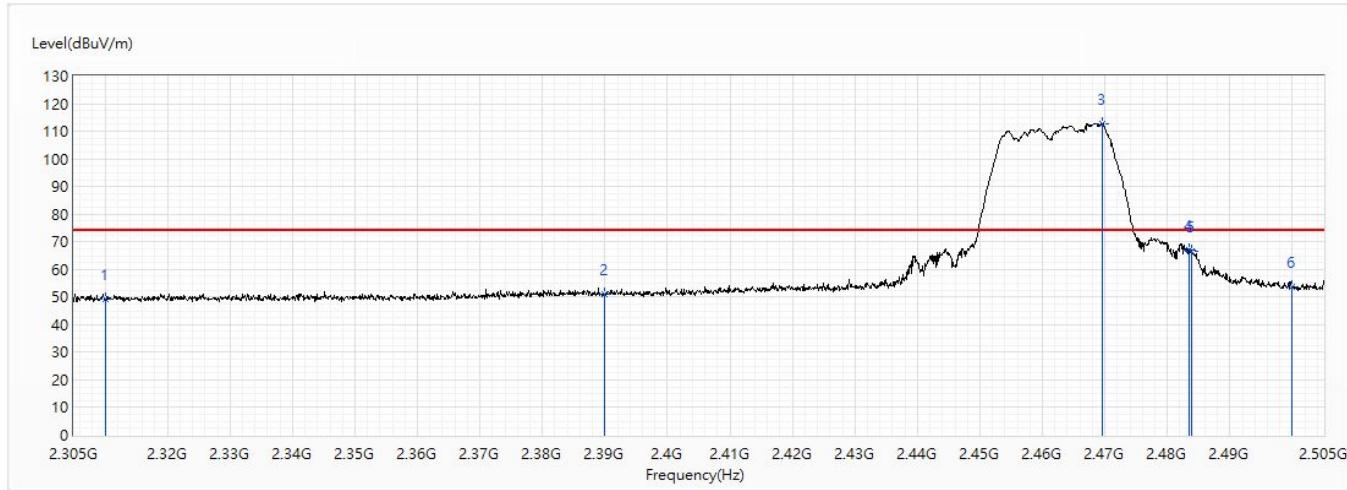


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.10	74.00	-24.90	37.48	11.62	PK
2	2390	50.91	74.00	-23.09	38.88	12.03	PK
3	2469.5	112.79	74.00	38.79	100.35	12.44	PK
4	2483.5	67.21	74.00	-6.79	54.70	12.51	PK
5	2483.9	66.71	74.00	-7.29	54.20	12.51	PK
6	2500	53.64	74.00	-20.36	41.04	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch11_2.462G	Humidity (%RH)	56.0

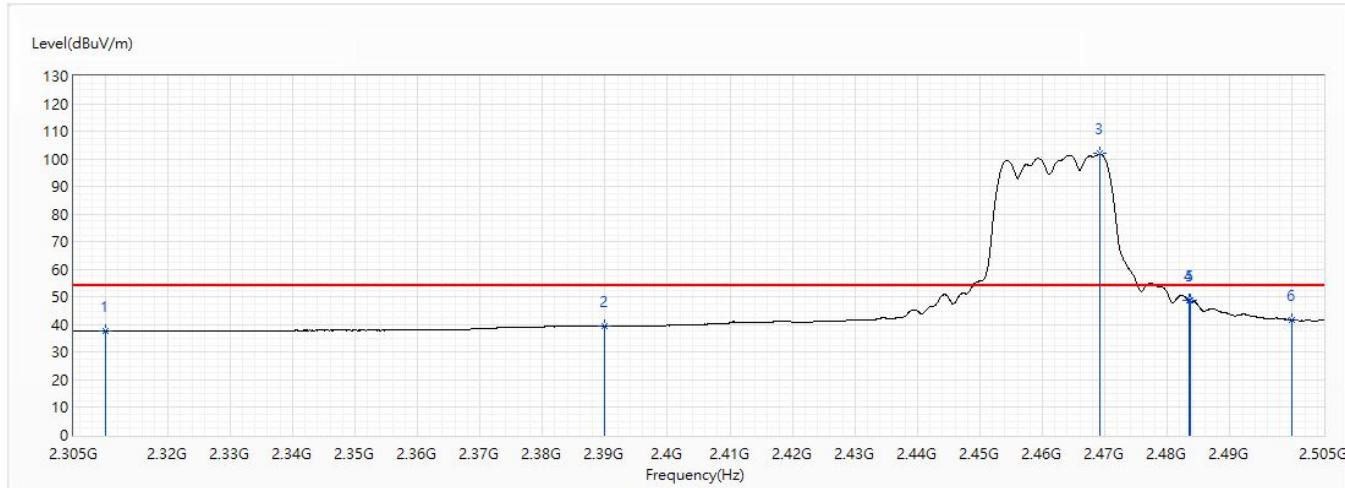


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.72	54.00	-16.28	26.10	11.62	AV
2	2390	39.52	54.00	-14.48	27.49	12.03	AV
3	2469.1	101.86	54.00	47.86	89.42	12.44	AV
4	2483.5	48.70	54.00	-5.30	36.19	12.51	AV
5	2483.6	48.62	54.00	-5.38	36.11	12.51	AV
6	2500	41.81	54.00	-12.19	29.21	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch11_2.462G	Humidity (%RH)	56.0

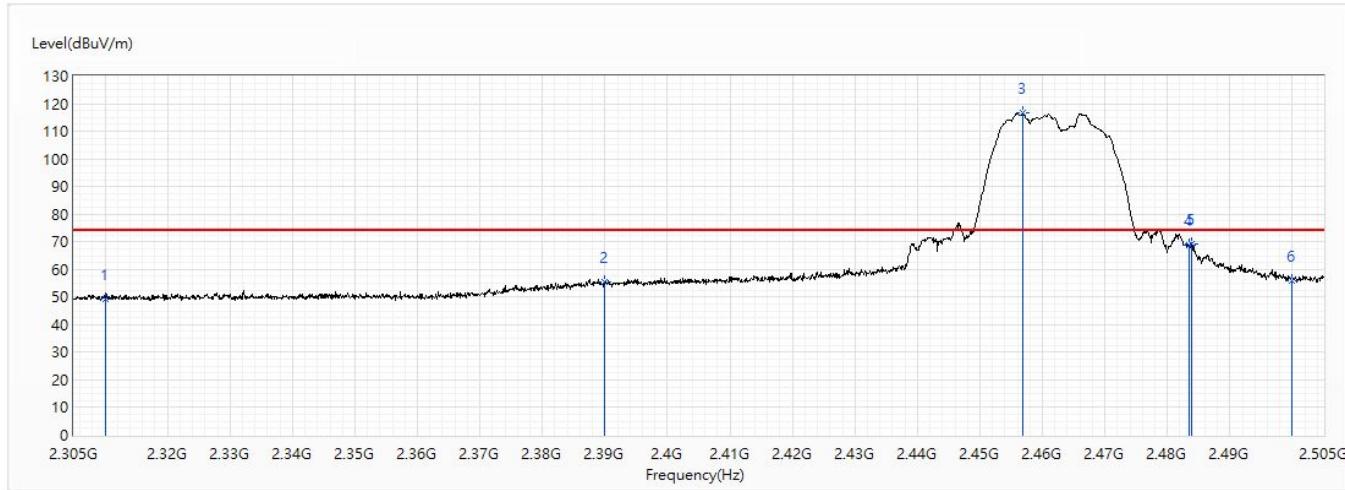


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.45	74.00	-24.55	37.83	11.62	PK
2	2390	55.24	74.00	-18.76	43.21	12.03	PK
3	2456.8	116.48	74.00	42.48	104.10	12.38	PK
4	2483.5	68.87	74.00	-5.13	56.36	12.51	PK
5	2483.9	69.33	74.00	-4.67	56.82	12.51	PK
6	2500	56.01	74.00	-17.99	43.41	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(20M)_Ch11_2.462G	Humidity (%RH)	56.0

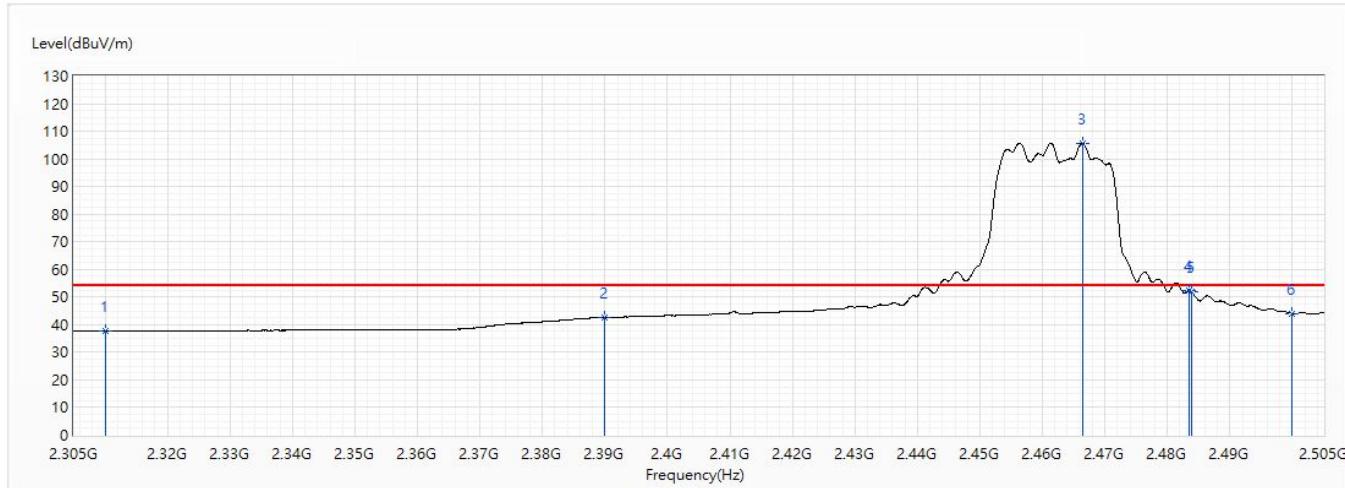


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.71	54.00	-16.29	26.09	11.62	AV
2	2390	42.60	54.00	-11.40	30.57	12.03	AV
3	2466.4	105.80	54.00	51.80	93.37	12.43	AV
4	2483.5	52.25	54.00	-1.75	39.74	12.51	AV
5	2483.9	51.76	54.00	-2.24	39.25	12.51	AV
6	2500	44.02	54.00	-9.98	31.42	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch3_2.422G	Humidity (%RH)	56.0

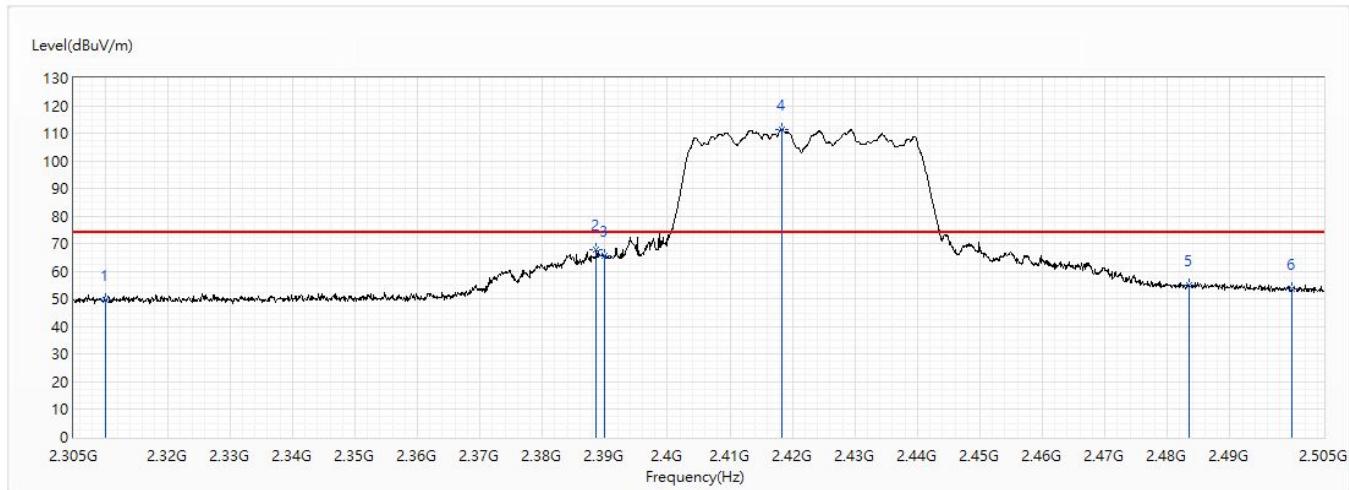


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.70	74.00	-24.30	38.08	11.62	PK
2	2388.6	67.99	74.00	-6.01	55.97	12.02	PK
3	2390	65.82	74.00	-8.18	53.79	12.03	PK
4	2418.3	111.36	74.00	37.36	99.18	12.18	PK
5	2483.5	55.16	74.00	-18.84	42.65	12.51	PK
6	2500	53.58	74.00	-20.42	40.98	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch3_2.422G	Humidity (%RH)	56.0

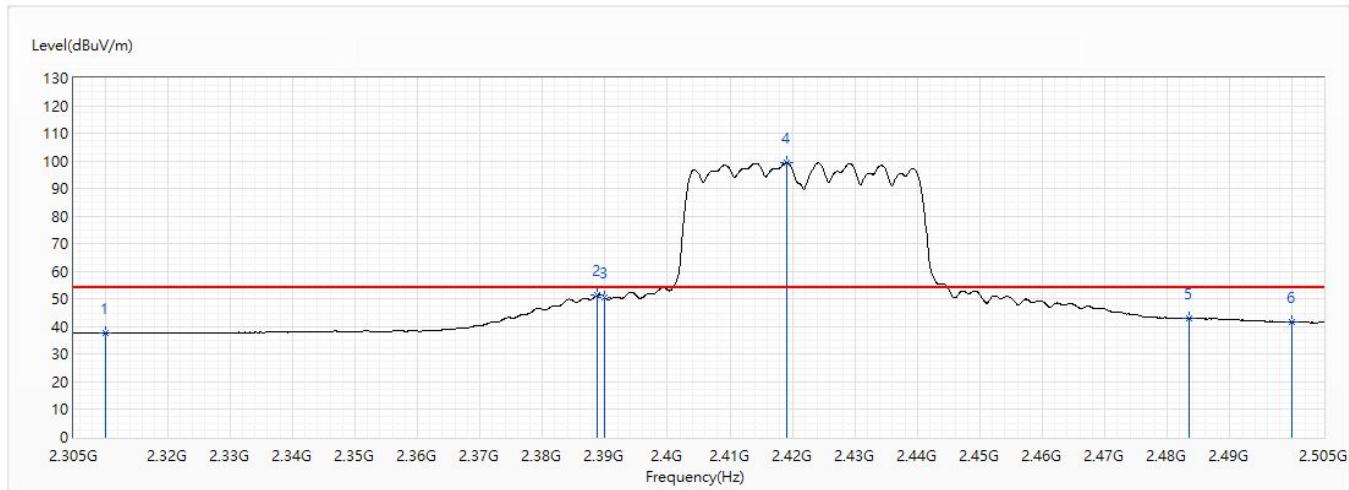


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.68	54.00	-16.32	26.06	11.62	AV
2	2388.7	51.36	54.00	-2.64	39.34	12.02	AV
3	2390	50.52	54.00	-3.48	38.49	12.03	AV
4	2419.1	99.38	54.00	45.38	87.19	12.19	AV
5	2483.5	42.94	54.00	-11.06	30.43	12.51	AV
6	2500	41.72	54.00	-12.28	29.12	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch3_2.422G	Humidity (%RH)	56.0

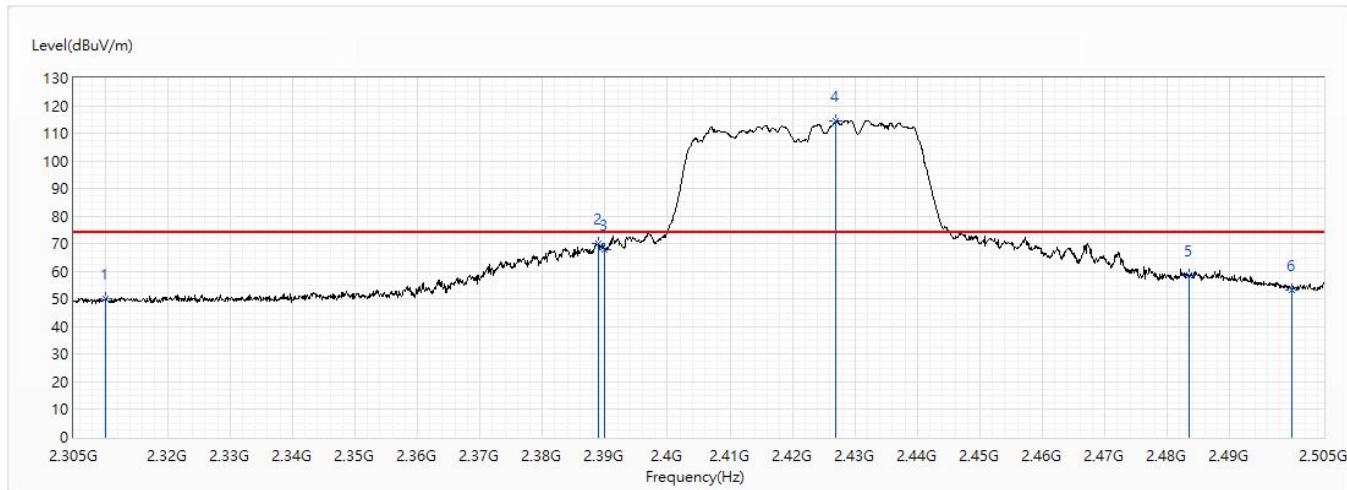


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.13	74.00	-23.87	38.51	11.62	PK
2	2388.9	70.20	74.00	-3.80	58.18	12.02	PK
3	2390	67.83	74.00	-6.17	55.80	12.03	PK
4	2427	114.62	74.00	40.62	102.40	12.22	PK
5	2483.5	58.35	74.00	-15.65	45.84	12.51	PK
6	2500	53.38	74.00	-20.62	40.78	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch3_2.422G	Humidity (%RH)	56.0

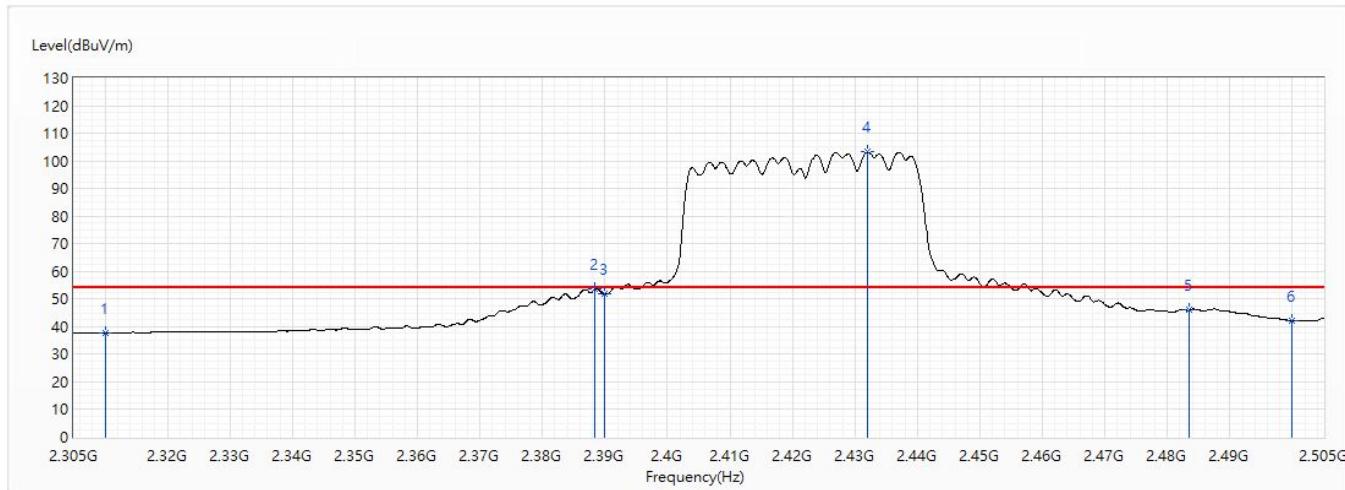


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.88	54.00	-16.12	26.26	11.62	AV
2	2388.4	53.60	54.00	-0.40	41.58	12.02	AV
3	2390	51.77	54.00	-2.23	39.74	12.03	AV
4	2432.1	103.16	54.00	49.16	90.91	12.25	AV
5	2483.5	45.98	54.00	-8.02	33.47	12.51	AV
6	2500	42.27	54.00	-11.73	29.67	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch6_2.437G	Humidity (%RH)	56.0

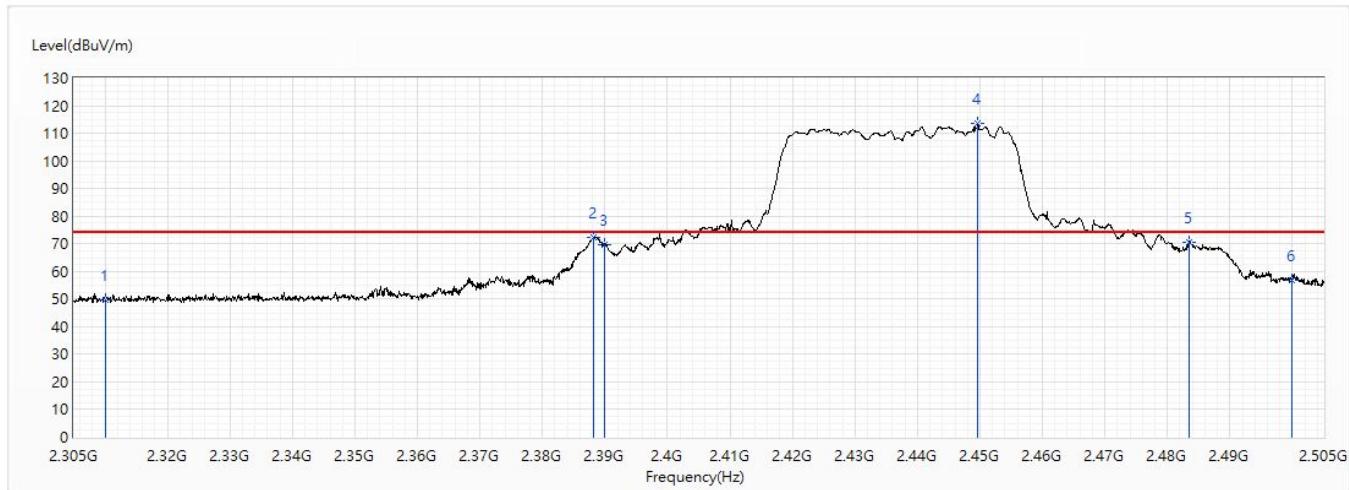


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.67	74.00	-24.33	38.05	11.62	PK
2	2388.1	72.21	74.00	-1.79	60.19	12.02	PK
3	2390	69.65	74.00	-4.35	57.62	12.03	PK
4	2449.7	113.55	74.00	39.55	101.21	12.34	PK
5	2483.5	70.42	74.00	-3.58	57.91	12.51	PK
6	2500	56.65	74.00	-17.35	44.05	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch6_2.437G	Humidity (%RH)	56.0

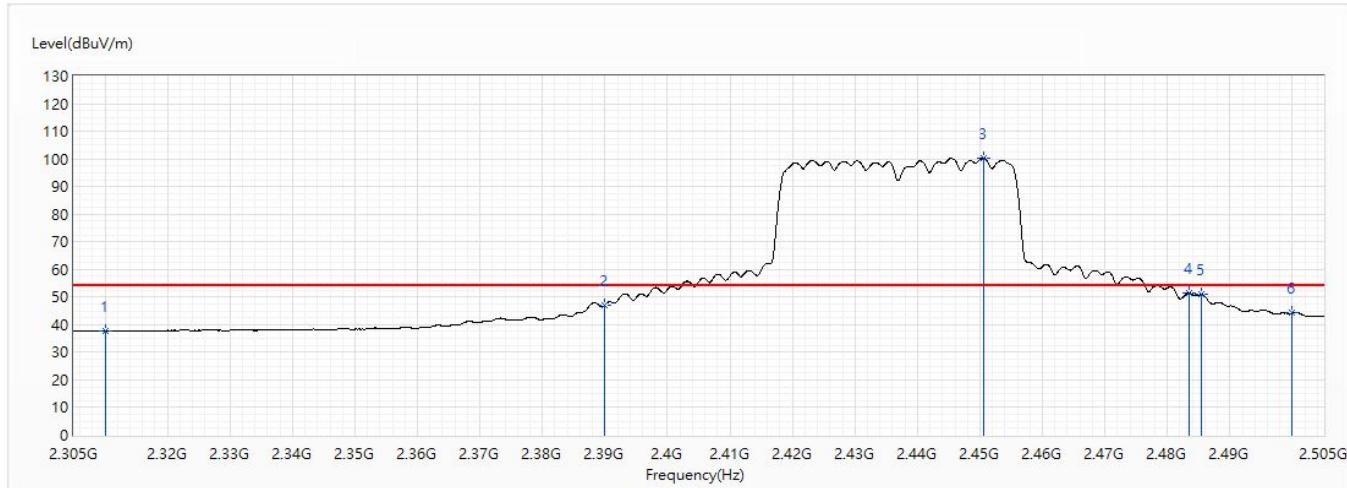


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.74	54.00	-16.26	26.12	11.62	AV
2	2390	47.14	54.00	-6.86	35.11	12.03	AV
3	2450.5	100.29	54.00	46.29	87.95	12.34	AV
4	2483.5	51.36	54.00	-2.64	38.85	12.51	AV
5	2485.5	50.87	54.00	-3.13	38.34	12.53	AV
6	2500	44.17	54.00	-9.83	31.57	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch6_2.437G	Humidity (%RH)	56.0

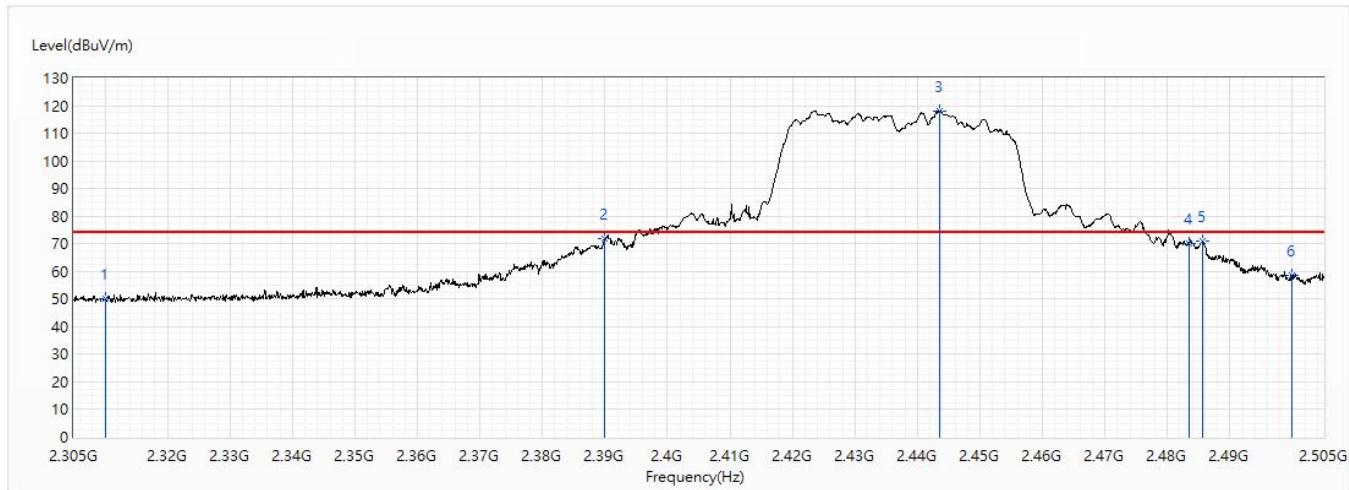


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.35	74.00	-23.65	38.73	11.62	PK
2	2390	71.88	74.00	-2.12	59.85	12.03	PK
3	2443.5	118.22	74.00	44.22	105.92	12.30	PK
4	2483.5	70.25	74.00	-3.75	57.74	12.51	PK
5	2485.6	70.99	74.00	-3.01	58.46	12.53	PK
6	2500	58.69	74.00	-15.31	46.09	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch6_2.437G	Humidity (%RH)	56.0

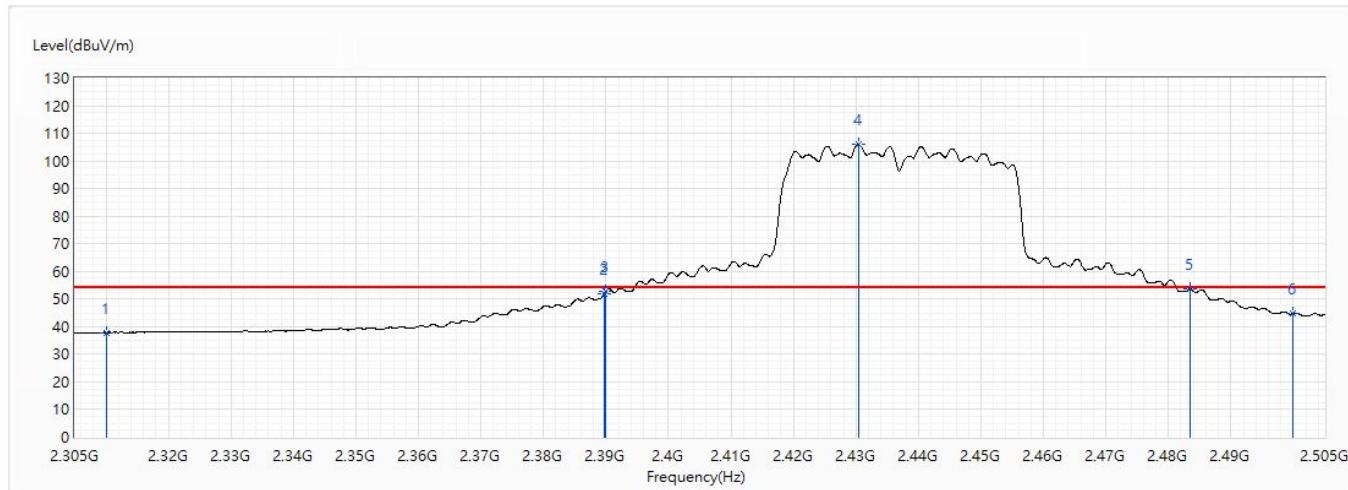


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.90	54.00	-16.10	26.28	11.62	AV
2	2389.7	51.75	54.00	-2.25	39.72	12.03	AV
3	2390	52.83	54.00	-1.17	40.80	12.03	AV
4	2430.4	105.88	54.00	51.88	93.64	12.24	AV
5	2483.5	53.52	54.00	-0.48	41.01	12.51	AV
6	2500	44.80	54.00	-9.20	32.20	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch9_2.452G	Humidity (%RH)	56.0

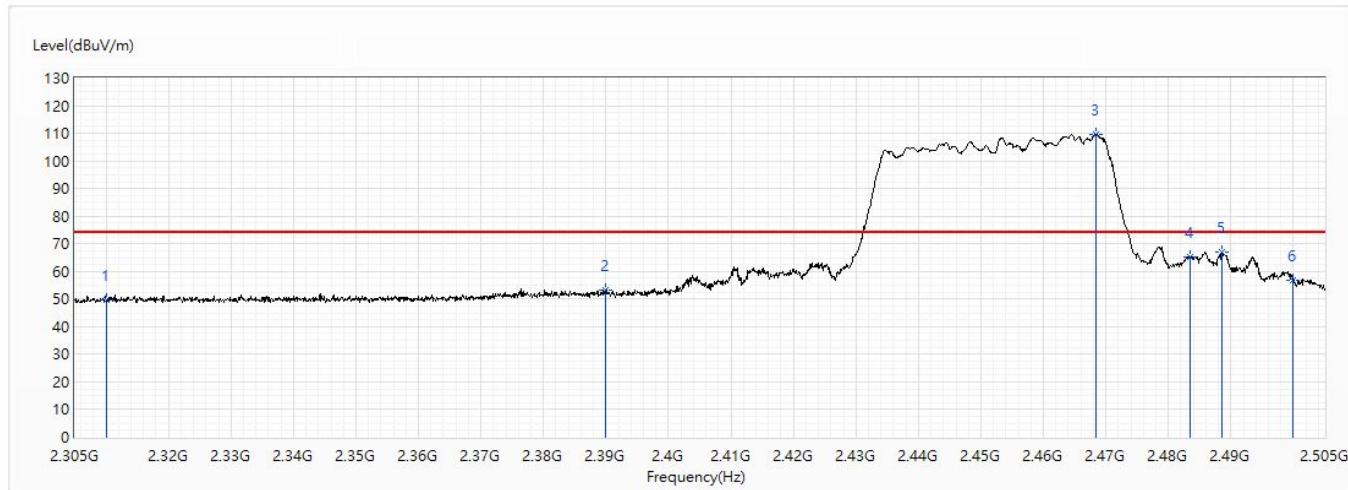


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.71	74.00	-24.29	38.09	11.62	PK
2	2390	53.08	74.00	-20.92	41.05	12.03	PK
3	2468.4	109.70	74.00	35.70	97.27	12.43	PK
4	2483.5	65.18	74.00	-8.82	52.67	12.51	PK
5	2488.5	66.81	74.00	-7.19	54.27	12.54	PK
6	2500	56.95	74.00	-17.05	44.35	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch9_2.452G	Humidity (%RH)	56.0

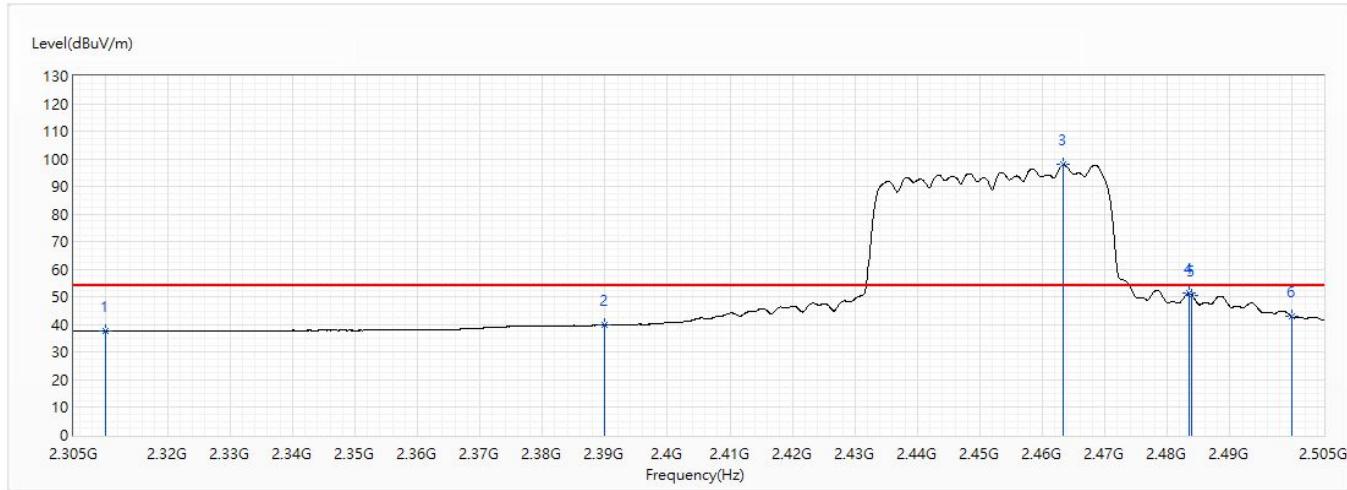


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.73	54.00	-16.27	26.11	11.62	AV
2	2390	39.95	54.00	-14.05	27.92	12.03	AV
3	2463.4	97.90	54.00	43.90	85.49	12.41	AV
4	2483.5	51.32	54.00	-2.68	38.81	12.51	AV
5	2483.9	50.68	54.00	-3.32	38.17	12.51	AV
6	2500	42.83	54.00	-11.17	30.23	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch9_2.452G	Humidity (%RH)	56.0

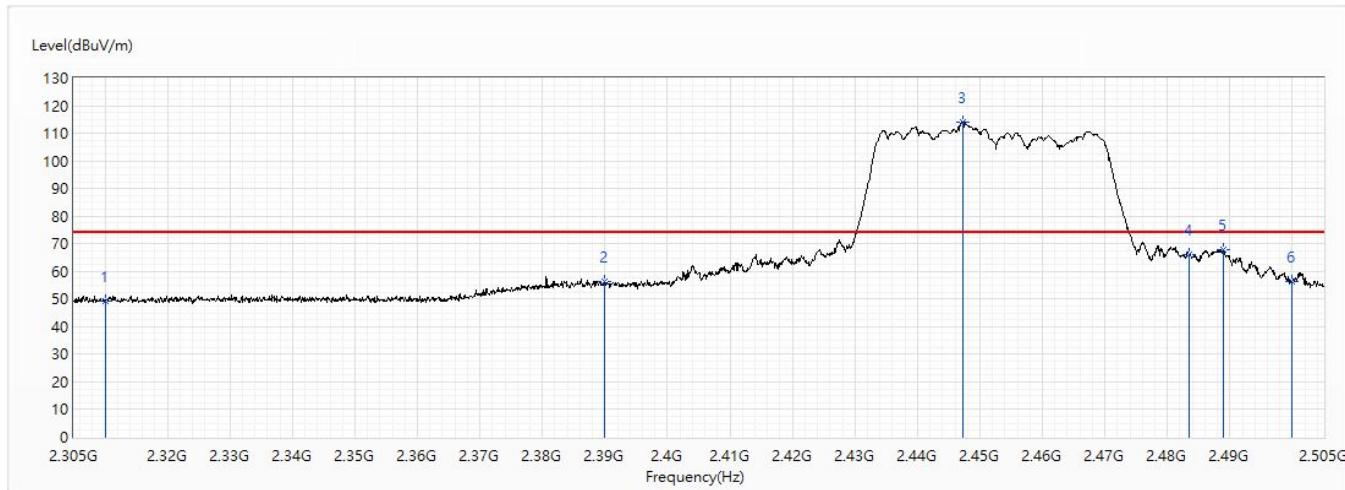


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.11	74.00	-24.89	37.49	11.62	PK
2	2390	56.42	74.00	-17.58	44.39	12.03	PK
3	2447.3	114.16	74.00	40.16	101.83	12.33	PK
4	2483.5	65.96	74.00	-8.04	53.45	12.51	PK
5	2489	67.77	74.00	-6.23	55.23	12.54	PK
6	2500	56.13	74.00	-17.87	43.53	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11n(40M)_Ch9_2.452G	Humidity (%RH)	56.0

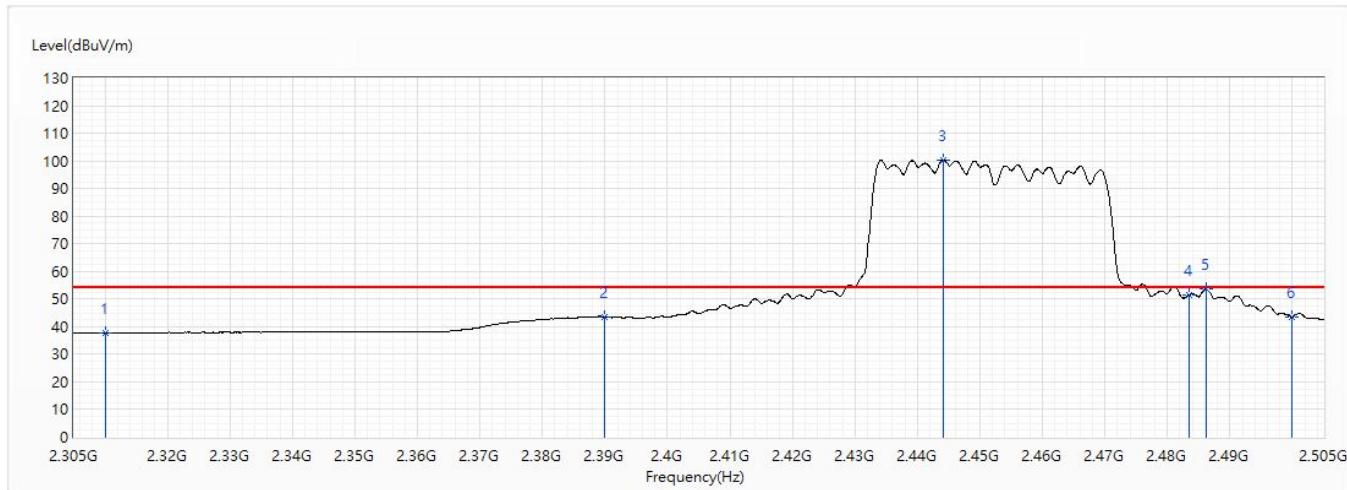


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	37.74	54.00	-16.26	26.12	11.62	AV
2	2390	43.38	54.00	-10.62	31.35	12.03	AV
3	2444.1	100.42	54.00	46.42	88.10	12.32	AV
4	2483.5	51.60	54.00	-2.40	39.09	12.51	AV
5	2486.2	53.53	54.00	-0.47	41.00	12.53	AV
6	2500	43.52	54.00	-10.48	30.92	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch1_2.412G	Humidity (%RH)	56.0

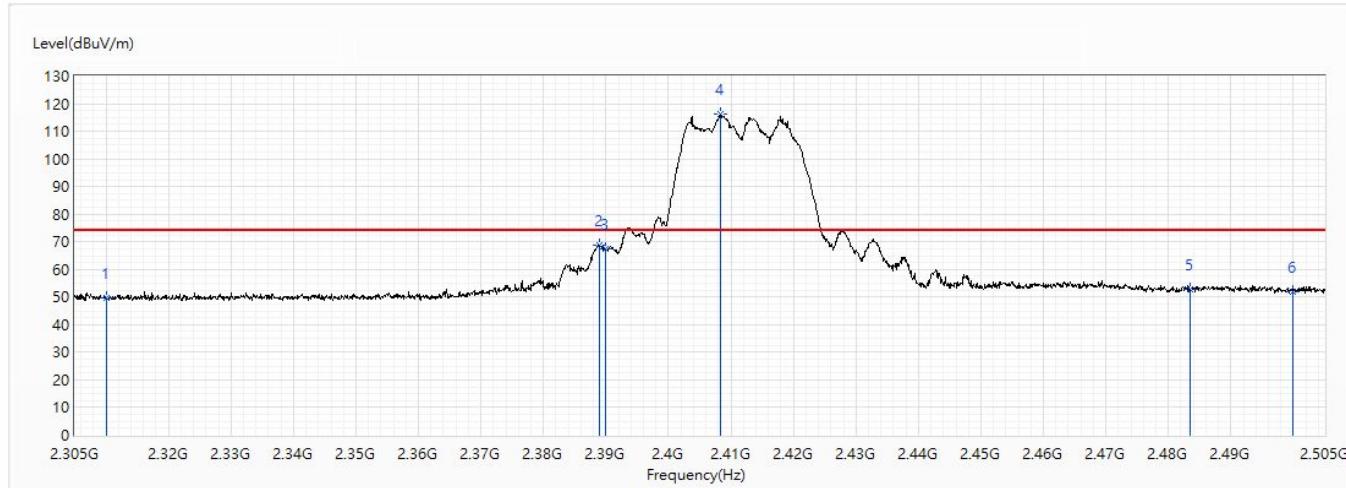


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.75	74.00	-24.25	38.13	11.62	PK
2	2388.9	68.77	74.00	-5.23	56.75	12.02	PK
3	2390	67.57	74.00	-6.43	55.54	12.03	PK
4	2408.3	116.35	74.00	42.35	104.23	12.12	PK
5	2483.5	52.71	74.00	-21.29	40.20	12.51	PK
6	2500	51.98	74.00	-22.02	39.38	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch1_2.412G	Humidity (%RH)	56.0

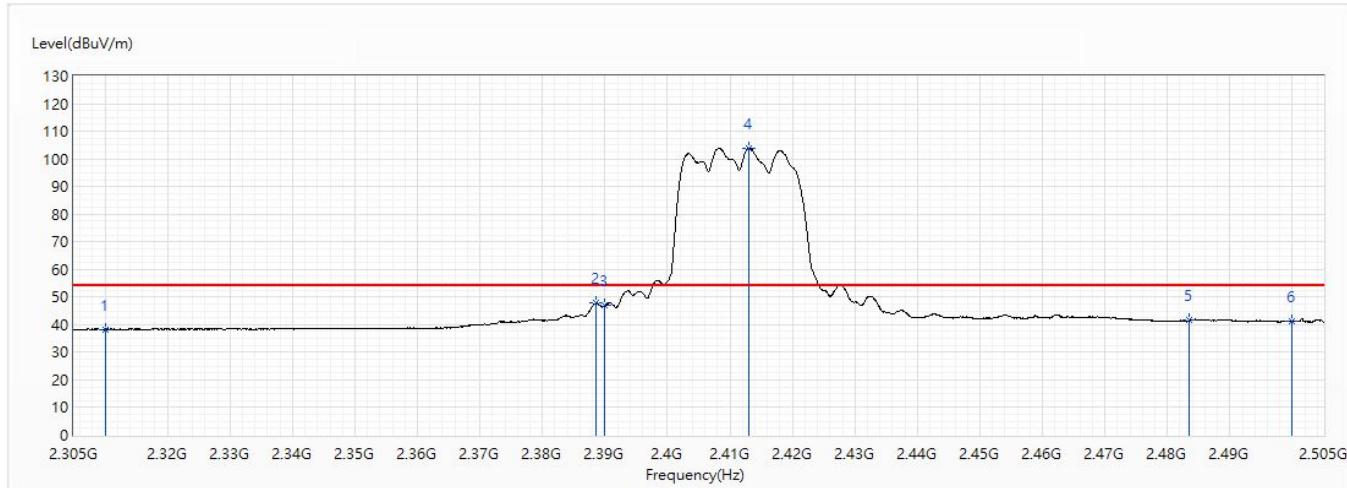


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.32	54.00	-15.68	26.70	11.62	AV
2	2388.5	47.79	54.00	-6.21	35.77	12.02	AV
3	2390	46.82	54.00	-7.18	34.79	12.03	AV
4	2413.1	103.87	54.00	49.87	91.72	12.15	AV
5	2483.5	41.53	54.00	-12.47	29.02	12.51	AV
6	2500	41.39	54.00	-12.61	28.79	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch1_2.412G	Humidity (%RH)	56.0

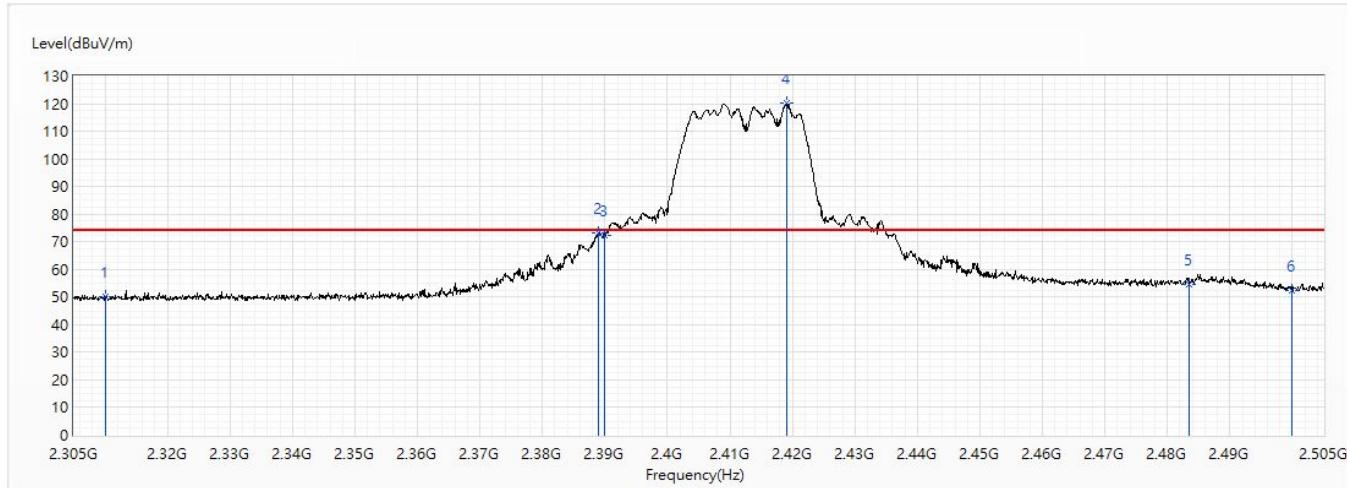


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.20	74.00	-23.80	38.58	11.62	PK
2	2388.9	73.26	74.00	-0.74	61.24	12.02	PK
3	2390	72.53	74.00	-1.47	60.50	12.03	PK
4	2419.1	120.07	74.00	46.07	107.88	12.19	PK
5	2483.5	54.79	74.00	-19.21	42.28	12.51	PK
6	2500	52.39	74.00	-21.61	39.79	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch1_2.412G	Humidity (%RH)	56.0

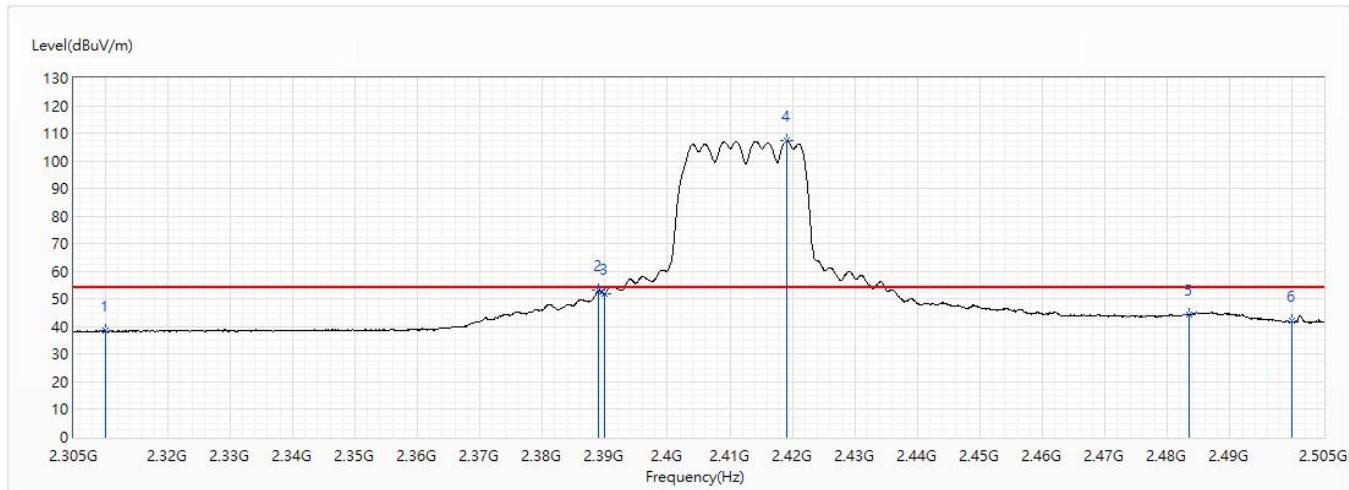


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.39	54.00	-15.61	26.77	11.62	AV
2	2389	53.11	54.00	-0.89	41.09	12.02	AV
3	2390	52.05	54.00	-1.95	40.02	12.03	AV
4	2419	107.29	54.00	53.29	95.10	12.19	AV
5	2483.5	44.36	54.00	-9.64	31.85	12.51	AV
6	2500	41.99	54.00	-12.01	29.39	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch6_2.437G	Humidity (%RH)	56.0

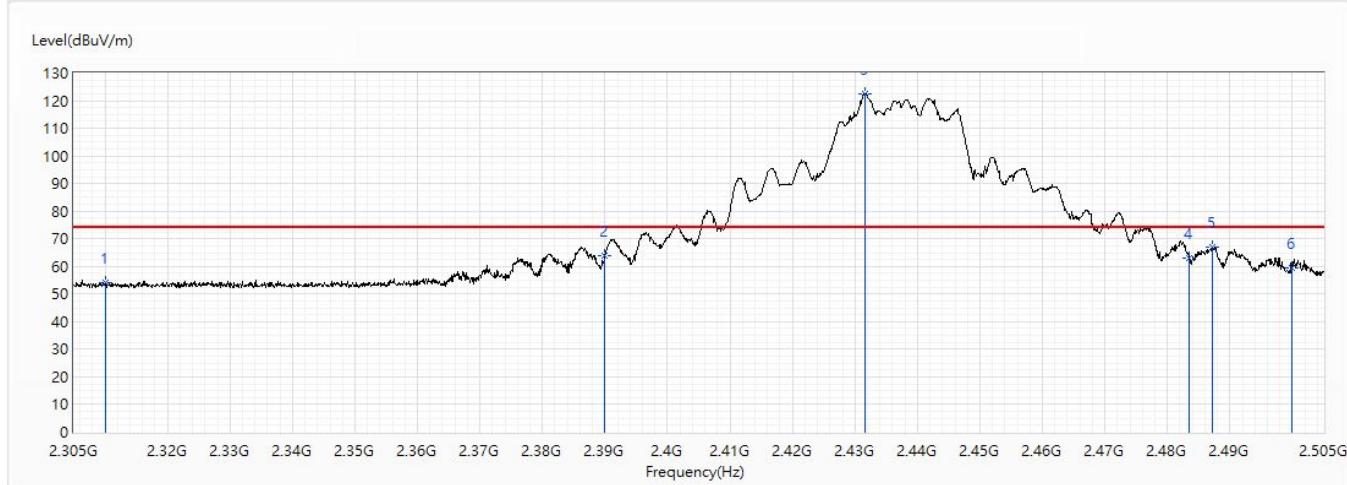


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	54.26	74.00	-19.74	42.64	11.62	PK
2	2390	64.09	74.00	-9.91	52.06	12.03	PK
3	2431.7	122.66	74.00	48.66	110.41	12.25	PK
4	2483.5	63.19	74.00	-10.81	50.68	12.51	PK
5	2487.1	67.04	74.00	-6.96	54.50	12.54	PK
6	2500	59.47	74.00	-14.53	46.87	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch6_2.437G	Humidity (%RH)	56.0

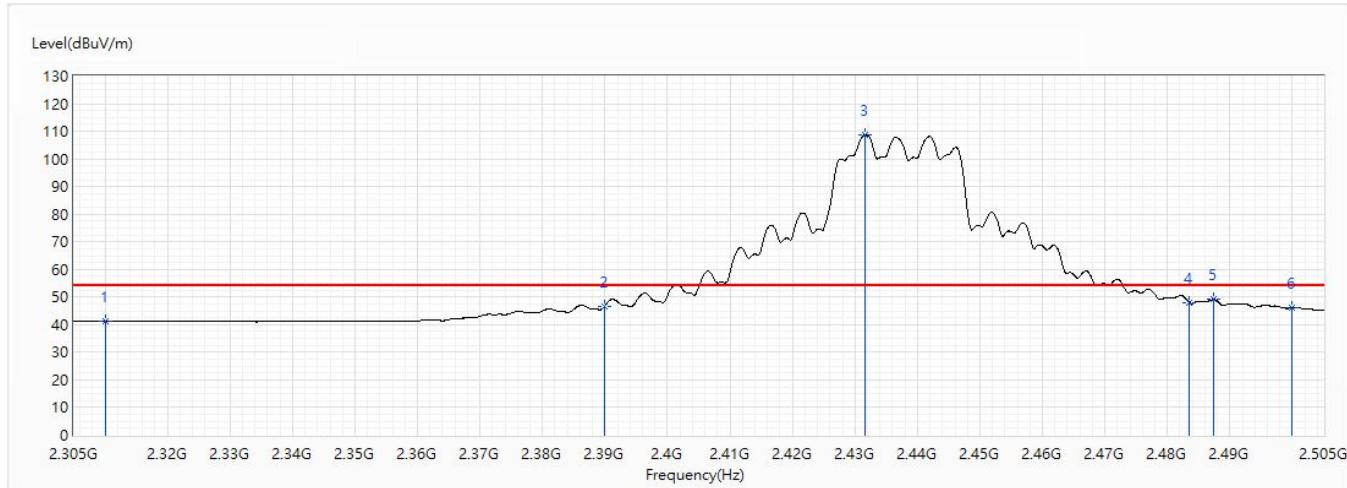


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.13	54.00	-12.87	29.51	11.62	AV
2	2390	46.72	54.00	-7.28	34.69	12.03	AV
3	2431.7	108.91	54.00	54.91	96.66	12.25	AV
4	2483.5	48.03	54.00	-5.97	35.52	12.51	AV
5	2487.3	49.25	54.00	-4.75	36.71	12.54	AV
6	2500	46.14	54.00	-7.86	33.54	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Engineer
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch6_2.437G	Humidity (%RH)	56.0

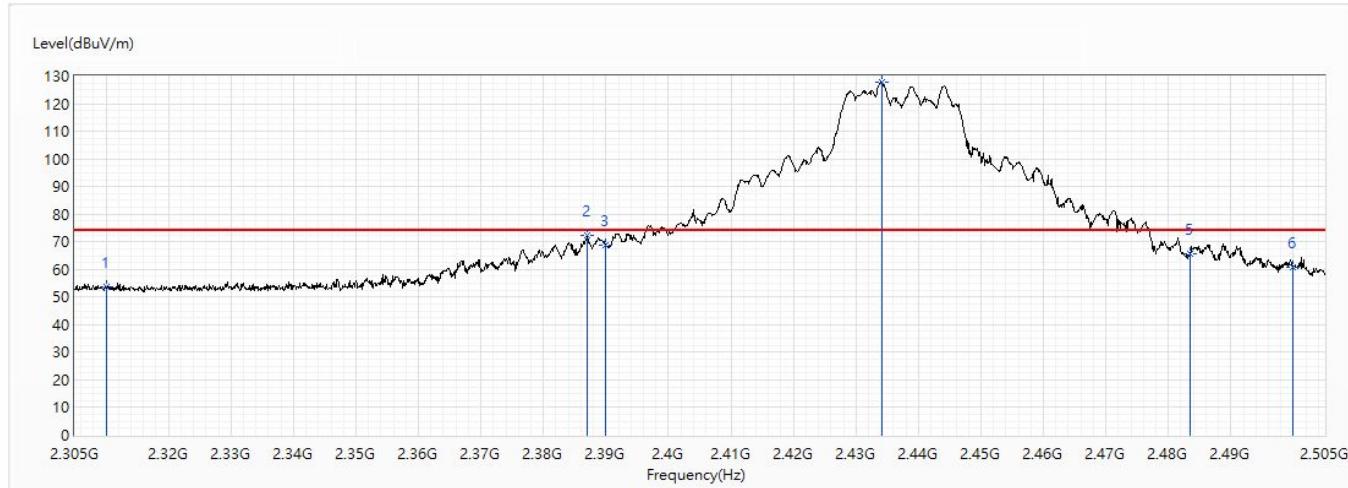


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	53.59	74.00	-20.41	41.97	11.62	PK
2	2387	72.31	74.00	-1.69	60.29	12.02	PK
3	2390	68.99	74.00	-5.01	56.96	12.03	PK
4	2434.1	127.80	74.00	53.80	115.55	12.25	PK
5	2483.5	65.45	74.00	-8.55	52.94	12.51	PK
6	2500	60.61	74.00	-13.39	48.01	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch6_2.437G	Humidity (%RH)	56.0

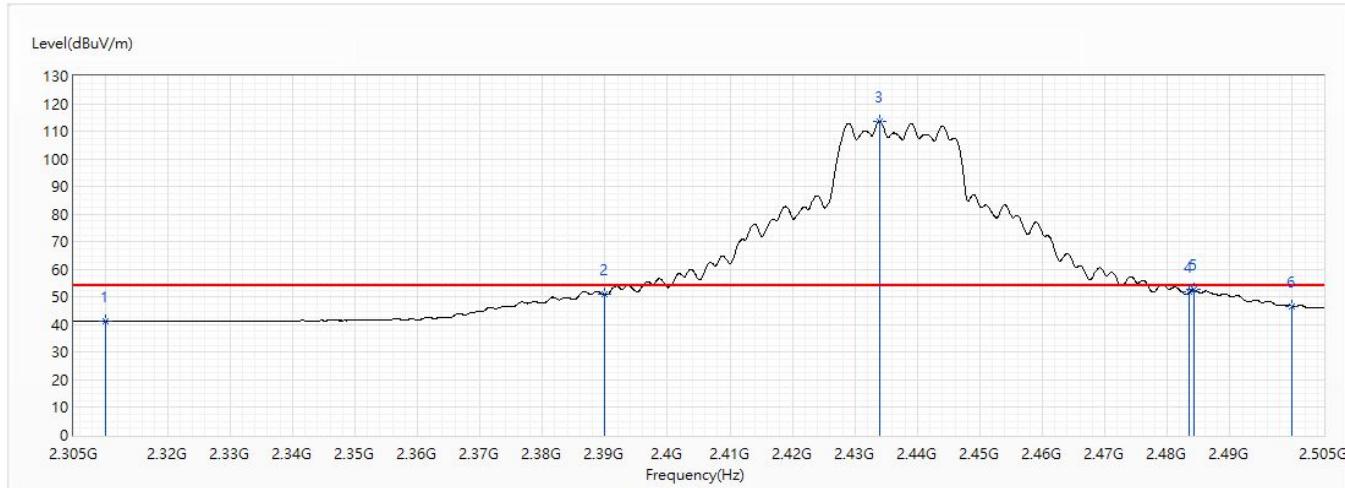


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	41.21	54.00	-12.79	29.59	11.62	AV
2	2390	50.93	54.00	-3.07	38.90	12.03	AV
3	2434	113.49	54.00	59.49	101.24	12.25	AV
4	2483.5	51.73	54.00	-2.27	39.22	12.51	AV
5	2484.3	52.62	54.00	-1.38	40.11	12.51	AV
6	2500	46.69	54.00	-7.31	34.09	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch11_2.462G	Humidity (%RH)	56.0

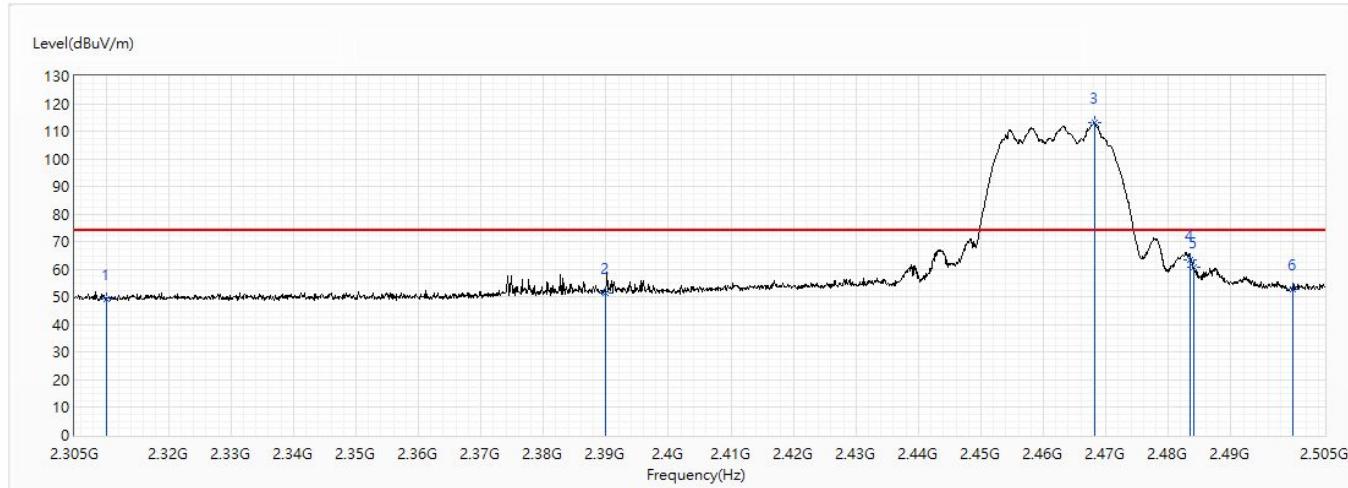


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.26	74.00	-24.74	37.64	11.62	PK
2	2390	51.56	74.00	-22.44	39.53	12.03	PK
3	2468.2	113.01	74.00	39.01	100.58	12.43	PK
4	2483.5	63.23	74.00	-10.77	50.72	12.51	PK
5	2484	60.61	74.00	-13.39	48.10	12.51	PK
6	2500	52.84	74.00	-21.16	40.24	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch11_2.462G	Humidity (%RH)	56.0

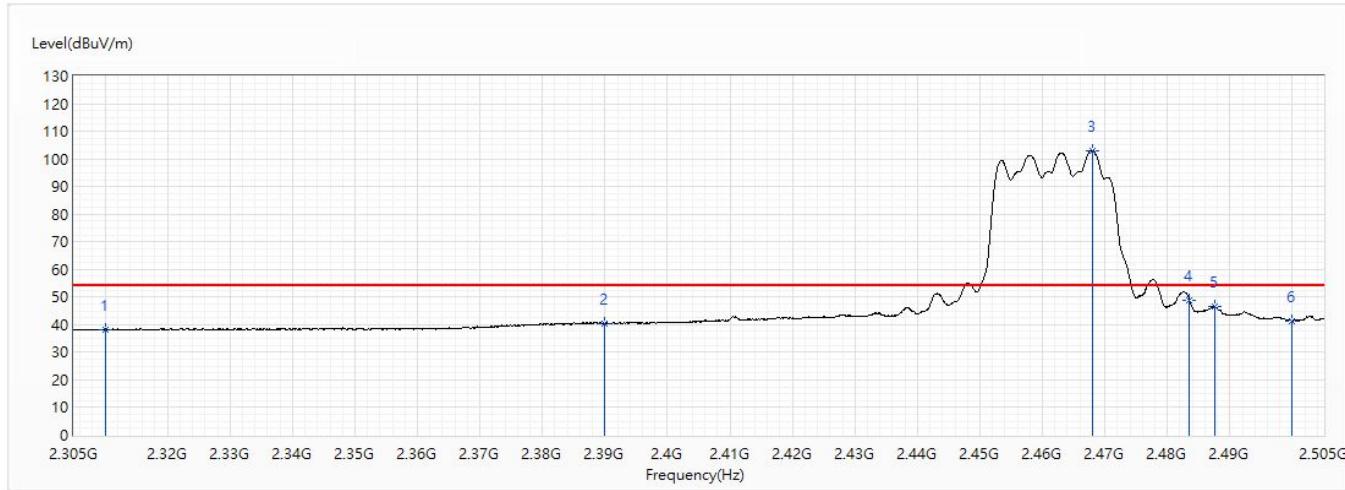


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.29	54.00	-15.71	26.67	11.62	AV
2	2390	40.36	54.00	-13.64	28.33	12.03	AV
3	2468	103.11	54.00	49.11	90.68	12.43	AV
4	2483.5	49.00	54.00	-5.00	36.49	12.51	AV
5	2487.5	46.66	54.00	-7.34	34.12	12.54	AV
6	2500	41.48	54.00	-12.52	28.88	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch11_2.462G	Humidity (%RH)	56.0

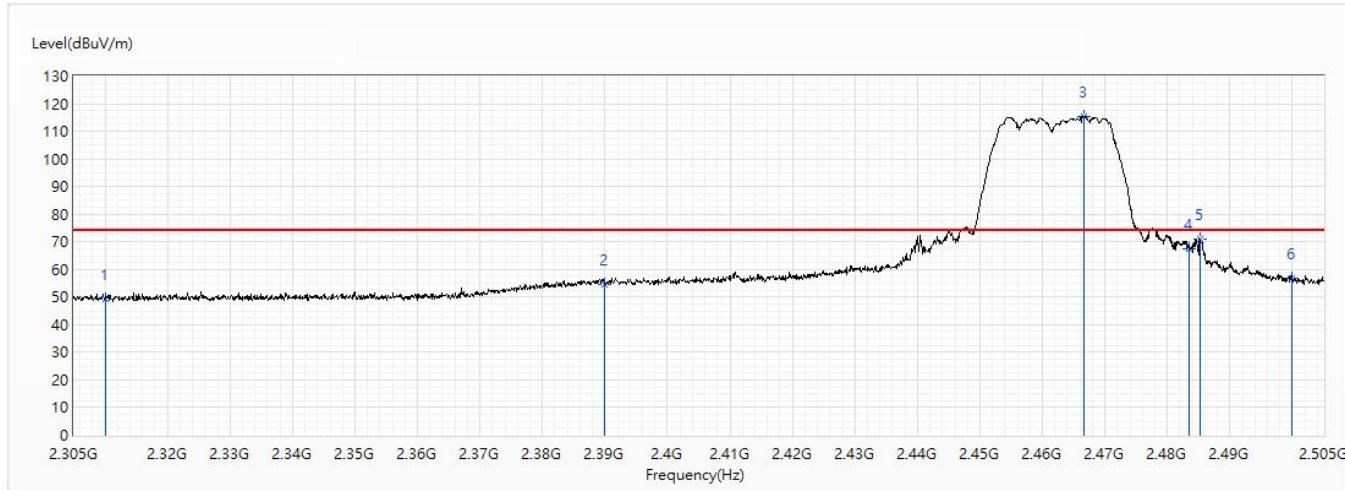


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.40	74.00	-24.60	37.78	11.62	PK
2	2390	54.62	74.00	-19.38	42.59	12.03	PK
3	2466.6	115.51	74.00	41.51	103.08	12.43	PK
4	2483.5	67.56	74.00	-6.44	55.05	12.51	PK
5	2485.2	71.12	74.00	-2.88	58.60	12.52	PK
6	2500	56.78	74.00	-17.22	44.18	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(20M)_Ch11_2.462G	Humidity (%RH)	56.0

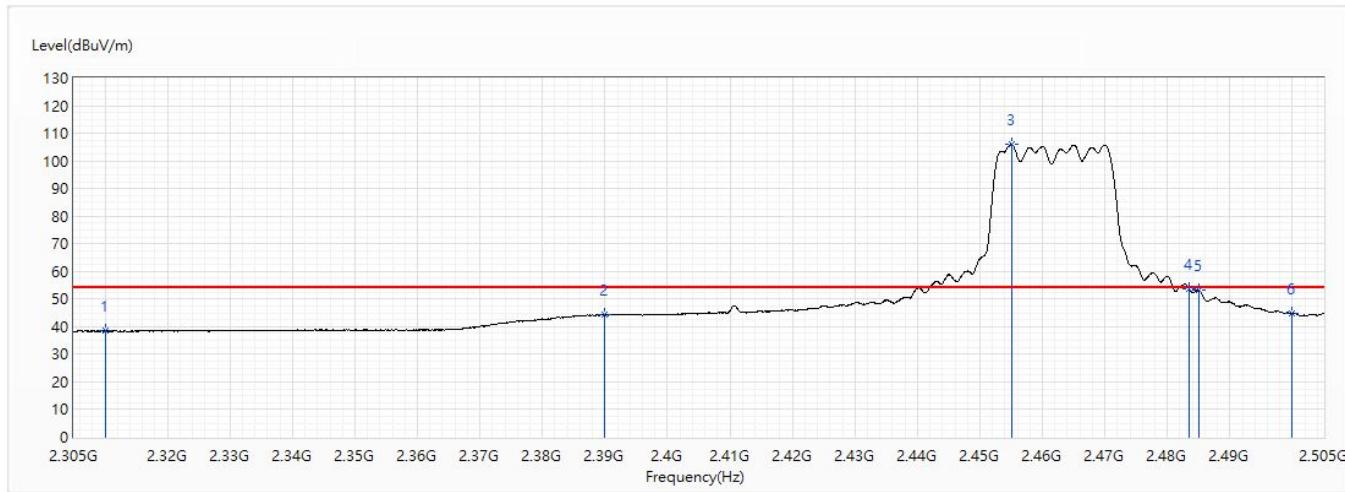


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.42	54.00	-15.58	26.80	11.62	AV
2	2390	44.19	54.00	-9.81	32.16	12.03	AV
3	2455	105.91	54.00	51.91	93.54	12.37	AV
4	2483.5	53.52	54.00	-0.48	41.01	12.51	AV
5	2485	53.23	54.00	-0.77	40.71	12.52	AV
6	2500	44.72	54.00	-9.28	32.12	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch3_2.422G	Humidity (%RH)	56.0

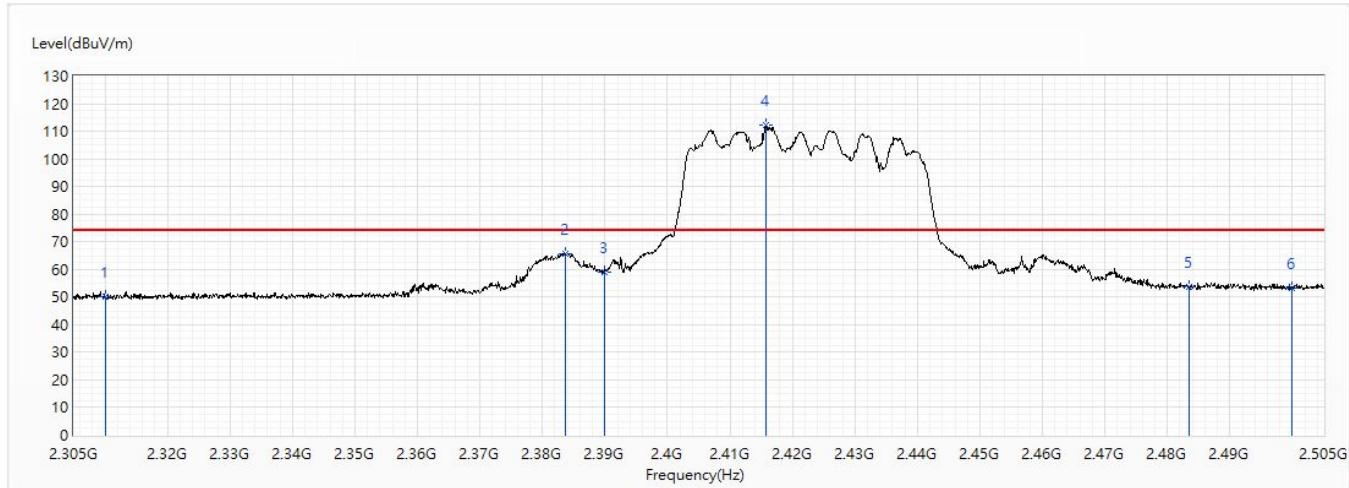


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.25	74.00	-23.75	38.63	11.62	PK
2	2383.6	65.83	74.00	-8.17	53.84	11.99	PK
3	2390	59.02	74.00	-14.98	46.99	12.03	PK
4	2415.8	112.28	74.00	38.28	100.11	12.17	PK
5	2483.5	53.84	74.00	-20.16	41.33	12.51	PK
6	2500	53.27	74.00	-20.73	40.67	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch3_2.422G	Humidity (%RH)	56.0

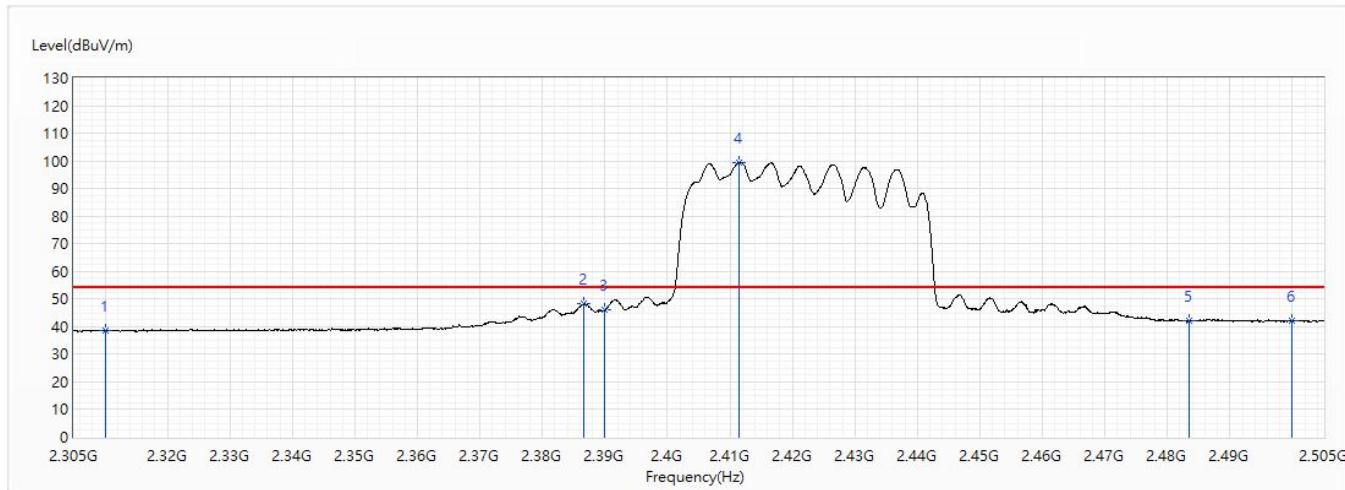


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.49	54.00	-15.51	26.87	11.62	AV
2	2386.7	48.56	54.00	-5.44	36.54	12.02	AV
3	2390	45.96	54.00	-8.04	33.93	12.03	AV
4	2411.5	99.55	54.00	45.55	87.40	12.15	AV
5	2483.5	42.06	54.00	-11.94	29.55	12.51	AV
6	2500	42.22	54.00	-11.78	29.62	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch3_2.422G	Humidity (%RH)	56.0

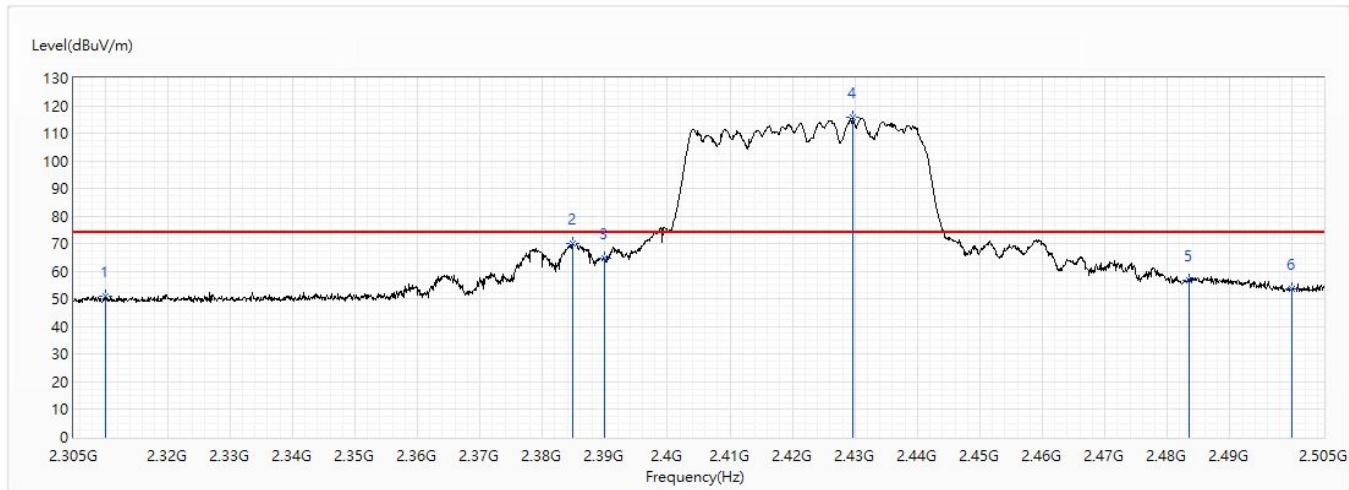


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.91	74.00	-23.09	39.29	11.62	PK
2	2384.9	70.04	74.00	-3.96	58.03	12.01	PK
3	2390	64.69	74.00	-9.31	52.66	12.03	PK
4	2429.6	115.78	74.00	41.78	103.54	12.24	PK
5	2483.5	56.64	74.00	-17.36	44.13	12.51	PK
6	2500	53.70	74.00	-20.30	41.10	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch3_2.422G	Humidity (%RH)	56.0

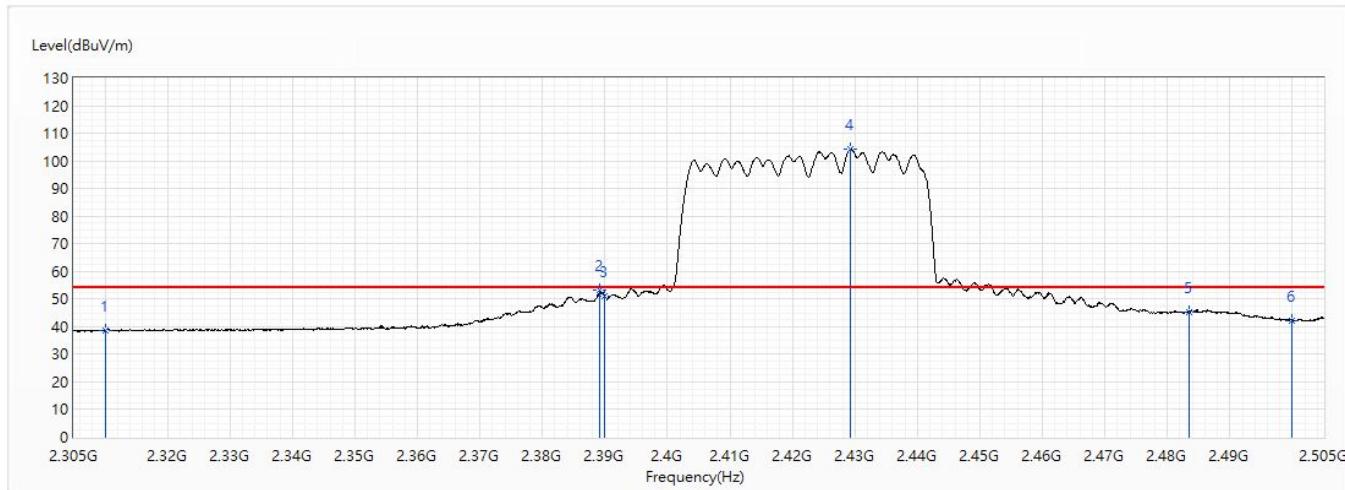


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.51	54.00	-15.49	26.89	11.62	AV
2	2389.2	53.24	54.00	-0.76	41.22	12.02	AV
3	2390	51.06	54.00	-2.94	39.03	12.03	AV
4	2429.3	104.30	54.00	50.30	92.06	12.24	AV
5	2483.5	45.36	54.00	-8.64	32.85	12.51	AV
6	2500	42.29	54.00	-11.71	29.69	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch6_2.437G	Humidity (%RH)	56.0

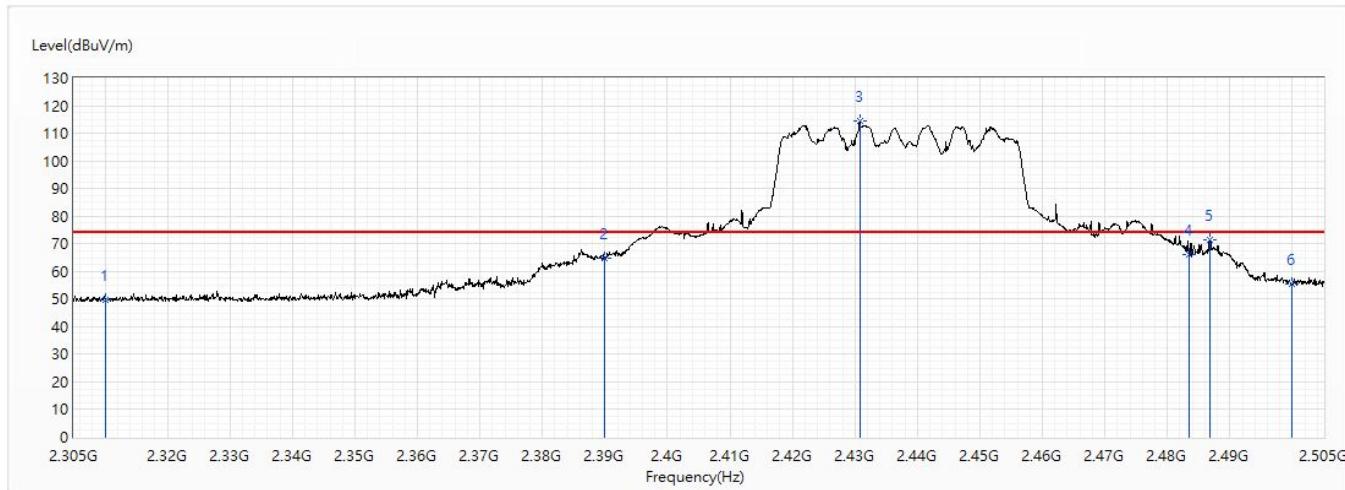


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	49.62	74.00	-24.38	38.00	11.62	PK
2	2390	64.92	74.00	-9.08	52.89	12.03	PK
3	2430.8	114.27	74.00	40.27	102.03	12.24	PK
4	2483.5	66.07	74.00	-7.93	53.56	12.51	PK
5	2486.8	71.37	74.00	-2.63	58.84	12.53	PK
6	2500	55.45	74.00	-18.55	42.85	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch6_2.437G	Humidity (%RH)	56.0

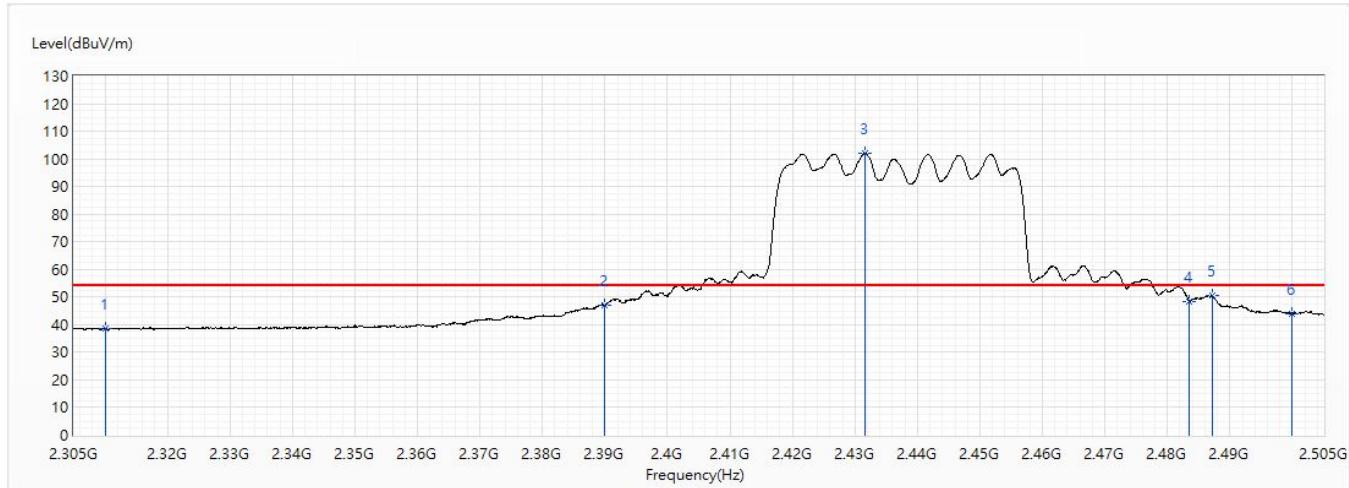


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.59	54.00	-15.41	26.97	11.62	AV
2	2390	47.19	54.00	-6.81	35.16	12.03	AV
3	2431.6	101.99	54.00	47.99	89.74	12.25	AV
4	2483.5	48.53	54.00	-5.47	36.02	12.51	AV
5	2487.1	50.53	54.00	-3.47	37.99	12.54	AV
6	2500	44.09	54.00	-9.91	31.49	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch6_2.437G	Humidity (%RH)	56.0

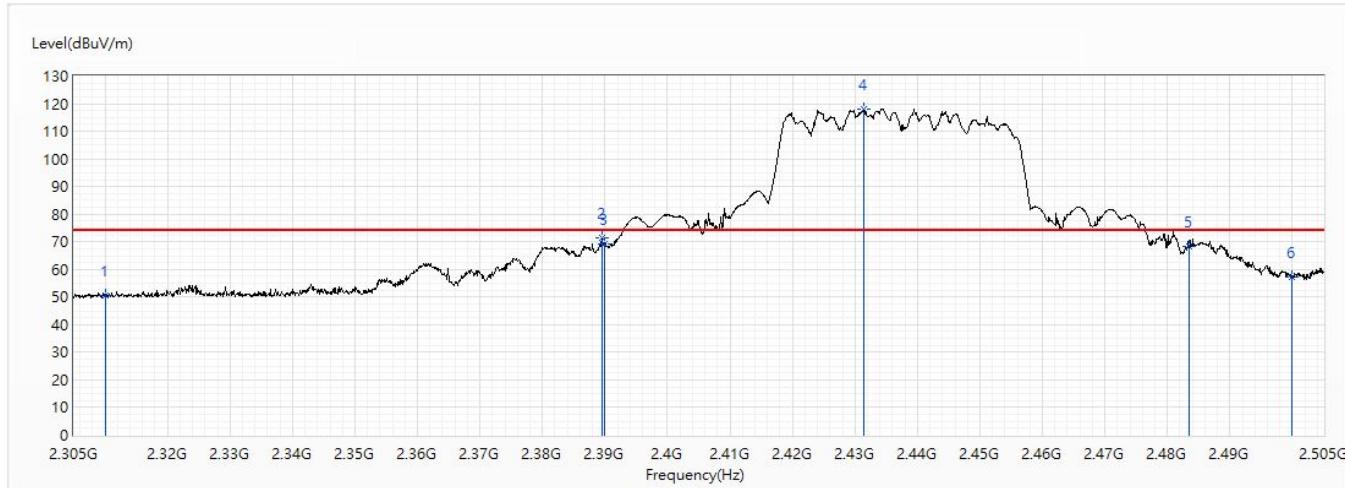


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	50.63	74.00	-23.37	39.01	11.62	PK
2	2389.5	71.47	74.00	-2.53	59.45	12.02	PK
3	2390	69.33	74.00	-4.67	57.30	12.03	PK
4	2431.5	117.99	74.00	43.99	105.74	12.25	PK
5	2483.5	68.32	74.00	-5.68	55.81	12.51	PK
6	2500	57.04	74.00	-16.96	44.44	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Vertical	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch6_2.437G	Humidity (%RH)	56.0

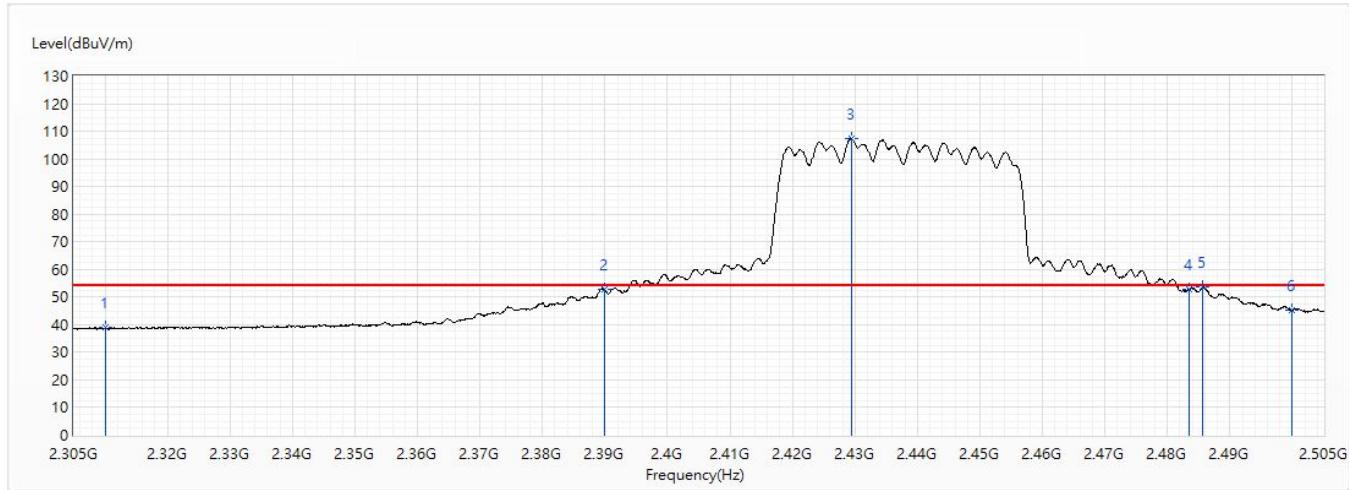


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	38.84	54.00	-15.16	27.22	11.62	AV
2	2390	52.85	54.00	-1.15	40.82	12.03	AV
3	2429.4	107.29	54.00	53.29	95.05	12.24	AV
4	2483.5	52.78	54.00	-1.22	40.27	12.51	AV
5	2485.7	53.47	54.00	-0.53	40.94	12.53	AV
6	2500	45.38	54.00	-8.62	32.78	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/13
Test Mode	Mode 2: CDD Mode		Elwin
Polarity	Horizontal	Temperature (°C)	23.5
Test Condition	802.11ax(40M)_Ch9_2.452G	Humidity (%RH)	56.0

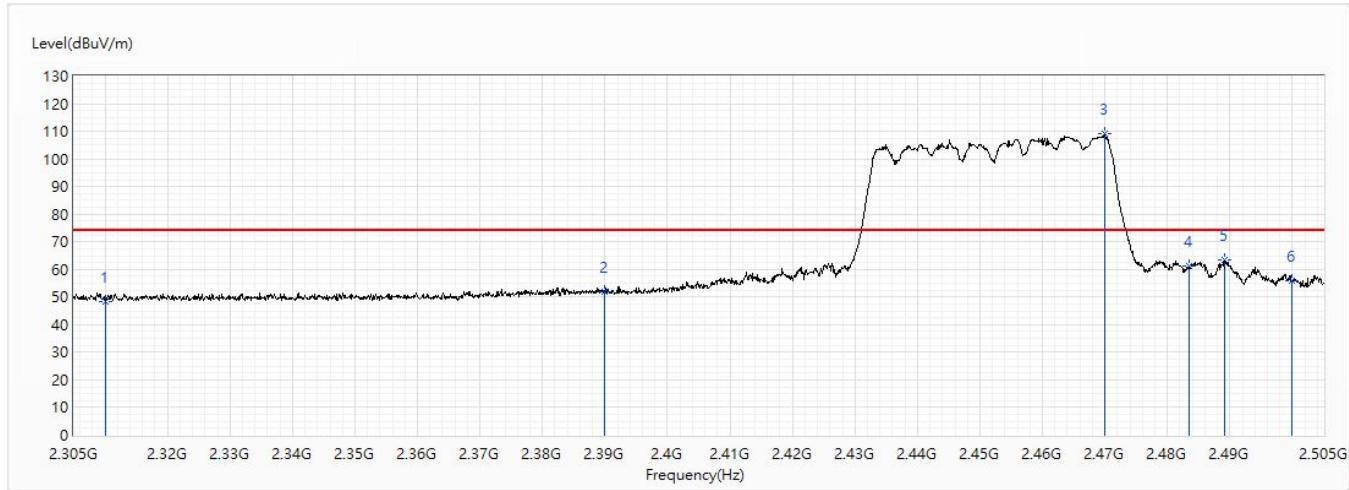

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2310	48.54	74.00	-25.46	36.92	11.62	PK
2	2390	51.79	74.00	-22.21	39.76	12.03	PK
3	2470	109.36	74.00	35.36	96.91	12.45	PK
4	2483.5	61.41	74.00	-12.59	48.90	12.51	PK
5	2489.2	63.31	74.00	-10.69	50.77	12.54	PK
6	2500	55.85	74.00	-18.15	43.25	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.