


Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch38_5.19G	Humidity (%RH)	55.0

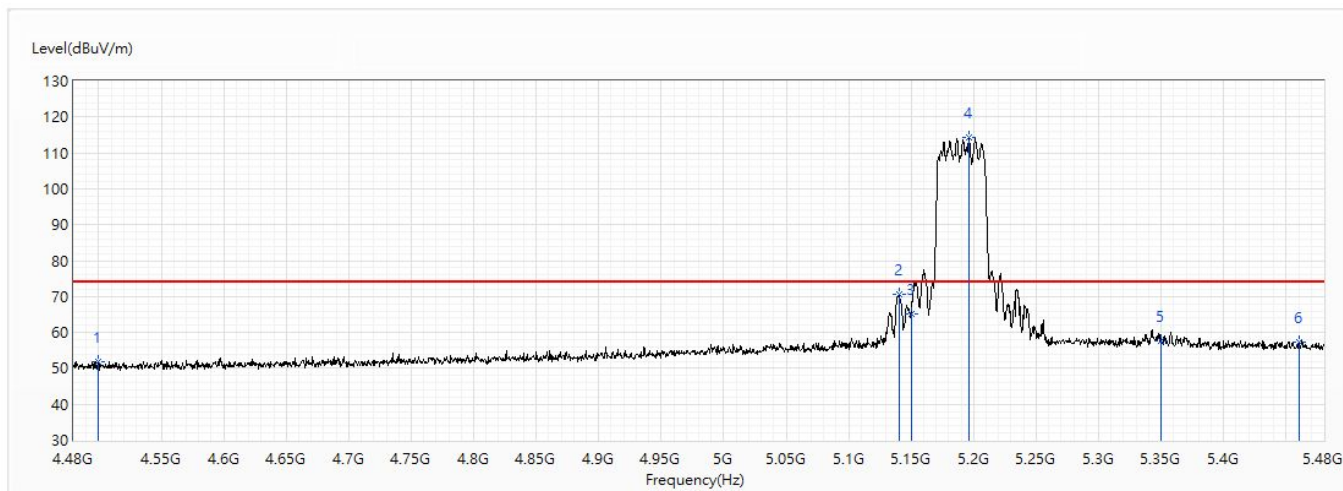


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	51.82	74.00	-22.18	31.58	20.24	PK
2	5140	70.74	74.00	-3.26	48.23	22.51	PK
3	5150	65.30	74.00	-8.70	42.79	22.51	PK
! 4	5196.5	114.13	74.00	40.13	91.58	22.55	PK
5	5350	57.59	74.00	-16.41	34.89	22.70	PK
6	5460	57.36	74.00	-16.64	34.55	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch38_5.19G	Humidity (%RH)	55.0

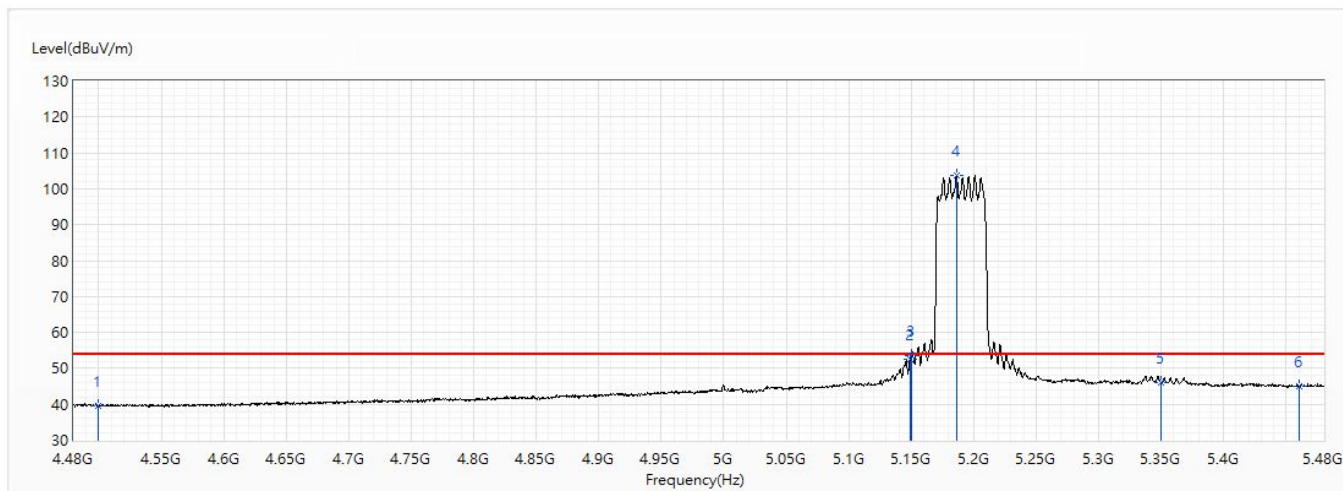


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	39.60	54.00	-14.40	19.36	20.24	AV
2	5149	52.63	54.00	-1.37	30.12	22.51	AV
3	5150	53.50	54.00	-0.50	30.99	22.51	AV
! 4	5186	103.77	54.00	49.77	81.23	22.54	AV
5	5350	46.06	54.00	-7.94	23.36	22.70	AV
6	5460	45.00	54.00	-9.00	22.19	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch46_5.23G	Humidity (%RH)	55.0

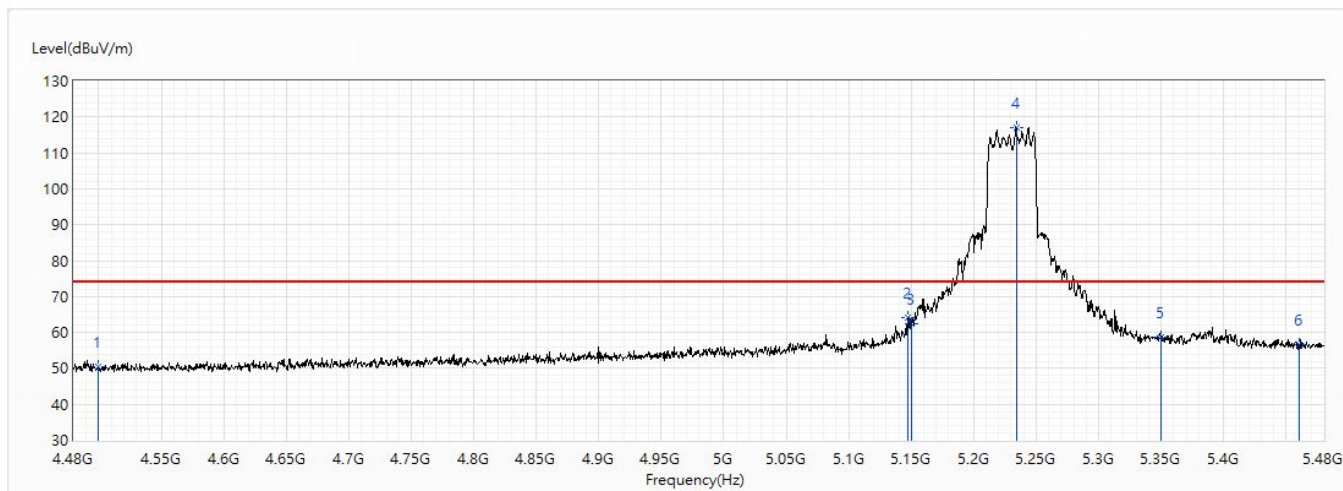


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	50.51	74.00	-23.49	30.27	20.24	PK
2	5147.5	64.05	74.00	-9.95	41.54	22.51	PK
3	5150	62.33	74.00	-11.67	39.82	22.51	PK
! 4	5234	117.19	74.00	43.19	94.61	22.58	PK
5	5350	58.83	74.00	-15.17	36.13	22.70	PK
6	5460	56.71	74.00	-17.29	33.90	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch46_5.23G	Humidity (%RH)	55.0

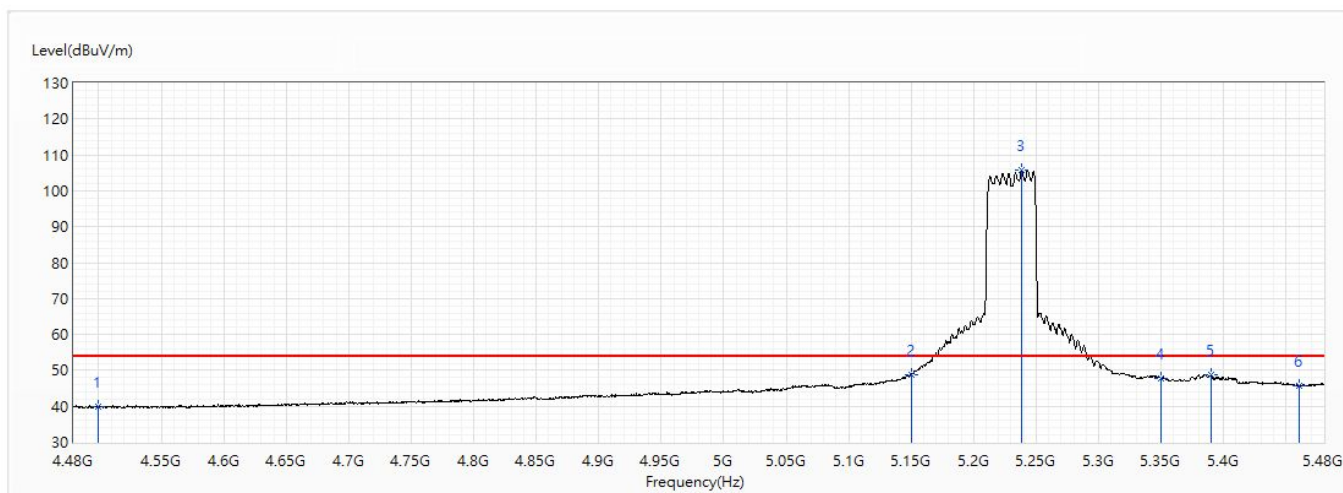


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	39.95	54.00	-14.05	19.71	20.24	AV
2	5150	48.81	54.00	-5.19	26.30	22.51	AV
! 3	5238	105.71	54.00	51.71	83.12	22.59	AV
4	5350	47.90	54.00	-6.10	25.20	22.70	AV
5	5389.5	48.63	54.00	-5.37	25.89	22.74	AV
6	5460	45.76	54.00	-8.24	22.95	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch46_5.23G	Humidity (%RH)	55.0

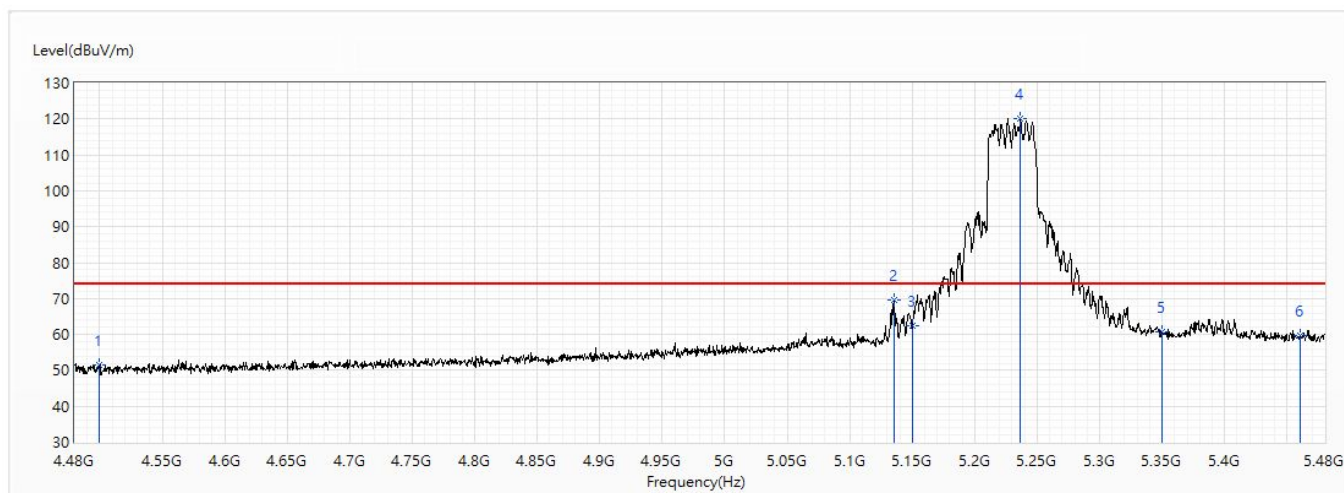


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	51.51	74.00	-22.49	31.27	20.24	PK
2	5136	69.69	74.00	-4.31	47.19	22.50	PK
3	5150	62.32	74.00	-11.68	39.81	22.51	PK
! 4	5236.5	120.24	74.00	46.24	97.66	22.58	PK
5	5350	60.82	74.00	-13.18	38.12	22.70	PK
6	5460	59.58	74.00	-14.42	36.77	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch46_5.23G	Humidity (%RH)	55.0

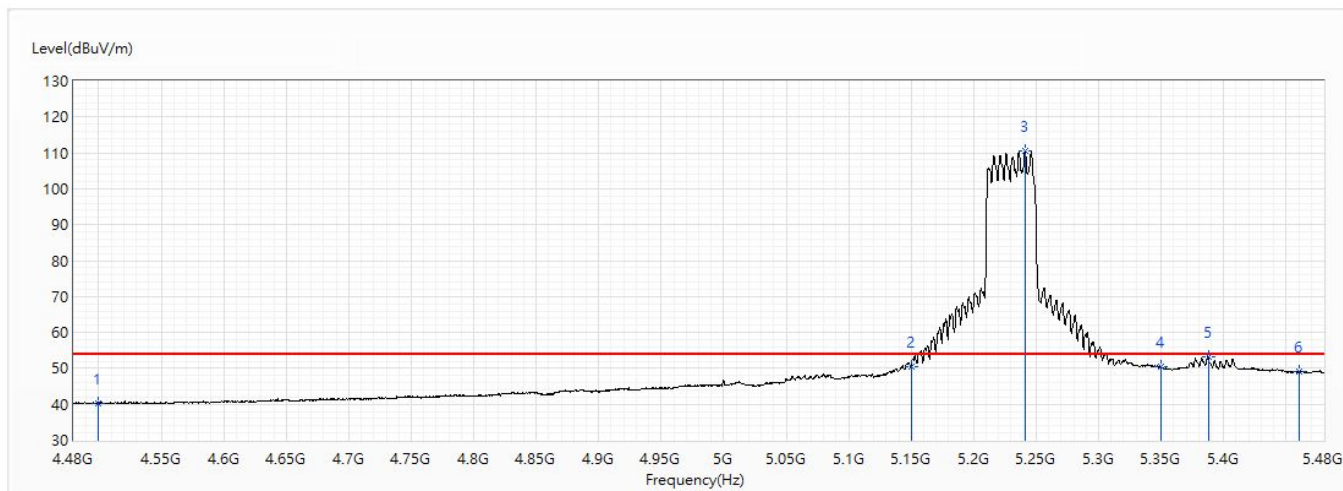


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	40.30	54.00	-13.70	20.06	20.24	AV
2	5150	50.53	54.00	-3.47	28.02	22.51	AV
! 3	5241	110.51	54.00	56.51	87.91	22.60	AV
4	5350	50.38	54.00	-3.62	27.68	22.70	AV
5	5388	53.08	54.00	-0.92	30.34	22.74	AV
6	5460	49.12	54.00	-4.88	26.31	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch42_5.21G	Humidity (%RH)	55.0

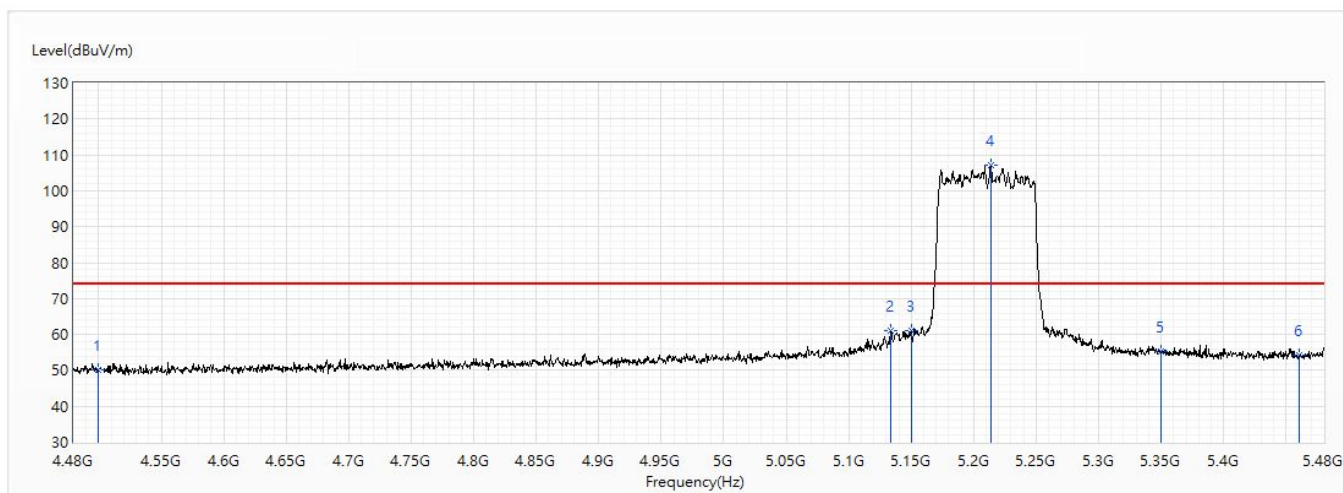


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	50.09	74.00	-23.91	29.85	20.24	PK
2	5134	61.09	74.00	-12.91	38.60	22.49	PK
3	5150	60.95	74.00	-13.05	38.44	22.51	PK
! 4	5213.5	106.98	74.00	32.98	84.41	22.57	PK
5	5350	55.38	74.00	-18.62	32.68	22.70	PK
6	5460	54.10	74.00	-19.90	31.29	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch42_5.21G	Humidity (%RH)	55.0

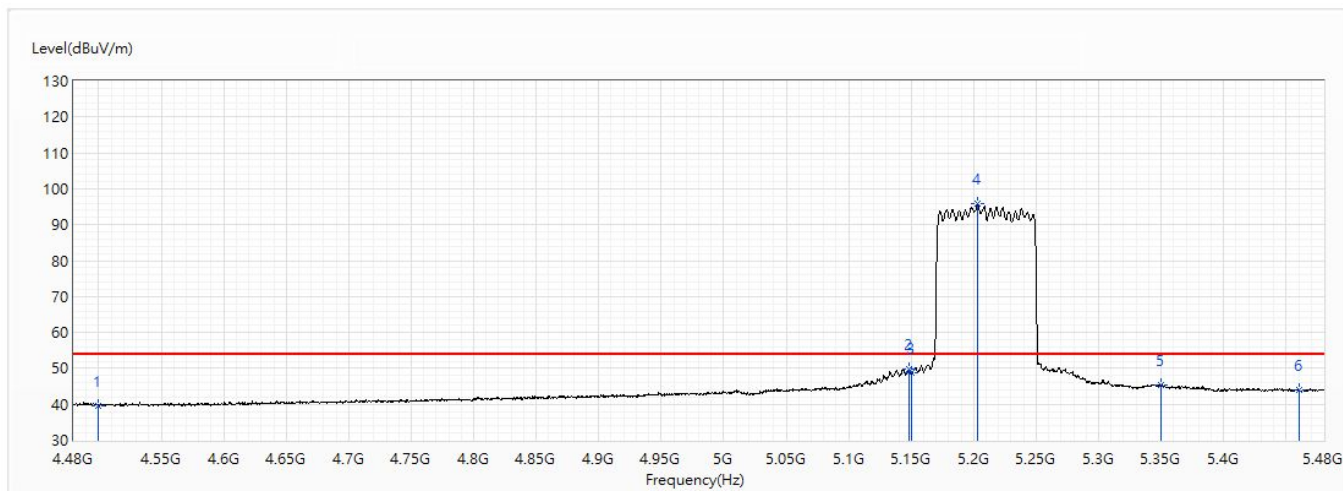


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	39.70	54.00	-14.30	19.46	20.24	AV
2	5148	49.67	54.00	-4.33	27.16	22.51	AV
3	5150	48.72	54.00	-5.28	26.21	22.51	AV
! 4	5203	95.76	54.00	41.76	73.20	22.56	AV
5	5350	45.24	54.00	-8.76	22.54	22.70	AV
6	5460	43.90	54.00	-10.10	21.09	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch42_5.21G	Humidity (%RH)	55.0

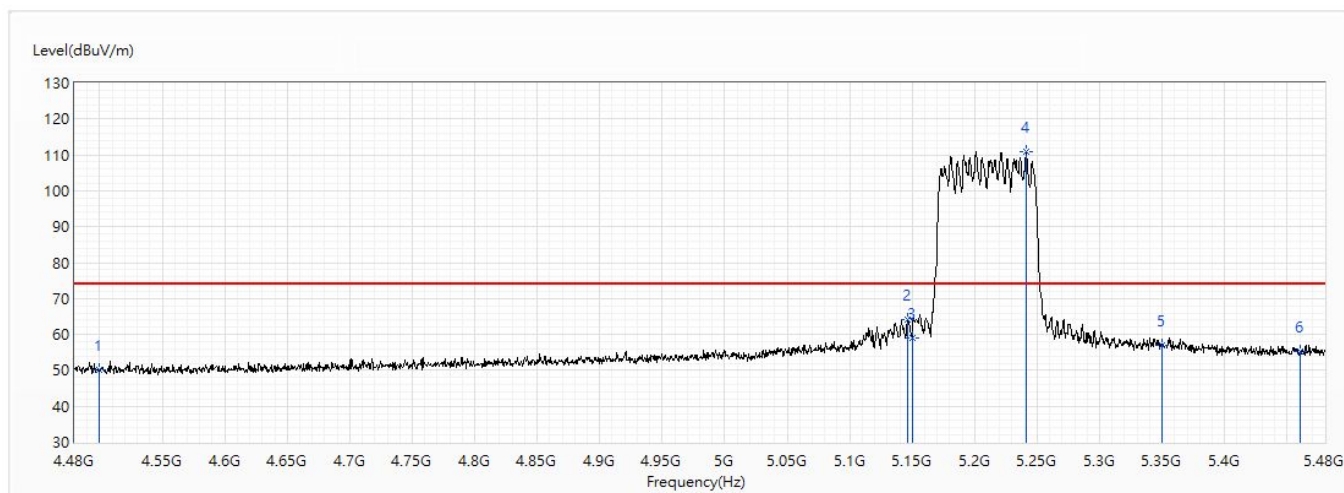


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	50.16	74.00	-23.84	29.92	20.24	PK
2	5146	64.22	74.00	-9.78	41.71	22.51	PK
3	5150	59.09	74.00	-14.91	36.58	22.51	PK
! 4	5241.5	111.00	74.00	37.00	88.40	22.60	PK
5	5350	56.86	74.00	-17.14	34.16	22.70	PK
6	5460	55.20	74.00	-18.80	32.39	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/3
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch42_5.21G	Humidity (%RH)	55.0

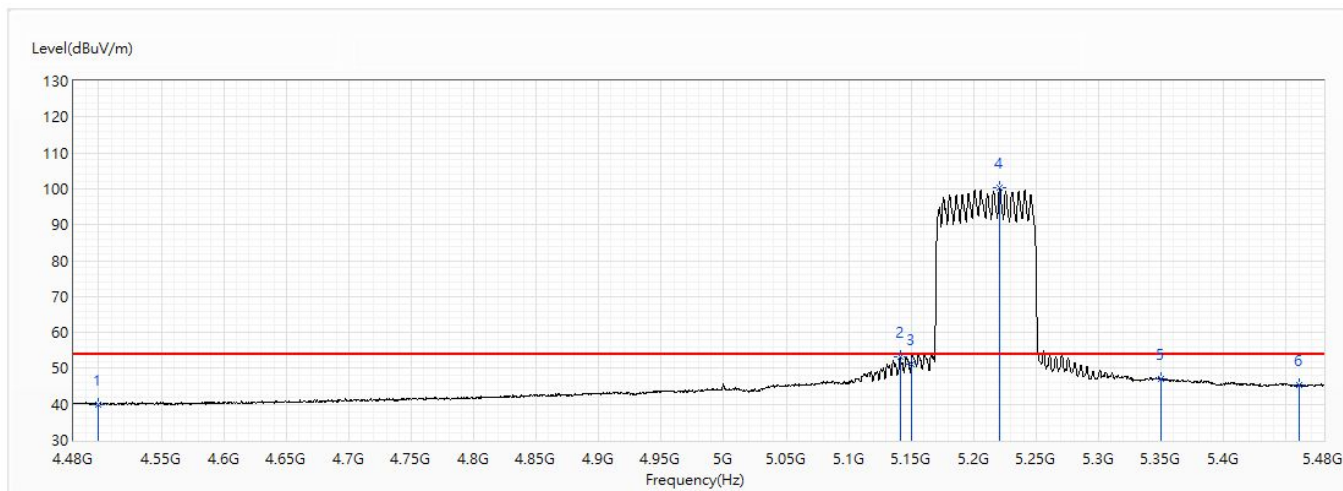


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	40.05	54.00	-13.95	19.81	20.24	AV
2	5141	53.12	54.00	-0.88	30.61	22.51	AV
3	5150	51.11	54.00	-2.89	28.60	22.51	AV
! 4	5221	100.20	54.00	46.20	77.62	22.58	AV
5	5350	46.94	54.00	-7.06	24.24	22.70	AV
6	5460	45.21	54.00	-8.79	22.40	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11a_Ch149_5.745G	Humidity (%RH)	55.0

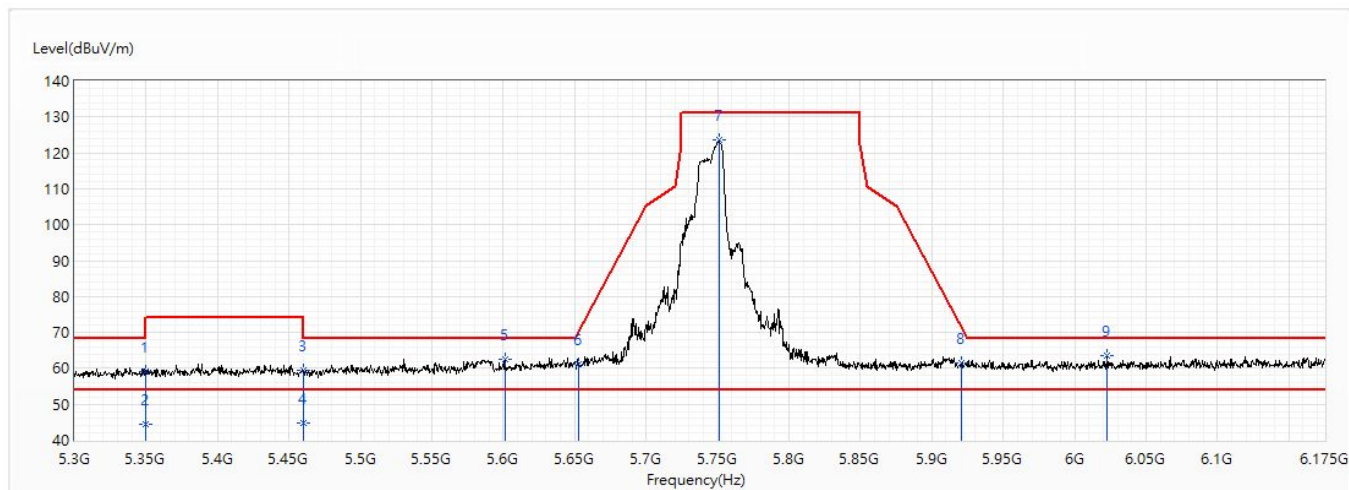


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.10	74.00	-14.90	36.40	22.70	PK
2	5350	44.37	54.00	-9.63	21.67	22.70	AV
3	5460	59.57	74.00	-14.43	36.76	22.81	PK
4	5460	44.92	54.00	-9.08	22.11	22.81	AV
5	5601	62.42	68.20	-5.78	39.17	23.25	PK
6	5653.063	61.27	70.48	-9.21	37.82	23.45	PK
7	5751.063	123.53	131.20	-7.67	99.69	23.84	PK
8	5920.813	61.66	71.29	-9.63	37.30	24.36	PK
* 9	6022.75	63.70	68.20	-4.50	39.02	24.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11a_Ch149_5.745G	Humidity (%RH)	55.0

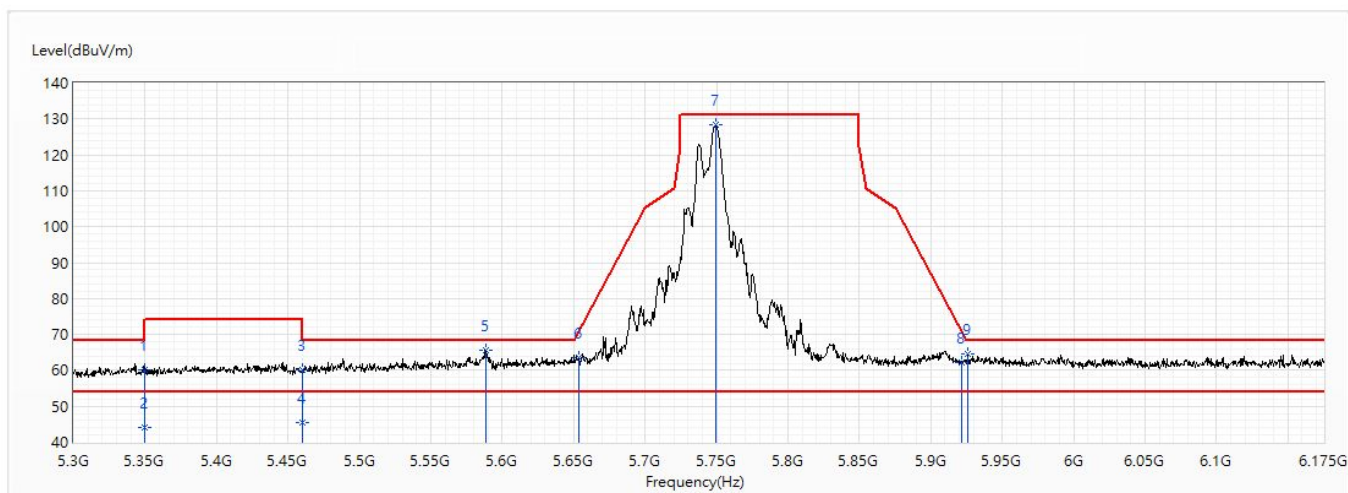


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.15	74.00	-13.85	37.45	22.70	PK
2	5350	44.16	54.00	-9.84	21.46	22.70	AV
3	5460	60.02	74.00	-13.98	37.21	22.81	PK
4	5460	45.58	54.00	-8.42	22.77	22.81	AV
* 5	5588.313	65.68	68.20	-2.52	42.49	23.19	PK
6	5653.938	63.62	71.13	-7.50	40.15	23.47	PK
7	5749.313	128.34	131.20	-2.86	104.50	23.84	PK
8	5921.688	62.27	70.64	-8.37	37.91	24.36	PK
9	5926.063	64.73	68.20	-3.47	40.35	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11a_Ch157_5.785G	Humidity (%RH)	55.0

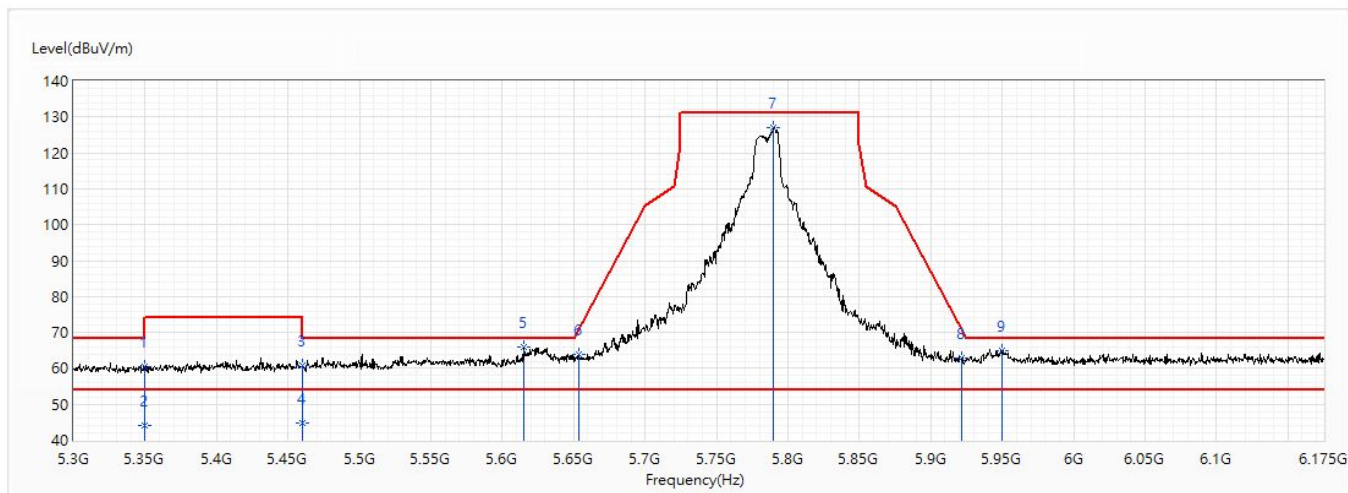


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.57	74.00	-13.43	37.87	22.70	PK
2	5350	44.21	54.00	-9.79	21.51	22.70	AV
3	5460	60.89	74.00	-13.11	38.08	22.81	PK
4	5460	44.94	54.00	-9.06	22.13	22.81	AV
* 5	5615.438	65.82	68.20	-2.38	42.52	23.30	PK
6	5653.938	63.83	71.13	-7.30	40.36	23.47	PK
7	5790	127.19	131.20	-4.01	103.22	23.97	PK
8	5921.25	62.83	70.96	-8.13	38.47	24.36	PK
9	5950.125	65.03	68.20	-3.17	40.58	24.45	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11a_Ch157_5.785G	Humidity (%RH)	55.0

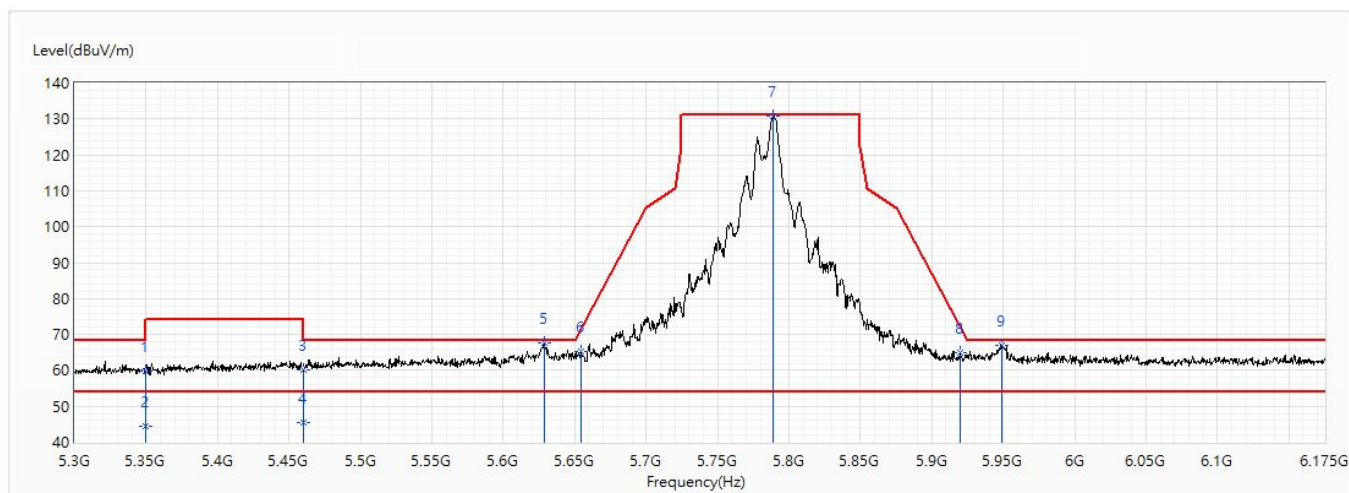


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.87	74.00	-14.13	37.17	22.70	PK
2	5350	44.38	54.00	-9.62	21.68	22.70	AV
3	5460	59.98	74.00	-14.02	37.17	22.81	PK
4	5460	45.42	54.00	-8.58	22.61	22.81	AV
5	5628.563	67.61	68.20	-0.59	44.25	23.36	PK
6	5654.375	65.38	71.45	-6.07	41.91	23.47	PK
* 7	5789.125	130.76	131.20	-0.44	106.81	23.95	PK
8	5919.5	64.87	72.25	-7.38	40.51	24.36	PK
9	5948.813	67.03	68.20	-1.17	42.58	24.45	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11a_Ch165_5.825G	Humidity (%RH)	55.0

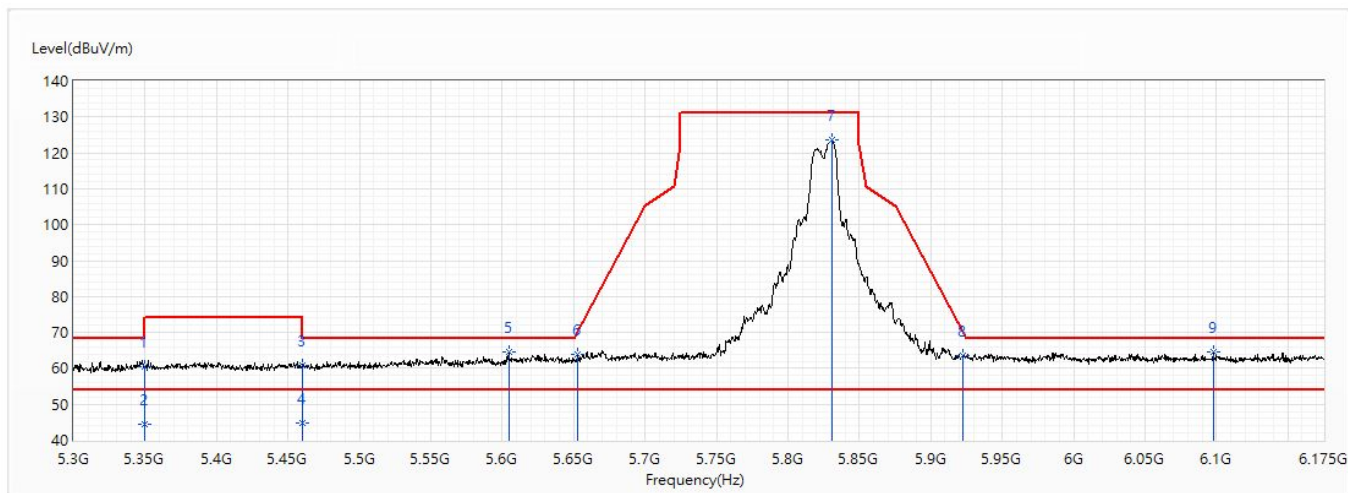


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.45	74.00	-13.55	37.75	22.70	PK
2	5350	44.28	54.00	-9.72	21.58	22.70	AV
3	5460	60.68	74.00	-13.32	37.87	22.81	PK
4	5460	44.89	54.00	-9.11	22.08	22.81	AV
5	5604.5	64.67	68.20	-3.53	41.40	23.27	PK
6	5653.063	64.03	70.48	-6.44	40.58	23.45	PK
7	5830.688	123.58	131.20	-7.62	99.50	24.08	PK
8	5922.125	63.39	70.32	-6.93	39.03	24.36	PK
* 9	6097.563	64.73	68.20	-3.47	39.79	24.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 1: SISO Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11a_Ch165_5.825G	Humidity (%RH)	55.0

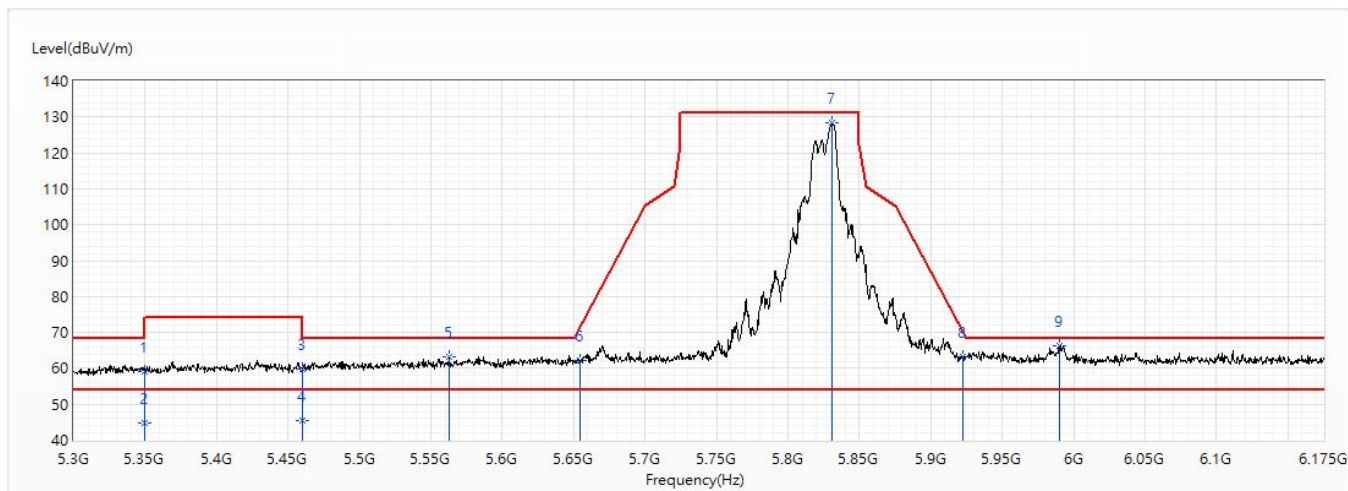


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.15	74.00	-14.85	36.45	22.70	PK
2	5350	44.63	54.00	-9.37	21.93	22.70	AV
3	5460	59.90	74.00	-14.10	37.09	22.81	PK
4	5460	45.58	54.00	-8.42	22.77	22.81	AV
5	5562.5	63.06	68.20	-5.14	39.96	23.10	PK
6	5654.375	62.10	71.45	-9.35	38.63	23.47	PK
7	5831.125	128.40	131.20	-2.80	104.32	24.08	PK
8	5922.125	63.35	70.32	-6.97	38.99	24.36	PK
* 9	5990.375	66.11	68.20	-2.09	41.53	24.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch149_5.745G	Humidity (%RH)	55.0

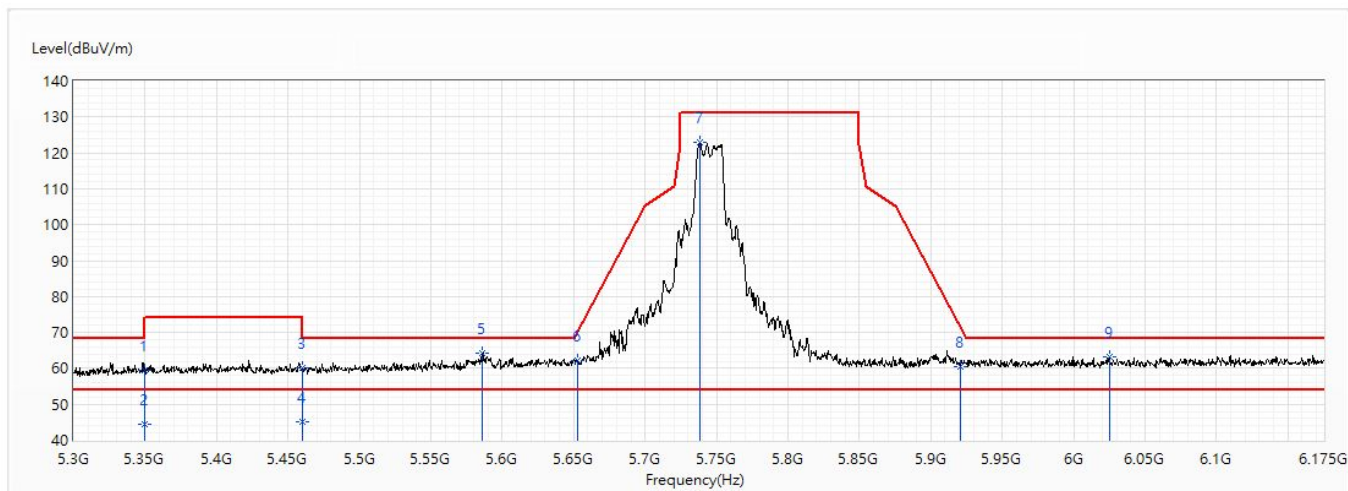


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.57	74.00	-14.43	36.87	22.70	PK
2	5350	44.28	54.00	-9.72	21.58	22.70	AV
3	5460	60.07	74.00	-13.93	37.26	22.81	PK
4	5460	44.96	54.00	-9.04	22.15	22.81	AV
* 5	5586.125	64.10	68.20	-4.10	40.91	23.19	PK
6	5653.063	62.05	70.48	-8.43	38.60	23.45	PK
7	5737.938	122.96	131.20	-8.24	99.17	23.79	PK
8	5920.375	60.53	71.61	-11.08	36.17	24.36	PK
9	6024.938	63.12	68.20	-5.08	38.44	24.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch149_5.745G	Humidity (%RH)	55.0

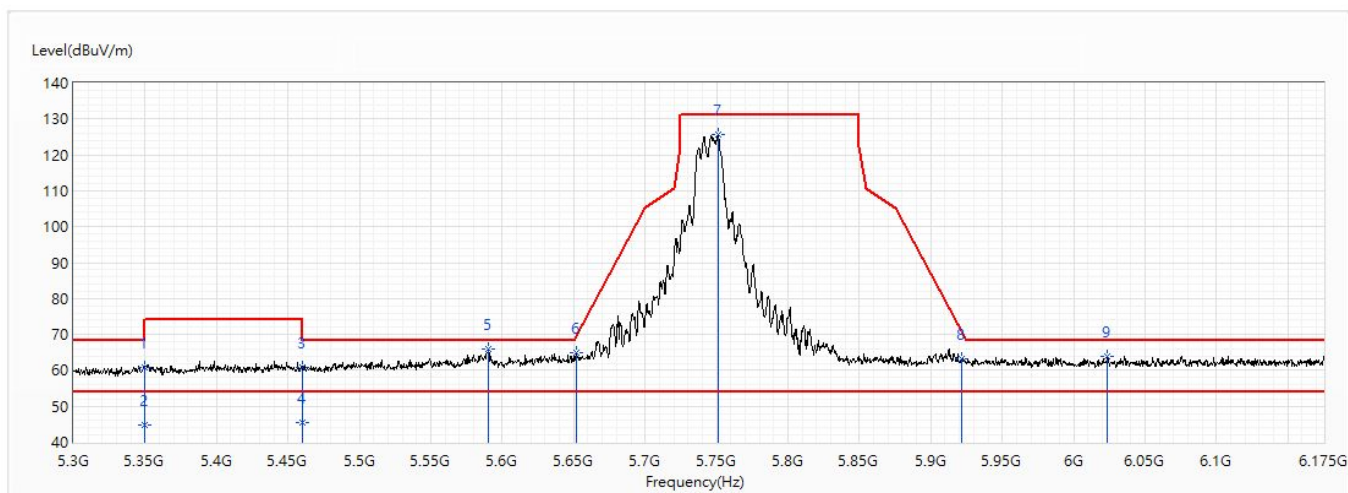


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.70	74.00	-13.30	38.00	22.70	PK
2	5350	44.76	54.00	-9.24	22.06	22.70	AV
3	5460	60.78	74.00	-13.22	37.97	22.81	PK
4	5460	45.54	54.00	-8.46	22.73	22.81	AV
* 5	5590.063	66.02	68.20	-2.18	42.81	23.21	PK
6	5652.188	65.03	69.83	-4.79	41.58	23.45	PK
7	5751.063	125.76	131.20	-5.44	101.92	23.84	PK
8	5921.688	63.35	70.64	-7.29	38.99	24.36	PK
9	6023.625	63.94	68.20	-4.26	39.26	24.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch157_5.785G	Humidity (%RH)	55.0

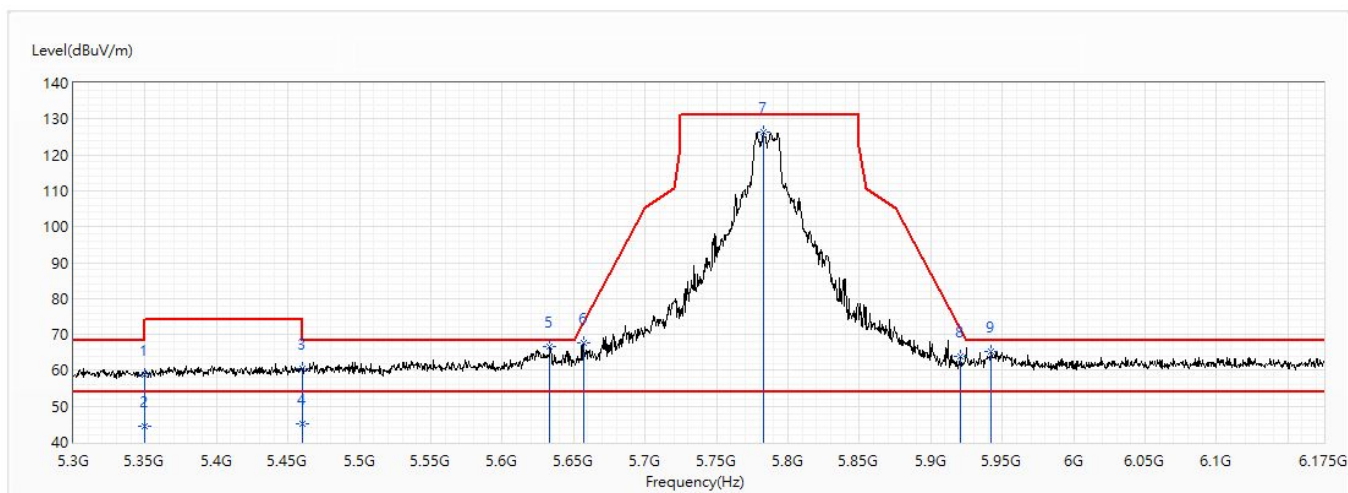


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.72	74.00	-15.28	36.02	22.70	PK
2	5350	44.41	54.00	-9.59	21.71	22.70	AV
3	5460	60.37	74.00	-13.63	37.56	22.81	PK
4	5460	44.95	54.00	-9.05	22.14	22.81	AV
* 5	5633.375	66.53	68.20	-1.67	43.15	23.38	PK
6	5657	67.74	73.40	-5.66	44.27	23.47	PK
7	5782.563	126.45	131.20	-4.75	102.50	23.95	PK
8	5920.813	64.06	71.29	-7.23	39.70	24.36	PK
9	5942.25	65.10	68.20	-3.10	40.67	24.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch157_5.785G	Humidity (%RH)	55.0

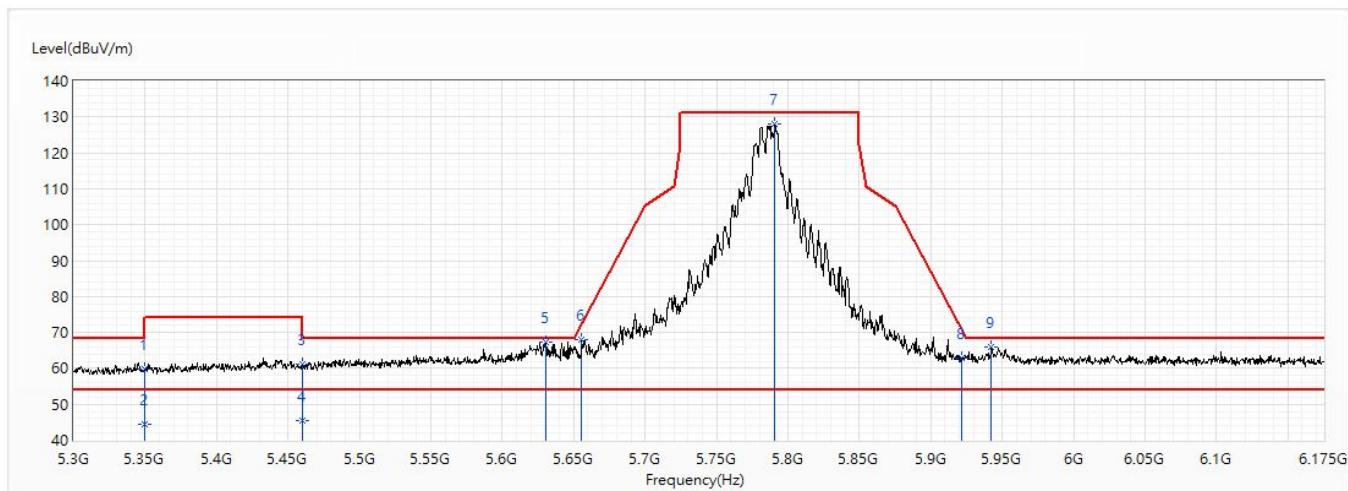


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.92	74.00	-14.08	37.22	22.70	PK
2	5350	44.37	54.00	-9.63	21.67	22.70	AV
3	5460	61.10	74.00	-12.90	38.29	22.81	PK
4	5460	45.48	54.00	-8.52	22.67	22.81	AV
* 5	5630.75	67.21	68.20	-0.99	43.85	23.36	PK
6	5655.688	67.94	72.43	-4.49	44.47	23.47	PK
7	5790.875	128.16	131.20	-3.04	104.19	23.97	PK
8	5921.688	62.88	70.64	-7.77	38.52	24.36	PK
9	5942.25	66.06	68.20	-2.14	41.63	24.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch165_5.825G	Humidity (%RH)	55.0

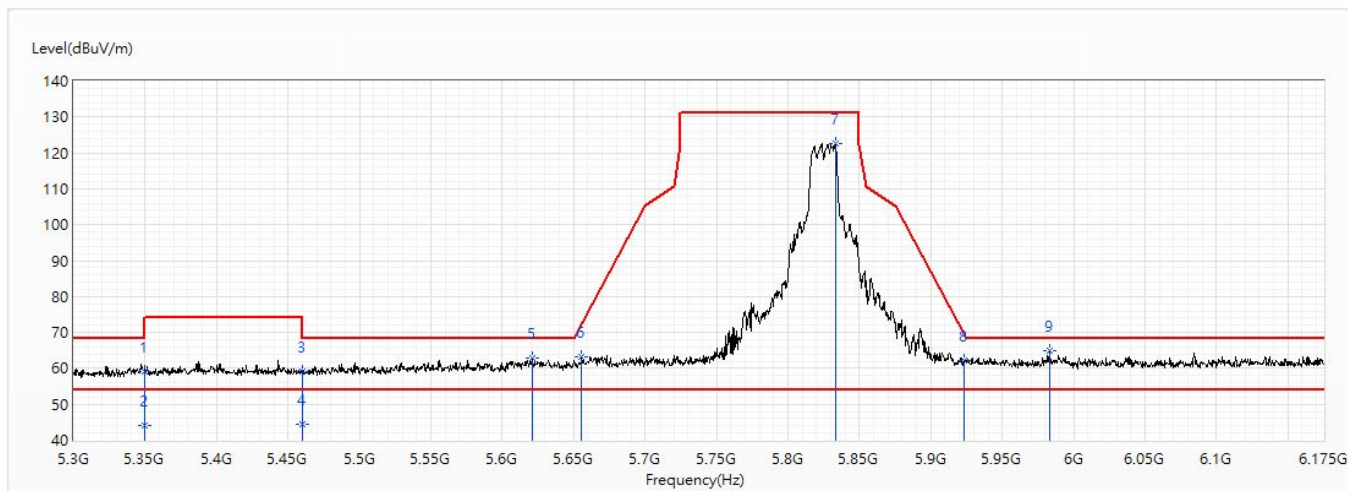


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.21	74.00	-14.79	36.51	22.70	PK
2	5350	44.25	54.00	-9.75	21.55	22.70	AV
3	5460	59.19	74.00	-14.81	36.38	22.81	PK
4	5460	44.38	54.00	-9.62	21.57	22.81	AV
5	5620.688	62.73	68.20	-5.47	39.40	23.33	PK
6	5655.688	63.18	72.43	-9.24	39.71	23.47	PK
7	5833.313	122.45	131.20	-8.75	98.35	24.10	PK
8	5923	62.33	69.67	-7.34	37.97	24.36	PK
* 9	5982.938	64.80	68.20	-3.40	40.24	24.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(20M)_Ch165_5.825G	Humidity (%RH)	55.0

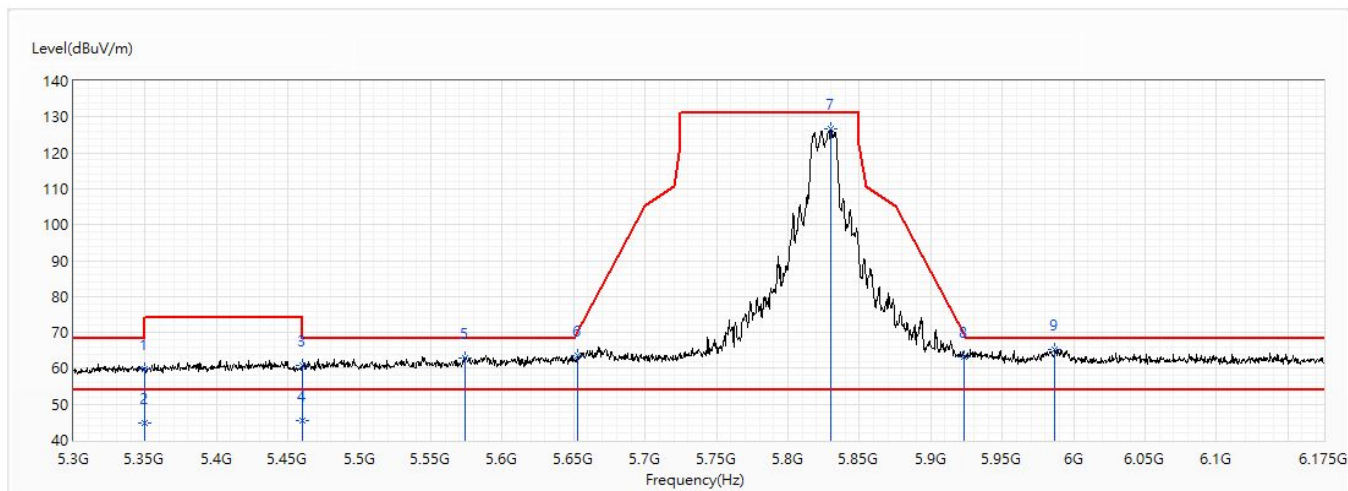


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.69	74.00	-14.31	36.99	22.70	PK
2	5350	44.69	54.00	-9.31	21.99	22.70	AV
3	5460	60.88	74.00	-13.12	38.07	22.81	PK
4	5460	45.47	54.00	-8.53	22.66	22.81	AV
5	5573.875	63.01	68.20	-5.19	39.87	23.14	PK
6	5653.063	63.42	70.48	-7.06	39.97	23.45	PK
7	5830.25	126.77	131.20	-4.43	102.69	24.08	PK
8	5923	63.18	69.67	-6.50	38.82	24.36	PK
* 9	5986.875	65.32	68.20	-2.88	40.76	24.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(40M)_Ch151_5.755G	Humidity (%RH)	55.0

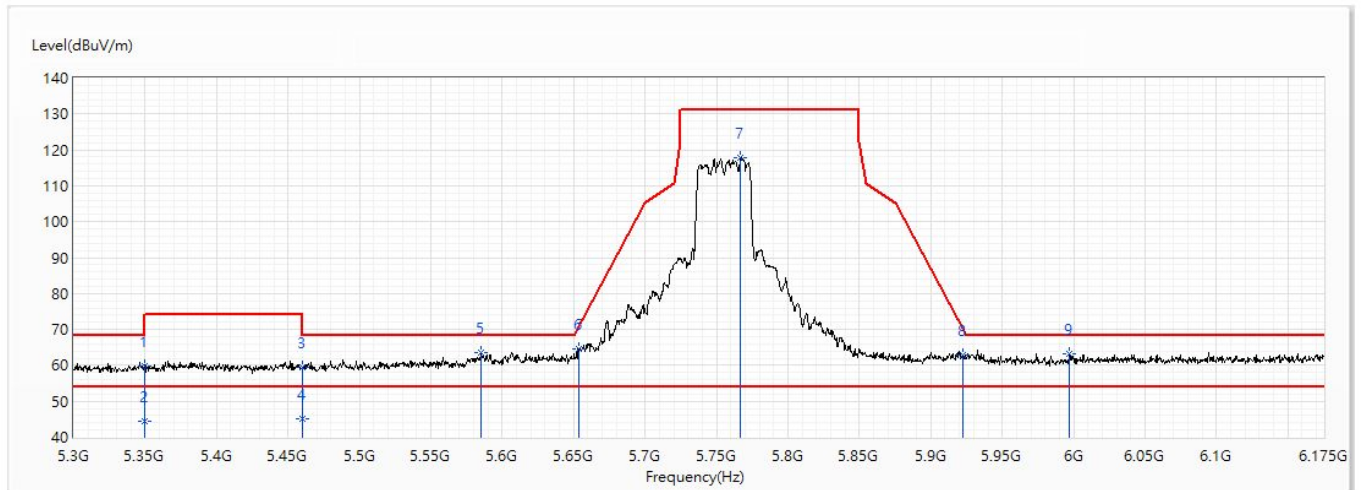


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.63	74.00	-14.37	36.93	22.70	PK
2	5350	44.30	54.00	-9.70	21.60	22.70	AV
3	5460	59.44	74.00	-14.56	36.63	22.81	PK
4	5460	45.02	54.00	-8.98	22.21	22.81	AV
* 5	5585.25	63.58	68.20	-4.62	40.39	23.19	PK
6	5653.5	64.59	70.80	-6.21	41.14	23.45	PK
7	5766.813	117.74	131.20	-13.46	93.86	23.88	PK
8	5922.125	62.92	70.32	-7.40	38.56	24.36	PK
9	5996.938	63.17	68.20	-5.03	38.57	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(40M)_Ch151_5.755G	Humidity (%RH)	55.0

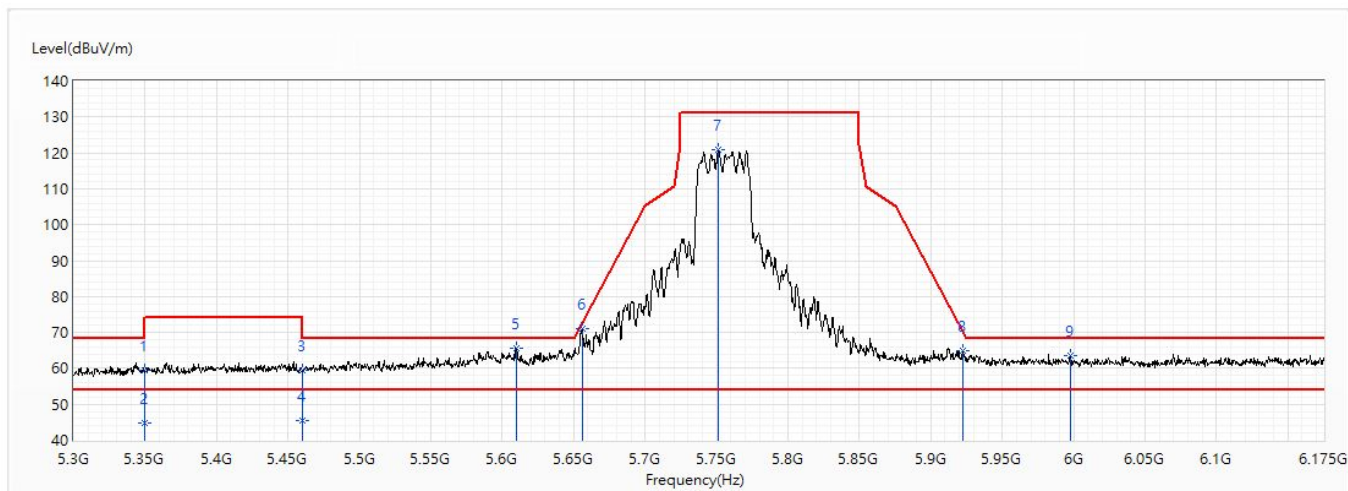


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.30	74.00	-14.70	36.60	22.70	PK
2	5350	44.66	54.00	-9.34	21.96	22.70	AV
3	5460	59.29	74.00	-14.71	36.48	22.81	PK
4	5460	45.58	54.00	-8.42	22.77	22.81	AV
5	5609.75	65.52	68.20	-2.68	42.24	23.28	PK
* 6	5656.125	70.89	72.75	-1.86	47.42	23.47	PK
7	5751.5	120.93	131.20	-10.27	97.09	23.84	PK
8	5922.563	64.92	70.00	-5.08	40.56	24.36	PK
9	5997.375	63.54	68.20	-4.66	38.94	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(40M)_Ch159_5.795G	Humidity (%RH)	55.0

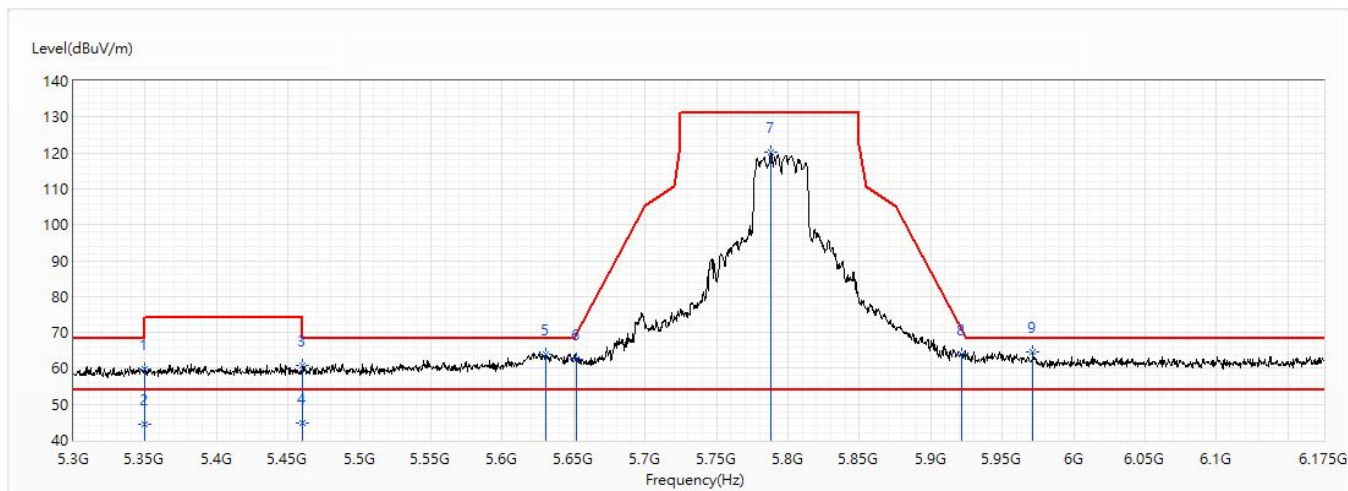


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.63	74.00	-14.37	36.93	22.70	PK
2	5350	44.37	54.00	-9.63	21.67	22.70	AV
3	5460	60.78	74.00	-13.22	37.97	22.81	PK
4	5460	44.88	54.00	-9.12	22.07	22.81	AV
5	5630.313	64.03	68.20	-4.17	40.67	23.36	PK
6	5652.188	62.39	69.83	-7.44	38.94	23.45	PK
7	5788.25	120.33	131.20	-10.87	96.38	23.95	PK
8	5921.688	63.83	70.64	-6.81	39.47	24.36	PK
* 9	5971.563	64.43	68.20	-3.77	39.92	24.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(40M)_Ch159_5.795G	Humidity (%RH)	55.0

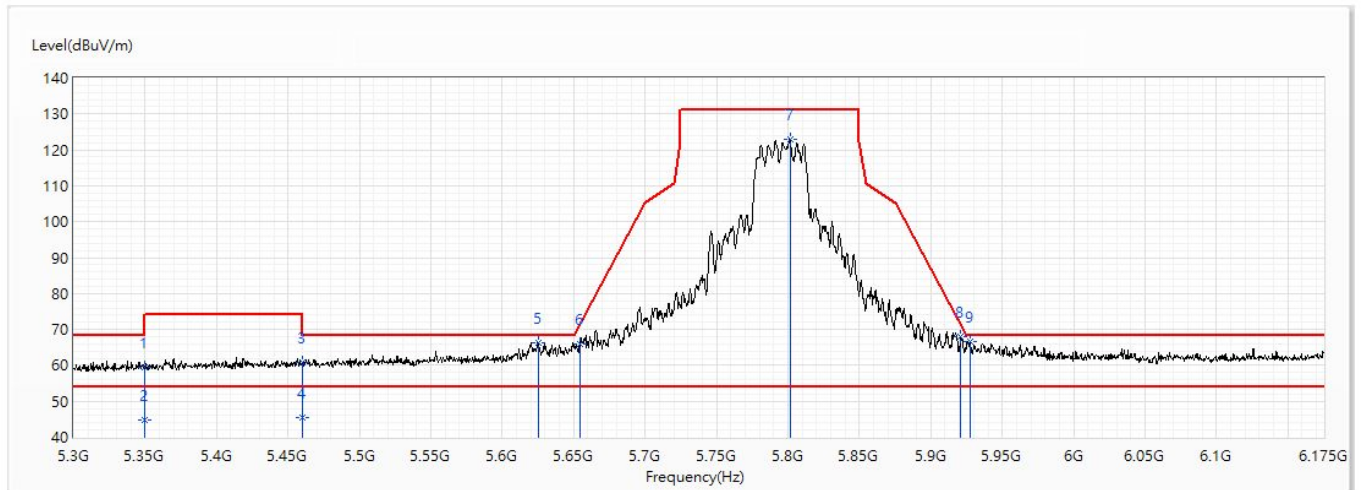


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.52	74.00	-14.48	36.82	22.70	PK
2	5350	44.73	54.00	-9.27	22.03	22.70	AV
3	5460	60.67	74.00	-13.33	37.86	22.81	PK
4	5460	45.57	54.00	-8.43	22.76	22.81	AV
5	5625.5	66.39	68.20	-1.81	43.03	23.36	PK
6	5654.813	65.88	71.78	-5.89	42.41	23.47	PK
7	5801.375	122.83	131.20	-8.37	98.84	23.99	PK
8	5920.813	68.08	71.29	-3.20	43.72	24.36	PK
* 9	5927.375	66.76	68.20	-1.44	42.38	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/10
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ac(80M)_Ch155_5.775G	Humidity (%RH)	55.0

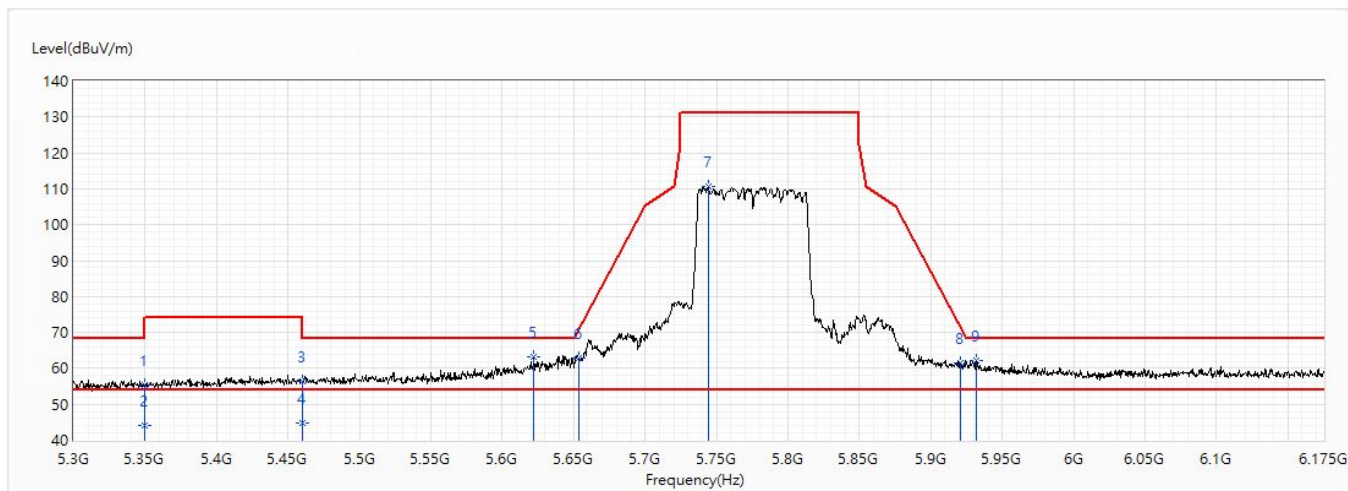


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	55.46	74.00	-18.54	32.76	22.70	PK
2	5350	44.18	54.00	-9.82	21.48	22.70	AV
3	5460	56.38	74.00	-17.62	33.57	22.81	PK
4	5460	44.87	54.00	-9.13	22.06	22.81	AV
* 5	5622	63.32	68.20	-4.88	39.99	23.33	PK
6	5653.5	62.96	70.80	-7.84	39.51	23.45	PK
7	5744.063	110.62	131.20	-20.58	86.81	23.81	PK
8	5920.813	61.41	71.29	-9.87	37.05	24.36	PK
9	5931.75	62.14	68.20	-6.06	37.76	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/10
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ac(80M)_Ch155_5.775G	Humidity (%RH)	55.0

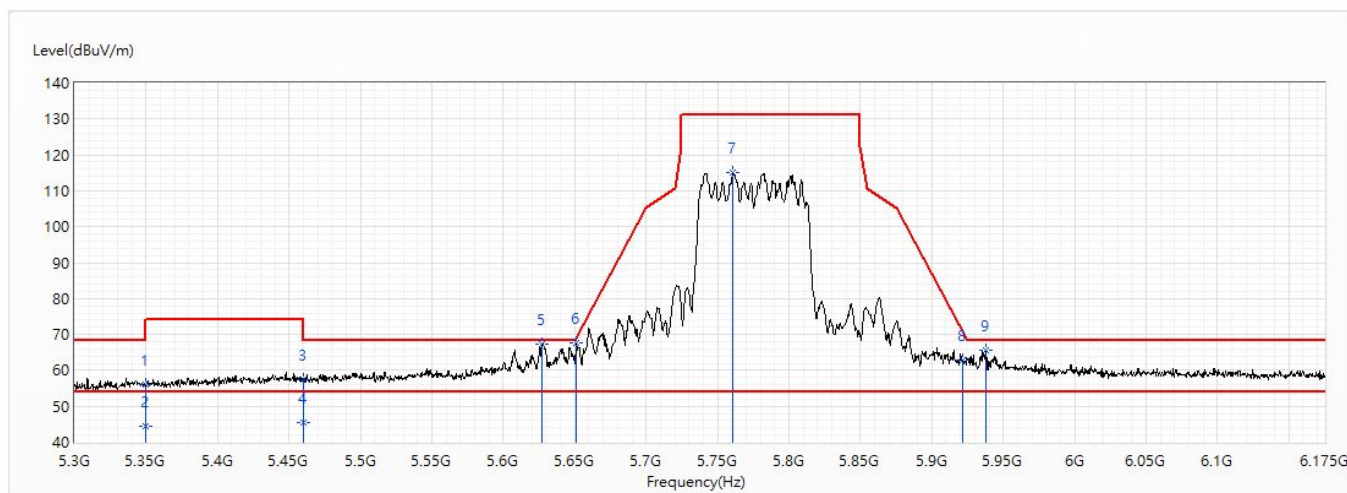


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	56.04	74.00	-17.96	33.34	22.70	PK
2	5350	44.38	54.00	-9.62	21.68	22.70	AV
3	5460	57.28	74.00	-16.72	34.47	22.81	PK
4	5460	45.30	54.00	-8.70	22.49	22.81	AV
* 5	5626.813	67.23	68.20	-0.97	43.87	23.36	PK
6	5651.313	67.69	69.18	-1.48	44.24	23.45	PK
7	5760.688	114.92	131.20	-16.28	91.06	23.86	PK
8	5921.688	63.02	70.64	-7.62	38.66	24.36	PK
9	5937.438	65.71	68.20	-2.49	41.31	24.40	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch149_5.745G	Humidity (%RH)	55.0

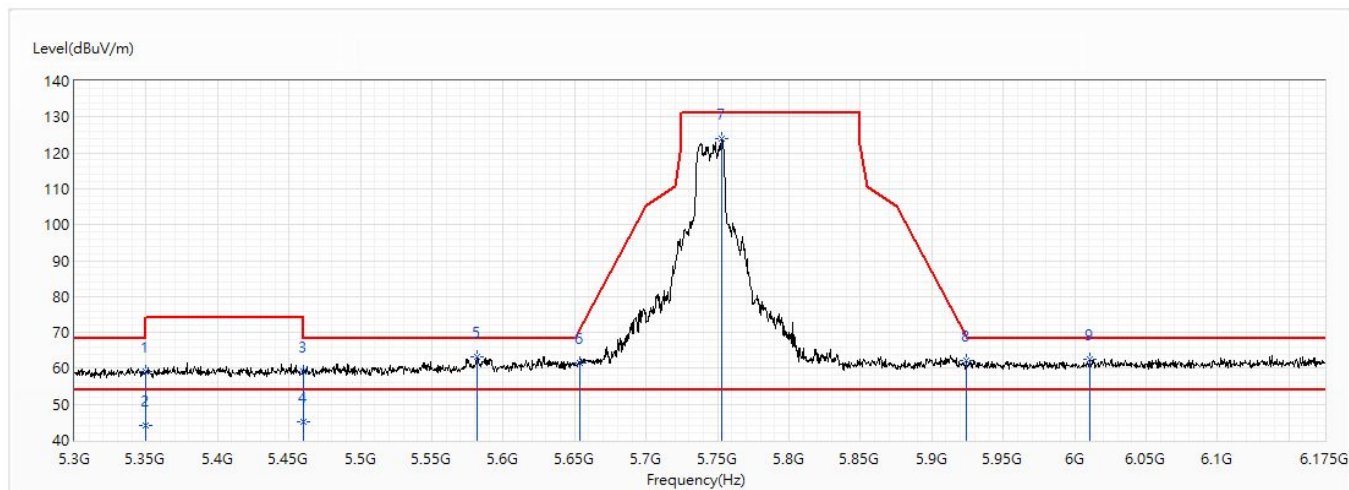


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.06	74.00	-14.94	36.36	22.70	PK
2	5350	44.24	54.00	-9.76	21.54	22.70	AV
3	5460	58.96	74.00	-15.04	36.15	22.81	PK
4	5460	44.98	54.00	-9.02	22.17	22.81	AV
* 5	5581.75	63.09	68.20	-5.11	39.93	23.16	PK
6	5653.5	61.67	70.80	-9.13	38.22	23.45	PK
7	5752.813	124.05	131.20	-7.15	100.21	23.84	PK
8	5923.875	62.20	69.03	-6.83	37.84	24.36	PK
9	6010.938	62.69	68.20	-5.51	38.06	24.63	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch149_5.745G	Humidity (%RH)	55.0

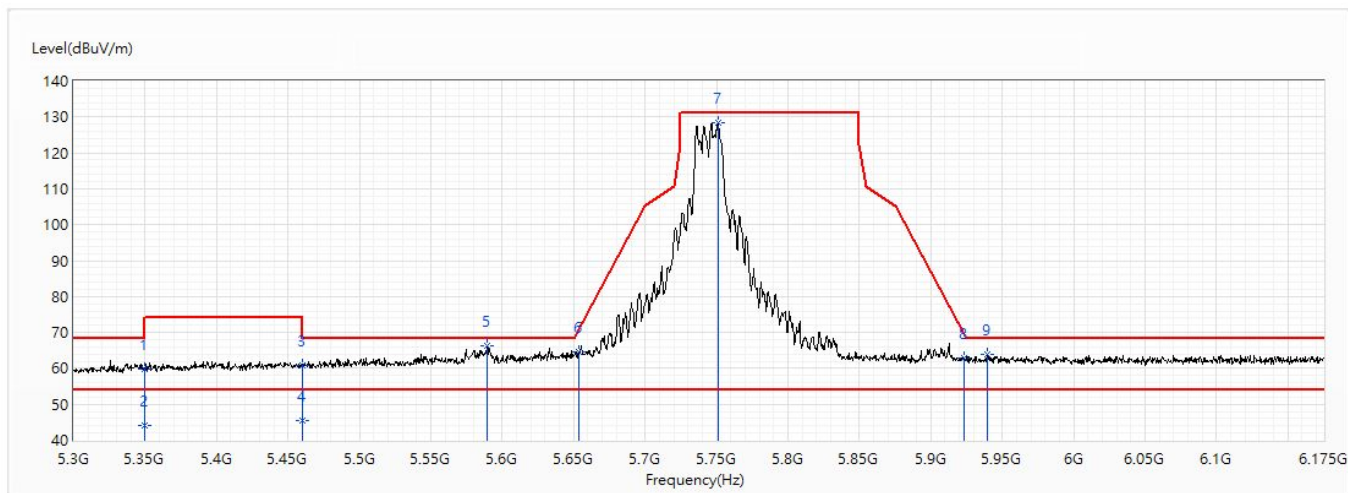


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.84	74.00	-14.16	37.14	22.70	PK
2	5350	44.22	54.00	-9.78	21.52	22.70	AV
3	5460	60.79	74.00	-13.21	37.98	22.81	PK
4	5460	45.33	54.00	-8.67	22.52	22.81	AV
* 5	5589.625	66.40	68.20	-1.80	43.19	23.21	PK
6	5653.5	64.43	70.80	-6.37	40.98	23.45	PK
7	5751.063	128.33	131.20	-2.87	104.49	23.84	PK
8	5923	63.01	69.67	-6.66	38.65	24.36	PK
9	5939.188	64.02	68.20	-4.18	39.61	24.41	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch157_5.785G	Humidity (%RH)	55.0

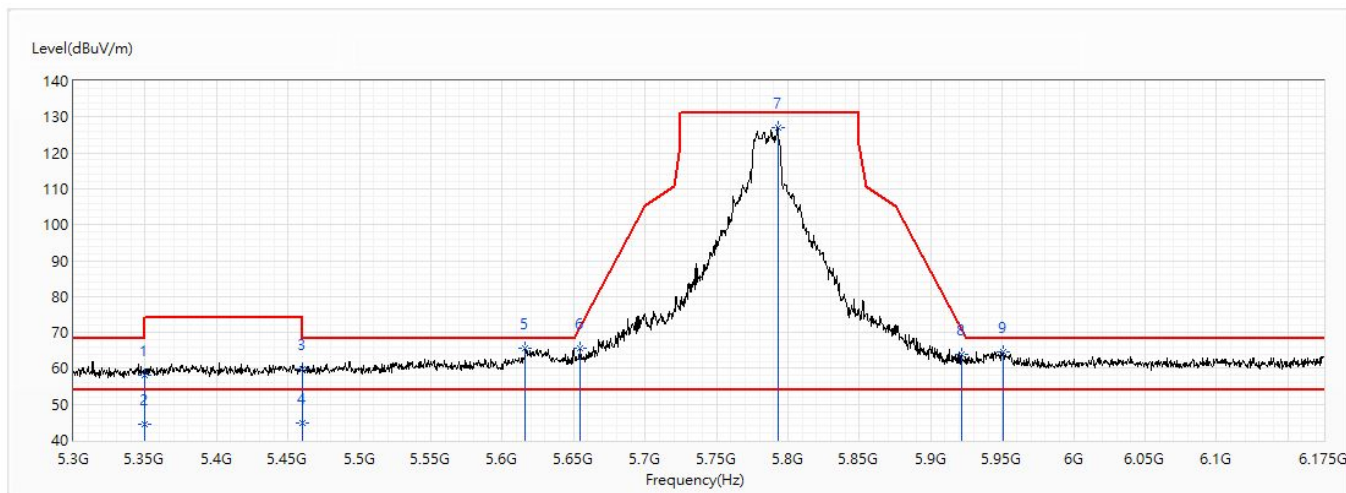


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.22	74.00	-15.78	35.52	22.70	PK
2	5350	44.38	54.00	-9.62	21.68	22.70	AV
3	5460	59.68	74.00	-14.32	36.87	22.81	PK
4	5460	44.83	54.00	-9.17	22.02	22.81	AV
* 5	5616.313	65.50	68.20	-2.70	42.20	23.30	PK
6	5654.375	65.74	71.45	-5.71	42.27	23.47	PK
7	5793.063	126.91	131.20	-4.29	102.94	23.97	PK
8	5921.25	63.74	70.96	-7.22	39.38	24.36	PK
9	5950.563	64.52	68.20	-3.68	40.07	24.45	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch157_5.785G	Humidity (%RH)	55.0

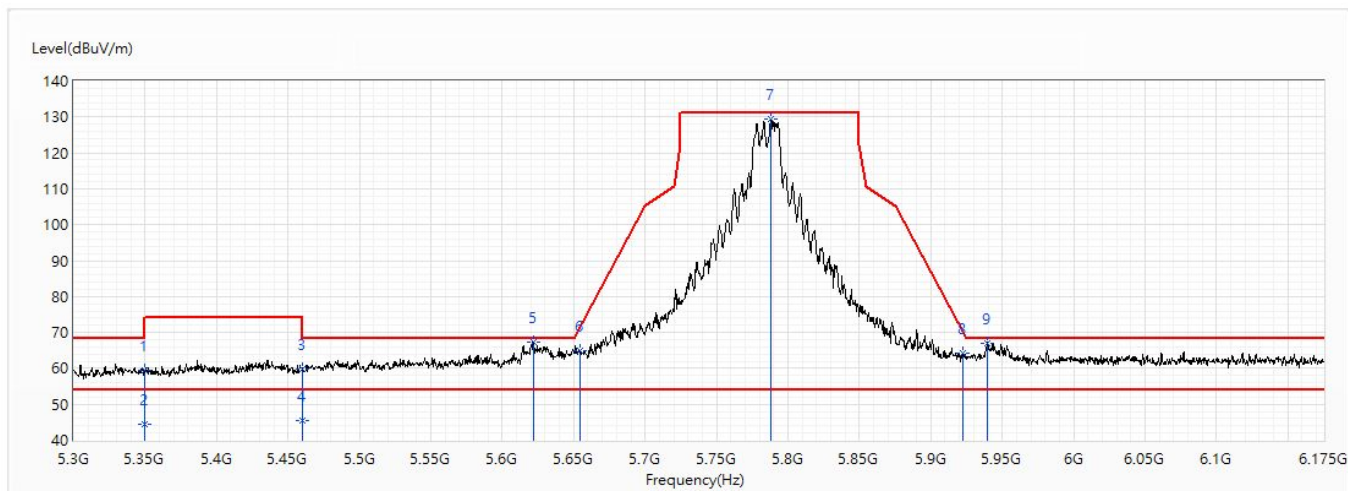


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.36	74.00	-14.64	36.66	22.70	PK
2	5350	44.37	54.00	-9.63	21.67	22.70	AV
3	5460	59.74	74.00	-14.26	36.93	22.81	PK
4	5460	45.41	54.00	-8.59	22.60	22.81	AV
* 5	5622	67.36	68.20	-0.84	44.03	23.33	PK
6	5654.375	64.86	71.45	-6.59	41.39	23.47	PK
7	5788.25	129.58	131.20	-1.62	105.63	23.95	PK
8	5922.125	64.37	70.32	-5.95	40.01	24.36	PK
9	5939.625	67.10	68.20	-1.10	42.67	24.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch165_5.825G	Humidity (%RH)	55.0

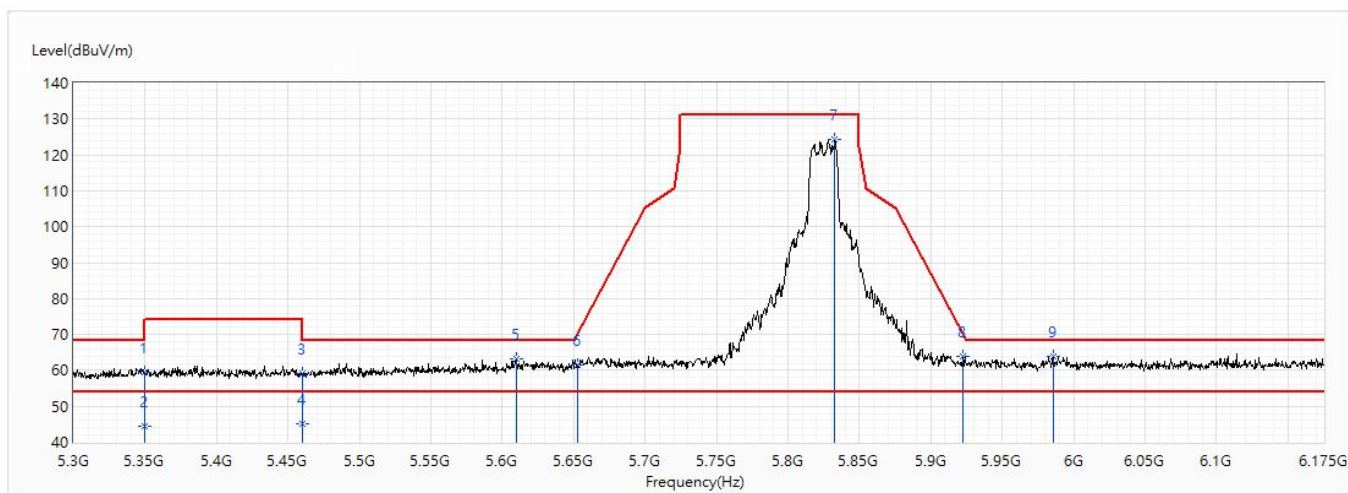


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.33	74.00	-14.67	36.63	22.70	PK
2	5350	44.38	54.00	-9.62	21.68	22.70	AV
3	5460	59.01	74.00	-14.99	36.20	22.81	PK
4	5460	44.97	54.00	-9.03	22.16	22.81	AV
5	5610.188	63.15	68.20	-5.05	39.87	23.28	PK
6	5653.063	61.57	70.48	-8.90	38.12	23.45	PK
7	5832.875	124.36	131.20	-6.84	100.26	24.10	PK
8	5922.563	64.04	70.00	-5.95	39.68	24.36	PK
* 9	5985.563	64.05	68.20	-4.15	39.49	24.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(20M)_Ch165_5.825G	Humidity (%RH)	55.0

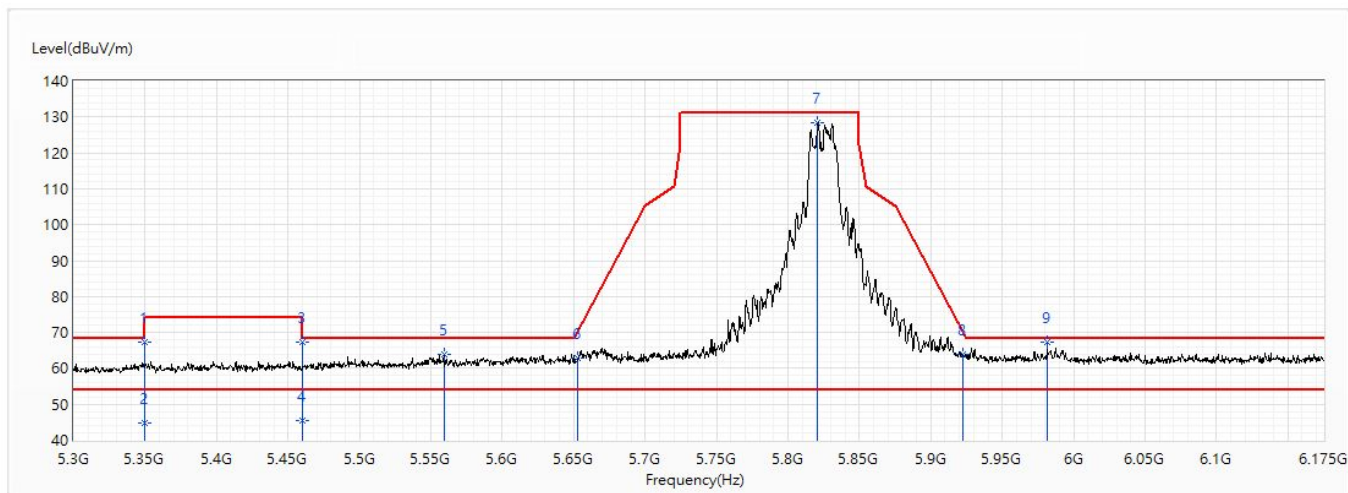


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	67.17	74.00	-6.83	44.47	22.70	PK
2	5350	44.68	54.00	-9.32	21.98	22.70	AV
3	5460	67.17	74.00	-6.83	44.36	22.81	PK
4	5460	45.56	54.00	-8.44	22.75	22.81	AV
5	5559	63.75	68.20	-4.45	40.67	23.08	PK
6	5653.063	62.73	70.48	-7.74	39.28	23.45	PK
7	5820.625	128.53	131.20	-2.67	104.47	24.06	PK
8	5922.563	63.78	70.00	-6.22	39.42	24.36	PK
* 9	5981.625	67.17	68.20	-1.03	42.63	24.54	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch151_5.755G	Humidity (%RH)	55.0

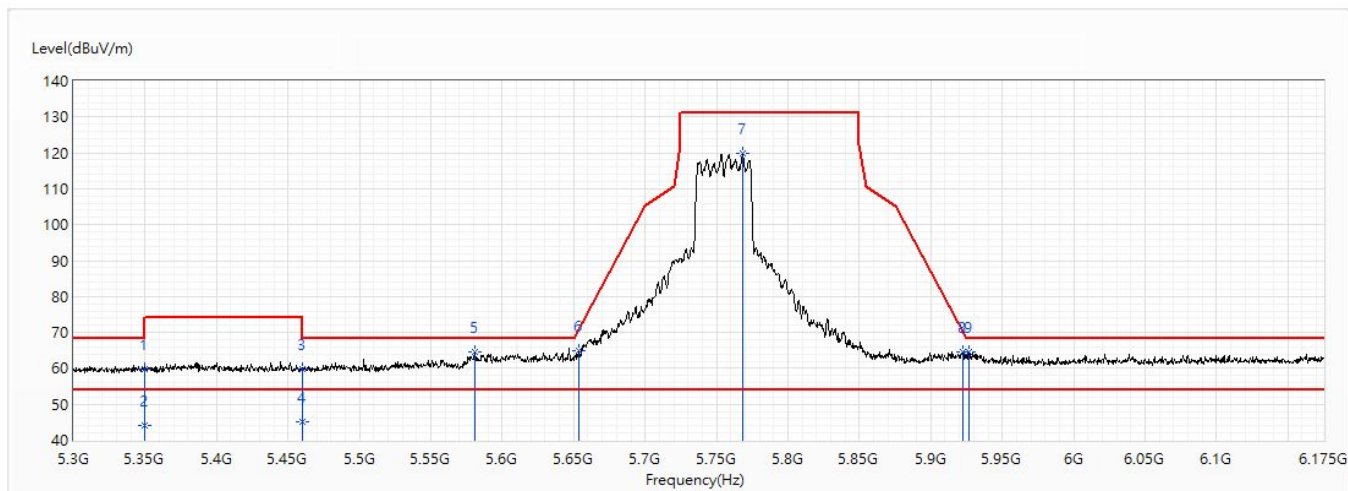


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.90	74.00	-14.10	37.20	22.70	PK
2	5350	44.26	54.00	-9.74	21.56	22.70	AV
3	5460	59.75	74.00	-14.25	36.94	22.81	PK
4	5460	44.99	54.00	-9.01	22.18	22.81	AV
5	5580.438	64.64	68.20	-3.56	41.48	23.16	PK
6	5653.5	64.91	70.80	-5.89	41.46	23.45	PK
7	5768.125	119.72	131.20	-11.48	95.82	23.90	PK
8	5922.125	64.47	70.32	-5.85	40.11	24.36	PK
* 9	5926.5	64.71	68.20	-3.49	40.33	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch151_5.755G	Humidity (%RH)	55.0

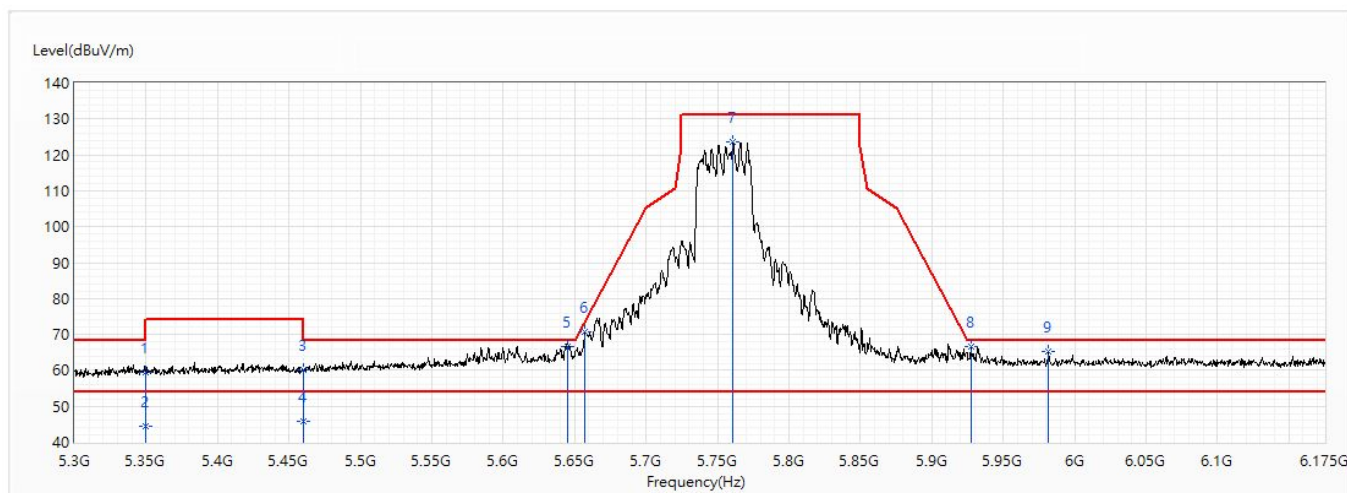


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.35	74.00	-14.65	36.65	22.70	PK
2	5350	44.46	54.00	-9.54	21.76	22.70	AV
3	5460	60.18	74.00	-13.82	37.37	22.81	PK
4	5460	45.72	54.00	-8.28	22.91	22.81	AV
* 5	5644.75	66.79	68.20	-1.41	43.37	23.42	PK
6	5657.438	70.72	73.72	-3.00	47.25	23.47	PK
7	5760.688	123.45	131.20	-7.75	99.59	23.86	PK
8	5927.375	66.64	68.20	-1.56	42.26	24.38	PK
9	5981.625	65.14	68.20	-3.06	40.60	24.54	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch159_5.795G	Humidity (%RH)	55.0

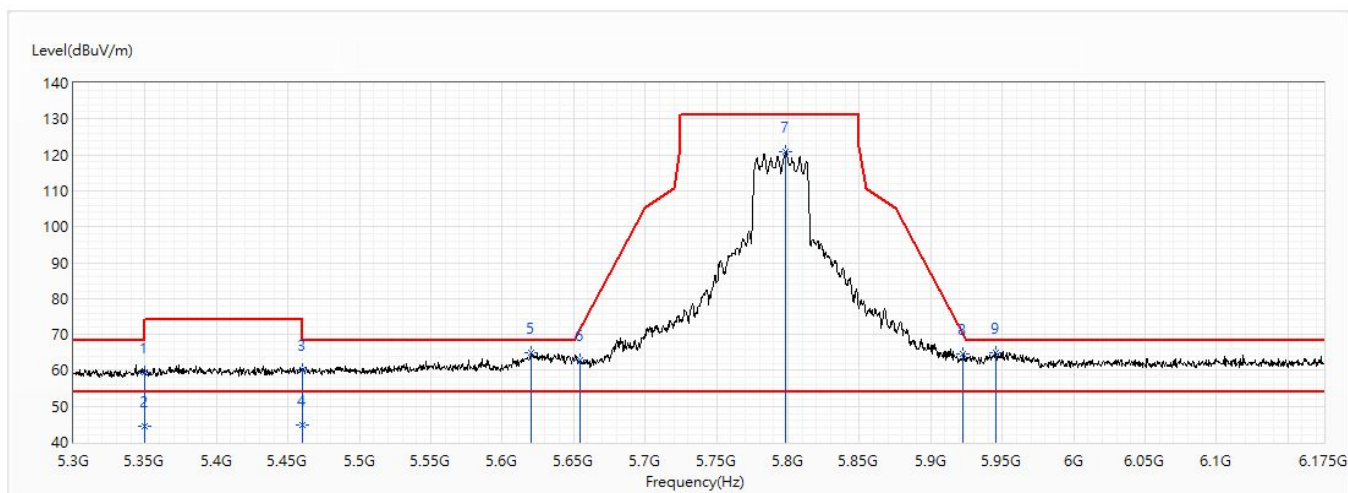


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.53	74.00	-14.47	36.83	22.70	PK
2	5350	44.32	54.00	-9.68	21.62	22.70	AV
3	5460	60.28	74.00	-13.72	37.47	22.81	PK
4	5460	44.82	54.00	-9.18	22.01	22.81	AV
5	5620.25	64.78	68.20	-3.42	41.45	23.33	PK
6	5654.375	62.91	71.45	-8.54	39.44	23.47	PK
7	5798.313	120.87	131.20	-10.33	96.88	23.99	PK
8	5922.563	64.70	70.00	-5.30	40.34	24.36	PK
* 9	5945.75	65.07	68.20	-3.13	40.64	24.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/20
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(40M)_Ch159_5.795G	Humidity (%RH)	55.0

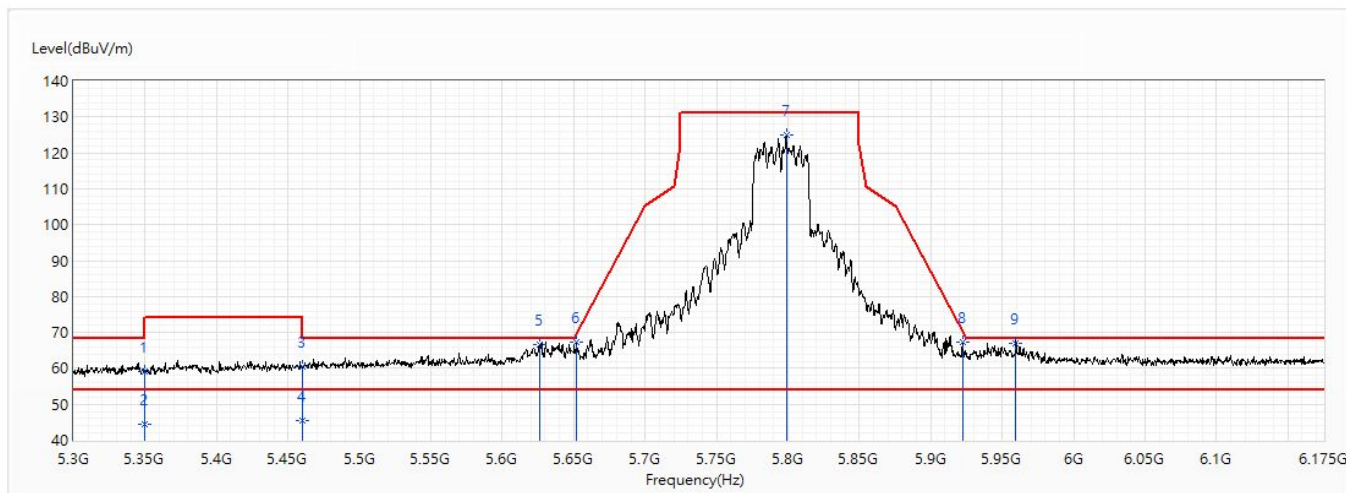


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.27	74.00	-14.73	36.57	22.70	PK
2	5350	44.33	54.00	-9.67	21.63	22.70	AV
3	5460	60.41	74.00	-13.59	37.60	22.81	PK
4	5460	45.60	54.00	-8.40	22.79	22.81	AV
5	5626.375	66.68	68.20	-1.52	43.32	23.36	PK
6	5652.188	67.20	69.83	-2.63	43.75	23.45	PK
7	5798.75	124.82	131.20	-6.38	100.83	23.99	PK
8	5922.125	67.29	70.32	-3.03	42.93	24.36	PK
* 9	5959.313	66.91	68.20	-1.29	42.44	24.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/10
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch155_5.775G	Humidity (%RH)	55.0

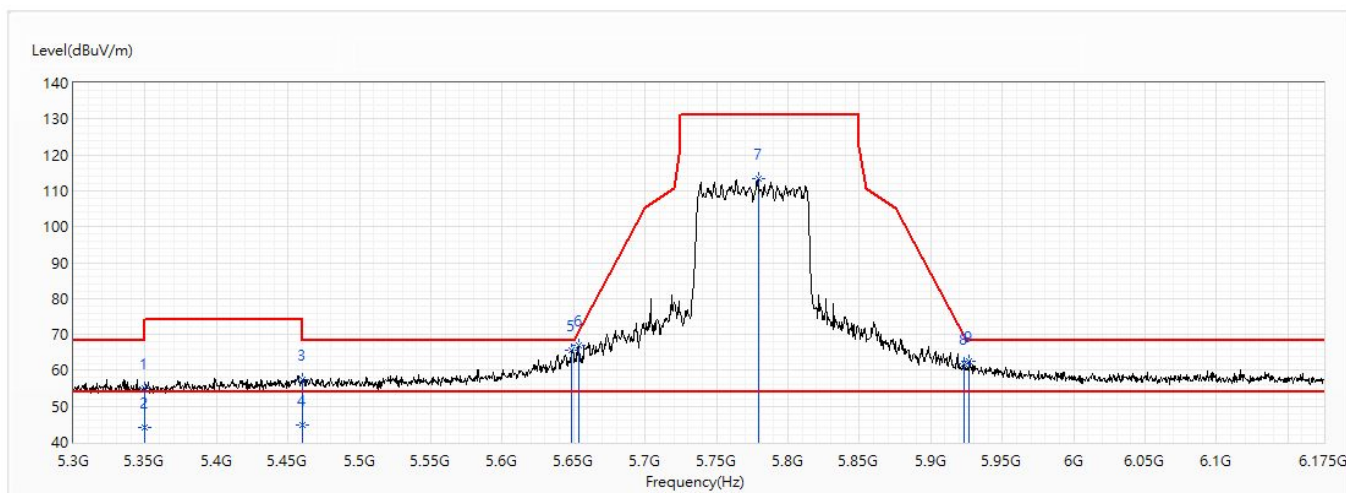


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	54.86	74.00	-19.14	32.16	22.70	PK
2	5350	44.19	54.00	-9.81	21.49	22.70	AV
3	5460	57.28	74.00	-16.72	34.47	22.81	PK
4	5460	44.84	54.00	-9.16	22.03	22.81	AV
* 5	5648.688	65.53	68.20	-2.67	42.09	23.44	PK
6	5653.5	66.85	70.80	-3.95	43.40	23.45	PK
7	5779.063	113.23	131.20	-17.97	89.30	23.93	PK
8	5923	61.88	69.67	-7.79	37.52	24.36	PK
9	5926.938	62.54	68.20	-5.66	38.16	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	GR140DG	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/10
Test Mode	Mode 2: CDD Mode	Engineer	Elwin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax(80M)_Ch155_5.775G	Humidity (%RH)	55.0

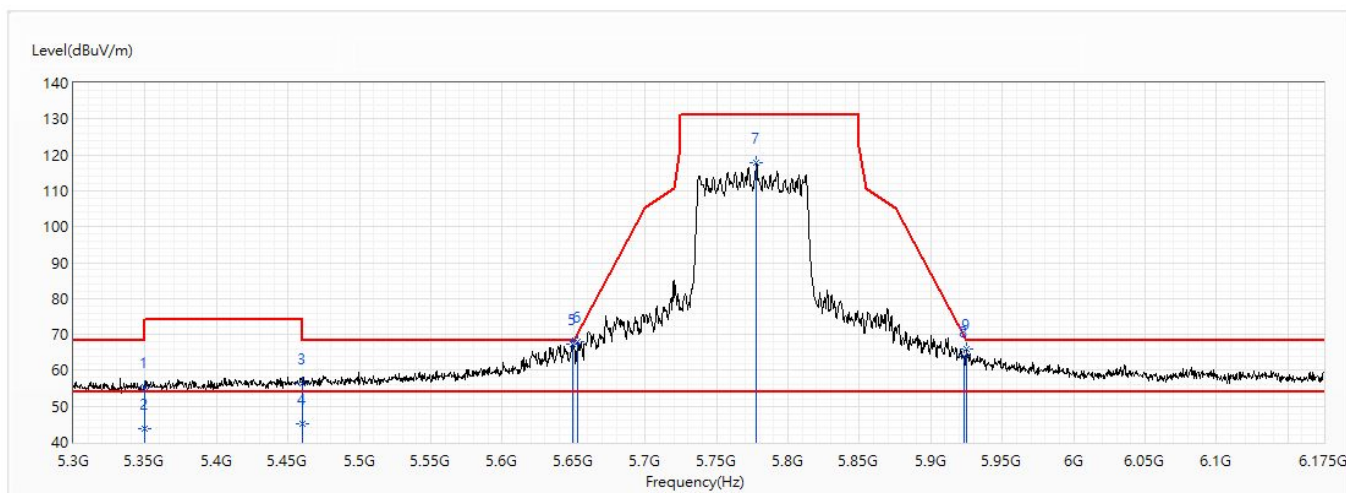

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	55.37	74.00	-18.63	32.67	22.70	PK
2	5350	43.68	54.00	-10.32	20.98	22.70	AV
3	5460	56.30	74.00	-17.70	33.49	22.81	PK
4	5460	44.98	54.00	-9.02	22.17	22.81	AV
* 5	5649.125	67.42	68.20	-0.78	43.98	23.44	PK
6	5653.063	68.09	70.48	-2.39	44.64	23.45	PK
7	5777.75	117.89	131.20	-13.31	93.96	23.93	PK
8	5923	63.79	69.67	-5.88	39.43	24.36	PK
9	5924.75	65.77	68.38	-2.61	41.41	24.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.