FCC TEST REPORT(Bluetooth)

for

CABASSE SA

NETWORK&BLUETOOTH AUDIO SOURCE

Model Number: Stream Source

FCC ID: 2ACK6STRMSRC

Prepared for : CABASSE SA

Address : 210. RUE RENE DESCARTES-BP 10,

29280 PLOUZANE, FRANCE

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Baishun Industrial Zone, Zhangmutou Town,

Dongguan, Guangdong, China

Tel: 86-769-8718 2258 Fax: 86-769-8718 1058

Report No. : 14KWE06157701F Date of Test : Jun. 4~19, 2014 Date of Report : Jun. 20, 2014

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	4
2.1. Product Function	4
2.2. Description of Device (EUT)	
2.3. Difference between Model Numbers	
2.4. Independent Operation Modes	
2.5. Test Supporting System	
3. TEST SITES	
3.1. Test Facilities	
3.2. List of Test and Measurement Instruments	
4. TEST SET-UP AND OPERATION MODES	
4.1. Principle of Configuration Selection	
4.2. Block Diagram of Test Set-up	
4.3. Test Operation Mode and Test Software	
4.5. Countermeasures to Achieve EMC Compliance	
5. EMISSION TEST RESULTS	
5.1. Conducted Emission at the Mains Terminals Test	
5.2. Radiated Emission Test	
6. 20DB OCCUPY BANDWIDTH	
6.1. Limits	
6.2. Test setup	
7. BAND EDGE COMPLIANCE TEST	18
7.1. Limits	
7.2. Test setup	
8. ANTENNA REQUIREMENTS	
8.1. Limits	
8.2. Result	
9. PHOTOGRAPHS OF TEST SET-UP	
10. PHOTOGRAPHS OF THE EUT	22

Keyway Testing Technology Co., Ltd.

Applicant: CABASSE SA

Address: 210. RUE RENE DESCARTES-BP 10,

29280 PLOUZANE, FRANCE

Manufacturer: CABASSE SA

Address: 210. RUE RENE DESCARTES-BP 10,

29280 PLOUZANE, FRANCE

E.U.T: NETWORK&BLUETOOTH AUDIO SOURCE

Model Number: Stream Source

Trade Name: CABASSE Serial No.: -----

Date of Receipt: Jun. 4, 2014 **Date of Test:** Jun. 4~19, 2014

Test Specification: FCC Part 15, Subpart C Section 15.249: Oct. 1, 2013

ANSI C63.4:2009

Test Result: The equipment under test was found to be compliance with the

requirements of the standards applied.

Issue Date: Jun. 19, 2014

Approved by:

Tested by:

Reviewed by:

Andy Gao / Engineer

Jade Yang/ Supervisor

Chris Du / Manager

Other Aspects:

None.

Abbreviations: OK/P=passed

fail/F=failed

n.a/N=not applicable

E.U.T=equipment under tested

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.

1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.209 15.249(a)(d)	PASS
20dB Bandwidth	15.249	PASS
Emissions from out of band	15.249(d)	PASS
Antenna Requirement	15.203	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	NETWORK&BLUETOOTH AUDIO SOURCE		
Model No.:	Stream Source		
	BT:2402~2480MHz		
Operation Frequency:	WIFI:2412MHz~2462MHz (802.11b/802.11g/802.11n(H20))		
	2422MHz~2452MHz (802.11n(H40))		
	BT:79 Channels		
Channel numbers:	WIFI: 11 for 802.11b/802.11g/802.11n(H20),		
	7 for 802.11n(H40)		
Channel congretion:	BT :1M		
Channel separation:	WIFI : 5MHz		
	BT:GFSK, Pi/4DQPSK, 8-DQPSK		
Modulation to abnalage	WIFI: Direct Sequence Spread Spectrum (DSSS) for 802.11b		
Modulation technology:	Orthogonal Frequency Division Multiplexing(OFDM) for		
	802.11g/n		
	802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps		
Data rate:	802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps,		
Data rate.	48Mbps,54Mbps		
	802.11n: Up to 150Mbps		
Antenna Type:	Integral Antenna		
Antenna gain:	BT:-0.5dBi (declare by Applicant)		
Antenna gam.	WIFI:3dBi (declare by Applicant)		
Power supply:	AC 120V/60Hz		
BT version:	4.0(EDR)		
	Manufacturer: BI		
	M/N:BI10-120100-I		
Switching power Adapter:	Input :AC 120~240V 50-60Hz;		
	Output: DC 12V 1A		
	DC Line: Unshielded, Undetachable 1.5m		

2.3. Difference between Model Numbers

None.

2.4. Independent Operation Modes

The basic operation modes are:

2.4.1. EUT work continues TX mode and frequency as below:

Modulation	Channel	Frequency
	Low	2402MHz
GFSK	Middle	2441MHz
	High	2480MHz

Note: Bluetooth signal has 3 packages DH1, DH3, DH5, DH5 package is largest; we are testing DH5 in the report.

2.5. Test Supporting System

None.

3. TEST SITES

3.1. Test Facilities

Lab Qualifications: 944 Shielded Room built by ETS-Lindgren, USA

Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA

Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.

Registration No.: UA 50207153 Date of registration: July 13, 2011

Certificated by UL, USA

Registration No.: 100567-237

Date of registration: September 1, 2011

Certificated by Intertek

Registration No.: 2011-RTL-L1-31 Date of registration: October 11, 2011

Certificated by Industry Canada

Registration No.: 9868A

Date of registration: December 8, 2011

Certificated by FCC, USA Registration No.: 370994

Date of registration: February 21, 2012

Certificated by CNAS China Registration No.: CNAS L5783 Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Baishun Industrial Zone, Zhangmutou Town,

Dongguan, Guangdong, China

3.2. List of Test and Measurement Instruments

3.2.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,14	Apr. 27,15
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,14	Apr. 27,15
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,14	Apr. 27,15
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,14	Apr. 27,15

3.2.2. For radiated emission test

EMI Test Receiver Rohde&Schwarz ESCI 101156 Apr. 27,14 Apr. 27,15 System Simulator Agilent E5515C GB43130245 Apr. 30,14 Apr. 30,15 Power Splitter Weinschel 1506A NW425 Apr. 30,14 Apr. 30,15 Bilog Antenna ETS-LINDGREEN 3142D 135452 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4411B MY4511304 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier <t< th=""><th></th><th></th><th></th><th></th><th></th><th></th></t<>						
System Simulator Agilent E5515C GB43130245 Apr. 30,14 Apr. 30,15 Power Splitter Weinschel 1506A NW425 Apr. 30,14 Apr. 30,15 Bilog Antenna ETS-LINDGREEN 3142D 135452 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4411B MY4511304 Apr. 27,14 Apr. 27,15 3m Semi-anechoic Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Splitter Weinschel 1506A NW425 Apr. 30,14 Apr. 30,15 Bilog Antenna ETS-LINDGREEN 3142D 135452 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4411B MY4511304 Apr. 27,14 Apr. 27,15 3m Semi-anechoic Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier	EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,14	Apr. 27,15
Bilog Antenna ETS-LINDGREEN 3142D 135452 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4411B MY4511304 Apr. 27,14 Apr. 27,15 3m Semi-anechoic Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 Signal Amplifier	System Simulator	Agilent	E5515C	GB43130245	Apr. 30,14	Apr. 30,15
Spectrum Analyzer Agilent E4411B MY4511304 Apr. 27,14 Apr. 27,15 3m Semi-anechoic Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW	Power Splitter	Weinschel	1506A	NW425	Apr. 30,14	Apr. 30,15
3m Semi-anechoic Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW	Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,14	Apr. 27,15
Chamber ETS-LINDGREEN 966 KW01 Apr. 27,14 Apr. 27,15 Signal Amplifier SONOMA 310 187016 Apr. 27,14 Apr. 27,15 Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1	Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,14	Apr. 27,15
Signal Amplifier Agilent 8449B 3008A00251 Apr. 27,14 Apr. 27,15 RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15		ETS-LINDGREEN	966	KW01	Apr. 27,14	Apr. 27,15
RF Cable IMRO IMRO-400 966 Cable 1# N/A N/A MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 30,14 Apr. 30,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW037 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Signal Amplifier	SONOMA	310	187016	Apr. 27,14	Apr. 27,15
MULTI-DEVICE Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,14	Apr. 27,15
Controller ETS-LINDGREEN 2090 126913 N/A N/A Horn Antenna DAZE ZN30701 11003 Apr. 27,14 Apr. 27,15 Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
Horn Antenna SCHWARZBECK BBHA9170 9170-068 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15		ETS-LINDGREEN	2090	126913	N/A	N/A
Spectrum Analyzer Agilent 8593E 3911A04271 Apr. 27,14 Apr. 27,15 Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Horn Antenna	DAZE	ZN30701	11003	Apr. 27,14	Apr. 27,15
Spectrum Analyzer Agilent E4408B MY44211125 Apr. 30,14 Apr. 30,15 Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,14	Apr. 27,15
Signal Amplifier DAZE ZN3380C 11001 Apr. 27,14 Apr. 27,15 High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,14	Apr. 27,15
High Pass filter Micro HPM50111 324216 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 30,14	Apr. 30,15
Filter COM-MW ZBSF-C836.5-25-X KW032 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,14	Apr. 27,15
Filter COM-MW ZBSF-C1747.5-75-X2 KW035 Apr. 30,14 Apr. 30,15 Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	High Pass filter	Micro	HPM50111	324216	Apr. 30,14	Apr. 30,15
Filter COM-MW ZBSF-C1880-60-X2 KW037 Apr. 30,14 Apr. 30,15	Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 30,14	Apr. 30,15
	Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 30,14	Apr. 30,15
	Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 30,14	Apr. 30,15
DC Power Supply LongWei PS-305D 010964729 Apr. 27,14 Apr. 27,15	DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,14	Apr. 27,15
Constant temperature and humidity box GF GTH-800-40-1P MAA9906-005 Apr. 27,14 Apr. 27,15	•	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,14	Apr. 27,15
Universal radio communication tester Rohde&Schwarz CMU200 3215420 Apr. 27,14 Apr. 27,15		Rohde&Schwarz	CMU200	3215420	Apr. 27,14	Apr. 27,15
Splitter Agilent 11636B 0025164 Apr. 27,14 Apr. 27,15	Splitter	Agilent	11636B	0025164	Apr. 27,14	Apr. 27,15


4. TEST SET-UP AND OPERATION MODES

4.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

4.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: NETWORK&BLUETOOTH AUDIO SOURCE)

Note:1 By preliminary testing three modulation of EUT transmitted status, it was found that "GFSK" modulation was the worst, then the final test was executed the worst condition and test data were recorded in this report. Test data as below.

Frequency	Axis	Field Strength	Antenna
(MHz)	AXIS	(dBuV/m)	Polarization
2402	GFSK	102.31	VERTICAL
2402	Pi/4DQPSK	101.25	VERTICAL
2402	8-DQPSK	101.78	VERTICAL

4.3. Test Operation Mode and Test Software None.

- 4.4. Special Accessories and Auxiliary Equipment None.
- 4.5. Countermeasures to Achieve EMC Compliance None.

Page 8 of 23

5. EMISSION TEST RESULTS

5.1. Conducted Emission at the Mains Terminals Test

5.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5 0.5-5 5-30	66 to 56 56 60	56 to 46 46 50

5.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

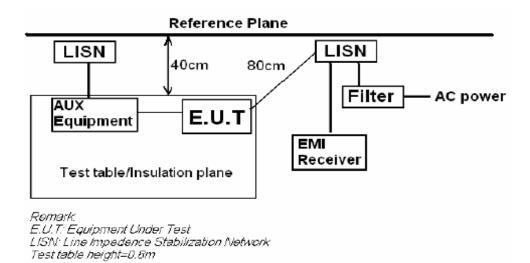

5.1.3. Test Mode

Set EUT in TX mode.

Line

	Freq	Level	Limit Line	10 St 35	Remark
•	MHz	dBuV	dBuV	——dB	
1	0.481	38.52	56.32	-17.80	Peak
2	0.481	48.29	56.32	-8.03	QP
3	0.626	35.83	46.00	-10.17	Average
4	0.626	43.19	56.00	-12.81	QP
5	0.990	36.19	46.00	-9.81	Average
6	0.990	46.76	56.00	-9.24	QP

Neutral

	Freq	Level	Limit Line	Over Limit	Remark
-	MHz	dBuV	dBuV	——dB	-
1	0.279	36.42	50.85	-14.43	Average
2	0.279	47.58	60.85	-13.27	QP
3	0.469	38.56	46.53	-7.97	Average
4	0.469	50.09	56.53	-6.44	QP
5	0.502	37.26	46.00	-8.74	Average
6	0.502	51.28	56.00	-4.72	QP

5.2. Radiated Emission Test

5.2.1. Limit 15.209 limits

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMI	
MHz	Meters	$\mu V/m$	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak)	
		54.0 dB(µV)/m (Average)	

5.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

- 2. Measurement Uncertainty: ±3.2 dB at a level of confidence of 95%.
- 3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- 4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.

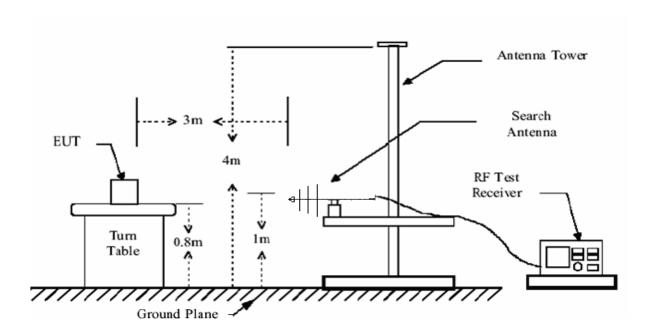

Below 1GHz BT Mode Horizontal polarizations

			Preamp	Read	Cable	Antenna		Limit	Over	
		Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	B	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1		38.89	31.36	39.45	0.56	13.55	22.20	40.00	-17.80	QP
2		135.12	31.19	44.04	1.12	8.35	22.32	43.50	-21.18	QP
3		188.06	31.13	43.75	1.39	10.16	24.17	43.50	-19.33	QP
4		312.29	30.90	39.80	1.94	14.14	24.98	46.00	-21.02	QP
5		642.23	30.77	35.82	3.58	21.37	30.00	46.00	-16.00	QP
6	!	898.06	30.07	41.78	4.84	23.96	40.51	46.00	-5.49	QP

BT Mode Vertical polarizations

			Preamp	Read	Cable.	Antenna		Limit	Over	
		Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
		MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	()
1	!	41.58	31.38	53.88	0.56	12.25	35.31	40.00	-4.69	QP
2		61.23	31.34	48.25	0.75	7.32	24.98	40.00	-15.02	QP
3		113.02	31.29	46.46	1.03	9.06	25.26	43.50	-18.24	QP
4		142.32	31.22	47.77	1.22	8.54	26.31	43.50	-17.19	QP
5		642.03	30.77	37.03	3.58	21.37	31.21	46.00	-14.79	QP
6		899.31	30.06	40.39	4.84	23.99	39.16	46.00	-6.84	QP

Page 13 of 23

Above 1GHz GFSK 2402MHz Horizontal polarizations

		Preamp	Read	Cablei	Antenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.89	7.34	28.72	89.63	94.00	-4.37	Average
2	2402.00	26.32	92.48	7.34	28.72	102.22	114.00	-11.78	Peak
3	4804.00	27.49	31.87	11.96	32.94	49.28	74.00	-24.72	Peak
4	7086.00	27.92	17.87	16.60	37.23	43.78	74.00	-30.22	Peak
5	11846.00	28.98	15.03	17.34	39.56	42.95	74.00	-31.05	Peak
6	14685.00	29.50	13.66	19.80	39.83	43.79	74.00	-30.21	Peak

GFSK 2402MHz Vertical polarizations

		Preamp	Read	Cable	Intenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	-
1	2402.00	26.32	79.84	7.34	28.72	89.58	94.00	-4.42	Average
2	2402.00	26.32	92.57	7.34	28.72	102.31	114.00	-11.69	Peak
3	4804.00	27.49	32.20	11.96	32.94	49.61	74.00	-24.39	Peak
4	12492.00	29.10	15.60	17.79	39.50	43.79	74.00	-30.21	Peak
5	14141.00	29.42	11.26	19.45	42.70	43.99	74.00	-30.01	Peak
6	15926.00	29.69	13.73	20.59	40.04	44.67	74.00	-29.33	Peak

GFSK 2441MHz Horizontal polarizations

		Preamp	Read	Cablei	Antenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.83	7.48	28.76	89.74	94.00	-4.26	Average
2	2441.00	26.33	92.66	7.48	28.76	102.57	114.00	-11.43	Peak
3	4880.00	27.53	32.60	12.14	33.11	50.32	74.00	-23.68	Peak
4	9245.00	28.50	18.40	16.90	37.69	44.49	74.00	-29.51	Peak
5	12152.00	29.03	16.51	17.50	39.43	44.41	74.00	-29.59	Peak
6	14855.00	29.53	16.76	19.91	39.13	46.27	74.00	-27.73	Peak

GFSK 2441MHz Vertical polarizations

		Preamp	Read	Cable.	Antenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	()
1	2441.00	26.33	79.76	7.48	28.76	89.67	94.00	-4.33	Average
2	2441.00	26.33	92.27	7.48	28.76	102.18	114.00	-11.82	Peak
3	4880.00	27.53	31.57	12.14	33.11	49.29	74.00	-24.71	Peak
4	9483.00	28.59	17.92	16.92	37.98	44.23	74.00	-29.77	Peak
5	11370.00	28.94	18.14	17.24	39.79	46.23	74.00	-27.77	Peak
6	14022.00	29.40	13.85	19.38	43.40	47.23	74.00	-26.77	Peak

GFSK 2480MHz Horizontal polarizations

		Preamp	Read	Cable	Antenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	S S 3
1	2480.00	26.34	78.96	7.57	28.79	88.98	94.00	-5.02	Average
2	2480.00	26.34	91.94	7.57	28.79	101.96	114.00	-12.04	Peak
3	4960.00	27.58	31.93	12.36	33.32	50.03	74.00	-23.97	Peak
4	7511.00	28.00	15.37	16.63	37.37	41.37	74.00	-32.63	Peak
5	11217.00	28.92	13.08	17.21	39.67	41.04	74.00	-32.96	Peak
6	14379.00	29.46	11.17	19.61	41.30	42.62	74.00	-31.38	Peak

GFSK 2480MHz Vertical polarizations

		Preamp	Read	Cable	Antenna		Limit	Over	
	Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	·
1	2480.00	26.34	79.62	7.57	28.79	89.64	94.00	-4.36	Average
2	2480.00	26.34	92.05	7.57	28.79	102.07	114.00	-11.93	Peak
3	4960.00	27.58	31.58	12.36	33.32	49.68	74.00	-24.32	Peak
4	9942.00	28.78	16.15	16.96	38.36	42.69	74.00	-31.31	Peak
5	13444.00	29.29	9.72	18.73	42.76	41.92	74.00	-32.08	Peak
6	14532.00	29.48	12.56	19.70	40.46	43.24	74.00	-30.76	Peak

6. 20DB OCCUPY BANDWIDTH

6.1. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.2. Test setup

- 1. Set the RBW =100kHz.
- 2. Set the VBW = 300kHz
- 3. Span=2MHz
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Allow trace to fully stabilize, and view the plot.
- 7. Measure and record the result in the test report.

Test data:

	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
	2402	0.851	Pass
GFSK	2441	0.851	Pass
	2480	0.840	Pass

Test plot as follows:

Page 16 of 23

GFSK






2441 MHz



2480 MHz

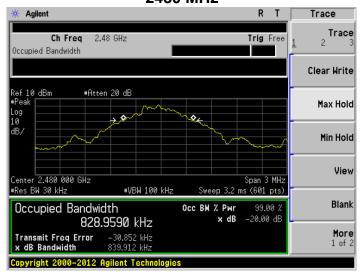

7. BAND EDGE COMPLIANCE TEST

7.1. Limits

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

7.2. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure.

Test plot as follows:

	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)	Band ed (dBu\		Result Pass
	<2400	Н	51.12	74.00	54.00	Pass
Hopping	<2400	V	51.87	74.00	54.00	Pass
Hopping	>2483.5	Н	50.57	74.00	54.00	Pass
	>2483.5	V	50.39	74.00	54.00	Pass
	<2400	Н	51.02	74.00	54.00	Pass
Unhopping	<2400	V	51.23	74.00	54.00	Pass
Cimopping	>2483.5	Н	50.78	74.00	54.00	Pass
	>2483.5	V	50.69	74.00	54.00	Pass

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

8. ANTENNA REQUIREMENTS

8.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2. Result

The antennas used for this product are integral Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only -0.5dBi.

9. PHOTOGRAPHS OF TEST SET-UP

Conducted Emission









10. PHOTOGRAPHS OF THE EUT





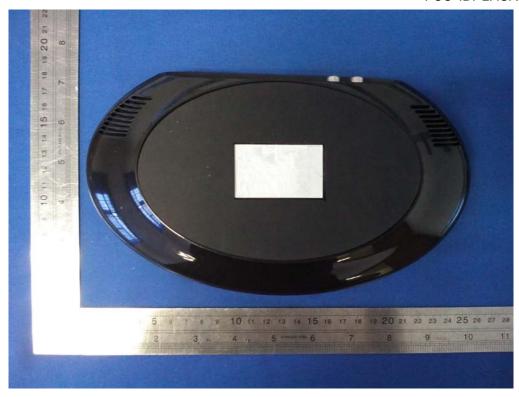

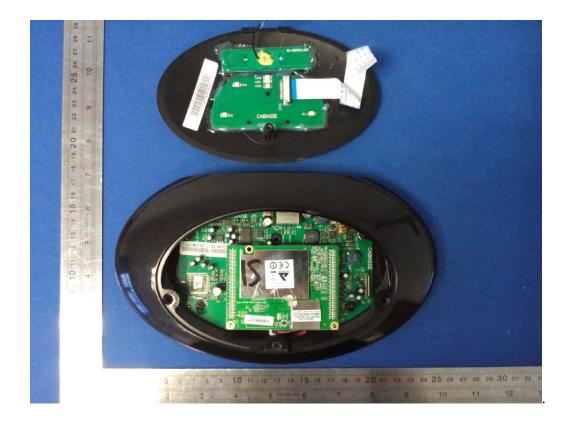

----end-----