EMC TEST REPORT



Report No.: 15070272-FCC-E1
Supersede Report No.: N/A

Applicant	Social Mobile Telecommunications		
Product Name	PHONE		
Model No.	X301		
Serial No.	Wind 3G		
Test Standard	Test Standard FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2014		
Test Date	t Date April 16 to April 27, 2015		
Issue Date	April 28, 2015		
Test Result Pass Fail			
Equipment complied with the specification			
Equipment did not comply with the specification			
Kahn. Yang Chris You			
Kahn Ya Test Engir			

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	15070272-FCC-E1
Page	2 of 27

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	15070272-FCC-E1
Page	3 of 27

This page has been left blank intentionally.



Test Report	15070272-FCC-E1
Page	4 of 27

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
3.1	AC POWER LINE CONDUCTED EMISSIONS	9
6.2	RADIATED EMISSIONS	13
ANI	NEX A. TEST INSTRUMENT	17
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	18
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	23
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	26
ANI	NEX E. DECLARATION OF SIMILARITY	27



Test Report	15070272-FCC-E1
Page	5 of 27

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070272-FCC-E1	NONE	Original	April 28, 2015

2. Customer information

Applicant Name	Social Mobile Telecommunications
Applicant Add	16400 NW 2nd Ave. #201 Miami, Florida 33169
Manufacturer	SMT TELECOMM HK LIMITED
Manufacturer Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES	
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong	
	China 518108	
FCC Test Site No.	718246	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	



Test Report	15070272-FCC-E1
Page	6 of 27

4. Equipment under Test (EUT) Information

Description of EUT: PHONE

Main Model: X301

Serial Model: Wind 3G

Date EUT received: April 15, 2015

Test Date(s): April 16 to April 27, 2015

Equipment Category: JBP

GSM850: 0.8 dBi

PCS1900: -1 dBi

UMTS-FDD Band V: -0.7dBi Antenna Gain:

UMTS-FDD Band II: -0.9dBi

Bluetooth/BLE: -0.5dBi

WIFI: -0.5 dBi

GSM / GPRS: GMSK

EGPRS: GMSK, 8PSK

Type of Modulation: UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RF Operating Frequency (ies):

RX: 1932.4 ~ 1987.6 MHz

WIFI:802.11b/g/n(20M): 2412-2462 MHz WIFI:802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz



Test Report	15070272-FCC-E1
Page	7 of 27

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band II : 277CH Number of Channels:

WIFI:802.11b/g/n(20M): 11CH

WIFI:802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH

Port: Power Port, Earphone Port, USB Port

Battery:

Model: BR1364AQ

Spec: 3.7V 1300mAh 4.81Wh

Input Power: Adapter:

Model: PC X301

Input: AC 100-240V; 50/60Hz 0.15A Max

Output: DC 5.0V; 0.5A

Trade Name: Wind

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2ACLMX301WB



Test Report	15070272-FCC-E1
Page	8 of 27

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2009	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2009	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions				
Test Item	Description	Uncertainty		
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB		
-	-	-		



Test Report	15070272-FCC-E1
Page	9 of 27

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	21°C
Relative Humidity	56%
Atmospheric Pressure	1016mbar
Test date :	April 16, 2015
Tested By :	Kahn Yang

Requirement(s):

Spec	Item	Requirement Applicable				
47CFR§15. 107	a)	For Low-power radio-freconnected to the public voltage that is conducted frequency or frequencies not exceed the limits in [mu] H/50 ohms line im lower limit applies at the				
107		Frequency ranges	Limit (
		(MHz)	QP	Average		
		0.15 ~ 0.5	66 – 56	56 – 46		
		0.5 ~ 5	56	46		
		5 ~ 30 60 50				
Test Setup	Vertical Ground Reference Plane Test Receiver Horizontal Ground					
Procedure	 The EUT and supporting equipment were set up in accordance with the requirements the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to 					
	filtered mains.					



Test Report	15070272-FCC-E1
Page	10 of 27


	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	15070272-FCC-E1
Page	11 of 27

Test Mode 1: USB Mode

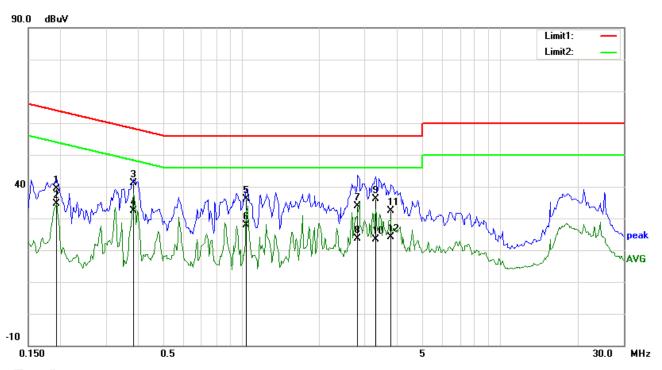

Test Data


Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)	
1	L1	0.1930	26.29	QP	13.04	39.33	63.91	-24.58	
2	L1	0.1930	21.53	AVG	13.04	34.57	53.91	-19.34	
3	L1	0.3844	28.70	QP	12.33	41.03	58.18	-17.15	
4	L1	0.3844	19.99	AVG	12.33	32.32	48.18	-15.86	
5	L1	1.0484	24.85	QP	11.40	36.25	56.00	-19.75	
6	L1	1.0484	16.37	AVG	11.40	27.77	46.00	-18.23	
7	L1	2.8141	22.44	QP	11.40	33.84	56.00	-22.16	
8	L1	2.8141	12.29	AVG	11.40	23.69	46.00	-22.31	
9	L1	3.2969	24.65	QP	11.40	36.05	56.00	-19.95	
10	L1	3.2969	12.03	AVG	11.40	23.43	46.00	-22.57	
11	L1	3.7930	20.87	QP	11.40	32.27	56.00	-23.73	
12	L1	3.7930	12.64	AVG	11.40	24.04	46.00	-21.96	



Test Report	15070272-FCC-E1
Page	12 of 27

Test Mode 1: USB Mode

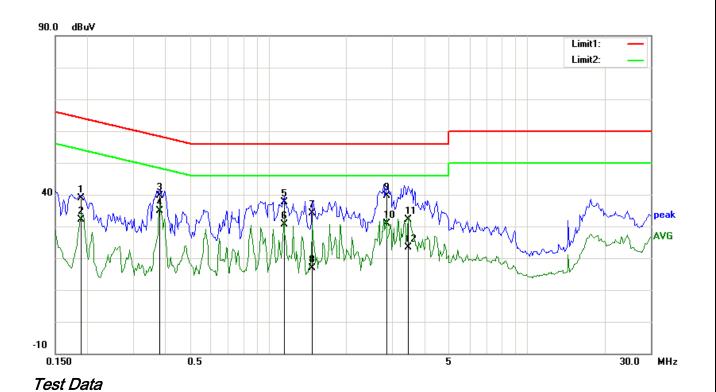

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)	
1	N	0.1891	25.71	QP	13.05	38.76	64.08	-25.32	
2	N	0.1891	19.14	AVG	13.05	32.19	54.08	-21.89	
3	N	0.3805	27.39	QP	12.34	39.73	58.27	-18.54	
4	N	0.3805	22.51	AVG	12.34	34.85	48.27	-13.42	
5	N	1.1500	26.27	QP	11.42	37.69	56.00	-18.31	
6	N	1.1500	19.10	AVG	11.42	30.52	46.00	-15.48	
7	N	1.4781	22.67	QP	11.46	34.13	56.00	-21.87	
8	N	1.4781	5.52	AVG	11.46	16.98	46.00	-29.02	
9	N	2.8687	28.06	QP	11.63	39.69	56.00	-16.31	
10	N	2.8687	19.19	AVG	11.63	30.82	46.00	-15.18	
11	N	3.4688	20.31	QP	11.71	32.02	56.00	-23.98	
12	N	3.4688	11.77	AVG	11.71	23.48	46.00	-22.52	



Test Report	15070272-FCC-E1
Page	13 of 27

6.2 Radiated Emissions

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1017mbar
Test date :	April 17, 2015
Tested By :	Kahn Yang

Requirement(s):

Spec	Item	Requirement		Applicable			
47CFR§15.	a)	Except higher limit as specified else emissions from the low-power radio exceed the field strength levels spe the level of any unwanted emission the fundamental emission. The tigh edges	₹				
107(d)	,	Frequency range (MHz)	Field Strength (µV/m)				
		30 - 88	100				
		88 – 216	150				
		216 960	200				
		Above 960	500				
Test Setup	Ant. Tower Support Units Turn Table Ground Plane Test Receiver						
Procedure	 The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: Vertical or horizontal polarization (whichever gave the higher emission level 						



Test Report	15070272-FCC-E1
Page	14 of 27


		over a full rotation of the EUT) was chosen.
	b.	The EUT was then rotated to the direction that gave the maximum
		emission.
	C.	Finally, the antenna height was adjusted to the height that gave the maximum
		emission.
	3. The	e resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is
	120	kHz for Quasiy Peak detection at frequency below 1GHz.
	4. The	resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video
	baı	ndwidth is 3MHz with Peak detection for Peak measurement at frequency above
	1G	Hz.
	Th	ne resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
	ba	andwidth with Peak detection for Average Measurement as below at frequency
	ak	pove 1GHz.
	•	1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%)
	5. Ste	eps 2 and 3 were repeated for the next frequency point, until all selected frequency
	poi	nts were measured.
Remark		
	▼ Doos	F
Result	Pass	└─ Fail
	1	Fl
Test Data	Yes	N/A
Test Plot	Yes (See I	pelow)



Test Report	15070272-FCC-E1
Page	15 of 27

Test Mode:

Below 1GHz

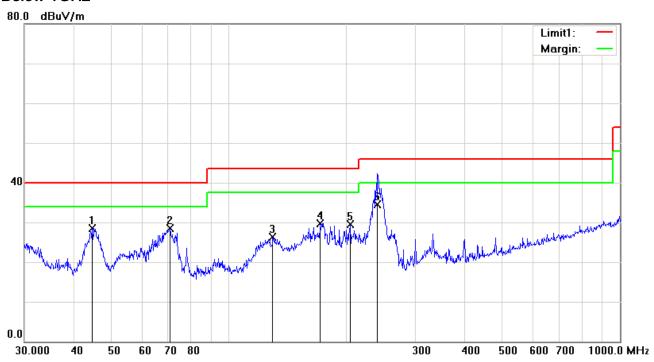

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comme nt
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	Н	44.7434	29.22	peak	-0.71	28.51	40.00	-11.49	200	147	
2	Н	70.8315	42.14	peak	-13.62	28.52	40.00	-11.48	200	158	
3	Н	129.4678	34.24	peak	-7.90	26.34	43.50	-17.16	200	128	
4	Н	171.3926	38.96	peak	-9.21	29.75	43.50	-13.75	100	137	
5	Н	204.2377	38.23	peak	-8.78	29.45	43.50	-14.05	100	130	
6	Н	239.4963	43.51	QP	-9.09	34.42	46.00	-11.58	100	167	


Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.



Test Report	15070272-FCC-E1
Page	16 of 27

Below 1GHz

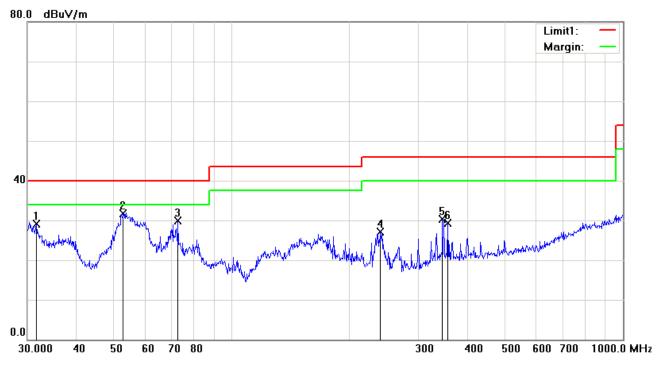

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comme nt
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	V	31.6202	31.46	peak	-2.41	29.05	40.00	-10.95	100	300	
2	V	52.7600	45.86	peak	-14.10	31.76	40.00	-8.24	100	304	
3	V	72.8466	43.58	peak	-13.68	29.90	40.00	-10.10	100	120	
4	٧	239.9873	34.40	peak	-7.30	27.10	46.00	-18.90	100	296	
5	V	345.5952	35.52	peak	-5.25	30.27	46.00	-15.73	100	71	
6	V	356.6758	34.32	peak	-4.93	29.39	46.00	-16.61	100	53	

Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.



Test Report	15070272-FCC-E1
Page	17 of 27

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emis	ssions		,		
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	•
Line Impedance Stabilization Network	LI-125A	191106	09/26/2014	09/25/2015	>
Line Impedance Stabilization Network	LI-125A	191107	09/26/2014	09/25/2015	<u><</u>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	\
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	\
Double Ridge Horn Antenna	AH-118	71259	09/25/2014	09/24/2015	\(\z\)



Test Report	15070272-FCC-E1
Page	18 of 27

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo





Test Report	15070272-FCC-E1	
Page	19 of 27	



EUT - Top View

EUT - Bottom View



EUT - Left View



EUT - Right View





Test Report	15070272-FCC-E1
Page	20 of 27

Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1





Battery - Top View



Battery - Bottom View




Mainborad With Shielding - Front View



Mainborad Without Shielding - Front View




Test Report	15070272-FCC-E1
Page	21 of 27



Mainborad - rear View


LCD - Front View





LCD - Rear View

GSM/PCS/UMTS-FDD Antenna View

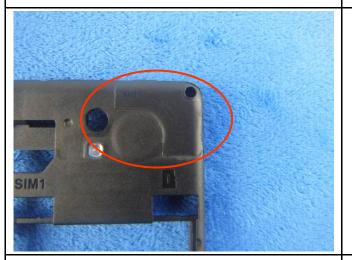

WIFI/BT/BLE - Antenna View



Test Report	15070272-FCC-E1	
Page	22 of 27	


Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup - Front View



Conducted Emissions Test Setup - Side View



Radiated Spurious Emissions Test Setup Below 1GHz



Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	15070272-FCC-E1
Page	23 of 27

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for Conducted Emissions

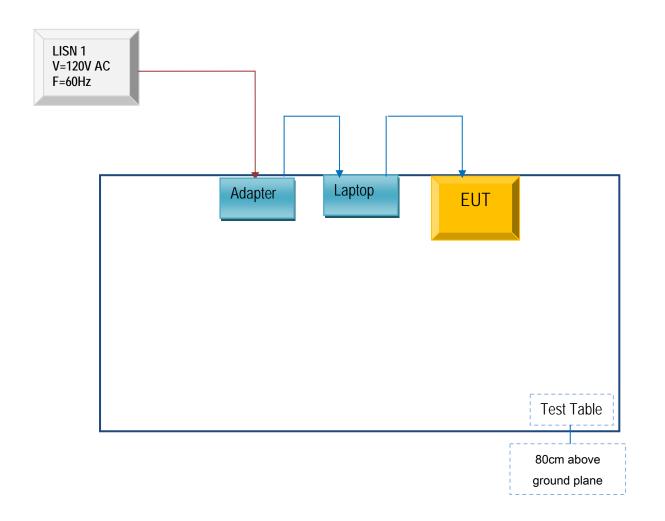



Test Report	15070272-FCC-E1
Page	24 of 27

Block Configuration Diagram for Radiated Emissions

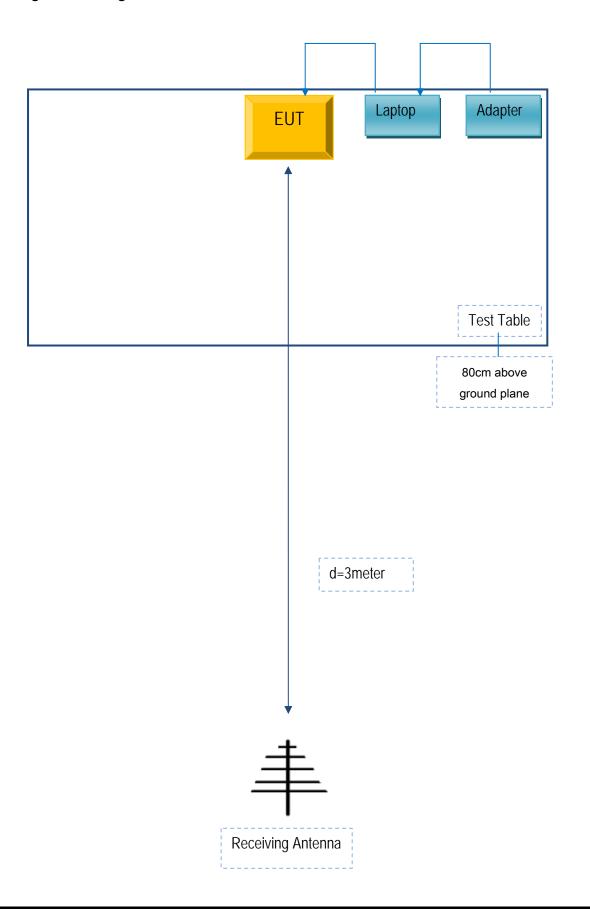



Test Report	15070272-FCC-E1	
Page	25 of 27	

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A



Test Report	15070272-FCC-E1
Page	26 of 27

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment



Test Report	15070272-FCC-E1	
Page	27 of 27	

Annex E. DECLARATION OF SIMILARITY

Social Mobile Telecommunications

To: SIEMIC ,775 Montague Expressway, Milpitas, CA 95035,USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 2 model numbers on the FCC certificates and reports, as following:

Model No.: X301, Wind 3G

We declare that, all the model PCB ,Antenna and Appearance shape , accessories are

the same . The difference of these is listed as below:

Main Model No	Serial Model No	Difference
X301	Wind 3G	Different model name

Thank you!

Signature:

Printed name/title: Freddy Morcos / Manager

Address: 16400 NW 2nd Ave. #201 Miami, Florida 33169