

# Global United Technology Services Co., Ltd.

Report No.: GTSE14030097501

# TEST REPORT

Applicant: Shenzhen Topstar Technology Co., Ltd.

Address of Applicant: Room 2417, Sangda Building, Huafa Road 46, Futian District,

Shenzhen, China

**Equipment Under Test (EUT)** 

Product Name: **OPS Computer** 

Model No.: TOP-H631, TOP-H651, TOP-H632, TOP-H652

FCC ID: 2ACM2TOPH651

FCC CFR Title 47 Part 15 Subpart B:2013 Applicable standards:

Date of sample receipt: June 12, 2014

**Date of Test:** June 13-18, 2014

Date of report issue: June 23, 2014

PASS \* Test Result:

Authorized Signature:

Robinson Lo **Laboratory Manager** 

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



# 2 Version

Version No.	Date	Description
00	June 23, 2014	Original

Prepared By:	Edward.Pan	Date:	June 23, 2014	
	Project Engineer			
Check By:	Hams. Hu	Date:	June 23, 2014	
	Reviewer			



## 3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4		T SUMMARY	
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	6
	5.6	DESCRIPTION OF SUPPORT UNITS	6
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	T INSTRUMENTS LIST	7
7	TES	T RESULTS AND MEASUREMENT DATA	8
	7.1	CONDUCTED EMISSIONS	8
	7.2	RADIATED EMISSION	
8	TES	T SETUP PHOTO	17
9	EUT	CONSTRUCTIONAL DETAILS	19



# 4 Test Summary

Test Item	Section in CFR 47	Result	
Conducted Emission	Part15.107	PASS	
Radiated Emissions	Part15.109	PASS	

PASS: The EUT complies with the essential requirements in the standard.



# **General Information**

### 5.1 Client Information

Applicant:	Shenzhen Topstar Technology Co., Ltd.		
Address of Applicant:	Room 2417,Sangda Building, Huafa Road 46, Futian District, Shenzhen, China		
Manufacturer:	Shenzhen Topstar Technology Co., Ltd.		
Address of Manufacturer:	Room 2417, Sangda Building, Huafa Road 46, Futian District, Shenzhen, China		
Factory:	Shenzhen Dingyu Technology Co., Ltd		
Address of Factory:	3-4/F, Seven Building, Area B, Hekeng Industry Zone, Langkou Road, Longhua Dalang Community, Baoan District, Shenzhen, China		

# 5.2 General Description of EUT

Product Name:	OPS Computer
Model No.:	TOP-H631, TOP-H651, TOP-H632, TOP-H652
Power supply:	Model No.: EXA0904YH
	Input: AC 100-240V, 50-60Hz, 1.5A
	Output: DC 19V, 4.74A

### 5.3 Test mode

Test mode:		
Burning test mode (VGA output)	Keep the EUT in burning test mode with VGA output.	
Burning test mode (HDMI output)	Keep the EUT in burning test mode with HDMI output.	
Test voltage:		
AC 120V/60Hz		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

### • Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

### 5.6 Description of Support Units

-				
Manufacturer	Description	Model	Serial Number	FCC Approval
HP	Printer	CB495A	05257893	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

### 5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

### 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.

Global United Technology Services Co., Ltd.

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,

Shenzhen, China 518102



# 6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 28 2014	Mar. 27 2015	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	Jul. 06 2013	Jul. 05 2014	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	Feb. 23 2014	Feb. 22 2015	
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 28 2013	June 27 2014	
6	RF Amplifier	HP	8347A	GTS204	Jul. 06 2013	Jul. 05 2014	
7	Preamplifier	HP	8349B	GTS206	Jul. 06 2013	Jul. 05 2014	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial cable	GTS	N/A	GTS210	Jul. 06 2013	Jul. 05 2014	
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 06 2013	Jul. 05 2014	
11	Thermo meter	N/A	N/A	GTS256	Jul. 06 2013	Jul. 05 2014	

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2014	
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013	Jul. 01 2014	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 02 2013	Jul. 01 2014	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 02 2013	Jul. 01 2014	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 02 2013	Jul. 01 2014	
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 02 2013	Jul. 01 2014	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 09 2013	July 08 2014

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

Project No.: GTSE140300975RF

Page 7 of 28



# 7 Test Results and Measurement Data

# 7.1 Conducted Emissions


Test Requirement:	FCC Part15 B Section 15.107					
Test Method:	ANSI C63.4:2003	ANSI C63.4:2003				
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, S	weep time=auto				
Limit:		Limit (d	IBuV)			
	Frequency range (MHz)	Frequency range (MHz)  Quasi-peak  Average				
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm					
Test setup:	Reference Plane		•			
Tast procedure:	AUX Equipment  Test table/Insulation plane  Remark E.U.T Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m					
Test procedure:	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment.					
	<ol> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.3 for details, and found the Burning test mode (HDMI output) which is the worst mode, so only the data of worst mode was show on the test report.					
Test results:	Pass					

Shenzhen, China 518102



### **Measurement Data**

### Line:

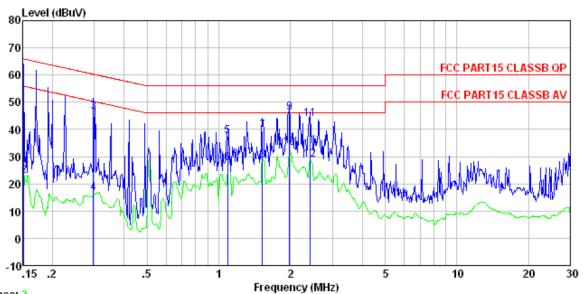

Trace: 2
Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Job No. : 0975RF

Test mode : Burning test mode(HDMI output)


Test Engineer: Qing

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	55.92	0.15	0.12	56.19	65.91		
2 3	0.152	22.65	0.15	0.12	22.92	55.91	-32.99	Average
3	0.297	46.10	0.11	0.10	46.31	60.32	-14.01	QP
4	0.297	16.50	0.11	0.10	16.71	50.32	-33.61	Average
5	1.088	37.25	0.13	0.13	37.51	56.00	-18.49	QP
4 5 6	1.088	27.22	0.13	0.13	27.48	46.00	-18.52	Average
7	1.527	39.16	0.12	0.14	39.42		-16.58	_
8	1.527	28.16	0.12	0.14	28.42	46.00	-17.58	Average
9	1.980	45.91	0.12	0.14	46.17		-9.83	
10	1.980	32.77	0.12	0.14	33.03			Äverage
11	2, 422	43.50	0.13	0.15	43.78		-12.22	
12	2. 422	28.49	0.13	0.15	28.77			Äverage

Shenzhen, China 518102



### Neutral:

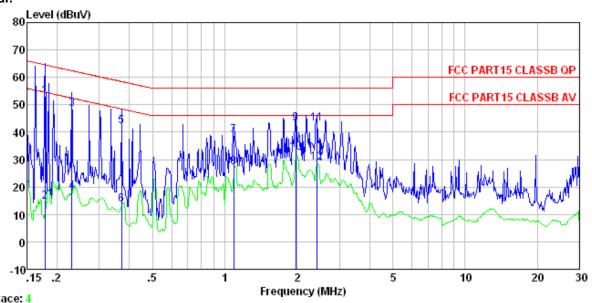

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 0975RF Test mode : Burnin

Test mode : Burning test mode(HDMI output)

Test Engineer: Qing

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	d₿	dBuV	dBuV	dB	
1 2 3 4 5 6	0.179 0.179 0.230 0.230 0.371	52.84 14.49 48.12 18.20 42.12	0.07 0.07 0.06 0.06 0.06	0.13 0.13 0.12 0.12 0.10	53. 04 14. 69 48. 30 18. 38 42. 28	54. 55 62. 44 52. 44 58. 47	-14.14 -34.06 -16.19	Average QP Average QP
8 9	0.371 1.088 1.088 1.970	13.50 38.65 27.15 42.99	0.06 0.08 0.08 0.09	0.10 0.13 0.13 0.14	13.66 38.86 27.36 43.22	56.00 46.00	-17.14	Average
10 11 12	1. 970 2. 422 2. 422	32. 20 42. 83 28. 48	0.09 0.10 0.10	0.14 0.15 0.15	32. 43 43. 08 28. 73	46.00 56.00	-13.57 -12.92	Average

### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss


Shenzhen, China 518102



# 7.2 Radiated Emission

Test Requirement:	FCC Part15 B S	Section 15.10	9							
Test Method:	ANSI C63.4:2003									
Test Frequency Range:	30MHz to 6GHz	30MHz to 6GHz								
Test site:	Measurement D	Distance: 3m	(Semi-Anecho	ic Chambe	r)					
Receiver setup:				1						
	Frequency	Detector	RBW	VBW	Remark					
	30MHz- 1GHz	Quasi-peal	k 120kHz	300kHz	Quasi-peak Value					
		Peak	1MHz	3MHz	Peak Value					
	Above 1GHz	Peak	1MHz	10Hz	Average Value					
Limit:					1					
	Freque	ency	Limit (dBuV	/m @3m)	Remark					
	30MHz-8	8MHz	40.0	0	Quasi-peak Value					
	88MHz-2	88MHz-216MHz		0	Quasi-peak Value					
	216MHz-9	60MHz	46.0	0	Quasi-peak Value					
	960MHz-	·1GHz	54.0	0	Quasi-peak Value					
	Ahove 1	GH <sub>7</sub>	54.0	0	Average Value					
	Above	OFIZ	74.0	0	Peak Value					
Test Procedure:	Above 1GHz									
	measuremer	nt.			are set to make the led to its worst case					
	and then the	antenna was table was tur	tuned to heig	hts from 1	meter to 4 meters 0 degrees to find the					
	5. The test-rece Bandwidth w			ak Detect F	unction and Specified					
	limit specified EUT would b 10dB margin	d, then testing e reported. C would be re-	g could be sto Otherwise the	pped and the missions the one using	10dB lower than the ne peak values of the hat did not have peak, quasi-peak or a data sheet.					
Test setup:	Below 1GHz									



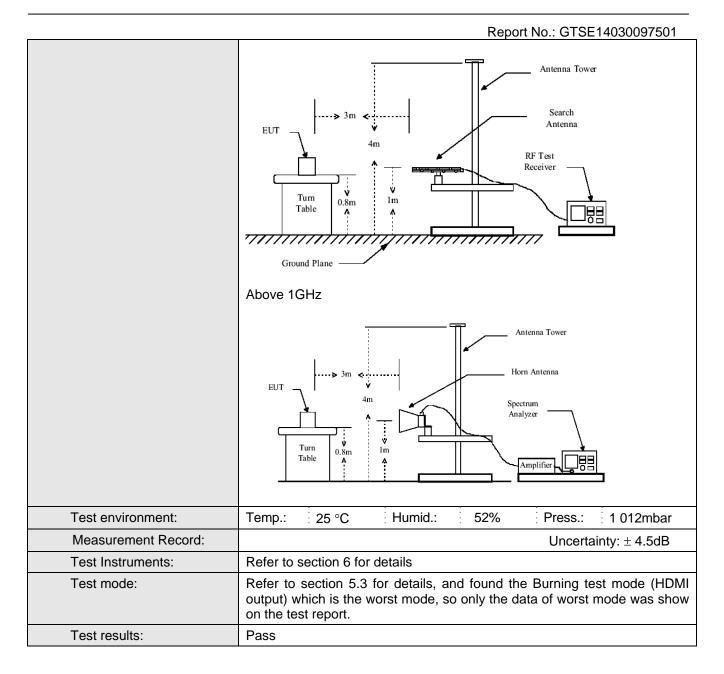

#### Note.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



### **Measurement Data**

Below 1GHz

Horizontal:

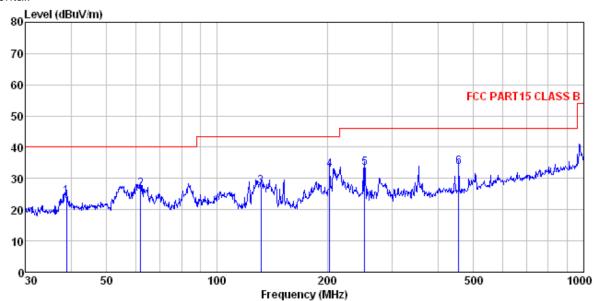


: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL : 975RF Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163
Job No. : 975RF
Test Mode : Burning test mode(HDMI output)
Test Engineer: Bing

551	Freq	Read	Antenna Factor					Over Limit	Remark
	MHz	dBu∇	<u>dB</u> /m	<u>dB</u>	<u>d</u> B	dBuV/m	dBuV/m	<u>d</u> B	
1 2 3 4 5 6	61.995 131.758	47.16 50.48 49.40	10.82 12.64 14.06	1.45 1.86 2.14	31.93 31.91 32.14 32.16	24. 29 26. 69 27. 52 32. 84 33. 44 33. 66	40.00 43.50 43.50 46.00	-13.31 -15.98 -10.66 -12.56	QP QP QP QP



### Vertical:

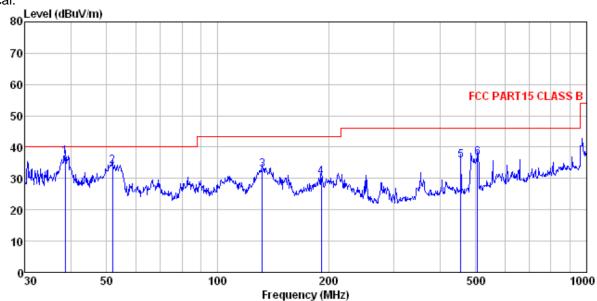

Site

: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL Condition

Job No. Test Mode : 975RF


: Burning test mode(HDMI output)

lest	Engineer:	Ding							
		Read	Antenna	Cable	Preamp		Limit	0ver	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
						JB_777	75-77-		
	MHz	dBu∀	αD/ π	dВ	Ф	abuv/m	dBuV/m	dВ	
1	38.616	52.99	15.25	0.65	32.06	36.83	40.00	-3.17	QP
2	51.843	50.00	15.16	0.79	31.96	33.99	40.00	-6.01	QP
3	132.221	52.37	10.77	1.45	31.91	32.68	43.50	-10.82	QP
4	191.074	48.10	12.56	1.80	32.11	30.35	43.50	-13.15	QP
5	455.906	46.77	17.58	3.11	31.70	35.76	46.00	-10.24	QP
6	506.479	46.07	18.74	3.33	31.53	36.61	46.00	-9.39	QP



### Above 1GHz

### Horizontal:

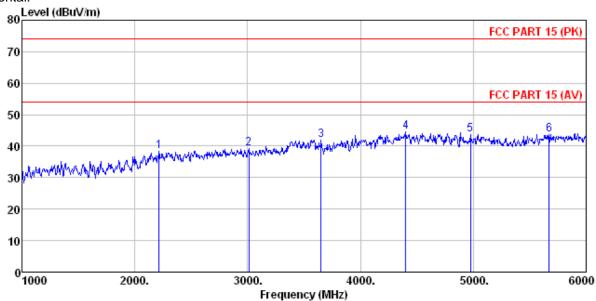

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition


: 975RF Job No.

: Burning test mode(HDMI output) Test Mode Test Engir

est	rugineer:	_			_				
		Read	Antenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∜	<u>d</u> B/m	āB	<u>d</u> B	dBuV/m	dBuV/m	aB	
1	2215.000	39.57	27.98	5.20	34.23	38.52	74.00	-35.48	Peak
2	3010.000	38.16	28.50	5.94	33.31	39.29	74.00	-34.71	Peak
3	3650.000	38.13	29.19	7.25	32.58	41.99	74.00	-32.01	Peak
4	4400.000	37.18	31.09	8.25	31.89	44.63	74.00	-29.37	Peak
5	4975.000	35.29	31.94	8.74	32.17	43.80	74.00	-30.20	Peak
6	5670.000	33.86	32.44	9.74	32.33	43.71	74.00	-30.29	Peak



### Vertical:

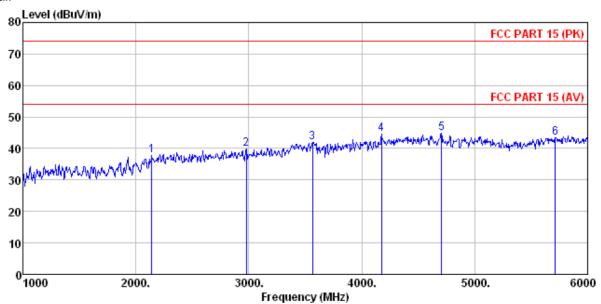

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL Condition

Job No.

Test Mode : Burning test mode(HDMI output)

Test Engineer: Bing


	Frea	Read/	Antenna Factor					Over Limit	Remark	
	MHz	dBu∀			<u>d</u> B					
1	2140.000		27.46		34.30					
2 3	2980.000 3565.000									
4 5			30.14 31.66		31.98 32.04					
6	5715.000	33.41	32.50	9.81	32.30	43.42	74.00	-30.58	Peak	



# 8 Test Setup Photo

Radiated Emission



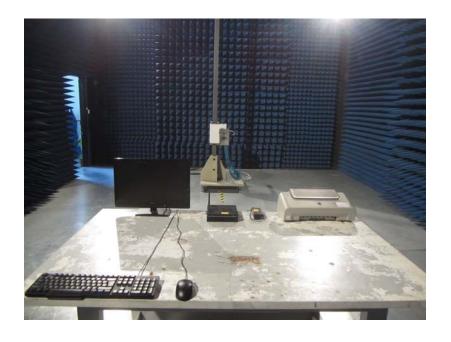



### Conducted Emission






# 9 EUT Constructional Details







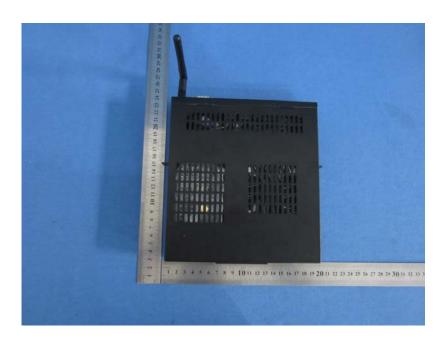




















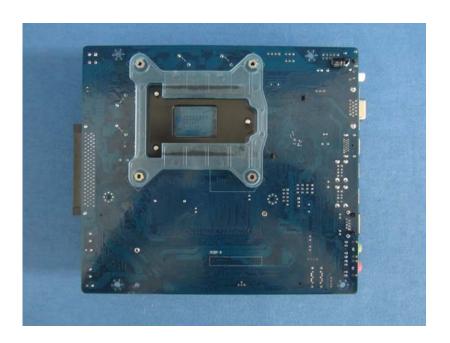





























----- End-----