

# FCC SAR

## Measurement and Test Report

For

**Lanco Global Systems (Caribbean), Inc**

**PO Box 191771 San Juan, PR**

**FCC ID: 2ACMXINDIPAD9G**

<b>FCC Rules:</b>	FCC 47 CFR Part 2 (2.1093) ANSI/IEEE C95.1-1992 IEEE 1528-2003 KDB 865664 D01 v01r03 <u>KDB 865664 D02 v01r01</u>
<b>Product Description:</b>	<u>Tablet PC</u>
<b>Tested Model:</b>	<u>INDIPAD9G</u>
<b>Report No.:</b>	<u>STR14068303H</u>
<b>Tested Date:</b>	<u>2014-07-10 to 2014-07-14</u>
<b>Issued Date:</b>	<u>2014-07-14</u>
<b>Tested By:</b>	<u>Silin Chen / Engineer</u> <i>Silin chen</i>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	
<p><b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn</p>	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. General Information .....</b>	<b>3</b>
1.1 Product Description for Equipment Under Test (EUT).....	3
1.2 Test Standards .....	5
1.3 Test Methodology.....	5
1.4 Test Facility .....	5
<b>2. Summary of Test Results .....</b>	<b>6</b>
<b>3. Specific Absorption Rate (SAR).....</b>	<b>7</b>
3.1 Introduction.....	7
3.2 SAR Definition .....	7
<b>4. SAR Measurement System.....</b>	<b>8</b>
4.1 The Measurement System .....	8
4.2 Probe.....	8
4.3 Probe Calibration Process.....	10
4.4 Phantom .....	11
4.5 Device Holder.....	11
4.6 Test Equipment List.....	12
<b>5. Tissue Simulating Liquids.....</b>	<b>13</b>
5.1 Composition of Tissue Simulating Liquid.....	13
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	14
5.3 Tissue Calibration Result.....	15
<b>6. SAR Measurement Evaluation .....</b>	<b>16</b>
6.1 Purpose of System Performance Check.....	16
6.2 System Setup .....	16
6.3 Validation Results.....	17
<b>7. EUT Testing Position .....</b>	<b>18</b>
7.1 Body Position .....	18
7.2 EUT Antenna Position .....	18
7.3 EUT Testing Position.....	19
<b>8. SAR Measurement Procedures.....</b>	<b>20</b>
8.1 Measurement Procedures .....	20
8.2 Spatial Peak SAR Evaluation .....	20
8.3 Area & Zoom Scan Procedures.....	21
8.4 Volume Scan Procedures.....	21
8.5 SAR Averaged Methods .....	21
8.6 Power Drift Monitoring.....	21
<b>9. SAR Test Result .....</b>	<b>22</b>
9.1 Conducted RF Output Power .....	22
9.2 Test Results for Standalone SAR Test.....	25
9.3 Simultaneous Multi-band Transmission SAR Analysis .....	27
<b>10. Measurement Uncertainty .....</b>	<b>31</b>
10.1 Uncertainty for EUT SAR Test.....	31
10.2 Uncertainty for System Performance Check.....	32
<b>Annex A. Plots of System Performance Check .....</b>	<b>34</b>
<b>Annex B. Plots of SAR Measurement .....</b>	<b>40</b>
<b>Annex C. EUT Photos .....</b>	<b>82</b>
<b>Annex D. Test Setup Photos .....</b>	<b>84</b>
<b>Annex E. Calibration Certificate.....</b>	<b>87</b>

## 1. General Information

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Lanco Global Systems (Caribbean), Inc  
 Address of applicant: PO Box 191771 San Juan, PR

Manufacturer: Shenzhen Alldocube Technology and Science Co., ltd  
 Address of manufacturer: 4F 17Building PingShan Industrial park LiuXian Road, XiLi Town ShenZhen China

General Description of EUT	
Product Name:	Tablet PC
Brand Name:	e-jam
Model No.:	INDIPAD9G
Adding Mode:	/
Software Version:	0502HP31_V1.03
Hardware Version:	QP78_MAIN_PCBV1.1
IMEI:	86283020330934
Rated Voltage:	DC 3.7V Battery
Power Adaptor:	FJ-SW0502000UU
	Input 100-240V, 50/60Hz, Output DC 5V
Device Category:	Portable Device
<p><i>The EUT is GSM850/900/DCS1800/PCS1900, WCDMA Band V, Entertainment Tablet. the Entertainment Tablet is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, and camera functions. For more information see the following datasheet</i></p> <p><i>The test data is gathered from a production sample, provided by the manufacturer.</i></p>	

Technical Characteristics of EUT	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz
	GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz
	GSM/GPRS/EDGE 1900: 1930~1990MHz
RF Output Power:	GSM850: 33.15dBm, GSM1900: 30.41dBm
Type of Modulation:	GMSK, 8PSK

Antenna Type:	Internal Antenna
Antenna Gain:	GSM850: 0dBi GSM1900: 0dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA
Support Band:	WCDMA Band V
Uplink Frequency:	WCDMA Band V: 824~849MHz
Downlink Frequency:	WCDMA Band V: 869~894MHz
RF Output Power:	WCDMA850: 22.83dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	0dBi
<b>WIFI</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2472MHz for 11b/g/n(HT20) 2422-2462MHz for 11n(HT40)
RF Output Power:	15.77dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	13 for 11b/g/n(HT20), 9 for 11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Internal Antenna
Antenna Gain:	-1.0dBi
<b>Bluetooth</b>	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
RF Output Power:	4.696dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Type of Antenna:	Internal Antenna
Antenna Gain:	-1.0dBi

## 1.2 Test Standards

The following report is prepared on behalf of the Lanco Global Systems (Caribbean), Inc in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-1992, IEEE 1528-2003 and KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01. The public notice KDB 447498 D01 v05r02 for Mobile and Portable Devices RF Exposure Procedure also.

## 1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

## 2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Position	SAR <sub>1g</sub> (W/kg)	Scaled SAR <sub>1g</sub> (W/kg)
GSM850	Body-worn (0mm Gap)	0.2667	0.2891
GSM1900	Body-worn (0mm Gap)	0.3126	<b>0.3191</b>
WCDMA Band V	Body-worn (0mm Gap)	0.2054	0.2136
WLAN 2.4GHz	Body-worn (0mm Gap)	0.0916	0.0966
GSM850	Hotspot (0mm Gap)	0.5616	<b>0.5720</b>
GSM1900	Hotspot (0mm Gap)	0.4615	0.5060
WCDMA Band V	Hotspot (0mm Gap)	0.2076	0.2159
WLAN 2.4GHz	Hotspot (0mm Gap)	0.0827	0.0872
GSM850 & WLAN 2.4GHz	Body-worn (0mm Gap)	--	0.3857
GSM1900 & WLAN 2.4GHz	Body-worn (0mm Gap)	--	0.4157
WCDMA Band V & WLAN 2.4GHz	Body-worn (0mm Gap)	--	0.3102
GSM850 & WLAN 2.4GHz	Hotspot (0mm Gap)	--	<b>0.6592</b>
GSM1900 & WLAN 2.4GHz	Hotspot (0mm Gap)	--	0.5932
WCDMA Band V & WLAN 2.4GHz	Hotspot (0mm Gap)	--	0.3031

*The highest reported SAR values for body-worn accessory, product specific (wireless router), and simultaneous transmission conditions are **0.32W/kg, 0.57W/kg, and 0.66W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2003 and KDB 865664 D01 v01r03 and KDB 865664 D02 v01r01

### 3. Specific Absorption Rate (SAR)

---

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR Measurement System

---

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm



- Probe linearity: <0.25 dB
  - Axial Isotropy: <0.25 dB
  - Spherical Isotropy: <0.50 dB
  - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

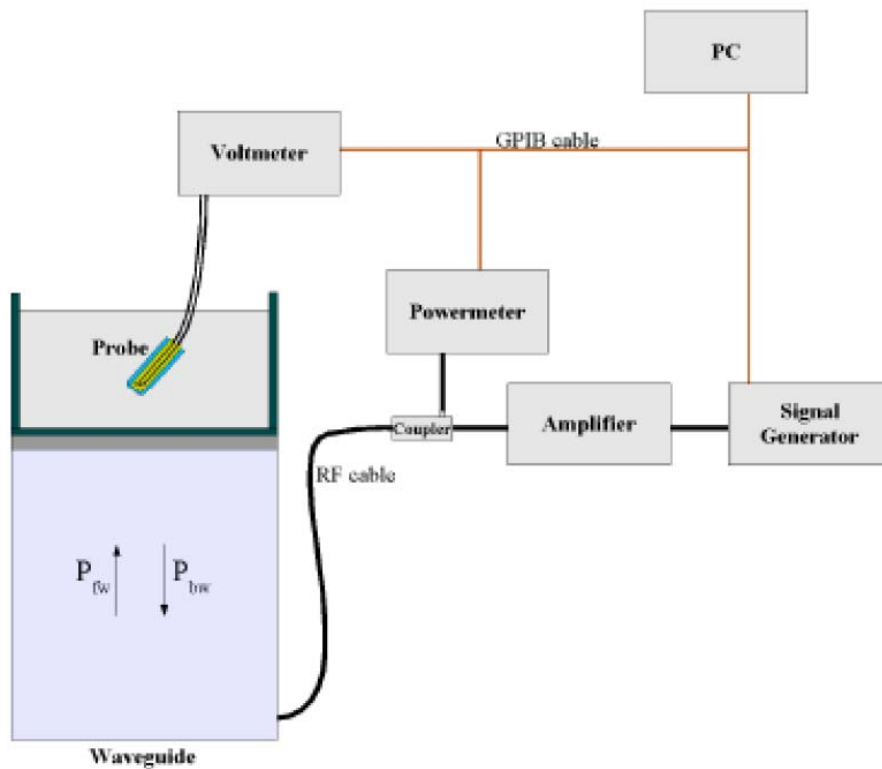

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

a and b = Waveguide dimensions

$\delta$  = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|\mathbf{E}|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

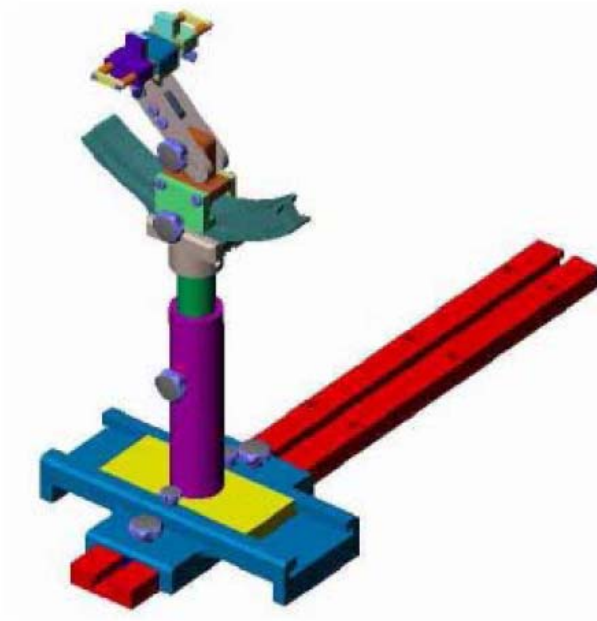

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

#### 4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	SATIMO	SSE5	SN 09/13 EP168	2014-03-21	2015-03-20
835MHz Dipole	SATIMO	SID835	SN 47/12 DIP 0G835-204	2013-11-26	2014-11-25
1900MHz Dipole	SATIMO	SID1900	SN 47/12 DIP 1G900-207	2013-11-26	2014-11-25
2450MHz Dipole	SATIMO	SID2450	SN 47/12 DIP 2G450-209	2013-11-26	2014-11-25
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2013-11-26	2014-11-25
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2014-05-28	2015-05-27
Signal Generator	Rohde & Schwarz	SMR20	100047	2014-05-28	2015-05-27
Universal Tester	Rohde & Schwarz	CMU200	112012	2014-05-28	2015-05-27
Network Analyzer	HP	8753C	2901A00831	2014-05-28	2015-05-27


## 5. Tissue Simulating Liquids

### 5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



**Liquid Height for Head SAR**

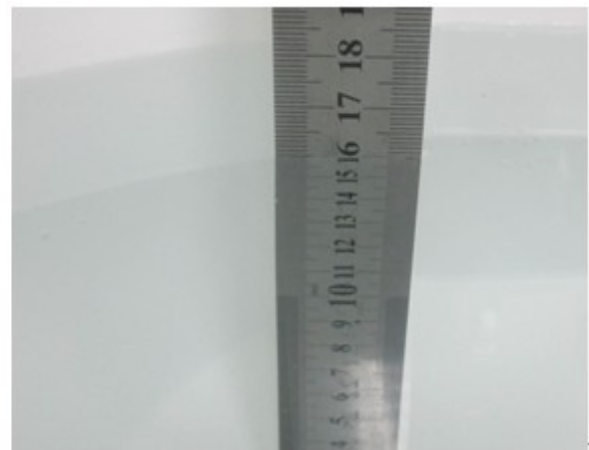

**Liquid Height for Body SAR**

#### The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Triton (%)	HEC (%)	Preventol (%)	DGBE (%)
<b>Body</b>						
835	52.87	1.07	0.00	0.00	46.10	0.00
1900	69.99	0.41	20.66	0.00	0.00	8.93
2450	55.44	0.32	30.50	0.00	0.00	13.74

## 5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
<b>835</b>	<b>0.90</b>	<b>41.5</b>	<b>0.97</b>	<b>55.2</b>
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
<b>1800-2000</b>	<b>1.40</b>	<b>40.0</b>	<b>1.52</b>	<b>53.3</b>
<b>2450</b>	<b>1.80</b>	<b>39.2</b>	<b>1.95</b>	<b>52.7</b>
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2

### 5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

#### Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading ( $\sigma$ )	Target ( $\sigma$ )	Delta (%)	Reading ( $\epsilon_r$ )	Target ( $\epsilon_r$ )	Delta (%)		
835	21.2	0.95	0.97	-2.06	54.0	55.2	-2.17	±5	2014-07-10
1900	21.3	1.50	1.52	-1.32	51.3	53.3	-3.75	±5	2014-07-10
2450	21.3	1.90	1.95	-2.56	50.2	52.7	-4.74	±5	2014-07-10


## 6. SAR Measurement Evaluation

### 6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

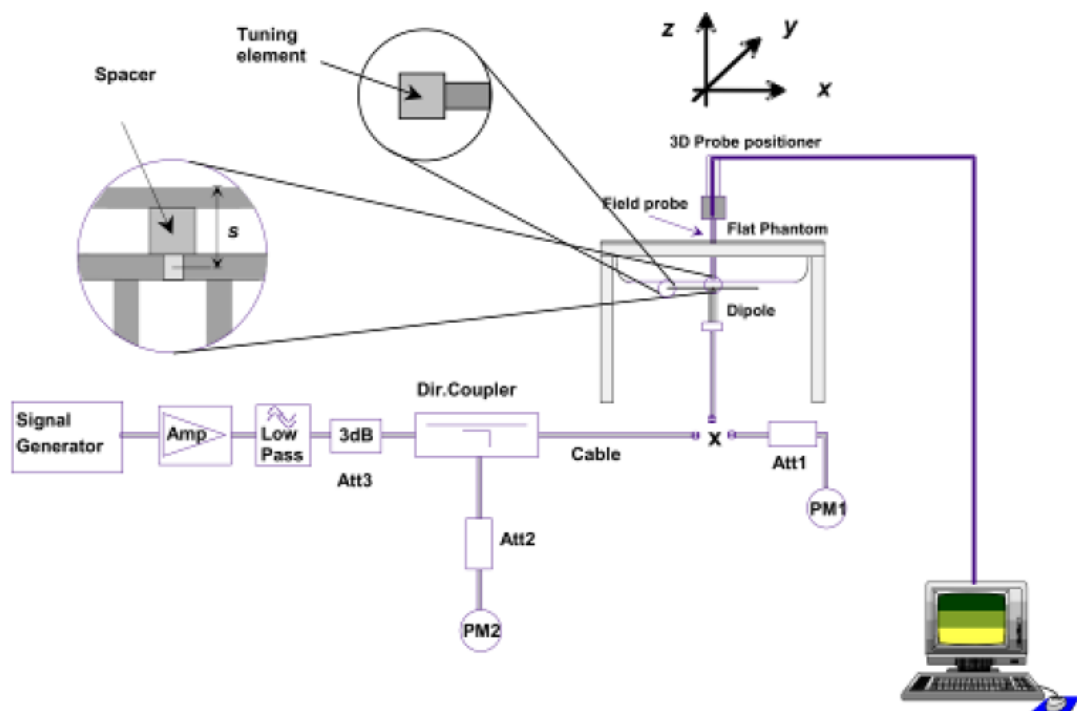

System Verification Setup Block Diagram





**Setup Photo of Dipole Antenna**

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

### 6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the targeted SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR <sub>1g</sub>	Measured SAR <sub>1g</sub>	Normalized SAR <sub>1g</sub>	Tolerance
MHz	(W/kg)	(W/kg)	(W/kg)	(%)
Body				
835	10.19	2.51	10.05	-1.37
1900	40.41	9.74	38.94	-3.64
2450	51.80	12.15	48.60	-6.18

**Targeted and Measurement SAR**

*Please refer to Annex A for the plots of system performance check.*

## 7. EUT Testing Position

### 7.1 Body Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 0mm.


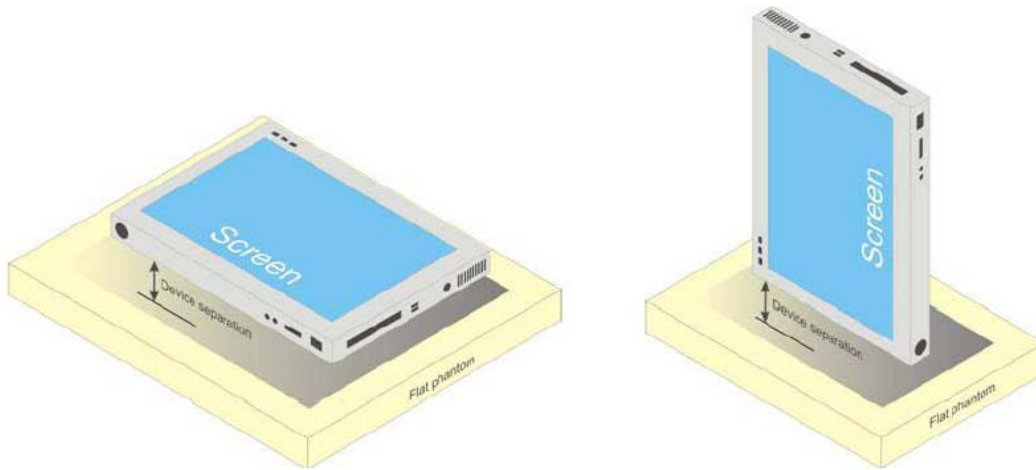


Illustration for Body Position

### 7.2 EUT Antenna Position

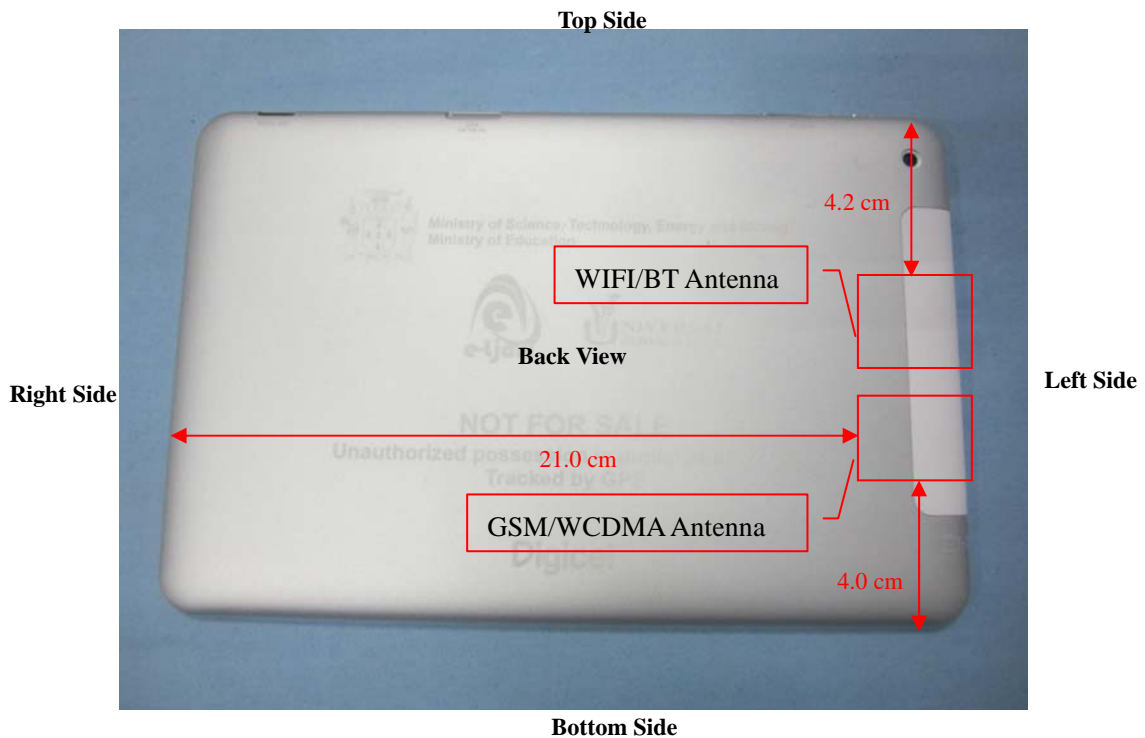

Block Diagram for EUT Antenna Position

### 7.3 EUT Testing Position

Exclusion Distance Calculation				
Frequency Bands	Service	Maximum Tune-up Power	Average Power	Exclusion Distance
GSM850	GSM	33.5dBm	24.5dBm	80mm
GPRS850	GPRS(4slots)	30.0dBm	27.0dBm	120mm
GSM1900	GSM	30.5dBm	21.5dBm	60mm
GPRS1900	GPRS(4slots)	25.5dBm	22.5dBm	60mm
WCDMA Band V	RMC 12.2k	23.0dBm	23.0dBm	60mm
WLAN	802.11b	16.0dBm	16.0dBm	25mm

Note: Refer to Chapter 9.1 Conducted RF Output Power

**Remark:**

- Referring to KDB 447498 D01 v05r02 and KDB616217 D04 v01r01, the distance of the antennas to all adjacent edges SAR test exclusion for adjacent edges.

Head/Body-worn/Hotspot mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Hotspot SAR tests, Test distance: 0mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	No	Yes	No	Yes	No	Yes
WLAN	No	Yes	No	Yes	Yes	No

Body-worn SAR tests, Test distance: 0mm		
Antennas	Front	Back
WWAN	Yes	Yes
WLAN	Yes	Yes

**Remark:**

- Referring to KDB 616217 D04 v01r01, KDB 248227 D01 v01r02 and KDB 447498 D01 v05r02, this device is a overall diagonal dimension(>20cm) tablet, tested in direct contact (no gap) with flat phantom.

**Please refer to Annex D for the EUT test setup photos.**

---

## 8. SAR Measurement Procedures

---

### 8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex E demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### 8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 9. SAR Test Result

### 9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.15	33.13	33.13	30.24	30.41	30.29
GPRS (1 slot)	32.4	32.37	32.36	28.65	28.72	28.61
GPRS (2 slots)	31.36	31.44	31.42	27.61	27.71	27.66
GPRS (3 slots)	30.74	30.65	30.67	25.9	25.9	25.93
GPRS (4 slots)	29.89	29.92	29.86	25.06	25.1	25.09
EDGE (1 slots)	27.39	26.99	26.72	25.47	25.32	24.87
EDGE (2 slots)	26.17	25.77	25.47	24.63	24.35	23.92
EDGE (3 slots)	24.04	23.72	23.37	22.63	22.37	21.93
EDGE (4 slots)	22.84	22.57	22.16	21.59	21.21	20.59

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	24.15	24.13	24.13	21.24	21.41	21.29
GPRS (1 slot)	23.40	23.37	23.36	19.65	19.72	19.61
GPRS (2 slots)	25.36	25.44	25.42	21.61	21.71	21.66
GPRS (3 slots)	26.49	26.40	26.42	21.65	21.65	21.68
GPRS (4 slots)	26.89	26.92	26.86	22.06	22.10	22.09
EDGE (1 slots)	18.39	17.99	17.72	16.47	16.32	15.87
EDGE (2 slots)	20.17	19.77	19.47	18.63	18.35	17.92
EDGE (3 slots)	19.79	19.47	19.12	18.38	18.12	17.68
EDGE (4 slots)	19.84	19.57	19.16	18.59	18.21	17.59

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

#### Remark:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850 and GSM1900 due to its highest source-based time-average power.
3. Per KDB 447498 D01 v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.

WCDMA - Average Power (dBm)						
Band	WCDMA Band V					
Channel	4132	4183	4233			
Frequency (MHz)	826.4	836.6	846.6			
RMC 12.2k	22.80	22.83	22.61			
HSDPA Subtest-1	21.92	22.10	21.69			
HSDPA Subtest-2	21.42	21.32	21.45			
HSDPA Subtest-3	21.05	21.00	20.95			
HSDPA Subtest-4	20.96	20.68	20.45			
HSUPA Subtest-1	21.95	22.06	21.67			
HSUPA Subtest-2	21.26	21.13	21.02			
HSUPA Subtest-3	21.19	21.11	21.02			
HSUPA Subtest-4	20.65	20.45	20.33			
HSUPA Subtest-5	20.33	20.28	20.14			

**Remark:**

1. For Head SAR, per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
2. For Body SAR, per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 and HSUPA subset-1 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is  $\cong 1.2W/kg$ , HSDPA and HSUPA SAR evaluation can be excluded.

WLAN - Maximum Average Power				
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)
802.11b	1Mbps	CH 01	2412	14.61
		CH 07	2442	15.38
		CH 13	2472	15.77
802.11g	54Mbps	CH 01	2412	12.35
		CH 07	2442	13.25
		CH 13	2472	13.85
802.11n (20MHz)	MCS7	CH 01	2412	12.42
		CH 07	2442	13.26
		CH 13	2472	13.75
802.11n (40MHz)	MCS7	CH 03	2422	10.65
		CH 07	2442	11.17
		CH 11	2462	11.57

**Remark:**

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Per KDB 248227 D01 v01r02, if 11g and 11n average output power is higher than 1/4 dB higher than 11b mode, SAR will be verified.
3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate. For 802.11n mode, SAR test according to the highest power channel with correspondence data rates.

Bluetooth - Maximum Average Power				
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)
GFSK	1Mbps	CH 00	2402	4.696
		CH 39	2441	4.557
		CH 78	2480	3.178
8DPSK	3Mbps	CH 00	2402	4.540
		CH 39	2441	4.363
		CH 78	2480	2.973
BLE	1Mbps	CH 00	2402	-2.876
		CH 19	2442	-3.031
		CH 39	2480	-4.379

**Remark:**

Bluetooth maximum output power (including tune-up tolerance) is 6.0dBm. Per KDB 648474 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, 16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation<sup>17</sup>
- The result is rounded to one decimal place for comparison

Max. Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
4.696	2.95	5	2.402	0.91	3

The exclusion thresholds is  $0.91 < 3$ , therefore, the RF exposure evaluation is not required.



## 9.2 Test Results for Standalone SAR Test

### Body-worn SAR

GSM850 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1	GSM	Back	128	824.2	33.15	33.5	1.08	0.2667	0.2891
2	GSM	Front	128	824.2	33.15	33.5	1.08	0.2371	0.2570

GSM1900 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
6	GSM	Back	661	1880.0	30.41	30.5	1.02	0.3126	0.3191
7	GSM	Front	661	1880.0	30.41	30.5	1.02	0.1728	0.1764

WCDMA Band V – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
14	RMC 12.2k	Back	4182	836.4	22.83	23.0	1.04	0.2054	0.2136
15	RMC 12.2k	Front	4182	836.4	22.83	23.0	1.04	0.1613	0.1677

WLAN 2.4GHz –Body SAR Test(Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
19	802.11b	Back	13	2472	15.77	16.0	1.05	0.0916	0.0966
20	802.11b	Front	13	2472	15.77	16.0	1.05	0.0858	0.0905

#### Remark:

1. Per KDB 447498 D01 v05r02, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.
2. The Body-worn SAR for the back device with headset position is worst case and was reported.

**Hotspot SAR**

<b>GSM850 – Body SAR Test (Gap: 0mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
3	GPRS_4TX	Back	190	836.6	29.92	30.0	1.02	0.5616	0.5720
4	GPRS_4TX	Bottom side	190	836.6	29.92	30.0	1.02	0.0799	0.0814
5	GPRS_4TX	Left side	190	836.6	29.92	30.0	1.02	0.4243	0.4322

<b>GSM1900 – Body SAR Test (Gap: 0mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
8	GPRS_4TX	Back	661	1880.0	25.10	25.5	1.10	0.4615	0.5060
9	GPRS_4TX	Bottom side	661	1880.0	25.10	25.5	1.10	0.0815	0.0894
10	GPRS_4TX	Left side	661	1880.0	25.10	25.5	1.10	0.2304	0.2526

<b>WCDMA Band V – Body SAR Test (Gap: 0mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
11	RMC 12.2k	Back	4182	836.4	22.83	23.0	1.04	0.2076	0.2159
12	RMC 12.2k	Bottom side	4182	836.4	22.83	23.0	1.04	0.0457	0.0475
13	RMC 12.2k	Left side	4182	836.4	22.83	23.0	1.04	0.1681	0.1748

<b>WLAN 2.4GHz –Body SAR Test(Gap: 0mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
16	802.11b	Back	13	2472	15.77	16.0	1.05	0.0827	0.0872
17	802.11b	Top Side	13	2472	15.77	16.0	1.05	0.0272	0.0287
18	802.11b	Right side	13	2472	15.77	16.0	1.05	0.0148	0.0156

**Remark:** Per KDB 447498 D01 v05r02, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### 9.3 Simultaneous Multi-band Transmission SAR Analysis

#### List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body-worn SAR	Hotspot SAR
1	GSM + WLAN	-	Yes	-
2	GPRS + WLAN	-	-	Yes
3	WCDMA + WLAN	-	Yes	-
4	HSUPA + WLAN	-	-	Yes
5	HSDPA + WLAN	-	-	Yes
6	GSM + Bluetooth	-	Yes	-
7	GPRS + Bluetooth	-	-	Yes
8	WCDMA + Bluetooth	-	Yes	-
9	HSUPA + Bluetooth	-	-	Yes
10	HSDPA + Bluetooth	-	-	Yes

#### Remark:

- GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- According to the KDB 447498 D01v05r02, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:  

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$$
for test separation distances  $\leq 50$  mm;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.  
For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 as below:
- The maximum SAR summation is calculated based on the same configuration and test position. If 1g-SAR scalar summation  $< 1.6\text{W/kg}$ , simultaneous SAR measurement is not necessary.

**Body-worn SAR****WWAN and WLAN**

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.2891	0.0966	0.3857
Front	GSM850	0.2570	0.0905	0.3475
Back	GSM1900	0.3191	0.0966	0.4157
Front	GSM1900	0.1764	0.0905	0.2669
Back	WCDMA Band V	0.2136	0.0966	0.3102
Front	WCDMA Band V	0.1677	0.0905	0.2582

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.4492	0.1467	0.5959
Front	GSM850	0.2582	0.1467	0.4049
Back	GSM1900	0.5014	0.1467	0.6481
Front	GSM1900	0.1508	0.1467	0.2975
Back	WCDMA Band V	0.5497	0.1467	0.6964
Front	WCDMA Band V	0.1105	0.1467	0.2572
Back	WCDMA Band II	0.4843	0.1467	0.631
Front	WCDMA Band II	0.1039	0.1467	0.2506

**Hotspot SAR****WWAN and WLAN**

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.5720	0.0872	0.6592
Front	GSM850	-	-	-
Top side	GSM850	-	0.0287	0.0287
Bottom side	GSM850	0.0814	-	0.0814
Right side	GSM850	-	0.0156	0.0156
Left side	GSM850	0.4322	-	0.4322
Back	GSM1900	0.5060	0.0872	0.5932
Front	GSM1900	-	-	-
Top side	GSM1900	-	0.0287	0.0287
Bottom side	GSM1900	0.0894	-	0.0894
Right side	GSM1900	-	0.0156	0.0156
Left side	GSM1900	0.2526	-	0.2526
Back	WCDMA Band V	0.2159	0.0872	0.3031
Front	WCDMA Band V	-	-	-
Top side	WCDMA Band V	-	0.0287	0.0287
Bottom side	WCDMA Band V	0.0475	-	0.0475
Right side	WCDMA Band V	-	0.0156	0.0156
Left side	WCDMA Band V	0.1748	-	0.1748

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.5720	0.1213	0.6933
Front	GSM850	-	0.1213	0.1213
Top side	GSM850	-	0.1213	0.1213
Bottom side	GSM850	0.0814	0.1213	0.2027
Right side	GSM850	-	0.1213	0.1213
Left side	GSM850	0.4322	0.1213	0.5535
Back	GSM1900	0.5060	0.1213	0.6273
Front	GSM1900	-	0.1213	0.1213
Top side	GSM1900	-	0.1213	0.1213
Bottom side	GSM1900	0.0894	0.1213	0.1213
Right side	GSM1900	-	0.1213	0.1213
Left side	GSM1900	0.2526	0.1213	0.3739

## 10. Measurement Uncertainty

### 10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Test Sample Related</b>									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity -	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M

measurement uncertainty									
Combined Standard Uncertainty			RSS				12.98	12.53	
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43	

## 10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Dipole</b>									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	



Liquid conductivity measurement uncertainty	-	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value		E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity measurement uncertainty	-	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty				RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)				K=2				23.39	22.43	

## Annex A. Plots of System Performance Check

# MEASUREMENT 1

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW835
<b>Channels</b>	Middle
<b>Signal</b>	CW (Crest factor: 1.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3


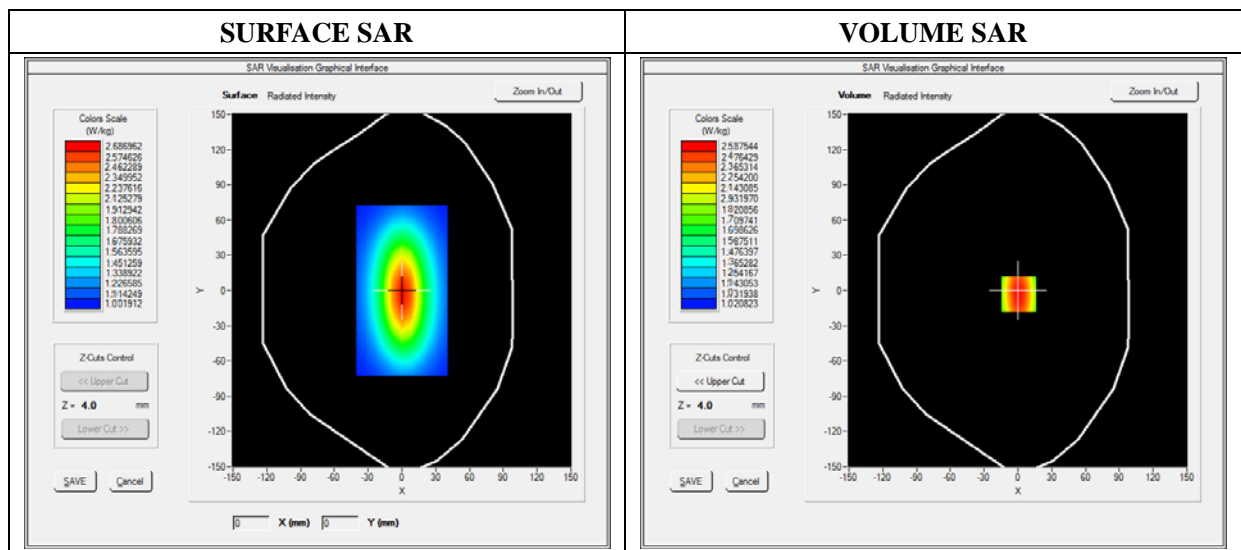


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.505042
SAR 1g (W/Kg)	2.510550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5569	1.6145	1.1594	0.8225	0.5142	0.4012

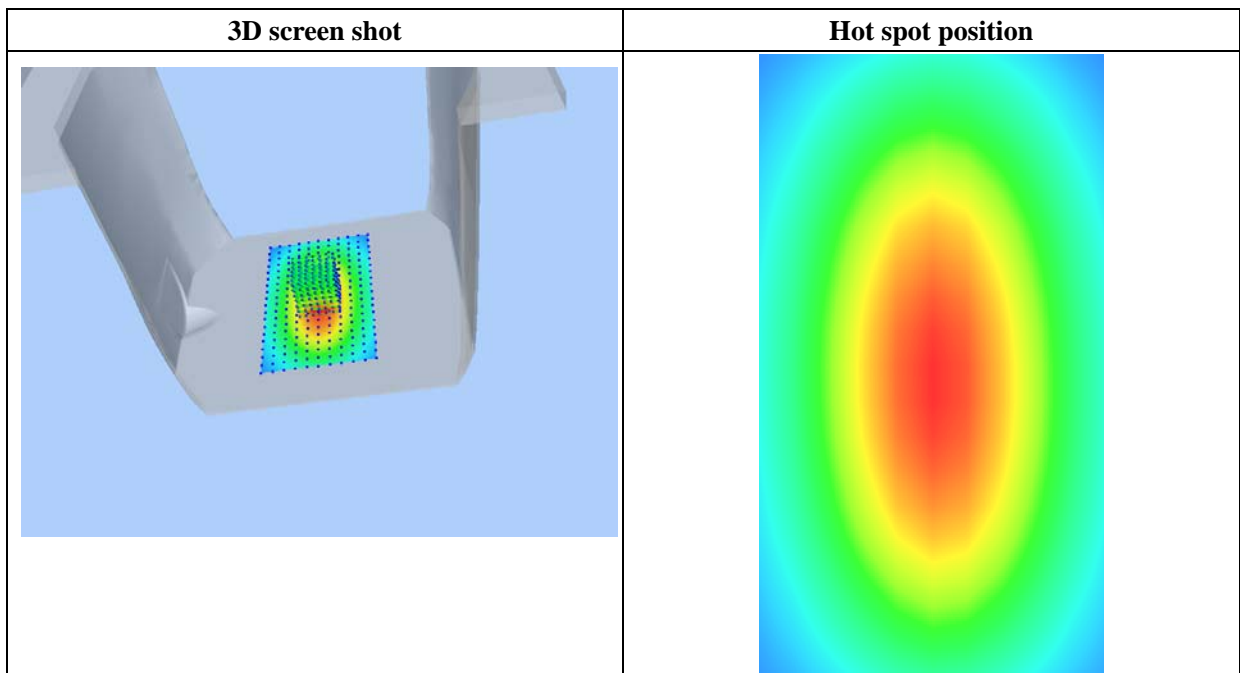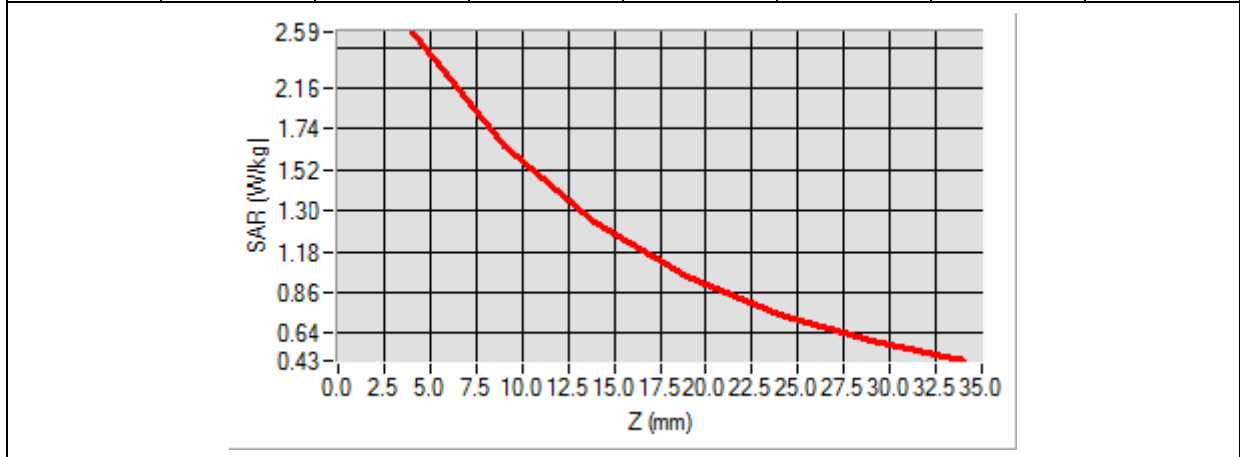

# MEASUREMENT 2

**For Body Liquid**

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1900
<b>Channels</b>	Middle
<b>Signal</b>	CW (Crest factor: 1.0)

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	1900.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

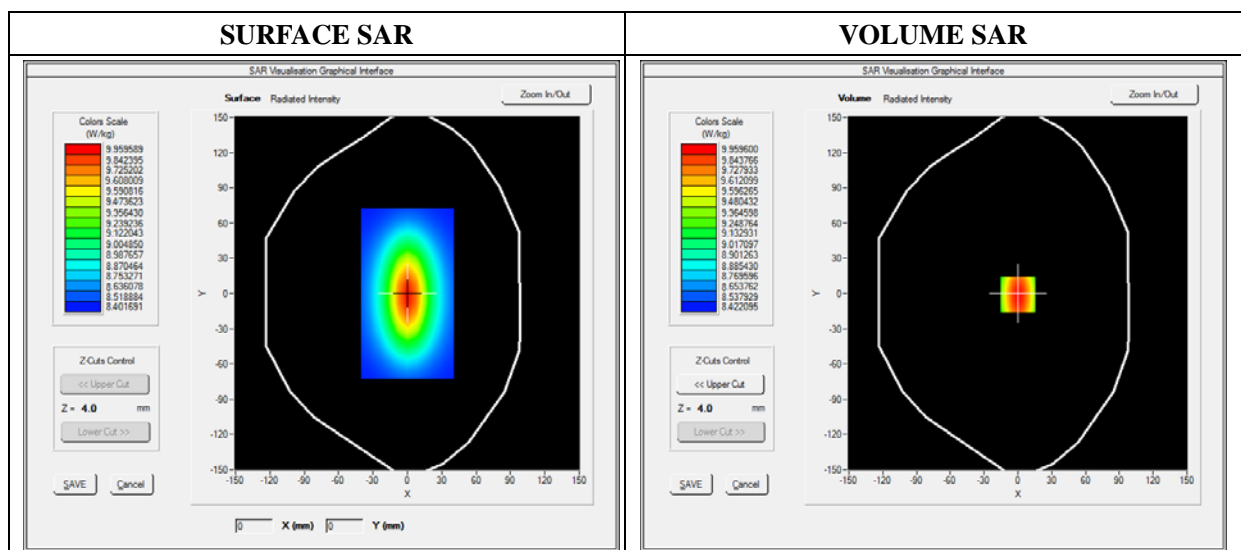


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>5.002360</b>
<b>SAR 1g (W/Kg)</b>	<b>9.741254</b>

**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>10.1015</b>	<b>6.3250</b>	<b>5.1125</b>	<b>3.9025</b>	<b>3.1114</b>	<b>2.7155</b>

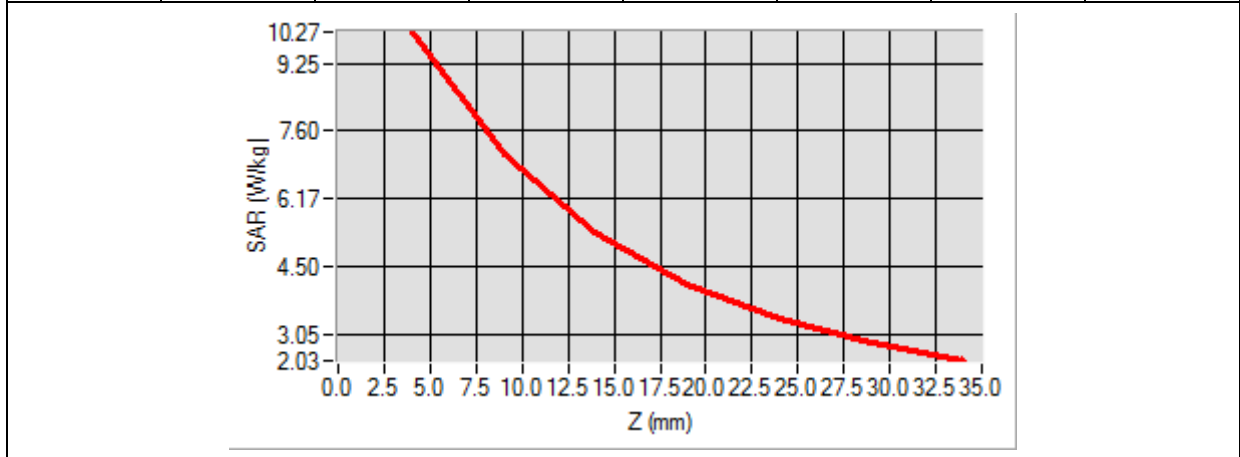

<b>3D screen shot</b>	<b>Hot spot position</b>
<p>A 3D perspective view of a grey, rectangular electronic device. A color-coded heatmap is overlaid on the top surface, showing a central red/orange area (high SAR) that transitions through yellow and green to blue (low SAR) towards the edges.</p>	<p>A 2D top-down view of the SAR heatmap. It shows a central, vertically-oriented oval shape with a red/orange core, surrounded by concentric rings of yellow, green, and blue, indicating the spatial distribution of the electromagnetic field.</p>

# MEASUREMENT 3

**For Body Liquid**

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 21 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2450
<b>Channels</b>	Middle
<b>Signal</b>	CW (Crest factor: 1.0)

**B. SAR Measurement Results**

**Middle Band SAR**

<b>Frequency (MHz)</b>	2450.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

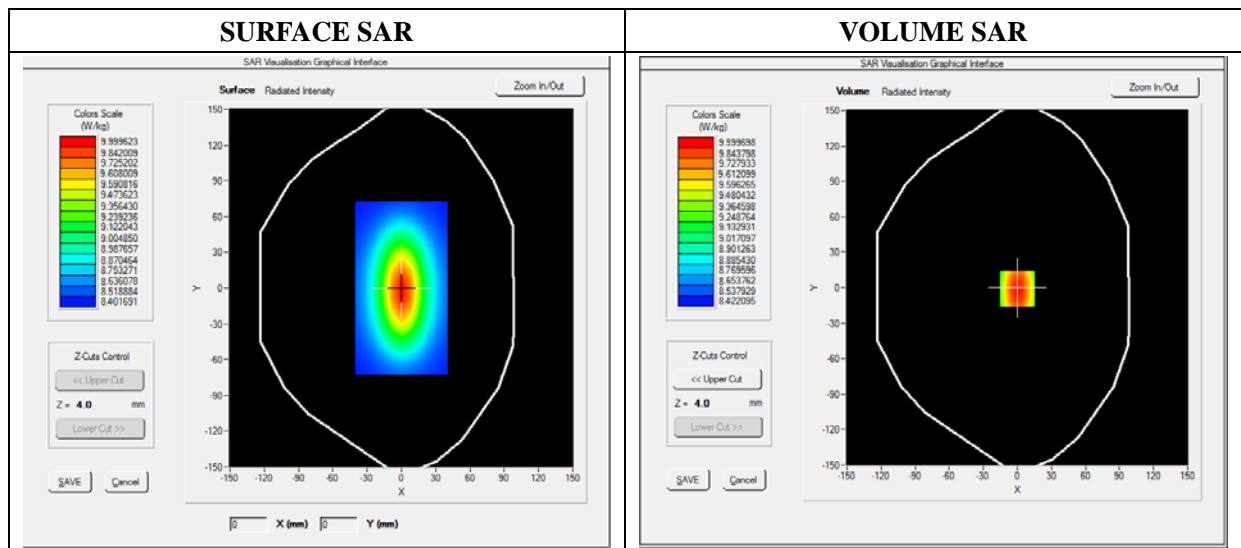


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.000125
SAR 1g (W/Kg)	12.150150

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.0213	11.8236	9.1256	8.4562	6.3025	4.5115

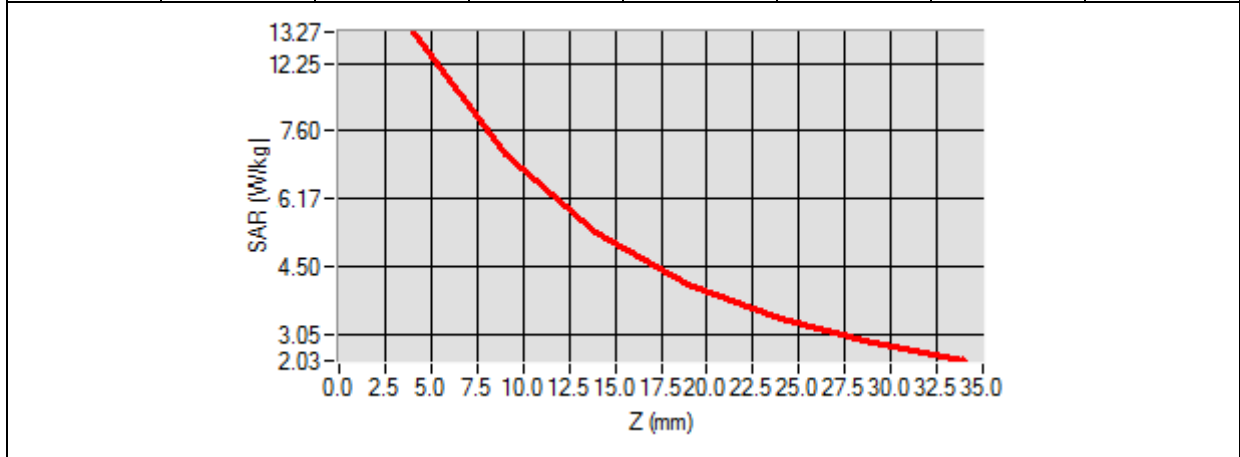

3D screen shot	Hot spot position

## Annex B. Plots of SAR Measurement

<b><u>TYPE</u></b>	<b><u>BAND</u></b>	<b><u>PARAMETERS</u></b>
Tablet	GSM850	<u>Measurement 1:</u> Flat Plane with Back device position Body-worn on Low Channel in GSM mode
Tablet	GSM850	<u>Measurement 2:</u> Flat Plane with Front device position Body-worn on Low Channel in GSM mode
Tablet	GPR850_4TX	<u>Measurement 3:</u> Flat Plane with Back device position on Low Channel in GPRS mode
Tablet	GPRS850_4TX	<u>Measurement 4:</u> Flat Plane with Bottom side device position on Middle Channel in GPRS mode
Tablet	GPRS850_4TX	<u>Measurement 5:</u> Flat Plane with Left side device position on Middle Channel in GPRS mode
Tablet	GSM1900	Measurement 6: Flat Plane with Back device position Body-worn on Low Channel in GSM mode
Tablet	GSM1900	Measurement 7: Flat Plane with Front device position Body-worn on Low Channel in GSM mode
Tablet	GPRS1900_4TX	<u>Measurement 8:</u> Flat Plane with Back device position on High Channel in GPRS mode
Tablet	GPRS1900_4TX	<u>Measurement 9:</u> Flat Plane with Bottom side device position on High Channel in GPRS mode
Tablet	GPRS1900_4TX	<u>Measurement 10:</u> Flat Plane with Left side device position on High Channel in GPRS mode
Tablet	WCDMA850_RMC	<u>Measurement 11:</u> Flat Plane with Back device position on High Channel in WCDMA mode
Tablet	WCDMA850_RMC	<u>Measurement 12:</u> Flat Plane with Bottom side device position on High Channel in WCDMA mode
Tablet	WCDMA850_RMC	<u>Measurement 13:</u> Flat Plane with Left side device position on High Channel in WCDMA mode
Tablet	WCDMA850_RMC	<u>Measurement 14:</u> Flat Plane with Back device position Body-worn on Low Channel in WCDMA mode
Tablet	WCDMA850_RMC	<u>Measurement 15:</u> Flat Plane with Front device position Body-worn on Low Channel in WCDMA mode
Tablet	WiFi_802.11b	<u>Measurement 16:</u> Flat Plane with Back side device position on High Channel in WIFI mode
Tablet	WiFi_802.11b	<u>Measurement 17:</u> Flat Plane with Top side device position on High Channel in WIFI mode
Tablet	WiFi_802.11b	<u>Measurement 18:</u> Flat Plane with Left side device position on High Channel in WIFI mode
Tablet	WiFi_802.11b	<u>Measurement 19:</u> Flat Plane with Back device position Body-wron on High Channel in WIFI mode



---

---

<b>Tablet</b>	<b>WiFi_802.11b</b>	<u>Measurement 20: Flat Plane with Front device position</u> Body-worn on High Channel in WIFI mode
---------------	---------------------	--

# MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 2012/11/26

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

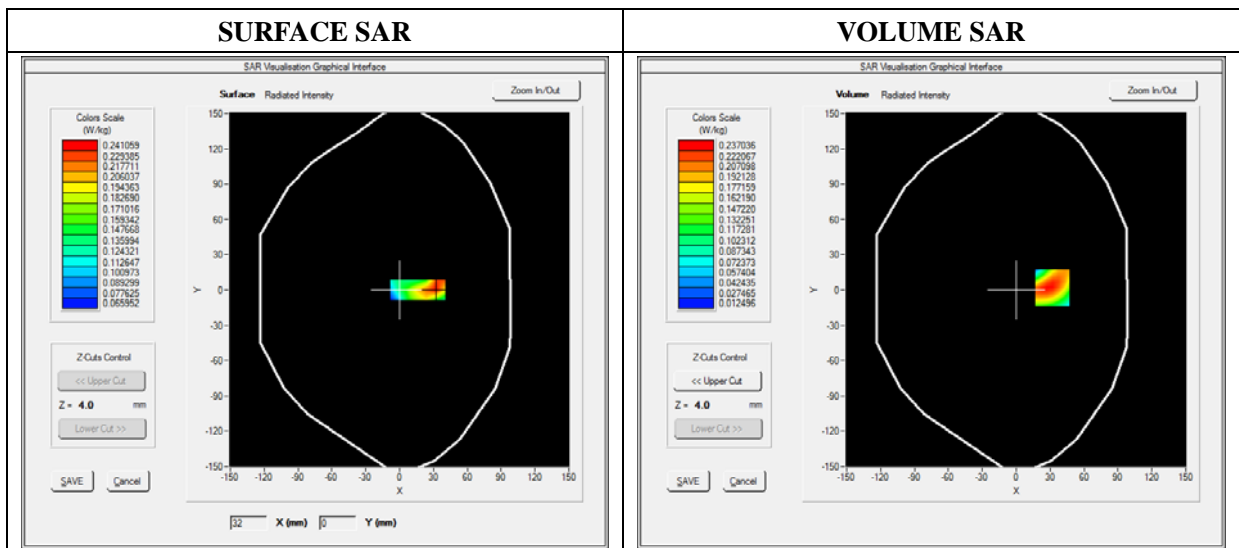

Maximum location: X=32.00, Y=2.00

SAR 10g (W/Kg)	0.164041
SAR 1g (W/Kg)	0.266723

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2348	0.1555	0.1031	0.0688

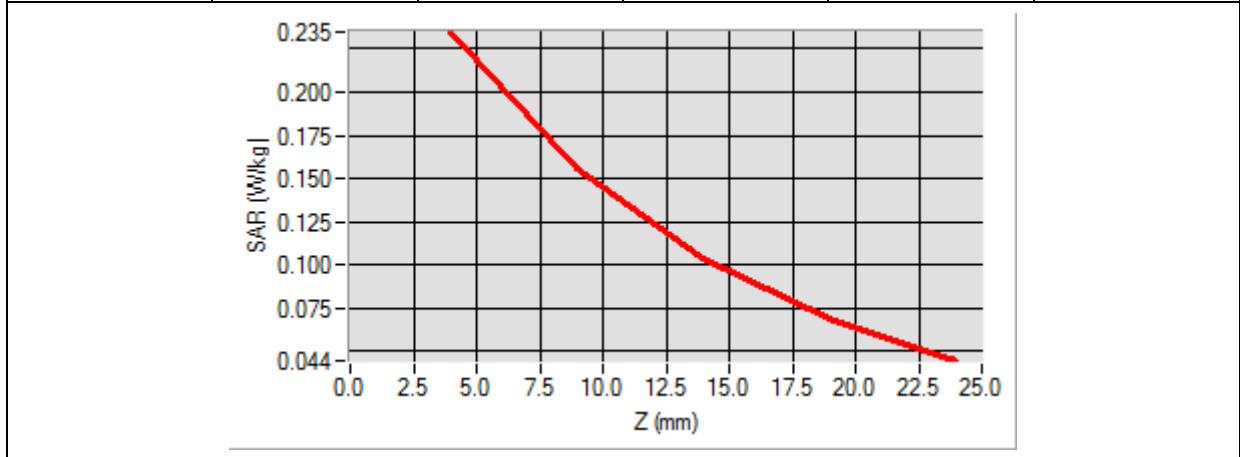

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 2

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 2012/11/26

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front(Body-worn)
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

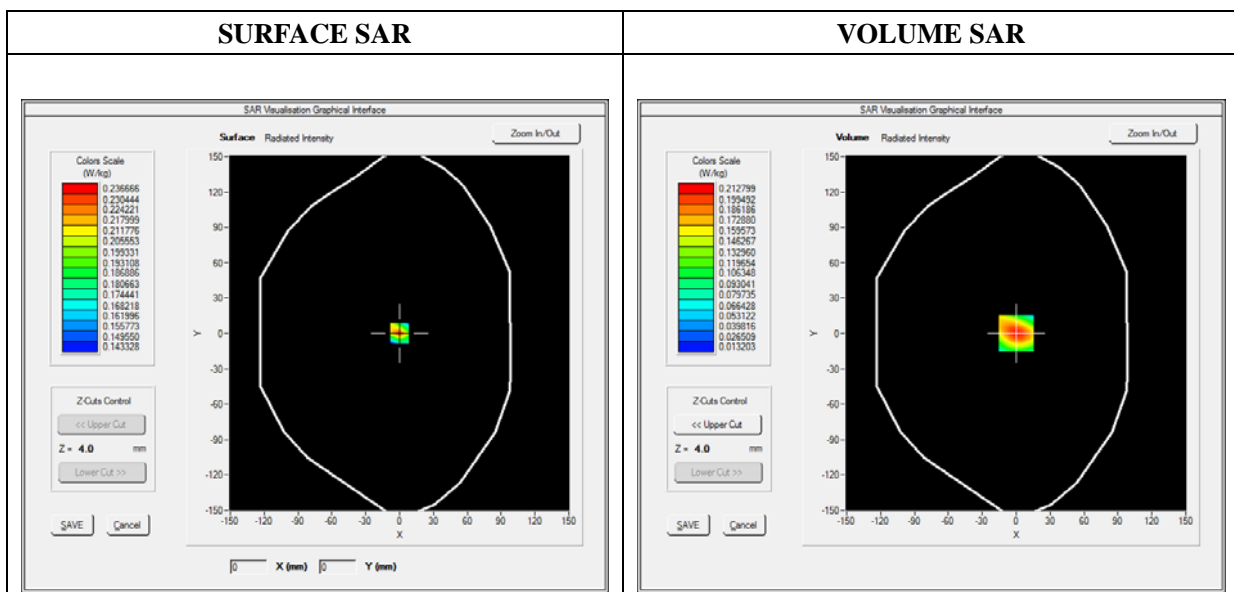

**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>0.146359</b>
<b>SAR 1g (W/Kg)</b>	<b>0.237063</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.2128</b>	<b>0.1402</b>	<b>0.0941</b>	<b>0.0655</b>

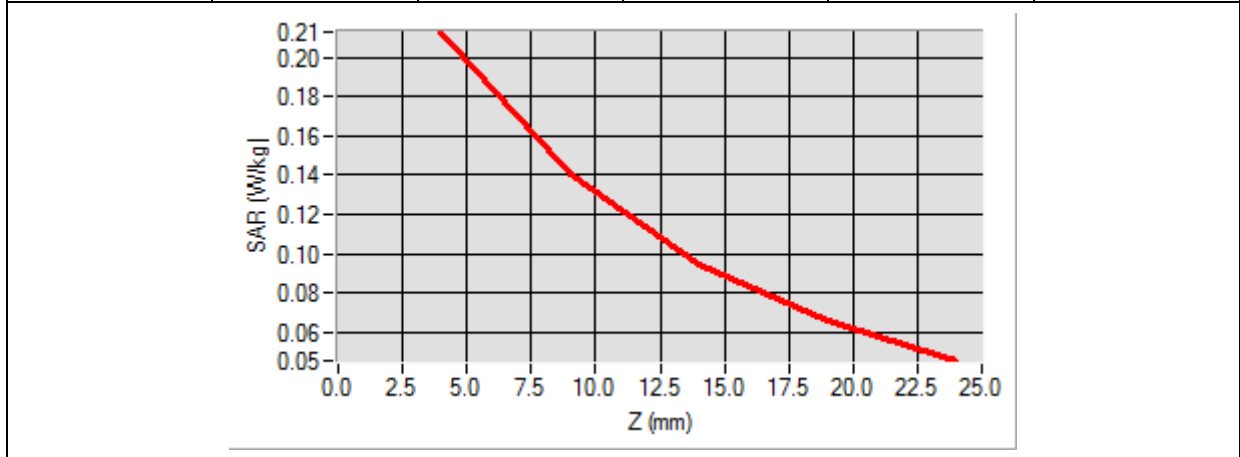

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 3

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Back
<b>Band</b>	GPRS850_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

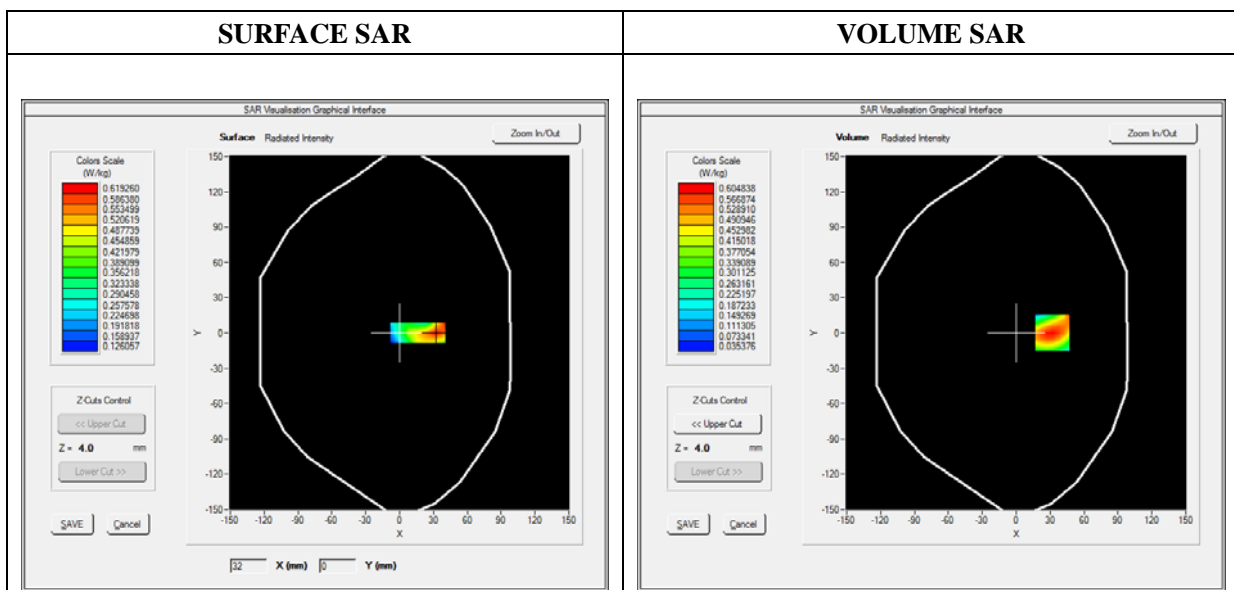

Maximum location: X=32.00, Y=0.00

SAR 10g (W/Kg)	0.338115
SAR 1g (W/Kg)	0.561576

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.6048	0.3824	0.2461	0.1644

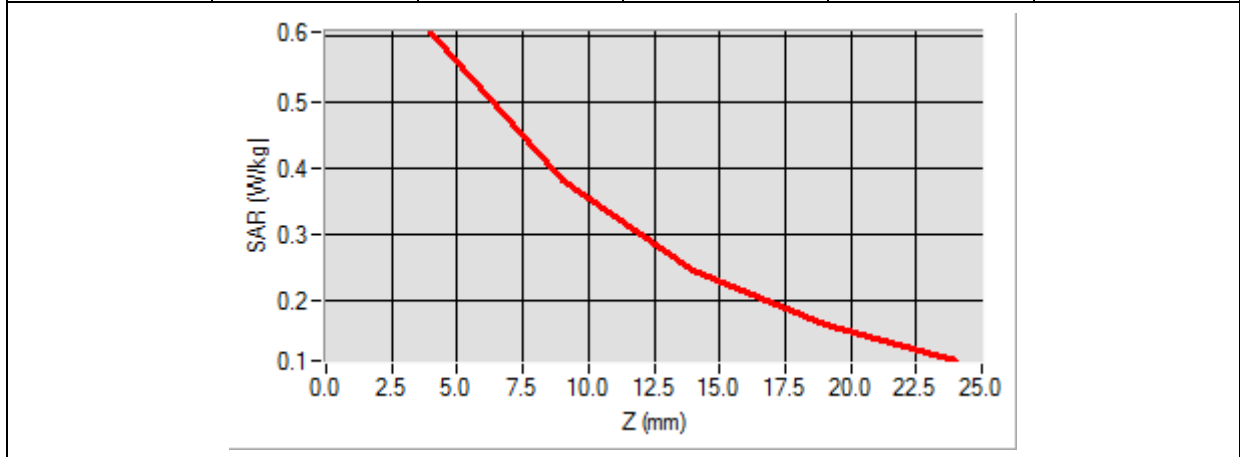

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 4

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Bottom
<b>Band</b>	GPRS850_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

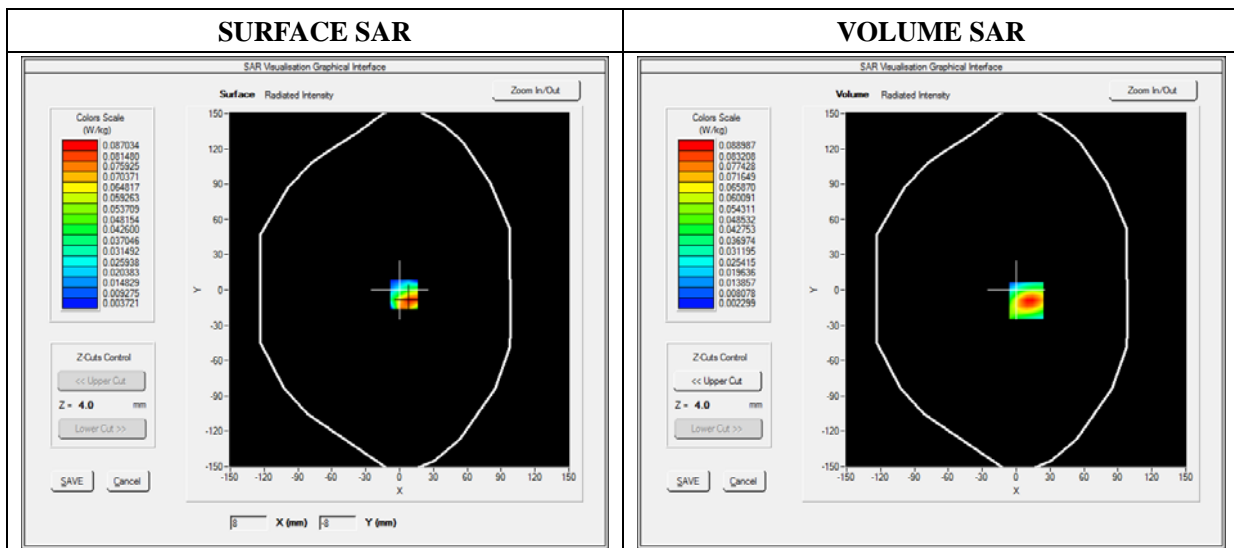




**Maximum location: X=9.00, Y=-9.00**

<b>SAR 10g (W/Kg)</b>	<b>0.042012</b>
<b>SAR 1g (W/Kg)</b>	<b>0.079859</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.0842</b>	<b>0.0512</b>	<b>0.0300</b>	<b>0.0189</b>

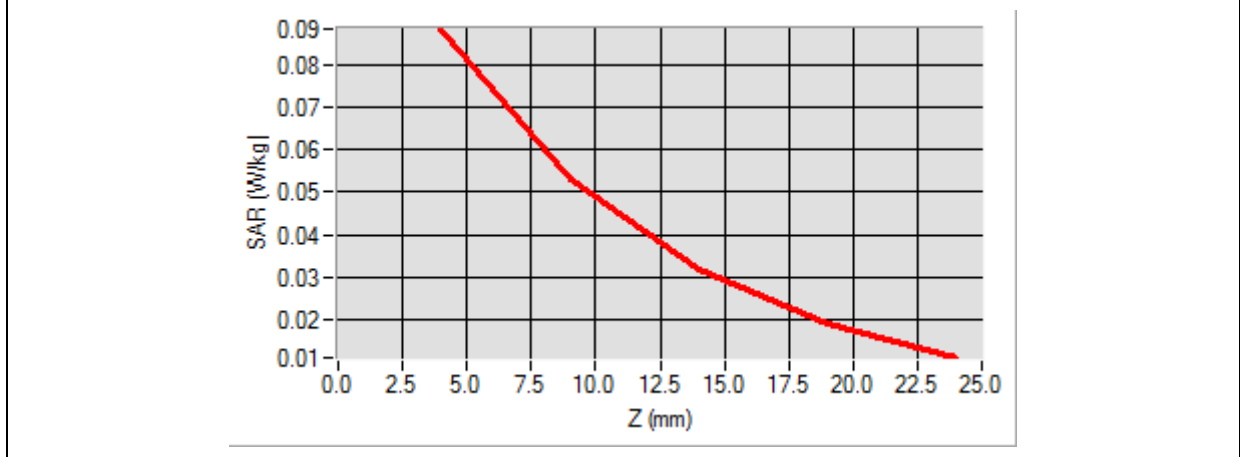

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 5

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Left side
<b>Band</b>	GPRS850_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

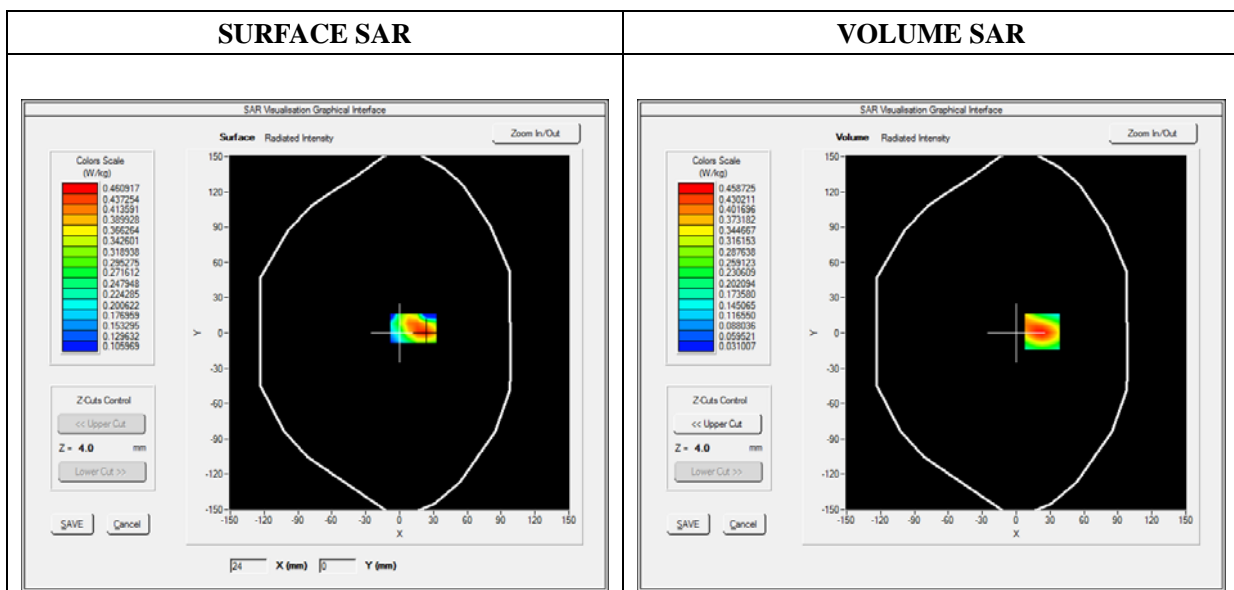

Maximum location: X=23.00, Y=1.00

SAR 10g (W/Kg)	0.258510
SAR 1g (W/Kg)	0.424312

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4587	0.2967	0.1953	0.1330

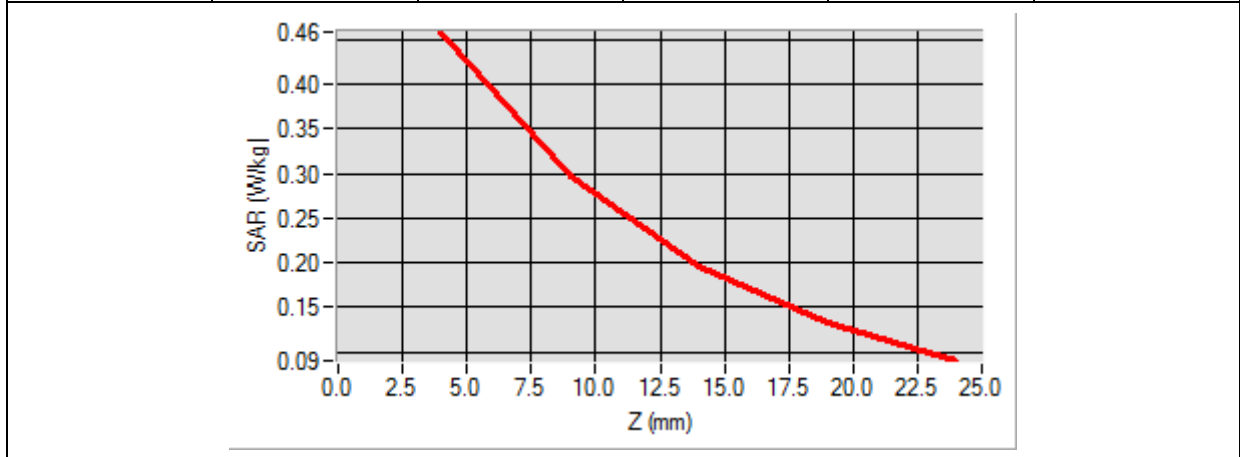

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 6

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	GSM1900
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

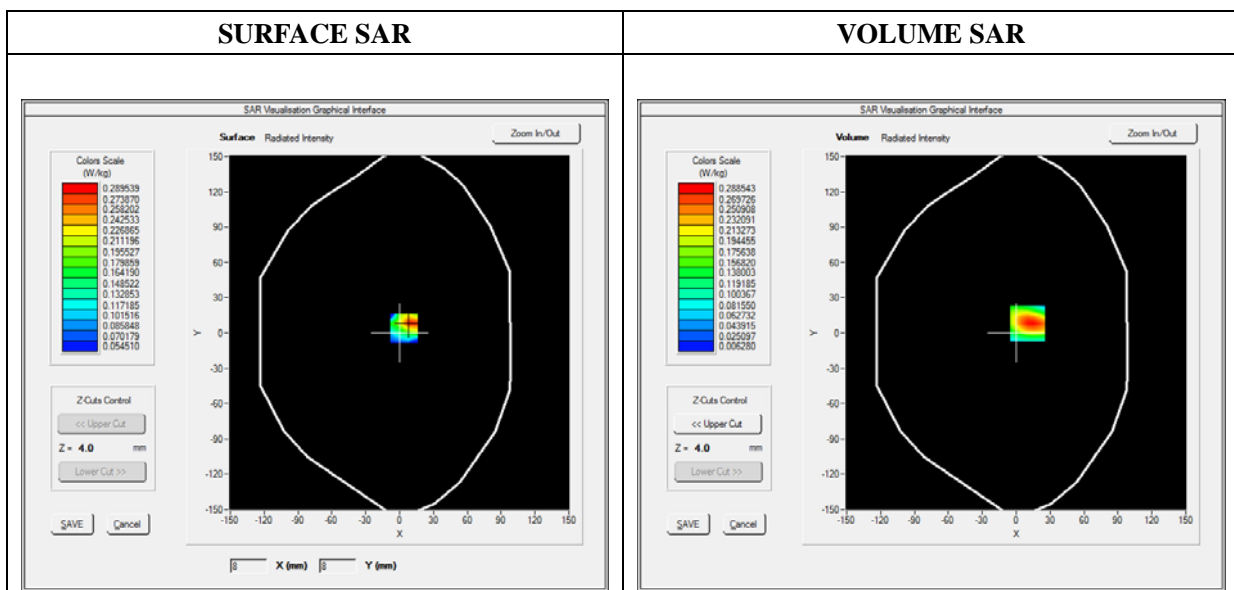

Maximum location: X=10.00, Y=8.00

SAR 10g (W/Kg)	0.153429
SAR 1g (W/Kg)	0.312617

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2857	0.1397	0.0673	0.0341

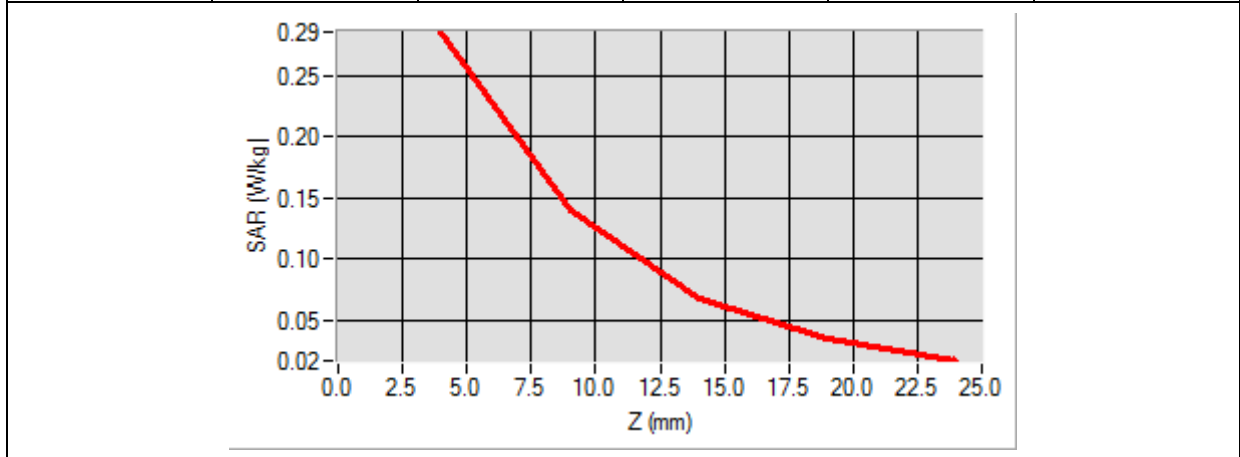

3D screen shot	Hot spot position

# MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front(Body-worn)
<b>Band</b>	GSM1900
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

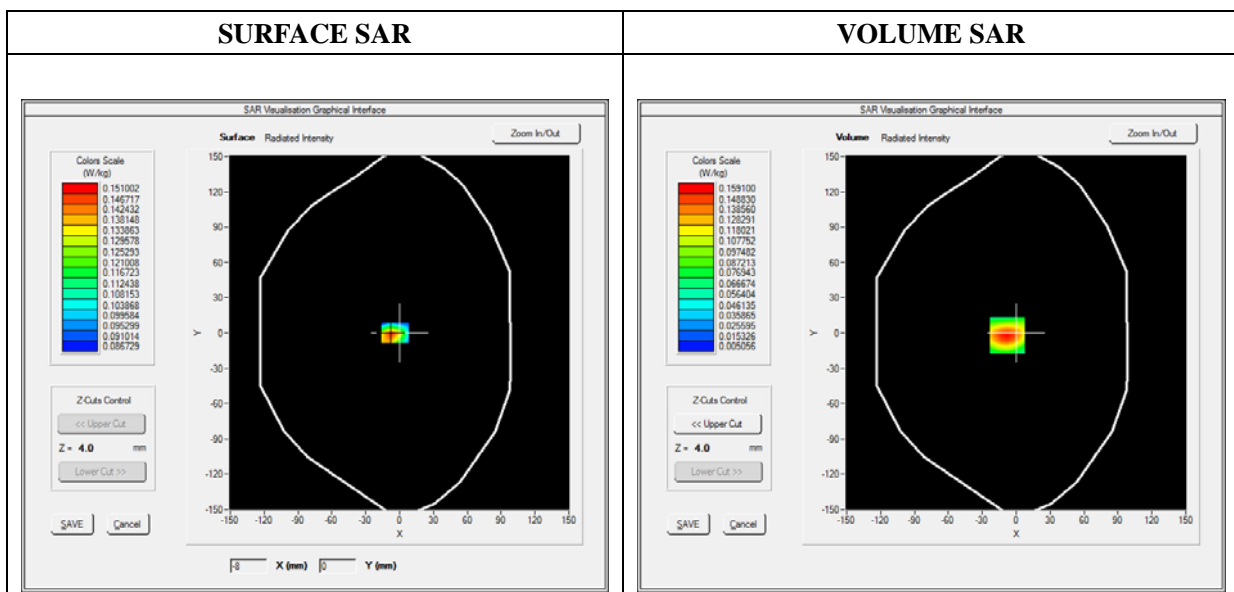

Maximum location: X=-8.00, Y=-2.00

SAR 10g (W/Kg)	0.087586
SAR 1g (W/Kg)	0.172761

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1591	0.0771	0.0371	0.0191

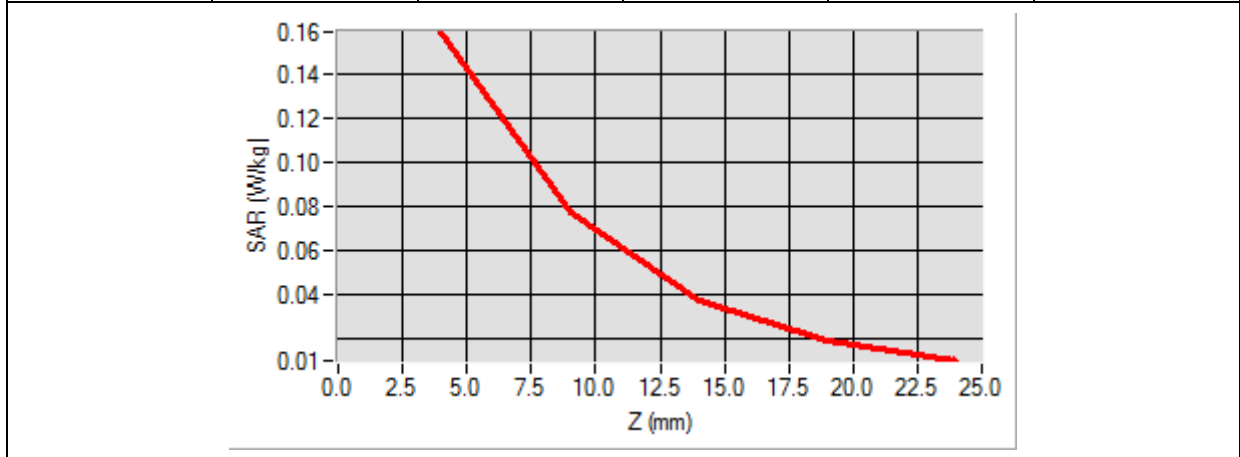

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of green dots on its surface. A small, localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D square color gradient representing the hot spot position, with the highest intensity (red) in the center, fading to yellow and then orange towards the edges.</p>

# MEASUREMENT 8

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Back
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

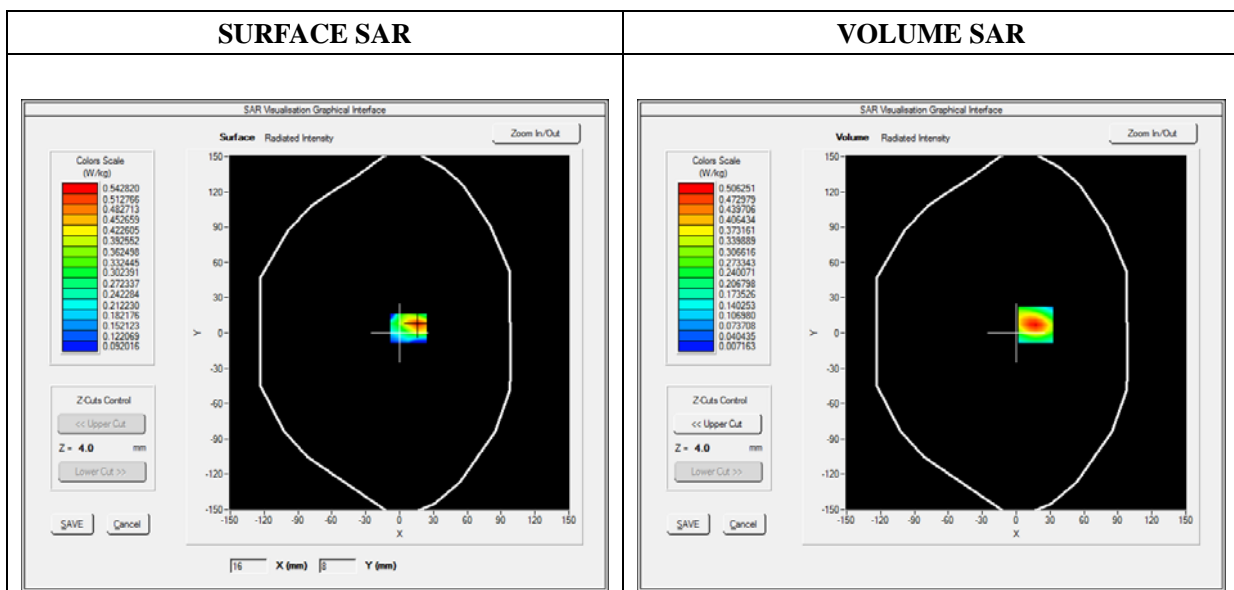




Maximum location: X=17.00, Y=7.00

SAR 10g (W/Kg)	0.227503
SAR 1g (W/Kg)	0.461529

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5063	0.2526	0.1234	0.0621

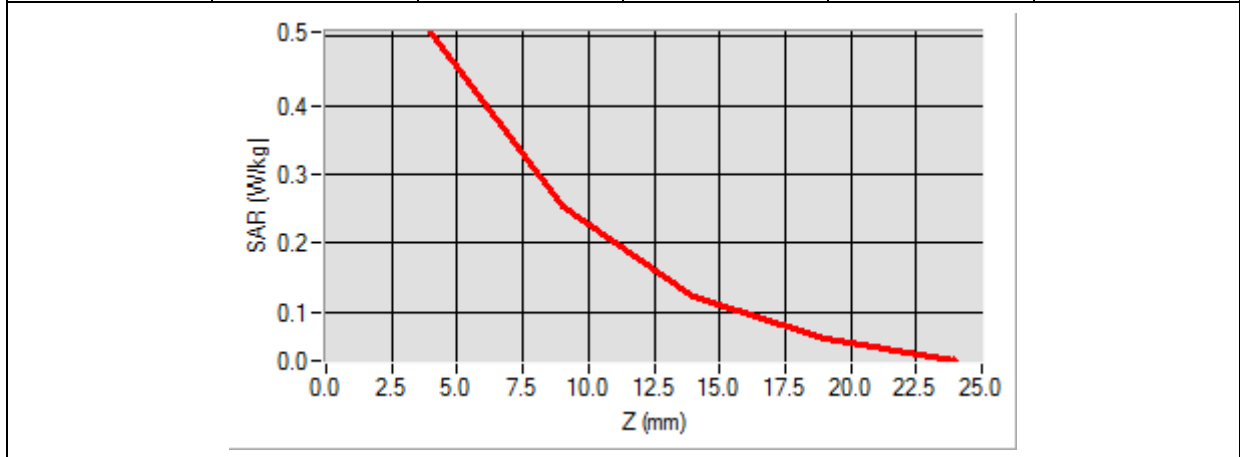

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 9

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Bottom
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

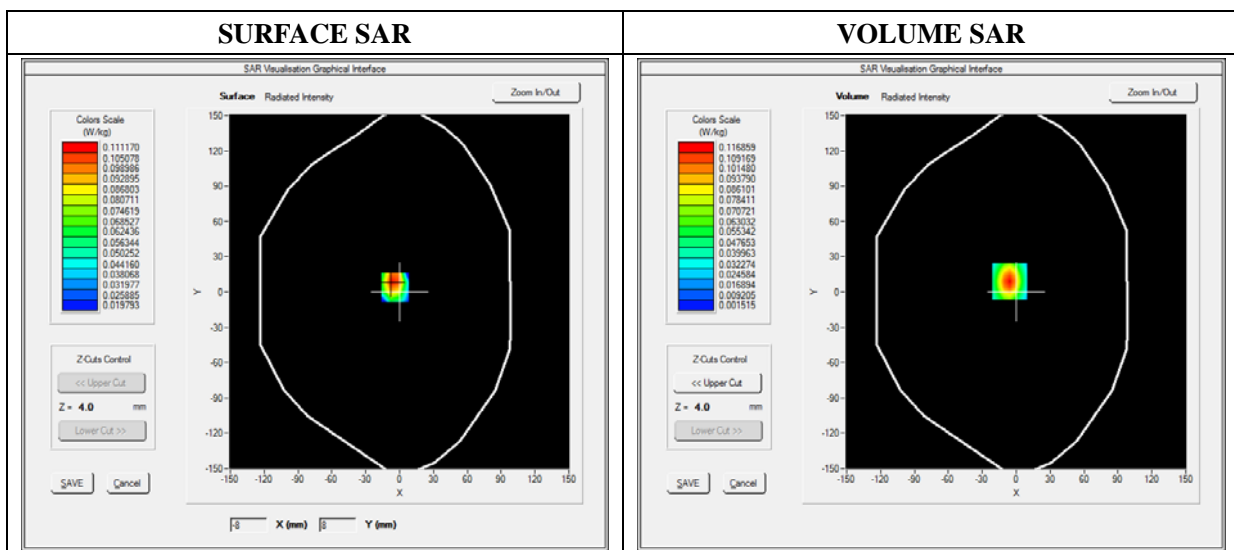

Maximum location: X=-6.00, Y=9.00

SAR 10g (W/Kg)	0.034642
SAR 1g (W/Kg)	0.081510

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0915	0.0512	0.0216	0.0102

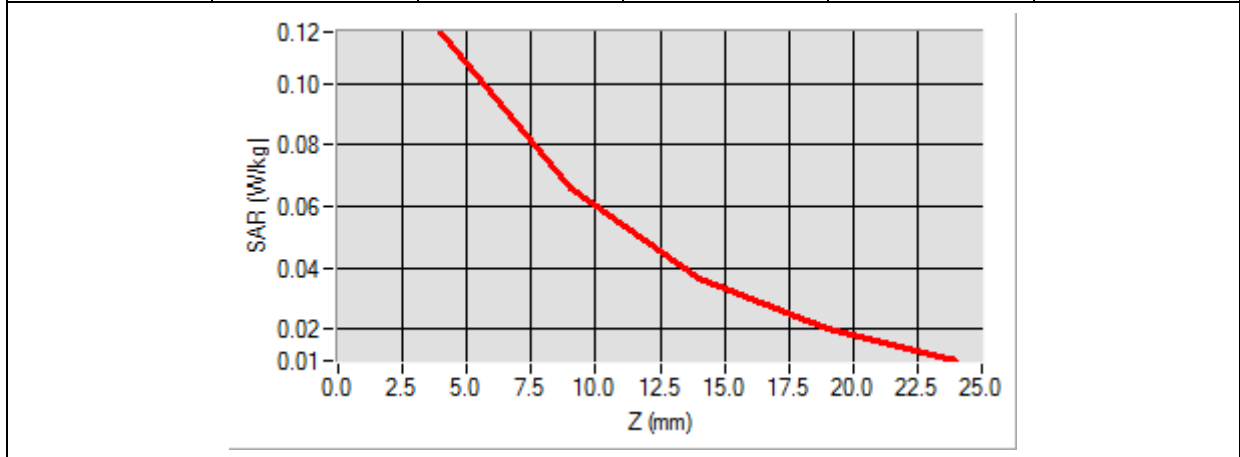

3D screen shot	Hot spot position

# MEASUREMENT 10

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Left side
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	51.302061
<b>Conductivity (S/m)</b>	1.500440
<b>Power Variation (%)</b>	0.798541
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

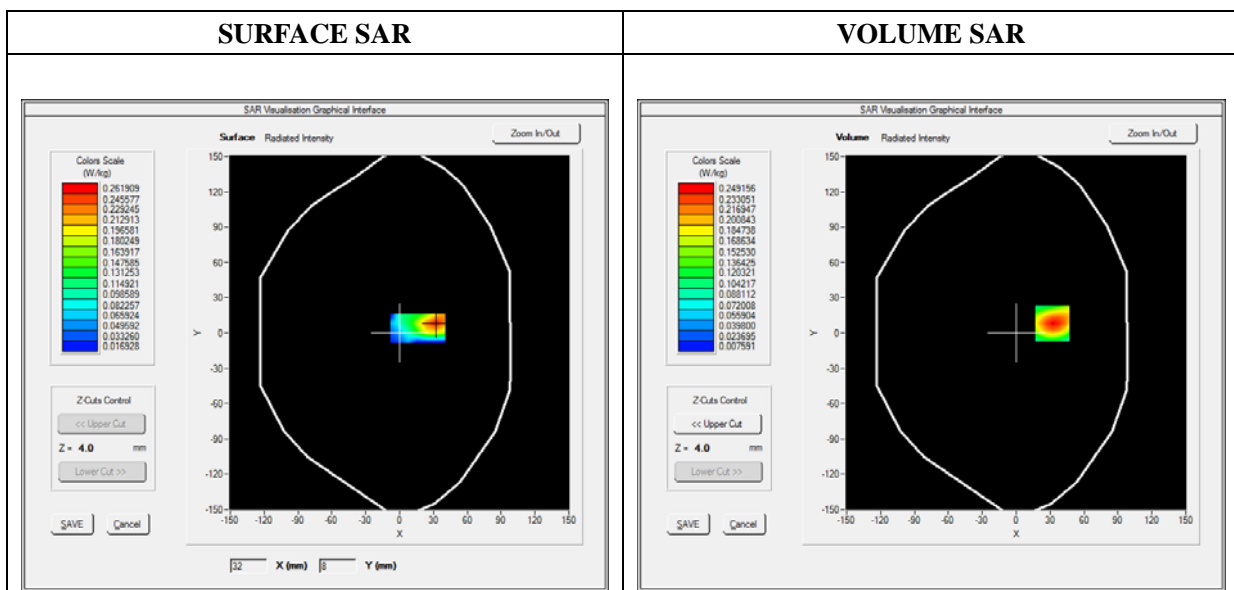

Maximum location: X=32.00, Y=8.00

SAR 10g (W/Kg)	0.118892
SAR 1g (W/Kg)	0.230424

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2492	0.1269	0.0633	0.0323

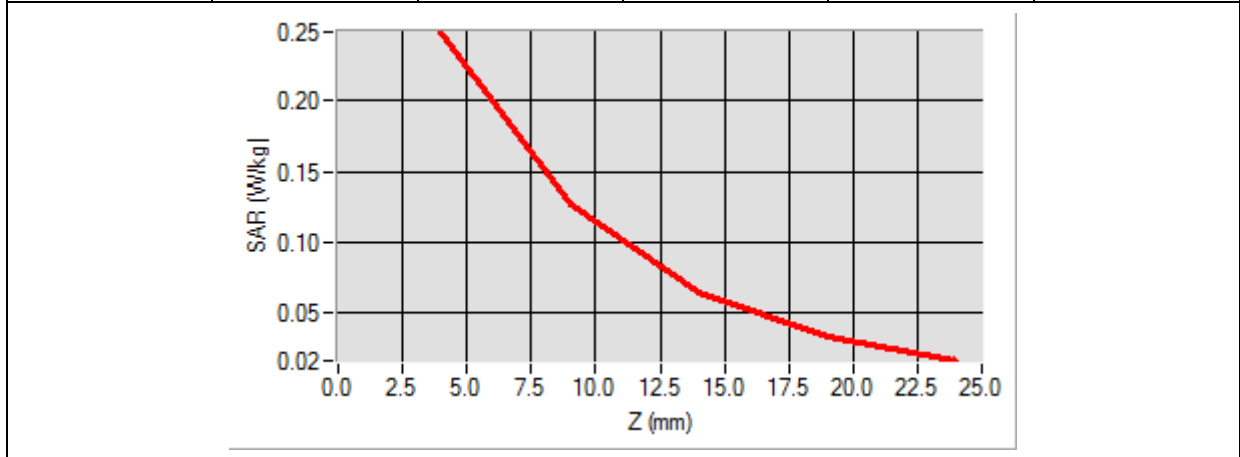

<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>
<p>A 3D perspective view of a grey device with a grid of small blue dots on its surface. A small area of the grid is highlighted with a color gradient from green to yellow, indicating a hot spot.</p>	<p>A 2D color-coded map of the hot spot area. The colors transition from green on the left to yellow in the middle, and then to red on the right, indicating the intensity of the SAR exposure.</p>

# MEASUREMENT 11

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

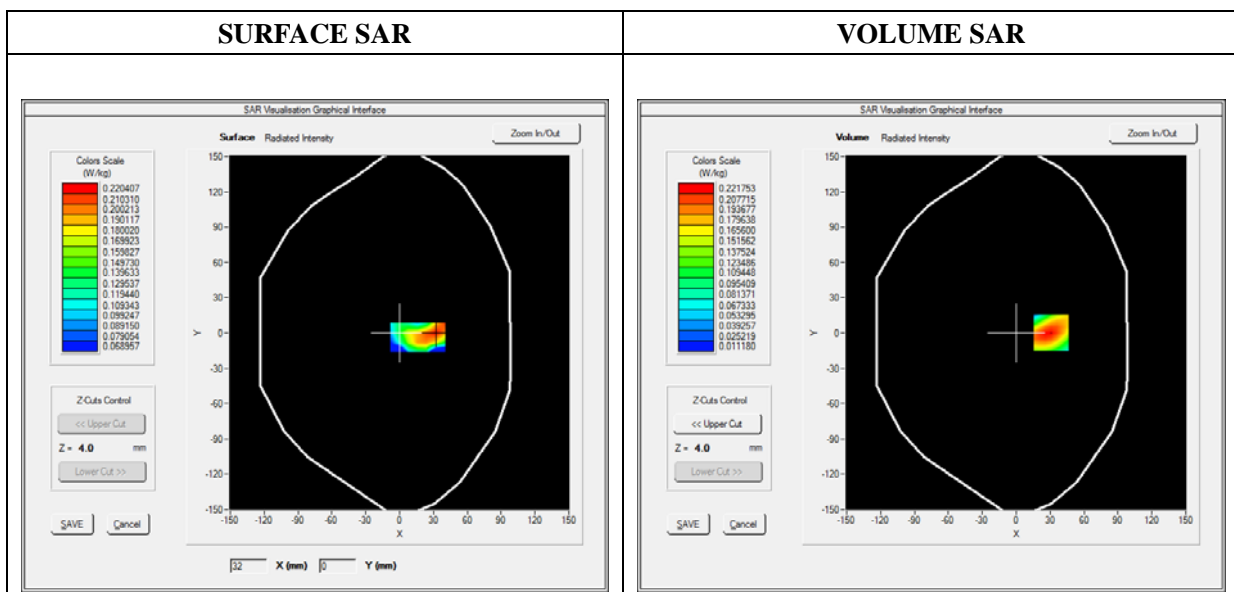

Maximum location: X=31.00, Y=0.00

SAR 10g (W/Kg)	0.127089
SAR 1g (W/Kg)	0.207625

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2218	0.1425	0.0934	0.0636

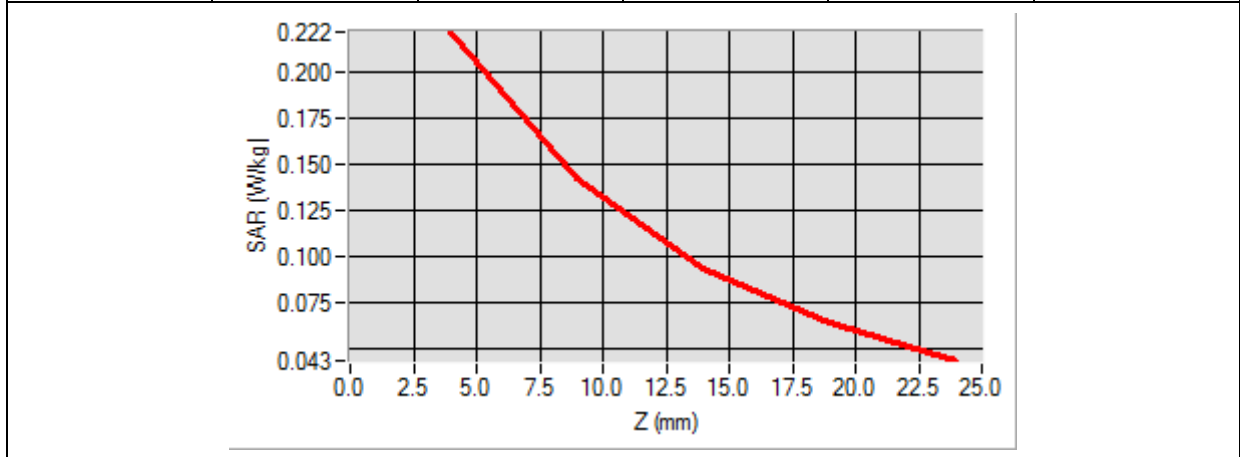

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 12

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Bottom
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

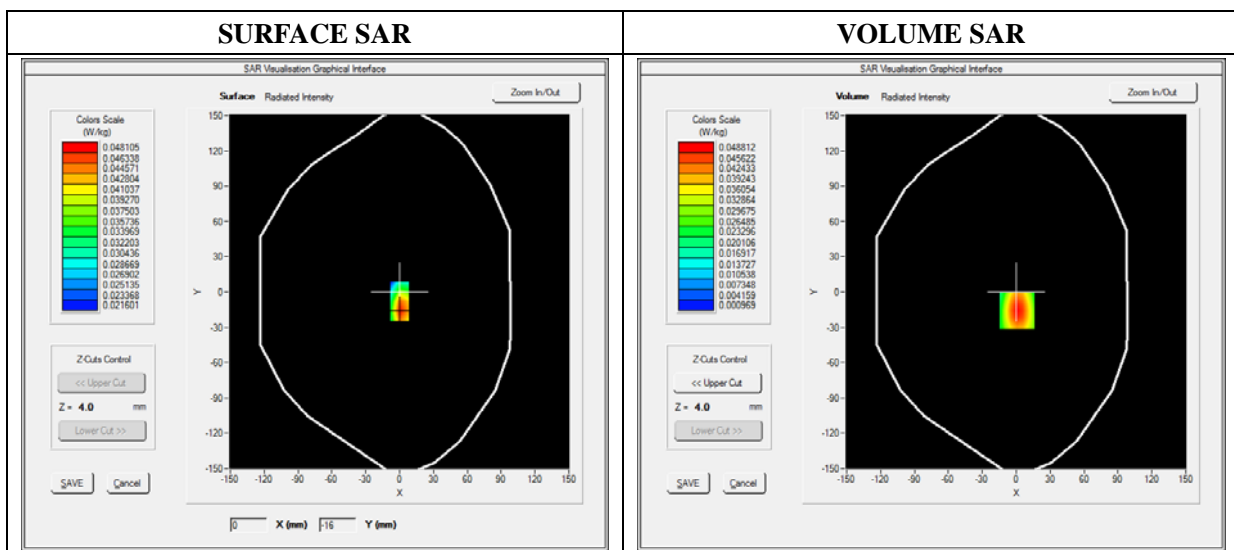




Maximum location: X=1.00, Y=-16.00

SAR 10g (W/Kg)	0.022835
SAR 1g (W/Kg)	0.045693

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0488	0.0221	0.0096	0.0044

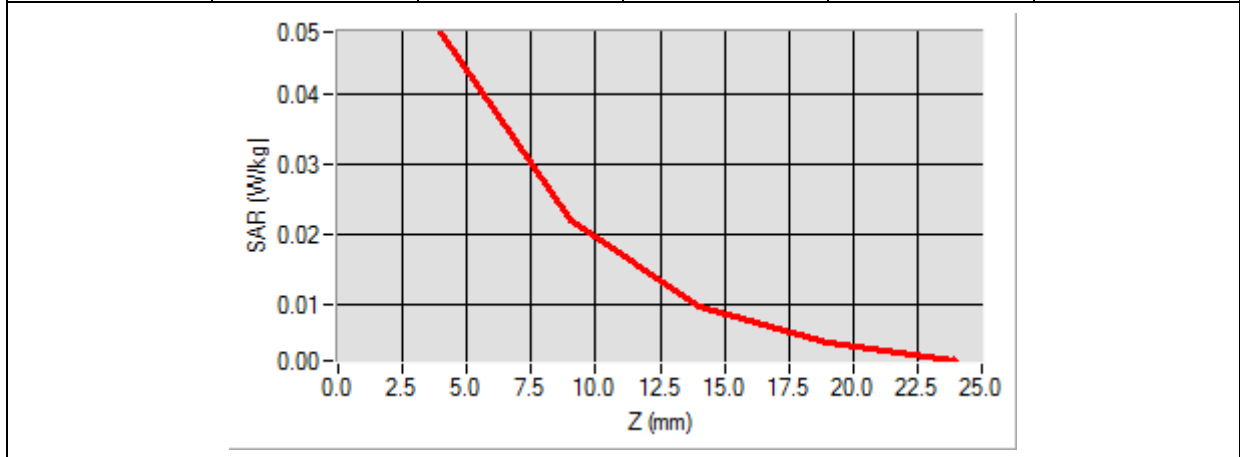

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Left side
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

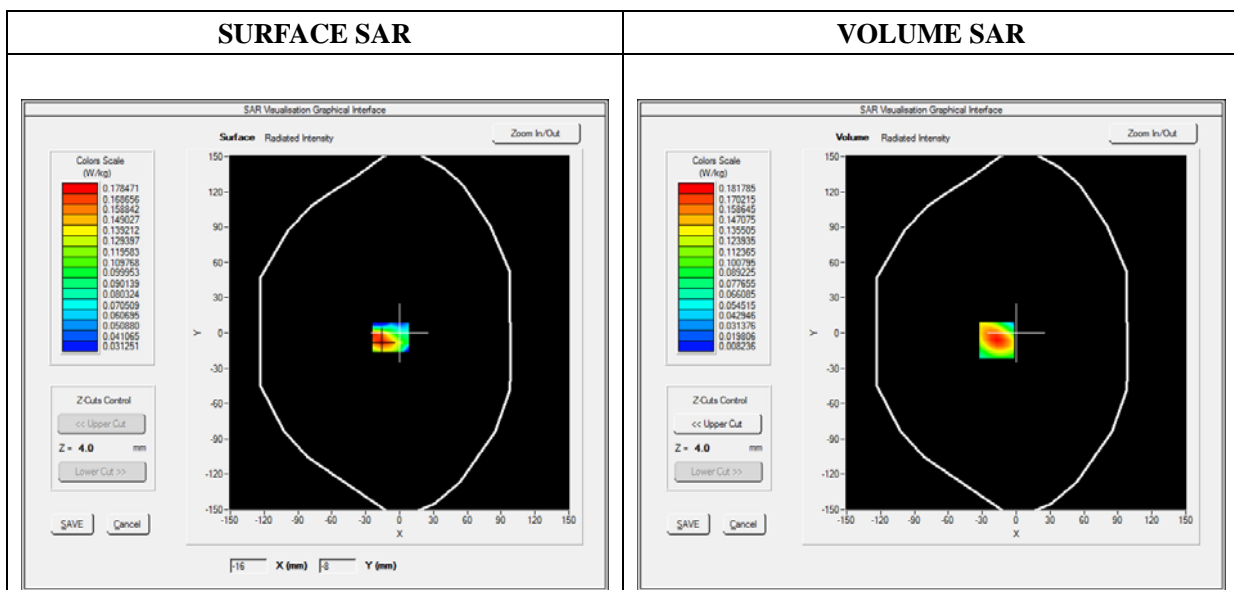

Maximum location: X=-17.00, Y=-6.00

SAR 10g (W/Kg)	0.102522
SAR 1g (W/Kg)	0.168123

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1818	0.1179	0.0776	0.0527

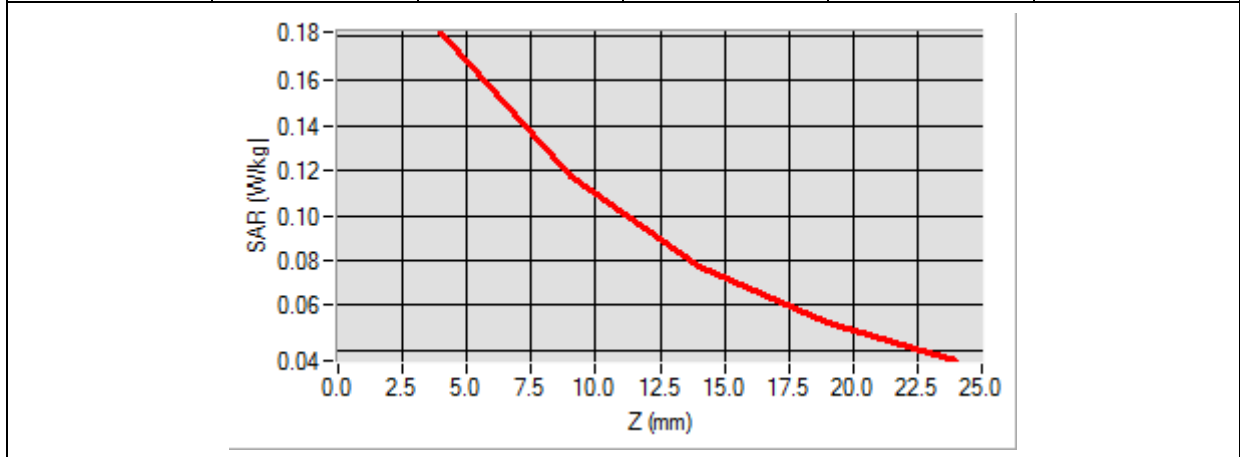

3D screen shot	Hot spot position
<p>A 3D perspective view of the device with a grid of blue dots on its surface. A localized area of high SAR is highlighted with a color gradient from red to green.</p>	<p>A 2D color-coded diagram showing the hot spot position, with a gradient from red (high SAR) to green (low SAR).</p>

# MEASUREMENT 14

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

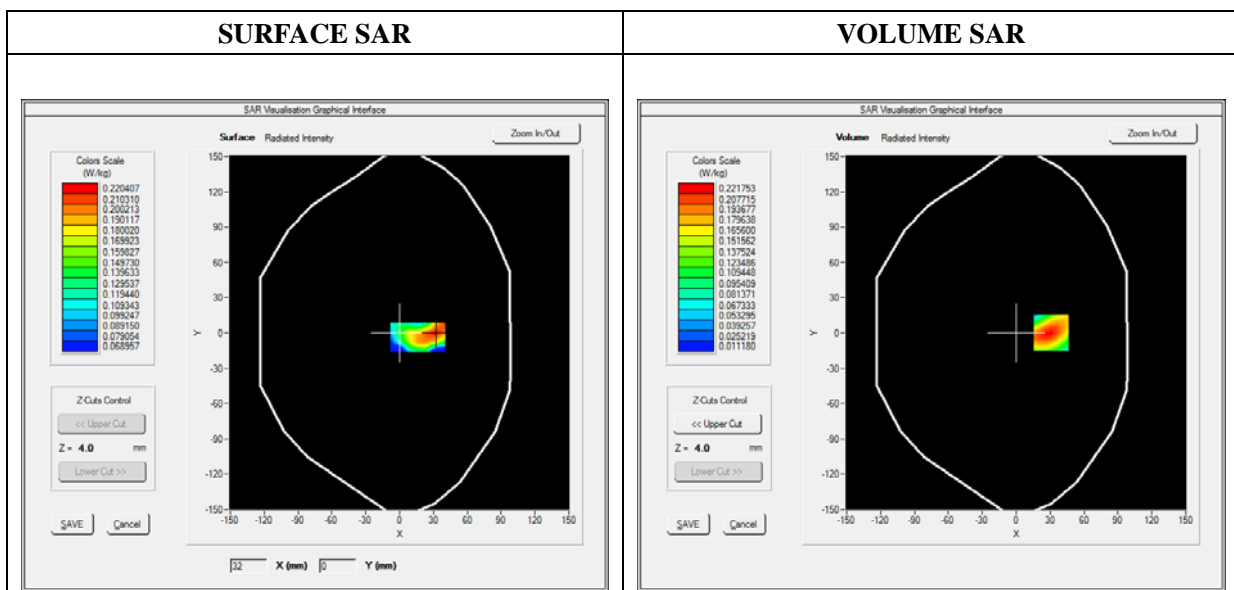

Maximum location: X=31.00, Y=0.00

SAR 10g (W/Kg)	0.121251
SAR 1g (W/Kg)	0.205425

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2200	0.1421	0.0912	0.0630

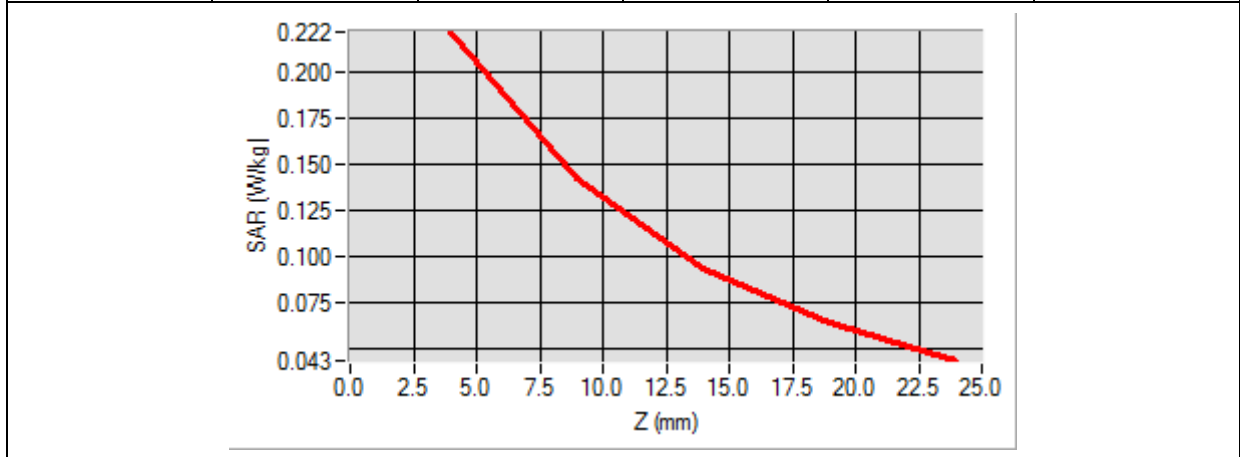

<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the top surface. A small area in the center of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D top-down view of the device's top surface. The surface is color-coded to show the SAR distribution, with a central area in red and yellow, transitioning to green and blue towards the edges, representing the hot spot position.</p>

# MEASUREMENT 15

Type: Phone measurement (Complete)

Date of measurement: 07/10/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front(Body-worn)
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results


<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.002580
<b>Conductivity (S/m)</b>	0.952120
<b>Power Variation (%)</b>	0.922245
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

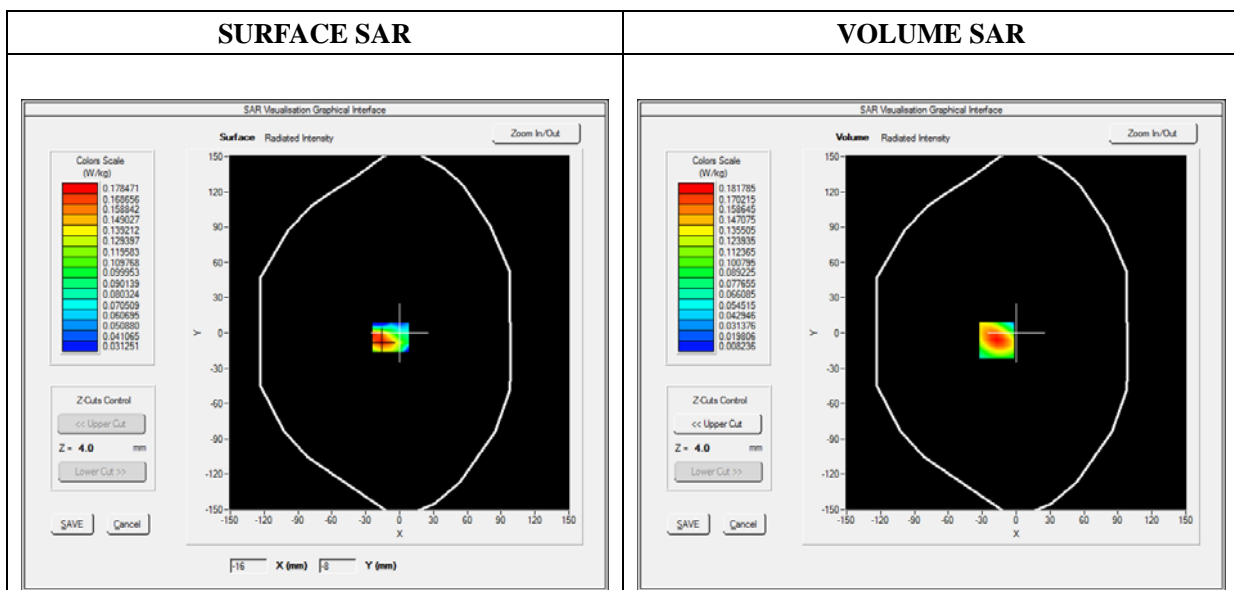

Maximum location: X=-17.00, Y=-6.00

SAR 10g (W/Kg)	0.099214
SAR 1g (W/Kg)	0.161250

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1805	0.1125	0.0712	0.0504

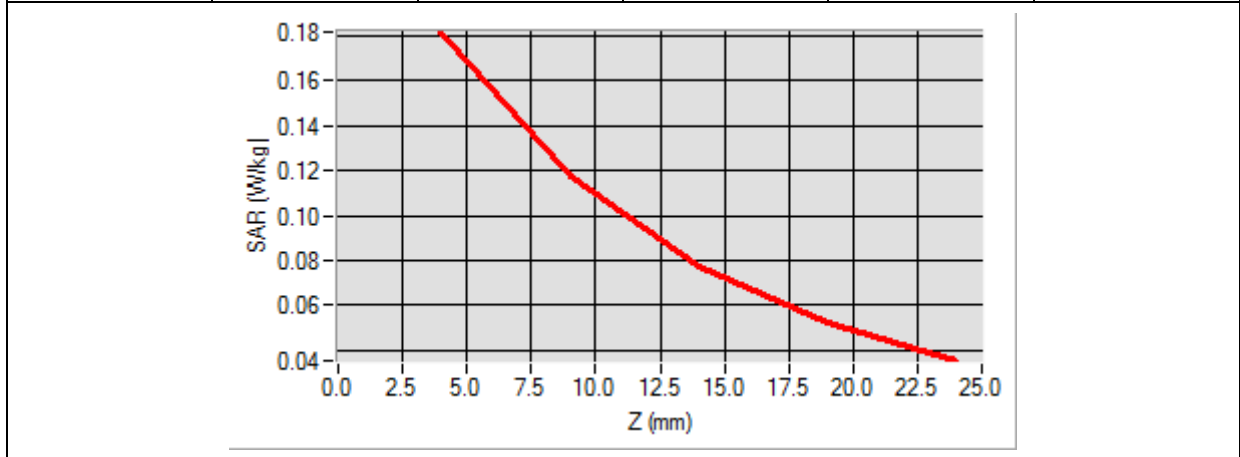

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 16

Type: Phone measurement (Complete)

Date of measurement: 07/01/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results

### High Band SAR (Channel 13)

<b>Frequency (MHz)</b>	2472.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

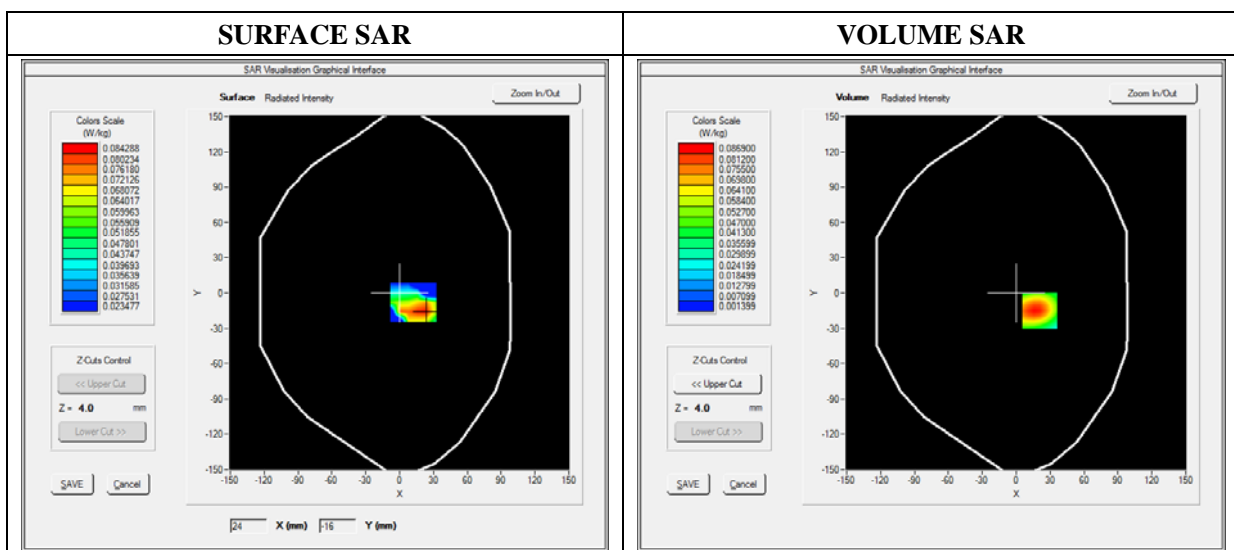




Maximum location: X=21.00, Y=-15.00

SAR 10g (W/Kg)	0.037678
SAR 1g (W/Kg)	0.082678

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0854	0.0300	0.0094	0.0034

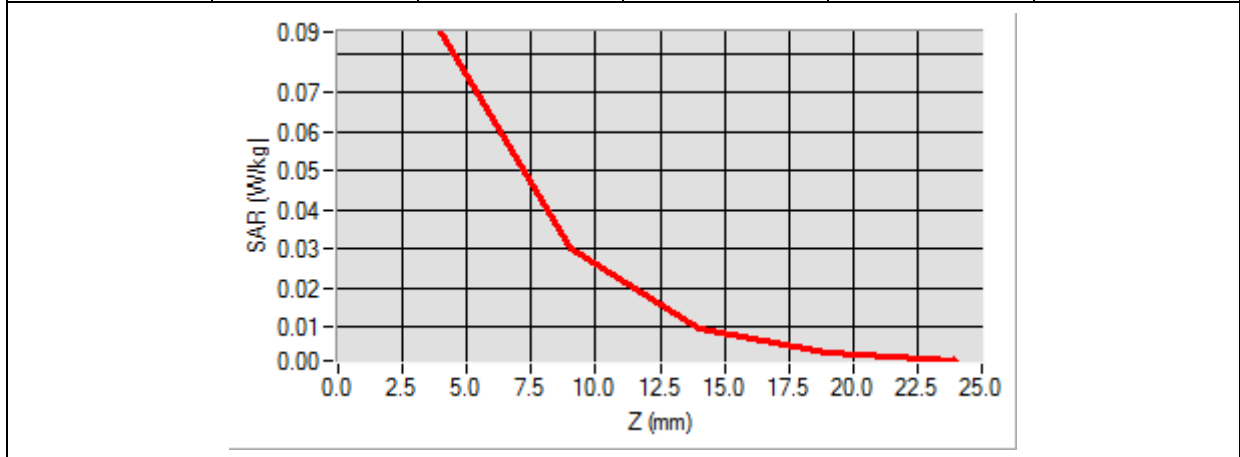

<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>

# MEASUREMENT 17

Type: Phone measurement (Complete)

Date of measurement: 07/01/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Top Side
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results

### High Band SAR (Channel 13)


<b>Frequency (MHz)</b>	2472.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

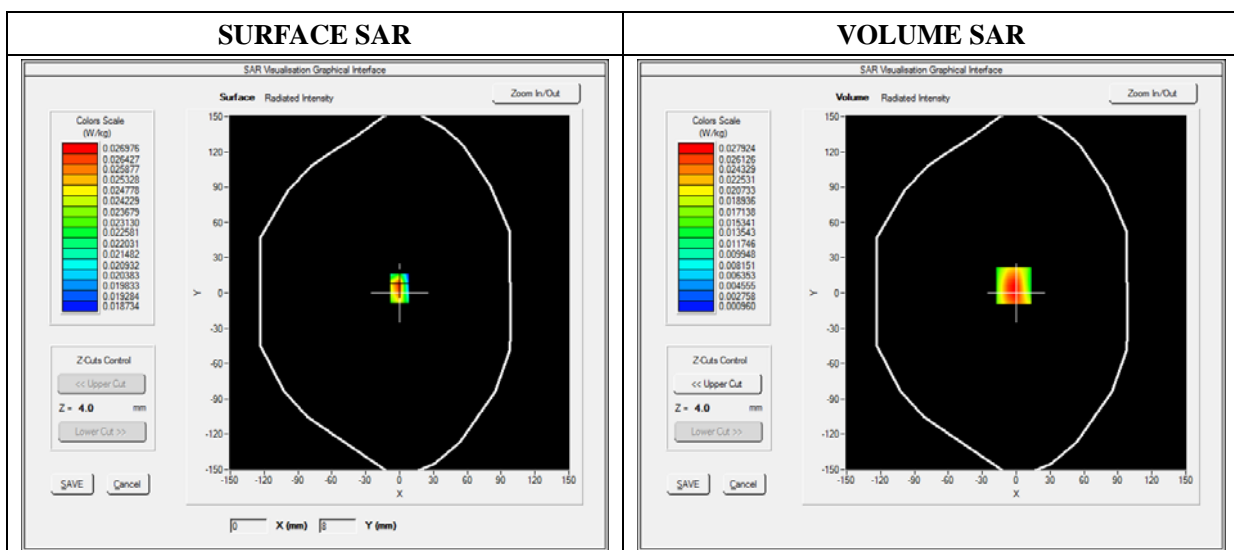

Maximum location: X=-2.00, Y=6.00

SAR 10g (W/Kg)	0.012549
SAR 1g (W/Kg)	0.027194

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0279	0.0085	0.0025	0.0014

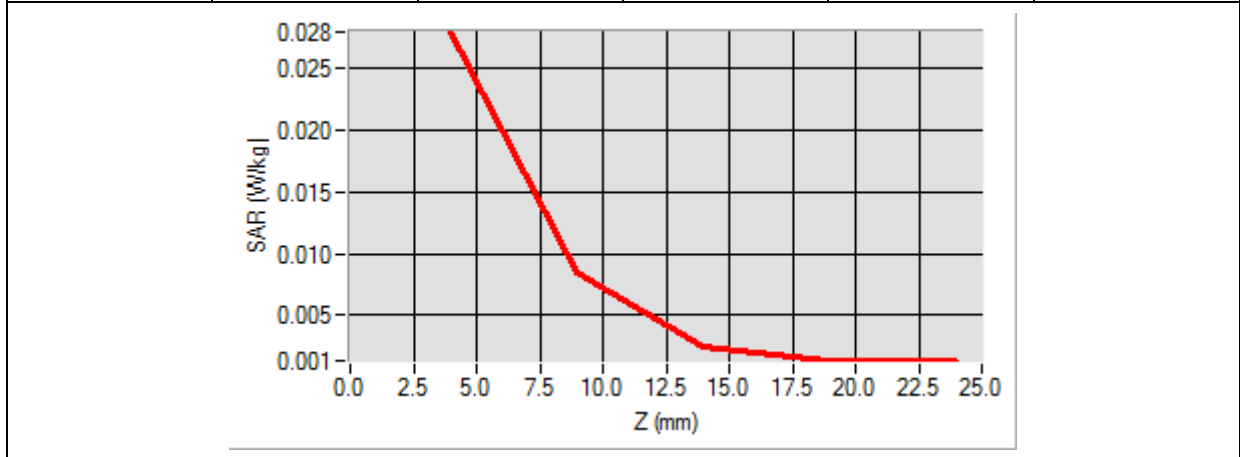

3D screen shot	Hot spot position

# MEASUREMENT 18

Type: Phone measurement (Complete)

Date of measurement: 07/01/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Left Side
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results

### High Band SAR (Channel 13)


<b>Frequency (MHz)</b>	2472.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

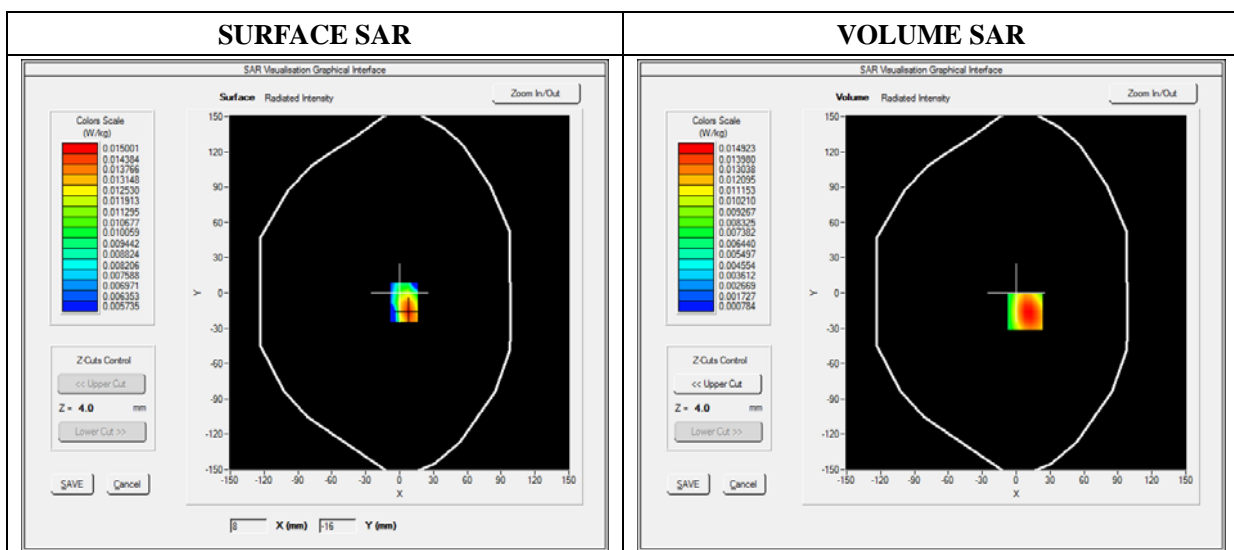

Maximum location: X=8.00, Y=-16.00

SAR 10g (W/Kg)	0.007123
SAR 1g (W/Kg)	0.014803

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0148	0.0049	0.0018	0.0012

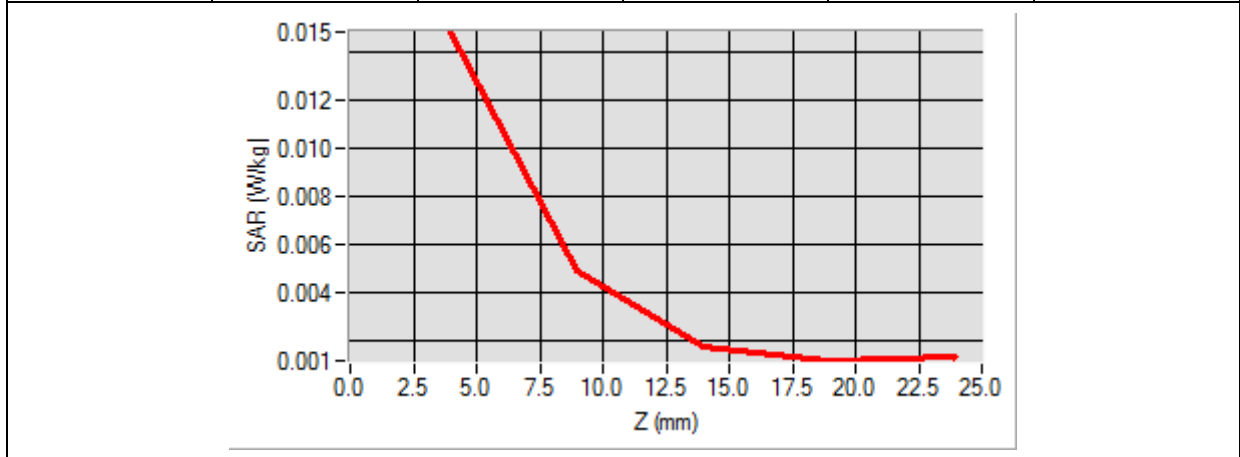

3D screen shot	Hot spot position

# MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 07/01/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results

### High Band SAR (Channel 13)


<b>Frequency (MHz)</b>	2472.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

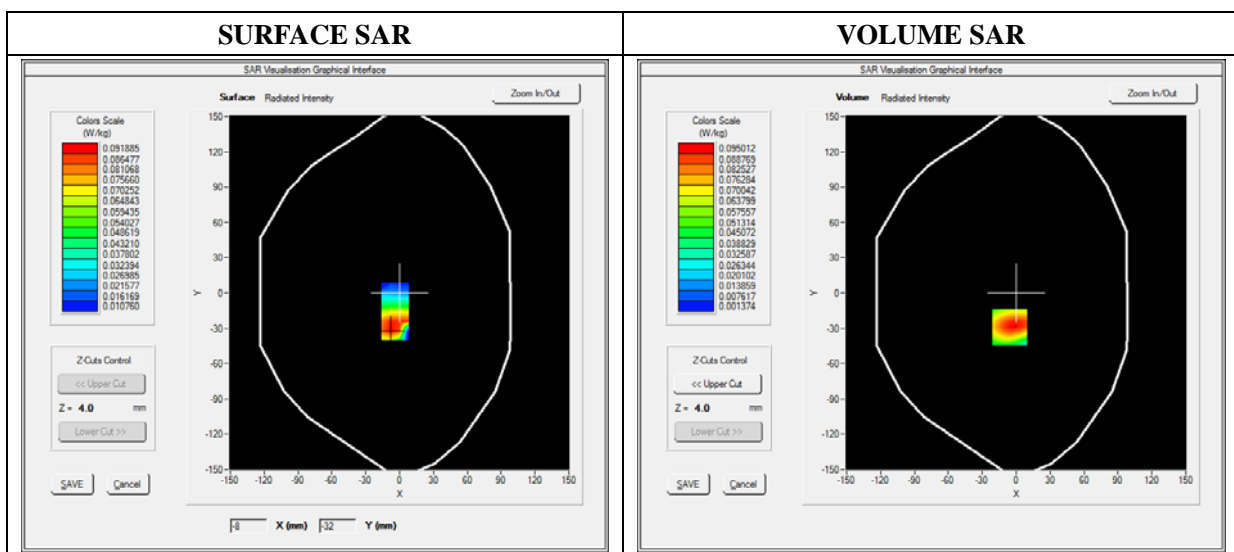

Maximum location: X=-6.00, Y=-29.00

SAR 10g (W/Kg)	0.042542
SAR 1g (W/Kg)	0.091555

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0948	0.0340	0.0108	0.0038

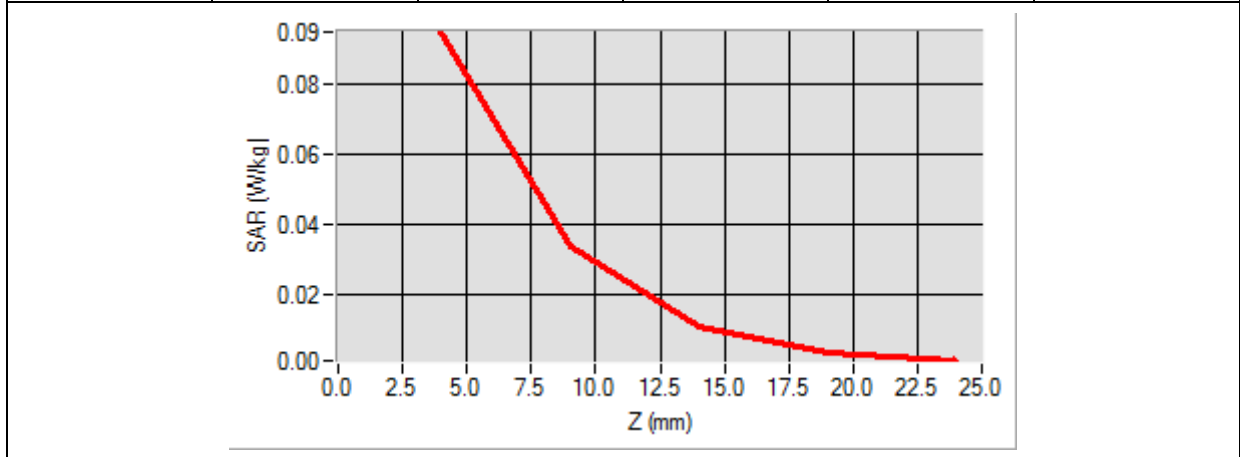

<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>

# MEASUREMENT 20

Type: Phone measurement (Complete)

Date of measurement: 07/01/2014

Measurement duration: 12 minutes 3 seconds

E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 2014/03/21


## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front(Body-worn)
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1.00 (Crest factor: 1.00)

## B. SAR Measurement Results

### High Band SAR (Channel 13)

<b>Frequency (MHz)</b>	2472.000000
<b>Relative Permittivity (real part)</b>	50.201263
<b>Conductivity (S/m)</b>	1.902136
<b>Power Variation (%)</b>	0.551121
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

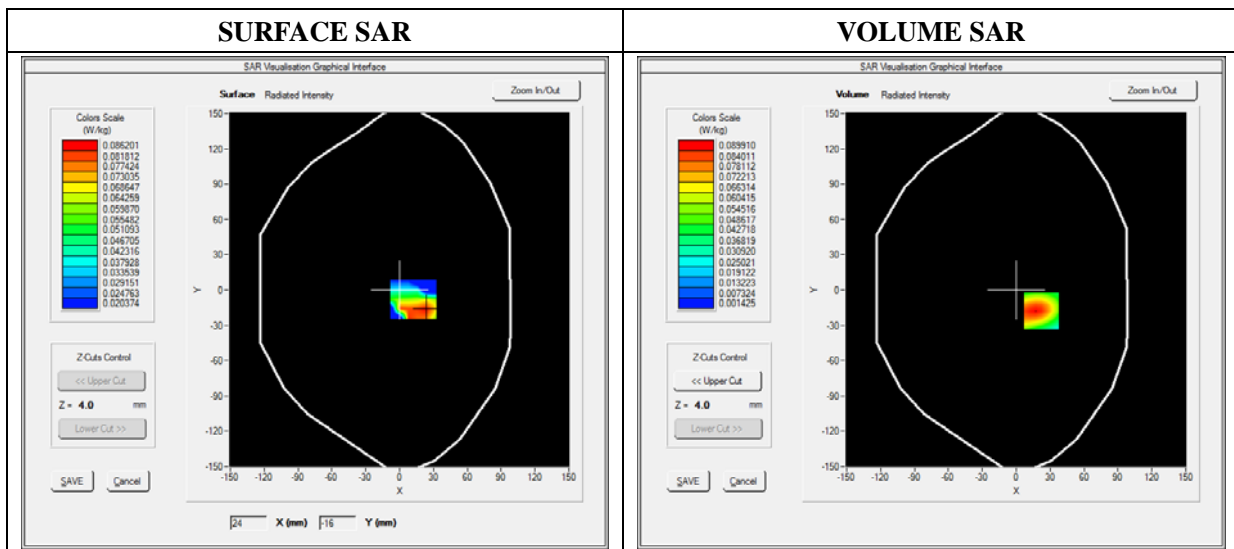




Maximum location: X=22.00, Y=-18.00

SAR 10g (W/Kg)	0.039357
SAR 1g (W/Kg)	0.085752

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0871	0.0303	0.0094	0.0034

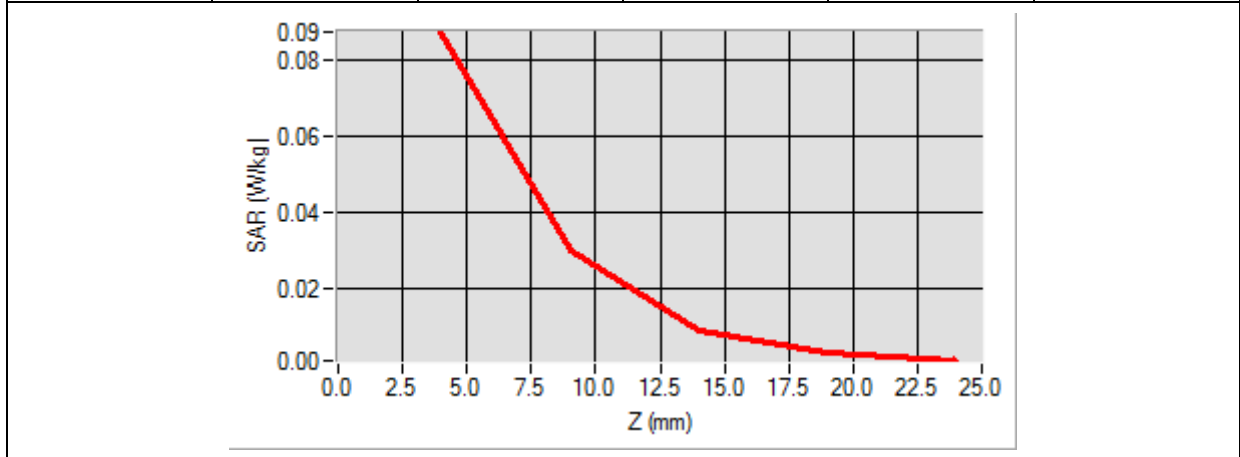

<b>3D screen shot</b>	<b>Hot spot position</b>

## Annex C. EUT Photos

---


### EUT View Front



### EUT View Back



**Antenna View**

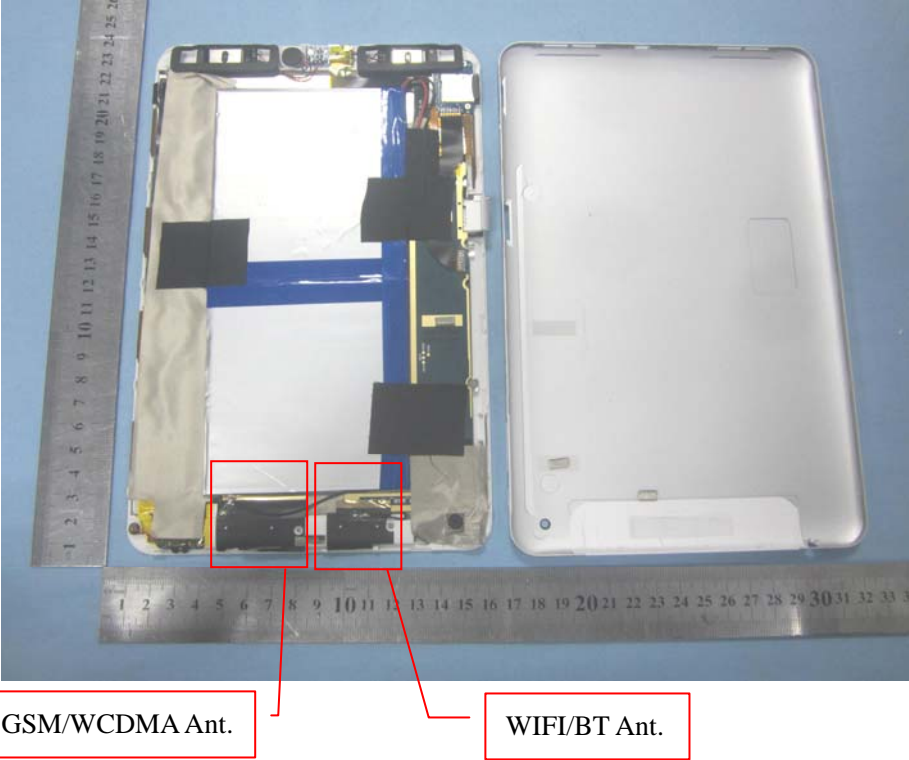

## Annex D. Test Setup Photos

---

### Test View

**Body Back**




**Left side**



**Top side**



**Bottom Side**

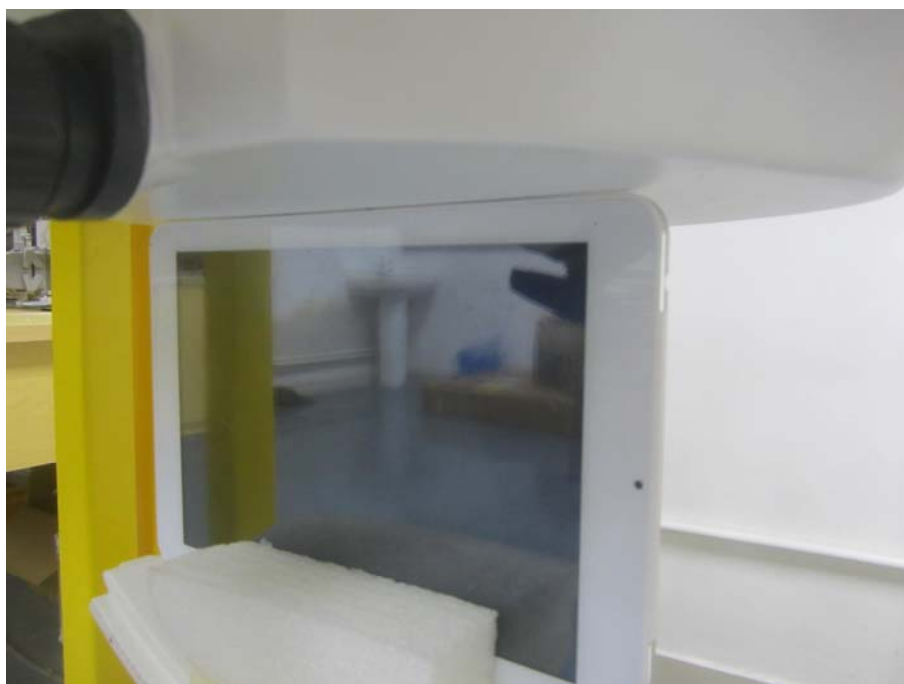

**Body-worn**



## **Annex E. Calibration Certificate**

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***