



Rev: None

## **FCC RADIO TEST REPORT** FCC ID: 2ACNGDA701

**Product**: TABLET PC

**Trade Name:** ENERGY SISTEM

Model Name: DA701

Serial Model: Neo 2 Lite, DA7011, DA7012, DA7013, DA7014,

DA7015, DA7016, DA7017, DA7018

## **Prepared for**

Colmei Technology International Limited 2nd Floor, 8th Block, Dongfangming Industry park, 33rd Baoan District, Shenzhen

## Prepared by

Asia Institute Technology (Dongguan) Limited No. 22, Jin QianLing Street 3, JiTiGang Village, HuangJiang Town, DongGuan, GuangDong, China.



Report No.: E-F1501006 Page 2 of 56

Rev: None

#### **TEST RESULT CERTIFICATION**

Applicant's name	Colmei Technology International Limited
Address	2nd Floor, 8th Block, Dongfangming Industry park, 33rd Baoan District, Shenzhen
Manufacture's Name	Shenzhen Crave Communication Co.,LTD
Address	3rd Floor, 8th Block, Dongfangming Industry Park, 33rd Baoan District, Shenzhen
Product description	
Product name	TABLET PC
Model and/or type reference	DA701
Additional Model	Neo 2 Lite, DA7011, DA7012, DA7013, DA7014, DA7015, DA7016 DA7017, DA7018
Standards	FCC Part15.247

This device described above has been tested by ATT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ATT, this document may be altered or revised by ATT, personal only, and shall be noted in the revision of the document.

Test procedure ...... ANSI C63.4-2014

Testing Engineer : Seal-Cher

(Seal Chen)

Technical Manager :

(Jackie Deng)



Report No.: E-F1501006 Page 3 of 56 Rev: None

## **Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	_
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS 3.1.6 TEST RESULTS	15 15
	_
3.2 RADIATED EMISSION MEASUREMENT 3.2.1 RADIATED EMISSION LIMITS	18 18
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	19
3.2.4 TEST SETUP	20
3.2.5 EUT OPERATING CONDITIONS	21
3.2.6 TEST RESULTS (BELOW 30 MHZ)	22
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	23
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . NUMBER OF HOPPING CHANNEL	34
4.1 APPLIED PROCEDURES / LIMIT	34
4.1.1 TEST PROCEDURE	34
4.1.2 DEVIATION FROM STANDARD 4.1.3 TEST SETUP	34 34
4.1.4 EUT OPERATION CONDITIONS	34 34



Report No.: E-F1501006 Page 4 of 56 Rev: None

## **Table of Contents**

	Page
4.1.5 TEST RESULTS	35
5 . AVERAGE TIME OF OCCUPANCY	36
5.1 APPLIED PROCEDURES / LIMIT	36
5.1.1 TEST PROCEDURE	36
5.1.2 DEVIATION FROM STANDARD	36
5.1.3 TEST SETUP	37
5.1.4 EUT OPERATION CONDITIONS	37
5.1.5 TEST RESULTS	38
6. HOPPING CHANNEL SEPARATION MEASUREMENT	40
6.1 APPLIED PROCEDURES / LIMIT	40
6.1.1 TEST PROCEDURE	40
6.1.2 DEVIATION FROM STANDARD	40
6.1.3 TEST SETUP	40
6.1.4 EUT OPERATION CONDITIONS 6.1.5 TEST RESULTS	40 41
7 . BANDWIDTH TEST	43
7.1 APPLIED PROCEDURES / LIMIT	43
7.1.1 TEST PROCEDURE	43
7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP	43 43
7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS	43
7.1.5 TEST RESULTS	44
8 . PEAK OUTPUT POWER TEST	46
8.1 APPLIED PROCEDURES / LIMIT	46
8.1.1 TEST PROCEDURE	46
8.1.2 DEVIATION FROM STANDARD	46
8.1.3 TEST SETUP	46
8.1.4 EUT OPERATION CONDITIONS	46
8.1.5 TEST RESULTS	47
9 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	49
9.1 DEVIATION FROM STANDARD	49
9.2 TEST SETUP	49
9.3 EUT OPERATION CONDITIONS	50
9.4 TEST RESULTS	51



# Report No.: E-F1501006 Page 5 of 56 Rev: None

#### **Table of Contents**

	Page
10 . ANTENNA REQUIREMENT	54
10.1 STANDARD REQUIREMENT	54
10.2 EUT ANTENNA	54
11 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	55



Page 6 of 56 Rev: None

#### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C					
Standard Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	PASS			
15.247(a)(1)	Hopping Channel Separation	PASS			
15.247(b)(1)	Peak Output Power	PASS			
15.247(c)	Radiated Spurious Emission	PASS			
15.247(a)(iii)	Number of Hopping Frequency	PASS			
15.247(a)(iii)	Dwell Time	PASS			
15.247(a)(1)	Bandwidth	PASS			
15.205	Band Edge Emission	PASS			
15.203	Antenna Requirement	PASS			

#### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



Report No.: E-F1501006 Page 7 of 56

Rev: None

#### 1.1 TEST FACILITY

Shenzhen Asia Test Technology Co.,Ltd.

7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District, Shenzhen, China

FCC Registration No.: 348715; IC Registration No.: 12198A

#### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95 %  $^{\circ}$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

Page 8 of 56 Rev: None

#### 2. GENERAL INFORMATION

#### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	TABLET PC			
Model Name	DA701			
Serial Model	Neo 2 Lite, DA7011, DA7015, DA7016, DA70	, DA7012, DA7013, DA7014, 017, DA7018		
Model Difference	All models are identical	except model name.		
	The EUT is a TABLET F	PC		
	Operation Frequency:	2402~2480 MHz		
	Modulation Type:	BT(1Mbps): GFSK		
	Bit Rate of Transmitter	1Mbps		
	Number Of Channel	79 CH		
	Antenna Designation:	Please see Note 3.		
Product Description	Output	BT(3.0):1.44 dBm PK		
	Power(Conducted):			
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered a ITE/Computing Device. More details of EUT technic specification, please refer to the User's Manual.			
Channel List	Please refer to the Note	2.		
Ratings	5.0Vdc (for charge)			
<u> </u>	3.7Vdc (Li-ion battery) M/N:JML050200A			
Adapter	Input:AC100-240V, 50/60 Hz, 0.3A MAX.			
πααριοι	Output:DC 5V, 2A			
Battery	DC 3.7V, 2200mAh			

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463



Report No.: E-F1501006 Page 9 of 56 Rev: None

08         2410         35         2437         62         2464           09         2411         36         2438         63         2465           10         2412         37         2439         64         2466           11         2413         38         2440         65         2467           12         2414         39         2441         66         2468           13         2415         40         2442         67         2469           14         2416         41         2443         68         2470           15         2417         42         2444         69         2471           16         2418         43         2445         70         2472           17         2419         44         2446         71         2473           18         2420         45         2447         72         2474           19         2421         46         2448         73         2475           20         2422         47         2449         74         2476           21         2423         48         2450         75         2477						
10       2412       37       2439       64       2466         11       2413       38       2440       65       2467         12       2414       39       2441       66       2468         13       2415       40       2442       67       2469         14       2416       41       2443       68       2470         15       2417       42       2444       69       2471         16       2418       43       2445       70       2472         17       2419       44       2446       71       2473         18       2420       45       2447       72       2474         19       2421       46       2448       73       2475         20       2422       47       2449       74       2476         21       2423       48       2450       75       2477         22       2424       49       2451       76       2478         23       2425       50       2452       77       2479         24       2426       51       2453       78       2480         25       24	08	2410	35	2437	62	2464
11       2413       38       2440       65       2467         12       2414       39       2441       66       2468         13       2415       40       2442       67       2469         14       2416       41       2443       68       2470         15       2417       42       2444       69       2471         16       2418       43       2445       70       2472         17       2419       44       2446       71       2473         18       2420       45       2447       72       2474         19       2421       46       2448       73       2475         20       2422       47       2449       74       2476         21       2423       48       2450       75       2477         22       2424       49       2451       76       2478         23       2425       50       2452       77       2479         24       2426       51       2453       78       2480         25       2427       52       2454	09	2411	36	2438	63	2465
12     2414     39     2441     66     2468       13     2415     40     2442     67     2469       14     2416     41     2443     68     2470       15     2417     42     2444     69     2471       16     2418     43     2445     70     2472       17     2419     44     2446     71     2473       18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	10	2412	37	2439	64	2466
13     2415     40     2442     67     2469       14     2416     41     2443     68     2470       15     2417     42     2444     69     2471       16     2418     43     2445     70     2472       17     2419     44     2446     71     2473       18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	11	2413	38	2440	65	2467
14       2416       41       2443       68       2470         15       2417       42       2444       69       2471         16       2418       43       2445       70       2472         17       2419       44       2446       71       2473         18       2420       45       2447       72       2474         19       2421       46       2448       73       2475         20       2422       47       2449       74       2476         21       2423       48       2450       75       2477         22       2424       49       2451       76       2478         23       2425       50       2452       77       2479         24       2426       51       2453       78       2480         25       2427       52       2454       2454       78       2480	12	2414	39	2441	66	2468
15     2417     42     2444     69     2471       16     2418     43     2445     70     2472       17     2419     44     2446     71     2473       18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	13	2415	40	2442	67	2469
16     2418     43     2445     70     2472       17     2419     44     2446     71     2473       18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	14	2416	41	2443	68	2470
17     2419     44     2446     71     2473       18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	15	2417	42	2444	69	2471
18     2420     45     2447     72     2474       19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	16	2418	43	2445	70	2472
19     2421     46     2448     73     2475       20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	17	2419	44	2446	71	2473
20     2422     47     2449     74     2476       21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	18	2420	45	2447	72	2474
21     2423     48     2450     75     2477       22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	19	2421	46	2448	73	2475
22     2424     49     2451     76     2478       23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	20	2422	47	2449	74	2476
23     2425     50     2452     77     2479       24     2426     51     2453     78     2480       25     2427     52     2454	21	2423	48	2450	75	2477
24     2426     51     2453     78     2480       25     2427     52     2454	22	2424	49	2451	76	2478
25 2427 52 2454	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
26 2428 53 2455	25	2427	52	2454		
	26	2428	53	2455		

#### 3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPC Antenna	N/A	0	BT Antenna



Report No.: E-F1501006 Page 10 of 56

Rev: None

#### 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Link Mode

	For Conducted Emission
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission			
Final Test Mode	Description		
Mode 1	CH00		
Mode 2	CH39		
Mode 3	CH78		

#### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.
- (3) Measurements are performed according to the Public Notice-DA 00-705.

#### 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


Test software Version	Test program: Broadcom			
Frequency	2402 MHz	2441 MHz	2480 MHz	
Parameters(1Mbps)	DEF	DEF	DEF	



Report No.: E-F1501006 Page 11 of 56 Rev: None

#### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

CE



RE

E-1 **EUT** 



Report No.: E-F1501006 Page 12 of 56

Rev: None

## 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	TABLET PC	ENERGY SISTEM	DA701	N/A	EUT
E-2	Adapter	N/A	JML050200A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8m	

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length\_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



Report No.: E-F1501006 Page 13 of 56 Rev: None

## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Radia	Radiation lest equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-101 80	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619. 05	2014.07.06	2015.07.05	1 year
12	Test Receiver	R&S	FSU	550062	2014.06.07	2015.06.06	1 year
13	Cable 30-1000MHz	R&S	ATT-R01	201309R00 1	2014.06.08	2015.06.07	1 year
14	Cable 1-26.5GHz	R&S	ATT-R02	201309R04 8	2014.06.08	2015.06.07	1 year

Conduction Test equipment

CONG	Conduction rest equipment							
Item	Kind of Equipment	Manufactu rer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period	
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year	
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year	
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year	
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year	
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year	
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year	
7	Cable 0.009-30MHz	R&S	ATT-C01	201309C00 6	2014.06.08	2015.06.07	1 year	

Report No.: E-F1501006 Page 14 of 56

Page 14 of 5 Rev: None

#### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

#### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard	
FREQUENCT (MITZ)	Quasi-peak	Average	Quasi-peak	Average	Stariuaru	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

#### Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting	
Attenuation	10 dB	
Start Frequency	0.15 MHz	
Stop Frequency	30 MHz	
IF Bandwidth	9 kHz	



Page 15 of 56 Rev: None


#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.1.4 TEST SETUP

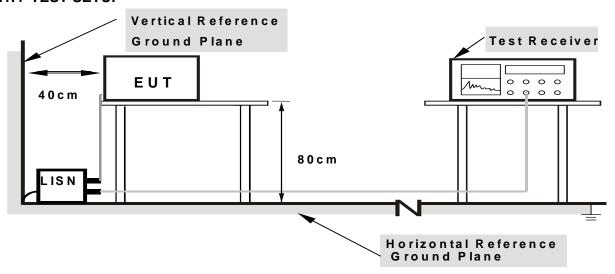

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80

from other units and other metal planes

#### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 3.1.6 TEST RESULTS




Report No.: E-F1501006 Page 16 of 56 Rev: None


EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC 120V/60Hz	Test Mode:	4

Freq.	Reading	Factor	Measurement	Limit	Over	Detector
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	Detector
0.3345	20.11	10.42	30.53	59.35	-28.82	QP
0.3345	16.57	10.42	26.99	49.25	-22.26	AVG
0.8061	24.59	10.41	35	56	-21	QP
0.8061	23.45	10.41	33.86	46	-12.14	AVG
6.0297	33.84	10.66	44.5	60	-15.5	QP
6.0297	21.21	10.66	31.87	50	-18.13	AVG

## Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.
- 3. N/A means All Data have pass Limit

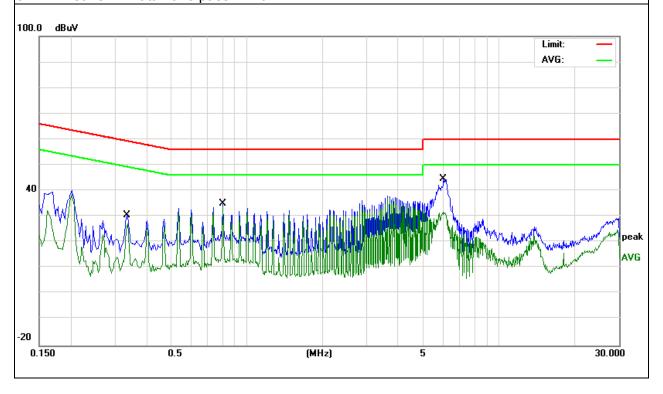






EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	N
LIEST VOITAGE .	DC 5V from adapter AC 120V/60Hz	Test Mode :	4

Freq.	Reading	Factor	Measurement	Limit	Over	Detector
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	Detector
0.202	28.77	10.44	39.21	63.52	-24.31	QP
0.202	27.38	10.44	37.82	53.52	-15.7	AVG
0.8059	28.67	10.41	39.08	56	-16.92	QP
0.8059	27.33	10.41	37.74	46	-8.26	AVG
4.7579	20.29	10.64	30.93	46	-15.07	AVG
6.1897	31.63	10.66	42.29	60	-17.71	QP

#### Remark:

- All readings are Quasi-Peak and Average values.
   Factor = Insertion Loss + Cable Loss.
   N/A means All Data have pass Limit

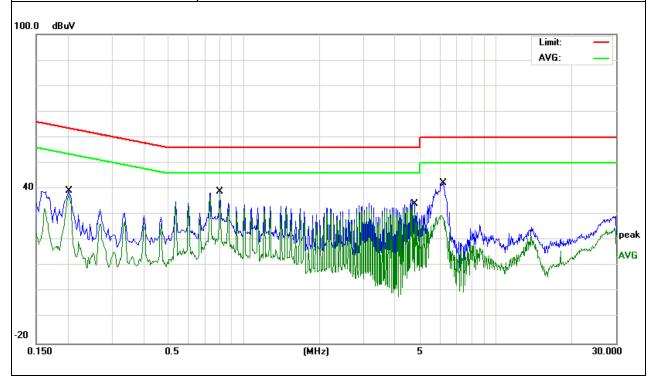



Report No.: E-F1501006 Page 18 of 56

Rev: None

#### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

DO TOTIOWOO.		
Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (emission in restricted	4 MHz / 4 MHz for Dook 4 MHz / 40Hz for Average
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.



Report No.: E-F1501006 Page 19 of 56

Rev: None

c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: E-F1501006 Page 20 of 56


Rev: None

#### 3.2.4 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

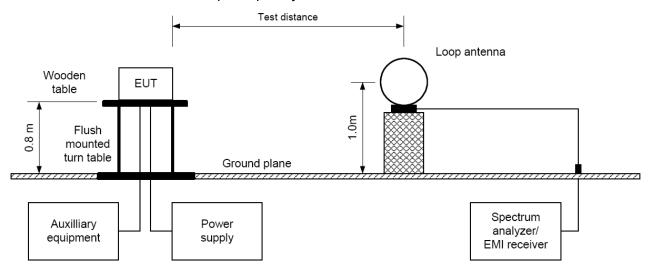


## (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

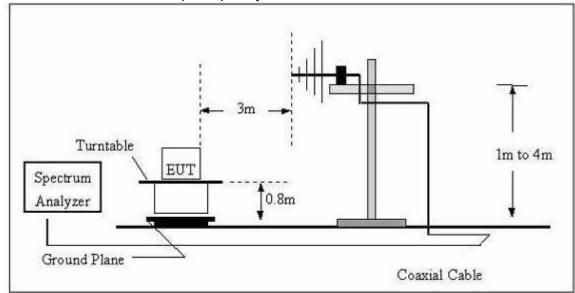



Page 21 of 56 Rev: None

## (C) Radiated Emission Test-Up Frequency Above 1GHz

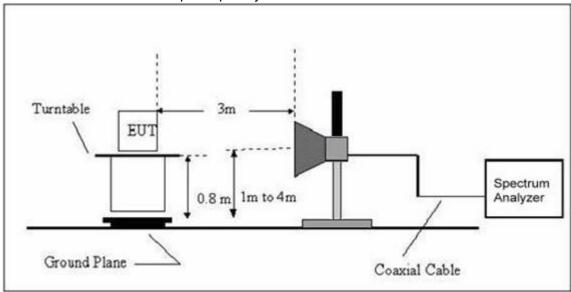

#### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Page 22 of 56 Rev: None

## 3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>20</b> ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				Р
				Р

#### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =20 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Page 23 of 56 Rev: None

## 3.2.7 TEST RESULTS (BETWEEN 30M - 1000 MHZ)

EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>24</b> ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	TX 2402
Test Voltage :	DC 3.7V		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	92.1388	22.14	9.64	31.78	43.5	-11.72	QP
V	150.0107	20.24	11.78	32.02	43.5	-11.48	QP
V	276.37	17.58	14.62	32.2	46	-13.8	QP
V	360.4476	22.38	15.57	37.95	46	-8.05	QP
V	362.75	16.94	17.99	34.93	46	-11.07	QP
V	533.8318	18.81	21.99	40.8	46	-5.2	QP
Н	88.3421	23.3	9.12	32.42	43.5	-11.08	QP
Н	185.788	21.56	9.26	30.82	43.5	-12.68	QP
Н	221.74	22.63	10.63	33.26	46	-12.74	QP
Н	361.35	22.73	13.82	36.55	46	-9.45	QP
Н	447.68	23.62	16.24	39.86	46	-6.14	QP
Н	531.57	18.38	21.56	39.94	46	-6.06	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit



Report No.: E-F1501006 Page 24 of 56 Rev: None

## 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	TABLET PC	Model Name :	DA701
Temperature:	<b>24</b> °C	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	TX
Test Voltage :	DC 3.7V		

		Low Ch	annel (2402 MHz)- <i>A</i>	Above 1G			
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect	Polar
(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	or Type	(H/V)
4804.31	58.63	-3.26	55.37	74	-18.63	Pk	Vertical
4804.35	43.27	-3.26	40.01	54	-13.99	Av	Vertical
7206.55	56.73	-2.31	54.42	74	-19.58	Pk	Vertical
7206.55	42.82	-2.31	40.51	54	-13.49	Av	Vertical
4804.28	54.83	-3.18	51.65	74	-22.35	Pk	Horizontal
4804.28	40.33	-3.18	37.15	54	-16.85	Av	Horizontal
7206.47	49.63	-2.28	47.35	74	-26.65	Pk	Horizontal
7206.47	37.17	-2.28	34.89	54	-19.11	Av	Horizontal
		Mid Ch	annel (2441 MHz)-A	Above 1G			
4882.11	59.63	-3.55	56.08	74	-17.92	Pk	Vertical
4882.11	44.27	-3.55	40.72	54	-13.28	Av	Vertical
7324.23	56.83	-0.76	56.07	74	-17.93	Pk	Vertical
7324.23	42.83	-0.76	42.07	54	-11.93	Av	Vertical
4882.46	54.28	-3.82	50.46	74	-23.54	Pk	Horizontal
4882.46	40.83	-3.82	37.01	54	-16.99	Av	Horizontal
7324.72	48.29	-0.91	47.38	74	-26.62	Pk	Horizontal
7324.72	36.48	-0.91	35.57	54	-18.43	Av	Horizontal
		High Ch	nannel (2480MHz)-	Above 1G			
4960.14	58.74	-3.67	55.07	74	-18.93	Pk	Vertical
4960.14	46.83	-3.67	43.16	54	-10.84	Av	Vertical
7440.27	56.48	-0.73	55.75	74	-18.25	Pk	Vertical
7440.27	45.26	-0.73	44.53	54	-9.47	Av	Vertical
4960.46	53.28	-3.47	49.81	74	-24.19	Pk	Horizontal
4960.46	42.54	-3.47	39.07	54	-14.93	Av	Horizontal
7440.33	50.17	-0.54	49.63	74	-24.37	Pk	Horizontal
7440.33	40.56	-0.54	40.02	54	-13.98	Av	Horizontal





Report No.: E-F1501006 Page 25 of 56

Rev: None


## Conducted Spurious Emissions at Antenna Port:




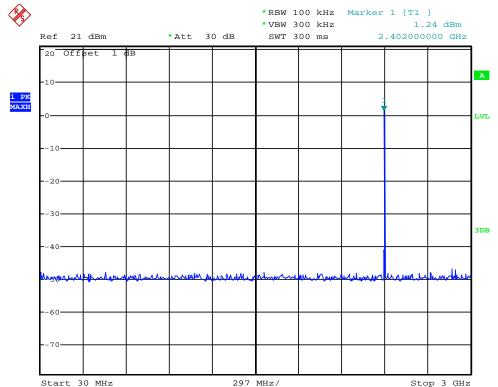







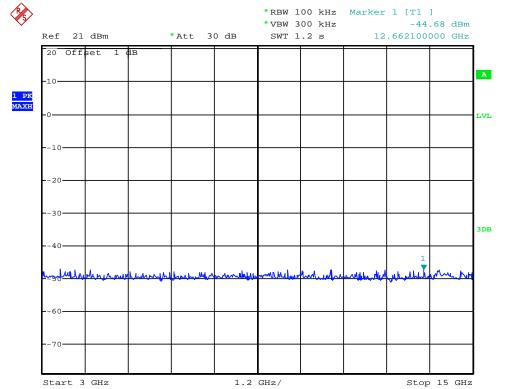








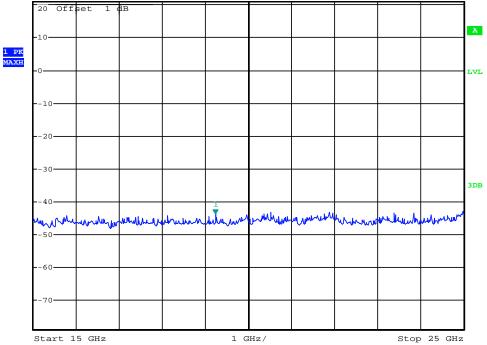









#### CH39

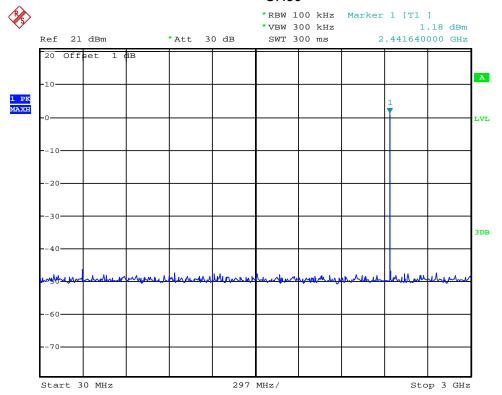




3DB

Stop 15 GHz




Start 3 GHz

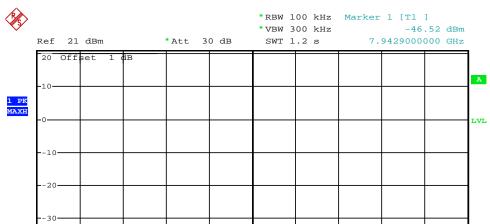


1.2 GHz/

Asia Institute Technology (Dongguan) Limited No. 22, JinQianLing Street 3, JiTiGang Village HuangJiang Town, DongGuan, GuangDong, China.






Start 15 GHz

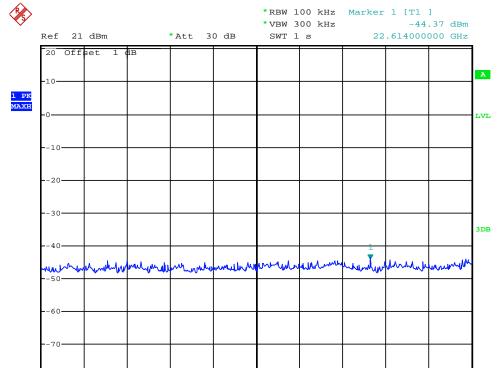


1 GHz/


Stop 25 GHz







#### CH78

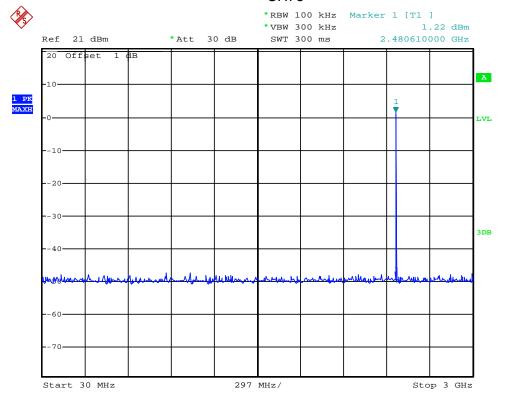






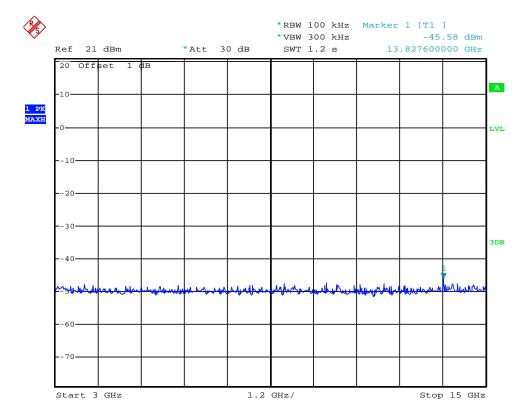





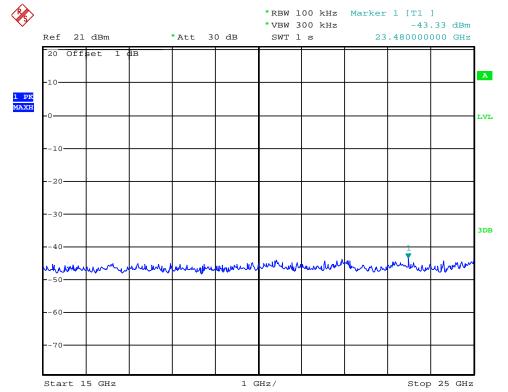



Page 34 of 56 Rev: None

#### 4. NUMBER OF HOPPING CHANNEL

#### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS	

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW =100kHz
VB	VBW ≥ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100kHz, VBW=300kHz, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




Page 35 of 56 Rev: None

#### 4.1.5 TEST RESULTS

EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>25</b> ℃	Relative Humidity:	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		



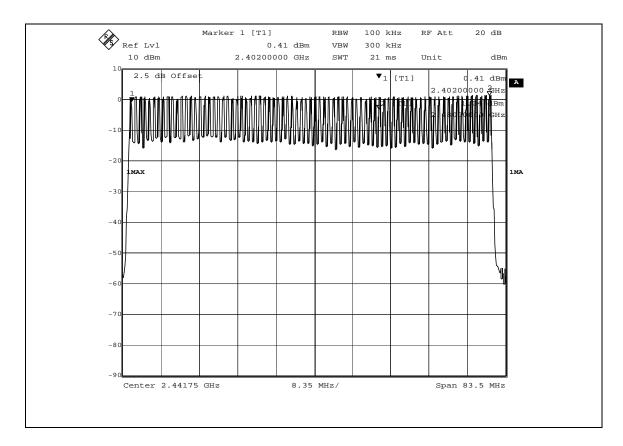



Page 36 of 56 Rev: None

#### 5. AVERAGE TIME OF OCCUPANCY

#### 5.1 APPLIED PROCEDURES / LIMIT

<u> </u>							
FCC Part15 (15.247) , Subpart C							
Section	Test Item	Limit	Frequency Range (MHz)	Result			
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS			

#### **5.1.1 TEST PROCEDURE**

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. A Period Time = (channel number)\*0.4
  - DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)
  - DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)
  - DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

#### **5.1.2 DEVIATION FROM STANDARD**

No deviation.



Report No.: E-F1501006 Page 37 of 56

Rev: None




## **5.1.4 EUT OPERATION CONDITIONS**




EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>25</b> ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Data Packet	Frequency	Plus Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2402MHz	0.403	0.129	0.4
DH3	2441MHz	1.665	0.276	0.4
DH5	2480MHz	2.944	0.314	0.4

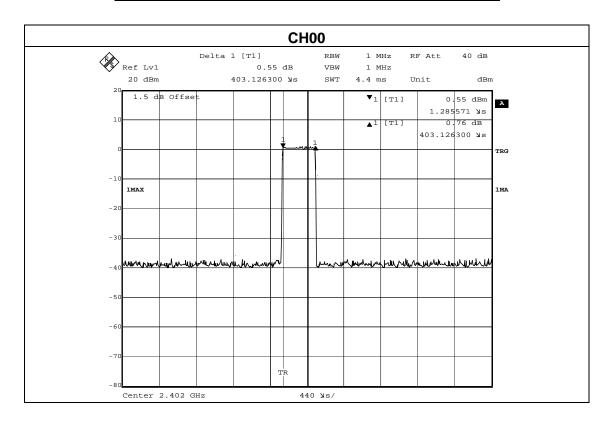



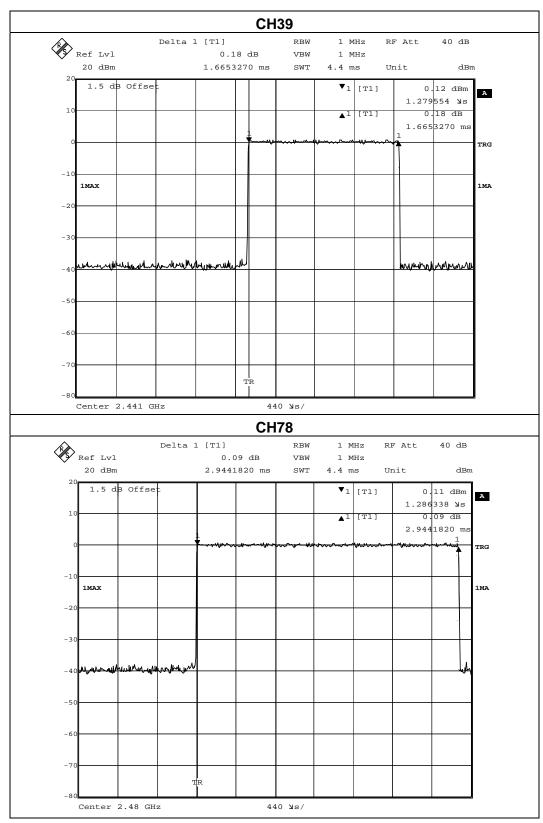



Report No.: E-F1501006 Page 40 of 56

Rev: None

## 6. HOPPING CHANNEL SEPARATION MEASUREMENT

#### **6.1 APPLIED PROCEDURES / LIMIT**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency	> Measurement Bandwidth or Channel Separation	
RBW	100KHz	
VBW	300KHz	
Detector	Peak	
Trace	Max Hold	
Sweep Time	ep Time Auto	


#### 6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### **6.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.




EUT:	TABLET PC	Model Name :	DA701	
Temperature :	<b>24</b> ℃	Relative Humidity:	60%	
Pressure:	012 hPa Test Voltage : DC 3.7V			
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)			


Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies

## Ch. Separation Limits: >20dB bandwidth

## CH00 -1Mbps

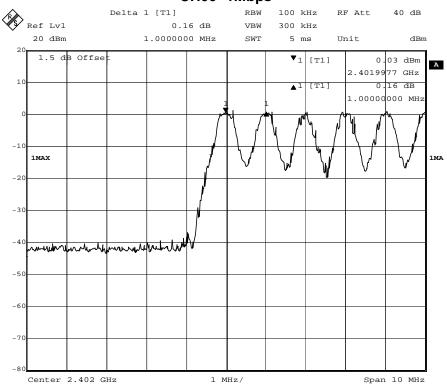



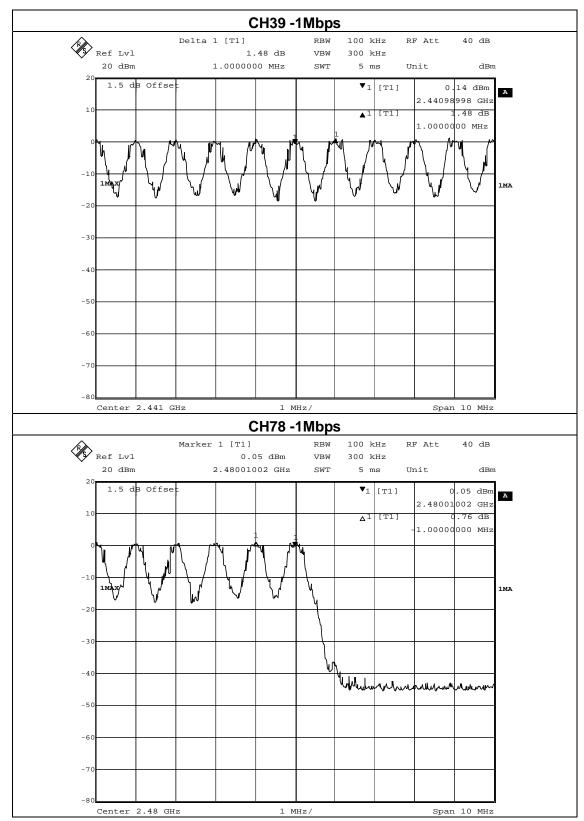



Report No.: E-F1501006 Page 43 of 56

Rev: None

#### 7. BANDWIDTH TEST

#### 7.1 APPLIED PROCEDURES / LIMIT

/				
FCC Part15 (15.247) , Subpart C				
Section Test Item Limit Frequency Range (MHz) Result				
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency > Measurement Bandwidth or Channel Separation	
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.


## 7.1.2 DEVIATION FROM STANDARD

No deviation.

## 7.1.3 TEST SETUP




#### 7.1.4 EUT OPERATION CONDITIONS






EUT:	TABLET PC	Model Name :	DA701
Temperature:	<b>25</b> ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78 <b>(1Mbps)</b>		

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	0.898	PASS
2441 MHz	0.808	PASS
2480 MHz	0.847	PASS

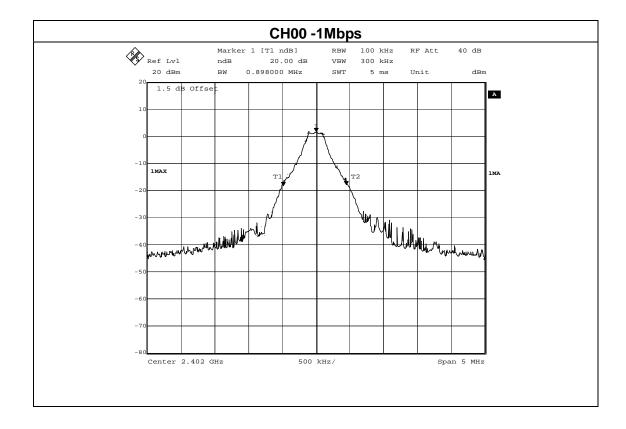



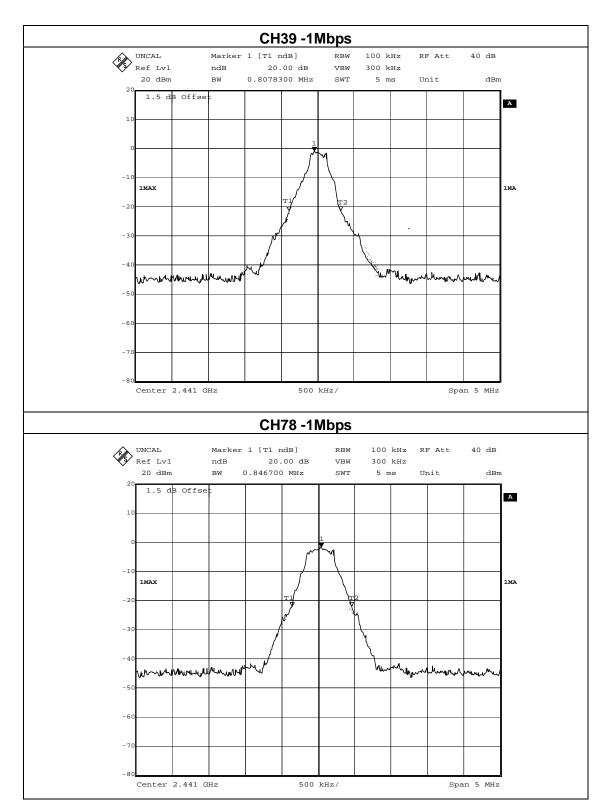



Report No.: E-F1501006

Page 46 of 56 Rev: None

#### 8. PEAK OUTPUT POWER TEST

#### 8.1 APPLIED PROCEDURES / LIMIT

71. 74. 1 Eleb 1 140 0 Eb 014. Eb 1				
FCC Part15 (15.247) , Subpart C				
Section Test Item Limit Frequency Range (MHz) Result				Result
15.247 (b)(i)	Peak Output Power	0.125 w or 1w	2400-2483.5	PASS

#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW > the 20 dB bandwidth of the emission being measured

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  $VBW \ge RBW$ 

Sweep = auto


Detector function = peak

Trace = max hold

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP




## **8.1.4 EUT OPERATION CONDITIONS**




EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>25</b> ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 (1M Mode)		

Note: The relevant measured result has the offset with cable loss already.

1Mbps			
Test Channel	Frequency	Peak Output Power	LIMIT
103t Orlannor	(MHz)	(dBm)	(dBm)
CH00	2402	1.42	30
CH39	2441	1.44	30
CH78	2480	1.42	30

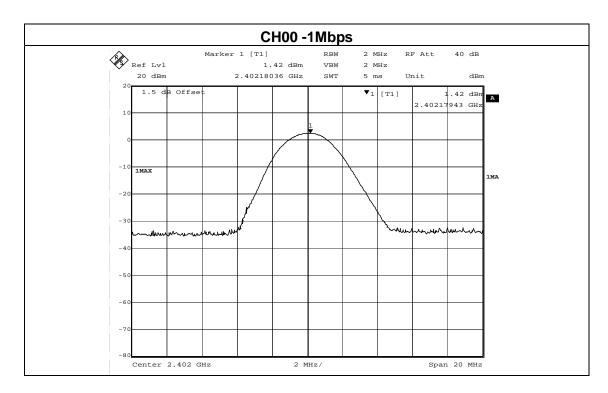



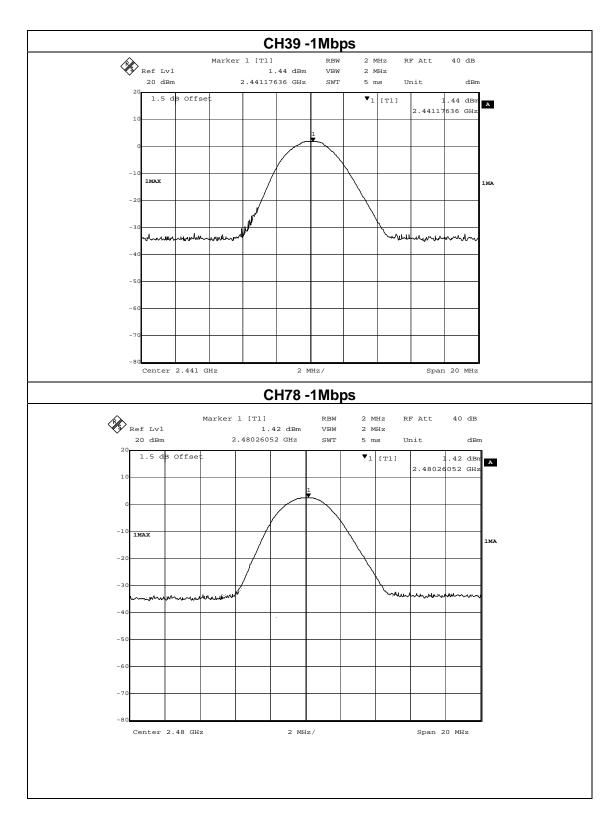



Report No.: E-F1501006 Page 49 of 56

Rev: None

# 9. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **TEST PROCEDURE**

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

## 9.1 DEVIATION FROM STANDARD

No deviation.

## 9.2 TEST SETUP





Report No.: E-F1501006 Page 50 of 56

Rev: None

## 9.3 EUT OPERATION CONDITIONS



Report No.: E-F1501006 Page 51 of 56

Rev: None


## 9.4 TEST RESULTS


EUT:	TABLET PC	Model Name :	DA701
Temperature :	<b>24</b> ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result						
1Mbps Non-hopping									
Left-band	49.86	20	Pass						
Right-band	50.87	20	Pass						
1Mbps hopping									
Left-band	47.65	20	Pass						
Right-band	49.41	20	Pass						

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	Comment		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)				
1Mbps Non-hopping									
2390	60.36	-13.06	47.3	54	-6.7	peak	Vertical		
2390	59.38	-13.06	46.32	54	-7.68	peak	Horizontal		
2483.5	59.19	-12.78	46.41	54	-7.59	peak	Vertical		
2483.5	58.84	-12.78	46.06	54	-7.94	peak	Horizontal		


**Note**: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average didn't record.







Rev: N

## DH5: Band Edge, Left Side

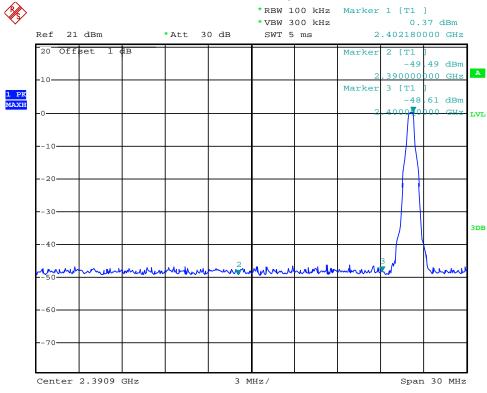


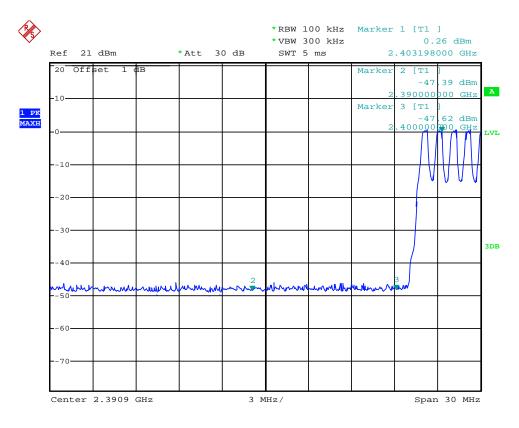






## DH5: Band Edge, Right Side

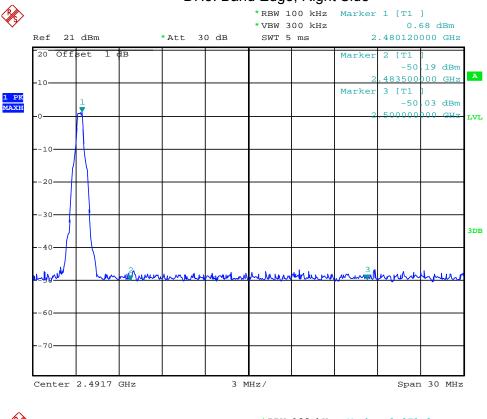

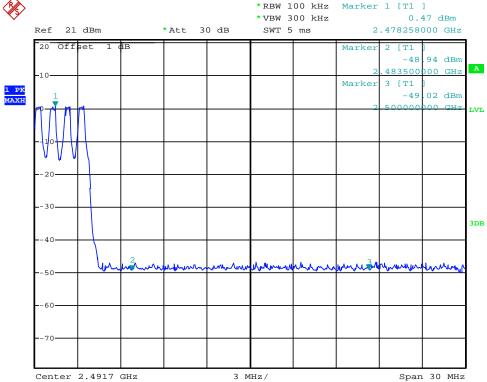



Report No.: E-F1501006 Page 54 of 56

Rev: None

## **10. ANTENNA REQUIREMENT**

## **10.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

## **10.2 EUT ANTENNA**

The EUT antenna is FCB antenna. It comply with the standard requirement.