FCC PART 15 CLASS B EMI MEASUREMENT AND TEST REPORT For

Colmei Technology International Limited

2nd Floor, 8th Block, Dongfangming Industry park, 33rd Baoan District, Shenzhen

FCC ID: 2ACNGQA910

June 26, 2014

This Report Concerns: **Equipment Type:** TABLET PC Original Report Lisse Chan Test Engineer: Lisa Chen Report No.: BSL14071012b Receive EUT June 12, 2014 / June 12- June 26, 2014 Date/Test Date: Reviewed By: Sky Zhang **BSL Testing Co.,LTD.** NO. 24, ZH Park, Nantou, Shenzhen, 518000 China Prepared By: Tel: 86-755-26508703 Fax: 86-755-26508703

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of BSL Testing Co.,LTD. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GEN	ERAL INFORMATION	3
	1.1.	Report information	3
2.	PRO	DUCT DESCRIPTION4	ļ
	2.1.	EUT Description2	
	2.2.	Block Diagram of EUT Configuration	
	2.3.	Support Equipment List	
	2.4.	Test Conditions	
	2.5.	TEST Results SUmmary5	5
3.	TEST	EQUIPMENT USED	Ó
4.	CON	DUCTED EMISSION TEST7	7
	4.1.	Measurement Uncertainty	7
	4.2.	Block Diagram of Test Setup	7
	4.3.	Test Standard	7
	4.4.	Conducted Emission Limit(Class B)	3
	4.5.	EUT Configuration on Test	
	4.6.	Operating Condition of EUT	3
	4.7.	Test Procedure	3
	4.8.	Test Result	3
5.	RAD	IATED EMISSION MEASUREMENT11	
	5.1.	Measurement Uncertainty	
	5.2.	Block Diagram of EUT Configuration	1
	5.3.	Test Standard	L
	5.4.	Radiated Emission Limit(Class B)	
	5.5.	EUT Configuration on Test	
	5.6.	Operating Condition of EUT	
	5.7.	Test Procedure	3
	5.8.	Test Result	3

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BSL approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BSL in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BSL therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BSL, unless the applicant has authorized BSL in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of

BSL Testing Co.,LTD.

(FCC Registered Test Site Number: 191509) on

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

The Test Site is constructed and calibrated to meet the FCC requirements.

BSL14071012b Page 3/16

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant : Colmei Technology International Limited

Address : 2nd Floor, 8th Block, Dongfangming Industry park, 33rd Baoan

District, Shenzhen

Manufacturer : Shenzhen Crave Communication Co.,LTD

Address : 3rd Floor, 8th Block, Dongfangming Industry Park, 33rd Baoan

District, Shenzhen


EUT Description : TABLET PC

Model Number : QA910,Neo 9,QA911,QA912,QA913,QA914,QA915,QA916

Power Supply : DC 5V By Adapter

The series products, model name: QA910,Neo 9,QA911,QA912,QA913,QA914,QA915,QA916 have the same circuit diagram,PCB layout, software, RF Module, Features and functionality. The differences are the model name, so, we select QA910 to test.

2.2. Block Diagram of EUT Configuration

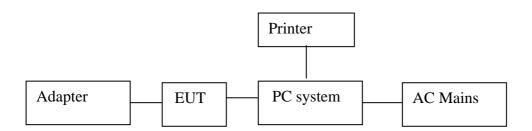

2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used (Y/N)
PC system	AM1830	N/A	Acer	Y
Printer	HP1020	N/A	HP	Y
Adapter	JML050200A	N/A	Shenzhen Crave Communicatio n Co.,LTD	Y

BSL14071012b Page 4/16

2.4. Test Conditions

Temperature: 23~27 C

Relative Humidity: 50~63 %

2.5. TEST Results SUmmary

Table 1 Test Results Summary

10010	1 000 110001100 0 00111111011						
FCC Part 15 CLASS B							
Test Items	Test Results						
Conducted disturbance	Pass						
Radiated disturbance	Pass						

Remark: "N/A" means "Not applicable."

BSL14071012b Page 5/16

3. TEST EQUIPMENT USED

EQUIPMENT/FACIL ITIES	MANUFACTURE R	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERV AL
3m Semi-Anechoic	Chengyu Electron	9 (L)*6	BSL086	Aug. 23 2013	1 Year
Chamber		(W)* 6 (H)			
EMI Test Receiver	Rohde & Schwarz	ESCI3	BSL001	Sep. 28 2013	1 Year
BiConiLog Antenna	Rohde & Schwarz	HL562	BSL009	Sep. 28 2013	1 Year
Double -ridged waveguide horn	Rohde & Schwarz	9120D	BSL008	Aug. 27 2013	1 Year
Horn Antenna	ETS-LINDGREN	3160	BSL072	Dec. 28 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL045	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL046	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL047	Aug. 27 2013	1 Year
Amplifier(100kHz-40G Hz)	R&S	SMR40	BSL007	Sep. 28 2013	1 Year
Band filter	Amindeon	82346	BSL049	Aug. 27 2013	1 Year
Active Loop Antenna	EMTES	EM15	BSL011	Sep. 28 2013	1 Year
Power Meter	R&S	NRVS	BSL052	Aug. 3, 2013	1 Year
Power Sensor	R&S	NRV-Z33	BSL053	Aug. 3, 2013	1 Year
Shielding Room	Chengyu Electron	7.0(L)x3.0(W)x3.0(H)	BSL085	Aug. 25 2013	1 Year
EMI Test Receiver	R&S	ESPI13	BSL002	Sep. 28 2013	1 Year
10dB Pulse Limita	R&S	N/A	BSL003	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
LISN	Rohde & Schwarz	ESH3-Y5	BSL005	Sep. 28 2013	1 Year
Coaxial Cable	Rohde & Schwarz	N/A	BSL048	Aug. 27 2013	1 Year
Spectrum analyzer	Rohde & Schwarz	FSP40	BSL049	Sep. 28 2013	1 Year

BSL14071012b Page 6/16


4. CONDUCTED EMISSION TEST

4.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is +2.88 dB.

4.2. Block Diagram of Test Setup

4.2.1.Block Diagram of connection between the EUT and the simulators

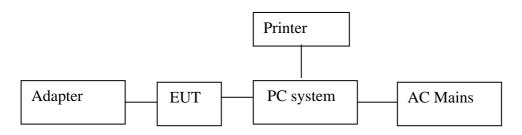

4.2.2.Test Setup Diagram

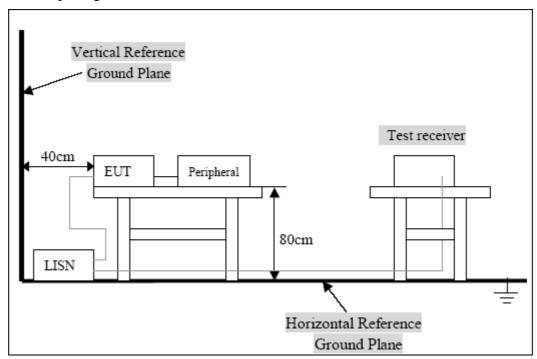

4.3. Test Standard

FCC Part 15 CLASS B: 2013

ANSI C63.4 2003

BSL14071012b Page 7/16

4.4. Conducted Emission Limit(Class B)

Frequency	Limits $dB(\mu V)$				
MHz	Quasi-peak Level	Average Level			
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*			
0.50 ~ 5.00	56	46			
5.00 ~ 30.00	60	50			

Notes: 1. *Decreasing linearly with logarithm of frequency.

4.5. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

4.6. Operating Condition of EUT

- 4.6.1. Setup the EUT and simulators as shown in Section 4.2.
- 4.6.2. Turn on the power of all equipments.
- 4.6.3.Let the EUT work in test mode (Connect to PC) and test it.


4.7. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

4.8. Test Result


Pass

BSL14071012b Page 8/16

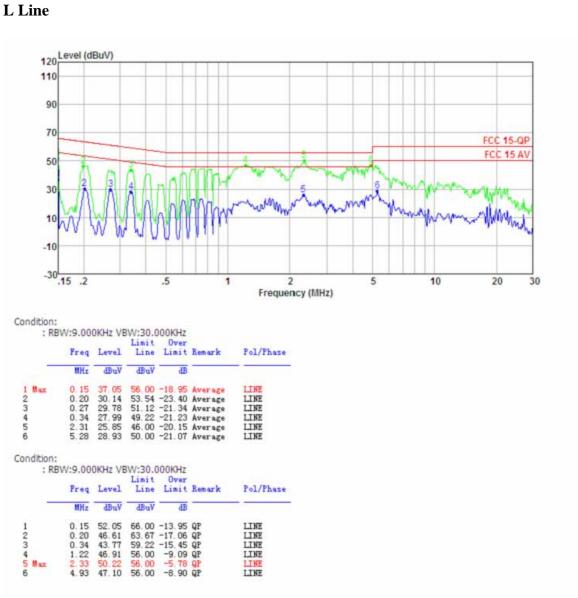

BSL14071012b Page 9/16

N Line

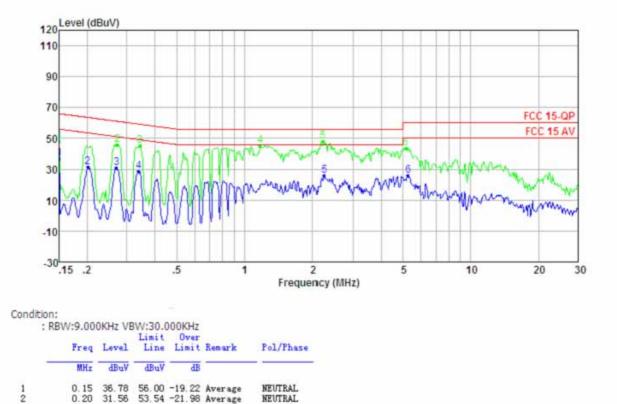

	Freq	Level	Limit	Limit	Remark	Pol/Phase
_	MHz	dBuV	dBuV	dB		-
1 2 3 4 5 Max	0.15 0.20 0.27 0.34	31.56 30.99 28.49	53.54 51.12 49.22	-21.98 -20.13 -20.73	Average Average Average Average	NEUTRAL NEUTRAL NEUTRAL NEUTRAL
6	2.24 5.28	25. 63 26. 10			Average Average	NEUTRAL NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz Limit Over

Freq	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dBuV	dB		*
0.15	47.87	66.00	-18.13	QP	NEUTRAL
0.27	45.84	61.03	-15.19	QP	NEUTRAL
0.34	45.10	59.13	-14.03	QP	NEUTRAL
1.17	45.35	56.00	-10.65	QP	NEUTRAL
2.21	48.23	56,00	-7.77	QP	NEUTRAL
5.17	43.75	60.00	-16.25	QP	NEUTRAL
	MHz 0. 15 0. 27 0. 34 1. 17 2. 21	MHz dBuV 0.15 47.87 0.27 45.84 0.34 45.10 1.17 45.35 2.21 48.23	MHz dBuV dBuV 0.15 47.87 66.00 0.27 45.84 61.03 0.34 45.10 59.13 1.17 45.35 56.00 2.21 48.23 56.00	MHz dBuV dBuV dB 0.15 47.87 66.00 -18.13 0.27 45.84 61.03 -15.19 0.34 45.10 59.13 -14.03 1.17 45.35 56.00 -10.65 2.21 48.23 56.00 -7.77	0.15 47.87 66.00 -18.13 QP 0.27 45.84 61.03 -15.19 QP 0.34 45.10 59.13 -14.03 QP 1.17 45.35 56.00 -10.65 QP 2.21 48.23 56.00 -7.77 QP

BSL14071012b Page 10/16


5. RADIATED EMISSION MEASUREMENT

5.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is +5.10 dB.

5.2. Block Diagram of EUT Configuration

5.2.1.Block Diagram of connection between the EUT and the simulators

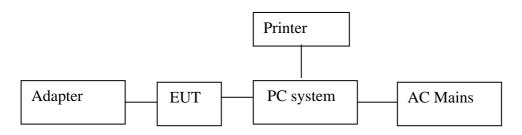

5.2.2.Semi-anechoic Chamber Test Setup Diagram

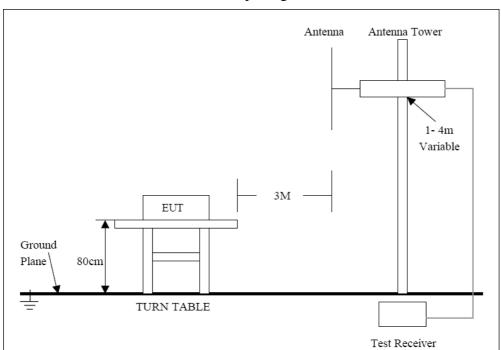

5.3. Test Standard

FCC Part 15 CLASS B ANSI C63.4 2003

BSL14071012b Page 11/16

5.4. Radiated Emission Limit(Class B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS
(MHz)	(Meters)	$(dB\mu V/m)$
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
Above 1000	3	54.0

Note:(1) The smaller limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT or system.

5.5. EUT Configuration on Test

The following equipment are installed on Radiated Emission Measurement to meet the Commission requirements and operating regulations in a manner which tends to maximize Its emission characteristics in normal application.

5.6. Operating Condition of EUT

5.6.1. Setup the EUT as shown on Section 5.2.1

5.6.2. Turn on the power of all equipments.

5.6.3.Let the EUT work in test mode (Connect to PC) and test it.

BSL14071012b Page 12/16

5.7. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The frequency range from 9kHz to 1000MHz is checked. All the test results are listed in Section 6.8. The measurements greater than 20dB below the limit are not report.

5.8. Test Result

PASS

For below 9kHz-30MHz Spurious


Freq. (MHz)	Emission(dBuV/m) PK / AV	Limits(dBuV/m) PK / AV	Margin (dB)
-	-	-	-
-	-	-	-

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.

BSL14071012b Page 13/16

Horizontal

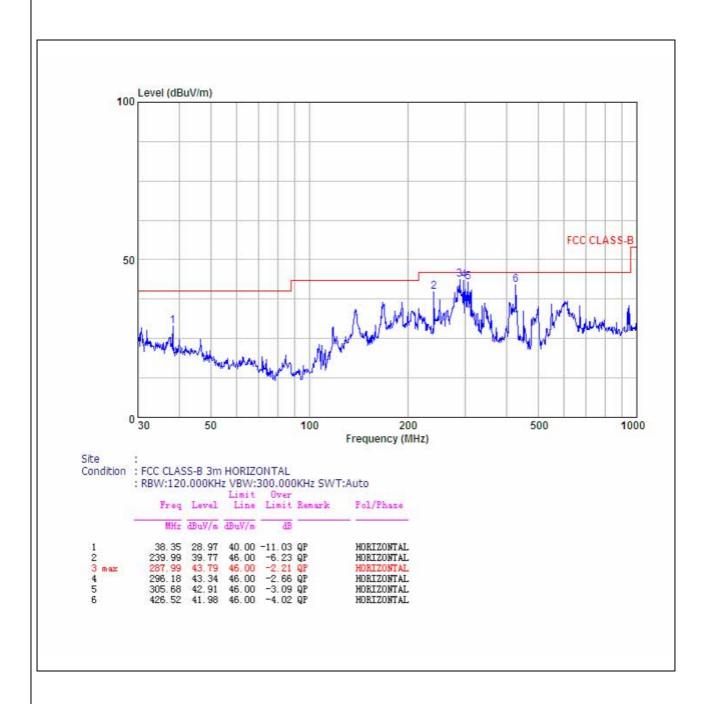

BSL14071012b Page 14/16

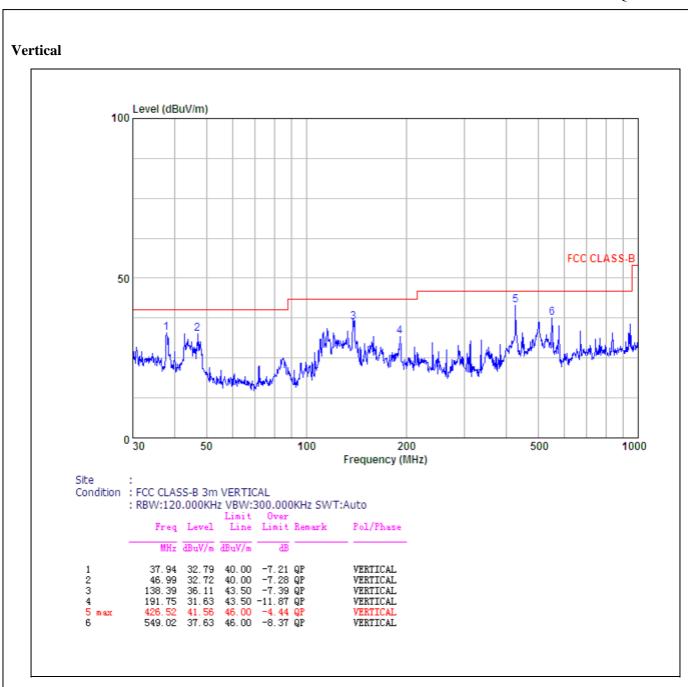

BSL14071012b Page 15/16

1GHz-12.5G

	Receiver		Turn	Turn Rx Antenna		Correcte	Corrected	FCC Part 15.109	
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/Ave.	table Degree	Height (m)	Polar (H / V)		Amplitude (dBuV/m)	Limit (dBuV/m	Margin (dB)
1432.28	26.65	Ave.	166.2	26.94	V	8.68	35.33	54	-18.67
2217.14	29.6	Ave.	100.2	28.79	V	1.37	30.97	54	-23.03
2842.23	29.77	Ave.	23.2	29.61	V	3.29	33.06	54	-20.94
4002.27	25.21	Ave.	27.2	30.85	V	9.95	35.16	54	-18.84
4757.11	23.56	Ave.	123.2	32.92	V	15.36	38.92	54	-15.08
5432.21	22.95	Ave.	13.2	33.04	V	16.73	39.68	54	-14.32
1432.33	36.12	PK	166.2	26.94	V	8.68	44.8	74	-29.2
2217.22	39.57	PK	23.2	28.79	V	1.37	40.94	74	-33.06
2842.44	39.86	PK	100.2	29.61	V	3.29	43.15	74	-30.85
4002.41	35.53	PK	27.2	30.85	V	9.95	45.48	74	-28.52
4757.45	33.58	PK	123.2	32.92	V	15.36	48.94	74	-25.06
5432.43	33.78	PK	13.2	33.04	V	16.73	50.51	74	-23.49
1427.55	26.3	Ave.	166.2	26.96	Н	8.7	35	54	-19
2272.36	30.11	Ave.	100.2	29.23	Н	1.98	32.09	54	-21.91
3337.33	28.79	Ave.	23.2	29.71	Н	5.74	34.53	54	-19.47
4157.63	26.2	Ave.	27.2	31.16	Н	11.07	37.27	54	-16.73
5152.36	24.11	Ave.	123.2	33.29	Н	16.5	40.61	54	-13.39
5772.77	24.18	Ave.	13.2	33.77	Н	17.94	42.12	54	-11.88
1427.47	36.4	PK	166.2	26.96	Н	8.7	45.1	74	-28.9
2272.5	40.5	PK	23.2	29.23	Н	1.98	42.48	74	-31.52
3337.68	38.84	PK	100.2	29.71	Н	5.74	44.58	74	-29.42
4157.86	36.43	PK	27.2	31.16	Н	11.07	47.5	74	-26.5
5152.95	34.86	PK	123.2	33.29	Н	16.5	51.36	74	-22.64
5772.53	33.49	PK	13.2	33.77	Н	17.94	51.43	74	-22.57

***** END OF REPORT *****

BSL14071012b Page 16/16