

FCC Test Report

Report No.: FR461355

1190

Equipment : BT4.0 BLE Module

Brand Name : XenonBlue

Model No. : XBT40A

FCC ID : 2ACORXBT40A

Standard : 47 CFR FCC Part 15.247

Operating Band: 2400 MHz - 2483.5 MHz

Equipment Class: DTS

Applicant : Enjoy Research Inc

7F.-2, No.52, Beichang 5th St., Ji'an Township,

Hualien County 973, Taiwan (R.O.C.)

Manufacturer : SHAWO HWA INDUSTRIAL CO., LTD

8F, NO. 89, Qiao he Road, Zhong he City, Taipei, Taiwan

The product sample received on Jun. 13, 2014 and completely tested on Jun. 29, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Vic Hsiao / Supervisor

SPORTON INTERNATIONAL INC. Page No. : 1 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Support Equipment	
1.3	Testing Applied Standards	7
1.4	Testing Location Information	
1.5	Measurement Uncertainty	
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	g
2.2	Test Channel Frequencies Configuration	g
2.3	The Worst Case Power Setting Parameter	g
2.4	The Worst Case Measurement Configuration	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power	18
3.4	Power Spectral Density	20
3.5	Transmitter Radiated Bandedge Emissions	22
3.6	Transmitter Radiated Unwanted Emissions	25
4	TEST EQUIPMENT AND CALIBRATION DATA	36

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

TEL: 886-3-327-3456 FAX: 886-3-327-0973

Summary of Test Result

Report No. : FR461355

	Conformance Test Specifications								
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result				
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied				
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.6935680MHz 27.85 (Margin 18.15dB) - AV 38.33 (Margin 17.67dB) - QP	FCC 15.207	Complied				
3.2	15.247(a)	6dB Bandwidth	LE: 694.6000kHz	≥500kHz	Complied				
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] LE: -0.47	Power [dBm] LE:30	Complied				
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz] LE: -15.91	PSD [dBm/3kHz]: 8	Complied				
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2551.51MHz: 25.7dB Restricted Bands [dBuV/m at 3m]: 2496.73MHz 60.26 (Margin 13.74) - PK 48.74(Margin 5.26) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied				
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 239.52MHz 40.57 (Margin 5.43dB) – PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied				

SPORTON INTERNATIONAL INC. Page No. : 3 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No. : FR461355

Report No.	Version	Description	Issued Date
FR461355	Rev. 01	Initial issue of report	Oct. 01, 2014

SPORTON INTERNATIONAL INC. Page No. : 4 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information							
Frequency Range (MHz) Bluetooth Ch. Frequency (MHz) Channel Number RF Output Powe (dBm)							
2400-2483.5	v4.0 LE	2402-2480	0-39 [40]	-0.47			

Report No.: FR461355

- Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
- Note 2: RF output power specifies that Maximum Peak Conducted Output Power.
- Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

	Antenna Category								
\boxtimes	☐ Integral antenna (antenna permanently attached)								
	☐ Temporary RF connector provided								
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.							

	Antenna General Information						
No.	Ant. Cat.	Ant. Type	Gain _(dBi)				
1	Integral	PCB	-4.82				

SPORTON INTERNATIONAL INC. Page No. : 5 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

	Iden	tify EUT					
EUT Serial Number	EUT Serial Number N/A						
Presentation of Equipme	Presentation of Equipment						
	Туре	of EUT					
☐ Combined (EUT wh	ere the radio part is fully inte	egrated within another device	e)				
Combined Equipme	ent - Brand Name / Model No	o.:					
☐ Plug-in radio (EUT	ntended for a variety of host	systems)					
Host System - Bran	d Name / Model No.:						
Other:							
1.1.4 Test Signal	Outy Cycle						
	Operated Mode f	or Worst Duty Cycle					
○ Operated test mode	e for worst duty cycle						
Test Signa	I Duty Cycle (x)		uty Factor 0 log 1/x)				
∑ 79.08% - test mode single channel - LE 1.02							
1.1.5 EUT Operational Condition							
Supply Voltage	☐ AC mains	□ DC					
Type of DC Source	☐ Internal DC supply	External DC adapter	☐ Battery				

Report No. : FR461355

SPORTON INTERNATIONAL INC. Page No. : 6 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR461355

1.2 Support Equipment

Support Equipment - AC Conduction and Radiated Emission					
Equipment	Brand Name	Model Name	FCC ID		
Notebook	DELL	E5530	DoC		

Support Equipment - RF Conducted						
Equipment Brand Name Model Name FCC ID						
Notebook	DELL	E5520	-			

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 D01 v03r02

1.4 Testing Location Information

	Testing Location							
	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.				
		TEL	:	886-3-327-3456 FAX : 886-3-327-0973				
Test Condition			Test Site No.	Test Engineer	Test Environment			
AC Conduction			CO04-HY	Zeus	25°C / 49%			
RF Conducted			TH06-HY Cain		24.7°C / 63.2%			
Radiated Emission			03CH02-HY	Hunter	23.8°C / 51%			

SPORTON INTERNATIONAL INC. Page No. : 7 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR461355

Measurement Uncertainty						
Test Item	Uncertainty					
AC power-line conducted emissions		±2.3 dB				
Emission bandwidth, 6dB bandwidth		±1.4 %				
RF output power, conducted		±0.6 dB				
Power density, conducted		±0.8 dB				
Unwanted emissions, conducted	30 – 1000 MHz	±0.5 dB				
	1 – 18 GHz	±0.7 dB				
	18 – 40 GHz	±0.8 dB				
	40 – 200 GHz	N/A				
All emissions, radiated	30 – 1000 MHz	±2.6 dB				
	1 – 18 GHz	±3.6 dB				
	18 – 40 GHz	±3.8 dB				
	40 – 200 GHz	N/A				
Temperature		±0.8 °C				
Humidity		±3 %				
DC and low frequency voltages		±3 %				
Time		±1.4 %				
Duty Cycle		±1.4 %				

SPORTON INTERNATIONAL INC. Page No. : 8 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing						
Bluetooth Version	Transmit Chains (N _{TX})	Data Rate	Modulation Mode			
LE	1	1 Mbps	LE-1Mbps			

Report No.: FR461355

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.

Note 2: Modulation modes consist below configuration:

DSSS LE-1Mbps: GFSK (1Mbps)

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz)
LE	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	nRFgo Studio - Direct Test Mode UART Interface		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
LE,1Mbps	Default	Default	Default

SPORTON INTERNATIONAL INC. Page No. : 9 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item AC power-line conducted emissions	
Condition AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz	
Operating Mode	
1	EUT transmitted with Notebook via USB Cable

Report No. : FR461355


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	LE-1Mbps

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
	EUT will be placed in fixed position.		
	EUT will be placed in mobile position and operating multiple positions.		
User Position	EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is X.		
Operating Mode	Operating Mode Description		
1	EUT transmitted with Notebook via USB Cable LE-1Mbps		
Modulation Mode			
	X Plane	Y Plane	Z Plane
Orthogonal Planes of EUT			

SPORTON INTERNATIONAL INC. Page No. : 10 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01




2.5 Test Setup Diagram

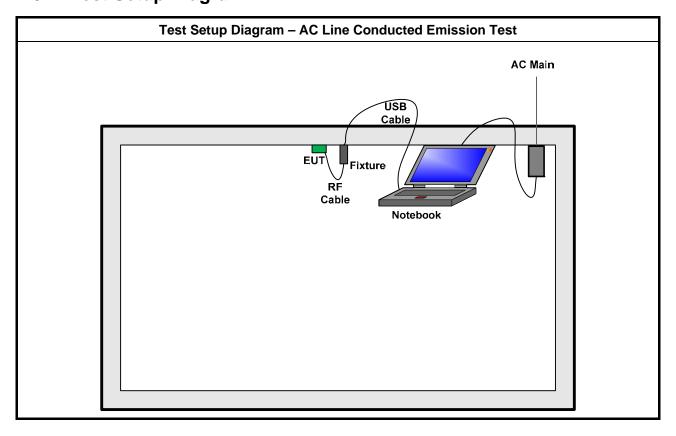


Report No. : FR461355

SPORTON INTERNATIONAL INC. Page No. : 11 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



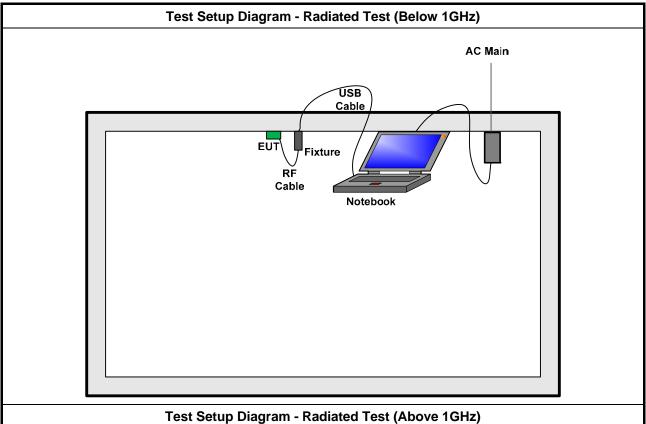

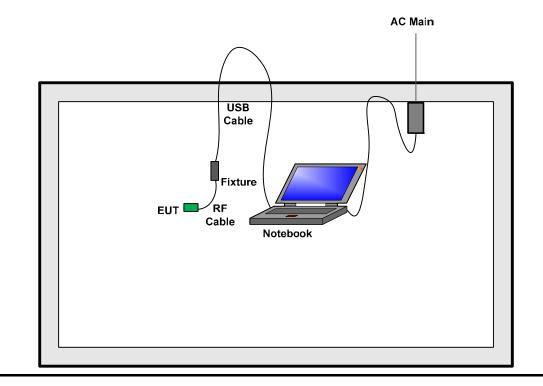

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 12 of 37

Report Version : Rev. 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Report No.: FR461355


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
\boxtimes	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

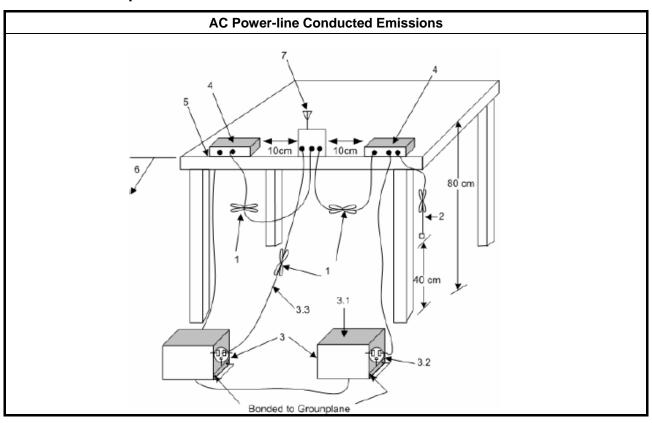

SPORTON INTERNATIONAL INC. Page No. : 13 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01



3.1.5 Test Result of AC Power-line Conducted Emissions

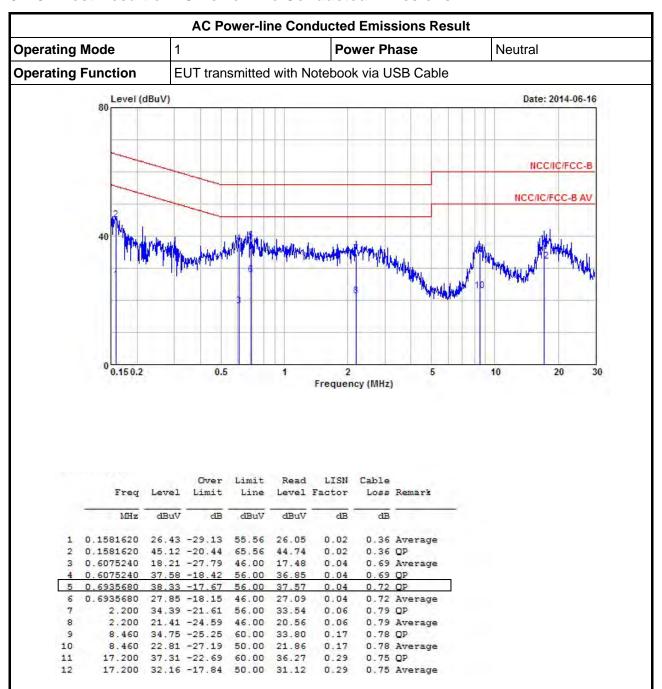


Report No.: FR461355

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 14 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR461355

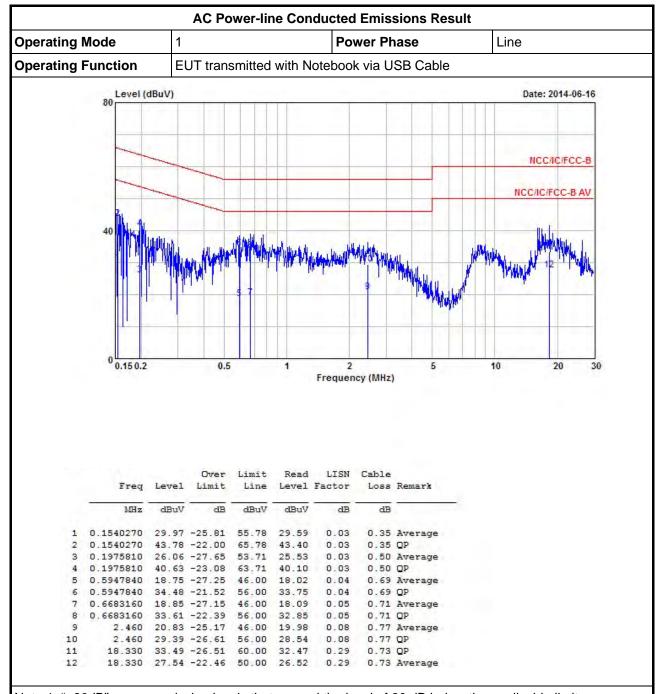

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 15 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR461355

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit		
Systems using digital modulation techniques:		
6 dB bandwidth ≥ 500 kHz.		


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

	Test Method				
\boxtimes	For	the emission bandwidth shall be measured using one of the options below:			
	\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.			
		Refer as FCC KDB 558074 D01 v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.			
		Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.			
\boxtimes	For	conducted measurement.			
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.			
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.			

3.2.4 Test Setup

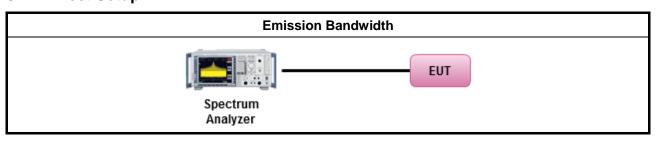


SPORTON INTERNATIONAL INC. Page No. : 16 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Modulation Mode Freq. (MHz)		99% Bandwidth (kHz)	6dB Bandwidth (kHz)	
LE-1Mbps	2402	1380.6078	699.0000	
LE-1Mbps	2440	1076.7004	694.6000	
LE-1Mbps	2480	1063.6758	699.0000	
Limit		N/A	≥500 kHz	
Result		Com	plied	

Report No.: FR461355

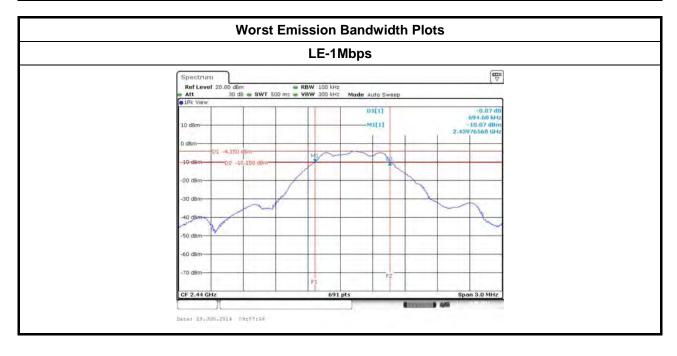

SPORTON INTERNATIONAL INC. Page No. : 17 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 RF Output Power

3.3.1 RF Output Power Limit

	RF Output Power Limit for Digital Modulation Systems			
Max	Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit			
\boxtimes	☑ 2400-2483.5 MHz Band:			
	If G _{TX} ≤ 6 dBi, then P _{Out} ≤ 30 dBm (1 W)			
	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm			
e.i.r	e.i.r.p. Power Limit:			
\boxtimes	2400-2483.5 MHz Band			
	Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W)			
\mathbf{G}_{TX}	Pout = maximum peak conducted output power or maximum conducted output power in dBm, GTX = the maximum transmitting antenna directional gain in dBi. Peirp = e.i.r.p. Power in dBm.			

Report No. : FR461355


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

	Test Method			
\boxtimes	Maximum Peak Conducted Output Power			
	\boxtimes	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.		
		Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW ≥ EBW).		
\boxtimes	For	conducted measurement.		
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.		
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.		

3.3.4 Test Setup

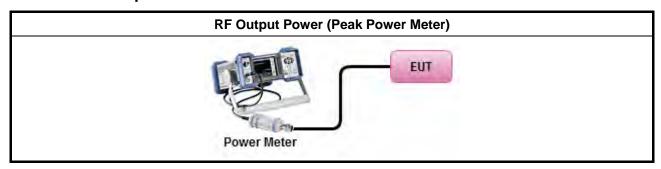

SPORTON INTERNATIONAL INC. Page No. : 18 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR461355

3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result								
Condition		RF Output Power (dBm)						
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit		
LE-1Mbps	2402	-0.47	30	-4.82	-5.29	36		
LE-1Mbps	2440	-1.83	30	-4.82	-6.65	36		
LE-1Mbps	2480	-3.36	30	-4.82	-8.18	36		
Result	•	Complied						

3.3.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result									
Condition		RF Output Power (dBm)							
Modulation Mode Freq. (MHz)		Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power			
LE-1Mbps	2402	-2.25	1.02	-1.23	-4.82	-6.05			
LE-1Mbps	2440	-3.68	1.02	-2.66	-4.82	-7.48			
LE-1Mbps	2480	-5.22	1.02	-4.20	-4.82	-9.02			
Result				Complied					

SPORTON INTERNATIONAL INC. Page No. : 19 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR461355

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

	Power Spectral Density Limit
\boxtimes	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

		Test Method
\boxtimes	outp the c conc of th	c power spectral density procedures that the same method as used to determine the conducted out power. If maximum peak conducted output power was measured to demonstrate compliance to putput power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum ducted output power was measured to demonstrate compliance to the output power limit, then one e average PSD procedures shall be used, as applicable based on the following criteria (the peak procedure is also an acceptable option).
	\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 10.2 Method PKPSD (RBW=3-100kHz; detector=peak)
	[duty	v cycle ≥ 98% or external video / power trigger]
		Refer as FCC KDB 558074 D01 v03r02, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
		Refer as FCC KDB 558074 D01 v03r02, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
	duty	cycle < 98% and average over on/off periods with duty factor
		Refer as FCC KDB 558074 D01 v03r02, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
		Refer as FCC KDB 558074 D01 v03r02, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
\boxtimes	For	conducted measurement.
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.4 Test Setup

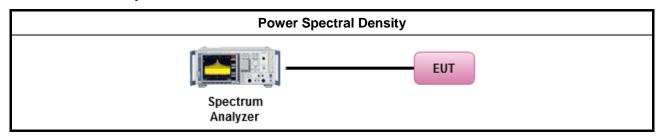


SPORTON INTERNATIONAL INC. Page No. : 20 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR461355

3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result								
Modulation Mode	Freq. (MHz)	PSD (dBm/100kHz)	PSD Limit (dBm/3kHz)					
LE-1Mbps	2402	-15.91	8					
LE-1Mbps	2440	-18.89	8					
LE-1Mbps 2480		-20.39	8					
Res	sult	Com	plied					

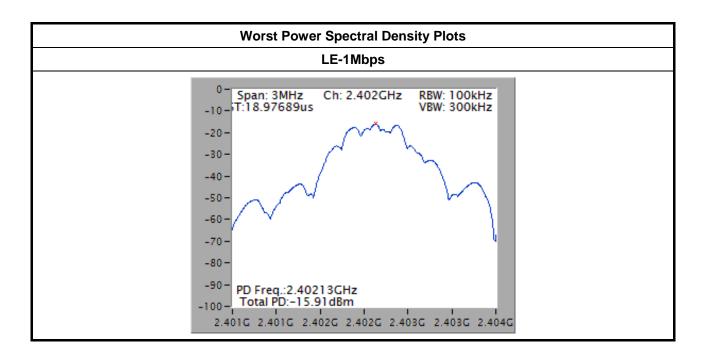


SPORTON INTERNATIONAL INC. Page No. : 21 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

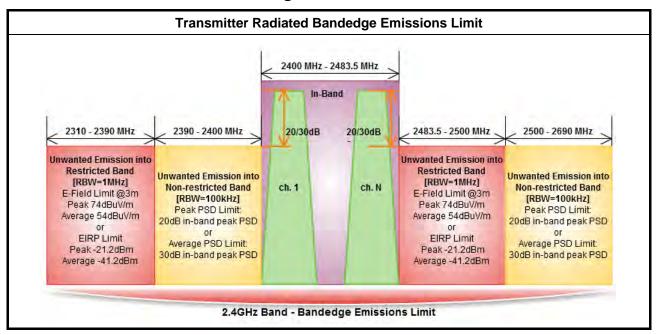

Report No.: FR461355

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 22 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01




FCC Test Report No.: FR461355

3.5.3 Test Procedures

		Test Method						
\boxtimes	The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].						
\boxtimes		er as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency and highest frequency channel within the allowed operating band.						
\boxtimes	For the transmitter unwanted emissions shall be measured using following options below:							
		Refer as FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted bands.						
	\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.						
		Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%)						
		Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).						
		Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).						
		☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.						
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.						
		Refer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure peak limit.						
\boxtimes	For	the transmitter bandedge emissions shall be measured using following options below:						
		Refer as FCC KDB 558074 D01 v03r02, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).						
	\boxtimes	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.						
		Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.						
\boxtimes	For	radiated measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7.						
	For	conducted measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.2.						

SPORTON INTERNATIONAL INC. Page No. : 23 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

3.5.4 Test Setup

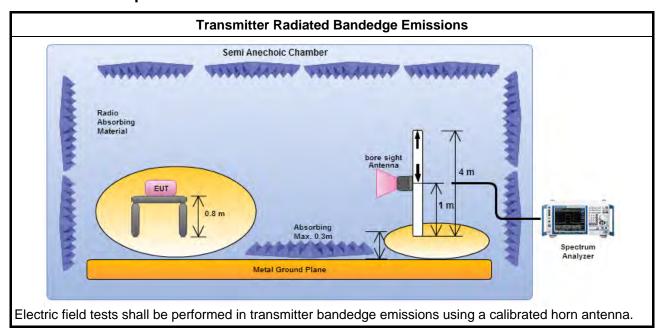

Report No.: FR461355

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)										
Modulation Test Freq. In-band PSD [i] Freq. Out-band PSD [o] [i] – [o] Limit (dBuV/100kHz) (dBuV/100kHz) Pol.										
LE-1Mbps	2402	91.58	2396.09	64.68	26.9	20	Н			
LE-1Mbps 2480 90.01 2551.51 64.31 25.7 20 H										
Note 1: Meas	Note 1: Measurement worst emissions of receive antenna polarization									

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.	
LE-1Mbps	2402	3	2317.75	61.48	74	2354.88	48.57	54	Н	
LE-1Mbps	2480	3	2499.85	60.26	74	2496.73	48.74	54	Н	

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 24 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR461355

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit							
RF output power procedure Limit (dB)							
Peak output power procedure	20						
Average output power procedure	30						

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 25 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.3 Test Procedures

			Test Method
	perfo equi extra dista	ormed i pment. apolated	ents may be performed at a distance other than the limit distance provided they are not in the near field and the emissions to be measured can be detected by the measurement. When performing measurements at a distance other than that specified, the results shall be do to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear or field-strength measurements, inverse of linear distance-squared for power-density ents).
			rements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, se the instrumentation noise floor is typically close to the radiated emission limit.
			rements in the frequency range above 18 GHz - 25GHz are typically made at a closer ce 0.5m, because the instrumentation noise floor is typically close to the radiated emission
\boxtimes	The	averag	e emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
\boxtimes	For	the tran	smitter unwanted emissions shall be measured using following options below:
		Refer bands.	as FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted
	\boxtimes	Refer a	as FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.
			efer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty /cle ≥98%)
			efer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty actor).
		⊠ R	efer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).
		☐ R	efer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
		☐ R	efer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
			efer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure eak limit.
			efer as FCC KDB 558074 D01 v03r02, clause 12.2.3 measurement procedure Quasi-Peak nit.
\boxtimes	For	radiated	d measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7.
	\boxtimes	Refer	as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	\boxtimes	Refer	as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	\boxtimes	Refer	as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
	For 12.2		ted and cabinet radiation measurement, refer as FCC KDB 558074 D01 v03r02, clause

Report No. : FR461355

SPORTON INTERNATIONAL INC. Page No. : 26 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01




3.6.4 Test Setup

Semi Anechoic Chamber Radio Absorbing Material Metal Ground Plane Transmitter Radiated Unwanted Emissions (below 1GHz) Semi Anechoic Chamber Semi Anechoic Chamber Spectrum Analyzer

Report No.: FR461355

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

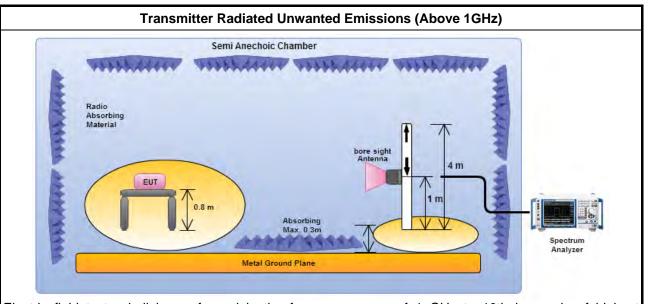

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


SPORTON INTERNATIONAL INC. Page No. : 27 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR461355

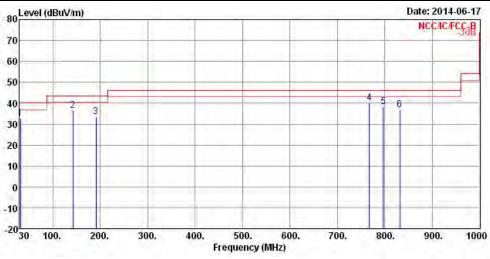

	Freq	Ov Level Lim		PERMIT P			Cable Preamp Loss Factor			A/Pos	T/Pos
0=	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg
1	31.94	32.66	-7.34	40.00	42.10	17.57	0.76	27.77	Peak		
2	142.52	36.50	-7.00	43.50	51.50	10.89	1.72	27.61	Peak		
3	191.02	33.51	-9.99	43.50	49.79	9.18	2.00	27.46	Peak		
4	767.20	40.21	-5.79	46.00	44.28	19.85	4.22	28.14	Peak		
5	796.30	38.26	-7.74	46.00	42.09	19.94	4.31	28.08	Peak		
6	831.22	36.72	-9.28	46.00	40.04	20.21	4.45	27.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 28 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

Report No. : FR461355



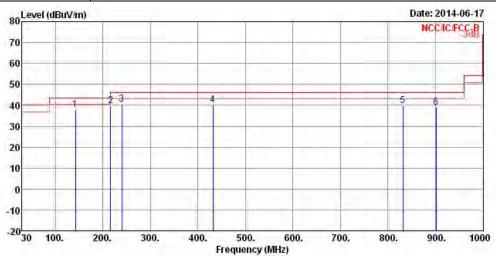

	Freq	Level	Over Limit	G2012 4		Antenna Factor		ALL TO STATE OF	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	142.52	37.99	-5.51	43.50	52.99	10.89	1.72	27.61	Peak		
2	216.24	39.83	-6.17	46.00	55.79	9.28	2.14	27.38	Peak		
3	239.52	40.57	-5.43	46.00	54.06	11.56	2.27	27.32	Peak		
4	431.58	40.28	-5.72	46.00	48.58	16.72	3.05	28.07	Peak		
5	831.22	39.94	-6.06	46.00	43.26	20.21	4.45	27.98	Peak		
6	901.06	38.88	-7.12	46.00	41.51	20.59	4.55	27.77	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 29 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions Modulation Mode LE-1Mbps Test Freq. (MHz) 2402 Operating Function Transmit Polarization V

Report No.: FR461355

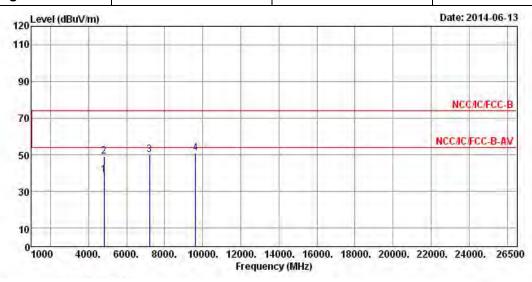


	Freq	Level	0∨er Limit	Limit Line		Antenna Factor				A/Pos	T/Pos
-	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.00	39.10	-14.90	54.00	34.75	34.34	4.70	34.69	Average	(444	1222
2	4804.00	49.00	-25.00	74.00	44.65	34.34	4.70	34.69	Peak	(352)	377
3	7206.00	50.03			43.71	35.92	5.33	34.93	Peak	527	1222
4	9608.00	51.02			43.53	36.52	6.32	35.35	Peak	***	

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 30 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

	Transmitter Radiated Unwanted Emissions									
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2402							
Operating Function	Transmit	Polarization	Н							

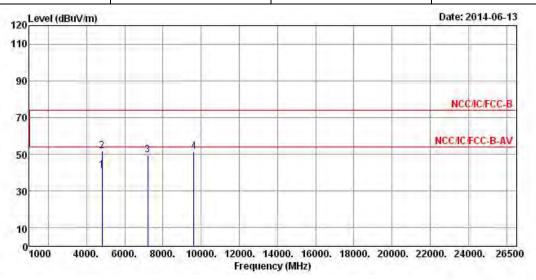

			0ver	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
- 4	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.00	41.09	-12.91	54.00	36.74	34.34	4.70	34.69	Average		
2	4804.00	51.63	-22.37	74.00	47.28	34.34	4.70	34.69	Peak		
3	7206.00	49.52			43.20	35.92	5.33	34.93	Peak		
4	9608.00	51.26			43.77	36.52	6.32	35.35	Peak		+

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 31 of 37
TEL: 886-3-327-3456 Report Version : Rev. 01

	Transmitter Radiated Unwanted Emissions									
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2440							
Operating Function	Transmit	Polarization	V							

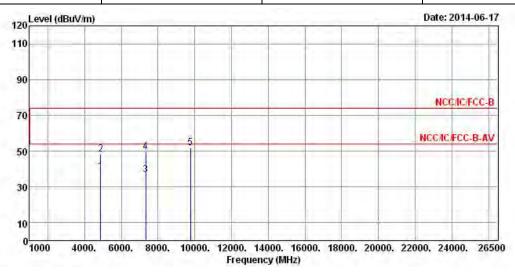

		0∨er	Limit		Intenna		Preamp		A/Pos	T/Pos
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
MHz c	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
0.00	38.57	-15.43	54.00	34.19	34.32	4.73	34.67	Average	1777	
0.00	48.38	-25.62	74.00	44.00	34.32	4.73	34.67	Peak	11447	144
0.00	36.60	-17.40	54.00	30.22	35.87	5.47	34.96	Average		
0.00	49.66	-24.34	74.00	43.28	35.87	5.47	34.96	Peak	1244	244
0.00	51.88			44.09	36.71	6.44	35.36	Peak	777	777
-	MHz 6	MHz dBuV/m 0.00 38.57 0.00 48.38 0.00 36.60	MHz dBuV/m dB 0.00 38.57 -15.43 0.00 48.38 -25.62 0.00 36.60 -17.40 0.00 49.66 -24.34	MHz dBuV/m dB dBuV/m 0.00 38.57 -15.43 54.00 0.00 48.38 -25.62 74.00 0.00 36.60 -17.40 54.00 0.00 49.66 -24.34 74.00	MHz dBuV/m dB dBuV/m dBuV 0.00 38.57 -15.43 54.00 34.19 0.00 48.38 -25.62 74.00 44.00 0.00 36.60 -17.40 54.00 30.22 0.00 49.66 -24.34 74.00 43.28	MHz dBuV/m dB dBuV/m dBuV dB/m 0.00 38.57 -15.43 54.00 34.19 34.32 0.00 48.38 -25.62 74.00 44.00 34.32 0.00 36.60 -17.40 54.00 30.22 35.87 0.00 49.66 -24.34 74.00 43.28 35.87	MHz dBuV/m dB dBuV/m dBuV dB/m dB 0.00 38.57 -15.43 54.00 34.19 34.32 4.73 0.00 48.38 -25.62 74.00 44.00 34.32 4.73 0.00 36.60 -17.40 54.00 30.22 35.87 5.47 0.00 49.66 -24.34 74.00 43.28 35.87 5.47	MHz dBuV/m dB dBuV/m dBuV dB/m dB dB 0.00 38.57 -15.43 54.00 34.19 34.32 4.73 34.67 0.00 48.38 -25.62 74.00 44.00 34.32 4.73 34.67 0.00 36.60 -17.40 54.00 30.22 35.87 5.47 34.96 0.00 49.66 -24.34 74.00 43.28 35.87 5.47 34.96	MHz dBuV/m dB dBuV/m dBuV dB/m dB dB dB 0.00 38.57 -15.43 54.00 34.19 34.32 4.73 34.67 Average 0.00 48.38 -25.62 74.00 44.00 34.32 4.73 34.67 Peak 0.00 36.60 -17.40 54.00 30.22 35.87 5.47 34.96 Average 0.00 49.66 -24.34 74.00 43.28 35.87 5.47 34.96 Peak	MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm 0.00 38.57 -15.43 54.00 34.19 34.32 4.73 34.67 Average 0.00 48.38 -25.62 74.00 44.00 34.32 4.73 34.67 Peak 0.00 36.60 -17.40 54.00 30.22 35.87 5.47 34.96 Average 0.00 49.66 -24.34 74.00 43.28 35.87 5.47 34.96 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 32 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



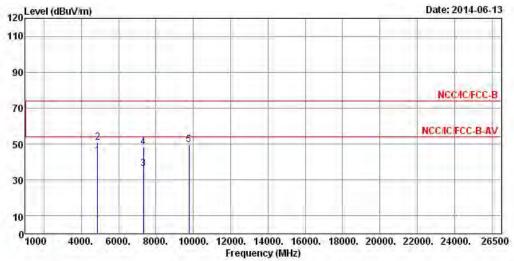

	Freq	Level	0∨er Limit	Limit Line		Antenna Factor		Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.00	43.60	-10.40	54.00	39.22	34.32	4.73	34.67	Average		
2	4880.00	50.86	-23.14	74.00	46.48	34.32	4.73	34.67	Peak	224	222
3	7320.00	36.50	-17.50	54.00	30.12	35.87	5.47	34.96	Average	555	1.555
4	7320.00	48.20	-25.80	74.00	41.82	35.87	5.47	34.96	Peak	222	
5	9760.00	49.50			41.71	36.71	6.44	35.36	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.


SPORTON INTERNATIONAL INC. Page No. : 33 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions

Modulation Mode LE-1Mbps Test Freq. (MHz) 2480

Operating Function Transmit Polarization V

Report No.: FR461355

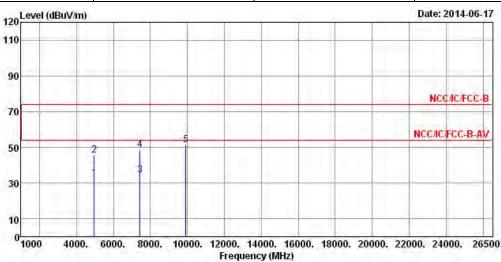


			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.00	32.62	-21.38	54.00	28.14	34.31	4.82	34.65	Average	450	460
2	4960.00	45.62	-28.38	74.00	41.14	34.31	4.82	34.65	Peak		1 400
3	7440.00	34.59	-19.41	54.00	28.14	35.82	5.61	34.98	Average	444	1445
4	7440.00	48.75	-25.25	74.00	42.30	35.82	5.61	34.98	Peak		
5	9920.00	51.57			43.46	36.92	6.56	35.37	Peak	460	466

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 34 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions									
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2480						
Operating Function	Transmit	Polarization	Н						

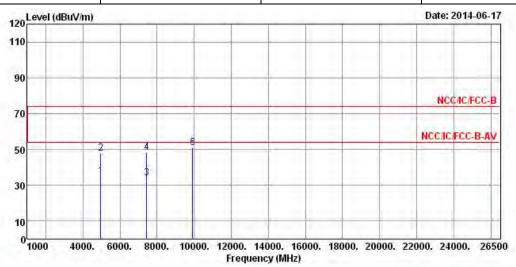

			Over	Limit	Read	Antenna	Cable	Preamp		A/Pos	T/Pos
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		
•	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		Cm	deg
1	4960.00	34.96	-19.04	54.00	30.48	34.31	4.82	34.65	Average	1444	
2	4960.00	47.89	-26.11	74.00	43.41	34.31	4.82	34.65	Peak		
3	7440.00	34.20	-19.80	54.00	27.75	35.82	5.61	34.98	Average		
4	7440.00	48.27	-25.73	74.00	41.82	35.82	5.61	34.98	Peak		
5	9920.00	51.01			42.90	36.92	6.56	35.37	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 35 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	JAN. 21, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	0-7611832020001	9kHz ~ 30MHz	Oct. 30, 2013	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450Hz	N/A	AC Conduction

Report No.: FR461355

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9kHz ~ 40GHz	Jan. 25, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2014	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 11, 2013	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 11, 2013	RF Conducted
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_103	10715/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
DC Power Source	G.W.	GPS-3030DD	GEN865896	DC 0V ~ 30V	Nov. 21, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 36 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2014	Radiation
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 18, 2013	Radiation
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2013	Radiation
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 25, 2013	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation
Turn Table	Chaintek Instruments	3000	MF7802058	0 ~ 360degree	N/A	Radiation
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4m	N/A	Radiation

Report No.: FR461355

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two years.

SPORTON INTERNATIONAL INC. Page No. : 37 of 37 TEL: 886-3-327-3456 Report Version : Rev. 01