



FCC RADIO TEST REPORT FCC ID:2ACPR-DTTAB-116-1

Product: 2in1 tablet pc

Trade Mark: N/A

Model No.: DTTAB2in1-116-1

Serial Model: W1549

Report No.: NTEK-2017NT08075526F3

Issue Date: 21 Aug. 2017

Prepared for

SHENZHEN BMORN TECHNOLOGY CO.,LTD.

5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, Guangdong, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen P.R. China
Tel.: +86-755-6115 9388

Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn

Version.1.3 Page 1 of 57





TABLE OF CONTENTS

1 7	TEST RESULT CERTIFICATION	3
2 5	SUMMARY OF TEST RESULTS	4
3 I	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES	5
	LABORATORY ACCREDITATIONS AND LISTINGS	
3.3		
	GENERAL DESCRIPTION OF EUT	
5 I	DESCRIPTION OF TEST MODES	8
6 8	SETUP OF EQUIPMENT UNDER TEST	10
6.1		
6.2	SUPPORT EQUIPMENTEQUIPMENTS LIST FOR ALL TEST ITEMS	11
6.3		
7	TEST REQUIREMENTS	14
7.1	CONDUCTED EMISSIONS TEST	14
7.2	RADIATED SPURIOUS EMISSION	19
7.3	6DB BANDWIDTH	28
7.4		
7.5		
7.6		
7.7		
7.8		
7.9	O ANTENNA APPLICATION	57





1 TEST RESULT CERTIFICATION

Applicant's name:	SHENZHEN BMORN TECHNOLOGY CO.,LTD.		
Address	5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, Guangdong, China		
Manufacturer's Name:	SHENZHEN BMORN TECHNOLOGY CO.,LTD.		
Address	5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixiang, Bao'an, Shenzhen, Guangdong, China		
Product description			
Product name:	2in1 tablet pc		
Model and/or type reference:	DTTAB2in1-116-1		
Serial Model:	W1549		

Measurement Procedure Used:

APPLICABLE STANDARDS					
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT				
FCC 47 CFR Part 2, Subpart J					
FCC 47 CFR Part 15, Subpart C					
KDB 174176 D01 Line Conducted FAQ v01r01	Complied				
ANSI C63.10-2013					
FCC KDB 558074 D01 DTS Meas Guidance v04					

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	:_	07 Aug. 2017 ~ 21 Aug. 2017
Testing Engineer	:_	Gusan Su
		(Susan Su)
Technical Manager	:	Jason chen
-	_	(Jason Chen)
		Sam. Cher
Authorized Signatory	:_	
		(Sam Chen)

Version.1.3 Page 3 of 57





2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C								
Standard Section	Standard Section Test Item Verdict Remark							
15.207	Conducted Emission	PASS						
15.247 (a)(2)	6dB Bandwidth	PASS						
15.247 (b)	Maximum Output Power	PASS						
15.247 (c)	Radiated Spurious Emission	PASS						
15.247 (d)	Power Spectral Density	PASS						
15.205	Band Edge Emission	PASS						
15.203	Antenna Requirement	PASS						

Remark:

- 1. "N/A" denotes test is not applicable in this Test Report.
- 2. All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Version.1.3 Page 4 of 57





3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

Name of Firm

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

: Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty	-
1	Conducted Emission Test	±1.38dB	
2	RF power, conducted	±0.16dB	
3	Spurious emissions, conducted	±0.21dB	
4	All emissions, radiated(<1G)	±4.68dB	
5	All emissions, radiated(>1G)	±4.89dB	
6	Temperature	±0.5°C	
7	Humidity	±2%	

Version.1.3 Page 5 of 57





4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification					
Equipment 2in1 tablet pc					
Trade Mark	N/A				
FCC ID	2ACPR-DTTAB-116-1				
Model No.	DTTAB2in1-116-1				
Serial Model	W1549				
Model Difference	All the model are the same circuit and RF module, except the model No. and the colour.				
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20); 2422-2452MHz for 802.11n(HT40);				
Modulation DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;					
Number of Channels	11 channels for 802.11b/g/11n(HT20); 7 channels for 802.11n(HT40);				
Antenna Type	FPCB Antenna				
Antenna Gain	2 dBi				
	☑DC supply: DC 3.8V/8000mAh from Battery or DC 5V from Adapter.				
Power supply	⊠Adapter supply: Model: BI18-050300-AdU Input:AC 100~240V 50~60Hz 0.8A Output:5V, 3A				
HW Version	S101C REV:1.1				
SW Version	WINDOS 10 HOME 64-bit				

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Version.1.3 Page 6 of 57





Revision History

Report No.	Version	Description	Issued Date
NTEK-2017NT08075526F3	Rev.01	Initial issue of report	Aug 21, 2017

Version.1.3 Page 7 of 57





5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
	•••
5	2432
6	2437
10	2457
11	2462

Note: $fc=2412MHz+(k-1)\times 5MHz$ k=1 to 11

EUT built-in battery-powered, fully-charged battery use of the test battery

Version.1.3 Page 8 of 57





t Mode:	1		T	
Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
	11b/CCK	1 Mbps	1/6/11	1
Maximum Conducted Output	11g/BPSK	6 Mbps	1/6/11	1
Power	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11	1
Tower openial Benefit	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
6dB Spectrum Bandwidth	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
			Τ	
Radiated Emissions Above	11b/CCK	1 Mbps	1/6/11	1
1GHz	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
Band Edge Emissions	11g/BPSK	6 Mbps	1/6/11	1
•	11g/BPSK 11n HT20	MCS0	1/6/11	1

MCS0

3/6/9

1

11n HT40


Version.1.3 Page 9 of 57







6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

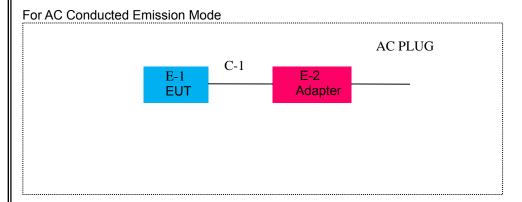

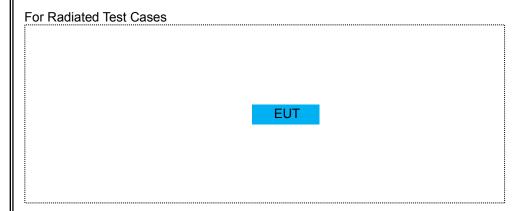

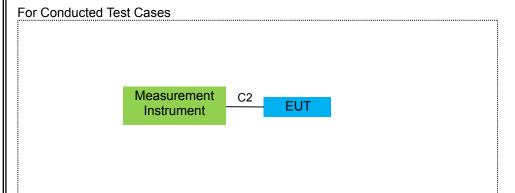

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Version.1.3 Page 10 of 57





6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

เธอเอ.					
Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1.	2in1 tablet pc	N/A	DTTAB2in1-116-1	2ACPR-DTTAB-1 16-1	EUT
E-2	Adapter	N/A	BI18-050300-AdU	N/A	
					·

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.2m
C-2	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Version.1.3 Page 11 of 57





6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	l lest equipmen	10					Calibrati
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	on period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2017.06.06	2018.06.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.11.10	2017.11.09	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.06.06	2018.06.05	1 year
4	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2017.06.06	2018.06.05	1 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.04.09	2018.04.08	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year
9	Amplifier	EM	EM-30180	060538	2017.08.09	2018.08.08	1 year
10	Amplifier	MITEQ	TTA1840-35- HG	177156	2017.06.06	2018.06.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year
12	Power Meter	DARE	RPR3006W	100696	2017.08.07	2018.08.06	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	1 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	1 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	1 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

Version.1.3 Page 12 of 57





Condu	Conduction Test equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2017.04.19	2018.04.18	1 year
3	LISN	EMCO	3816/2	00042990	2017.06.06	2018.06.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2017.06.06	2018.06.05	1 year
5	Test Cable (9KHz-30MH z)	N/A	C01	N/A	2017.04.21	2020.04.20	1 year
6	Test Cable (9KHz-30MH z)	N/A	C02	N/A	2017.04.21	2020.04.20	1 year
7	Test Cable (9KHz-30MH z)	N/A	C03	N/A	2017.04.21	2020.04.20	1 year
1	Filter	TRILTHIC	2400MHz	29	2017.04.19	2018.04.18	1 year

Note: Each piece of equipment is scheduled for calibration once a year.

Version.1.3 Page 13 of 57





7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

7.1.2 Conformance Limit

Fraguanov(MHz)	Conducted Emission Limit			
Frequency(MHz)	Quasi-peak	Average		
0.15-0.5	66-56*	56-46*		
0.5-5.0	56	46		
5.0-30.0	60	50		


Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

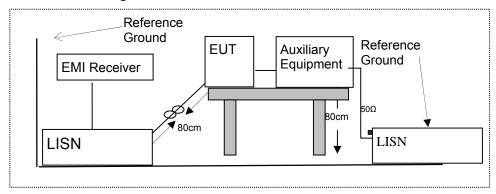

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Version.1.3 Page 14 of 57






7.1.6 **Test Results**

EUT:	2in1 tablet pc	Model Name:	DTTAB2in1-116 -1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage:	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Kelliaik
0.1675	45.18	9.82	55.00	65.08	-10.08	QP
0.1675	27.07	9.82	36.89	55.08	-18.19	AVG
0.3659	33.97	9.83	43.80	58.59	-14.79	QP
0.3659	17.26	9.83	27.09	48.59	-21.50	AVG
0.5897	30.72	9.83	40.55	56.00	-15.45	QP
0.5897	12.93	9.83	22.76	46.00	-23.24	AVG
1.2540	29.32	9.90	39.22	56.00	-16.78	QP
1.2540	13.48	9.90	23.38	46.00	-22.62	AVG
2.4219	28.73	9.92	38.65	56.00	-17.35	QP
2.4219	16.01	9.92	25.93	46.00	-20.07	AVG
5.1539	29.53	10.05	39.58	60.00	-20.42	QP
5.1539	16.26	10.05	26.31	50.00	-23.69	AVG

Remark:

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

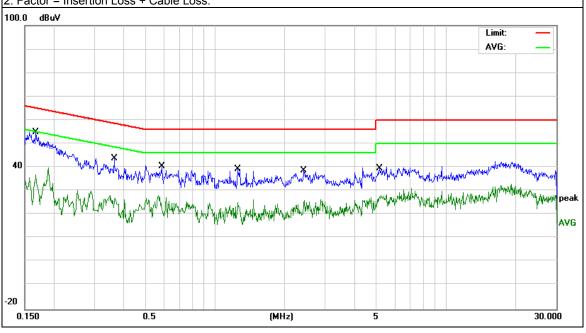

Version.1.3 Page 15 of 57






EUT:	2in1 tablet pc	Model Name:	DTTAB2in1-116- 1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1980	41.79	9.92	51.71	63.69	-11.98	QP
0.1980	11.44	9.92	21.36	53.69	-32.33	AVG
0.3458	35.24	9.92	45.16	59.06	-13.90	QP
0.3458	18.84	9.92	28.76	49.06	-20.30	AVG
0.7860	29.60	9.93	39.53	56.00	-16.47	QP
0.7860	14.37	9.93	24.30	46.00	-21.70	AVG
1.3500	30.86	9.93	40.79	56.00	-15.21	QP
1.3500	15.09	9.93	25.02	46.00	-20.98	AVG
2.7540	29.75	9.95	39.70	56.00	-16.30	QP
2.7540	17.68	9.95	27.63	46.00	-18.37	AVG
5.4537	26.92	9.98	36.90	60.00	-23.10	QP
5.4537	15.41	9.98	25.39	50.00	-24.61	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

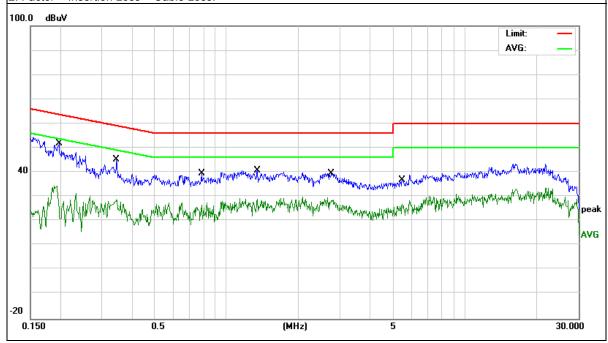

Version.1.3 Page 16 of 57






EUT:	2in1 tablet pc	Model Name:	DTTAB2in1-116 -1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage:	DC 5V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1819	41.88	9.82	51.70	64.39	-12.69	QP
0.1819	23.06	9.82	32.88	54.39	-21.51	AVG
0.3659	33.97	9.83	43.80	58.59	-14.79	QP
0.3659	16.40	9.83	26.23	48.59	-22.36	AVG
0.5655	32.27	9.83	42.10	56.00	-13.90	QP
0.5655	21.91	9.83	31.74	46.00	-14.26	AVG
0.9220	30.00	9.90	39.90	56.00	-16.10	QP
0.9220	10.55	9.90	20.45	46.00	-25.55	AVG
2.1299	29.50	9.87	39.37	56.00	-16.63	QP
2.1299	12.13	9.87	22.00	46.00	-24.00	AVG
6.5339	29.98	9.99	39.97	60.00	-20.03	QP
6.5339	18.02	9.99	28.01	50.00	-21.99	AVG

Remark:

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

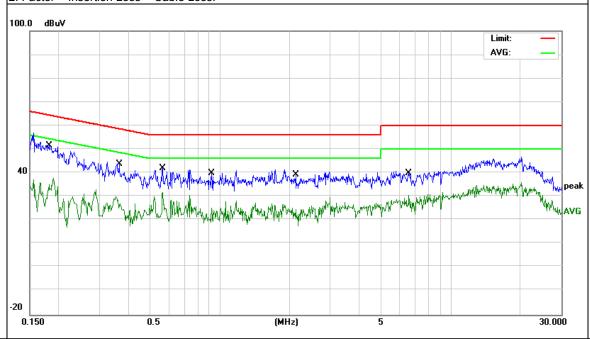

Version.1.3 Page 17 of 57






EUT:	2in1 tablet pc	Model Name:	DTTAB2in1-116 -1
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 5V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1675	42.38	9.92	52.30	65.08	-12.78	QP
0.1675	13.39	9.92	23.31	55.08	-31.77	AVG
0.2548	37.46	9.92	47.38	61.60	-14.22	QP
0.2548	15.83	9.92	25.75	51.60	-25.85	AVG
0.6820	30.87	9.93	40.80	56.00	-15.20	QP
0.6820	15.88	9.93	25.81	46.00	-20.19	AVG
1.8140	33.58	9.94	43.52	56.00	-12.48	QP
1.8140	21.27	9.94	31.21	46.00	-14.79	AVG
3.1059	32.65	9.95	42.60	56.00	-13.40	QP
3.1059	22.57	9.95	32.52	46.00	-13.48	AVG
15.6219	35.48	10.25	45.73	60.00	-14.27	QP
15.6219	23.50	10.25	33.75	50.00	-16.25	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

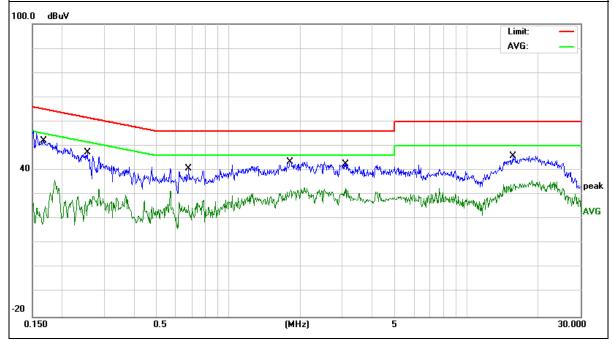

Version.1.3 Page 18 of 57





7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

According to 1 OO 1 art 13.20	According to 1 CC Part 15.205, Nestricted bands							
MHz	MHz	MHz	GHz					
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15					
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46					
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75					
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5					
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2					
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5					
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7					
6.26775-6.26825	123-138	2200-2300	14.47-14.5					
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2					
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4					
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12					
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0					
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8					
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5					
12.57675-12.57725	322-335.4	3600-4400	(2)					
13.36-13.41								

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

restricted band specified on 13.200(a), then the 13.200(a) finite in the table below has to be followed.								
Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBµV/m)	Measurement Distance					
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300					
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30					
1.705~30.0	30	29.5	30					
30-88	100	40	3					
88-216	150	43.5	3					
216-960	200	46	3					
Above 960	500	54	3					

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)				
	PEAK	AVERAGE			
Above 1000	74	54			

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.


Version.1.3 Page 19 of 57






7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

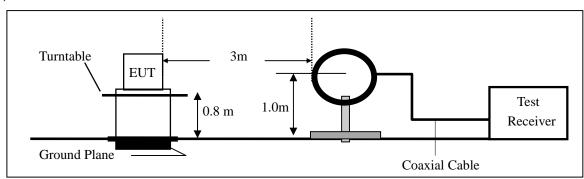

(b) For radiated emissions from 30MHz to 1000MHz

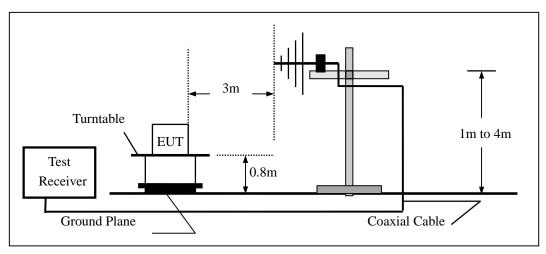

(c) For radiated emissions above 1000MHz

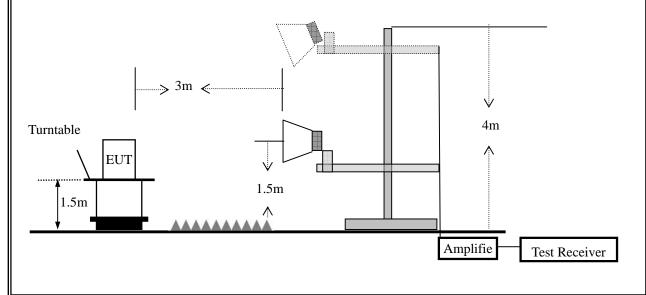

Version.1.3 Page 20 of 57





7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

oce the lenewing opecation analyzer cettings.							
Spectrum Parameter	Setting						
Attenuation	Auto						
Start Frequency	1000 MHz						
Stop Frequency	10th carrier harmonic						
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average						

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations: For peak measurement:

Set RBW=100 kHz for f < 1 GHz; VBW \geqslant RBW; Sweep = auto; Detector function = peak; Trace = max hold; Set RBW = 1 MHz, VBW= 3MHz for f \geqslant 1 GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Version.1.3 Page 21 of 57





Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

— opanioao Emio	01011 001011 001111 12 (01111 12 10 001111	<u>'-</u> /	
EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n(HT20, HT40)	Test By:	Susan Su

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3	m(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Version.1.3 Page 22 of 57






Spurious Emission below 1GHz (30MHz to 1GHz) All the modulation modes have been tested, and the worst result was report as below:

EUT:	2in1 tablet pc	Model Name:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Normal Link
Test Voltage:	DC 3.8V		

Polar	Frequency	Meter Reading Factor		Emission Level	Limits	Margin	Remark	
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)		
V	32.6340	15.12	20.04	35.16	40.00	-4.84	QP	
V	43.8119	19.10	14.49	33.59	40.00	-6.41	QP	
V	88.6524	19.74	11.76	31.50	43.50	-12.00	QP	
V	116.9495	19.69	10.27	29.96	43.50	-13.54	QP	
V	230.9068	16.74	12.06	28.80	46.00	-17.20	QP	
V	399.0300	15.55	15.13	30.68	46.00	-15.32	QP	

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

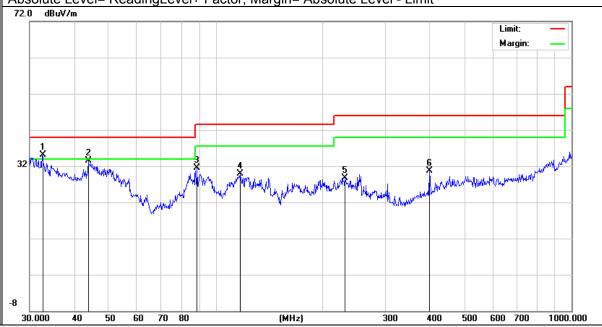


Version.1.3 Page 23 of 57





Polar	Frequency	Meter Reading	Factor Emission Level		Limits	Margin	Remark	
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)		
Н	30.4237	6.48	21.02	27.50	40.00	-12.50	QP	
Н	56.0007	12.75	12.21	24.96	40.00	-15.04	QP	
Н	83.8156	15.16	11.24	26.40	40.00	-13.60	QP	
Н	120.6991	20.74	10.62	31.36	43.50	-12.14	QP	
Н	205.6750	18.15	13.80	31.95	43.50	-11.55	QP	
Н	417.6409	15.68	16.35	32.03	46.00	-13.97	QP	

Remark:

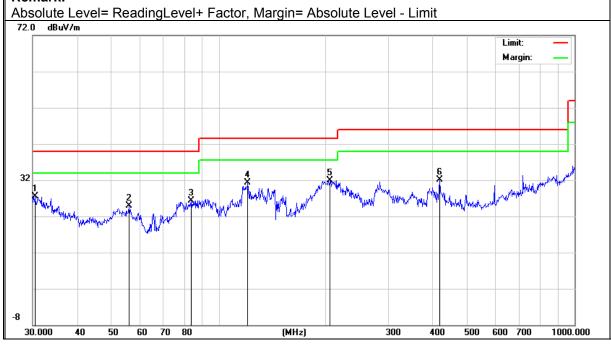

Version.1.3 Page 24 of 57





Spurious Emission Above 1GHz (1GHz to 27GHz)

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n(HT20, HT40)	Test By:	Susan Su

All the modulation modes have been tested, and the worst result was report as below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment		
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)				
	Low Channel (2412 MHz)(802.11b)Above 1G										
4824.265	63.24	5.21	35.59	44.30	59.74	74.00	-14.26	Pk	Vertical		
4824.265	40.48	5.21	35.59	44.30	36.98	54.00	-17.02	AV	Vertical		
7236.296	60.28	6.48	36.27	44.60	58.43	74.00	-15.57	Pk	Vertical		
7236.296	43.66	6.48	36.27	44.60	41.81	54.00	-12.19	AV	Vertical		
4824.414	61.10	5.21	35.55	44.30	57.56	74.00	-16.44	Pk	Horizontal		
4824.414	43.25	5.21	35.55	44.30	39.71	54.00	-14.29	AV	Horizontal		
7236.428	63.09	6.48	36.27	44.52	61.32	74.00	-12.68	Pk	Horizontal		
7236.428	46.96	6.48	36.27	44.52	45.19	54.00	-8.81	AV	Horizontal		
		L	ow Channe	el (2437 MF	lz)(802.11b)	Above 1G					
4874.312	62.98	5.21	35.66	44.20	59.65	74.00	-14.35	Pk	Vertical		
4874.312	43.21	5.21	35.66	44.20	39.88	54.00	-14.12	AV	Vertical		
7311.227	59.55	7.10	36.50	44.43	58.72	74.00	-15.28	Pk	Vertical		
7311.227	47.40	7.10	36.50	44.43	46.57	54.00	-7.43	AV	Vertical		
4874.529	60.90	5.21	35.66	44.20	57.57	74.00	-16.43	Pk	Horizontal		
4874.529	48.75	5.21	35.66	44.20	45.42	54.00	-8.58	AV	Horizontal		
7311.313	59.80	7.10	36.50	44.43	58.97	74.00	-15.03	Pk	Horizontal		
7311.313	42.19	7.10	36.50	44.43	41.36	54.00	-12.64	AV	Horizontal		
		L	ow Channe	el (2462 MF	lz)(802.11b)	Above 1G					
4924.102	65.62	5.21	35.52	44.21	62.14	74.00	-11.86	Pk	Vertical		
4924.102	42.35	5.21	35.52	44.21	38.87	54.00	-15.13	AV	Vertical		
7386.425	60.47	7.10	36.53	44.60	59.50	74.00	-14.50	Pk	Vertical		
7386.425	44.56	7.10	36.53	44.60	43.59	54.00	-10.41	AV	Vertical		
4924.066	66.93	5.21	35.52	44.21	63.45	74.00	-10.55	Pk	Horizontal		
4924.066	47.14	5.21	35.52	44.21	43.66	54.00	-10.34	AV	Horizontal		
7386.198	60.94	7.10	36.53	44.60	59.97	74.00	-14.03	Pk	Horizontal		
7386.198	45.23	7.10	36.53	44.60	44.26	54.00	-9.74	AV	Horizontal		

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

- (2) Emission Level= Antenna Factor + Cable Loss + Read Level Preamp Factor (3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4)"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Version.1.3 Page 25 of 57





■ Spurious Emission in Restricted Band 2310MHz -18000MHz

requericy	Reading	Cable Loss	Factor	Factor	Level	Liiiilis	ivialgili	Detector	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	1
				802	.11b			•	
2310.00	58.39	2.97	27.80	43.80	45.36	74	-28.64	Pk	Horizontal
2310.00	44.02	2.97	27.80	43.80	30.99	54	-23.01	AV	Horizontal
2310.00	58.65	2.97	27.80	43.80	45.62	74	-28.38	Pk	Vertical
2310.00	41.99	2.97	27.80	43.80	28.96	54	-25.04	AV	Vertical
2390.00	57.95	3.14	27.21	43.80	44.50	74	-29.50	Pk	Vertical
2390.00	42.00	3.14	27.21	43.80	28.55	54	-25.45	AV	Vertical
2390.00	56.85	3.14	27.21	43.80	43.40	74	-30.60	Pk	Horizontal
2390.00	41.42	3.14	27.21	43.80	27.97	54	-26.03	AV	Horizontal
2483.50	57.54	3.58	27.70	44.00	44.82	74	-29.18	Pk	Vertical
2483.50	42.72	3.58	27.70	44.00	30.00	54	-24.00	AV	Vertical
2483.50	58.99	3.58	27.70	44.00	46.27	74	-27.73	Pk	Horizontal
2483.50	41.29	3.58	27.70	44.00	28.57	54	-25.43	AV	Horizontal
				802					
2310.00	59.17	2.97	27.80	43.80	46.14	74	-27.86	Pk	Horizontal
2310.00	44.22	2.97	27.80	43.80	31.19	54	-22.81	AV	Horizontal
2310.00	56.49	2.97	27.80	43.80	43.46	74	-30.54	Pk	Vertical
2310.00	42.93	2.97	27.80	43.80	29.90	54	-24.10	AV	Vertical
2390.00	57.38	3.14	27.21	43.80	43.93	74	-30.07	Pk	Vertical
2390.00	42.03	3.14	27.21	43.80	28.58	54	-25.42	AV	Vertical
2390.00	57.99	3.14	27.21	43.80	44.54	74	-29.46	Pk	Horizontal
2390.00	43.44	3.14	27.21	43.80	29.99	54	-24.01	AV	Horizontal
2483.50	58.58	3.58	27.70	44.00	45.86	74	-28.14	Pk	Vertical
2483.50	44.22	3.58	27.70	44.00	31.50	54	-22.50	AV	Vertical
2483.50	59.20	3.58	27.70	44.00	46.48	74	-27.52	Pk	Horizontal
2483.50	42.09	3.58	27.70	44.00	29.37	54	-24.63	AV	Horizontal
	12.00				11n20			1	ı
2310.00	58.25	2.97	27.80	43.80	45.22	74	-28.78	Pk	Horizontal
2310.00	43.69	2.97	27.80	43.80	30.66	54	-23.34	AV	Horizontal
2310.00	58.77	2.97	27.80	43.80	45.74	74	-28.26	Pk	Vertical
2310.00	42.57	2.97	27.80	43.80	29.54	54	-24.46	AV	Vertical
2390.00	58.15	3.14	27.21	43.80	44.70	74	-29.30	Pk	Vertical
2390.00	41.92	3.14	27.21	43.80	28.47	54	-25.53	AV	Vertical
2390.00	56.82	3.14	27.21	43.80	43.37	74	-30.63	Pk	Horizontal
2390.00	42.50	3.14	27.21	43.80	29.05	54	-24.95	AV	Horizontal
2483.50	57.79	3.58	27.70	44.00	45.07	74	-28.93	Pk	Vertical
2483.50	42.82	3.58	27.70	44.00	30.10	54	-23.90	AV	Vertical
2483.50	58.55	3.58	27.70	44.00	45.83	74	-28.17	Pk	Horizontal
2483.50	42.65	3.58	27.70	44.00	29.93	54	-24.07	AV	Horizontal
					11n40	I .			I.
2310.00	59.61	2.97	27.80	43.80	46.58	74	-27.42	Pk	Horizontal
2310.00	44.45	2.97	27.80	43.80	31.42	54	-22.58	AV	Horizontal
2310.00	57.34	2.97	27.80	43.80	44.31	74	-29.69	Pk	Vertical
2310.00	42.97	2.97	27.80	43.80	29.94	54	-24.06	AV	Vertical
2390.00	58.07	3.14	27.21	43.80	44.62	74	-29.38	Pk	Vertical
2390.00	41.91	3.14	27.21	43.80	28.46	54	-25.54	AV	Vertical
2390.00	57.95	3.14	27.21	43.80	44.50	74	-29.50	Pk	Horizontal
2390.00	44.02	3.14	27.21	43.80	30.57	54	-23.43	AV	Horizontal
2483.50	58.36	3.58	27.70	44.00	45.64	74	-28.36	Pk	Vertical
2483.50	44.68	3.58	27.70	44.00	31.96	54	-22.04	AV	Vertical
2483.50	58.47	3.58	27.70	44.00	45.75	74	-28.25	Pk	Horizontal
2483.50	42.51	3.58	27.70	44.00	29.79	54	-24.21	AV	Horizontal
55.55		0.00							1

Version.1.3 Page 26 of 57





Spurious Emission in Restricted Bands 3260MMHz- 18000MHz

All the modulation modes have been tested, the worst result was report as below:

Frequenc	Reading	Cable	Antenna	Preamp	Emission	Limits	Margin	Detector	
у	Level	Loss	Factor	Factor	Level	LIIIIII	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	Туре	
3260	60.57	4.04	29.57	44.70	49.48	74	-24.52	Pk	Vertical
3260	55.77	4.04	29.57	44.70	44.68	54	-9.32	AV	Vertical
3260	61.80	4.04	29.57	44.70	50.71	74	-23.29	Pk	Horizontal
3260	56.89	4.04	29.57	44.70	45.80	54	-8.20	AV	Horizontal
3332	65.02	4.26	29.87	44.40	54.75	74	-19.25	Pk	Vertical
3332	54.00	4.26	29.87	44.40	43.73	54	-10.27	AV	Vertical
3332	62.92	4.26	29.87	44.40	52.65	74	-21.35	Pk	Horizontal
3332	53.01	4.26	29.87	44.40	42.74	54	-11.26	AV	Horizontal
17797	43.39	10.99	43.95	43.50	54.83	74	-19.17	Pk	Vertical
17797	33.33	10.99	43.95	43.50	44.77	54	-9.23	AV	Vertical
17788	44.13	11.81	43.69	44.60	55.03	74	-18.97	Pk	Horizontal
17788	31.92	11.81	43.69	44.60	42.82	54	-11.18	AV	Horizontal

[&]quot;802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Version.1.3 Page 27 of 57





7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v04

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

 $VBW \geq 3*RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.3 Page 28 of 57





7.3.6 Test Results

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Susan Su

Mode	Channel	Frequency (MHz)	6dB bandwidth	Limit (kHz)	Result	
		(1/111)	(MHz)	(1122)		
	Low	2412	10.10	≥500	Pass	
802.11b	Middle	2437	10.10	≥500	Pass	
	High	2462	10.09	≥500	Pass	
	Low	2412	16.60	≥500	Pass	
802.11g	Middle	2437	16.59	≥500	Pass	
	High	2462	16.61	≥500	Pass	
	Low	2412	17.85	≥500	Pass	
802.11n20	Middle	2437	17.85	≥500	Pass	
	High	2462	17.84	≥500	Pass	
	Low	2422	36.51	≥500	Pass	
802.11n40	Middle	2437	36.50	≥500	Pass	
	High	2452	36.48	≥500	Pass	

Version.1.3 Page 29 of 57






Test plot

(802.11b) 6dB Bandwidth plot on channel 1




(802.11g) 6dB Bandwidth plot on channel 1



(802.11b) 6dB Bandwidth plot on channel 6




(802.11g) 6dB Bandwidth plot on channel 6



(802.11b) 6dB Bandwidth plot on channel 11



(802.11g) 6dB Bandwidth plot on channel 11



Version.1.3 Page 30 of 57







Test plot

(802.11n20) 6dB Bandwidth plot on channel 1


(802.11n40) 6dB Bandwidth plot on channel 3





(802.11n20) 6dB Bandwidth plot on channel 6

(802.11n40) 6dB Bandwidth plot on channel 6






(802.11n20) 6dB Bandwidth plot on channel 11

(802.11n40) 6dB Bandwidth plot on channel 9





Version.1.3 Page 31 of 57





7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074)6)b), issued 06/09/2015.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T \leq 16.7 microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest availble value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \le 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz (≥ RBW)

Number of points in Sweep >100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

Version.1.3 Page 32 of 57





7.4.6 Test Results

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Susan Su

Mode	Data rate	Channel	T _{on}	T _{total}	Duty Cycle	Duty Cycle Factor (dB)	VBW Setting
802.11b	1Mbps	6	-	-	100%	0	10Hz
802.11g	6Mbps	6	1	-	100%	0	1KHz
802.11n HT20	MCS0	6	ı	-	100%	0	1KHz
802.11n HT40	MCS0	6	ı	-	100%	0	3KHz

Note: All the modulation modes were tested, the data of the worst mode are described in the following table.

Version.1.3 Page 33 of 57





7.5 MAXIMUM OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v04

7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

7.5.4 Test Setup



7.5.5 Test Procedure

- 1. Test procedures refer KDB 558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
- 2. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.
- 3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

7.5.6 EUT opration during Test

The EUT was programmed to be in continuously transmitting mode.

Version.1.3 Page 34 of 57





7.5.7 Test Results

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Susan Su

			1			1		
	Frequency	Power	Duty Cycle	Average	Maximum	LIMIT		
Test Channel	(MHz)	Setting	Factor	Output Power	Output	(dBm)	Verdict	
	(1011 12)	Setting	(dB)	(dBm)	Power(dBm)	(ubiii)		
	802.11b							
1	2412	Default	0	12.8	12.8	30	PASS	
6	2437	Default	0	12.9	12.9	30	PASS	
11	2462	Default	0	12.8	12.8	30	PASS	
	802.11g							
1	2412	Default	0	9.5	9.5	30	PASS	
6	2437	Default	0	9.6	9.6	30	PASS	
11	2462	Default	0	9.3	9.3	30	PASS	
	802.11n HT20							
1	2412	Default	0	9.6	9.6	30	PASS	
6	2437	Default	0	9.6	9.6	30	PASS	
11	2462	Default	0	9.4	9.4	30	PASS	
	802.11n HT40							
3	2422	Default	0	8.7	8.7	30	PASS	
6	2437	Default	0	8.6	8.6	30	PASS	
9	2452	Default	0	8.7	8.7	30	PASS	

Version.1.3 Page 35 of 57





7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v04

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle ≥ 98%); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz. .
- d) Set VBW ≥3 x RBW.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducin

Version.1.3 Page 36 of 57





7.6.6 Test Results

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Susan Su

	_						
Test Channel	Frequency	Duty Cycle	Power Density	Limit	Verdict		
Test Charmer	(MHz)	Factor(dB)	(dBm/3KHz)	(dBm/3KHz)			
	802.11b						
1	2412	0	-19.127	PASS			
6	2437	0	-18.760 8		PASS		
11	2462	0	-18.083 8		PASS		
	802.11g						
1	2412	0	-21.260	8	PASS		
6	2437	0	-19.941	8	PASS		
11	2462	0	-19.989	8	PASS		
	802.11n HT20						
1	2412	0	-20.810	8	PASS		
6	2437	0	-20.417	8	PASS		
11	2462	0	-19.805	8	PASS		
	802.11n HT40						
3	2422	0	-23.916	8	PASS		
6	2437	0	-23.227	-23.227 8			
9	2452	0	-23.484	8	PASS		


Version.1.3 Page 37 of 57






Test plot

(802.11b) PSD plot on channel 1




(802.11g) PSD plot on channel 1



(802.11b) PSD plot on channel 6




(802.11g) PSD plot on channel 6



(802.11b) PSD plot on channel 11



(802.11g) PSD plot on channel 11




Version.1.3 Page 38 of 57







Test plot

(802.11n20) PSD plot on channel 1









(802.11n20) PSD plot on channel 6


(802.11n40) PSD plot on channel 6






(802.11n20) PSD plot on channel 11

(802.11n40) PSD plot on channel 9





Version.1.3 Page 39 of 57





7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v04

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Version.1.3 Page 40 of 57





7.7.6 Test Results

EUT:	2in1 tablet pc	Model No.:	DTTAB2in1-116-1
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Susan Su


Version.1.3 Page 41 of 57






Test plot For

802.11b: Band Edge-Low Channel



802.11g: Band Edge-Low Channel



802.11b: Band Edge-High Channel



802.11g: Band Edge-High Channel



Version.1.3 Page 42 of 57





Test plot For

802.11n20: Band Edge-Low Channel



802.11n40: Band Edge-Low Channel



802.11n20: Band Edge-High Channel



802.11n40: Band Edge-High Channel



Version.1.3 Page 43 of 57





7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

- 1. Below -20dB of the highest emission level in operating band.
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and mwasure frequeny range from 9KHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Version.1.3 Page 44 of 57







802.11b on channel 01



802.11b on channel 01



802.11b on channel 01



802.11b on channel 01



Version.1.3 Page 45 of 57







802.11b on channel 06



802.11b on channel 06



802.11b on channel 06



802.11b on channel 06



Version.1.3 Page 46 of 57







802.11b on channel 11



802.11b on channel 11



802.11b on channel 11



802.11b on channel 11




Version.1.3 Page 47 of 57







802.11g on channel 01



802.11g on channel 01



802.11g on channel 01



802.11g on channel 01




Version.1.3 Page 48 of 57





802.11g on channel 06



802.11g on channel 06



802.11g on channel 06



802.11g on channel 06




Version.1.3 Page 49 of 57





802.11g on channel 11



802.11g on channel 11



802.11g on channel 11



802.11g on channel 11




Version.1.3 Page 50 of 57





802.11n20 on channel 01



802.11n20 on channel 01



802.11 n20 on channel 01



802.11 n20 on channel 01



Version.1.3 Page 51 of 57





802.11 n20 on channel 06



802.11 n20 on channel 06



802.11 n20 on channel 06



802.11 n20 on channel 06



Version.1.3 Page 52 of 57





802.11 n20 on channel 11



802.11 n20 on channel 11



802.11 n20 on channel 11



802.11 n20 on channel 11




Version.1.3 Page 53 of 57





802.11n40 on channel 03



802.11n40 on channel 03



802.11n40 on channel 03



802.11n40 on channel 03



Version.1.3 Page 54 of 57






802.11n40 on channel 06



802.11 n40 on channel 06



802.11 n40 on channel 06



802.11 n40 on channel 06



Version.1.3 Page 55 of 57





802.11 n40 on channel 9



802.11 n40 on channel 9



802.11 n40 on channel 9



802.11 n40 on channel 9



Version.1.3 Page 56 of 57





7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result

The EUT a	antenna is permanent attached F	FPCB antenna ((Gain:2dBi).	It comply with	the standard
reauireme	nt.				

END OF REPORT

Version.1.3 Page 57 of 57