

### FCC 47 CFR PART 22 SUBPART H

### **CERTIFICATION TEST REPORT**

For

# **Smartphone**

Model No.: W5302,W4301,W4302,W4303,W5303,W5305,W5306,W6301 W5402,W4401,W4402,W4403,W5403,W5404,W5405,W5406 W6401

**Trademark: BMORN** 

**REPORT NO: ES150530365E4** 

ISSUE DATE: August 10, 2015

Prepared for

Shenzhen Bmorn Technology Co.,Ltd.

5/F, Hengfang Verteran Industrial Park,Xingye Road, Xixiang, Bao'an,Shenzhen, Guangdong,China

Prepared by

SHENZHEN EMTEK CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China TEL: 86-755-26954280

FAX: 86-755-26954282

TRF No.: FCC Part22H Page 1 of 52 Report No.: ES150530365E4 Ver.1.0



### **TEST RESULT CERTIFICATION**

Applicant:	Shenzhen Bmorn Technology Co.,Ltd. 5/F, Hengfang Verteran Industrial Park,Xingye Road, Xixiang, Bao'an,Shenzhen, Guangdong,China	
Manufacturer:	Shenzhen Bmorn Technology Co.,Ltd. 5/F, Hengfang Verteran Industrial Park,Xingye Road, Xixiang, Bao'an,Shenzhen, Guangdong,China	
Product Description:	Smartphone	
Model Number:	W5302,W4301,W4302,W4303,W5303,W5305,W5306,W6301 W5402,W4401,W4402,W4403,W5403,W5404,W5405,W5406,W6401 (Note: all the model numbers are identical in circuitry and electrical, mechanical and physical construction, PCB layout, External dimension; the only differences are the model no., appearance and colour. for trading purpose. We take W5302 to test.)	
File Number:	ES150530365E4	
Date of Test:	July 17, 2015 to August 10, 2015	

Measurement Procedure Used:

APPLICABLE STANDARDS		
STANDARD TEST RESULT		
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 22, Subpart H	PASS	

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 22

The test results of this report relate only to the tested sample identified in this report.

Date of Test :	July 17, 2015 to August 10, 2015
Prepared by :	Ands Wei
	Andy Wei/Editor
Reviewer:	Joe Xia
	Joe Xia/Supervisor
Approve & Authorized Signer:	2005
	Lisa Wang/Manager

TRF No.: FCC Part22H Page 2 of 52 Report No.: ES150530365E4 Ver.1.0



# **TABLE OF CONTENTS**

1	$\mathbf{E}$	UT TECHNICAL DESCRIPTION	4
2	S	UMMARY OF TEST RESULT	5
3	T	EST METHODOLOGY	7
	3.1 3.2	GENERAL DESCRIPTION OF APPLIED STANDARDS  MEASUREMENT EQUIPMENT USED  DESCRIPTION OF TEST MODES	7 7
4	F	ACILITIES AND ACCREDITATIONS	12
	4.1 4.2	FACILITIESLABORATORY ACCREDITATIONS AND LISTINGS	12 12
5	T	EST SYSTEM UNCERTAINTY	13
6	Sl	ETUP OF EQUIPMENT UNDER TEST	14
	6.2 6.3 6.4	RADIO FREQUENCY TEST SETUP 1  RADIO FREQUENCY TEST SETUP 2  CONDUCTED EMISSION TEST SETUP  BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.  SUPPORT EQUIPMENT	14 15 16
7	T	EST REQUIREMENTS	17
	7.2 7.3 7.4 7.5 7.6	RF OUTPUT POWER  MODULATION CHARACTERISTICS  OCCUPIED BANDWIDTH  EFFECTIVE ISOTROPIC RADIATED POWER.  SPURIOUS EMISSION AT ANTENNA TERMINAL  PEAK TO AVERAGE RATIO	19 20 28 30
		FREQUENCY STABILITY POWER LINE CONDUCTED EMISSIONS	
		RECEIVER SPURIOUS EMISSION	



# 1 EUT TECHNICAL DESCRIPTION

Characteristics	Description		
Product Name:	Smartphone		
Model Number:	W5302,W4301,W4302,W4303,W5303,W5305,W5306,W6301 W5402,W4401,W4402,W4403,W5403,W5404,W5405,W5406,W6401 (Note: all the model numbers are identical in circuitry and electrical, mechanical and physical construction, PCB layout, External dimension; the only differences are the model no., appearance and colour. for trading purpose. We take W5302 to test.)		
Operating Frequency Range(s):	GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; WCDMA 850: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz;		
Number of Channels:	124 Channels for GSM850; 102 Channels for WCDMA850;		
Modulation:	GMSK/8PSK for GSM850; QPSK for WCDMA 850;		
Antenna Type:	Fixed External		
Antenna Gain:	-1dBi for GSM850; -1dBi for WCDMA 850;		
RF Output Power:	GSM850 32.43 dBm max; WCDMA 850 23.57 dBm max;		
	DC supply: DC 3.7V(Internal rechargeable lithium battery) or DC 5V supplied by external power		
Power supply	Model: SA/6PA/05FEU050100U Input: 100-240~50/60Hz 0.4A Output: DC 5V 500mA		
Temperature Range:	-20°C ~ +50°C		

Note: for more details, please refer to the User's manual of the EUT.

TRF No.: FCC Part22H Page 4 of 52 Report No.: ES150530365E4 Ver.1.0



# 2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark		
§2.1046(a)	RF Power Output	PASS			
§2.1047	Modulation Characteristics	PASS			
§2.1049	Occupied Bandwidth	PASS			
§22.913(a)(2) §2.1046	Effective Radiated Power	PASS			
§2.1051 §22.917(a) §90.210(g)	Spurious Emission at Antenna Terminal Band Edge Emission	PASS			
§22.913(a)(2)	Peak To Average Ratio	PASS			
§2.1055 §22.355	Frequency Stability	PASS			
§2.107	Power Line Conducted Emission	PASS			
§15.209	Receiver Radiation Emission	PASS			
§22.917(a)	Receiver Spurious Emission	PASS			
NOTE1: N/A (Not Applicable)					

# RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ACPR-W5302 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

The composite system is compliance with Subpart B is authorized under a DOC procedure

TRF No.: FCC Part22H Page 5 of 52 Report No.: ES150530365E4 Ver.1.0



# **Modified Information**

Version.	Summary	Date of Rev.	Report No.
Ver.1.0	Original Report	2015-08-10	ES150530365E4

TRF No.: FCC Part22H Page 6 of 52 Report No.: ES150530365E4 Ver.1.0



# 3 TEST METHODOLOGY

### 3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 22, Subpart H

FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

# 3.2 MEASUREMENT EQUIPMENT USED

### 3.2.1 Conducted Emission Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	Period of validity
TYPE		NUMBER	NUMBER	
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/15/2016
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/15/2016
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/15/2016
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/15/2016
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/15/2016

### 3.2.2 Radiated Emission Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	Period of validity
TYPE		NUMBER	NUMBER	
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/15/2016
Pre-Amplifier	HP	8447D	2944A07999	05/15/2016
Bilog Antenna	Schwarzbeck	VULB9163	142	05/15/2016
Loop Antenna	ARA	PLA-1030/B	1029	05/15/2016
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/15/2016
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/15/2016
Cable	Schwarzbeck	AK9513	ACRX1	05/15/2016
Cable	Rosenberger	N/A	FP2RX2	05/15/2016
Cable	Schwarzbeck	AK9513	CRPX1	05/15/2016
Cable	Schwarzbeck	AK9513	CRRX2	05/15/2016

# 3.2.3 Radio Frequency Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	Period of validity
TYPE		NUMBER	NUMBER	
Spectrum Analyzer	Agilent	E4407B	88156318	05/15/2016
Power meter	Anritsu	ML2495A	0824006	05/15/2016
Power sensor	Anritsu	MA2411B	0738172	05/15/2016
Radio Communication	R&S	CMU200	1100.0008.02	05/15/2016
Tester				
Radio Communication	R&S	CMW500	12010002K50-1	05/15/2016
Tester			40822-2K	

Remark: Each piece of equipment is scheduled for calibration once a year.

TRF No.: FCC Part22H Page 7 of 52 Report No.: ES150530365E4 Ver.1.0



#### 3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

During all testing, EUT is in link mode with base station emulator at maximum power level.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

# Test Mode and system config

GSM850 GSM/ GPRS mobile config

A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test

Call parms: BCH set :Cell Band :GSM850 TCH set: Traffic Band: GSM850

Traffic channel: CH128/CH189/CH251

MS transmitter level:0 Coding scheme: CS-4 Multislot config: 1up,1dowm Active cell: GSM850/GSM/ GPRS

### GSM850 GSM/ EGPRS mobile config

A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test

Call parms: BCH set :Cell Band :GSM850 TCH set: Traffic Band: GSM850

Traffic channel: CH128/CH189/CH251

MS transmitter level:0 Coding scheme: CS-5 Multislot config: 1up,1dowm Active cell: GSM850/GSM/EGPRS

### UMTS 850 REL99 mobile config

Transmitting performance test of the EUT is implemented during communicating with the SS via air interface. The procedure is using normal call protocol until the UE is communicating on traffic channel basically. On the traffic channel, the UE provides special function for testing that is called Logical Test Interface and the UE is tested using this function. (Refer to T TS 134.109 and TS 134.121).

Transmitting or receiving bit/symbol rate for test channel is shown in the following table .

TRF No.: FCC Part22H Page 8 of 52 Report No.: ES150530365E4 Ver.1.0



Bit / Symbol rate for Test Channel

Type of User Information	User Bit Rate	DL DPCH Symbol Rate	UL DPCH Bit Rate	Remarks
12.2 kbps reference measurement channel	12.2 kbps	30 kbps	60 kbps	Standard Test

Transmitter Physical channel configuration

Mode	Rel99
Loopback mode	Test mode1
Rel99 RMC	12.2 kbps RMC
HSDPA FRC	Not applicable
HSUPA Test	Not applicable
Power control algorithm	Algorithm2
βс	Not applicable
βd	Not applicable
βес	Not applicable
Bc/βd	8/15
βhs	Not applicable
βed	Not applicable

### UMTS 850 HSDPA Rel5 mobile config

Transmitting performance test of the EUT is implemented during communicating with the SS via air interface. The procedure is using normal call protocol until the UE is communicating on traffic channel basically. On the traffic channel, the UE provides special function for testing that is called Logical Test Interface and the UE is tested using this function. (Refer to TS 134.109 and TS 134.121).

Transmitting or receiving bit/symbol rate for test channel is shown in the following table .

Bit / Symbol rate for Test Channel

Type of User Information	User Bit Rate	DL DPCH Symbol Rate	UL DPCH Bit Rate	Remarks
12.2 kbps reference measurement channel	12.2 kbps	30 kbps	60 kbps	Standard Test



Transmitter Physical channel configuration

Mode		HSDP.			
subtest	1	2	3	4	
Loopback mode	Test mode1				
Rel99 RMC		12.2 kb	ps RMC		
HSDPA FRC		H-S	Set1		
HSUPA Test		Not app	olicable		
Power control algorithm		Algor	ithm2		
βc	2/15	12/15	15/15	15/15	
βd	15/15	15/15	8/15	4/15	
Bd(SF)	64				
Bc/βd	2/15	12/15	15/8	15/4	
βhs	4/15	24/15	30/15	30/15	
$MPR(s\dB)$	0	0	0.5	0.5	
$D_{ACK}$		9	3		
$\mathrm{D}_{\mathrm{NAK}}$		8	3		
DCQI		8	3		
Ack-Nack Repetition Factor	3				
CQI feedback	4ms				
CQI repetition factor			2		
Ahs=βhs/βc		30	/15	_	

# • UMTS 850 HSUPA Rel6 mobile config

Transmitting performance test of the EUT is implemented during communicating with the SS via air interface. The procedure is using normal call protocol until the UE is communicating on traffic channel basically. On the traffic channel, the UE provides special function for testing that is called Logical Test Interface and the UE is tested using this function. (Refer to TS 134.109 and TS 134.121).

Transmitting or receiving bit/symbol rate for test channel is shown in the following table .

Bit / Symbol rate for Test Channel

Bit i Gymber rate for reet enamer						
Type of User Information	User Bit Rate	DL DPCH Symbol Rate	UL DPCH Bit Rate	Remarks		
12.2 kbps reference measurement channel	12.2 kbps	30 kbps	60 kbps	Standard Test		

TRF No.: FCC Part22H Page 10 of 52 Report No.: ES150530365E4 Ver.1.0



Transmitter Physical channel configuration

Mode	Transmitter Tr	rysical chamic	HSUPA Rel6			
subtest	1	2	3	4	5	
Loopback mode		Test mode1				
Rel99 RMC			12.2 kbps RMC			
HSDPA FRC			H-Set1			
HSUPA Test			HSUPA loopback			
Power control algorithm			Algorithm2			
βс	11/15	6/15	15/15	2/15	15/15	
βd	15/15	15/15	9/15	15/15	0	
βec	209/225	12/15	30/15	2/15	5/15	
βed	1309/225	94/75	47/15	56/75	47/15	
βc/βd	11/15	6/15	15/9	2/15	-	
βhs	22/15	12/15	30/15	4/15	5/15	
D E-DPCCH	6	8	8	5	7	
DHARQ	0	0	0	0	0	
AG index	20	12	15	17	12	
ETFCI	75	67	92	71	67	
Associated Max UL data	242.1	174.9	482.8	205.8	308.9	
rate kbps						
	E_TFCI		E_TFCI 11	E_TF		
	E_TFCI	PO4	E_TFCI PO4	E_TFO	CI PO4	
	E_TFCI	67	E_TFCI 92	E_TFCI 67		
	E_TFCI I	PO18	E_TFCI PO18	E_TFCI PO18		
Pafaranaa E. TECIs	E_TFCI	71		E_TFCI 71		
Reference E_TFCIs	E_TFCI I	PO23		E_TFC	I PO23	
	E_TFCI	75		E_TF	CI 75	
	E_TFCI P			E_TFCI PO 26		
	E_TFCI	81		E_TF	CI 81	
	E_TFCI P	O 27		E_TFC	I PO 27	

■ Test Frequency and Channels

Frequency	☐ GSM850		□UMTS 850		
Band	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
CH_H	251	848.8	4233	846.6	
CH_M	189	836.4	4182	836.4	
CH_L	128	824.2	4132	826.4	

TRF No.: FCC Part22H Page 11 of 52 Report No.: ES150530365E4 Ver.1.0



# 4 FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Description

EMC Lab edited by CNAS, 2013.10.28

certificate is valid until 2016.10.29

Laboratory has been assessed and proved to be in compliance with

CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)

Certificate Registration Number is L229

edited by TUV Rheinland Shenzhen, 2010.5.25

Laboratory has been assessed according to the requirements ISO/IEC

17025.

edited by FCC, October 28, 2010

Certificate Registration Number is 406365. Accredited by FCC, February 28, 2013 Certificate Registration Number is 709623. edited by Industry Canada, May 24, 2008 Certificate Registration Number is 46405-4480

TRF No.: FCC Part22H Page 12 of 52 Report No.: ES150530365E4 Ver.1.0



# **5 TEST SYSTEM UNCERTAINTY**

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

apparatus.	
Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5℃
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%


TRF No.: FCC Part22H Page 13 of 52 Report No.: ES150530365E4 Ver.1.0



## **6 SETUP OF EQUIPMENT UNDER TEST**

### 6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by software to emit the specified signals for the purpose of measurements.




### 6.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

### (a) Radiated Emission Test Set-Up, Frequency Below 30MHz

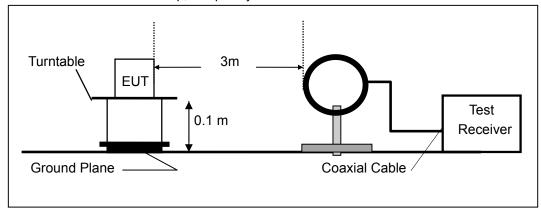


### (b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

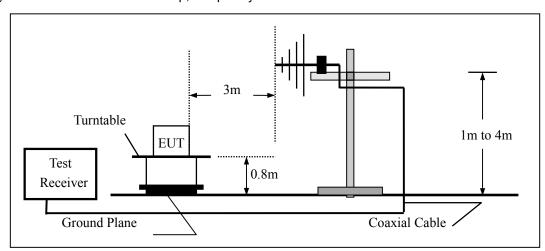

TRF No.: FCC Part22H Page 14 of 52 Report No.: ES150530365E4 Ver.1.0




### (c) Radiated Emission Test Set-Up, Frequency above 1000MHz

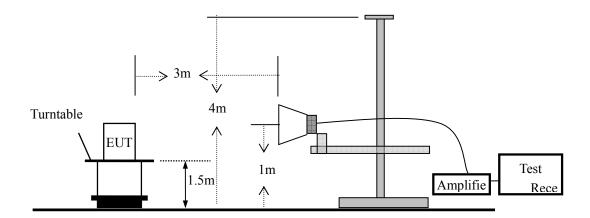

### 6.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.


Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m. According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

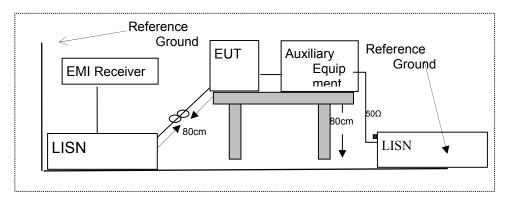

TRF No.: FCC Part22H Page 15 of 52 Report No.: ES150530365E4 Ver.1.0



# 6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

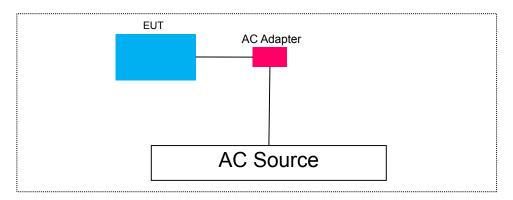

# 6.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Notebook	ASUS	P45V	N/A	
	Tablet	dreamtab	DMTAB-NV08B	N/A	

### Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

TRF No.: FCC Part22H Page 16 of 52 Report No.: ES150530365E4 Ver.1.0



## 7 TEST REQUIREMENTS

### 7.1 RF OUTPUT POWER

#### 7.1.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

#### 7.1.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

#### 7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

#### 7.1.4 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency.

The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW ≥ 3 × RBW.

Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation. Measure and record the results in the test report.

#### 7.1.5 Test Results

All the modulation modes were tested, the data of the worst mode are described in the following table.

TRF No.: FCC Part22H Page 17 of 52 Report No.: ES150530365E4 Ver.1.0



Operation Mode	Channel Number	Channel Frequency (MHz)	Average Result (dBm)	Limit (dBm)	Verdict
GSM850	128	824.2	32.40	N/A	PASS
	189	836.4	32.39	N/A	PASS
	251	848.8	32.42	N/A	PASS
	128	824.2	32.36	N/A	PASS
GPRS850	189	836.4	32.38	N/A	PASS
	251	848.8	32.43	N/A	PASS

Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity : 65 % Test By: Andy

Operation	Channel	Channel Frequency	Average Result	Limit	Verdict
Mode	Number	(MHz)	(dBm)	(dBm)	verdict
WCDMA 850	4132	826.4	23.57	N/A	PASS
	4182	836.4	23.47	N/A	PASS
	4233	846.6	22.98	N/A	PASS

TRF No.: FCC Part22H Page 18 of 52 Report No.: ES150530365E4 Ver.1.0



### 7.2 MODULATION CHARACTERISTICS

### 7.2.1 Applicable Standard

According to FCC Part 2.1047 and FCC Part 22H and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

### 7.2.2 Conformance Limit

No specific modulation characteristics requirement limits.

### 7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

#### 7.2.4 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test, The frequency band is set as selected frequency, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. and 3GPP2 C.S0011/TIA-98-E for 1XRTT.and 3GPP2 C.S0033-0/tia-866 for Rel.0 and 3GPP2 C.S0033-A for Rev.A The waveform quality and constellation of the was tested.

### 7.2.5 Test Results

**PASS** 

TRF No.: FCC Part22H Page 19 of 52 Report No.: ES150530365E4 Ver.1.0



### 7.3 OCCUPIED BANDWIDTH

#### 7.3.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

#### 7.3.2 Conformance Limit

No specific modulation characteristics requirement limits.

### 7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

#### 7.3.4 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test,

### ■ 99% Occupied bandwidth

The following procedure shall be used for measuring (99 %) power bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) Set the detection mode to peak, and the trace mode to max hold...
- f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.
- h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### ■ 26 dB Occupied bandwidth

The reference value is the highest level of the spectral envelope of the modulated signal.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target "-X dB down" requirement (i.e., if the requirement calls for measuring the –26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the "-X dB down amplitude" as equal to (Reference Value X). Alternatively, this calculation

TRF No.: FCC Part22H Page 20 of 52 Report No.: ES150530365E4 Ver.1.0



can be performed by the analyzer by using the marker-delta function.

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step g). If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s)

### 7.3.5 Test Results

Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity :  $65^{\circ}$  Test By: Andy

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
	128	824.2	309.7	N/A	PASS
GSM 850	189	836.4	331.4	N/A	PASS
	251	848.8	301.0	N/A	PASS
GPRS 850	128	824.2	311.1	N/A	PASS
	189	836.4	309.7	N/A	PASS
	251	848.8	319.8	N/A	PASS

NOTE1: N/A (Not Applicable)


Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity : 65 % Test By: Andy

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
	4132	826.4	4.589	N/A	PASS
WCDMA 850	4182	836.4	4.564	N/A	PASS
	4233	846.6	4.564	N/A	PASS


NOTE1: N/A (Not Applicable)

TRF No.: FCC Part22H Page 21 of 52 Report No.: ES150530365E4 Ver.1.0




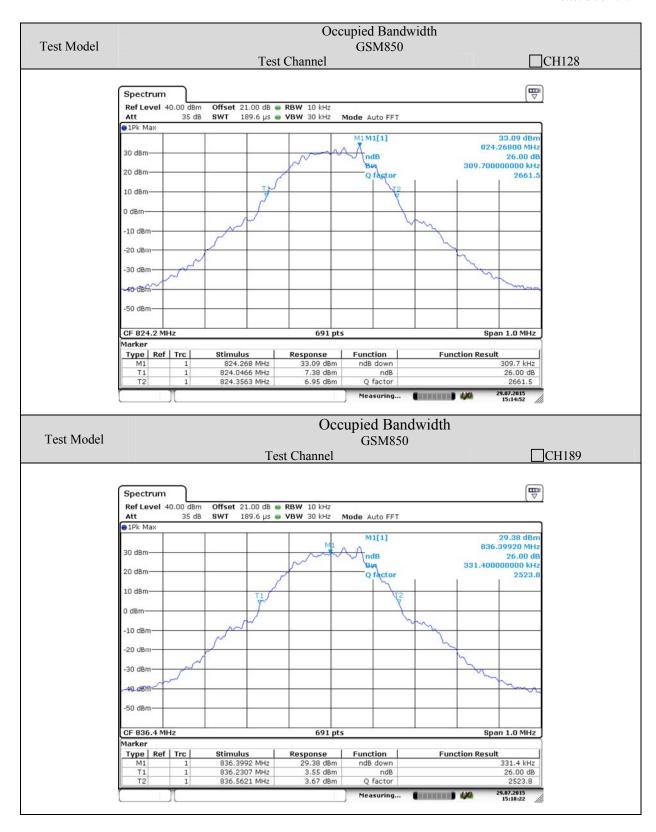




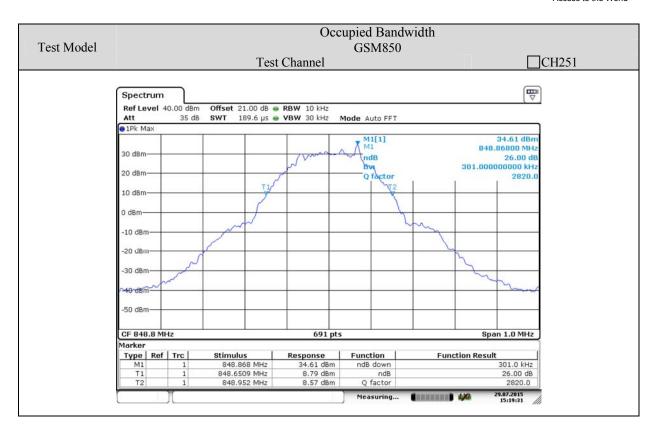




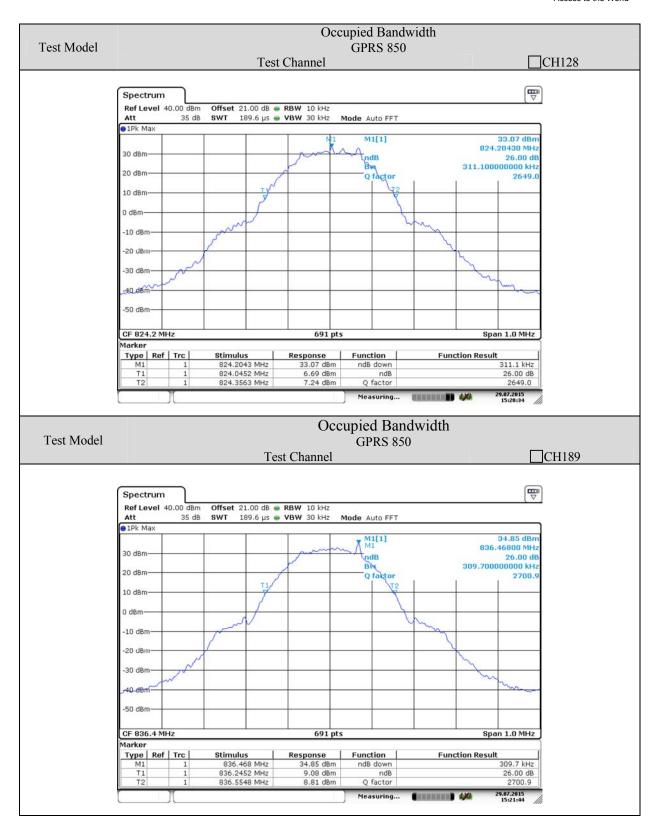



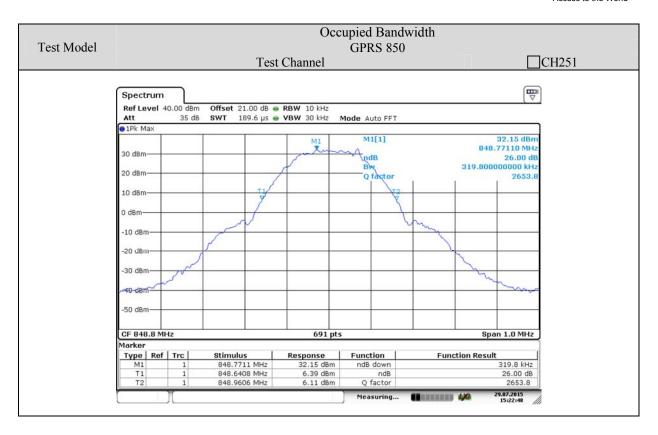



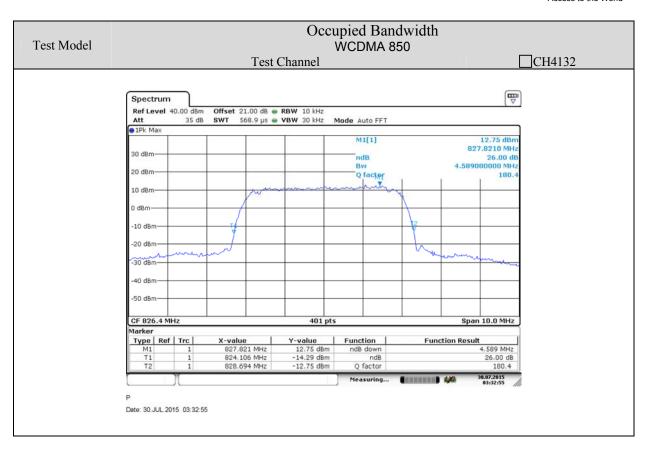







### 7.4 EFFECTIVE ISOTROPIC RADIATED POWER

### 7.4.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

#### 7.4.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

### 7.4.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

#### 7.4.4 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test

The instrument must have an available measurement/resolution bandwidth that is equal to or exceeds the OBW. If this capability is available, then the following procedure can be used to determine the total peak output power.

- a) Set the RBW ≥ OBW.
- b) Set VBW ≥ 3 × RBW.
- c) Set span ≥ 2 × RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points ≥ span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Repeat above procedures until all frequency measured was complete.

A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUTthrough 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

The EUT shall be replaced by a substitution antenna. The test setup refers to figure below. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antennapolarization.

A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl - Ga

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

TRF No.: FCC Part22H Page 28 of 52 Report No.: ES150530365E4 Ver.1.0



ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

### 7.4.5 Test Results

Temperature :  $28^{\circ}$  Test Date : July 31, 2015 Humidity : 65 % Test By: Andy

Operation	Channel	Channel Frequency	E.I.R.P Result	Limit	Vardiet
Mode	Number	(MHz)	(dBm)	(dBm)	Verdict
	128	824.2	29.40	38.5	PASS
GSM850	189	836.4	29.39	38.5	PASS
	251	848.8	29.42	38.5	PASS
	128	824.2	29.36	38.5	PASS
GPRS850	189	836.4	29.38	38.5	PASS
	251	848.8	29.43	38.5	PASS
WCDMA850	4132	826.4	20.57	38.5	PASS
	4182	836.4	20.47	38.5	PASS
	4233	846.6	19.98	38.5	PASS

NOTE1: N/A (Not Applicable)

# Note:

We performed test at both Polarization H and V and compared which is greater value. The greater result will be submitted into the report.

Peak ERP(dBm)=  $P_{Mea}$  - $P_{cl}$  - $P_{Ag}$  - $G_a$ .

TRF No.: FCC Part22H Page 29 of 52 Report No.: ES150530365E4 Ver.1.0



### 7.5 SPURIOUS EMISSION AT ANTENNA TERMINAL

### 7.5.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and part90.210(g) and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

# 7.5.2 Conformance Limit

■ Radiated Spurious Emission out of Band

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

■ 100KHz Band Edg Emissions:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

#### Emission Mask

For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but no more than 250 percent of the authorized bandwidth: At least 116 log (fd/6.1) dB, or 50 + 10 log (P) dB, or 70 dB, whichever is the lesser attenuation;
- (2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB

#### 7.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

#### 7.5.4 Test Configuration

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the Mid ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

then the following procedure can be used to determine spurious emission

- a) RBW = 1 MHz for  $f \ge 1$  GHz(1GHz to 25GHz), 100 kHz for f < 1 GHz(30MHz to 1GHz), 200Hz for f < 150KHz(9KHz to 150KHz). 9KHz for f < 30MHz(150KHz to 30KHz)
- b) Set VBW ≥ 3 × RBW.
- c) Set span wide enough to fully capture the emission being measured
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points ≥ span/RBW.
- a) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

Step1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.

Step2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.

Step3. The table was rotated 360 degrees to determine the position of the highest spurious emission.

Step4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.

Step5. Make the measurement with the spectrum analyzer's RBW , VBW , taking the record of

TRF No.: FCC Part22H Page 30 of 52 Report No.: ES150530365E4 Ver.1.0



maximum spurious emission.

Step6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.

Step7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

Step8. Taking the record of output power at antenna port.

Step9. Repeat step 7 to step 8 for another polarization.

Step10. Emission level (dBm) = output power + substitution Gain. Test Results

#### 7.5.5 Test Results

### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:  $24^{\circ}$  Test Date: July 30, 2015 Humidity: 53 % Test By: King Kong

Test mode: TX Mode

	Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	` AV ´	PK	AV	PK	AV
F								

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

TRF No.: FCC Part22H Page 31 of 52 Report No.: ES150530365E4 Ver.1.0



# ■ Spurious Emission below 1GHz (30MHz to 1GHz)


Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity : 65 % Test By: Andy


Test Mode	Channel Number	Channel Frequency	Worst Result Mode	Verdict	
		(MHz)	Worst Result Mode		
	128	824.2		PASS	
GSM 850	189	836.4	□GSM	PASS	
	251	848.8		PASS	
	128	824.2		PASS	
GPRS 850	189	836.4	□GPRS	PASS	
	251	848.8		PASS	
	4132	826.4		PASS	
WCDMA 850	4182	836.4	□WCDMA850	PASS	
	4233	846.6		PASS	
NOTE1: N/A (Not Applicable)					

All modes have been tested, and the worst result recorded was report as below:

TRF No.: FCC Part22H Page 32 of 52 Report No.: ES150530365E4 Ver.1.0




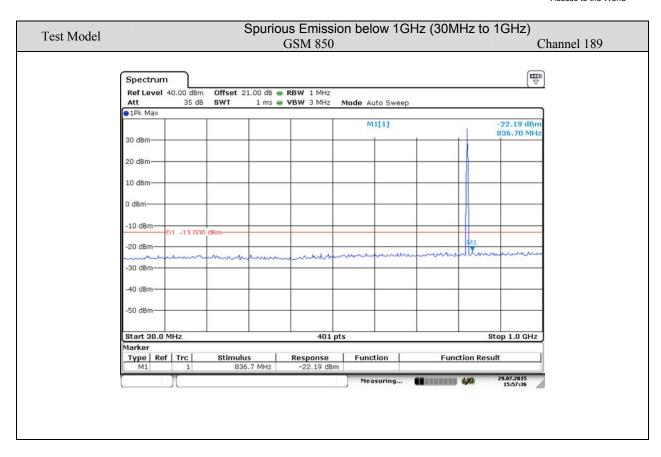

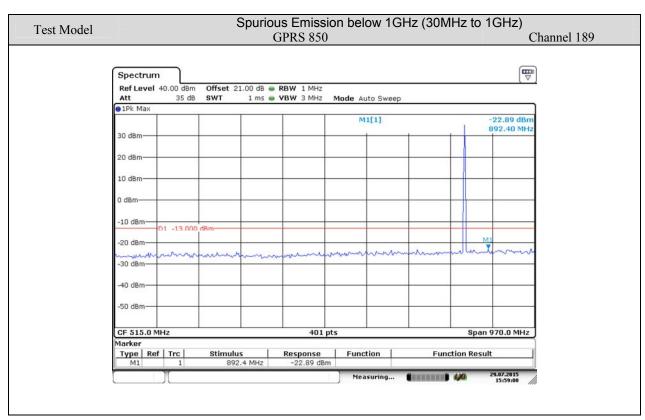

TRF No.: FCC Part22H Page 33 of 52 Report No.: ES150530365E4 Ver.1.0



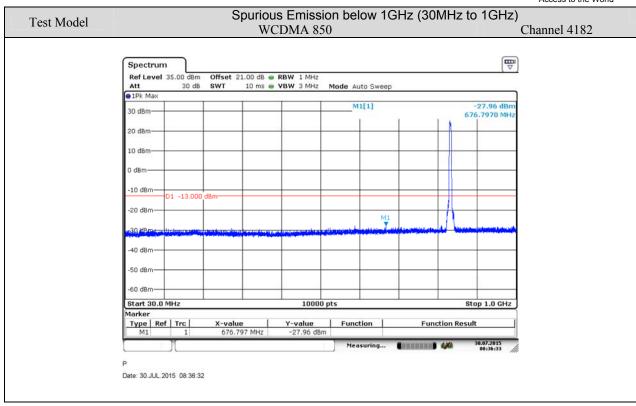



# ■ Spurious Emission Above 1GHz (1GHz to 9GHz)


Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity : 65 % Test By: Andy


Test Mode	Channel Number	Channel Frequency (MHz)	Worst Result Mode	Verdict
	128	824.2		PASS
GSM 850	189	836.4	□GSM	PASS
	251	848.8		PASS
	128	824.2		PASS
GPRS 850	189	836.4	□GPRS	PASS
	251	848.8		PASS
	4132	826.4		PASS
WCDMA 850	4182	836.4	□WCDMA	PASS
	4233	846.6		PASS
NOTE1: N/A (I	Not Applicable)			

All modes have been tested, and the worst result recorded was report as below:

TRF No.: FCC Part22H Page 35 of 52 Report No.: ES150530365E4 Ver.1.0




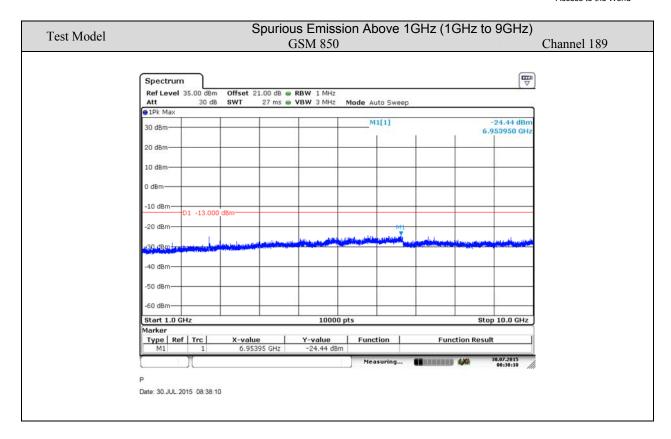

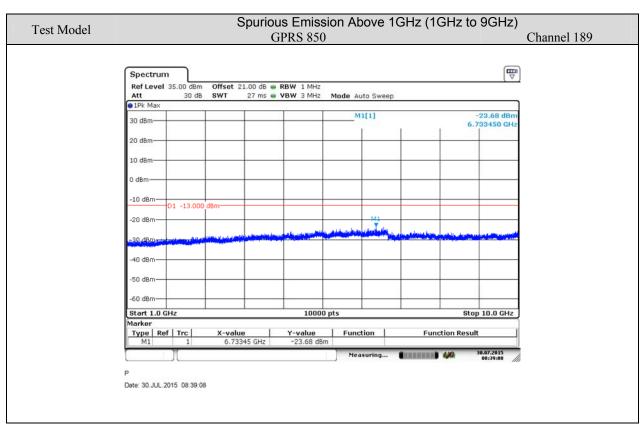

TRF No.: FCC Part22H Page 36 of 52 Report No.: ES150530365E4 Ver.1.0



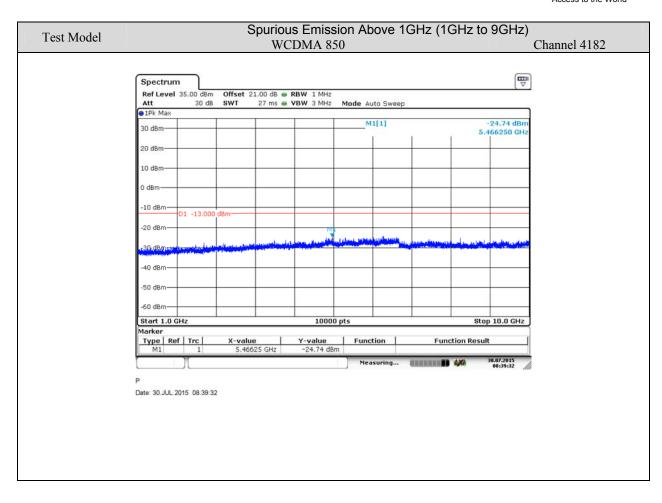



# ■ Band Edge Emission


Temperature :  $28^{\circ}$  Test Date : July 30, 2015 Humidity : 65 % Test By: Andy


Test Mode	Channel Number	Channel Frequency	Worst Result Mode	Verdict
		(MHz)	Worst Nesult Wode	verdict
	128	824.2		PASS
GSM 850	189	836.4	□GSM	PASS
	251	848.8		PASS
	128	824.2		PASS
GPRS 850	189	836.4	□GPRS	PASS
	251	848.8		PASS
	4132	826.4		PASS
WCDMA 850	4182	836.4	□WCDMA	PASS
	4233	846.6		PASS
NOTE1: N/A (	Not Applicable)	2.0.0	I	1 .7.00

All modes have been tested, and the worst result recorded was report as below


TRF No.: FCC Part22H Page 38 of 52 Report No.: ES150530365E4 Ver.1.0




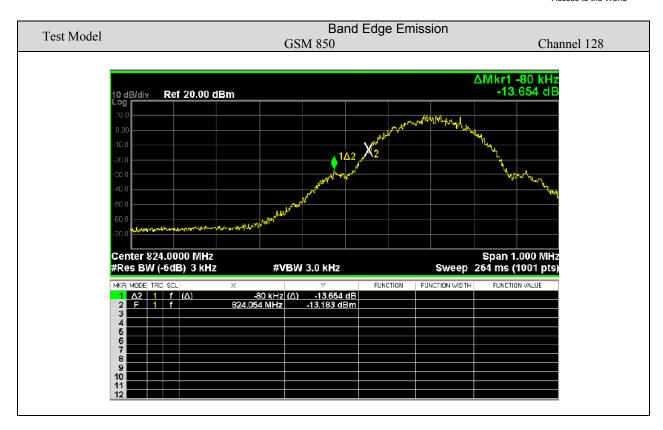

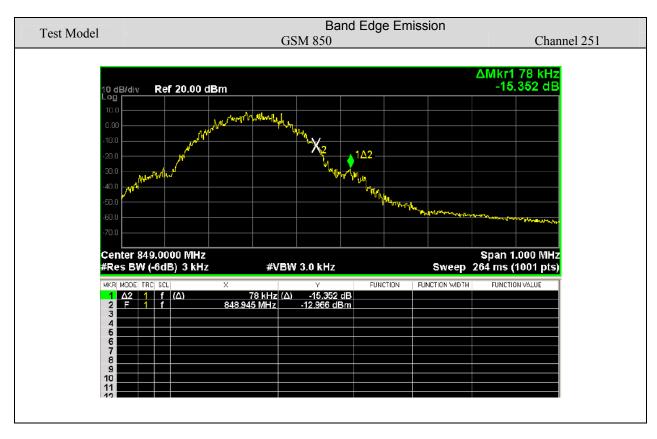




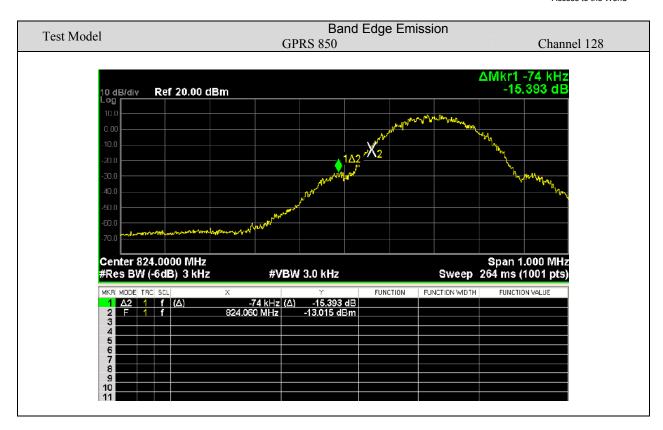

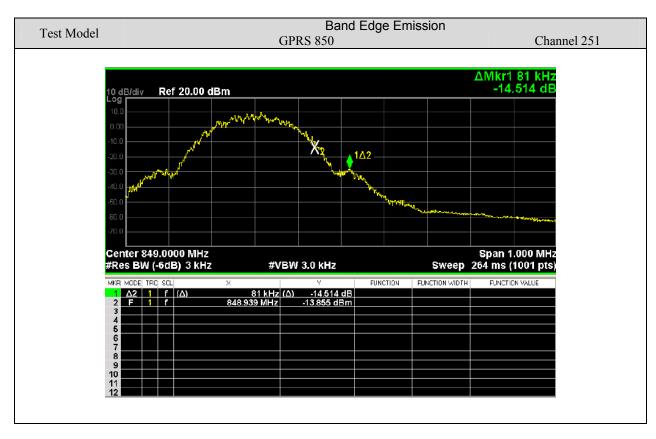



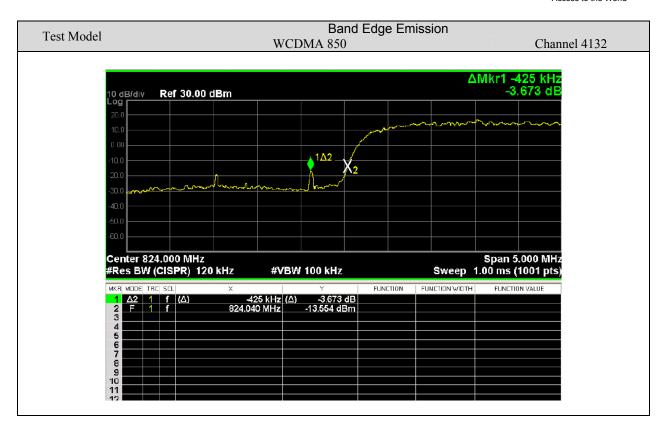





## 7.6 PEAK TO AVERAGE RATIO

### 7.6.1 Applicable Standard

According to FCC 22.913 and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

#### 7.6.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

## 7.6.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

#### 7.6.4 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function:
- b) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
- 1) for continuous transmissions, set to 1 ms.
- 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

### 7.6.5 Test Results

Temperature:  $24^{\circ}$  Test Date: July 30, 2015 Humidity: 53 % Test By: KING KONG

Operation Mode	Channel Number	Channel Frequency (MHz)	P. A .R (dB)	Limit (dB)	Verdict
	128	824.2	4.15	13	PASS
GSM 850	189	836.4	4.20	13	PASS
	251	848.8	4.23	13	PASS
	128	824.2	4.18	13	PASS
GPRS 850	189	836.4	4.30	13	PASS
	251	848.8	4.14	13	PASS
	4132	826.4	5.22	13	PASS
WCDMA 850	4182	836.4	5.15	13	PASS
	4233	846.6	5.07	13	PASS

NOTE1: N/A (Not Applicable)

TRF No.: FCC Part22H Page 42 of 52 Report No.: ES150530365E4 Ver.1.0



## 7.7 FREQUENCY STABILITY

### 7.7.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

### 7.7.2 Conformance Limit

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

### 7.7.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

#### 7.7.4 Test Procedures

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR\_MAX\_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply. Temperature and voltage condition shall be tested to confirm frequency stability.

- (a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.
- (b) The frequency stability shall be measured with variation of primary supply voltage as follows:
- (1) Vary primary supply voltage from 95 to 105 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

## 7.7.5 Test Results

TRF No.: FCC Part22H Page 43 of 52 Report No.: ES150530365E4 Ver.1.0



Operation	Channel	Test Co	ondition	Channel	Freq.Dev.	Deviation	Limit
Mode	Number	Voltage (V)	Temp (℃)	Frequency (MHz)	(Hz)	(ppm)	(ppm)
			-20	824.2	-10	-0.012	2.5
			-10	824.2	-12	-0.015	2.5
			0	824.2	-14	-0.017	2.5
		Vnom	10	824.2	-15	-0.018	2.5
			20	824.2	-8	-0.010	2.5
	CH128		30	824.2	-10	-0.012	2.5
			40	824.2	-11	-0.013	2.5
		050/	50	824.2	-12	-0.015	2.5
		85% Vnom	20	824.2	-14	-0.017	2.5
		115% Vnom	20	824.2	-12	-0.015	2.5
			-20	836.4	-15	-0.018	2.5
		Vnom	-10	836.4	-10	-0.012	2.5
			0	836.4	-9	-0.011	2.5
			10	836.4	-13	-0.016	2.5
			20	836.4	-15	-0.018	2.5
	CH 189		30	836.4	-10	-0.012	2.5
GSM 850	CH 169		40	836.4	-12	-0.014	2.5
			50	836.4	-8	-0.010	2.5
		85% Vnom	20	836.4	-10	-0.012	2.5
		115% Vnom	20	836.4	-11	-0.013	2.5
			-20	848.8	-8	-0.009	2.5
			-10	848.8	-7	-0.008	2.5
		[	0	848.8	-10	-0.012	2.5
			10	848.8	-11	-0.013	2.5
			20	848.8	-11	-0.013	2.5
	011.054		30	848.8	-15	-0.018	2.5
	CH 251		40	848.8	-13	-0.015	2.5
			50	848.8	-10	-0.011	2.5
		85% Vnom	20	848.8	-11	-0.013	2.5
		115% Vnom	20	848.8	-10	-0.012	2.5
	VERDICT				PAS	SS	



Operation	Channel	Test Co	ondition	Channel	Freq.Dev.	Deviation	l imit
Mode	Number	Voltage (V)	Temp (°C)	Frequency (MHz)	(Hz)	(ppm)	(ppm)
			-20	824.2	-10	-0.012	2.5
			-10	824.2	-9	-0.011	2.5
			0	824.2	-15	-0.018	2.5
		Vnom	10	824.2	-17	-0.021	2.5
		VIIOIII	20	824.2	-12	-0.015	
	CH 128		30	824.2	-15	-0.018	
	020		40	824.2	-16	-0.019	
		050/	50	824.2	-18	-0.022	m) (ppm)  (12
		85% Vnom	20	824.2	-16	-0.019	
		115% Vnom	20	824.2	-18	-0.022	
			-20	836.4	-14	-0.017	2.5
		Vnom	-10	836.4	-10	-0.012	
			0	836.4	-16	-0.019	2.5
			10	836.4	-8	-0.010	2.5
		VIIOIII	20	836.4	-10	-0.012	2.5
	CH 189		30	836.4	-12	-0.014	
GPRS 850			40	836.4	-13	-0.016	2.5
			50	836.4	-15	-0.018	2.5
		85% Vnom	20	836.4	-18	-0.022	2.5
		115% Vnom	20	836.4	-15	-0.018	2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5
			-20	848.8	-12	-0.014	2.5
			-10	848.8	-10	-0.011	2.5
			0	848.8	-7	-0.008	
			10	848.8	-10	-0.012	2.5
			20	848.8	-13	-0.015	2.5
	011.054		30	848.8	-13	-0.015	2.5
	CH 251		40	848.8	-10	-0.012	
			50	848.8	-15	-0.018	
		85% Vnom	20	848.8	-10	-0.012	2.5
		115% Vnom	20	848.8	-10	-0.012	2.5
	VERDICT					SS	



Operation	Channel	Test Co	ndition	Channel	Freq.Dev.	Deviation	Limit
Mode	Number	Voltage (V)	Temp (°C)	Frequency (MHz)	(Hz)	(ppm)	(ppm)
			-20	826.4	-10	-0.012	2.5
			-10	826.4	-15	-0.018	2.5
			0	826.4	-17	-0.021	2.5
		Vnom	10	826.4	-18	-0.022	2.5
		VIIOIII	20	826.4	-15	-0.018	2.5
	CH 4132		30	826.4	-12	-0.015	2.5
	011 1102		40	826.4	-10	-0.012	2.5
			50	826.4	-14	-0.017	2.5
		85% Vnom	20	826.4	-17	-0.021	2.5
		115% Vnom	20	826.4	-10	-0.012	2.5
			-20	836.4	-12	-0.014	2.5
		Vnom	-10	836.4	-13	-0.016	2.5
			0	836.4	-15	-0.018	2.5
			10	836.4	-12	-0.014	2.5
			20	836.4	-11	-0.013	2.5
	CH 4182		30	836.4	-12	-0.014	2.5
WCDMA 850			40	836.4	-13	-0.016	2.5
			50	836.4	-15	-0.018	2.5
		85% Vnom	20	836.4	-11	-0.013	2.5
		115% Vnom	20	836.4	-12	-0.014	2.5
			-20	846.6	-9	-0.011	2.5
			-10	846.6	-10	-0.012	2.5
			0	846.6	-11	-0.013	2.5
			10	846.6	-9	-0.011	2.5
		Vnom	20	846.6	-11	-0.013	2.5
	CH 4000		30	846.6	-12	-0.014	2.5
	CH 4233		40	846.6	-9	-0.011	2.5
			50	846.6	-13	-0.015	2.5
		85% Vnom	20	846.6	-12	-0.014	2.5
		115% Vnom	20	846.6	-10	-0.012	2.5
	VERDICT					S	



## 7.8 POWER LINE CONDUCTED EMISSIONS

## 7.8.1 Applicable Standard

According to FCC Part 15.207(a)

## 7.8.2 Conformance Limit

Conducted Emission Limit							
Frequency(MHz) Quasi-peak Average							
0.15-0.5	66-56	56-46					
0.5-5.0	56	46					
5.0-30.0	60	50					

Note: 1. The lower limit shall apply at the transition frequencies

## 7.8.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

## 7.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

## 7.8.5 Test Results


. Test Mode	Channel Number	Channel Frequency (MHz)	Worst Result Mode	Verdict
	128	824.2		PASS
GSM 850	189	836.4	□GSM	PASS
	251	848.8		PASS
	128	824.2		PASS
GPRS 850	189	836.4	☐ GPRS	PASS
	251	848.8		PASS
	4132	826.4		PASS
WCDMA 850	4182	836.4	□WCDMA 850	PASS
	4233	846.6		PASS
NOTE1: N/A (	Not Applicable)			

All modes have been tested, and the worst result recorded was report as below


TRF No.: FCC Part22H Page 47 of 52 Report No.: ES150530365E4 Ver.1.0

<sup>2.</sup> The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



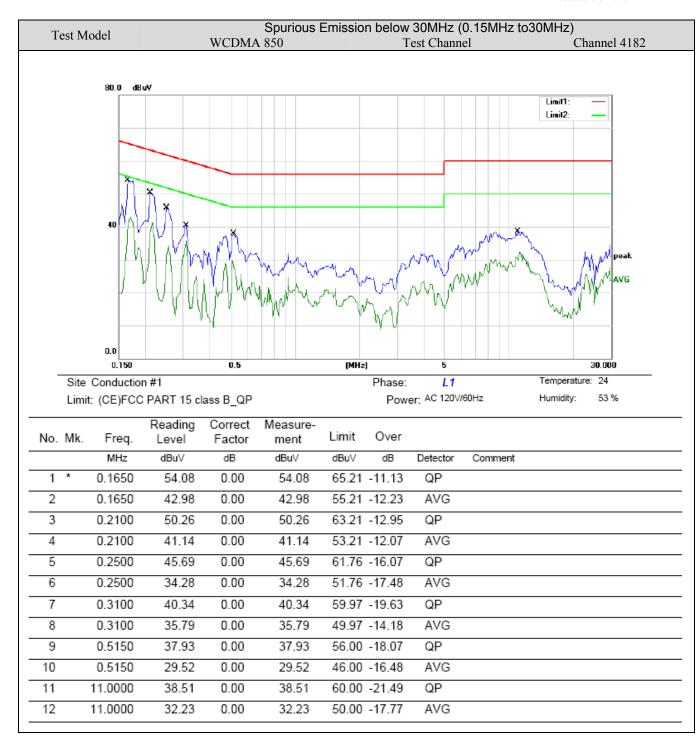



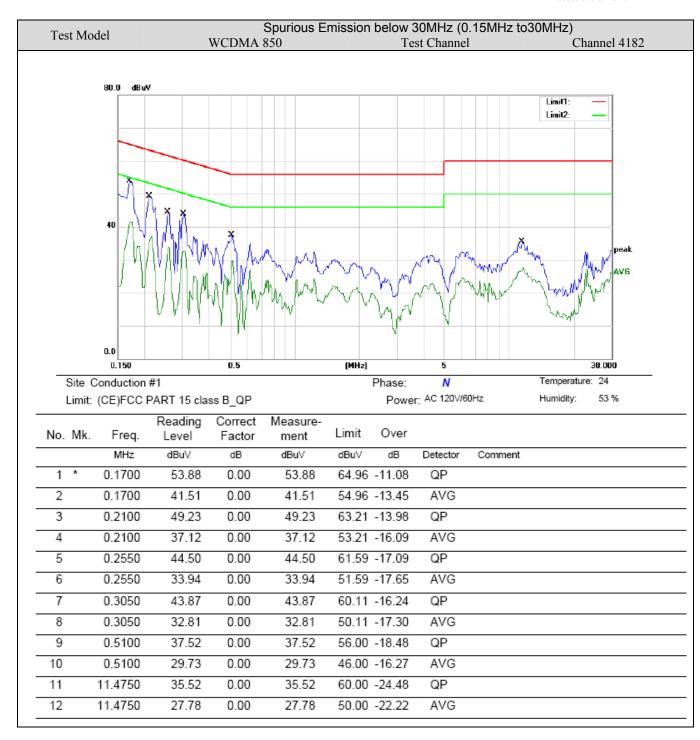



## 7.9 RECEIVER SPURIOUS EMISSION

## 7.9.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

## 7.9.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

## 7.9.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

#### 7.9.4 Test Configuration

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector.

The EUT was communicated with the BTS simulator through Air interface. The Mobile Station operated on the typical channel and the Mobile Station worked in idle mode, transmitter was not work in this test. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

then the following procedure can be used to determine spurious emission

- a) RBW = 1 MHz for  $f \ge 1$  GHz(1GHz to 25GHz), 100 kHz for f < 1 GHz(30MHz to 1GHz), 200Hz for f < 150KHz(9KHz to 150KHz), 9KHz for f < 30MHz(150KHz to 30KHz)
- b) Set VBW ≥ 3 × RBW.
- c) Set span wide enough to fully capture the emission being measured
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points ≥ span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

Step1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.

Step2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.

Step3. The table was rotated 360 degrees to determine the position of the highest spurious emission.

Step4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.

Step5. Make the measurement with the spectrum analyzer's RBW , VBW , taking the record of maximum spurious emission.

Step6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.

Step7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

Step8. Taking the record of output power at antenna port.

Step9. Repeat step 7 to step 8 for another polarization.

Step10. Emission level (dBm) = output power + substitution Gain. Test Results

## 7.9.5 Test Results

TRF No.: FCC Part22H Page 50 of 52 Report No.: ES150530365E4 Ver.1.0



. Test Mode	Channel Number	Channel Frequency (MHz)	Worst Result Mode	Verdict
	128	824.2		PASS
GSM 850	189	836.4	□GSM	PASS
	251	848.8		PASS
	128	824.2		PASS
GPRS 850	189	836.4	□GPRS	PASS
	251	848.8		PASS
	4132	826.4		PASS
WCDMA 850	4182	836.4	□WCDMA	PASS
	4233	846.6		PASS
NOTE1: N/A (N	Not Applicable)	·		

All modes have been tested, and the worst result recorded was report as below

# GSM850 (GSM Link), 9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

GSM850 (GSM Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189	(836.401	⁄IHz)					
425.30	Н	-46.12	3.02	-2.52	-51.66	-13	-38.66
425.30	V	-45.60	3.02	-2.52	-51.14	-13	-38.14

GSM850 (GSM Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189	(836.401	ЛHz)					
2602.80	Н	-53.60	7.05	10.95	-49.70	-13	-36.70
2602.80	V	-54.10	7.05	10.95	-50.20	-13	-37.20

# GSM850 (GPRS 12 Link), 9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

TRF No.: FCC Part22H Page 51 of 52 Report No.: ES150530365E4 Ver.1.0



GSM850 (GPRS 12 Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189	(836.401	⁄IHz)					
420.13	Н	-44.10	3.12	-2.34	-49.56	-13	-36.56
420.13	V	-45.80	3.12	-2.34	-51.26	-13	-38.26

GSM850 (GPRS 12 Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189	(836.401	ЛHz)					
2435.10	Н	-51.30	7.12	-3.65	-62.07	-13	-49.07
2435.10	V	-52.10	7.12	-3.65	-62.87	-13	-49.87

## WCDMA Band V 9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

# WCDMA Band V 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)			
Middle Channel 4182 (836.50MHz)										
602.31	Н	-46.32	4.02	-3.15	-53.49	-13	-40.49			
602.31	V	-45.03	4.02	-3.15	-52.20	-13	-39.20			

## **WCDMA Band V Above 1GHz**

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)		
Middle Channel 4182 (836.50MHz)									
1530.26	Н	-46.35	7.12	10.34	-43.13	-13	-30.13		
1530.26	V	-48.31	7.12	10.34	-45.09	-13	-32.09		
2802.42	Н	-50.01	8.95	10.34	-48.62	-13	-35.62		
2802.42	V	-49.35	8.95	10.34	-47.96	-13	-34.96		
5360.15	Н	-48.38	10.02	13.15	-45.25	-13	-32.25		
5360.15	V	-49.03	10.02	13.15	-45.90	-13	-32.90		

\*\*\*END OF REPORT \*\*\*

TRF No.: FCC Part22H Page 52 of 52 Report No.: ES150530365E4 Ver.1.0