

FCC RADIO TEST REPORT FCC ID: 2ACPR-W7421

Product: Tablet PC

Trade Name: Bmorn

Model Number: W7421

W7413,W7406,W740,W7405,W7409,

Serial Model: W7416,W7422,W7423,W7424,W7425, W7426,W7427,W7428,W7429,W8419,

W8420,W8407,W8410,W1415

Report No.: NTEK-2015NT08242551F4

Prepared for

Shenzhen Bmorn Technology Co.,Ltd.

5/F, Hengfang Verteran Industrial Park,Xingye Road, Xixiang,
Bao'an,Shenzhen, Guangdong,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website:www.ntek.org.cn





TEST RESULT CERTIFICATION

Applicant's name	Shenzhen Bmorn Technology Co.,Ltd.		
Address:			
	Bao'an,Shenzhen, Guangdong,China		
Manufacture's Name:	Shenzhen Bmorn Technology Co.,Ltd.		
Address:	5/F, Hengfang Verteran Industrial Park, Xingye Road, Xixia Bao'an, Shenzhen, Guangdong, China	ng,	
Product name:	Tablet PC		
Model and/or type reference:	W7421		
Serial Model :	W7413,W7406,W740,W7405,W7409,W7416,W7422, W7423,W7424,W7425,W7426,W7427,W7428,W7429,W8 W8420,W8407,W8410,W1415	419,	
Standards:	FCC Part 22H and 24E: 01 Oct. 2014		
Test procedure	TIA/EIA 603D		
under test (EUT) is in compliand sample identified in the report. This report shall not be reproduct	been tested by NTEK, and the test results show that the end with the FCC requirements. And it is applicable only to end except in full, without the written approval of NTEK, this K, personnel only, and shall be noted in the revision of the end.	the tested document	
Date of Test			
Date (s) of performance of tests	24 Aug. 2015 ~06 Sep. 2015		
Date of Issue	06 Sep. 2015		
Test Result	Pass		
Testing Engineer	: Eileen Wu. (Eileen Liu)		
Technical Manage	: Brown Ln		
	(Brown Lu)		
Authorized Signat	ory: Sam. Chew		
	(Sam Chen)		



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 MEASUREMENT INSTRUMENTS	
1.6 SPECIAL ACCESSORIES	
1.7 EQUIPMENT MODIFICATIONS	6
2. SYSTEM TEST CONFIGURATION	
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 GENERAL TECHNICAL REQUIREMENTS	
2.4 CONFIGURATION OF EUT SYSTEM	8
3. SUMMARY OF TEST RESULTS	9
4. DESCRIPTION OF TEST MODES	. 9
5. OUTPUT POWER	10
5.1 Conducted Output Power	.10
5.2 Radiated Output Power	.15
NOTE 1: IN THE PART, RESULT THE WORST CASE GPRS 1SLOT FOR GSM 850 AND PCS1900, AND RMC 12.2KBPS FOR BAND II AND BAND V	17
6. SPURIOUS EMISSION	18
6.1 CONDUCTED SPURIOUS EMISSION	.18
7. FREQUENCY STABILITY	26



7.1 MEASUREMENT METHOD
7.2 PROVISIONS APPLICABLE
7.3 MEASUREMENT RESULT
8. BANDWIDTH
8.1APPLICABLE STANDARD30
8.2 Test Procedure
8.3 MEASUREMENT RESULT
9. BAND EDGE
9.1 Applicable Standard
9.2 Test Procedure
9.3 MEASUREMENT RESULT
10. PEAK-TO-AVERAGE RATIO
DESCRIPTION OF THE PAR MEASUREMENT
10.1 MEASURING INSTRUMENTS
10.2 TEST PROCEDURES
10.3 TEST SETUP
10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO32
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)
EMISSION BANDWIDTH (-26DBC)
APPENDIX III
TEST PLOTS FOR BAND EDGES
PHOTOGRAPHS OF TEST SETUP61



1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

7 major toominoar accomption o	. Let le decembed de leneving.		
Product Designation:	Tablet PC		
Hardware version:			
Software version:			
Frequency Bands:	☐GSM 850 ☐PCS 1900 (U.S. Bands) ☐GSM 900 ☐DCS 1800 (Non-U.S. Bands) U.S. Bands: ☐UMTS FDD Band II ☐UMTS FDD Band V Non-U.S. Bands: ☐UMTS FDD Band I ☐UMTS FDD Band VIII		
Antenna:	FPCB Antenna		
Antenna gain:	1.0 dBi		
Power Supply:	DC 3.7V by battery		
Battery parameter:	DC 3.7V,2800mAh		
Adapter Input:	100-240V~,50/60 Hz		
Adapter Output:	5.0V===,2A		
GPRS Class	Multi-Class12 Only 4 timeslots are used for GPRS		
SIM CARD	The Phone Two SIM Card sockets		
Extreme Vol. Limits:	DC3.5 V to 4.2 V (Nominal DC3.7 V)		
Extreme Temp. Tolerance	-10℃ to +50℃		
-	** Note: The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.		



1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2ACPR-W7421** filing to comply with the FCC Part 22H&24E.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603D and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937 IC Registration No.:9270A-1, CNAS Registration No.:L5516

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2016.7.06
TEST RECEIVER	R&S	ESCI	A0304218	2016.7.06
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2016.7.06
COMMUNICATION TESTER	R&S	CMU200	A0304247	2016.7.06
TEST RECEIVER	R&S	FCKL1528	A0304230	2016.7.06
LISN	SCHWARZBECK	NSLK8127	A0304233	2016.7.06
CLIMATE CHAMBER	ALBATROSS			2016.7.06
Loop Antenna	Daze	ZN30900N	SEL0097	2016.7.06
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2016.7.06
Horn Antenna	EM	EM-AH-10180	N/A	2016.7.06

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output	Conducted output power	22 012(a) / 24 222 (b)
ı	Power	Radiated output power	22.913(a) / 24.232 (b)
	Spurious	Conducted	
2	Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)
7	Peak-to-Average Ratio		24.232(d)





2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Tablet PC	W7421	FCC ID: 2ACPR-W7421	EUT

Note: All the accessories have been used during the test. the following "EUT" in setup diagram means EUT system.




3. SUMMARY OF TEST RESULTS

Item Number	Item	n Description	FCC Rules	Result
		Conducted		
1	Output	Output Power	22.913(a) / 24.232 (b)	Pass
'	Power	Radiated	22.913(a) / 24.232 (b)	Fd55
		Output Power		
		Conducted		
2	Spurious	Spurious Emission	2 4054 / 22 047 / 24 220	Daga
2	Emission	Radiated	2.1051 / 22.917 / 24.238	Pass
		Spurious Emission		
3	Frequency	Stability	2.1055 /24.235	Pass
4	Occupied Bandwidth		2.1049 (h)(i)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
6	Band Edge		22.917(b) / 24.238 (b)	Pass
7	Peak-to-Ave	rage Ratio	24.232(d)	Pass

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.





5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSDPA band V, HSUPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT



GSM850:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
	824.2	32.10
GSM850	836.6	32.11
	848.8	32.06
CDDC050	824.2	32.11
GPRS850	836.6	32.14
(1 Slot)	848.8	32.09
CDDC050	824.2	29.03
GPRS850	836.6	29.06
(2 Slot)	848.8	29.04
CDDCGC	824.2	27.22
GPRS850 (3 Slot)	836.6	27.21
	848.8	27.15
CDBS050	824.2	26.00
GPRS850	836.6	26.02
(4 Slot)	848.8	25.97



PCS1900:

	Frequency	Maximum
Mode	(MHz)	Burst-Average Output
	(1411 12)	Power
	1850.2	29.85
GSM1900	1880	29.89
	1909.8	29.77
CDB\$4000	1850.2	29.90
GPRS1900	1880	29.93
(1 Slot)	1909.8	29.77
CDB\$4000	1850.2	26.91
GPRS1900	1880	26.70
(2 Slot)	1909.8	26.63
CDB\$4000	1850.2	25.06
GPRS1900 (3 Slot)	1880	24.86
	1909.8	24.78
CDDS1000	1850.2	23.84
GPRS1900	1880	23.65
(4 Slot)	1909.8	23.57




UMTS BAND II

Mode	Frequency	Maximum Burst-Average
Wode	(MHz)	Output Power
WCDMA 1900	1852.4	20.66
RMC -	1880.0	21.54
RIVIC	1907.6	22.17
WCDMA 4000	1852.4	20.69
WCDMA 1900	1880.0	21.54
AMR	1907.6	22.26
LICDDA	1852.4	19.57
HSDPA	1880	20.48
Subtest 1	1907.6	21.16
LIODDA	1852.4	19.68
HSDPA	1880	20.63
Subtest 2	1907.6	21.09
LIODDA	1852.4	19.33
HSDPA	1880	20.14
Subtest 3	1907.6	20.68
LIODDA	1852.4	19.26
HSDPA - Subtest 4 -	1880	20.05
	1907.6	20.31
LICLIDA	1852.4	19.56
HSUPA	1880.0	19.40
Subtest 1	1907.6	20.17
LICLIDA	1852.4	19.48
HSUPA	1880.0	19.36
Subtest 2	1907.6	20.11
LICLIDA	1852.4	19.52
HSUPA	1880.0	19.45
Subtest 3	1907.6	20.02
HSUPA - Subtest 4 -	1852.4	19.62
	1880.0	19.53
	1907.6	20.13
LIQUIDA	1852.4	20.04
HSUPA	1880.0	20.16
Subtest 5	1907.6	20.32



UMTS BAND V

Mode	Frequency	Maximum Burst-Average
wode	(MHz)	Output Power
WODMA OFO	826.4	22.84
WCDMA 850	835.0	22.95
RMC	846.6	22.66
14/07144 070	826.4	22.90
WCDMA 850	835.0	22.85
AMR	846.6	22.71
	826.4	21.77
HSDPA	835.0	21.90
Subtest 1	846.6	21.66
	826.4	21.81
HSDPA	835.0	21.96
Subtest 2	846.6	21.72
	826.4	21.35
HSDPA	835.0	21.26
Subtest 3	846.6	21.33
	826.4	21.02
HSDPA	835.0	21.19
Subtest 4	846.6	21.26
	826.4	21.81
HSUPA	835.0	21.82
Subtest 1	846.6	21.61
	826.4	21.77
HSUPA	835.0	21.79
Subtest 2	846.6	21.59
	826.4	21.82
HSUPA	835.0	21.78
Subtest 3	846.6	21.76
	826.4	21.75
HSUPA Subtest 4	835.0	21.83
	846.6	21.66
	826.4	21.98
HSUPA	835.0	21.87
Subtest 5	846.6	21.96





5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603D-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..
- 9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)



5.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
	Res		sult	
Mode	Frequency	Max. Peak ERP Polarization		Conclusion
		(dBm)	Of Max. ERP	
	824.2	29.98	Horizontal	Pass
	824.2	30.02	Vertical	Pass
GSM850	836.6	30.10	Horizontal	Pass
GSIVI850	836.6	29.63	Vertical	Pass
	848.8	29.99	Horizontal	Pass
	848.8	30.05	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
		Result		Conclusion
Mode	Frequency	cy Max. Peak ERP Polarization		
		(dBm)	Of Max. ERP	
	824.2	29.01	Horizontal	Pass
	824.2	29.63	Vertical	Pass
GPRS850	836.6	29.18	Horizontal	Pass
GPRS850	836.6	29.77	Vertical	Pass
	848.8	29.56	Horizontal	Pass
	848.8	29.54	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
		Res	Result	
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	29.03	Horizontal	Pass
	1850.2	28.69	Vertical	Pass
PCS 1900	1880.0	29.31	Horizontal	Pass
	1880.0	28.78	Vertical	Pass
	1909.8	28.66	Horizontal	Pass
	1909.8	28.32	Vertical	Pass



	Radiated Power (E.I.R.P) for GPRS 1900 MHZ				
	Result				
Mode	Frequency	Max. Peak Polarization		Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	1850.2	28.13	Horizontal	Pass	
	1850.2	28.11	Vertical	Pass	
GPRS	1880.0	27.44	Horizontal	Pass	
1900	1880.0	27.73	Vertical	Pass	
	1909.8	27.94	Horizontal	Pass	
	1909.8	27.86	Vertical	Pass	

Radiated Power (E.I.R.P) for UMTS band II				
			Result	
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1852.4	22.61	Horizontal	Pass
	1852.4	22.39	Vertical	Pass
RMC	1880.0	22.41	Horizontal	Pass
12.2kbps	1880.0	21.97	Vertical	Pass
	1907.6	21.88	Horizontal	Pass
	1907.6	21.93	Vertical	Pass

	Radiated Power (E.I.R.P) for UMTS band V				
		Result			
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
	826.4	21.56	Horizontal	Pass	
	826.4	22.47	Vertical	Pass	
RMC	836.6	21.68	Horizontal	Pass	
12.2kbps	836.6	21.93	Vertical	Pass	
	846.6	21.76	Horizontal	Pass	
	846.6	21.97	Vertical	Pass	

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band II and band v.



6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.


- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz			
Channel Frequency (MHz)			
128	824.2		
190	836.6		
251	848.8		

Typical Channels for testing of PCS 1900 MHz			
Channel Frequency (MHz)			
512	1850.2		
661	1880.0		
810	1909.8		

Typical Channels for testing of UMTS band II			
Channel Frequency (MHz)			
9262	1852.4		
9400	1880.0		
9538	1907.6		

Typical Channels for testing of UMTS band V			
Channel Frequency (MHz)			
4132	826.4		
4183	836.6		
4233	846.6		





6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.




6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603D-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.Only shown the worst data.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm)The SA is calibrated using following setup.

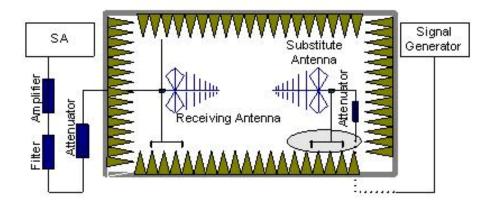

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.



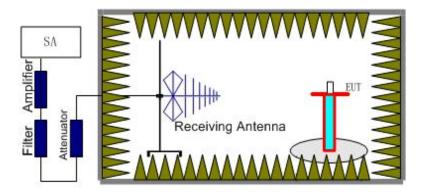

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 835.0MHz, 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


Note: only result the worst condition of each test mode:



6.2.3 MEASUREMENT RESULT

GSM 850:


Test Results for Channel 128/824.2 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1648.4	-31.56	7.8	-23.76	-13.00	Vertical
1648.4	-32.55	7.8	-24.75	-13.00	Horizontal
2472.6	-31.48	11	-20.48	-13.00	Vertical
2472.6	-33.28	11	-22.28	-13.00	Horizontal
3296.8	-31.2	12.3	-18.90	-13.00	Horizontal
3296.8	-32.16	12.3	-19.86	-13.00	Vertical
	Test Re	sults for Cha	nnel 190/836.	6 MHz	
1673.2	-32.78	8	-24.78	-13.00	Vertical
1673.2	-33.65	8	-25.65	-13.00	Horizontal
2509.8	-30.18	11.2	-18.98	-13.00	Vertical
2509.8	-30.95	11.2	-19.75	-13.00	Horizontal
3346.4	-32.47	12.6	-19.87	-13.00	Horizontal
3346.4	-32.59	12.6	-19.99	-13.00	Vertical
	Test Re	sults for Cha	nnel 251/848.	8 MHz	
1697.6	-29.98	8.1	-21.88	-13.00	Vertical
1697.6	-30.15	8.1	-22.05	-13.00	Horizontal
2546.4	-30.82	11.69	-19.13	-13.00	Vertical
2546.4	-29.68	11.69	-17.99	-13.00	Horizontal
3395.2	-32.15	12.92	-19.23	-13.00	Horizontal
3395.2	-31.64	12.92	-18.72	-13.00	Vertical





PCS 1900:


Test Results for Channel 512/1850.2MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.4	-34.55	13.42	-21.13	-13.00	Horizontal
3700.4	-37.49	13.42	-24.07	-13.00	Vertical
5550.6	-34.54	17.12	-17.42	-13.00	Vertical
5550.6	-32.41	17.12	-15.29	-13.00	Horizontal
7400.8	-35.62	19.26	-16.36	-13.00	Horizontal
7400.8	-36.76	19.26	-17.5	-13.00	Vertical
	Test Results for Channel 661/1880.0MHz				
3760	-36.15	13.76	-22.39	-13.00	Horizontal
3760	-33.98	13.76	-20.22	-13.00	Vertical
5640	-34.17	17.56	-16.61	-13.00	Vertical
5640	-40.11	17.56	-22.55	-13.00	Horizontal
7520	-39.69	19.6	-20.09	-13.00	Horizontal
7520	-40.12	19.6	-20.52	-13.00	Vertical
	Test Res	sults for Cha	nnel 810/1909	9.8MHz	
3819.6	-38.67	13.87	-24.8	-13.00	Horizontal
3819.6	-35.62	13.87	-21.75	-13.00	Vertical
5729.4	-38.11	17.66	-20.45	-13.00	Vertical
5729.4	-38.59	17.66	-20.93	-13.00	Horizontal
7639.2	-40.12	19.75	-20.37	-13.00	Horizontal
7639.2	-42.74	19.75	-22.99	-13.00	Vertical





UMTS band II:

Test Results for Channel 9262/1852.4MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.8	-31.55	13.42	-18.13	-13.00	Horizontal
3700.8	-31.26	13.42	-17.84	-13.00	Vertical
5551.2	-37.89	17.12	-20.77	-13.00	Vertical
5551.2	-36.45	17.12	-19.33	-13.00	Horizontal
Test Results for Channel 9400/1880MHz					
3760	-33.62	13.76	-19.86	-13.00	Horizontal
3760	32.81	13.76	46.57	-13.00	Vertical
5640	-40.19	17.56	-22.63	-13.00	Vertical
5640	-37.95	17.56	-20.39	-13.00	Horizontal
	Test Resu	ults for Chan	nel 9538/1907.	6MHz	
3819.2	-35.66	13.87	-21.79	-13.00	Horizontal
3819.2	-34.18	13.87	-20.31	-13.00	Vertical
5728.8	-39.68	17.66	-22.02	-13.00	Vertical
5728.8	-37.48	17.66	-19.82	-13.00	Horizontal





UMTS band V:

Test Results for Channel 4233/846.6MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1673.2	-30.29	8.1	-22.19	-13.00	Vertical
1673.2	-30.52	8.1	-22.42	-13.00	Horizontal
2509.8	-33.99	11.69	-22.3	-13.00	Horizontal
2509.8	-36.78	11.69	-25.09	-13.00	Vertical
3346.4	-34.17	12.92	-21.25	-13.00	Horizontal
3346.4	-40.15	12.92	-27.23	-13.00	Vertical
	Test R	esults for Chan	nel 4182/836.4MF	łz	
1672.8	-32.61	8	-24.61	-13.00	Vertical
1672.8	-29.36	8	-21.36	-13.00	Horizontal
2509.2	-31.47	11.2	-20.27	-13.00	Horizontal
2509.2	-32.06	11.2	-20.86	-13.00	Vertical
3345.6	-33.05	12.6	-20.45	-13.00	Horizontal
3345.6	-31.75	12.6	-19.15	-13.00	Vertical
	Test Res	ults for Char	nnel 4132/826.	4MHz	
1652.8	-30.45	8	-22.45	-13.00	Vertical
1652.8	-33.59	8	-25.59	-13.00	Horizontal
2479.2	-31.74	11.2	-20.54	-13.00	Horizontal
2479.2	-30.21	11.2	-19.01	-13.00	Vertical
3305.6	-31.51	12.6	-18.91	-13.00	Horizontal
3305.6	-30.82	12.6	-18.22	-13.00	Vertical

Note: Below 30MHZ no Spurious found.



7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- Subject the EUT to overnight soak at -10℃.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5° C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.



7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.5	21	0.025	
3.7	19	0.023	
4.2	26	0.031	

Frequency Error Against Temperature for GSM 850 band			
Temperature (℃)	Frequency Error (Hz)	Frequency Error (ppm)	
-10	33	0.039	
0	37	0.044	
10	21	0.025	
20	20	0.024	
30	19	0.023	
40	27	0.032	
50	36	0.043	

Note: The EUT doesn't work below -10℃



Frequency Error Against Voltage for PCS 1900 band			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.5	21	0.011	
3.7	39	0.021	
4.2	27	0.014	

Frequency Error Against Temperature for PCS 1900 band			
Temperature (℃)	Frequency Error (Hz)	Frequency Error (ppm)	
-10	25	0.013	
0	31	0.016	
10	29	0.015	
20	35	0.019	
30	26	0.014	
40	19	0.010	
50	17	0.009	

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Frequency Error Against Voltage for UMTS band II			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.5	22	0.012	
3.7	25	0.013	
4.2	18	0.010	

Frequency Error Against Temperature for UMTS band II			
Temperature (℃)	Frequency Error (Hz)	Frequency Error (ppm)	
-10	35	0.019	
0	23	0.012	
10	21	0.011	
20	36	0.019	
30	31	0.016	
40	22	0.012	
50	19	0.010	

Note: The EUT doesn't work below -10°C



Frequency Error Against Voltage for UMTS band V			
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	
3.5	24	0.029	
3.7	25	0.030	
4.2	15	0.018	

Frequency Error Against Temperature for UMTS band V			
Temperature (℃)	Frequency Error (Hz)	Frequency Error (ppm)	
-10	33	0.039	
0	21	0.025	
10	34	0.041	
20	19	0.023	
30	22	0.026	
40	21	0.025	
50	26	0.031	

Note: The EUT doesn't work below -10 $^{\circ}\mathrm{C}$

Report No.: NTEK-2015NT08242551F4 Page 30 of 61




8. BANDWIDTH

8.1APPLICABLE STANDARD

FCC §2.1049, §22.917, §22.905 and §24.238.

8.2 Test Procedure

- 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- 2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.
- 3. Details according with KDB 971168 section 4.1 & 4.2.

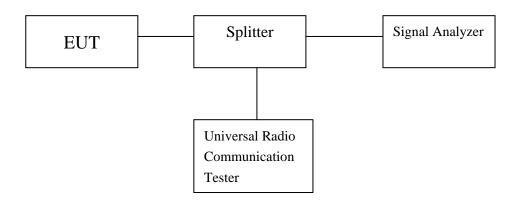

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
Low Channel	824.2	243.859	
Middle Channel	836.6	247.188	
High Channel	848.8	246.765	

Occupied Bandwidth (99%) for PCS 1900 band						
Mode	Frequency(MHz) Occupied Bandwidth (99%)(kHz)					
Low Channel	1850.2	246.520				
Middle Channel	1880.0	249.368				
High Channel	1909.8	246.251				





Occupied Bandwidth (99%) for UMTS band II				
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
Low Channel	1852.4	4.063		
Middle Channel	1880.0	4.074		
High Channel	1907.6	4.054		

Occupied Bandwidth (99%) for UMTS band V					
Mode	Frequency(MHz) Occupied Bandwidth (99%)(MHz)				
Low Channel	826.4	4.054			
Middle Channel	836.4	4.075			
High Channel	846.6	4.075			

Emission Bandwidth (-26dBc) for GSM 850 band						
Mode	Frequency(MHz) Emission Bandwidth (-26dBc)(kHz)					
Low Channel	824.2	313.680				
Middle Channel	836.6	318.802				
High Channel	848.8	313.537				

Emission Bandwidth (-26dBc) for PCS 1900 band						
Mode	Mode Frequency(MHz) Emission Bandwidth (-26dBc)(kHz)					
Low Channel	1850.2	320.471				
Middle Channel	1880.0	316.649				
High Channel	1909.8	316.051				

Emission Bandwidth (-26dBc) for UMTS band II			
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
Low Channel	1852.4	4.619	
Middle Channel	1880.0	4.643	
High Channel	1907.6	4.646	

Emission Bandwidth (-26dBc) for UMTS band V						
Mode	Frequency(MHz) Emission Bandwidth (-26dBc)(MHz)					
Low Channel	826.4	4.560				
Middle Channel	836.4	4.628				
High Channel	846.6	4.583				



9. BAND EDGE


9.1 Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.

9.2 Test Procedure

- 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- 2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
- 3. Details according with KDB 971168 section 6.0.

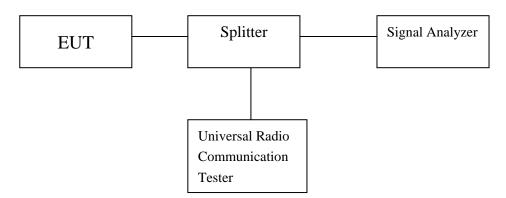

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges



10. Peak-to-Average Ratio

DESCRIPTION OF THE PAR MEASUREMENT

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


10.1 MEASURING INSTRUMENTS


See list of measuring instruments of this test report.

10.2 TEST PROCEDURES

- 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
- c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
- 4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

10.3 TEST SETUP

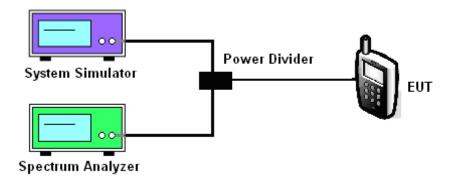






10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO

1EST RESULT OF FEAR-TO-AVERAGE RATIO						
		Cellular	Band			
Modes		GSM850		GSM1900		
	128	190	251	512	661	810
Channel	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency(MHz)	824.2 836.6 848.8 1850.2 1880 1909.8				1909.8	
Peak-to-Average Ratio (dB)	0.01	0.02	0.01	0.01	0.02	0.00
		Cellular	Band			
Modes	WCDMA Band II WCDMA Band V					
wodes	(RMC 12.2Kbps)			(RMC 12.2Kbps)		
Channel	9262	9400	9538	4132	4175	4233
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency(MHz)	z) 1852.4 1880 1907.6 826.4 836.6 846.6				846.6	
Peak-to-Average Ratio	0.12	0.15	0.21	0.24	0.30	0.22
(dB)	0.12	0.15	0.21	0.24	0.30	0.22







APPENDIX I
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION



CONDUCTED EMISSION IN GSM 850 BAND Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

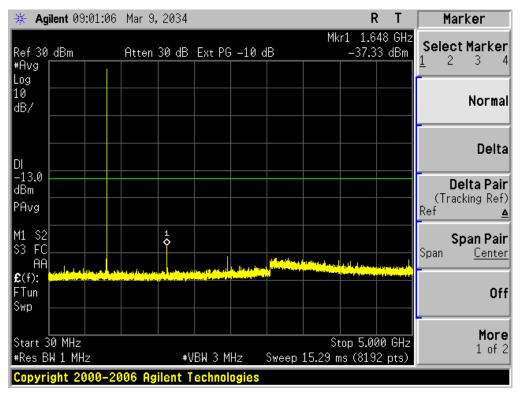


Conducted Emission Transmitting Mode CH 128 5GHz - 10GHz

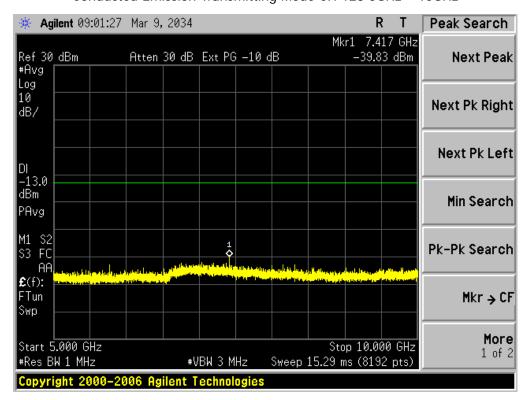





Conducted Emission Transmitting Mode CH 190 30MHz - 5GHz

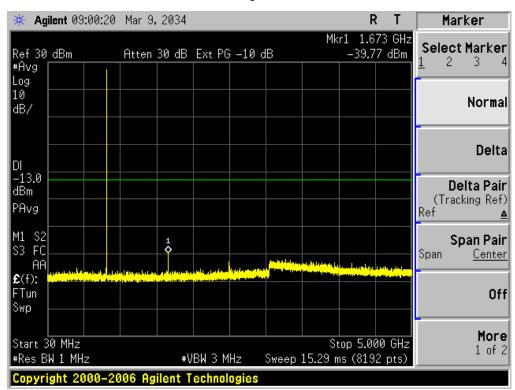


Conducted Emission Transmitting Mode CH 190 5GHz - 10GHz

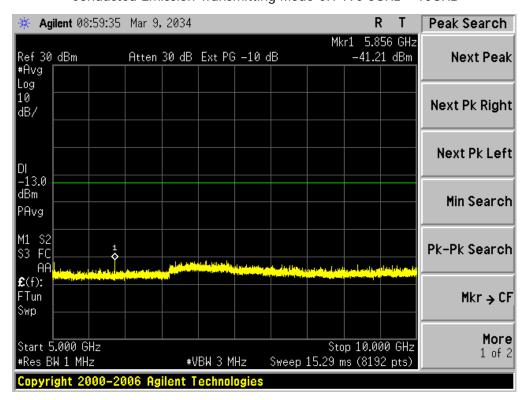






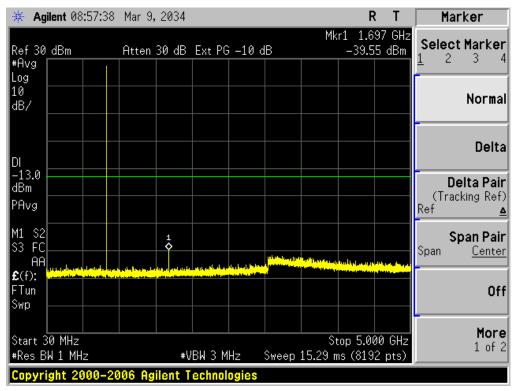


Conducted Emission Transmitting Mode CH 251 5GHz - 10GHz

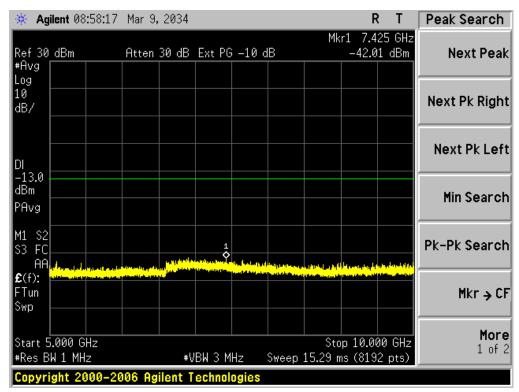




CONDUCTED EMISSION IN PCS1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

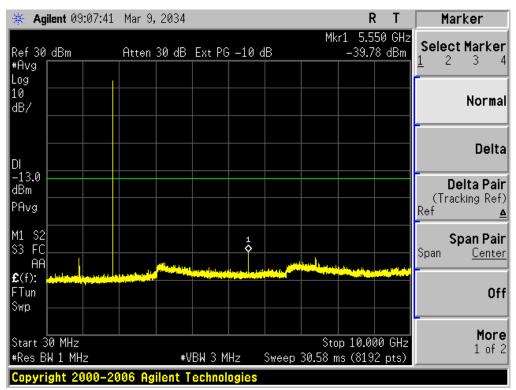


Conducted Emission Transmitting Mode CH 512 10GHz - 20GHz

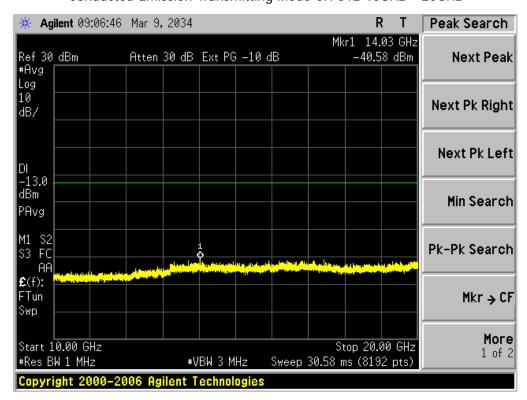





Conducted Emission Transmitting Mode CH 661 30MHz - 10GHz

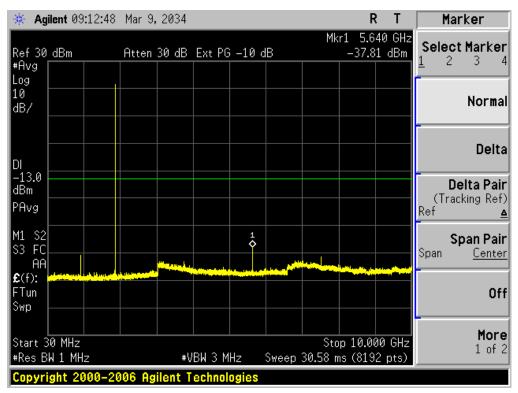


Conducted Emission Transmitting Mode CH 661 10GHz - 20GHz

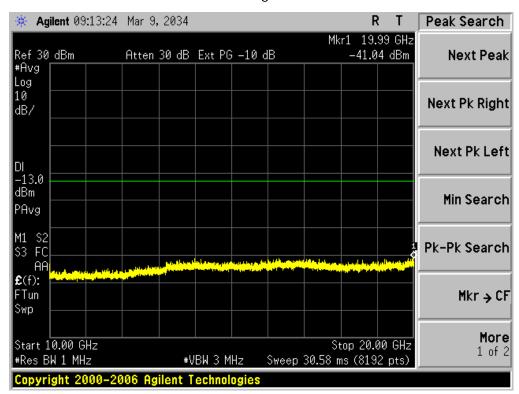






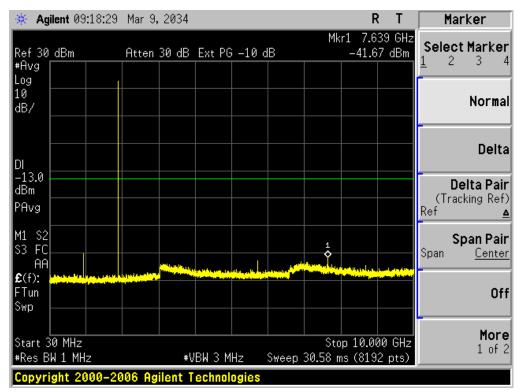


Conducted Emission Transmitting Mode CH 810 10GHz - 20GHz

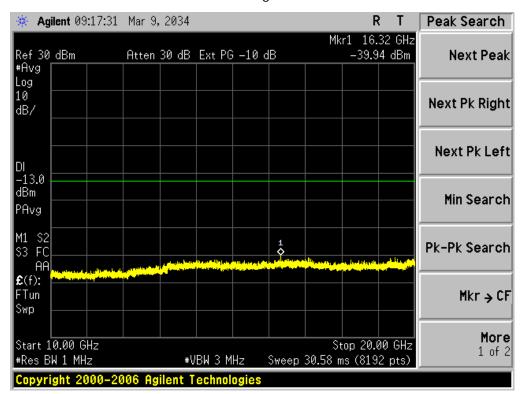





CONDUCTED EMISSION IN UMTS band II Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz

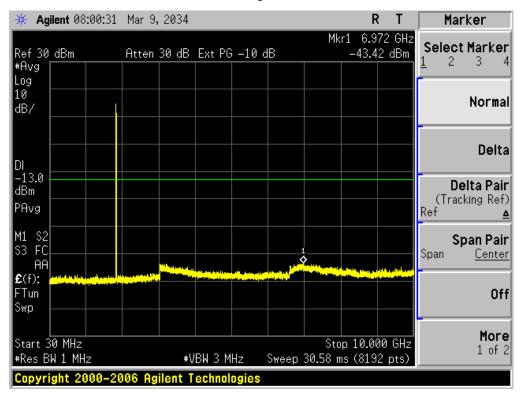


Conducted Emission Transmitting Mode CH 9262 10GHz - 20GHz

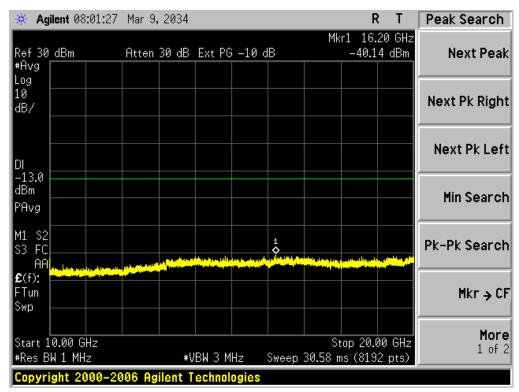







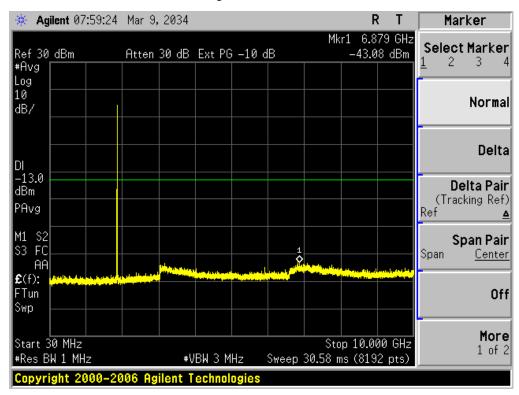


Conducted Emission Transmitting Mode CH 9400 10GHz - 20GHz

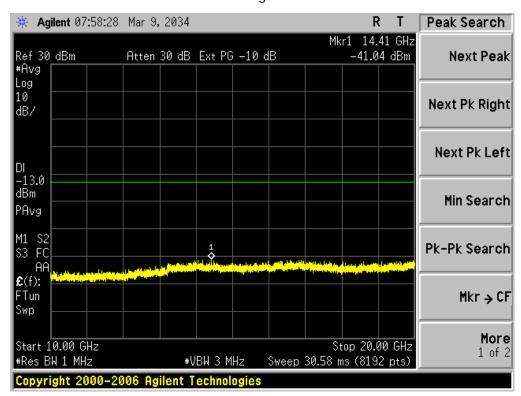






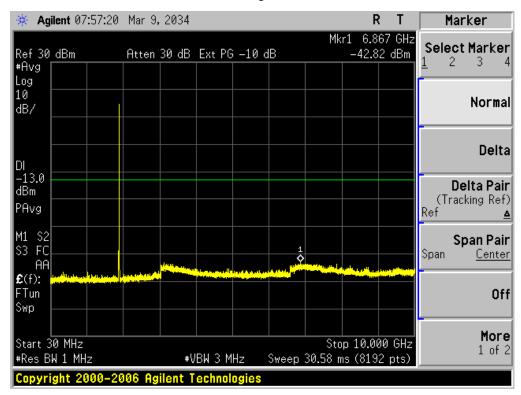


Conducted Emission Transmitting Mode CH 9538 10GHz - 20GHz

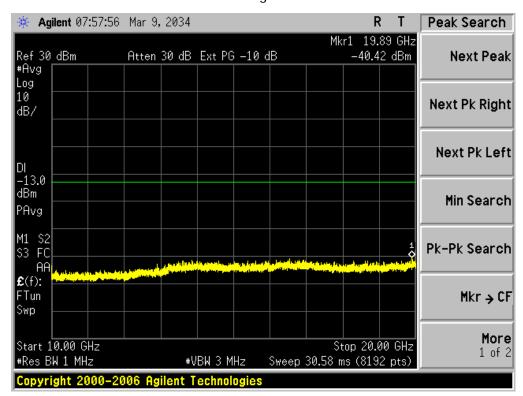




CONDUCTED EMISSION IN UMTS band V Conducted Emission Transmitting Mode CH 4132 30MHz – 10GHz

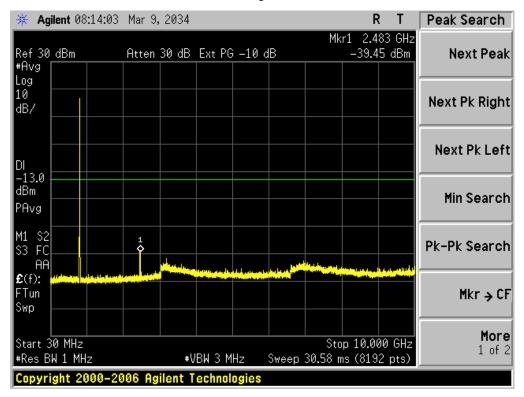


Conducted Emission Transmitting Mode CH 4132 10GHz - 20GHz

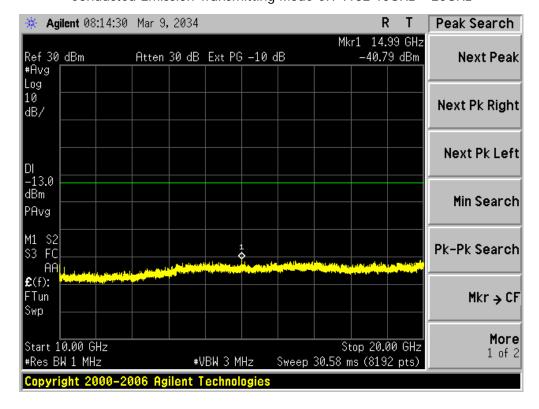





Conducted Emission Transmitting Mode CH 4183 30MHz -10GHz

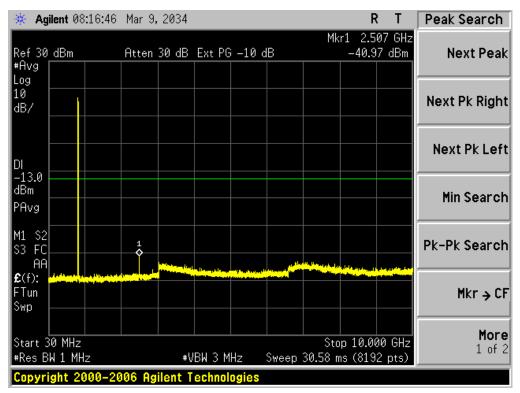


Conducted Emission Transmitting Mode CH 4183 10GHz - 20GHz

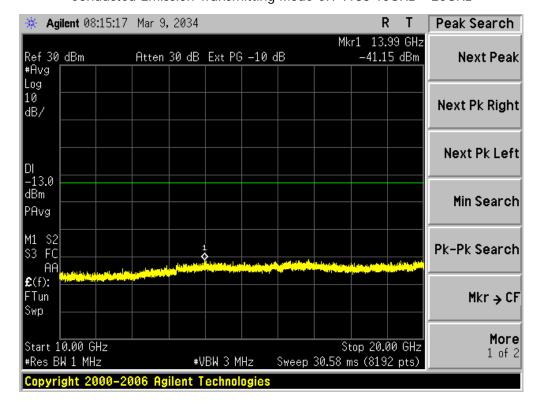






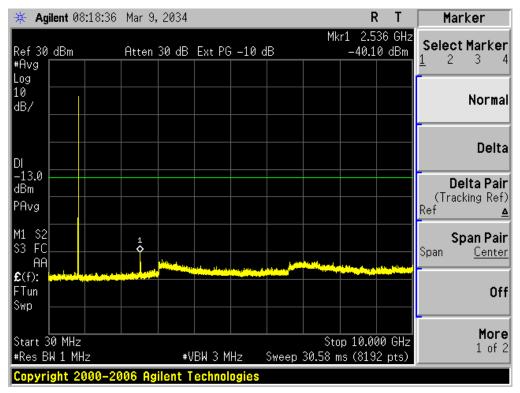

Conducted Emission Transmitting Mode CH 4233 10GHz - 20GHz

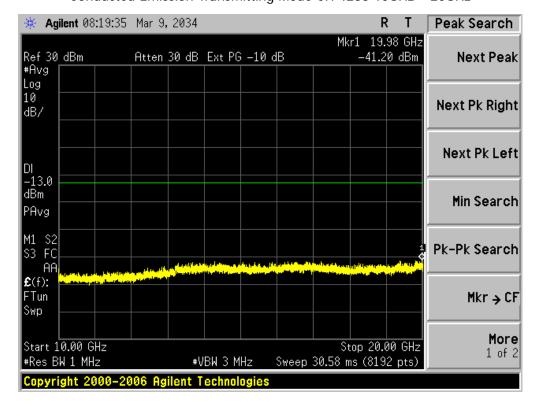





APPENDIX II TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)



Occupied Bandwidth (99%) GSM 850 BAND CH 128

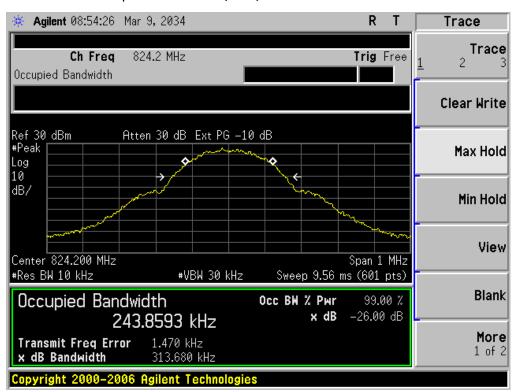


Occupied Bandwidth (99%) GSM 850 BAND CH 190

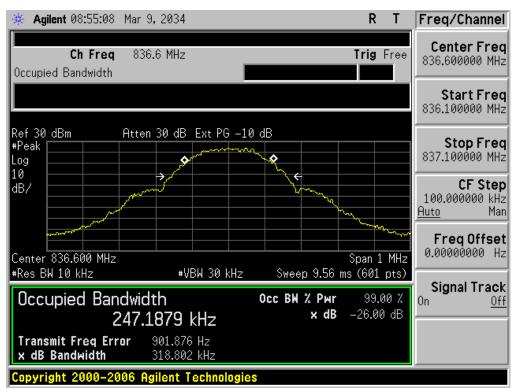




Occupied Bandwidth (99%) GSM 850 BAND CH 251

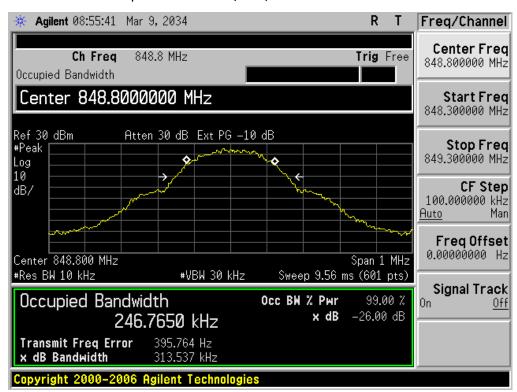


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

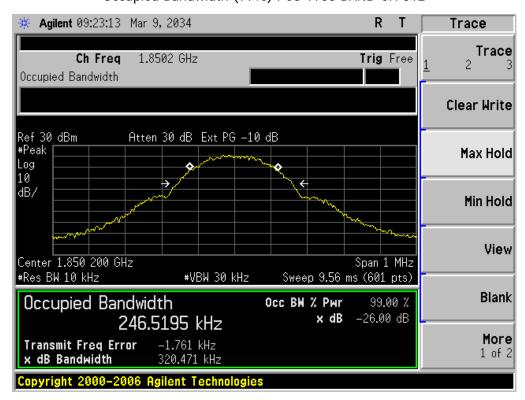




Occupied Bandwidth (99%) PCS 1900 BAND CH 661

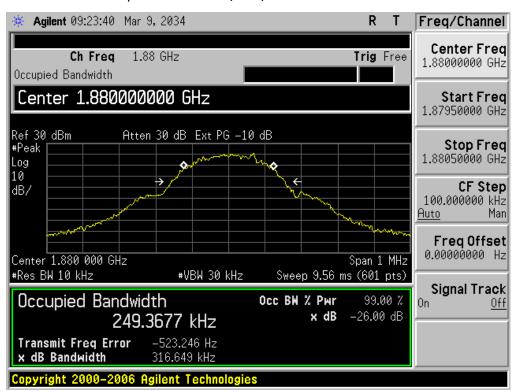


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

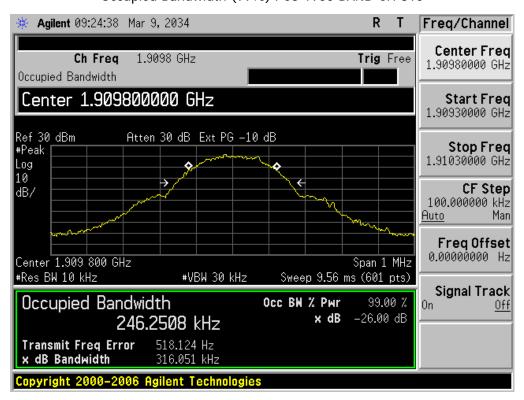




Occupied Bandwidth (99%) UMTS band II CH 9262

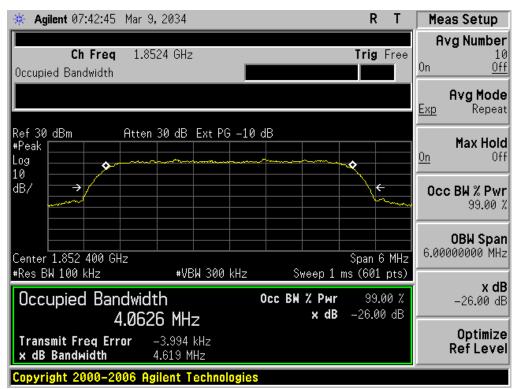


Occupied Bandwidth (99%) UMTS band II CH 9400

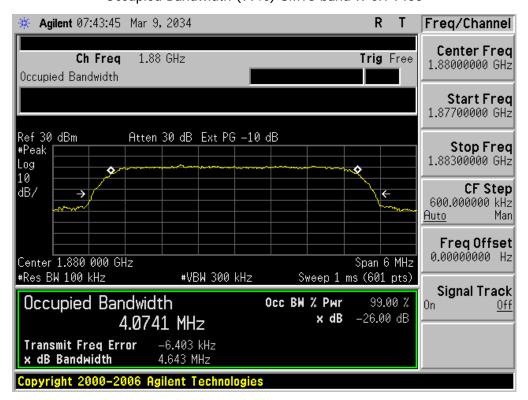




Occupied Bandwidth (99%) UMTS band II CH 9538

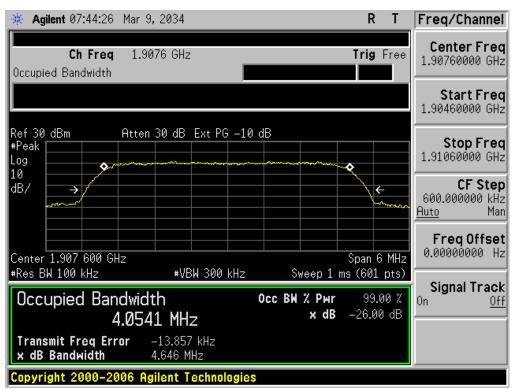




Occupied Bandwidth (99%) UMTS band V CH 4132

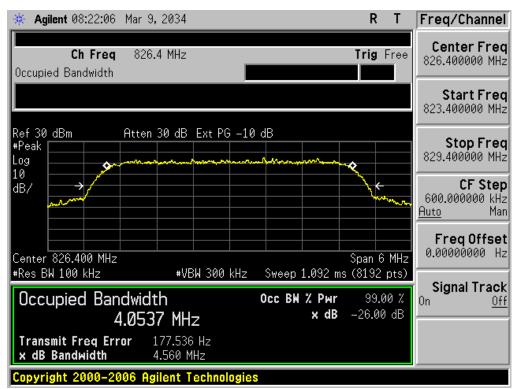



Occupied Bandwidth (99%) UMTS band V CH 4183

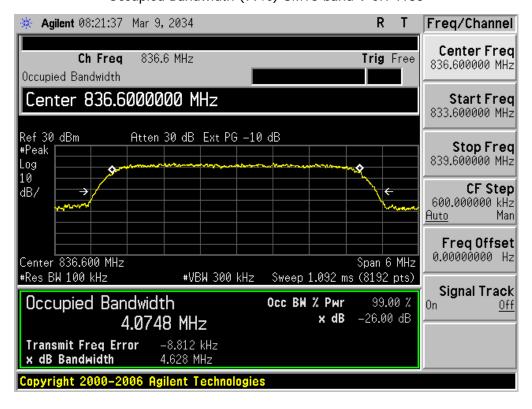



Occupied Bandwidth (99%) UMTS band V CH 4233

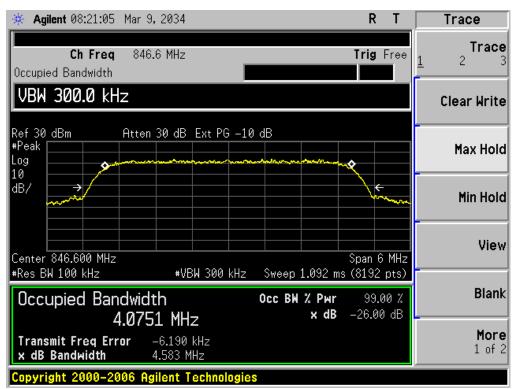








APPENDIX III	
TEST PLOTS FOR BAND EDGES	





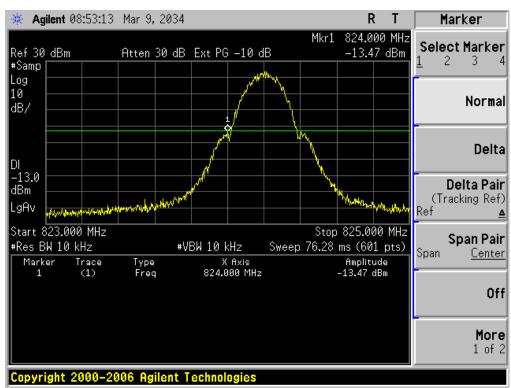


High Band Edge GSM 850 BAND CH 251

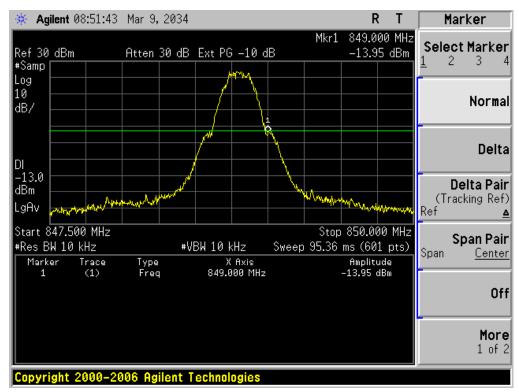




Low Band Edge PCS 1900 BAND CH 512

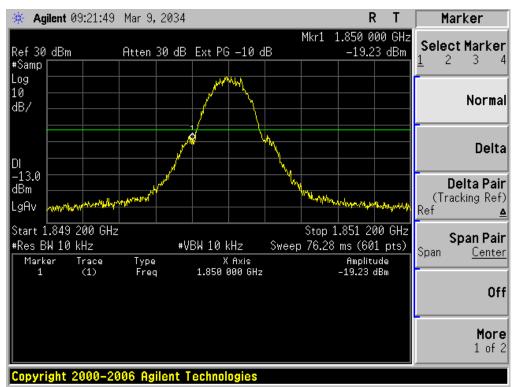


High Band Edge PCS 1900 BAND CH 810

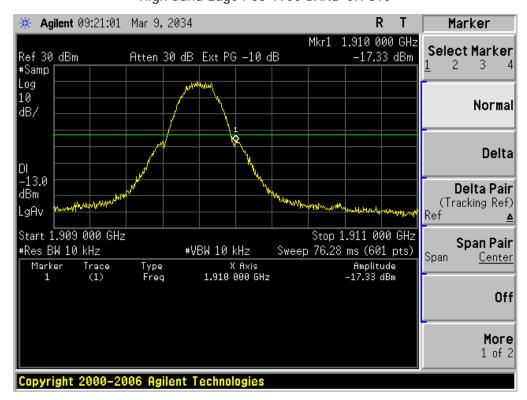




Low Band Edge UMTS BAND II CH 9262

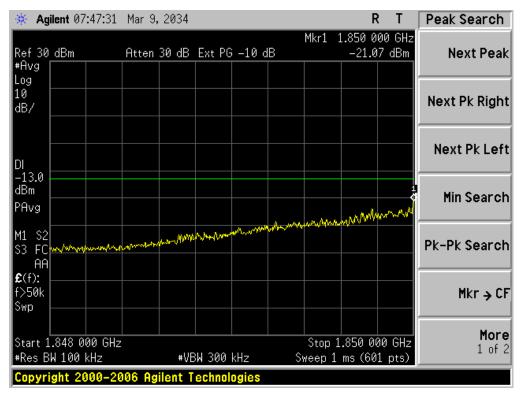


High Band Edge UMTS BAND II CH 9538

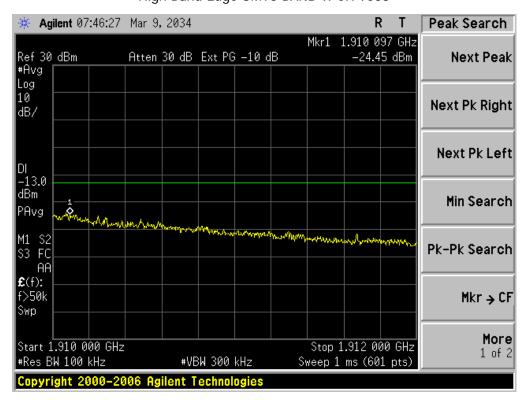




Low Band Edge UMTS BAND V CH 4132

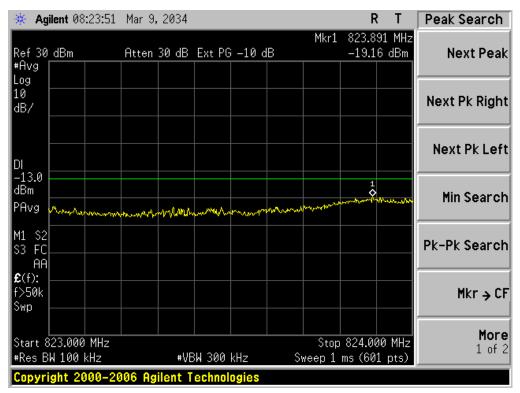

High Band Edge UMTS BAND V CH 4233

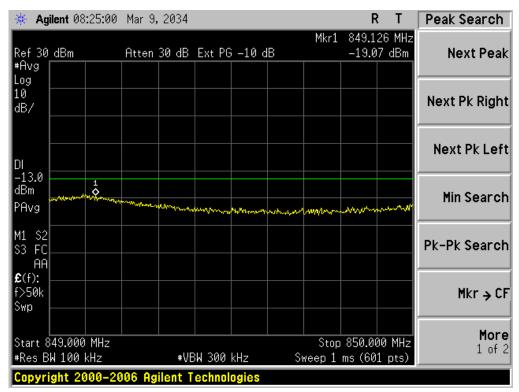



PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

