

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B

FOR:

LifeBEAM Technologies Ltd.
Cycling helmet
Model:Smart
Cat. Number: LBPD01-20
FCC ID:2ACQO-LBPD01-20

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Support and test equipment.....	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	5
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	20 dB bandwidth	8
7.2	Carrier frequency separation.....	13
7.3	Number of hopping frequencies	16
7.4	Average time of occupancy	19
7.5	Peak output power	22
7.6	Band edge radiated emissions	28
7.7	Field strength of spurious emissions	33
7.8	Antenna requirements	55
7.9	Conducted emissions	56
8	Emission tests according to 47CFR part 15 subpart B requirements	59
8.1	Conducted emissions	59
8.2	Radiated emission measurements	63
9	APPENDIX A Test equipment and ancillaries used for tests	67
10	APPENDIX A Measurement uncertainties.....	69
11	APPENDIX C Test laboratory description	70
12	APPENDIX D Specification references	70
13	APPENDIX E Test equipment correction factors.....	71
14	APPENDIX F Abbreviations and acronyms.....	80
15	APPENDIX G Manufacturer's declaration	81

1 Applicant information

Client name: LifeBEAM Technologies Ltd.
Address: 2F Raoul Wallenberg street, Tel Aviv 6113002, Israel
Telephone: +972 74-703 7910
Fax: +972-74-704 5314
E-mail: elad@life-beam.com
Contact name: Mr. Elad Hofstetter

2 Equipment under test attributes

Product name: Cycling helmet
Product type: Transmitter
Model(s): Smart
Cat. number: LBPD01-20
Serial number: 350017
Hardware version: 3.5
Software release: 3.5
Receipt date 16-Jul-14

3 Manufacturer information

Manufacturer name: LifeBEAM Technologies Ltd.
Address: 2F Raoul Wallenberg street, Tel Aviv 6113002, Israel
Telephone: +972 74-703 7910
Fax: +972-74-704 5314
E-Mail: elad@life-beam.com
Contact name: Mr. Elad Hofstetter

4 Test details

Project ID: 25922
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 16-Jul-14
Test completed: 18-Aug-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.247 (FHSS); subpart B

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1, (g), (h), Frequency hopping requirements	Pass*
Section 15.247(a)1, 20 dB bandwidth	Pass
Section 15.247(a)1, Frequency separation	Pass
Section 15.247(a)1, Number of hopping frequencies	Pass
Section 15.247(a)1, Average time of occupancy	Pass
Section 15.247(b), Peak output power	Pass
Section 15.247(d), Emissions at band edges	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.203, Antenna requirements	Pass
Section 15.207(a), Conducted emission	Pass
Section 15.247(i), RF exposure	Pass, the exhibit to the application of certification is provided
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Pass
Section 15.109, Radiated emission	Pass

* Manufacturer's declaration provided in Appendix G of this test report.

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. V. Einem, test engineer	August 18, 2014	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 21, 2014	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	October 2, 2014	

6 EUT description

6.1 General information

The EUT is a Lazer's Sport GENESIS highly popular cycling helmet integrated with LifeBEAM's physiological sensor & processing unit.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Signal	USB	EUT	AC/DC adapter	1	Shielded	1
Interconnecting	Control	EUT	Sensor	1	Unshielded	0.35


6.3 Support and test equipment

Description	Manufacturer	Model number
AC/DC adapter	Ktec	KSUFB0500100W1EU
iPhone	Apple	A1387

6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.


6.5 Test configuration

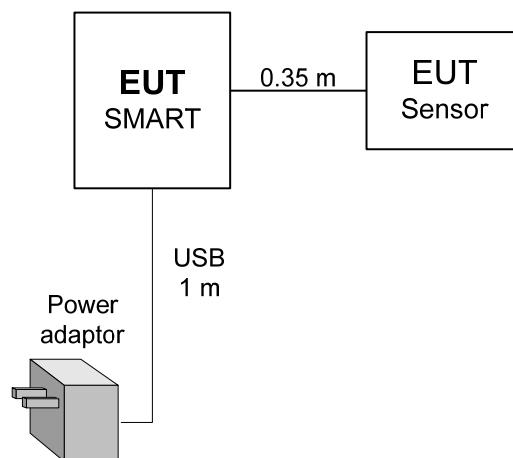



6.6 EUT test positions


Photograph 6.6.1 EUT in X-axis orthogonal position

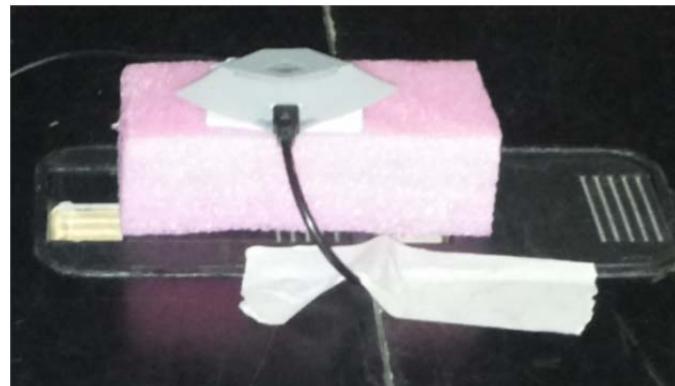

Photograph 6.6.2 EUT in Y-axis orthogonal position



Photograph 6.6.3 EUT in Z-axis orthogonal position

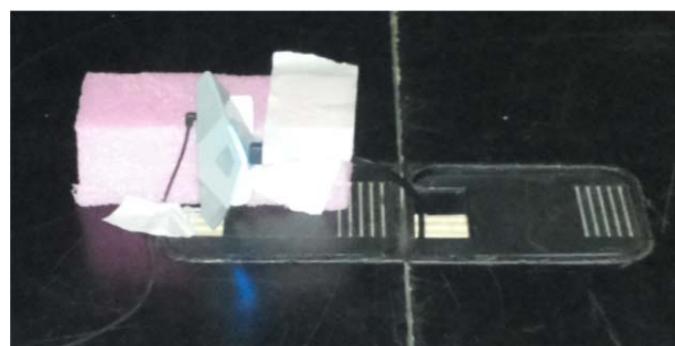



6.7 Transmitter characteristics

Type of equipment								
X	Stand-alone (Equipment with or without its own control provisions)							
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
	Plug-in card (Equipment intended for a variety of host systems)							
Intended use	Condition of use							
fixed	Always at a distance more than 2 m from all people							
mobile	Always at a distance more than 20 cm from all people							
X	portable May operate at a distance closer than 20 cm to human body							
Assigned frequency ranges	2400 – 2483.5 MHz							
Operating frequencies	2402 – 2480 MHz							
Maximum rated output power	At transmitter 50 Ω RF output connector				dBm			
	Peak output power				3.67 dBm			
Is transmitter output power variable?	X	No						
	Yes		continuous variable					
			stepped variable with stepsize					
			minimum RF power					
			maximum RF power					
Antenna connection								
unique coupling	standard connector		X	integral	with temporary RF connector			
			X	without temporary RF connector				
Antenna/s technical characteristics								
Type	Manufacturer		Model number		Gain			
Internal	LifeBEAM		Printed		0 dB			
Transmitter aggregate data rate/s	1 Mbps							
Type of modulation	GFSK							
Modulating test signal (baseband)	PRBS							
Transmitter power source								
X	Battery	Nominal rated voltage	3.7 VDC	Battery type	Lithium rechargeable			
	DC	Nominal rated voltage	VDC					
	AC mains	Nominal rated voltage	VAC	Frequency				
Common power source for transmitter and receiver			X	yes	no			
Spread spectrum technique used			X	Frequency hopping (FHSS)				
				Digital transmission system (DTS)				
				Hybrid				
Spread spectrum parameters for transmitters tested per FCC 15.247 only								
FHSS	Total number of hops		40					
	Bandwidth per hop		120 kHz					
	Max. separation of hops		1997.8 kHz					



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Jul-14	Air Pressure: 1005 hPa	Relative Humidity: 50 %
Temperature: 25 °C		Power Supply: Battery	
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	20

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.
- 7.1.2.4 The test was repeated for mid and high channel frequencies.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Jul-14	Air Pressure: 1005 hPa	Relative Humidity: 50 %
Temperature: 25 °C		Power Supply: Battery	
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz

DETECTOR USED: Peak

SWEEP TIME: Auto

VIDEO BANDWIDTH: \geq RBW

MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc

MODULATING SIGNAL: PRBS

FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, Mbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency							
2402	GFSK	1	1	120	NA	NA	Pass
Mid frequency							
2441	GFSK	1	1	115	NA	NA	Pass
High frequency							
2480	GFSK	1	1	90	NA	NA	Pass

Reference numbers of test equipment used

HL 1425	HL 2780						
---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency, reference level

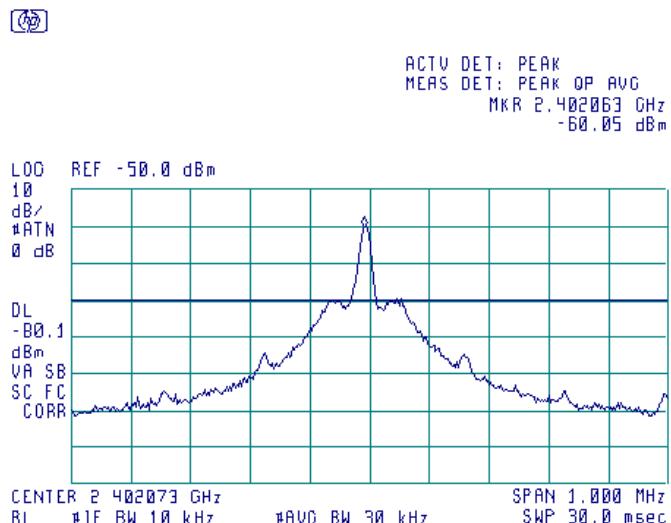

Plot 7.1.2 The 20 dB bandwidth test result at low frequency

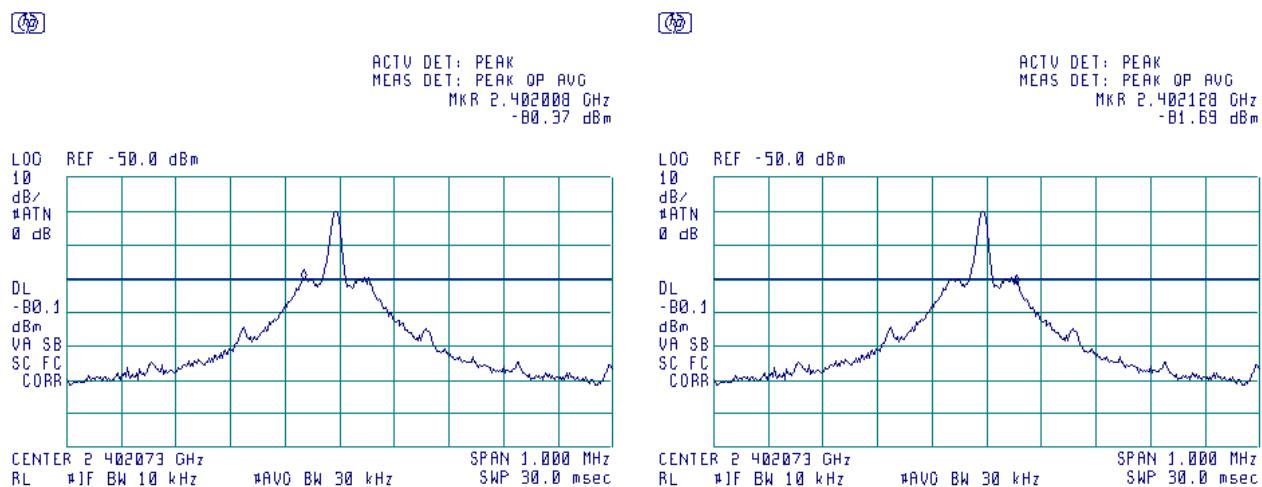


2402.128 MHz-2402.008 MHz=0.120 MHz




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at mid frequency, reference level

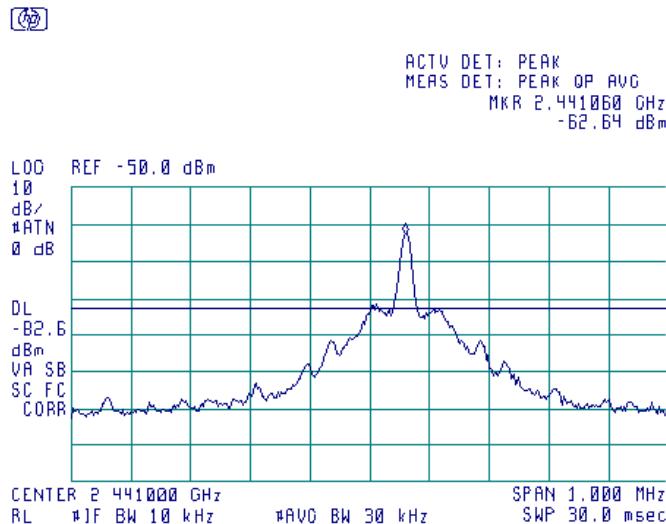

Plot 7.1.4 The 20 dB bandwidth test result at mid frequency

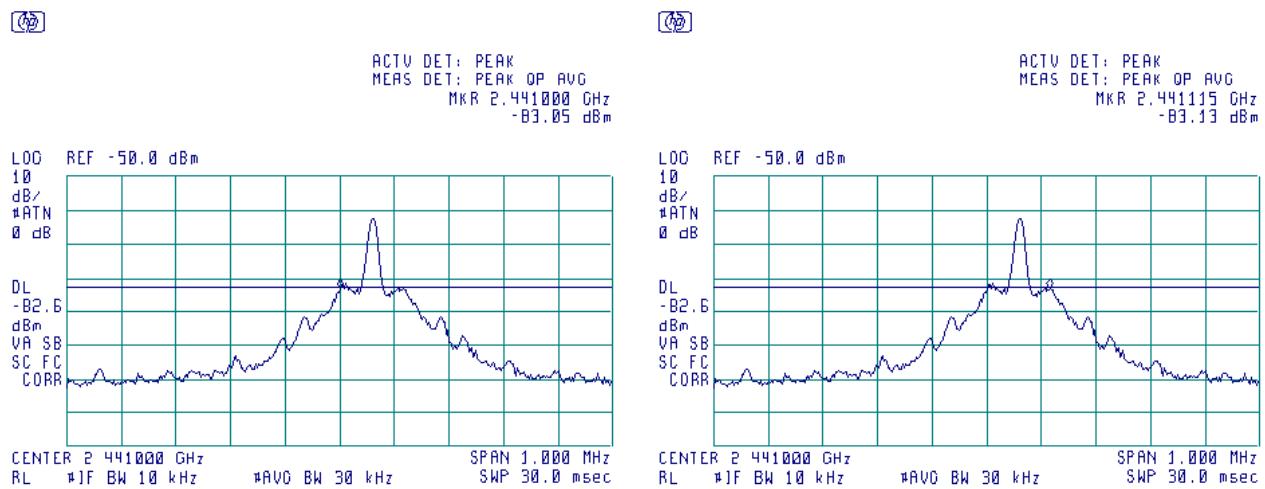


$$2441.115 \text{ MHz} - 2441.00 \text{ MHz} = 115 \text{ kHz}$$



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 The 20 dB bandwidth test result at high frequency

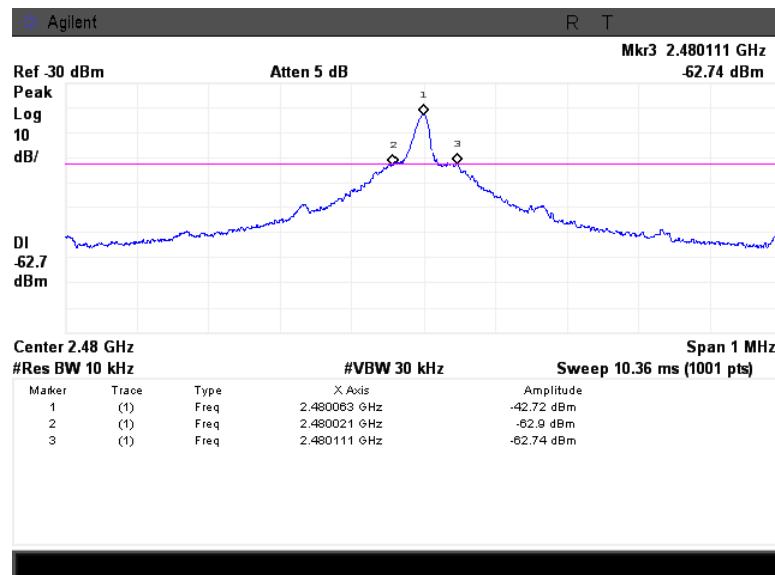

2480.111 MHz - 2480.021 MHz = 90 kHz



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel,
2400.0 – 2483.5	whichever is greater
5725.0 – 5850.0	

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
MODULATION: GFSK
MODULATING SIGNAL: PRBS
BIT RATE: 1 Mbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled
20 dB BANDWIDTH: 120 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
1997.830	120	-1877.83	Pass

* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 2909	HL 4135	HL 4273					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Carrier frequency separation

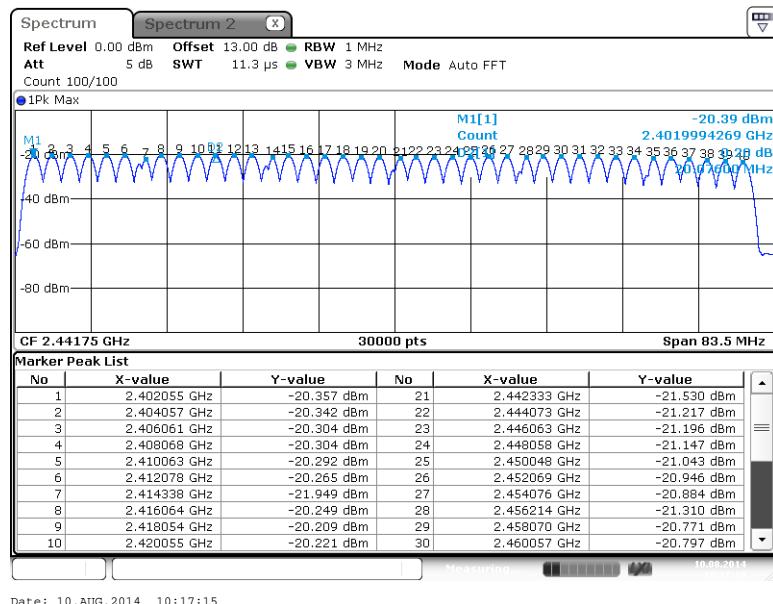

Date: 10.AUG.2014 10:17:15

Plot 7.2.2 Carrier frequency separation

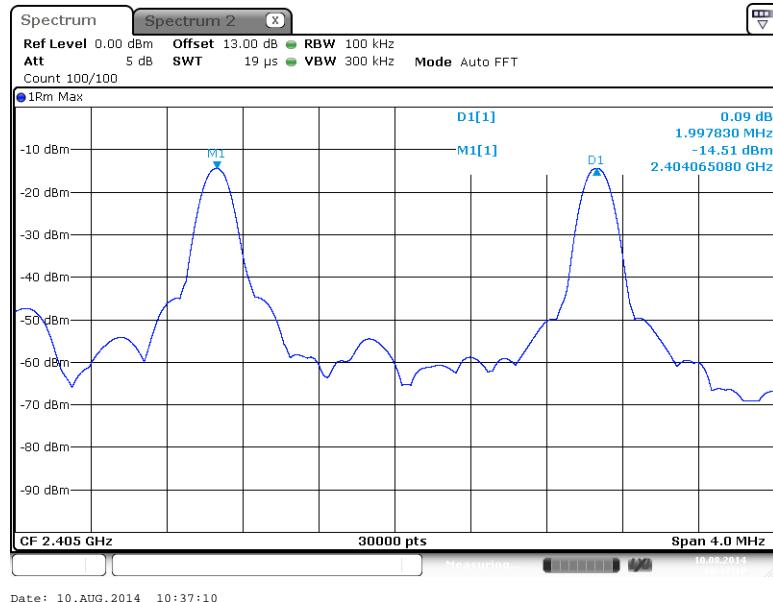

Date: 10.AUG.2014 10:37:10



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz
MODULATION: GFSK
MODULATING SIGNAL: PRBS
BIT RATE: 1 Mbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
40	15	-25	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used


HL 4135	HL 4278	HL 4355				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

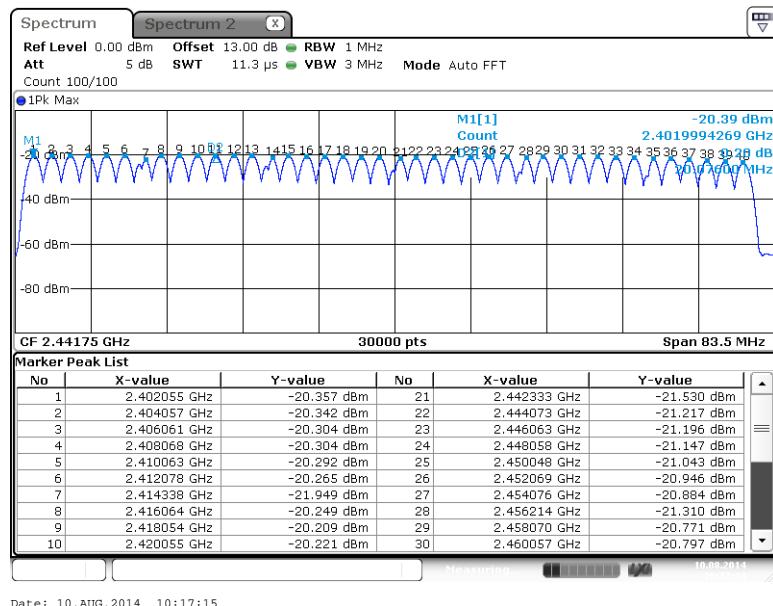Plot 7.3.1 Number of hopping frequencies

Date: 10.AUG.2014 10:17:15

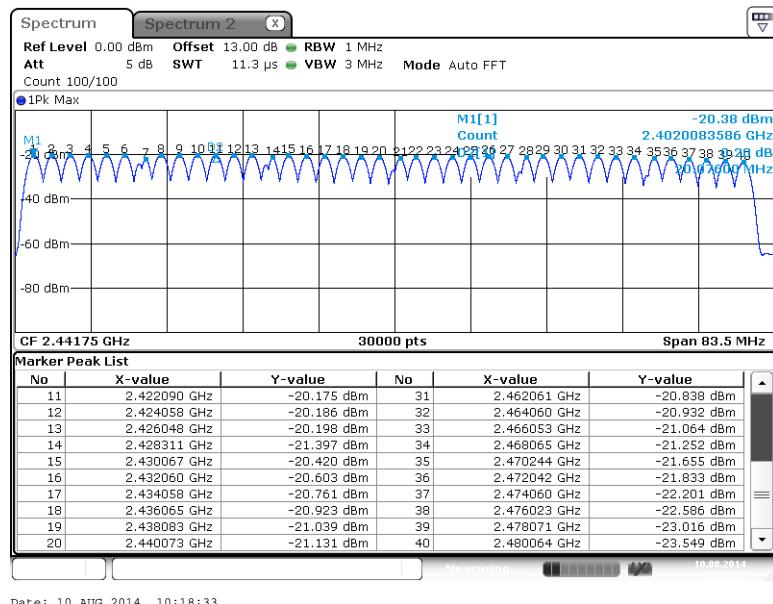Plot 7.3.2 Number of hopping frequencies

Date: 10.AUG.2014 10:18:33



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	20-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	20-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 NUMBER OF HOPPING FREQUENCIES: 40
 INVESTIGATED PERIOD: 16 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, us	Single transmission period, s	Average time of occupancy*, us	Bit rate, Mbps	Symbol rate, Msymbol/s	Limit, s	Margin, s**	Verdict
2402	416	16.67	416	1	1	0.4	0.399	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period).

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 2909	HL 4135	HL 4273						
---------	---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	20-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Single transmission duration

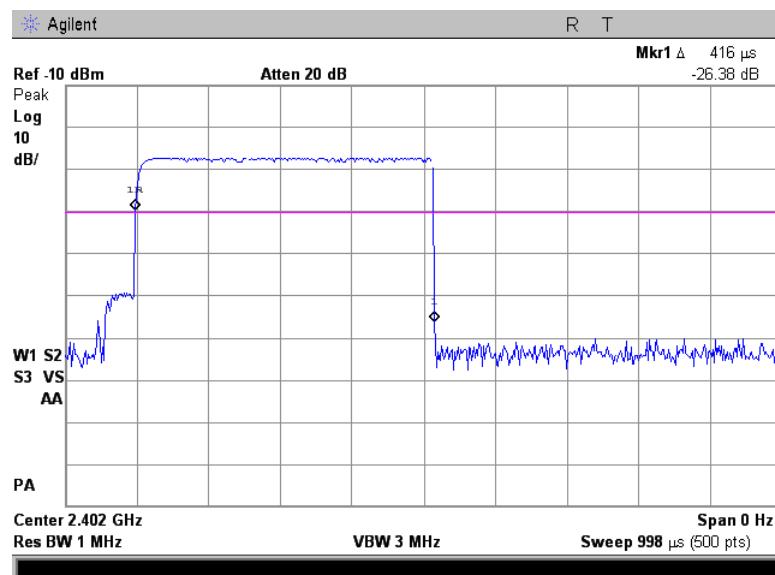

Plot 7.4.2 Single transmission period

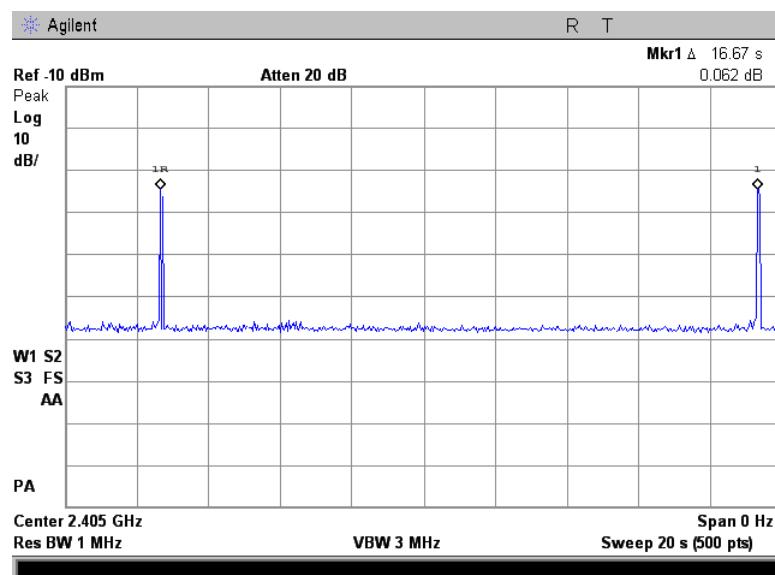



HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels) 1.0 (≥50 hopping channels)	24.0(<50 hopping channels) 30.0 (≥50 hopping channels)	125.2 (<50 hopping channels) 131.2 (≥50 hopping channels)	6.0*
2400.0 – 2483.5	0.125 (<75 hopping channels) 1.0 (≥75 hopping channels)	21.0(<75 hopping channels) 30.0 (≥75 hopping channels)	122.2 (<75 hopping channels) 131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

**- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.
- 7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


- 7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

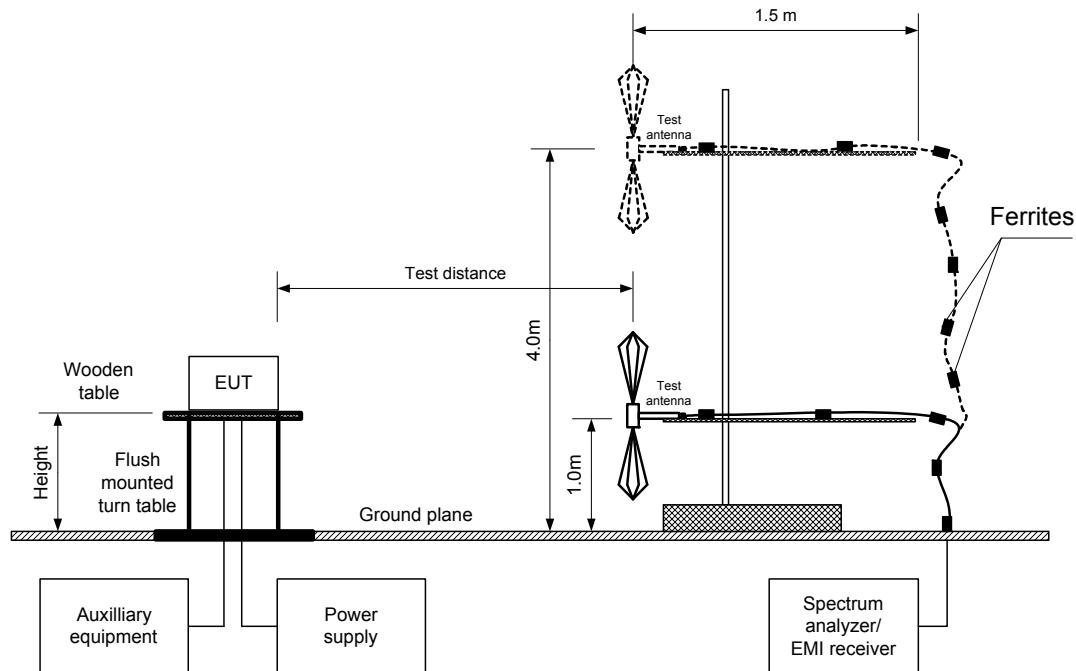



HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY RANGE:	2400-2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber / OATS
EUT HEIGHT:	0.8 m
EUT POSITION:	3 orthogonal (X/ Y/ Z)
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	1 Mbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
EUT 20 dB BANDWIDTH:	120 kHz
RESOLUTION BANDWIDTH:	1 MHz
VIDEO BANDWIDTH:	3 MHz
FREQUENCY HOPPING:	Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS:	40

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402.1	93.93	Horizontal	1.62	162	0	-1.27	21.0	-22.27	Pass
2441.1	98.87	Horizontal	1.9	185	0	3.67	21.0	-17.33	Pass
2480.1	93.88	Horizontal	1.6	174	0	-1.32	21.0	-22.32	Pass

Note: The maximum recorded value was obtained in the EUT X-axis position.

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) – Transmitter antenna gain in dBi – 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 3818	HL 3903	HL 4114	HL 4160	HL 4353	HL 4722
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.5.1 Field strength of carrier at low frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.402075 GHz
83.44 dB μ V/m

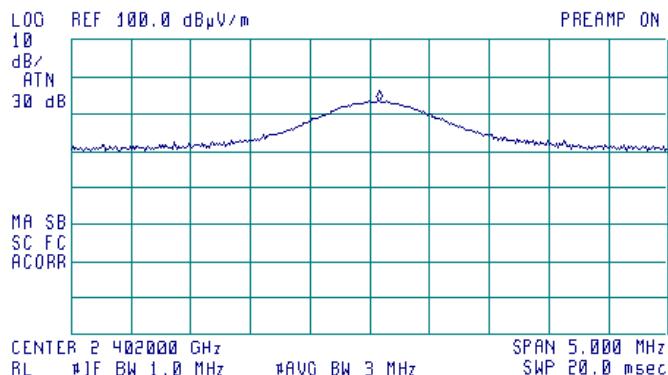


Plot 7.5.2 Field strength of carrier at low frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.402075 GHz
93.93 dB μ V/m

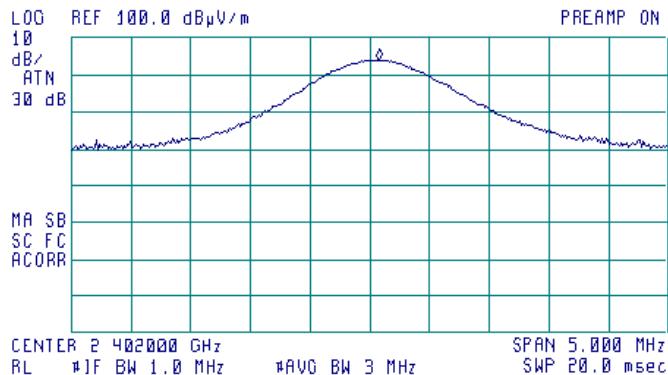




HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.5.3 Field strength of carrier at mid frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme

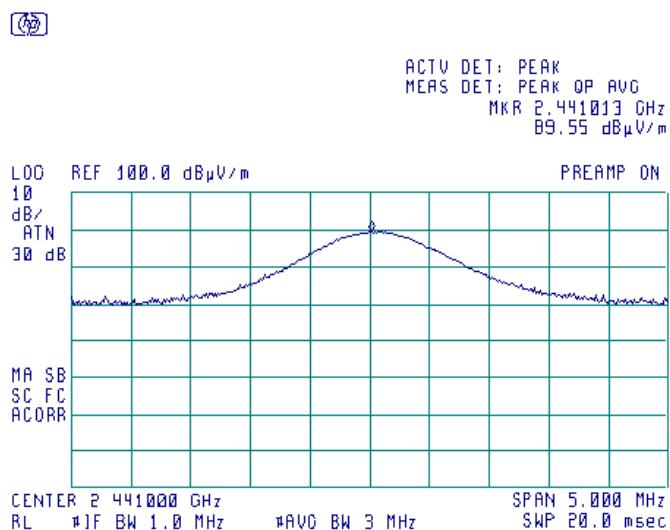

Plot 7.5.4 Field strength of carrier at mid frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme

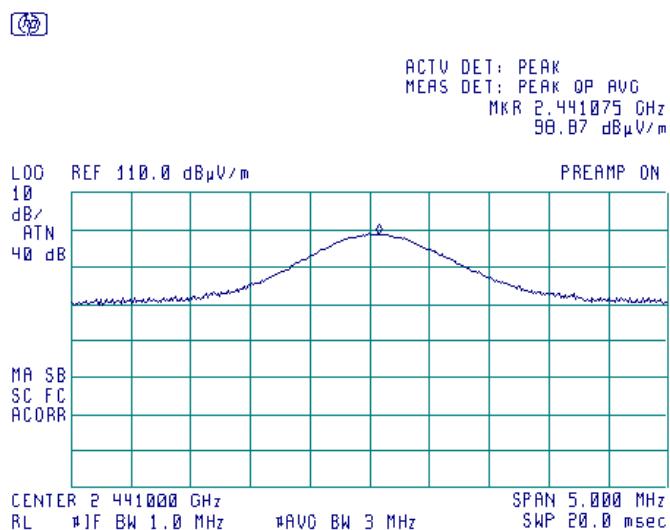




HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 17-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.5.5 Field strength of carrier at high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme

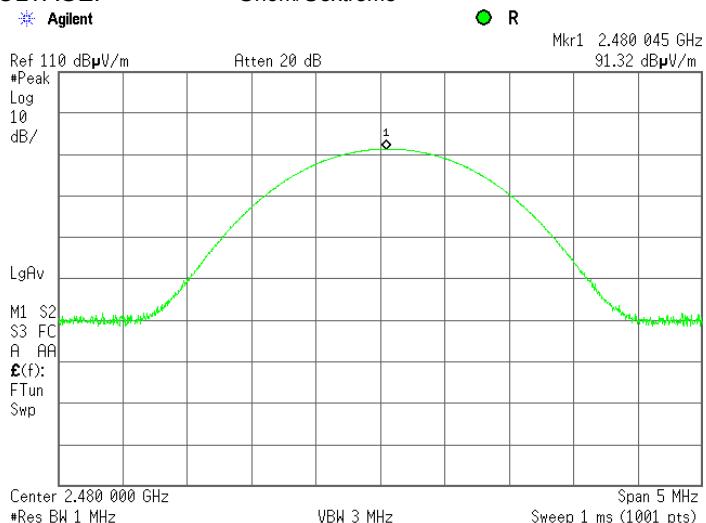

Plot 7.5.6 Field strength of carrier at high frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis
INPUT VOLTAGE: Unom/Uextreme

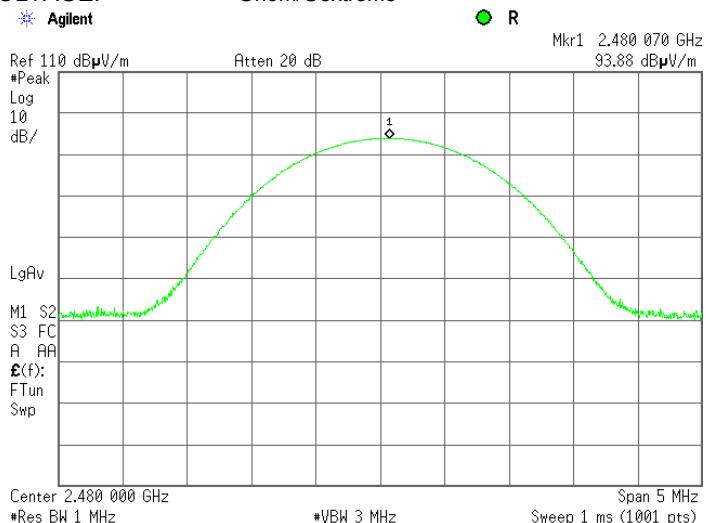



HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 21 °C	Air Pressure: 1008 hPa	Relative Humidity: 53 %	Power Supply: Battery
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
		Peak	Average
902.0 – 928.0			
2400.0 – 2483.5	20.0	74.0	54.0
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup





HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	17-Jul-14 - 20-Jul-14	PASS	
Temperature: 21 °C	Air Pressure: 1008 hPa	Relative Humidity: 53 %	Power Supply: Battery
Remarks:			

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 TRANSMITTER MODE: Continues
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW

Frequency, MHz	Peak field strength			Average field strength				Verdict
	Measured, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB*	Measured, dB(μ V/m)	Calculated**, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB*	
Frequency hopping disabled								
2400.00	50.71	74	-23.29	50.71	3.71	54	-50.29	Pass
2483.50	44.07	74	-29.93	44.07	-2.93	54	-56.93	
Frequency hopping enabled								
2400.00	59.16	74	-14.84	59.16	12.16	54	-41.84	Pass
2483.50	48.81	74	-25.19	48.81	1.81	54	-52.19	

*- Margin, dB = Measured (calculated) field strength – specification limit.

** Calculated Average field strength = Measured field strength + average factor (-47 dB).

Reference numbers of test equipment used

HL 2780	HL 3818	HL 3903	HL 4114	HL 4150	HL 4160		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 21 °C	Air Pressure: 1008 hPa	Relative Humidity: 53 %	Power Supply: Battery
Remarks:			

Plot 7.6.1 The highest emission level within the assigned band at low carrier frequency

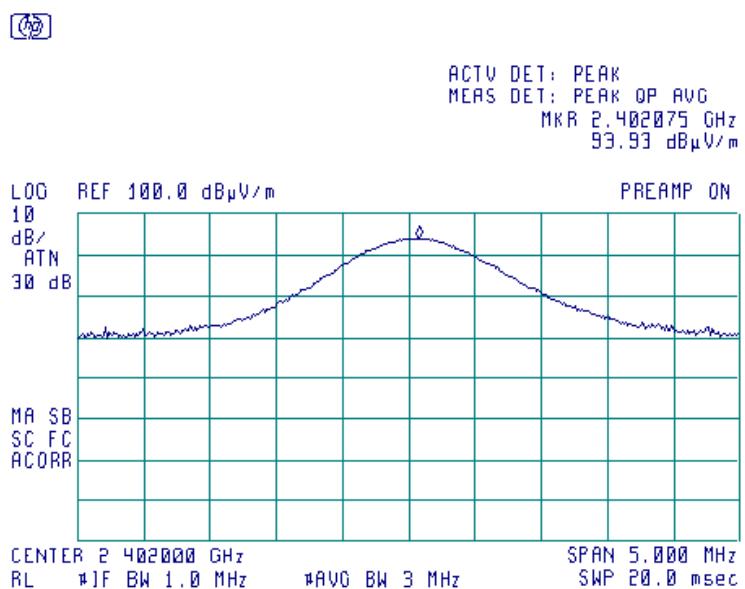

Plot 7.6.2 The highest emission level within the assigned band at high carrier frequency

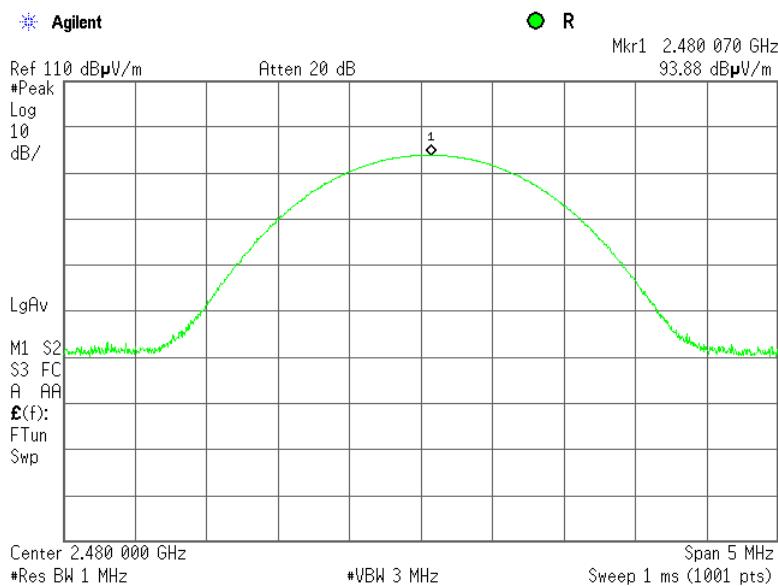





HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 21 °C	Air Pressure: 1008 hPa	Relative Humidity: 53 %	Power Supply: Battery
Remarks:			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function disabled

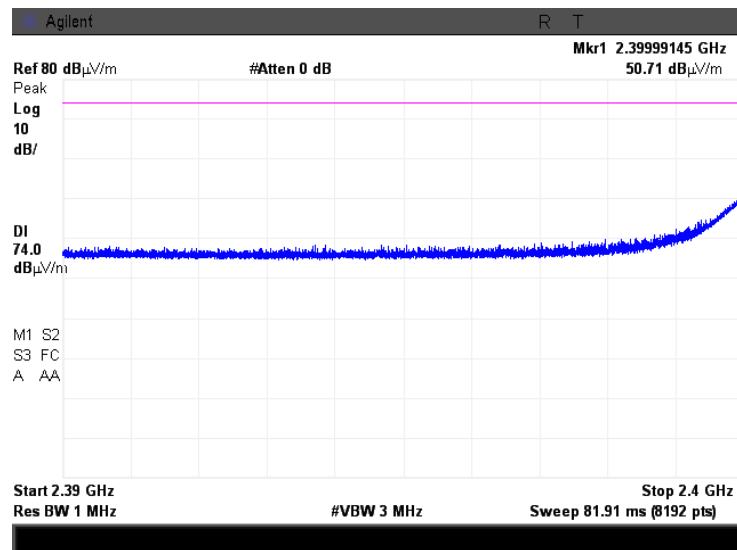

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function disabled

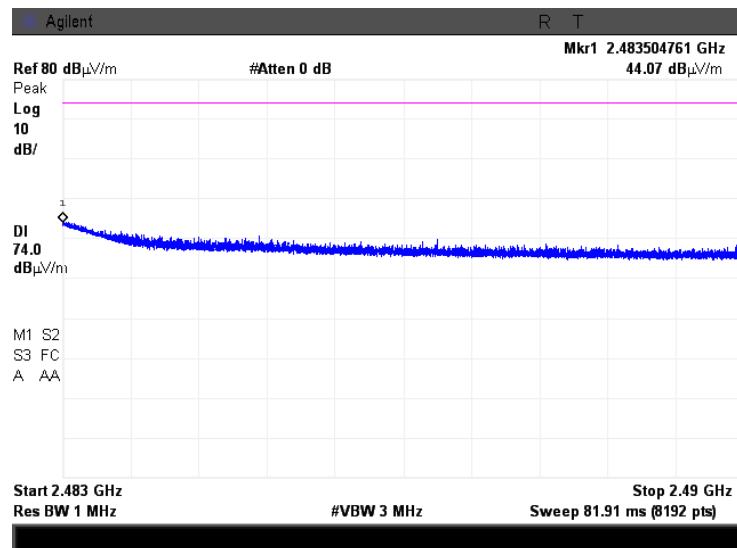





HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 21 °C	Air Pressure: 1008 hPa	Relative Humidity: 53 %	Power Supply: Battery
Remarks:			

Plot 7.6.5 The highest band edge emission at low carrier frequency with hopping function enabled

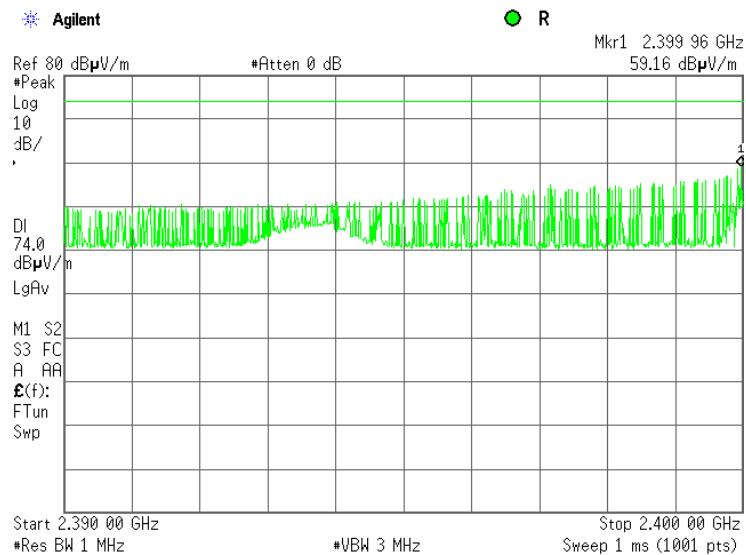

Plot 7.6.6 The highest band edge emission at high carrier frequency with hopping function enabled

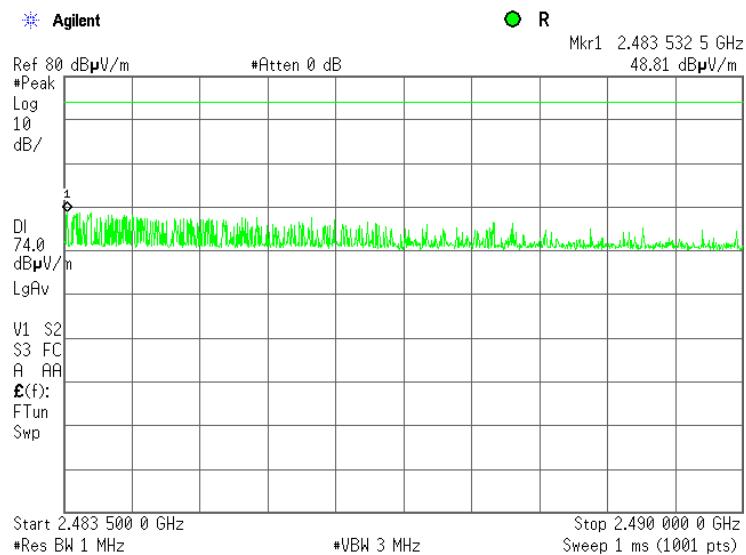



HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2)$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


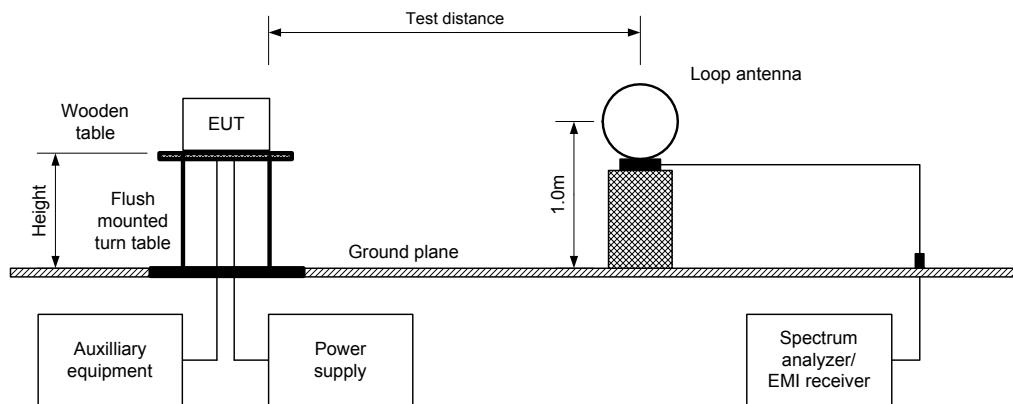


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



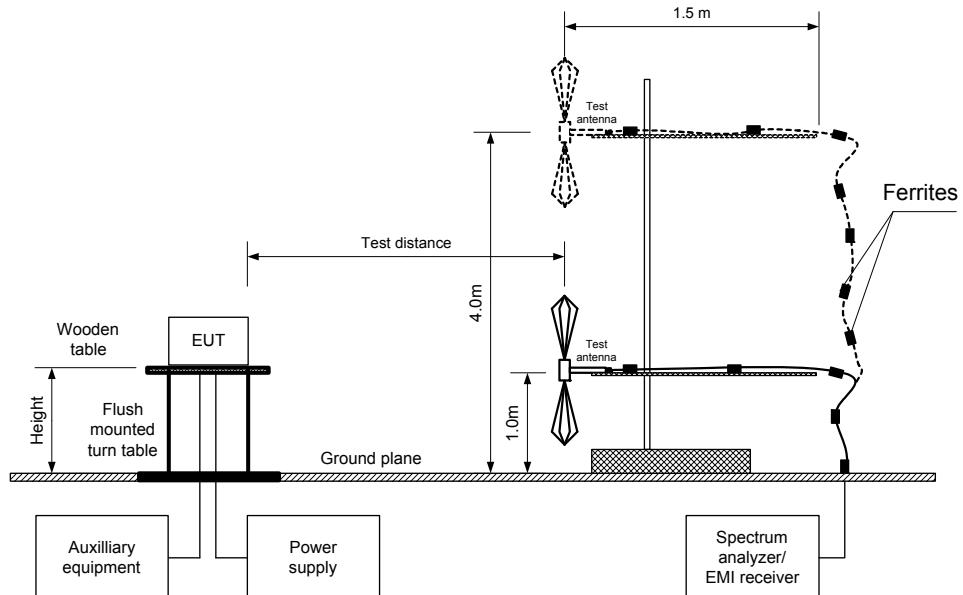

HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY RANGE:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
All found emissions are at least 20 dB below the specified limit									
Mid carrier frequency									
All found emissions are at least 20 dB below the specified limit									
High carrier frequency									
All found emissions are at least 20 dB below the specified limit									

Verdict: Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
Low carrier frequency											
4804.10	H	1.45	102	66.33	74	-7.67	66.33	19.33	54	-34.67	Pass
Mid carrier frequency											
4882.09	H	1.65	156	63.17	74	-10.83	63.17	16.17	54	-37.83	Pass
High carrier frequency											
4960.125	H	1.0	20	60.75	74	-13.25	60.75	13.75	54	-40.25	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, s	Duration, ms	Period, ms		
0.416	16.67	NA	NA	NA	-47

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict			
Low carrier frequency											
All found emissions are at least 20 dB below the specified limit								Pass			
Mid carrier frequency											
All found emissions are at least 20 dB below the specified limit								Pass			
High carrier frequency											
All found emissions are at least 20 dB below the specified limit								Pass			

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.7.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 0768	HL 1791	HL 1984	HL 2780	HL 3535
HL 4150	HL 4353	HL 4722					

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.1 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

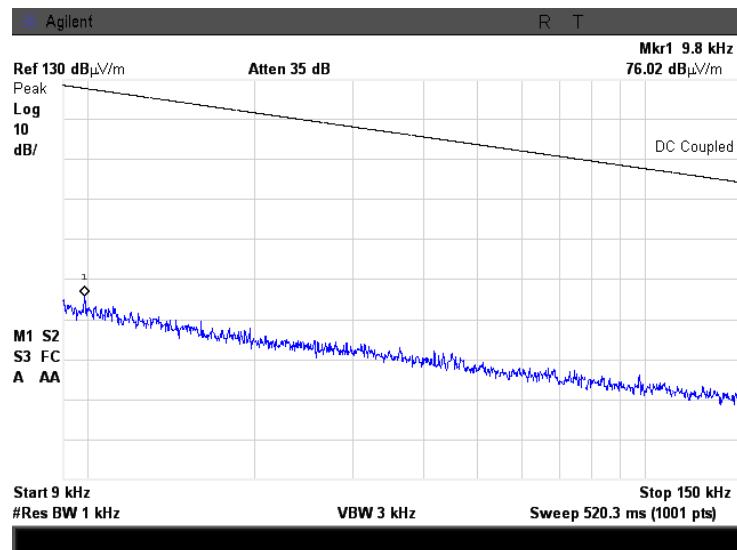

Plot 7.7.2 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

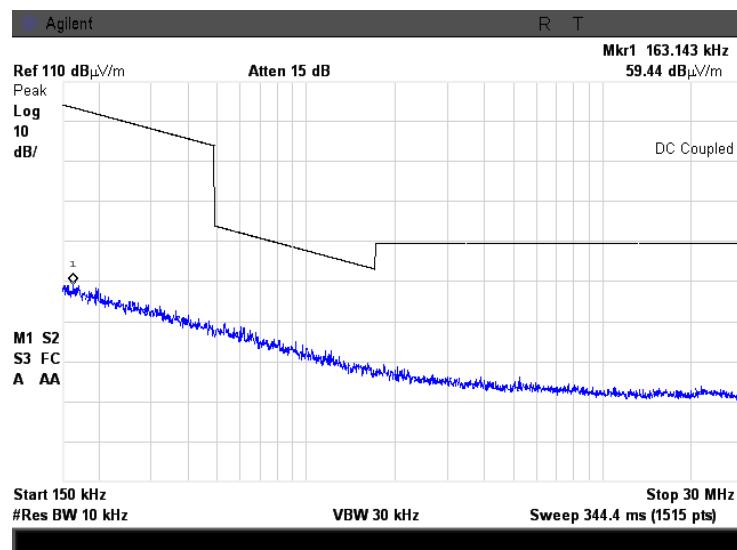




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.3 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

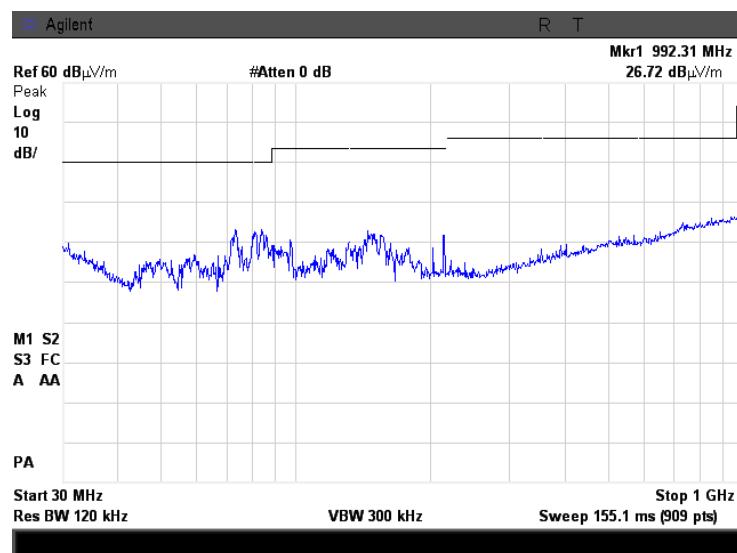**Plot 7.7.4 Radiated emission measurements from 1.0 to 4 GHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

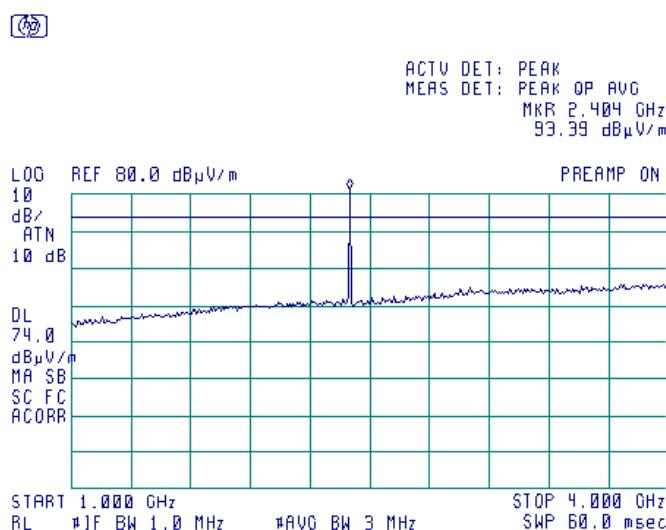

2402 MHz is a fundamental frequency




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.5 Radiated emission measurements from 4.0 to 6.5 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

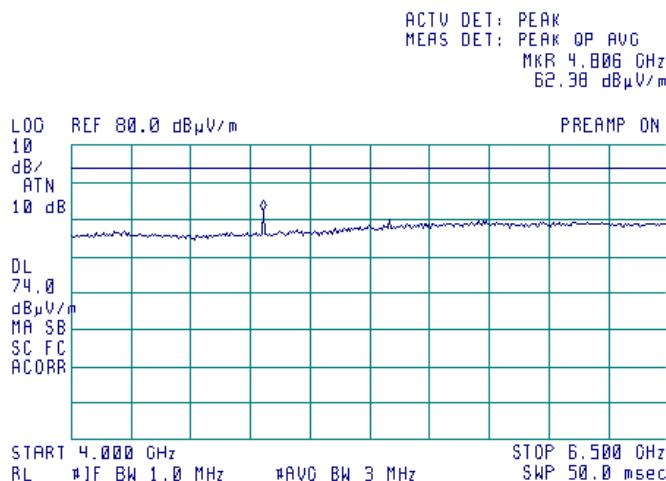**Plot 7.7.6 Radiated emission measurements from 6.5 to 14.0 GHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

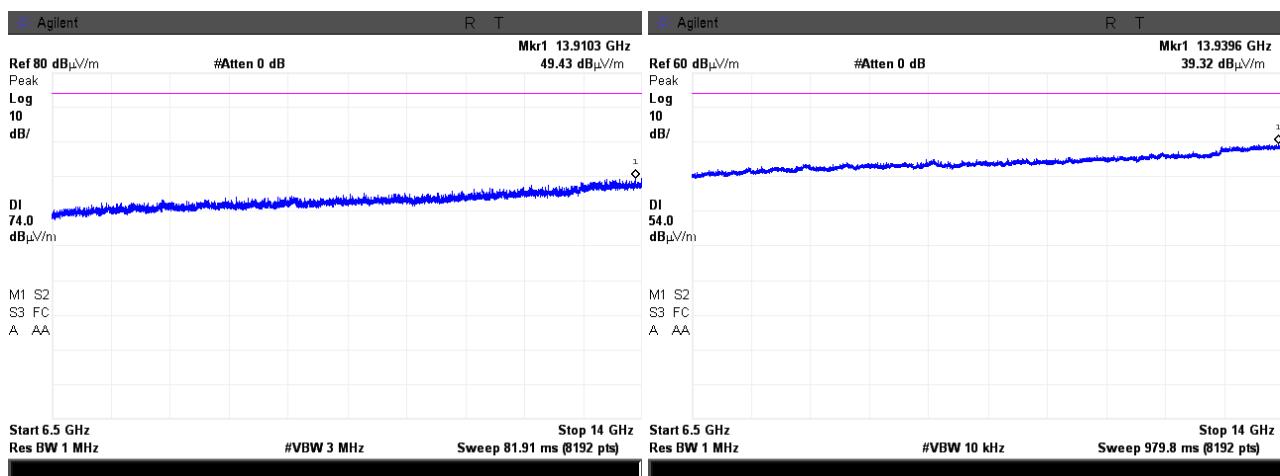




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.7 Radiated emission measurements from 14 to 18.0 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

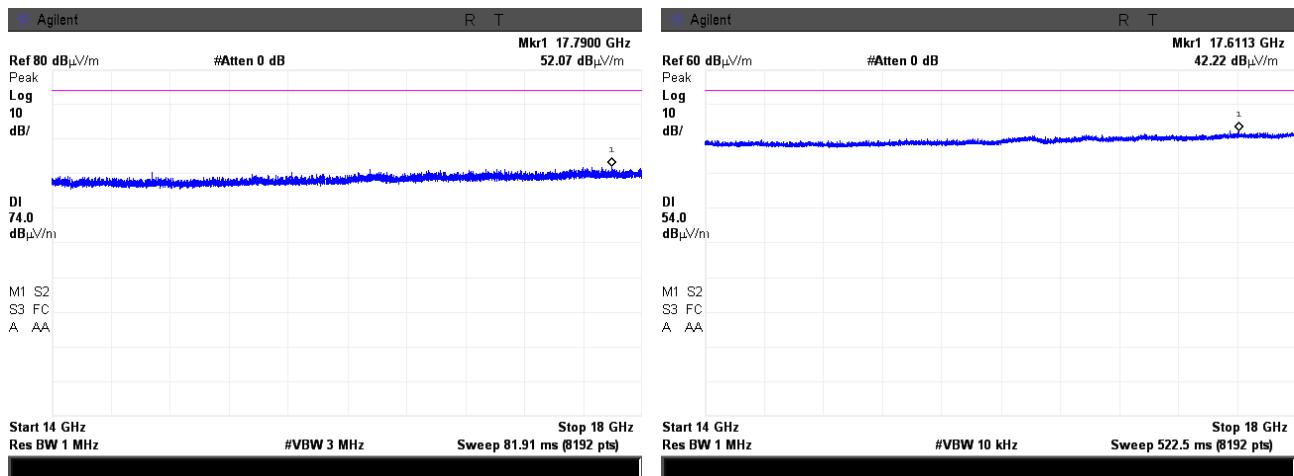**Plot 7.7.8 Radiated emission measurements from 18 to 25.0 GHz at the low carrier frequency**

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

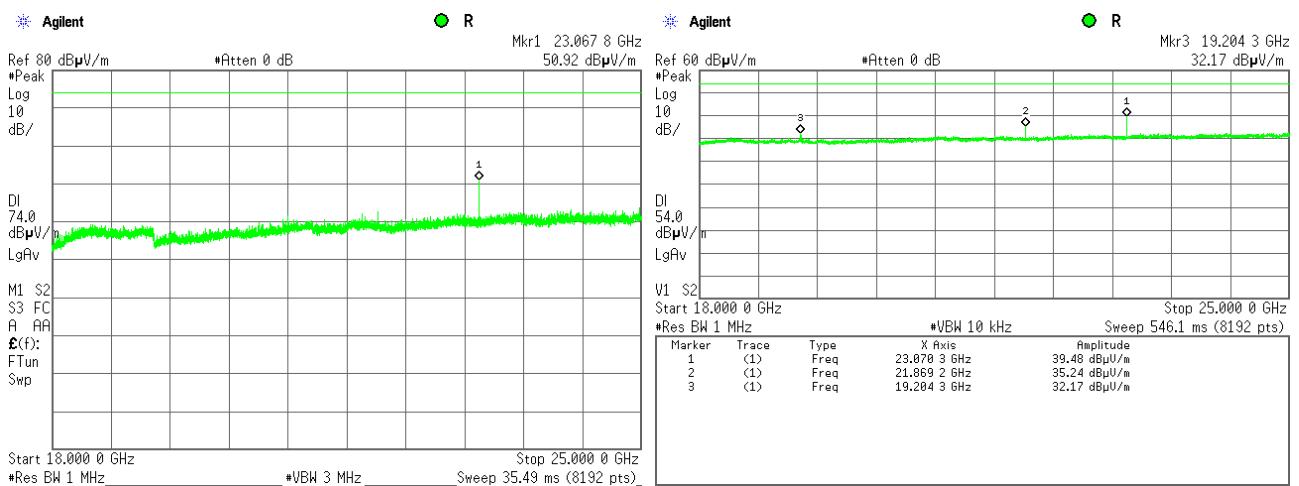

*Ambient signals at 19 GHz, 21 GHz, 23 GHz




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.9 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

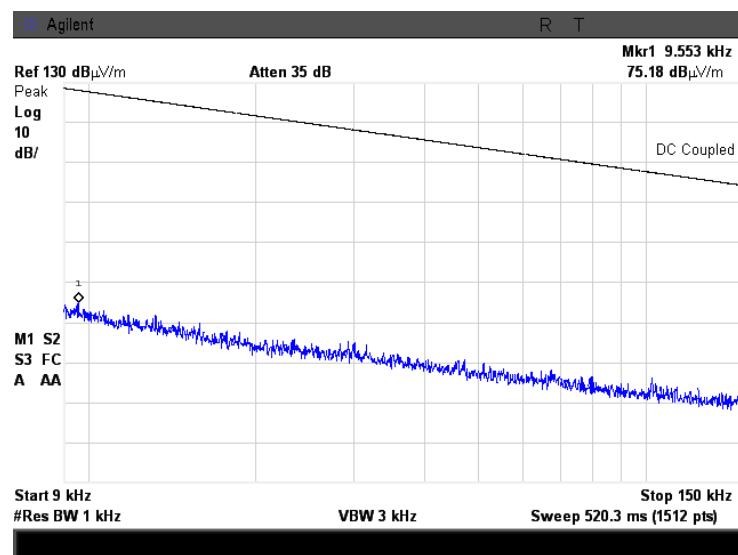

Plot 7.7.10 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

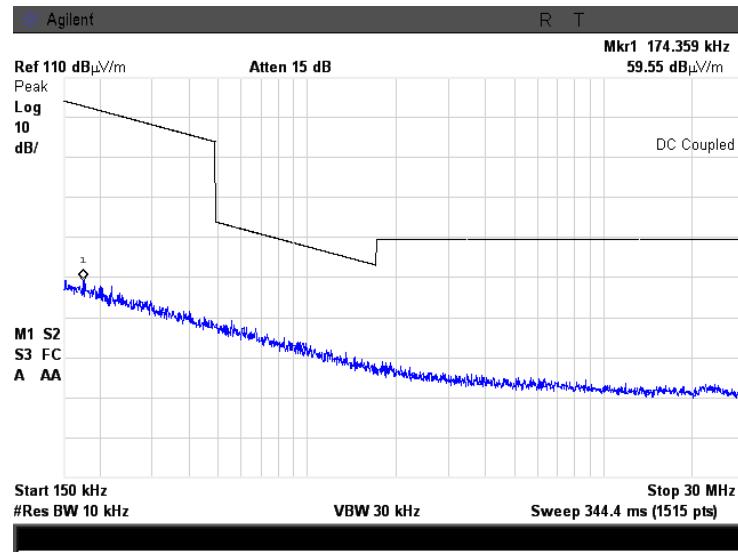




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

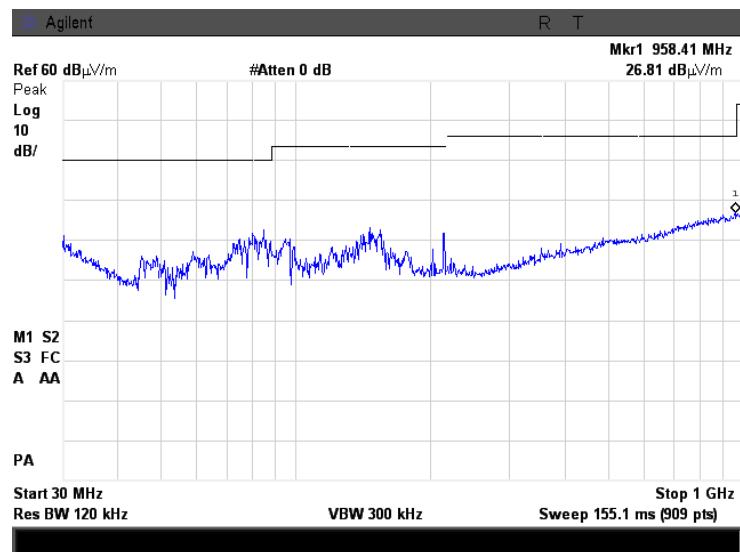




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.12 Radiated emission measurements from 1.0 to 4 GHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

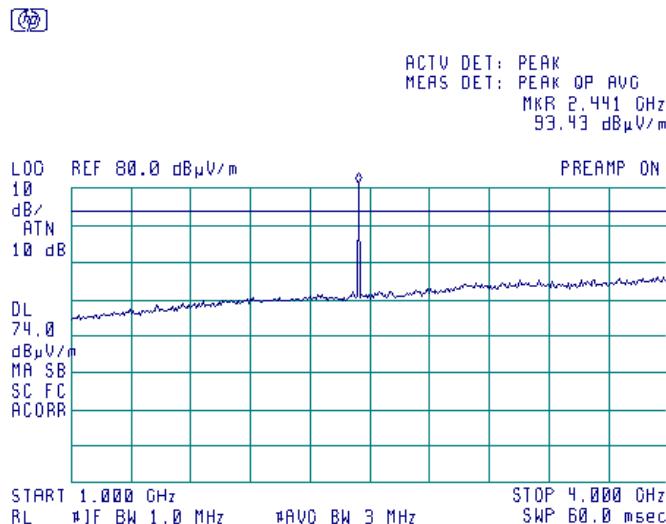

2402 MHz is a fundamental frequency

Plot 7.7.13 Radiated emission measurements from 4.0 to 6.5 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

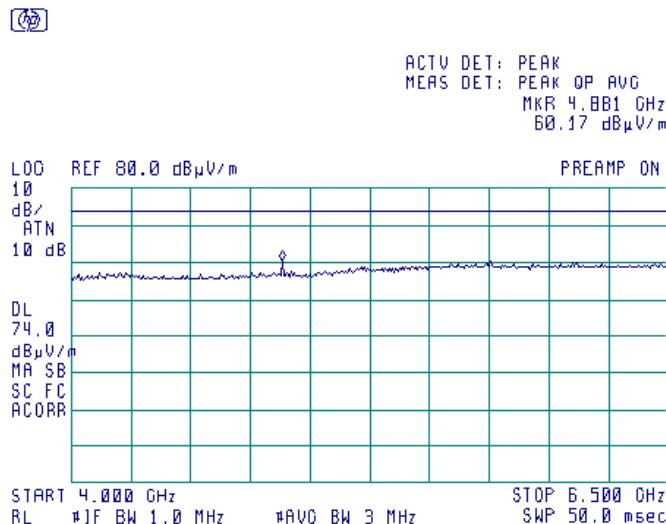




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.14 Radiated emission measurements from 6.5 to 14.0 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

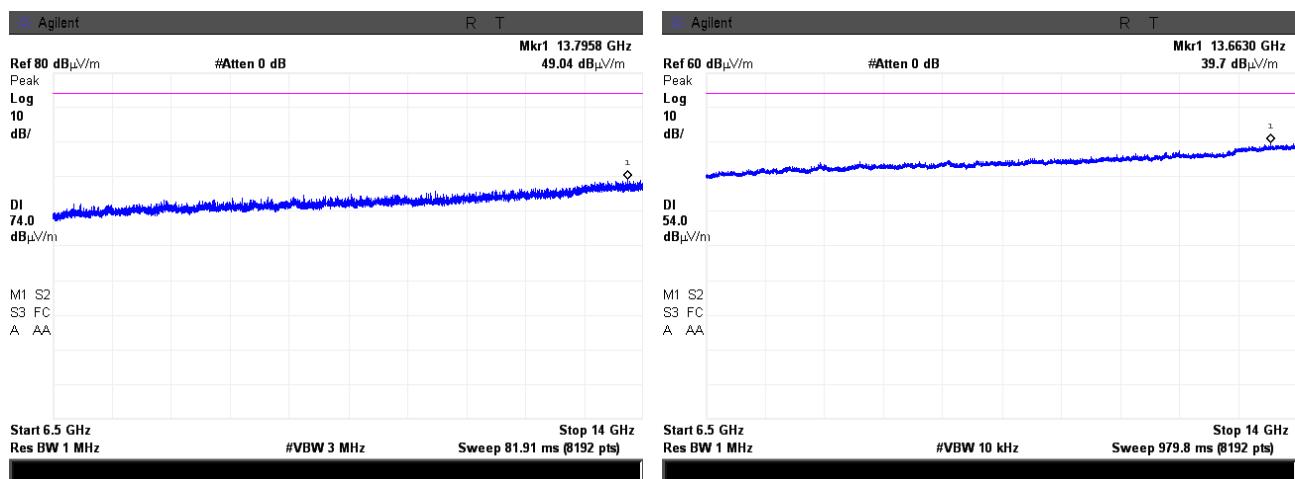**Plot 7.7.15 Radiated emission measurements from 14 to 18.0 GHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

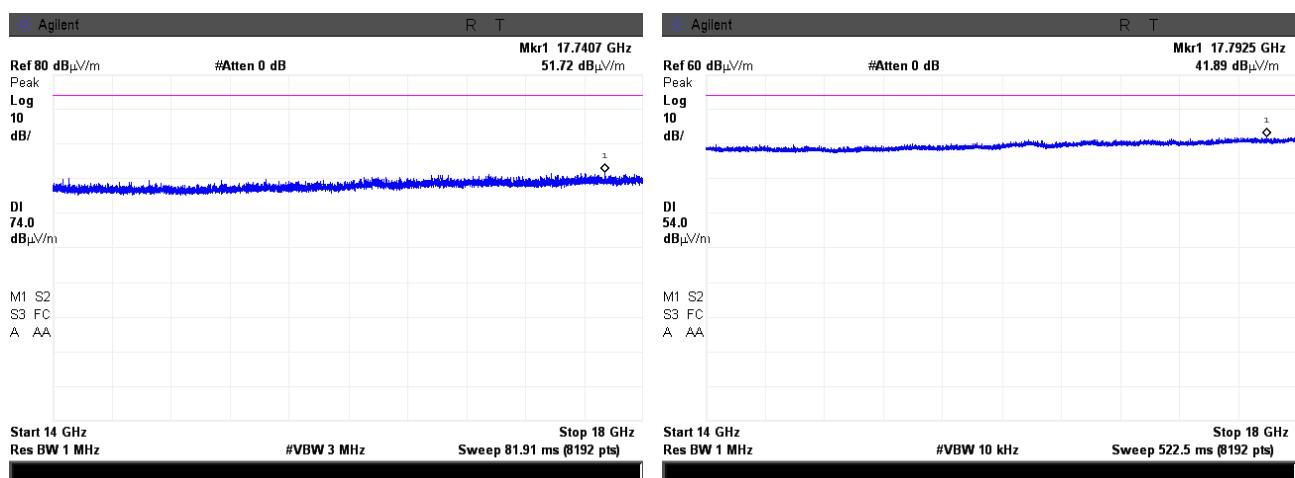




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.16 Radiated emission measurements from 18.0 to 25.0 GHz at the mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

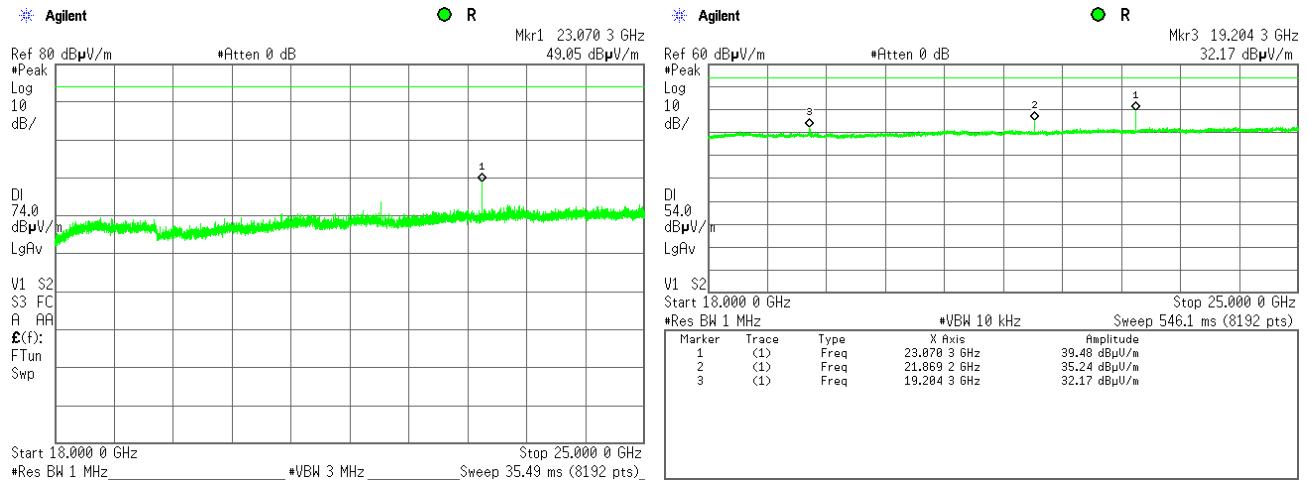

* Ambient signals at 19 GHz, 21 GHz, 23 GHz




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.17 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

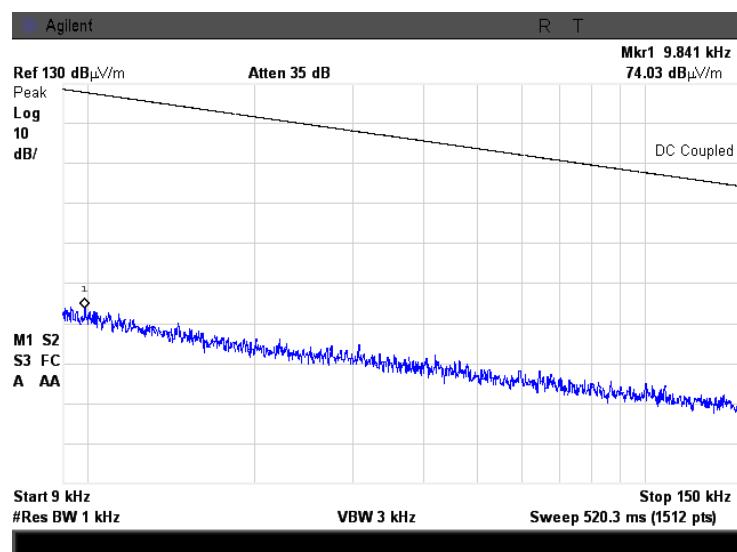

Plot 7.7.18 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

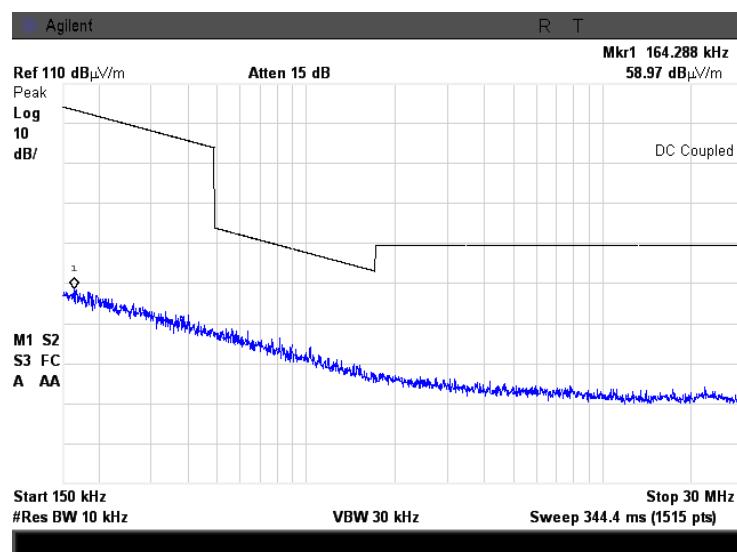




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.19 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

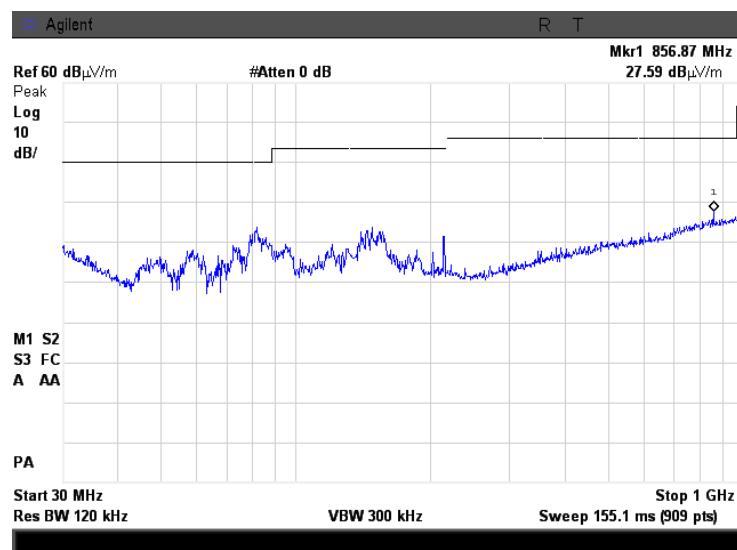

Plot 7.7.20 Radiated emission measurements from 1.0 to 4 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

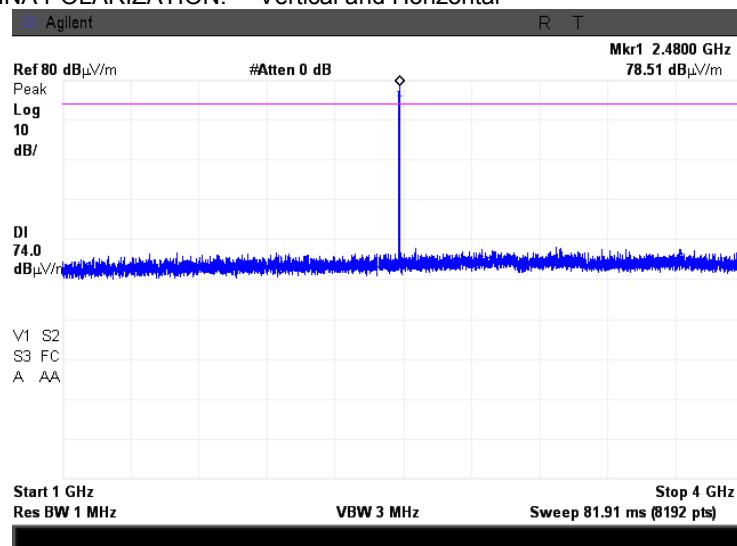

2480 MHz is a fundamental frequency




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.21 Radiated emission measurements from 4.0 to 6.5 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

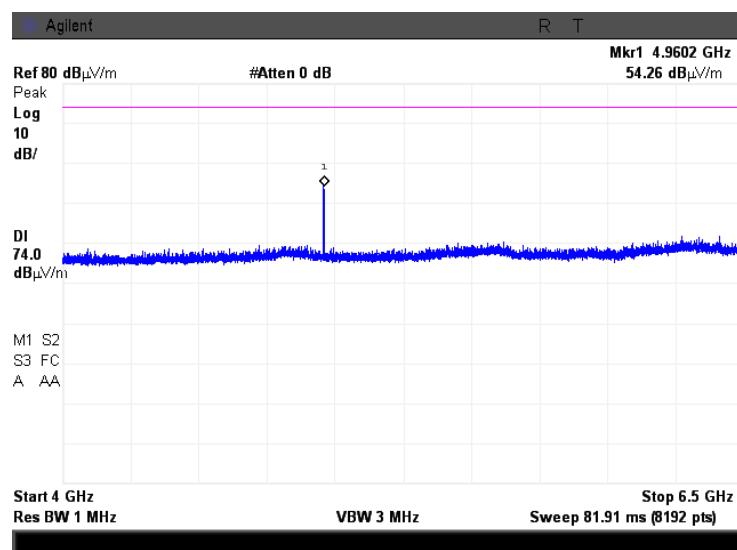**Plot 7.7.22 Radiated emission measurements from 6.5 to 14.0 GHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

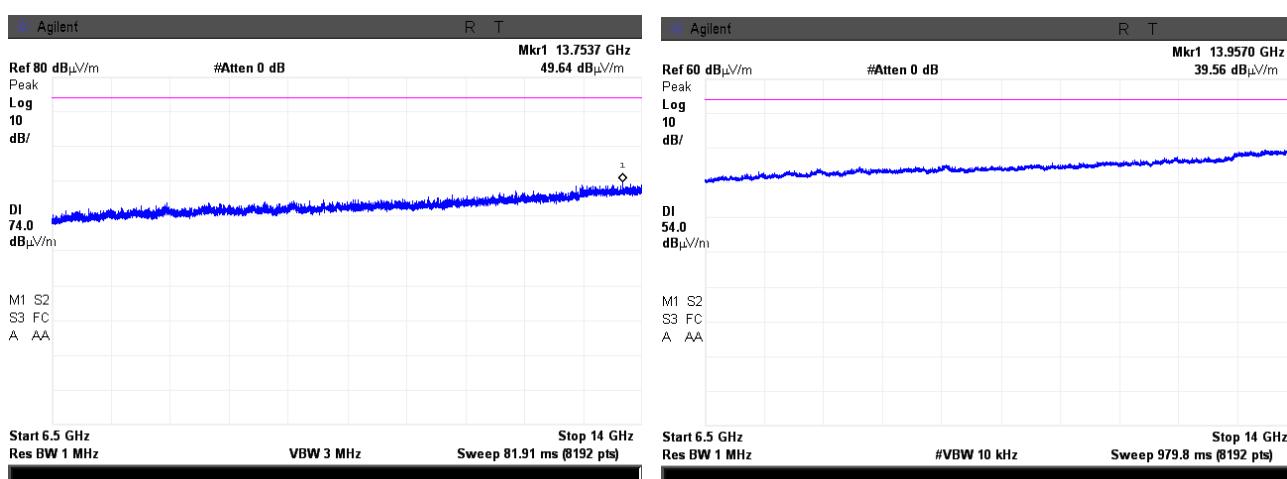




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.23 Radiated emission measurements from 14 to 18.0 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

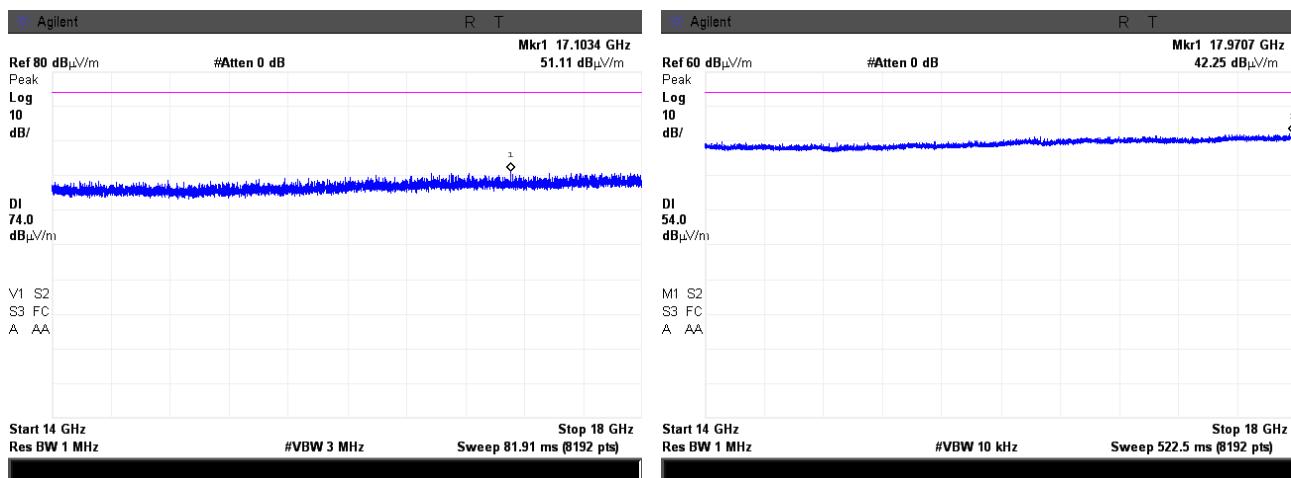**Plot 7.7.24 Radiated emission measurements from 18 to 25 GHz at the high carrier frequency**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

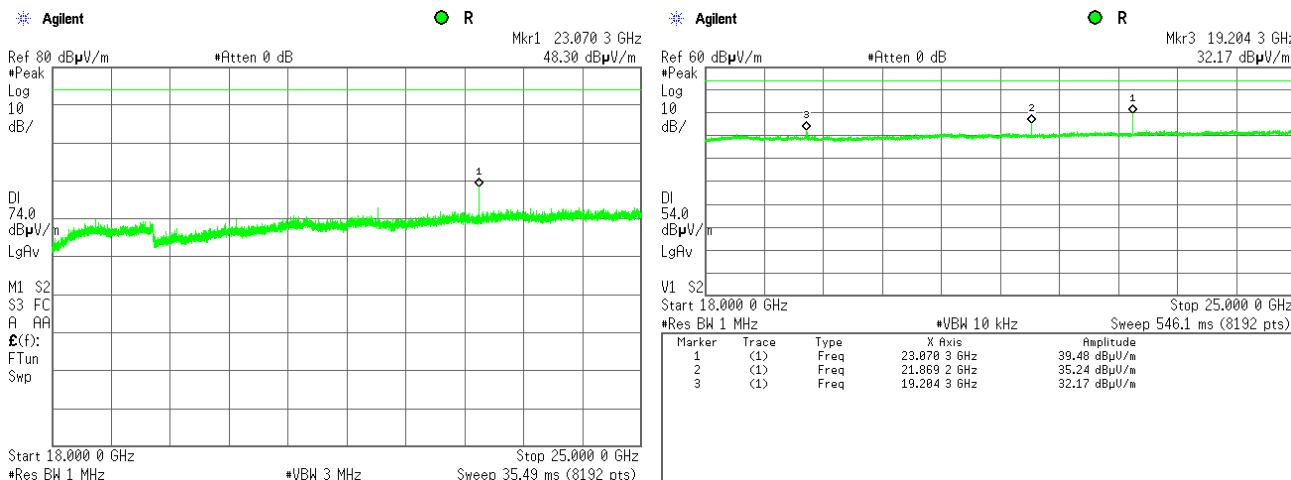

*Ambient signals at 19 GHz, 21 GHz, 23 GHz




HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.25 Radiated emission measurements at the second harmonic frequency at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

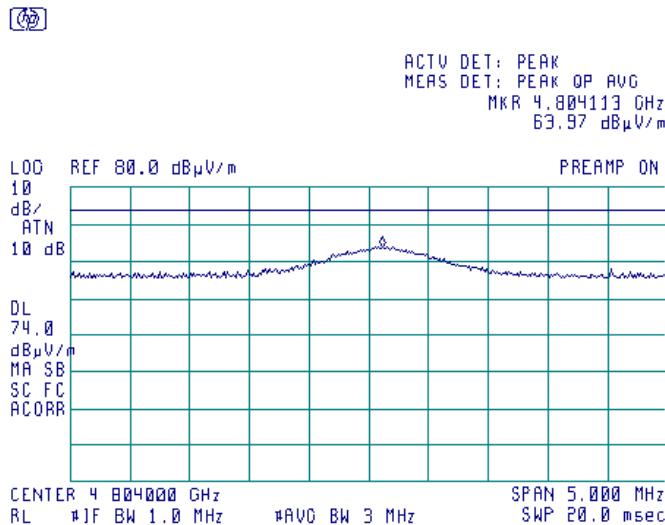**Plot 7.7.26 Radiated emission measurements at the second harmonic frequency at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal

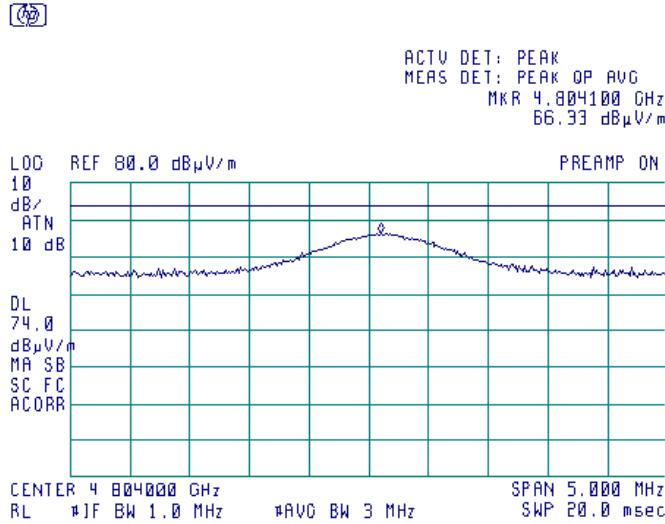




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.27 Radiated emission measurements at the second harmonic frequency at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

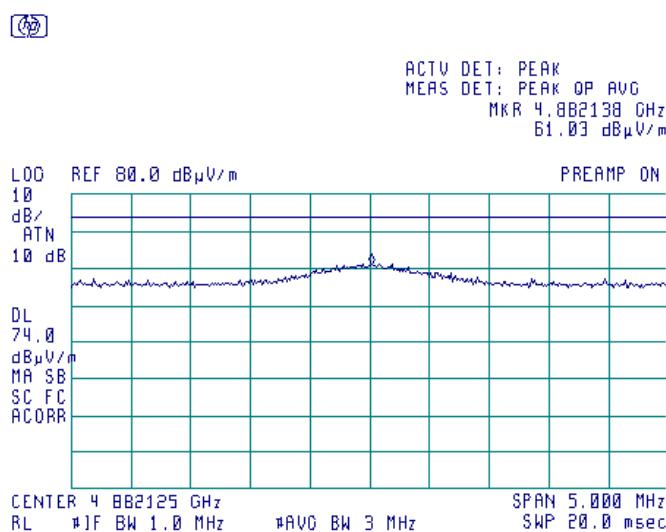

Plot 7.7.28 Radiated emission measurements at the second harmonic frequency at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

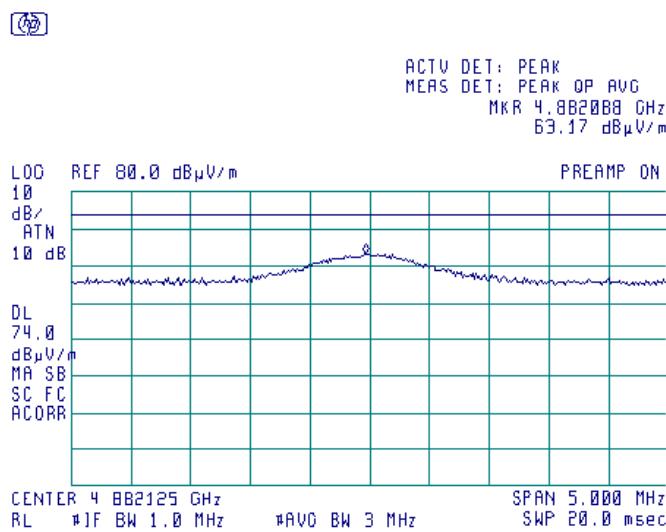




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.7.29 Radiated emission measurements at the second harmonic frequency at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

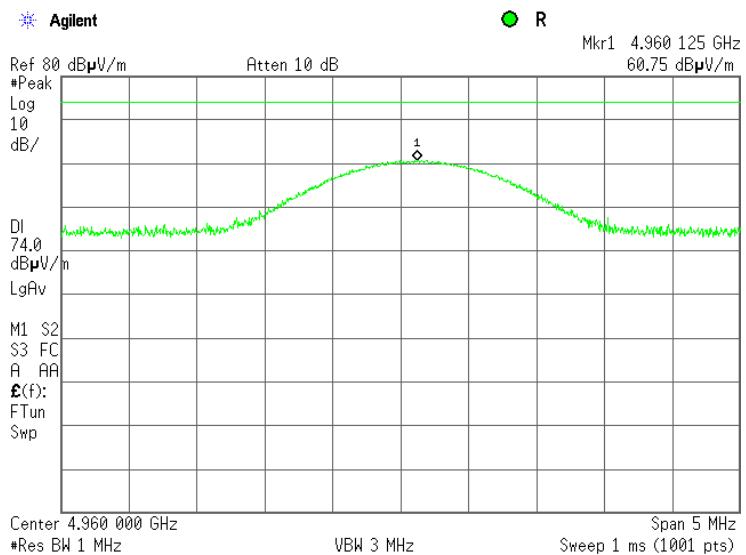

Plot 7.7.30 Radiated emission measurements at the second harmonic frequency at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

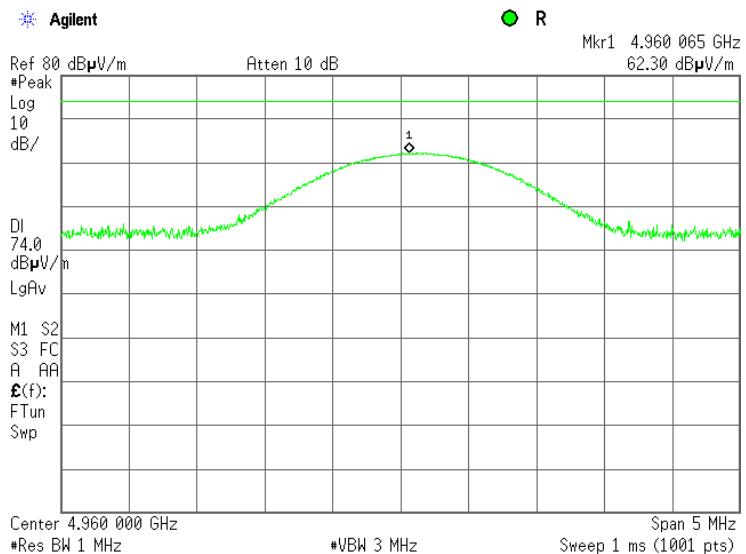





HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.7.31 Transmission pulse duration

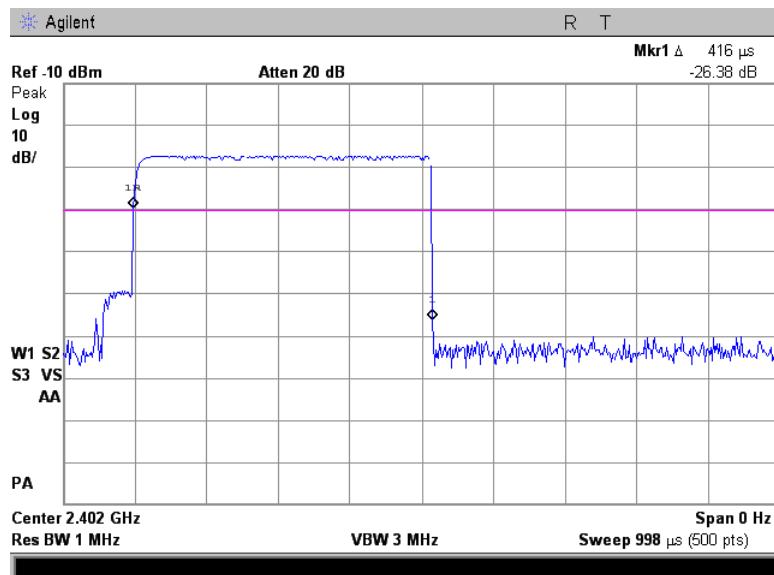

Plot 7.7.32 Transmission pulse period

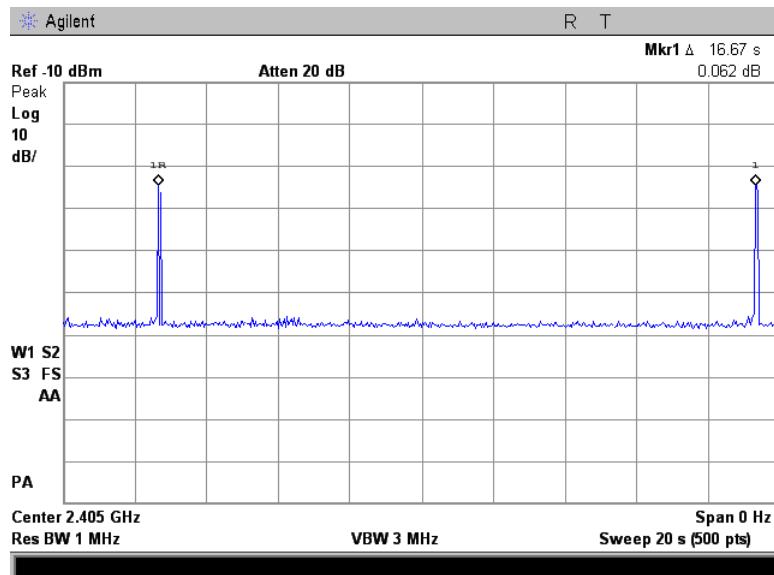



HERMON LABORATORIES

Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	11-Aug-14		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: Battery
Remarks:			

7.8 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly

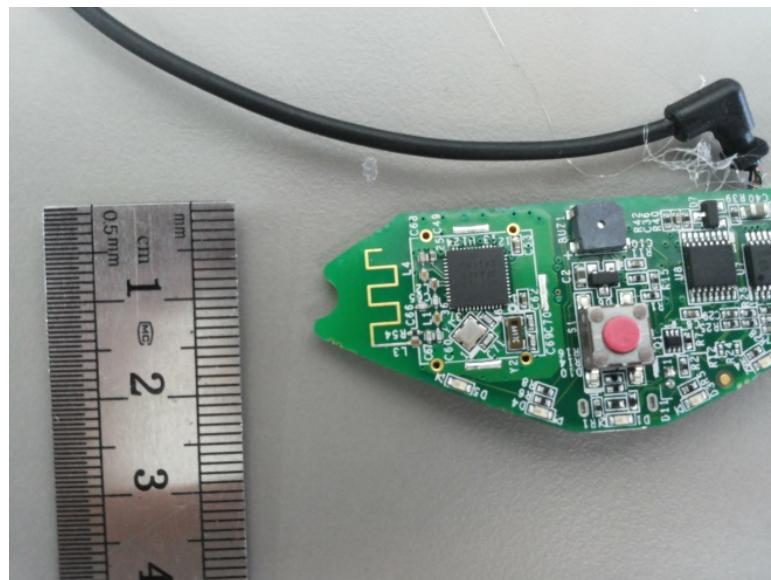



Test specification:	Section 15.207(a), Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

7.9 Conducted emissions

7.9.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.9.1.

Table 7.9.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(µV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* - The limit decreases linearly with the logarithm of frequency.

7.9.2 Test procedure

- 7.9.2.1 The EUT was set up as shown in Figure 7.9.1 and associated photographs, energized and the performance check was conducted.
- 7.9.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.9.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.9.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.9.2.4 The worst test results (the lowest margins) were recorded in Table 7.9.2 and shown in the associated plots.

Figure 7.9.1 Setup for conducted emission measurements, table-top equipment

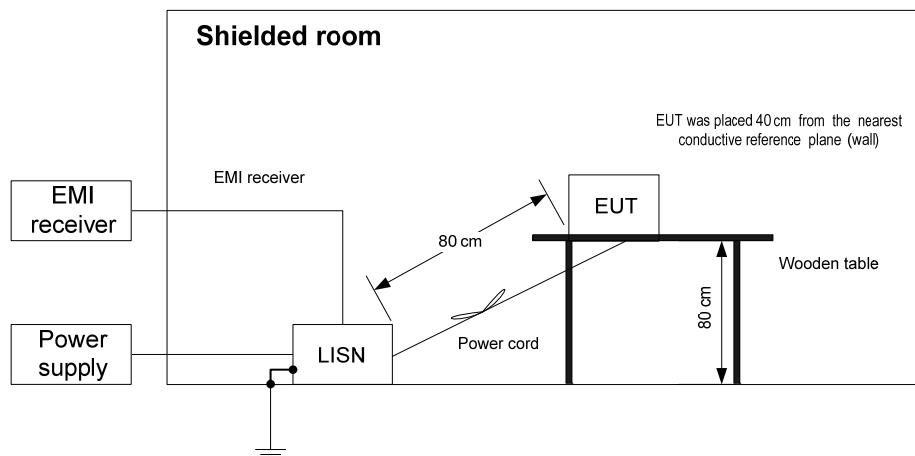



HERMON LABORATORIES

Test specification:	Section 15.207(a), Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	21-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

Table 7.9.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.489241	34.26	25.00	56.20	-31.20	8.68	46.20	-37.52	L1	Pass
0.635515	29.08	22.03	56.00	-33.97	6.72	46.00	-39.28		
1.289997	31.71	24.22	56.00	-31.78	7.31	46.00	-38.69		
1.555948	31.53	20.55	56.00	-35.45	5.44	46.00	-40.56		
2.385890	29.07	20.46	56.00	-35.54	6.78	46.00	-39.22		
2.429073	27.97	20.82	56.00	-35.18	6.73	46.00	-39.27		
0.274049	37.52	30.32	61.06	-30.74	12.74	51.06	-38.32		
0.335621	36.42	30.40	59.37	-28.97	14.34	49.37	-35.03		
0.429173	35.56	28.76	57.32	-28.56	12.04	47.32	-35.28	L2	Pass
0.492820	34.88	29.26	56.13	-26.87	12.23	46.13	-33.90		
1.163281	32.38	26.95	56.00	-29.05	9.98	46.00	-36.02		
2.876548	32.82	25.20	56.00	-30.80	8.70	46.00	-37.30		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 3612	HL 4778				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.207(a), Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

Plot 7.9.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 480 kHz
32.98 dB μ V/m

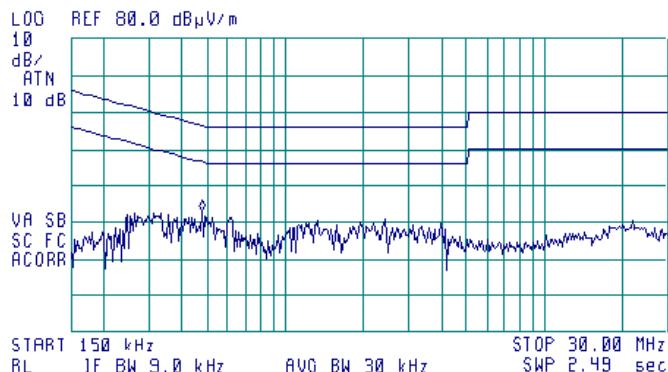


Plot 7.9.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 320 kHz
36.81 dB μ V/m

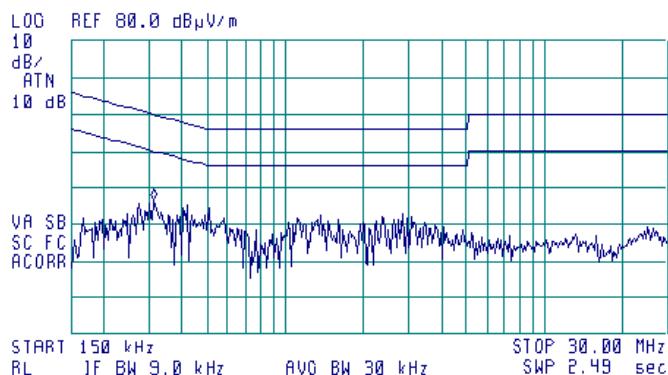



HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(µV)		Class A limit, dB(µV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure

- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 8.1.2.3 The position of the device cables was varied to determine maximum emission level.
- 8.1.2.4 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

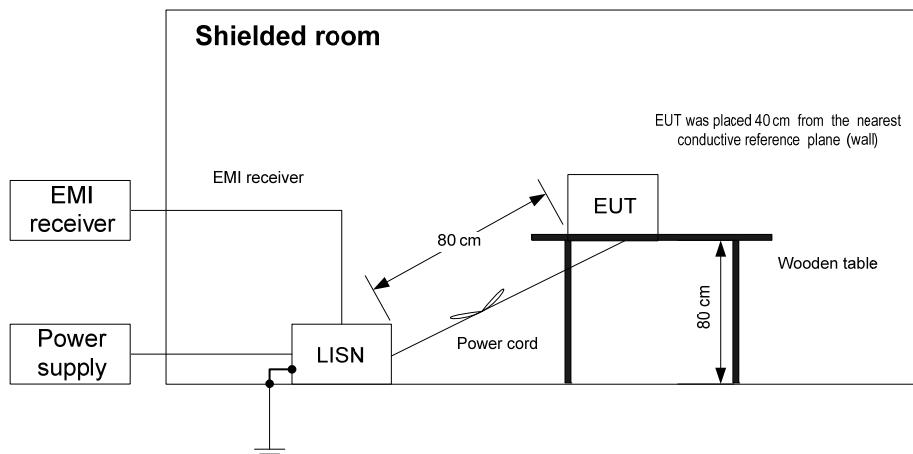



HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

Photograph 8.1.1 Setup for conducted emission measurements



Photograph 8.1.2 Setup for conducted emission measurements





HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	21-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			

Table 8.1.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Receive / Standby
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.489241	34.26	25.00	56.20	-31.20	8.68	46.20	-37.52	L1	Pass
0.635515	29.08	22.03	56.00	-33.97	6.72	46.00	-39.28		
1.289997	31.71	24.22	56.00	-31.78	7.31	46.00	-38.69		
1.555948	31.53	20.55	56.00	-35.45	5.44	46.00	-40.56		
2.385890	29.07	20.46	56.00	-35.54	6.78	46.00	-39.22		
2.429073	27.97	20.82	56.00	-35.18	6.73	46.00	-39.27		
0.274049	37.52	30.32	61.06	-30.74	12.74	51.06	-38.32		
0.335621	36.42	30.40	59.37	-28.97	14.34	49.37	-35.03	L2	Pass
0.429173	35.56	28.76	57.32	-28.56	12.04	47.32	-35.28		
0.492820	34.88	29.26	56.13	-26.87	12.23	46.13	-33.90		
1.163281	32.38	26.95	56.00	-29.05	9.98	46.00	-36.02		
2.876548	32.82	25.20	56.00	-30.80	8.70	46.00	-37.30		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 3612	HL 4778				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-Jul-14		
Temperature: 26 °C	Air Pressure: 1005 hPa	Relative Humidity: 43 %	Power Supply: 120 VAC
Remarks:			


Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: B
EUT OPERATING MODE: Receive / Standby
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

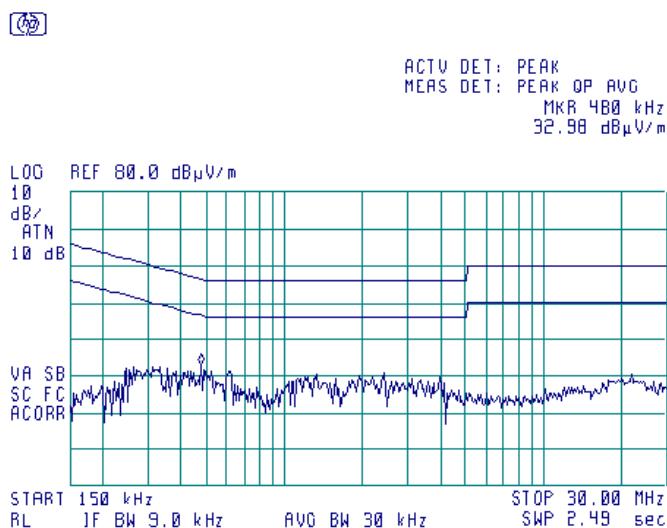

Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: B
EUT OPERATING MODE: Receive / Standby
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

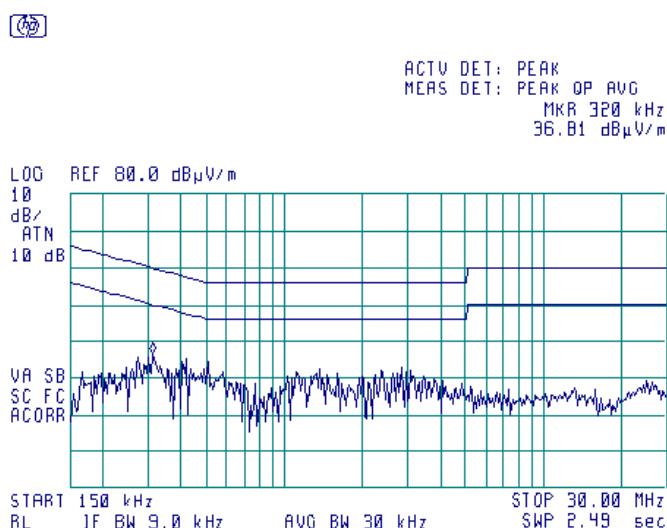



HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: 3.7 VDC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits


Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.2.2 Test procedure

- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.
- 8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

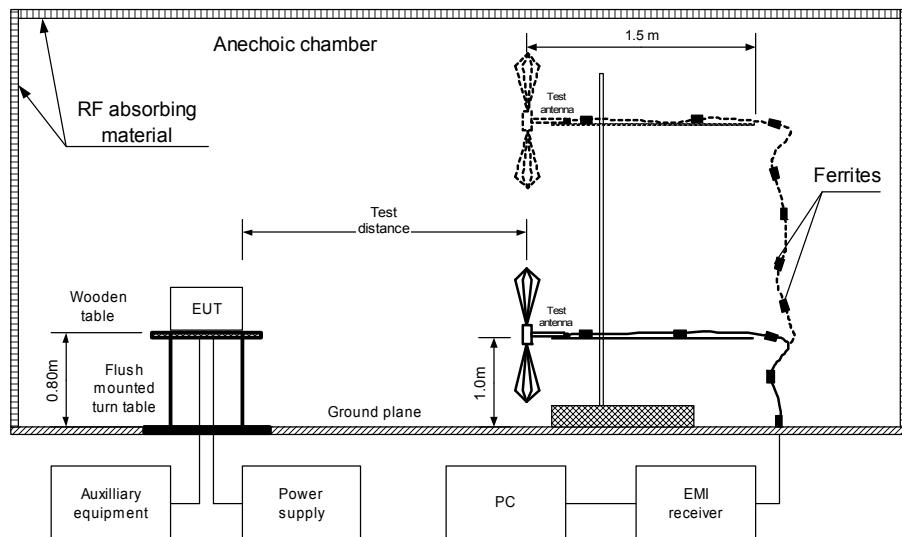



HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: 3.7 VDC
Remarks:			

Photograph 8.2.1 Setup for radiated emission measurements



Photograph 8.2.2 Setup for radiated emission measurements





HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: 3.7 VDC
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
 LIMIT: Class B
 EUT OPERATING MODE: Receive / Stand-by

TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / QUASI-PEAK
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
All emissions were found at least 20 dB below the limit								

DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz – 6000 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
All emissions were found at least 20 dB below the limit										

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 4353	HL 4722				
---------	---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Jul-14 - 20-Jul-14		
Temperature: 25 °C	Air Pressure: 1005 hPa	Relative Humidity: 50 %	Power Supply: 3.7 VDC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range.

LIMIT: Class B
TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

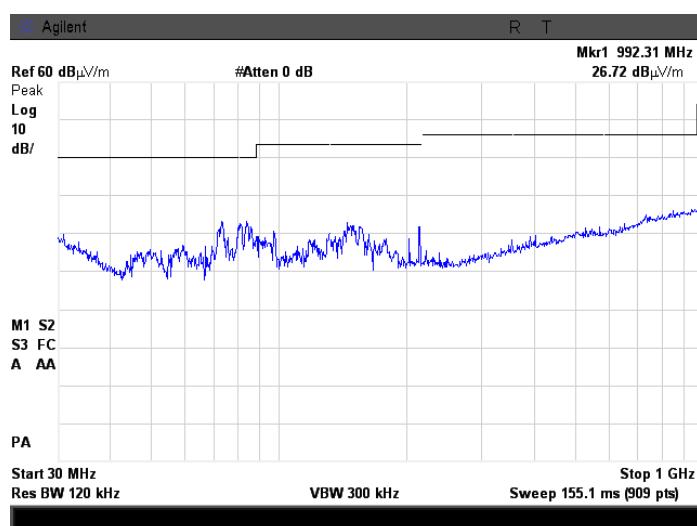

Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical antenna polarization

LIMIT: Class B
TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

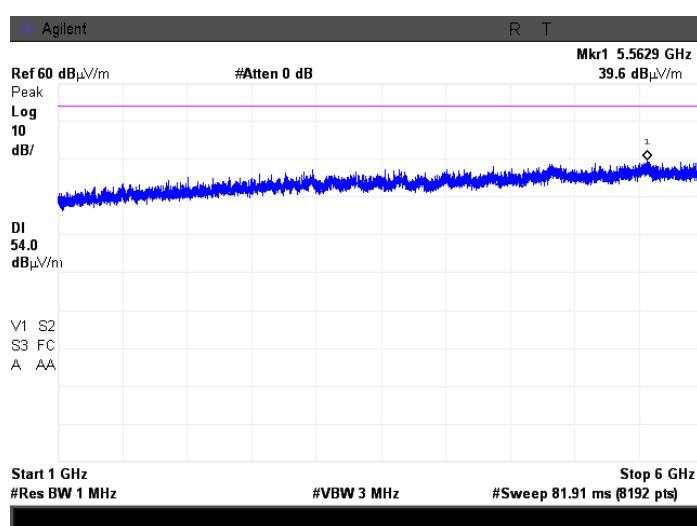



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	23-Oct-13	23-Oct-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	22-May-14	22-May-15
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	12-Dec-12	12-Dec-15
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	13-Oct-13	13-Oct-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	25-Oct-13	25-Dec-14
1791	Laboratory DC Power Supply, Dual Tracking Output	RACOM	PS-404	8800692	13-Oct-13	13-Oct-14
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	03-Jan-14	03-Jan-15
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	10-Jul-13	10-Sep-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
3535	Amplifier, low noise, 18 to 40 GHz	Quinstar Technology	QLJ-18404537 -J0	111590030 01	08-Oct-13	08-Oct-14
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	05-Dec-13	05-Dec-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	20-May-14	20-May-15
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1226/2A	06-Feb-14	06-Feb-15
4114	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz	ETS Lindgren	3117	00123515	27-Dec-13	27-Dec-14
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 136	07-Apr-14	07-Apr-15
4150	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 91	30-Dec-13	30-Dec-14
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	12-Aug-14	12-Aug-15
4273	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70045	27-Nov-13	27-Nov-14
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	27-Nov-13	27-Nov-14



HERMON LABORATORIES

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101003	16-Mar-14	16-Mar-15
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	191000086881	10-Apr-14	10-Apr-15
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	51228701001	01-May-14	01-May-15
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00262, 3427A00123	06-Nov-13	06-Nov-14



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.112, HL 0768, 0769, 0770, 0771, 0772

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged waveguide horn antenna
ETS Lindgren, Model 3117, serial number: 00123515, HL 4114

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field strength in dB(μ V/meter)



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244, S/N 51228701 001
HL 4722

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration

LifeBEAM BLE RF declaration


17/08/14

BLE use frequency hopping over 37 channels and also have 3 Advertising Channels on 2402 MHz, 2426 MHz, 2480 MHz, please see the attached image.

2.4 GHz ISM band

1 Mbps GFSK

- Larger modulation index than Bluetooth BR (which means better range)
- 40 Channels on 2 MHz spacing:

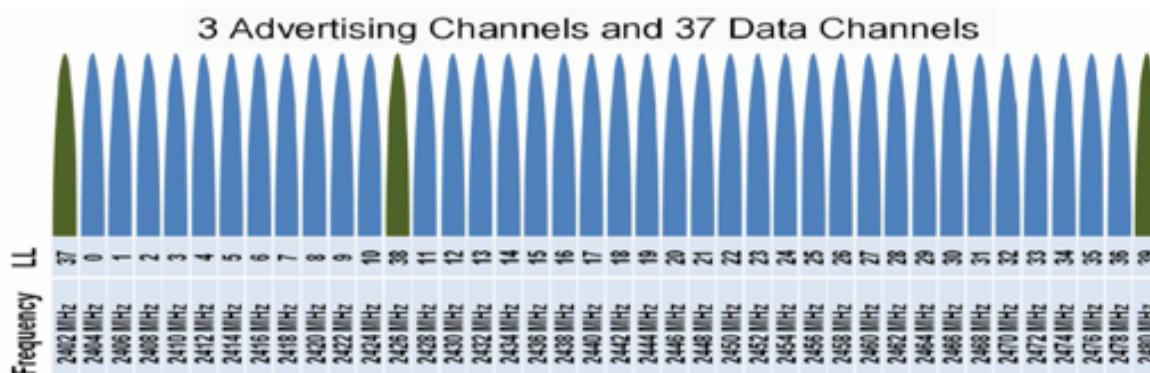

Elad Hofstetter

Project manager

LifeBEAM