

Report No.: AGC00020140601FE08 Page 1 of 47

FCC Test Report

Report No.: AGC00020140601FE08

FCC ID : 2ACQVCX-1

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth headset

BRAND NAME: Wsound

MODEL NAME : CX-1

CLIENT : SHANXI CEIEC CO., LTD

DATE OF ISSUE : Jul.02, 2014

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 47

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul.02, 2014	Valid	Original Report

Page 3 of 47

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2.GENERAL INFORMATION	6
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 TEST FACILITY	
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	
2.7 MEASUREMENT UNCERTAINTY	7
3. SYSTEM TEST CONFIGURATION	 3
3.2 EQUIPMENT USED IN TESTED SYSTEM	3
3.3. SUMMARY OF TEST RESULTS	3
4. DESCRIPTION OF TEST MODES	
5. ANTENNA REQUIREMENT	
5.2. TEST RESULT	
6. TEST FACILITY	
7. RADIATED EMISSION	11
7.1 MEASUREMENT PROCEDURE	
7.3 LIMITS AND MEASUREMENT RESULT	
7.4 TEST RESULT (WORST MODULATION: GFSK)	
8. BAND EDGE EMISSION	
8.2. TEST SET-UP	
8.3. TEST RESULT	27
9. 6DB BANDWIDTH	31
9.1. TEST PROCEDURE	
9.2. SUMMARY OF TEST RESULTS/PLOTS	
10. CONDUCTED OUTPUT POWER	33
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
10.3. LIMITS AND MEASUREMENT RESULT	34
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
11.1 MEASUREMENT PROCEDURE	36

Page 4 of 47

	11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
	11.3 LIMITS AND MEASUREMENT RESULT	36
12	2. FCC LINE CONDUCTED EMISSION TEST	
	12.1 LIMITS	39
	12.2 TEST SETUP	39
	12.3 PRELIMINARY PROCEDURE	40
	12.4 FINAL TEST PROCEDURE	40
	12.5 TEST RESULT OF POWER LINE	41
ΑF	PPENDIX A: PHOTOGRAPHS OF TEST SETUP	42
ΑF	PPENDIX B: PHOTOGRAPHS OF EUT	43

Page 5 of 47

1. VERIFICATION OF COMPLIANCE

TERM TO TOTAL COMMENTATION					
Applicant	SHANXI CEIEC CO., LTD				
Address	42 Xinjian Road Taiyuan Shanxi China				
Manufacturer	Shenzhen Boheng Communication Technology Co., Ltd				
Address	ROOM 14C2, Electronic Science & Technology NO.C Building, Shennan Zhong Road No.2070, Futian district, Shenzhen, China				
Product Designation	Bluetooth headset				
Brand Name	Wsound				
Test Model	CX-1				
Date of test	Jun.30,2014 to Jul.02,2014				
Deviation	None				
Condition of Test Sample	Normal				
Report Template	AGCRT-US-BLE/RF (2013-03-01)				

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Water Zuo Jul.02, 2014

Checked By

Forrest Lei Jul.02, 2014

Authorized By

Solger Zhang Jul.02, 2014

Page 6 of 47

2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "Bluetooth headset". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz			
Bluetooth Version	V4.0			
Modulation	GFSK			
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)			
Antenna Designation	Integral antenna			
Antenna Gain	2dBi			
Hardware Version	CSR8615A04			
Software Version	CSR 8615 software			
Power Supply	DC3.7V by Built-in Li-ion Battery			
Note: The LICE Part can not be used for communication with DC. It's only for charging				

Note: The USB Port can not be used for communication with PC. It's only for charging. The EUT is not active while charging.

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ACQVCX-1** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

2.3TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance (Shenzhen) Co, Ltd

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China.

FCC register No.: 259865

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

Page 7 of 47

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 MEASUREMENT UNCERTAINTY

Radiation Emission:+/-3.2

Conduction Emission:+/-2.5

Page 8 of 47


3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration: Normal Operating

EUT

Configuration: Continuous TX



3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth headset	Wsound	CX-1	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E

3.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT			
§ 15.203	Antenna Requirement	Compliant			
§15.209 §15.247(d)	Radiated Emission	Compliant			
§15.247(d)	Band Edges	Compliant			
§15.247	§15.247 6 dB Bandwidth				
§15.247(b)	§15.247(b) Conducted Power				
§15.247(e)	§15.247(e) Maximum Conducted Output Power SPECTRAL Density				
§15.207	§15.207 Line Conduction Emission				

Note: N/A means not applicable

Page 9 of 47

4. DESCRIPTION OF TEST MODES

The EUT has been operated in one modulation: GFSK.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:

- 1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. ANTENNA REQUIREMENT

5.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.

Page 10 of 47

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd				
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China				
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.				

ALL TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/17/2013	07/16/2014
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/17/2013	07/16/2014
Amplifier	EM	EM30180	0607030	02/28/2014	02/27/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/17/2013	07/16/2014
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/17/2013	07/16/2014
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
Loop Antenna	Daze	ZN30900N	SEL0097	07/17/2013	07/16/2014
Isolation Transformer	LETEAC	LTBK		07/17/2013	07/16/2014

Page 11 of 47

7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 12 of 47

7.2 TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

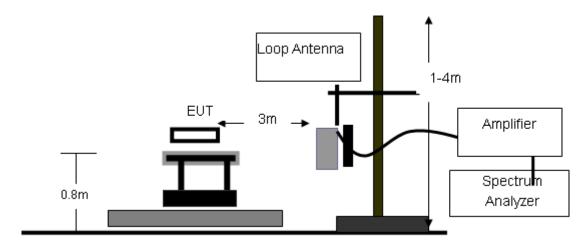

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

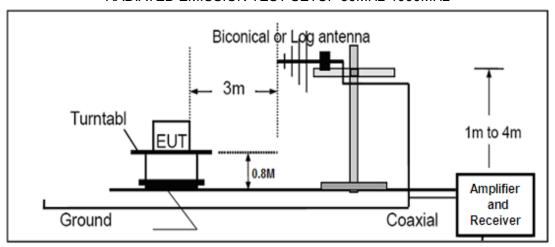

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

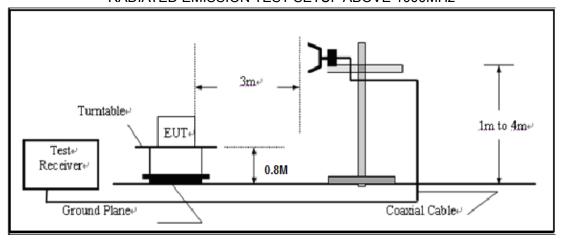

Page 13 of 47

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

7.4 TEST RESULT (Worst Modulation: GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


Temperature: 26

Humidity: 60 %

Page 14 of 47

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

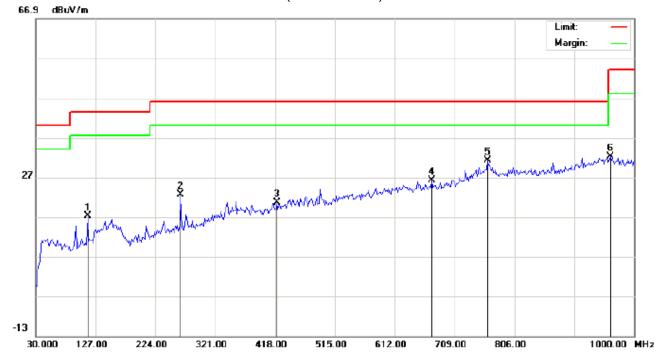

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:Low channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		114.0667	5.82	11.45	17.27	43.50	-26.23	peak			
2		264.4167	8.33	14.34	22.67	46.00	-23.33	peak			
3		421.2333	0.86	19.72	20.58	46.00	-25.42	peak			
4		671.8167	1.71	24.43	26.14	46.00	-19.86	peak			
5	*	762.3500	4.44	26.80	31.24	46.00	-14.76	peak			
6		961.2000	2.28	29.89	32.17	54.00	-21.83	peak			

Power:

Distance: 3m

Polarization: Horizontal


RESULT: PASS

Temperature: 26

Humidity: 60 %

Page 15 of 47

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

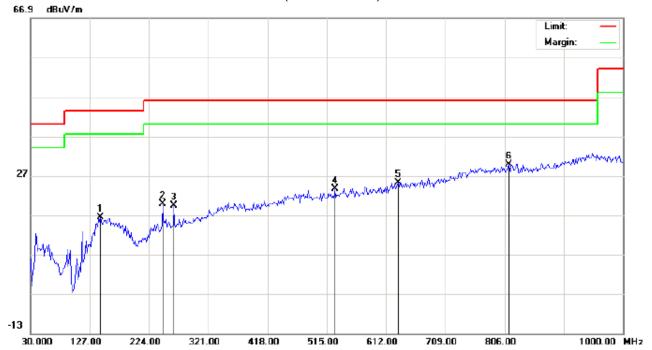

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:Low channel TX

Note:

No. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
	144.7833	1.17	15.23	16.40	43.50	-27.10	peak			
	246.6333	6.25	13.57	19.82	46.00	-26.18	peak			
	264.4167	5.14	14.34	19.48	46.00	-26.52	peak			
	527.9333	1.66	21.88	23.54	46.00	-22.46	peak			
	631.4000	1.82	23.43	25.25	46.00	-20.75	peak			
		MHz 144.7833 246.6333 264.4167 527.9333	MHz dBuV 144.7833 1.17 246.6333 6.25 264.4167 5.14 527.9333 1.66	MHz dBuV dB/m 144.7833 1.17 15.23 246.6333 6.25 13.57 264.4167 5.14 14.34 527.9333 1.66 21.88	MHz dBuV dB/m dBuV/m 144.7833 1.17 15.23 16.40 246.6333 6.25 13.57 19.82 264.4167 5.14 14.34 19.48 527.9333 1.66 21.88 23.54	MHz dBuV dB/m dBuV/m dBuV/m 144.7833 1.17 15.23 16.40 43.50 246.6333 6.25 13.57 19.82 46.00 264.4167 5.14 14.34 19.48 46.00 527.9333 1.66 21.88 23.54 46.00	MHz dBuV dB/m dBuV/m dBuV/m dB 144.7833 1.17 15.23 16.40 43.50 -27.10 246.6333 6.25 13.57 19.82 46.00 -26.18 264.4167 5.14 14.34 19.48 46.00 -26.52 527.9333 1.66 21.88 23.54 46.00 -22.46	MHz dBuV dB/m dBuV/m dBuV/m dB Detector 144.7833 1.17 15.23 16.40 43.50 -27.10 peak 246.6333 6.25 13.57 19.82 46.00 -26.18 peak 264.4167 5.14 14.34 19.48 46.00 -26.52 peak 527.9333 1.66 21.88 23.54 46.00 -22.46 peak	Mk Freq. Reading Factor Measurement Limit Over Detector Height MHz dBuV dBuV dBuV/m dBuV/m	Mk Freq. Reading Factor Measurement Limit Over dBu/m Detector Height Degree MHz dBuV dBuV/m dBuV/m dB Detector Height Degree 144.7833 1.17 15.23 16.40 43.50 -27.10 peak 246.6333 6.25 13.57 19.82 46.00 -26.18 peak 264.4167 5.14 14.34 19.48 46.00 -26.52 peak 527.9333 1.66 21.88 23.54 46.00 -22.46 peak

46.00

-16.12

peak

Power:

Distance: 3m

Polarization: Vertical

RESULT: PASS

812.4667

2.56

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


29.88

27.32

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 16 of 47

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

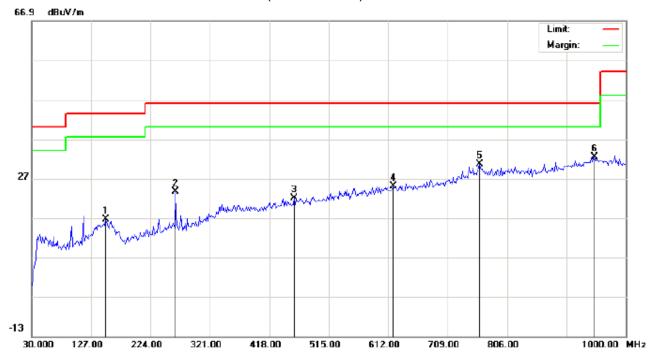

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:Middle channel TX

Note:


	Polarization: Horizontal	Temperature: 26
s B 3M Radiation	Power:	Humidity: 60 %
neadset	Distance: 3m	

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		151.2500	1.38	15.27	16.65	43.50	-26.85	peak			
2		264.4167	9.31	14.34	23.65	46.00	-22.35	peak			
3		458.4167	1.41	20.68	22.09	46.00	-23.91	peak			
4		620.0833	1.29	23.78	25.07	46.00	-20.93	peak			
5		760.7333	3.86	26.78	30.64	46.00	-15.36	peak		·	
6	*	948.2667	2.51	29.95	32.46	46.00	-13.54	peak			

RESULT: PASS

Page 17 of 47

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

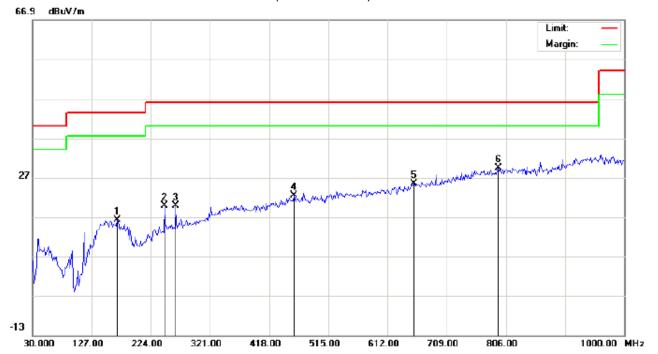

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:Middle channel TX

Note:

Polarizatio	n: Vertical	Temperature: 26
Power:		Humidity: 60 %
Distance:	3m	

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		169.0333	1.42	14.76	16.18	43.50	-27.32	peak			
2		246.6333	6.23	13.57	19.80	46.00	-26.20	peak			
3		264.4167	5.53	14.34	19.87	46.00	-26.13	peak			
4		458.4167	1.64	20.68	22.32	46.00	-23.68	peak			
5		655.6500	1.42	24.00	25.42	46.00	-20.58	peak			
6	*	793.0667	2.17	27.22	29.39	46.00	-16.61	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 47

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

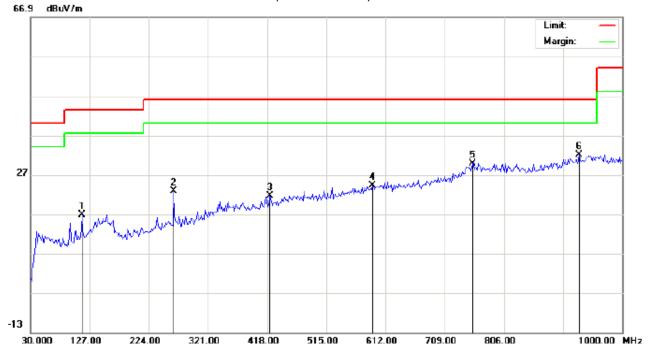

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:High channel TX

Note:

Polarization:	Horizontal	Temperature	26
Power:		Humidity: 60) %


Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		114.0667	5.35	11.45	16.80	43.50	-26.70	peak			
2		264.4167	8.52	14.34	22.86	46.00	-23.14	peak			
3		422.8500	1.89	19.76	21.65	46.00	-24.35	peak			
4		590.9833	0.75	23.50	24.25	46.00	-21.75	peak			
5		754.2667	3.12	26.69	29.81	46.00	-16.19	peak			
6	*	928.8667	2.52	29.41	31.93	46.00	-14.07	peak			

RESULT: PASS

Page 19 of 47

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

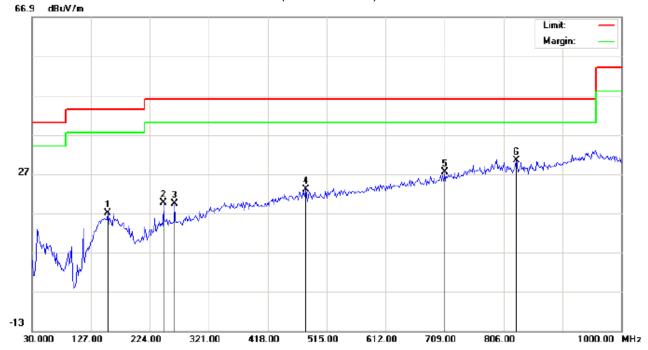

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth headset

M/N:CX-1

Mode:High channel TX

Note:

Polarization:	Vertical	Temperature: 2	26
Power:		Humidity: 60 %	6

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		154.4833	1.77	15.29	17.06	43.50	-26.44	peak			
2		246.6333	5.96	13.57	19.53	46.00	-26.47	peak			
3		264.4167	5.13	14.34	19.47	46.00	-26.53	peak			
4		481.0500	2.15	20.93	23.08	46.00	-22.92	peak			
5		709.0000	1.99	25.45	27.44	46.00	-18.56	peak			
6	*	827.0167	3.10	27.31	30.41	46.00	-15.59	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 20 of 47

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

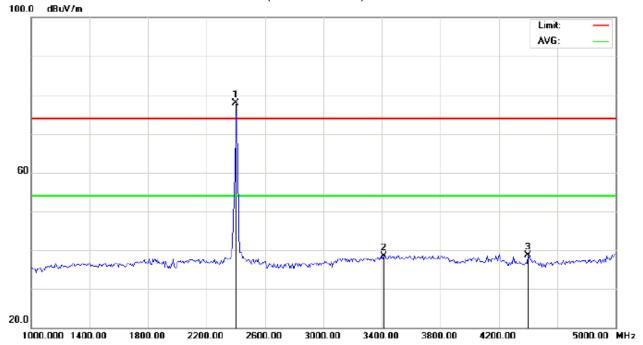

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: Low channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	87.61	-9.68	77.93	74.00	3.93	peak			
2		3413.333	46.50	-7.97	38.53	74.00	-35.47	peak			
3		4400.000	42.16	-3.45	38.71	74.00	-35.29	peak			

RESULT: PASS

Page 21 of 47

RADIATED EMISSION TEST-(ABOVE 1GHZ)-LOW CHANNEL-VERTICAL

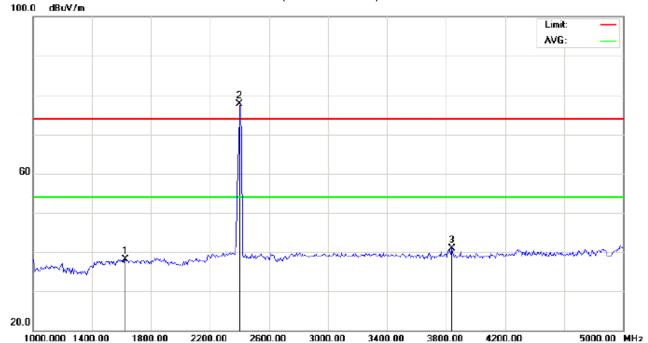

Site: site #1 Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: Low channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1626.667	52.10	-14.05	38.05	74.00	-35.95	peak			
2	*	2402.000	87.45	-9.68	77.77	74.00	3.77	peak			
3		3840.000	46.72	-5.80	40.92	74.00	-33.08	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 47

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

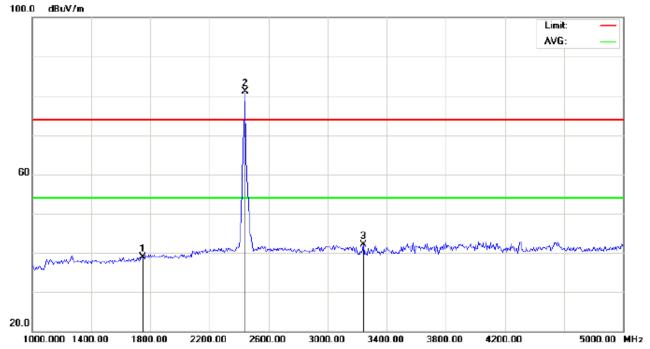

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: Middle channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1746.667	51.71	-12.78	38.93	74.00	-35.07	peak			
2	*	2440.000	90.76	-9.64	81.12	74.00	7.12	peak			
3		3240.000	50.30	-8.13	42.17	74.00	-31.83	peak			

RESULT: PASS

Page 23 of 47

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-VERTICAL

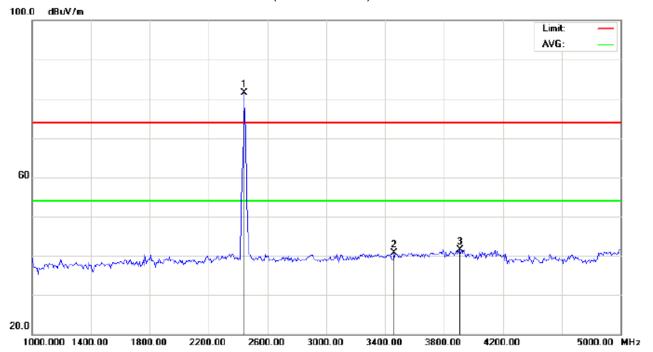

Site: site #1 Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2440.000	91.17	-9.64	81.53	74.00	7.53	peak			
2		3460.000	48.71	-7.93	40.78	74.00	-33.22	peak			
3		3906.667	46.90	-5.38	41.52	74.00	-32.48	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 47

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

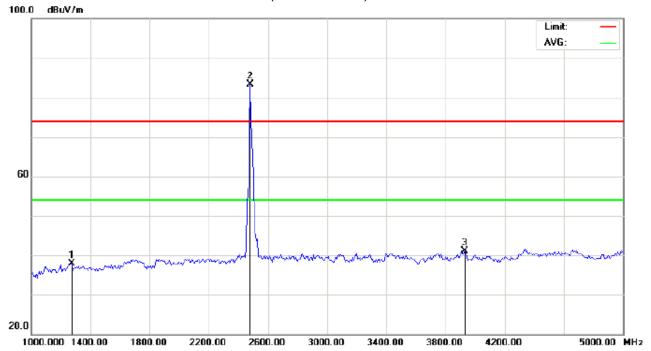

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: High channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		1273.333	53.47	-15.48	37.99	74.00	-36.01	peak			
2	*	2480.000	92.96	-9.59	83.37	74.00	9.37	peak			
3		3933.333	46.41	-5.22	41.19	74.00	-32.81	peak			

RESULT: PASS

Page 25 of 47

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-VERTICAL

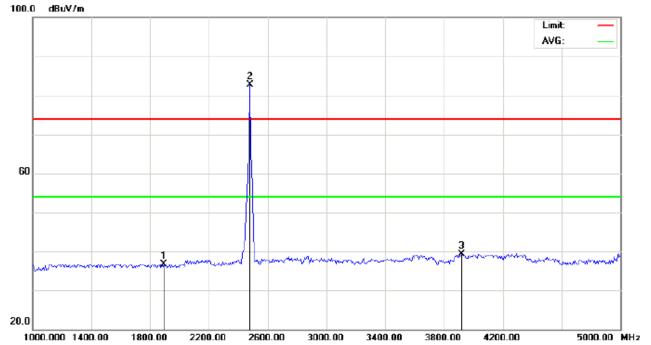

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth headset Distance:

M/N:CX-1

Mode: High channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1893.333	47.93	-11.24	36.69	74.00	-37.31	peak			
2	*	2480.000	92.27	-9.59	82.68	74.00	8.68	peak			
3		3920.000	44.54	-5.30	39.24	74.00	-34.76	peak			

RESULT: PASS

Note: 5~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 26 of 47

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set Span = 2MHz, RBW>=100 KHz, VBW>=3RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.


8.2. TEST SET-UP

Radiated same as 7.2

Page 27 of 47

8.3. TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

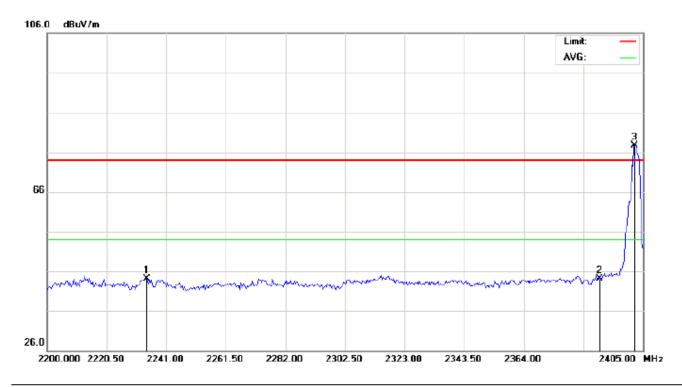

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: CX-1


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2234.167	53.97	-9.86	44.11	74.00	-29.89	peak			
2		2390.000	53.76	-9.69	44.07	74.00	-29.93	peak			
3	*	2402.000	87.37	-9.68	77.69	74.00	3.69	peak			

Page 28 of 47

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

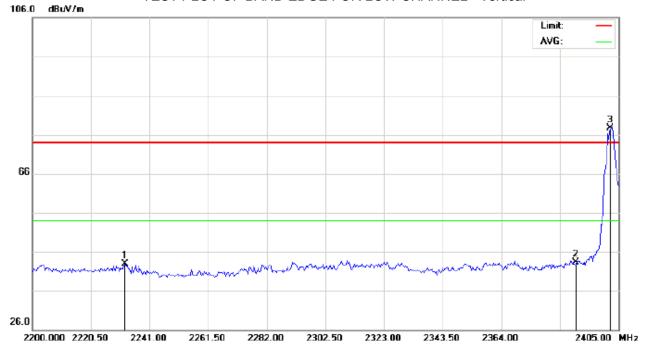

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: CX-1

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2232.458	52.69	-9.86	42.83	74.00	-31.17	peak			
2		2390.000	53.06	-9.69	43.37	74.00	-30.63	peak			
3	*	2402.000	87.37	-9.68	77.69	74.00	3.69	peak			

RESULT: PASS

Page 29 of 47

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal



Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: CX-1


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	93.04	-9.59	83.45	74.00	9.45	peak			
2		2483.500	51.10	-9.59	41.51	74.00	-32.49	peak			
3		2497.873	52.06	-9.57	42.49	74.00	-31.51	peak			

Page 30 of 47

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

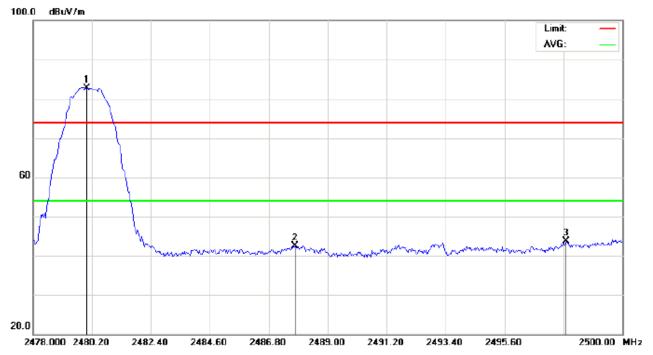

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth headset Distance:

M/N: CX-1

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	92.31	-9.59	82.72	74.00	8.72	peak			
2		2487.790	52.12	-9.58	42.54	74.00	-31.46	peak			
3		2497.910	53.35	-9.57	43.78	74.00	-30.22	peak			

RESULT: PASS

Page 31 of 47

9. 6DB BANDWIDTH

9.1. TEST PROCEDURE

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥3*RBW.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. SUMMARY OF TEST RESULTS/PLOTS


Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	682		Pass
Middle	689	500KHz	Pass
High	679		Pass

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Page 32 of 47

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

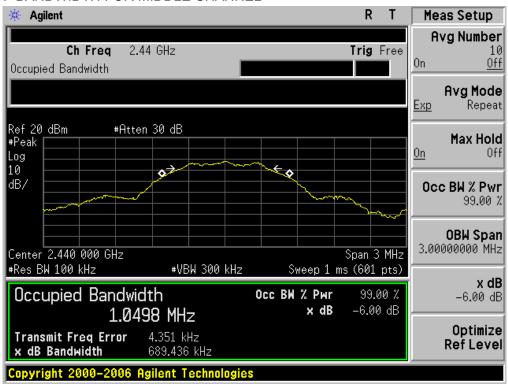

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

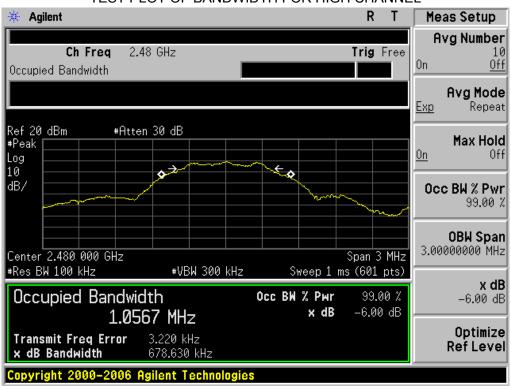

Page 33 of 47

10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE

For peak power test:


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 4. Use the following spectrum analyzer settings:
- a) Set the RBW ≥ DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.
- 5. Allow the trace to stabilize.
- 6. Record the result form the Spectrum Analyzer.

For average power test:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to power probe through an RF attenuator.
- 3. Connect the power probe to the PC.
- 4. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 5. Record the maximum power from the software.
- 6. The maximum peak power shall be less 1W (30dBm).

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

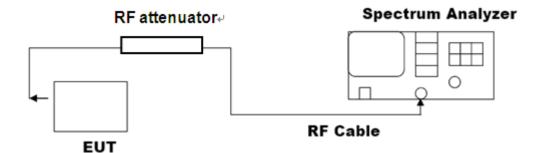


Page 34 of 47

10.3. LIMITS AND MEASUREMENT RESULT


Channel	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-6.07	-4.22	30	Pass
Middle Channel	-4.09	-2.2	30	Pass
High Channel	-2.73	-0.82	30	Pass




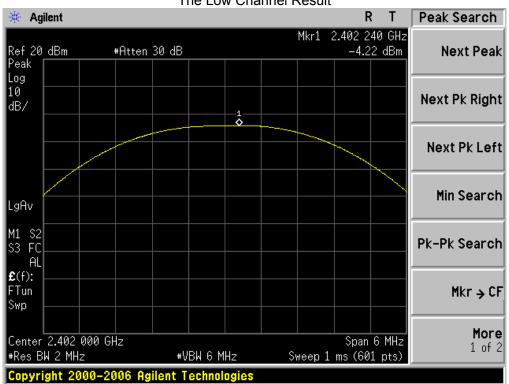

Page 35 of 47



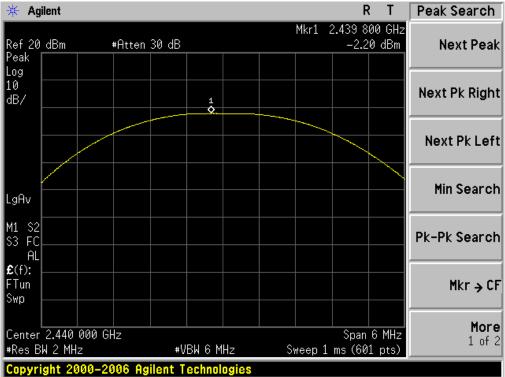

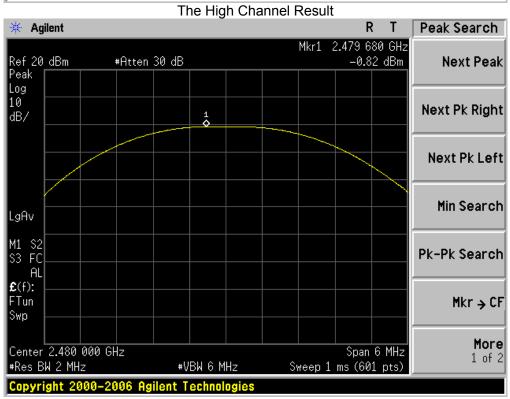


Page 36 of 47

11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set the span to 1.5times the DTS bandwidth, RBW: 3kHz<=RBW<=100KHz, VBW>=3*RBW
- (5). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

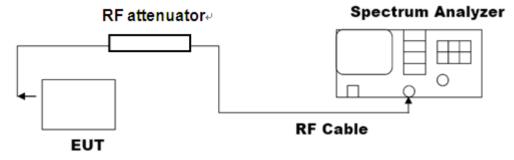



11.3 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-19.8	8	Pass
Middle Channel	-17.5	8	Pass
High Channel	-15.99	8	Pass

Page 37 of 47

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

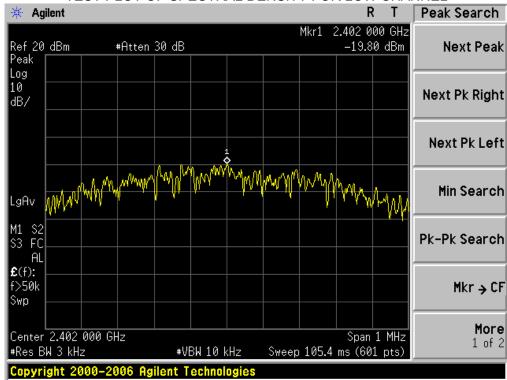




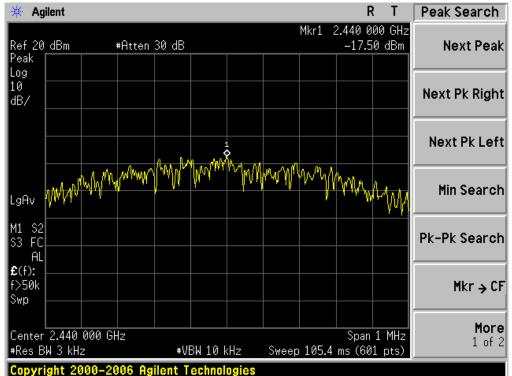

Page 38 of 47

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

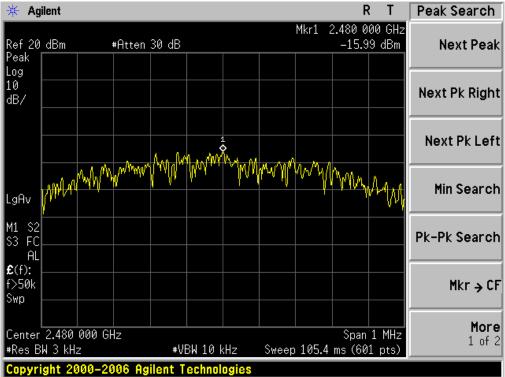

Page 39 of 47


12. FCC LINE CONDUCTED EMISSION TEST

12.1 LIMITS

Fraguency	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

^{**}Note: 1. The lower limit shall apply at the transition frequency.

12.2 TEST SETUP

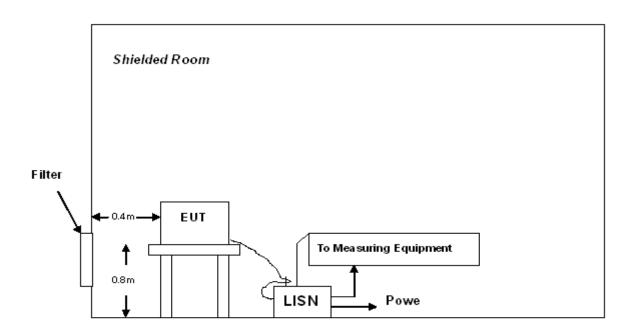

A: Powered through filter

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 40 of 47

12.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.


Page 41 of 47


12.5 TEST RESULT OF POWER LINE

N/A

Page 42 of 47

APPENDIX A: PHOTOGRAPHS OF TEST SETUP FCC RADIATED EMISSION TEST SETUP

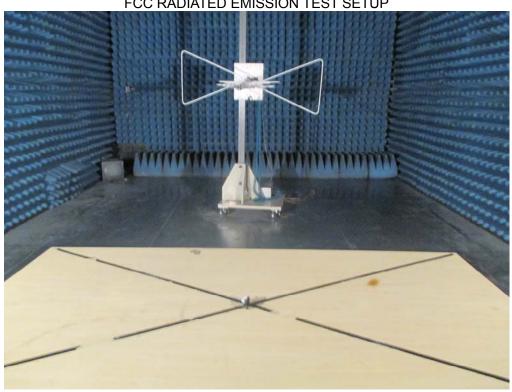

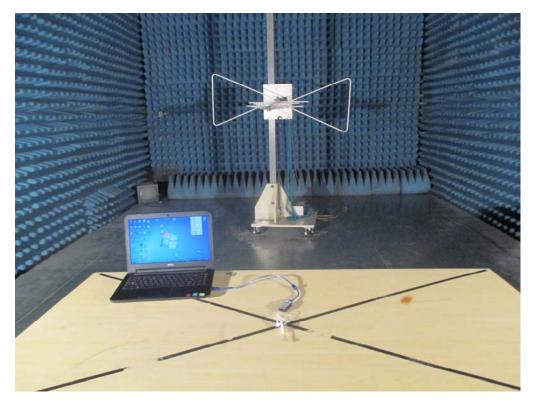

Page 43 of 47

APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT









Page 44 of 47

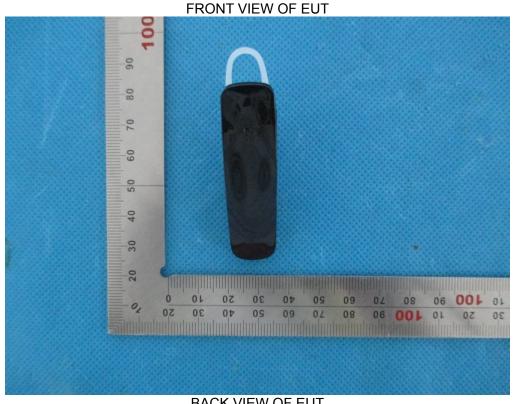






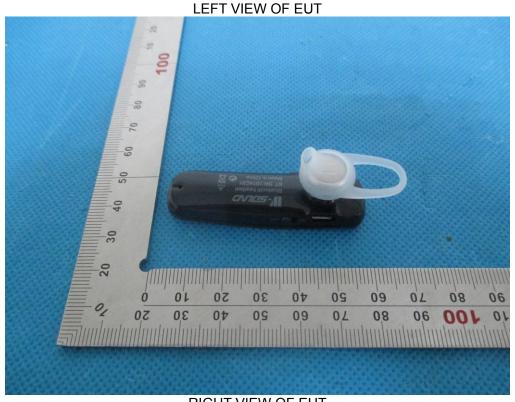

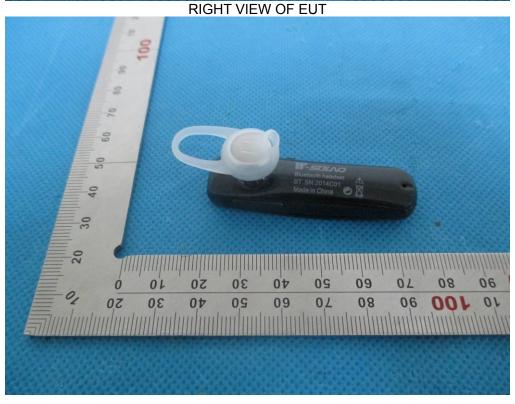


Page 46 of 47



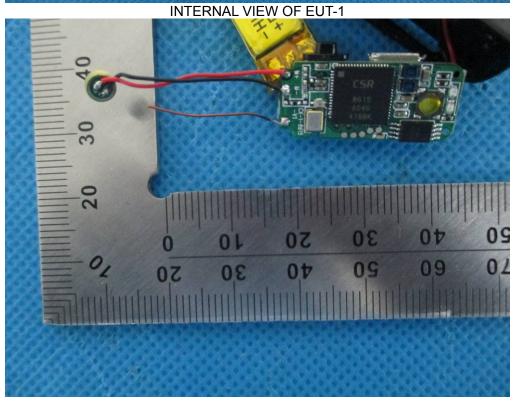


Report No.: AGC00020140601FE08 Page 47 of 47



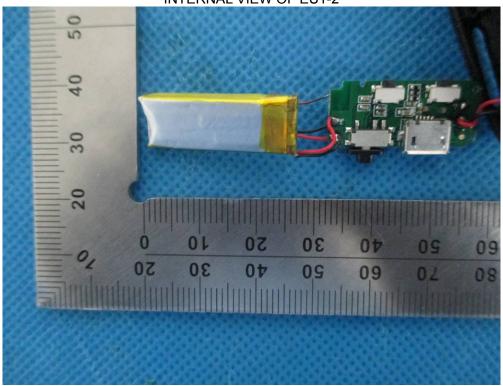

INTERNAL VIEW OF EUT-3

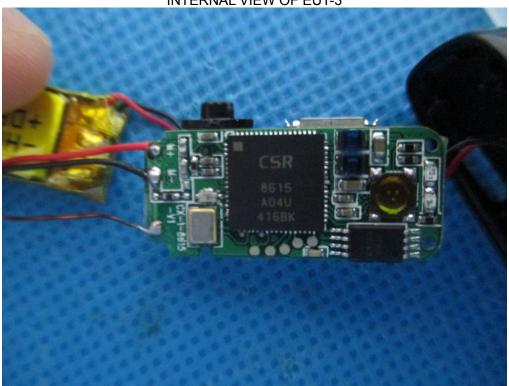

----END OF REPORT----