



REPORT No. : SZ16050106E02

FCC TEST REPORT

APPLICANT : HARXON CORPORATION

PRODUCT NAME : Wireless Data Transceiver

MODEL NAME : HX-DU1603D

TRADE NAME : HX-DU16XXD series: From HX-DU1690D to HX-DU1698D
HX-DU16XXR series: From HX-DU1690R to HX-DU1698R

BRAND NAME : HARXON

FCC ID : 2ACRAHX-DU1603D

STANDARD(S) : 47 CFR Part 15 Subpart B

TEST DATE : 2016-05-16 to 2016-07-08

ISSUE DATE : 2016-07-11



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



DIRECTORY

1. TECHNICAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....	5
2. TEST RESULTS	6
2.1. APPLIED REFERENCE DOCUMENTS.....	6
3. TEST CONDITIONS SETTING	7
3.1. TEST MODE	7
3.2. TEST SETUP AND EQUIPMENTS LIST	8
3.2.1. CONDUCTED EMISSION	8
3.2.2. RADIATED EMISSION	9
4. 47 CFR PART 15B REQUIREMENTS	11
4.1. CONDUCTED EMISSION	11
4.1.1. REQUIREMENT	11
4.1.2. TEST DESCRIPTION	11
4.1.3. TEST RESULT	11
4.2. RADIATED EMISSION	14
4.2.1. REQUIREMENT	14
4.2.2. TEST DESCRIPTION	14
4.2.3. FREQUENCY RANGE OF MEASUREMENT.....	15
4.2.4. TEST RESULT	15
ANNEX A PHOTOGRAPHS OF TEST SETUP	18
ANNEX B TEST UNCERTAINTY	21
ANNEX C TESTING LABORATORY INFORMATION	22



REPORT No. : SZ16050106E02

1. IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY	22
2. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	22
3. ACCREDITATION CERTIFICATE	22
4. TEST ENVIRONMENT CONDITIONS	22

Change History

Issue	Date	Reason for change
1.0	2016-07-11	First edition

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No. : SZ16050106E02

Test Report Declaration

Applicant	HARXON CORPORATION
Applicant Address	6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC
Manufacturer	HARXON CORPORATION
Manufacturer Address	6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC
Product Name	Wireless Data Transceiver
Model Name	HX-DU1603D HX-DU16XXD series: From HX-DU1690D to HX-DU1698D HX-DU16XXR series: From HX-DU1690R to HX-DU1698R
Brand Name	HARXON
HW Version	V1R0
SW Version	A015.01.00
Test Standards	47 CFR Part 15 Subpart B
Test Result	PASS

Tested by : Wang Dalong
Wang Dalong (Test Engineer)

Reviewed by : Xiao Xiong
Xiao Xiong (EMC Manager)

Approved by : Zeng Dexin
Zeng Dexin (Chief Engineer)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, Shenzhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



1. Technical Information

Note: Provided by applicant

1.1. Applicant Information

Company: HARXON CORPORATION
Address: 6/F, Block B, D3 Building, TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, 518055, PRC

1.2. Equipment under Test (EUT) Description

EUT Type:	Wireless Data Transceiver
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1R0
Software Version:	A015.01.00

Power supply:	Battery
	Brand Name: N/A
	Model No.: Panasonic 18650-2S2P
	Serial No.: (N/A, marked #1 by test site)
	Capacity: 6800mAh
	Rated Voltage: 7.4V
	Charge Limit: 9V
Ancillary Equipment:	AC Adapter (Charger for Battery)
	Brand Name: SIMSUKIAN
	Model No.: SK03T-0900200Z
	Serial No.: (N/A, marked #1 by test site)
	Rated Input: ~ 100-240V, 50/60Hz, 600mA
	Rated Output: = 9V, 2000mA

NOTE:

1. The EUT is a Wireless Data Transceiver which supports 410-470MHz and ISM 2.4GHz Bluetooth band.
2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



REPORT No. : SZ16050106E02

2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15(July 07, 2016 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.107	Conducted Emission	2016.07.08	PASS
2	15.109	Radiated Emission	2016.07.08	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



3. Test Conditions Setting

3.1. Test Mode


1	The first test mode
	<p>The EUT configuration of the emission tests was EUT + DC power+ PC.</p> <p>During the measurement, the EUT was powered by the DC power and connected to the PC, data was transmitted between the EUT and PC, the EUT was working normally as an intentional device.</p>
2	The second test mode
	<p>The EUT configuration of the emission tests was EUT + DC power.</p> <p>During the measurement, the EUT was powered by the DC power, the EUT was working normally as an intentional device.</p>

Note: All test modes were performed, only the worse(First) mode was recorded in this report.

3.2. Test Setup and Equipments List

3.2.1. Conducted Emission

A. Test Setup:

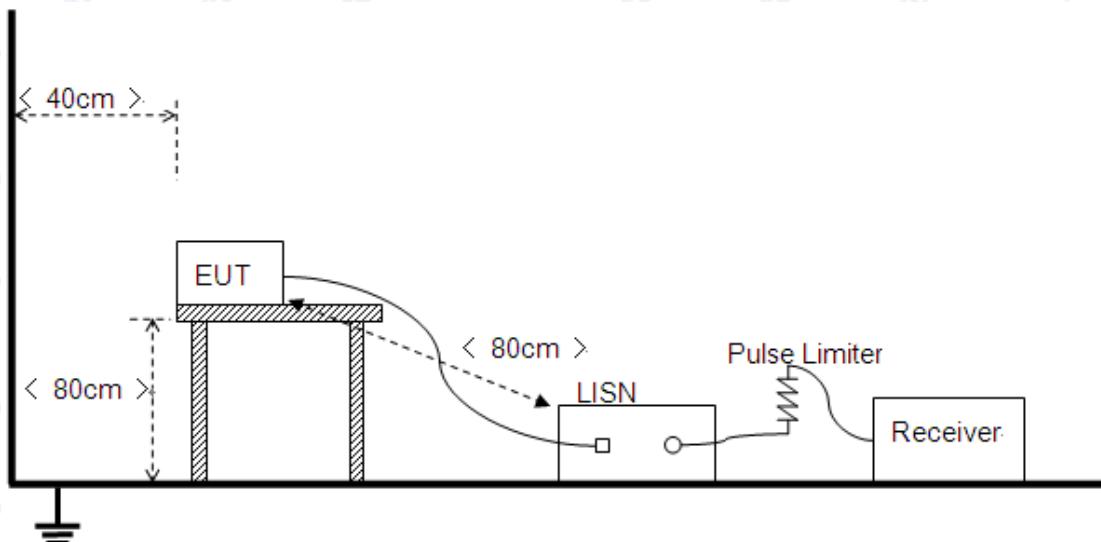

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
Receiver	Narda	PMM 9010	001WX11001	2016.01.13	2017.01.12
Receiver	Narda	PMM 9060	595WX11007	2016.01.13	2017.01.12
LISN	Schwarzbeck	NSLK 8127	812744	2016.01.13	2017.01.12
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9537	2016.01.13	2017.01.12
PC	Apple	A1370	C02FQ2PYDDQW	N/A	N/A


3.2.2. Radiated Emission

A. Test Setup:

1. For radiated emissions from 30MHz to1GHz

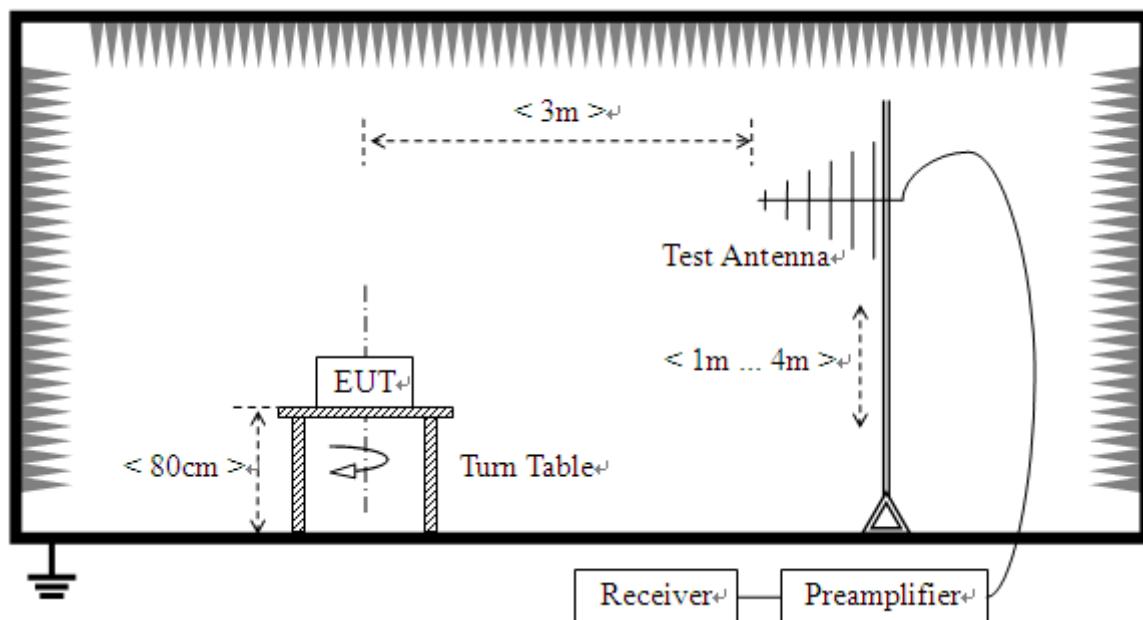

2. For radiated emissions above 1GHz

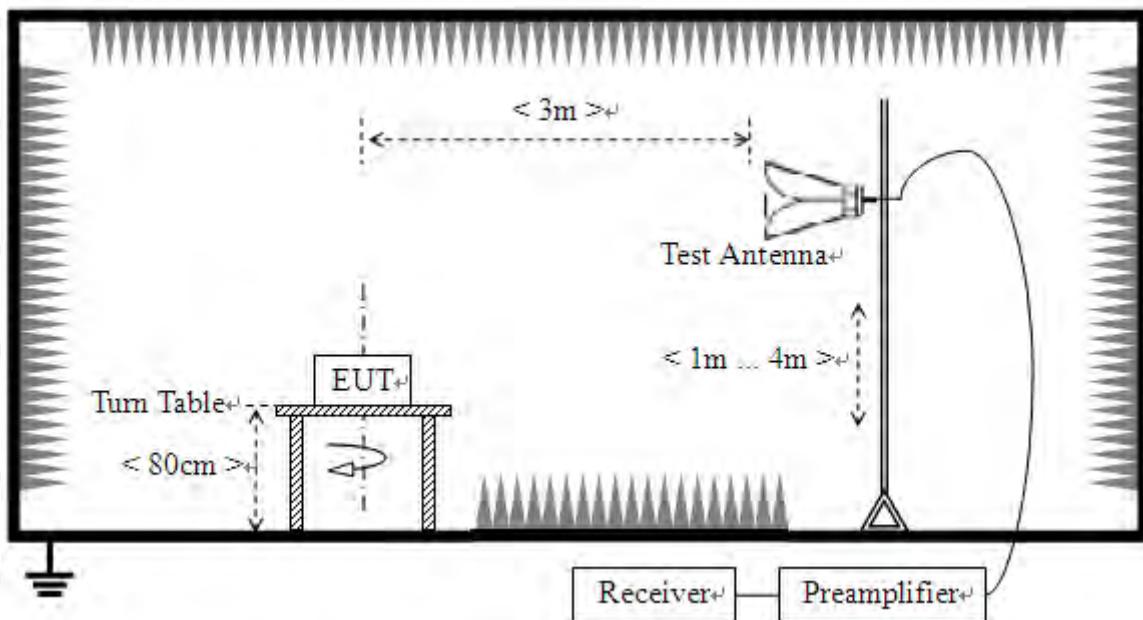



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2016.01.13	2017.01.12
Semi-Anechoic Chamber	Albatross	9m*6m*6m	N/A	2016.01.13	2017.01.12
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2016.01.13	2017.01.12
PC	Apple	A1370	C02FQ2PYDD QW	N/A	N/A



4.47 CFR Part 15B Requirements

4.1. Conducted Emission

4.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.


4.1.2. Test Description

See section 3.2.1 of this report.


4.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

A. Test Plot and Suspicious Points:

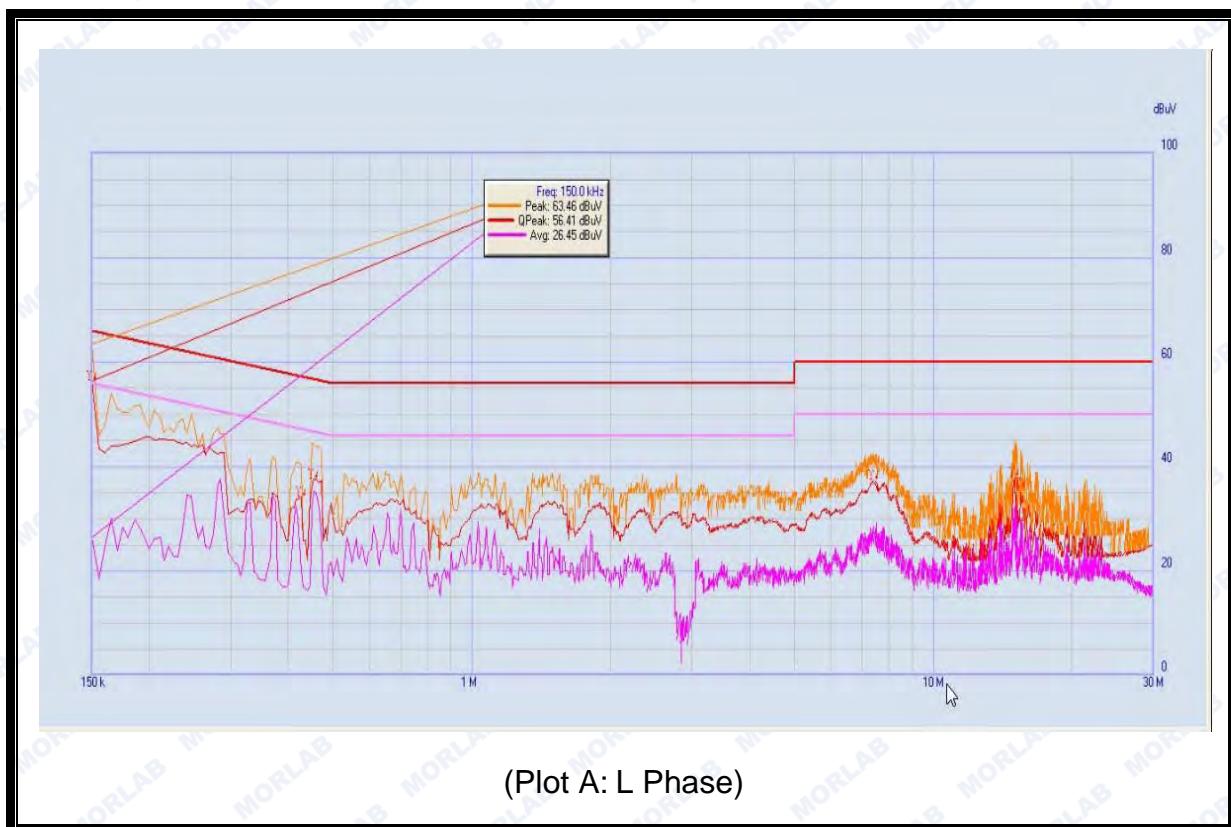

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	56.41	26.45	66.00	56.00	Line	PASS
2	0.425	34.15	20.28	58.14	48.14		PASS
3	0.455	37.57	35.09	57.29	47.29		PASS
4	7.445	36.78	28.10	60.00	50.00		PASS
5	14.985	37.17	32.80	60.00	50.00		PASS
6	15.43	34.30	29.85	60.00	50.00		PASS

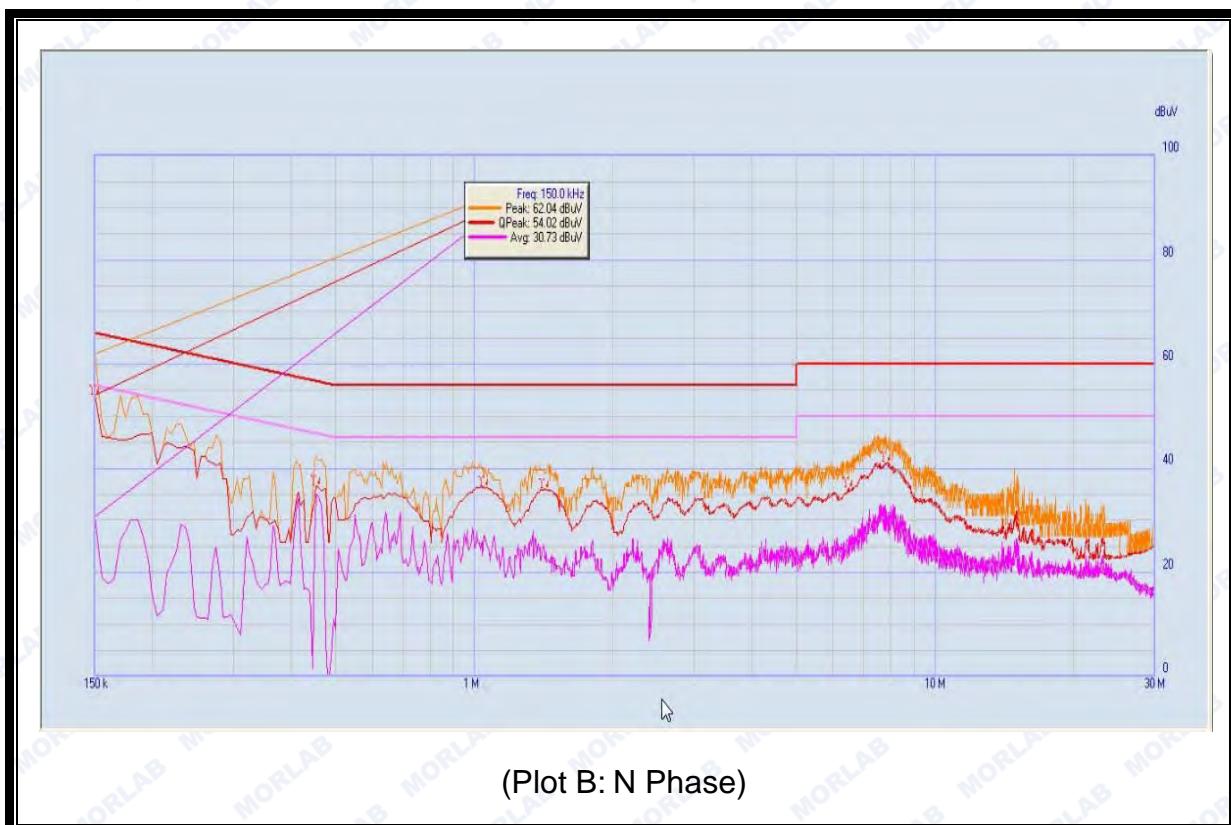

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	54.02	30.73	66.00	56.00	Neutral	PASS
2	0.455	36.69	34.98	57.29	47.29		PASS
3	1.05	36.47	27.12	56.00	46.00		PASS
4	1.415	35.89	23.92	56.00	46.00		PASS
5	6.49	35.62	24.89	60.00	50.00		PASS
6	7.845	40.67	29.89	60.00	50.00		PASS

Test Result: PASS



4.2. Radiated Emission

4.2.1. Requirement

According to FCC section 15.109(a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	(μ V/m)	(dB μ V/m)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB μ V/m is calculated by 20log Emission Level(μ V/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30 μ V/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu V/m * (10)^2 = 100 * 30\mu V/m$$

4.2.2. Test Description

See section 3.2.2 of this report.



4.2.3. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705–108	1000.
108–500	2000.
500–1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.


The highest frequency of the internal sources of the EUT is 2480MHz, the measurement shall be made up to 12.4GHz. The field strength over 6GHz was pre-scanned and the result which was 10dB lower than the limit, so it was not recorded in the report.

4.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

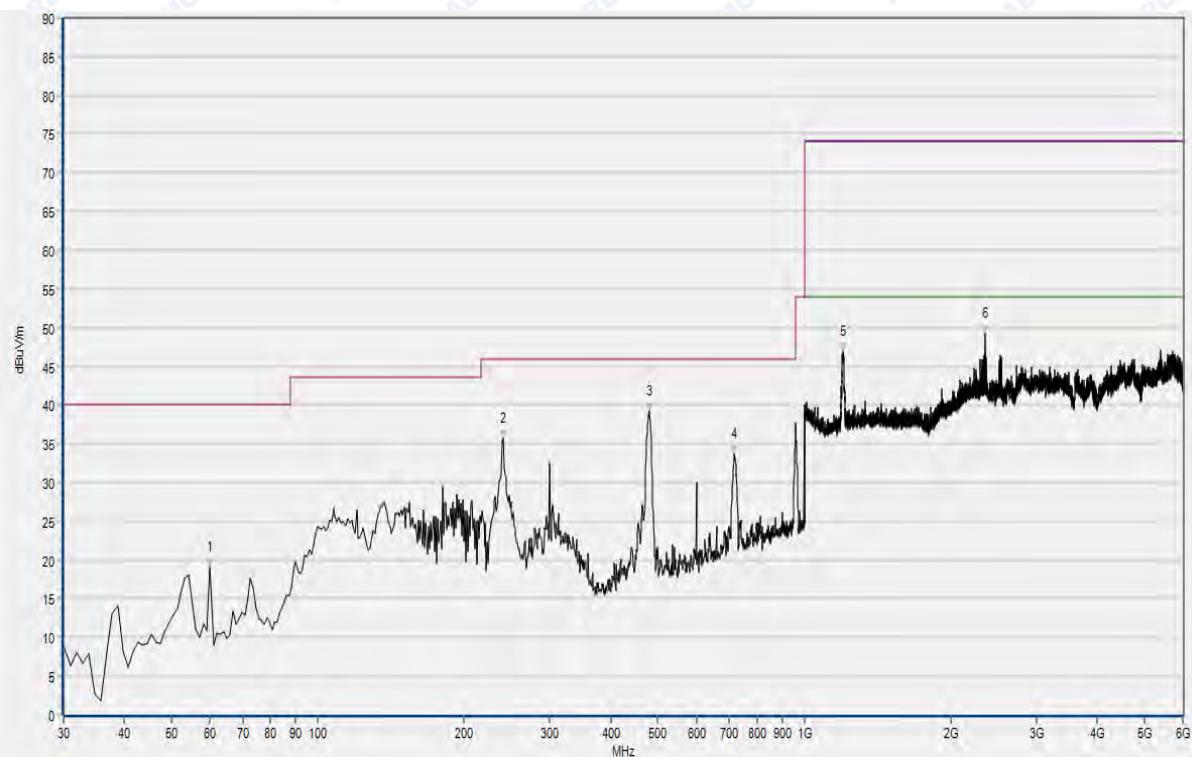

(Plot A: 30MHz – 6GHz, Test Antenna Vertical)

No.	Fre. MHz	Pk dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	60.070	N.A.	19.17	N.A.	N.A.	40.00	N.A.	V	PASS
2	240.490	N.A.	35.77	N.A.	N.A.	46.00	N.A.	V	PASS
3	480.080	N.A.	39.16	N.A.	N.A.	46.00	N.A.	V	PASS
4	718.700	N.A.	33.72	N.A.	N.A.	46.00	N.A.	V	PASS
5	1203.733	46.86	N.A.	38.62	74.00	N.A.	54.00	V	PASS
6	2353.600	49.25	N.A.	39.11	74.00	N.A.	54.00	V	PASS

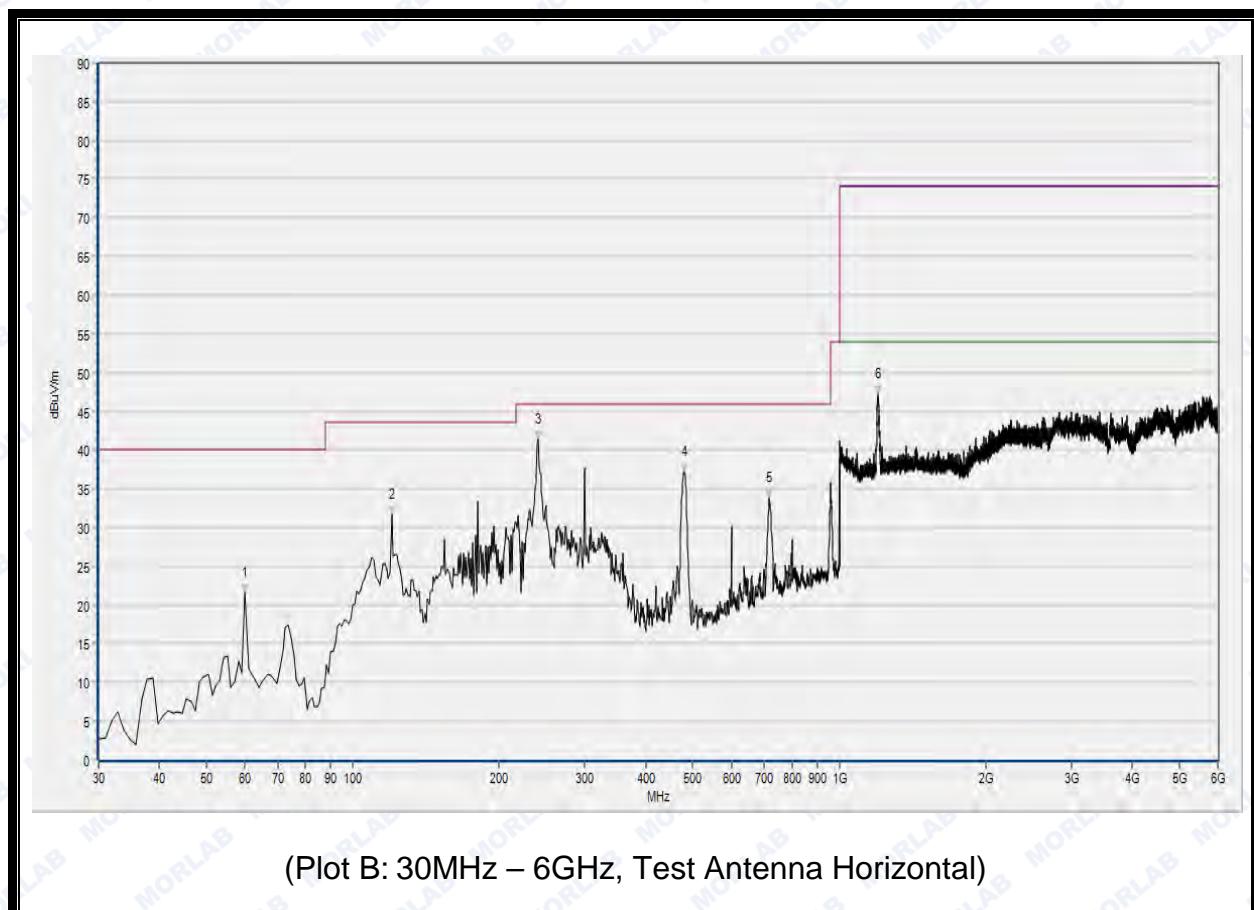

No.	Fre. MHz	Pk dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	60.070	N.A.	21.56	N.A.	N.A.	40.00	N.A.	H	PASS
2	120.210	N.A.	31.60	N.A.	N.A.	43.50	N.A.	H	PASS
3	240.490	N.A.	41.37	N.A.	N.A.	46.00	N.A.	H	PASS
4	480.080	N.A.	37.21	N.A.	N.A.	46.00	N.A.	H	PASS
5	717.730	N.A.	33.86	N.A.	N.A.	46.00	N.A.	H	PASS
6	1201.600	47.33	N.A.	40.28	74.00	N.A.	54.00	H	PASS


Test Result: PASS

Annex A Photographs of Test Setup


1. Mains Terminal Disturbance Voltage Measurement



2. Radiated Field Strength Measurement(30MHz – 1GHz)

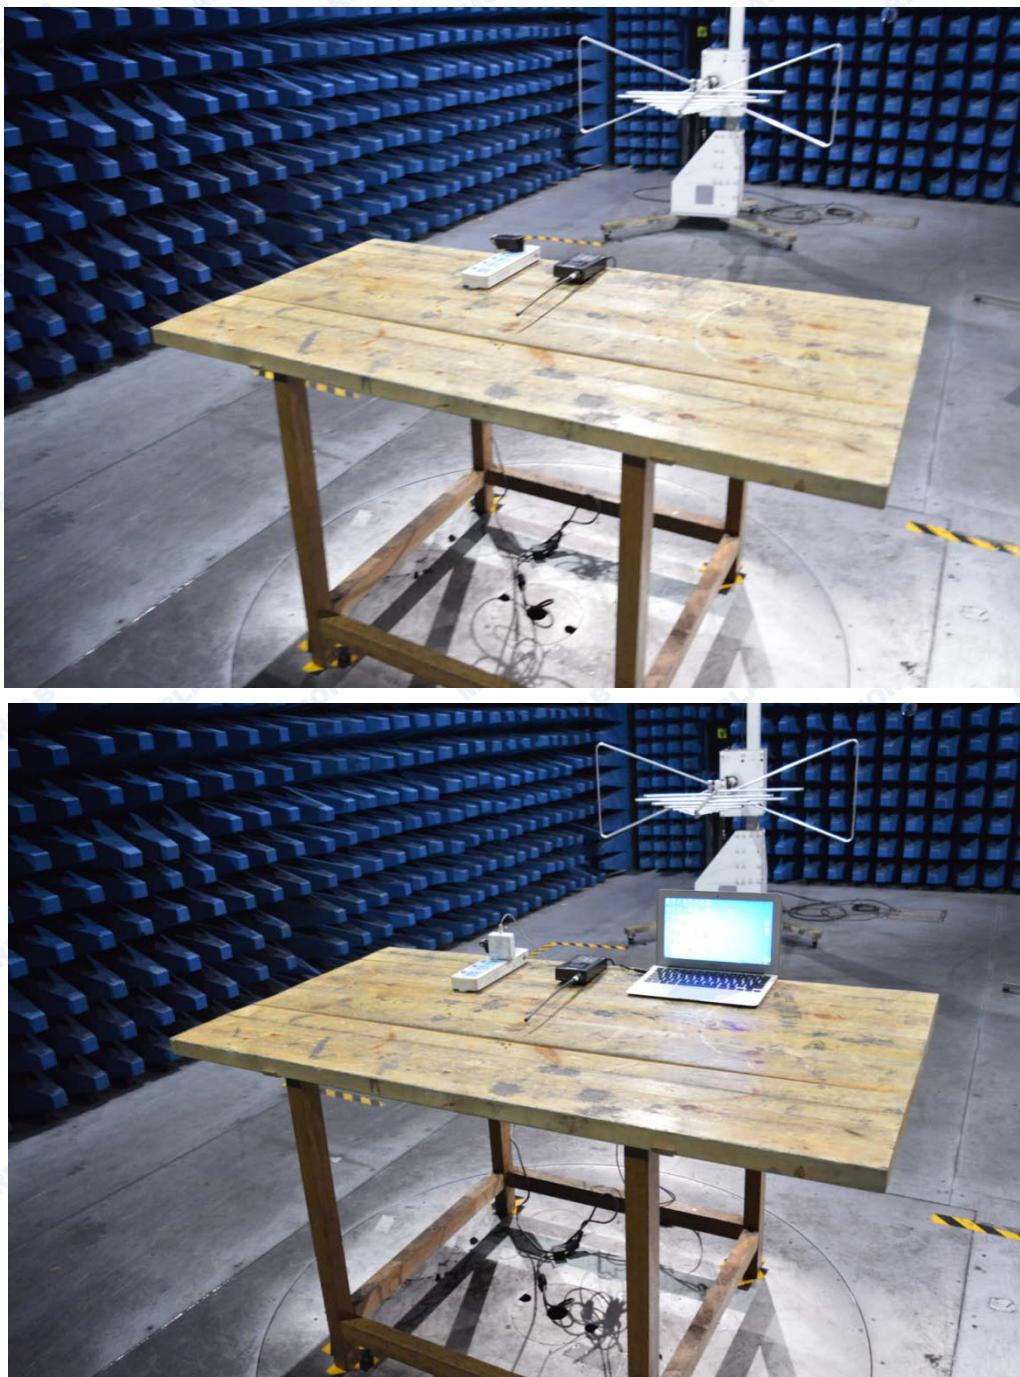

3. Radiated Field Strength Measurement(Above 1GHz)

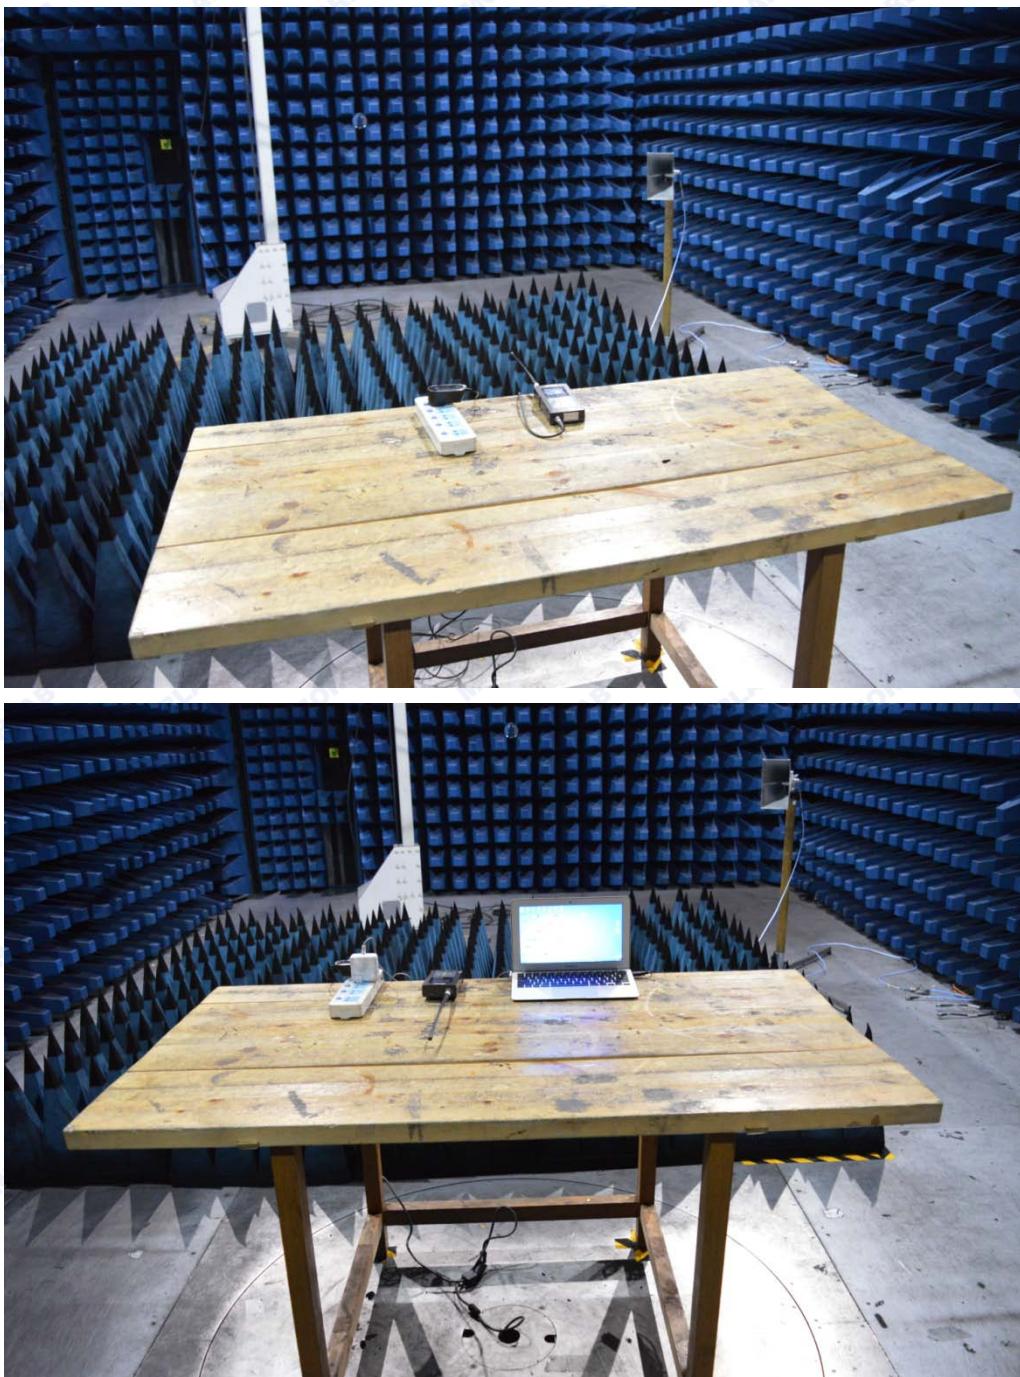



Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	±1.8dB
Uncertainty of Radiated Emission:	±3.1dB



Annex C Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory: The FCC registration number is 695796.
(Shenzhen Morlab Communications Technology Co., Ltd.)

4. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

***** END OF REPORT *****