

TEST REPORT

Reference No..... : WTX21X03024173W-1
FCC ID : 2ACRJ-ZT-28E
Applicant : ZillionSource Technologies (Shanghai) Co., Ltd.
Address..... : Suit 2D-18,1building,HuaShen RoadNO.198, Shanghai Free Trade Zone,
Shanghai, China
Product Name : Environmental variable collector for logistics
Test Model. : ZT-28E
Standards : FCC Part 22H, FCC Part 24E
Date of Receipt sample : Mar.24, 2021
Date of Test..... : Mar.24, 2021 to Apr.15, 2021
Date of Issue : Apr.15, 2021
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	8
1.7 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. RF OUTPUT POWER	12
3.1 STANDARD APPLICABLE	12
3.2 TEST PROCEDURE	12
3.3 SUMMARY OF TEST RESULTS/PLOTS	12
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	15
4.1 STANDARD APPLICABLE	15
4.2 TEST PROCEDURE	15
4.3 SUMMARY OF TEST RESULTS	15
5. EMISSION BANDWIDTH	16
5.1 STANDARD APPLICABLE	16
5.2 TEST PROCEDURE	16
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	17
7. SPURIOUS RADIATED EMISSIONS	18
7.1 STANDARD APPLICABLE	18
7.2 TEST PROCEDURE	18
7.3 SUMMARY OF TEST RESULTS/PLOTS	18
8. FREQUENCY STABILITY	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS	24
9. MODULATION CHARACTERISTICS	25
9.1 STANDARD APPLICABLE	25
9.2 TEST PROCEDURE	25
9.3 SUMMARY OF TEST RESULTS/PLOTS	25
APPENDIX SUMMARY	26
APPENDIX A	27
APPENDIX B	28
APPENDIX C	29
APPENDIX D	34
APPENDIX E	52
APPENDIX F	54
APPENDIX PHOTOGRAPH	56

Report version

Version No.	Date of issue	Description
Rev.00	Apr.15, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ZillionSource Technologies (Shanghai) Co., Ltd.
Address of applicant: Suit 2D-18,1building,HuaShen RoadNO.198, Shanghai Free Trade Zone, Shanghai, China

Manufacturer: ZillionSource Technologies (Shanghai) Co., Ltd.
Address of manufacturer: Suit 2D-18,1building,HuaShen RoadNO.198, Shanghai Free Trade Zone, Shanghai, China

General Description of EUT:	
Product Name:	Environmental variable collector for logistics
Trade Name:	ZillionTrace
Model No.:	ZT-28E
Adding Model(s):	ZT-28, ZT-28X, ZT-28L, ZT-28S, ZT-50, ZT-50E, ZT-50S, ZT-50X
Rated Voltage:	DC3.7V
Battery:	3000mAh
Adapter Model:	/
Software Version:	V1.1.0
Hardware Version:	V1.0.4
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ZT-28E, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GPRS/EDGE 850: 824~849MHz GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GPRS/EDGE 850: 869~894MHz GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GPRS850: 33.22dBm, GPRS1900: 29.20dBm EDGE850: 27.54dBm, EDGE1900: 25.55dBm
Type of Emission:	GPRS850: 248KGXW, GPRS1900: 246KGXW EDGE850: 247KG7W, EDGE1900: 262KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GPRS850: -0.5dBi; GPRS1900: 1dBi
GPRS/EDGE Class:	Class 12

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

FCC Rules Part 22: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Rules Part 24: PUBLIC MOBILE SERVICES.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03r01: MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GPRS 850	Low, Middle, High Channels
TM2	EDGE 850	Low, Middle, High Channels
TM3	GPRS 1900	Low, Middle, High Channels
TM4	EDGE 1900	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
Note: the transmitter has been tested on the communications mode of GPRS, EDGE, compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	Philco	CCS5000100	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2020-04-28	2021-04-27
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2020-04-28	2021-04-27
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2020-04-28	2021-04-27
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2020-04-28	2021-04-27
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2020-04-28	2021-04-27
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2020-04-28	2021-04-27
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1055	RF Limiter	ATTEN	AT-BSF-0820~0920	/	2020-04-28	2021-04-27
SEMT-1056	RF Limiter	ATTEN	AT-BSF-1710~1910	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/

SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§22.913(a), §24.232(c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b)	Emission Bandwidth	Compliant
§22.917(a), §24.238(a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant
§2.1047	Modulation characteristics	Compliant

3. RF Output Power


3.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

3.2 Test Procedure

- Conducted output power test method:

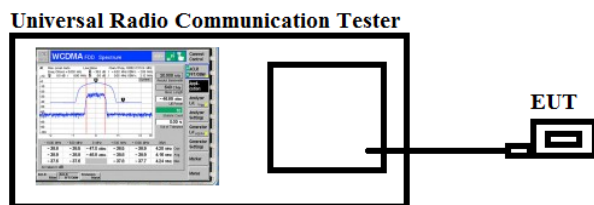

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GPRS850	128	V	29.87	<38.45	Pass
		H	24.35		
	190	V	29.12		
		H	24.28		
	251	V	29.01		
		H	24.54		
EGPRS850	128	V	24.14	<38.45	Pass
		H	20.28		
	190	V	24.25		
		H	20.43		
	251	V	24.47		
		H	20.36		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
GPRS1900	512	V	26.87	<33.00	Pass
		H	21.54		
	661	V	26.98		
		H	21.42		
	810	V	26.18		
		H	21.63		
EGPRS1900	512	V	22.87	<33.00	Pass
		H	18.46		
	661	V	22.04		
		H	18.39		
	810	V	22.42		
		H	18.47		

➤ **Max. Conducted Power (Average power)**

Please refer to Appendix A

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable


According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

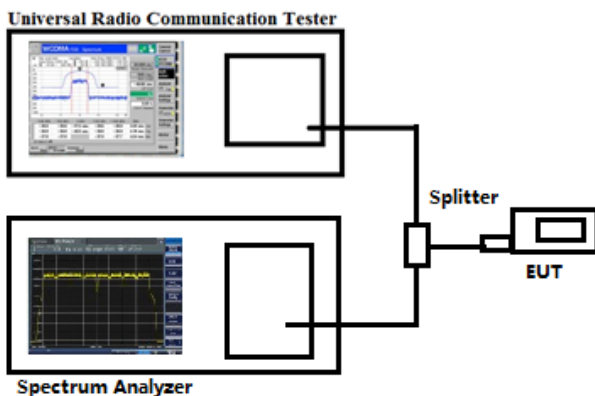

4.3 Summary of Test Results

Please refer to Appendix B.

5. Emission Bandwidth

5.1 Standard Applicable


According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

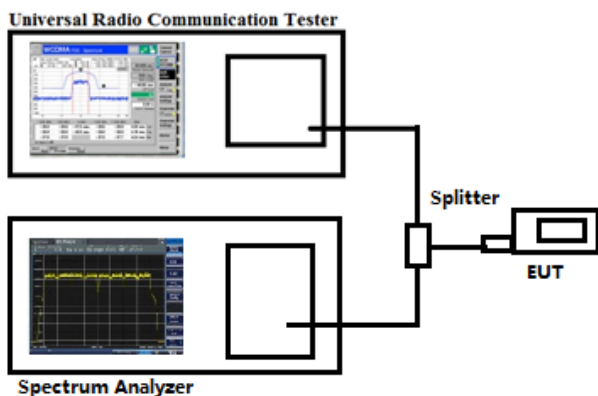

5.3 Summary of Test Results/Plots

Please refer to Appendix C

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10^{th} harmonic.

Test Configuration for the out of band emissions testing:

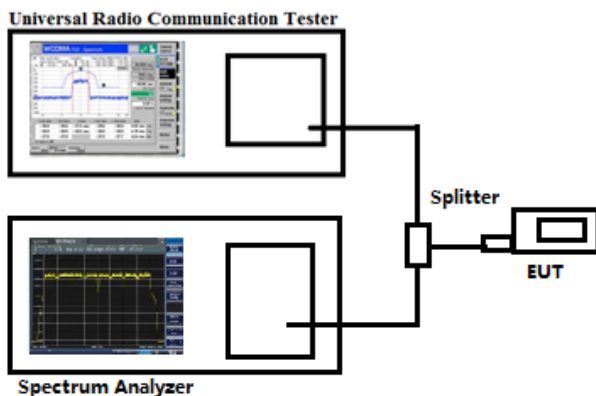

6.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to Appendix D

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GPRS850	Polarity:	Horizontal

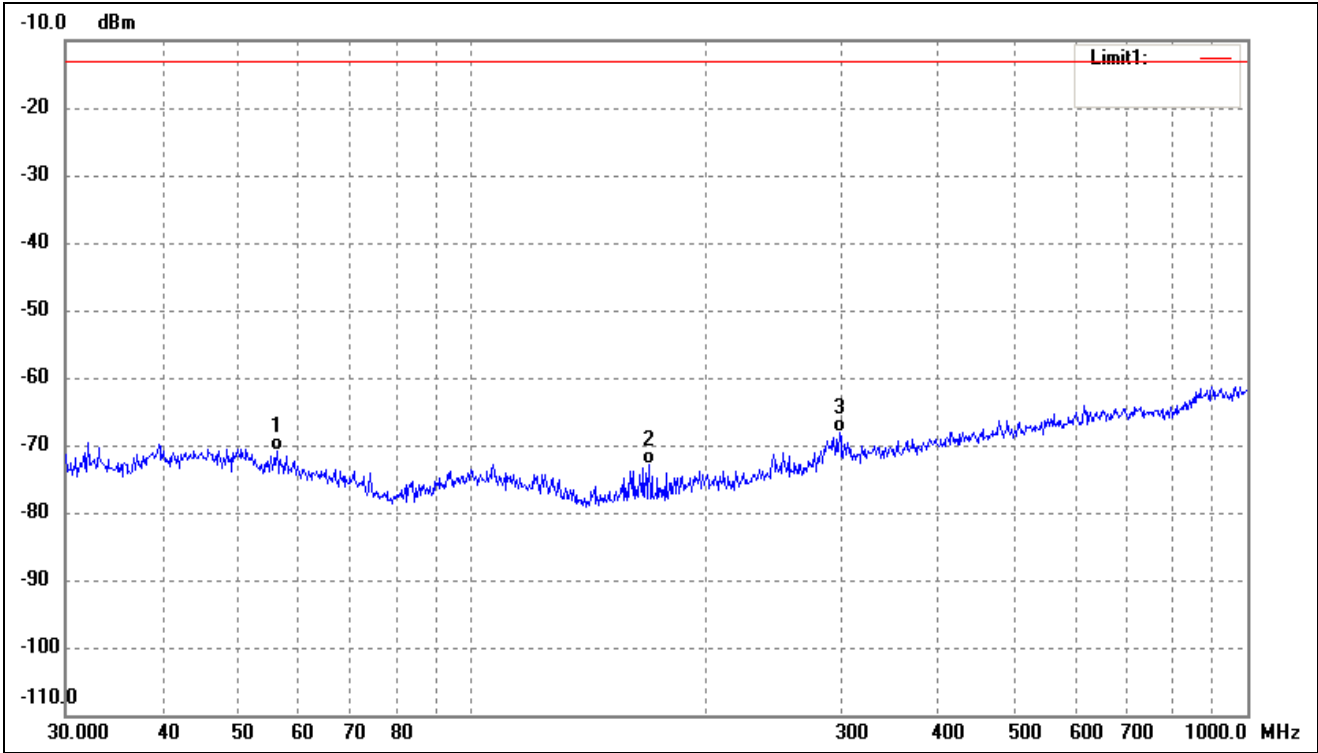


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	56.1974	-69.68	-1.15	-70.83	-13.00	-57.83	-	-	QP
2	169.5990	-69.53	-3.25	-72.78	-13.00	-59.78	-	-	QP
3	298.2681	-70.95	2.75	-68.20	-13.00	-55.20	-	-	QP

For Cellular Band			
Test Channel	GPRS850	Polarity:	Vertical

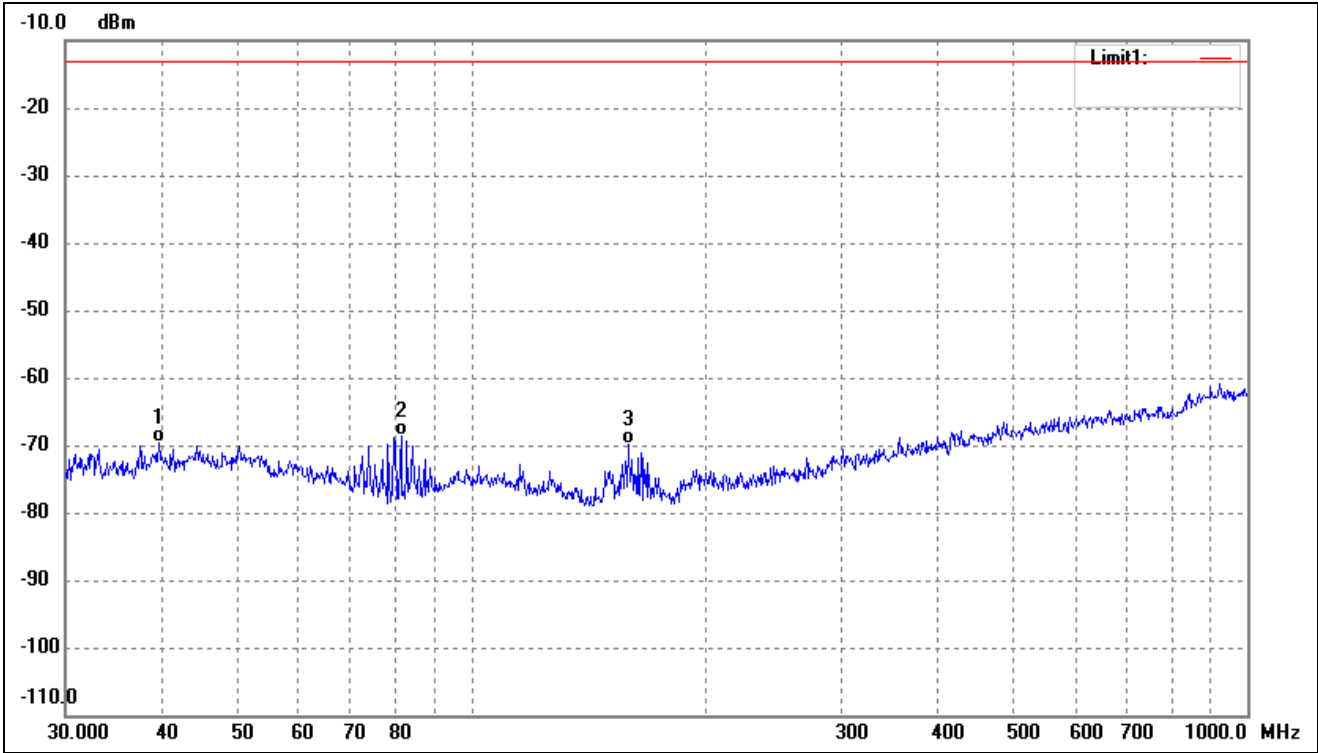


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.5757	-69.27	-0.34	-69.61	-13.00	-56.61	-	-	QP
2	81.2117	-63.79	-4.82	-68.61	-13.00	-55.61	-	-	QP
3	159.2251	-66.15	-3.73	-69.88	-13.00	-56.88	-	-	QP

For Cellular Band			
Test Channel	GPRS1900	Polarity:	Horizontal

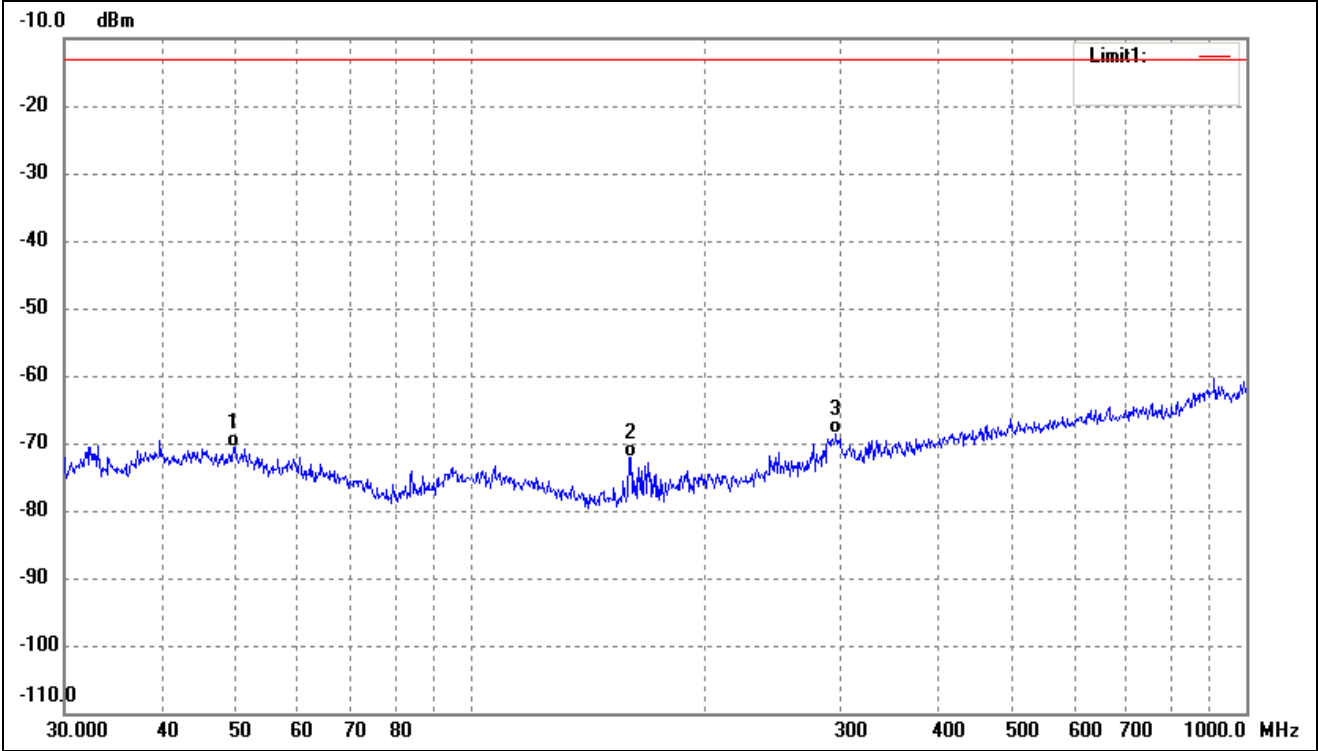

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	-70.97	0.24	-70.73	-13.00	-57.73	-	-	QP
2	160.9089	-68.33	-3.69	-72.02	-13.00	-59.02	-	-	QP
3	296.1836	-71.34	2.61	-68.73	-13.00	-55.73	-	-	QP

For Cellular Band			
Test Channel	GPRS1900	Polarity:	Vertical

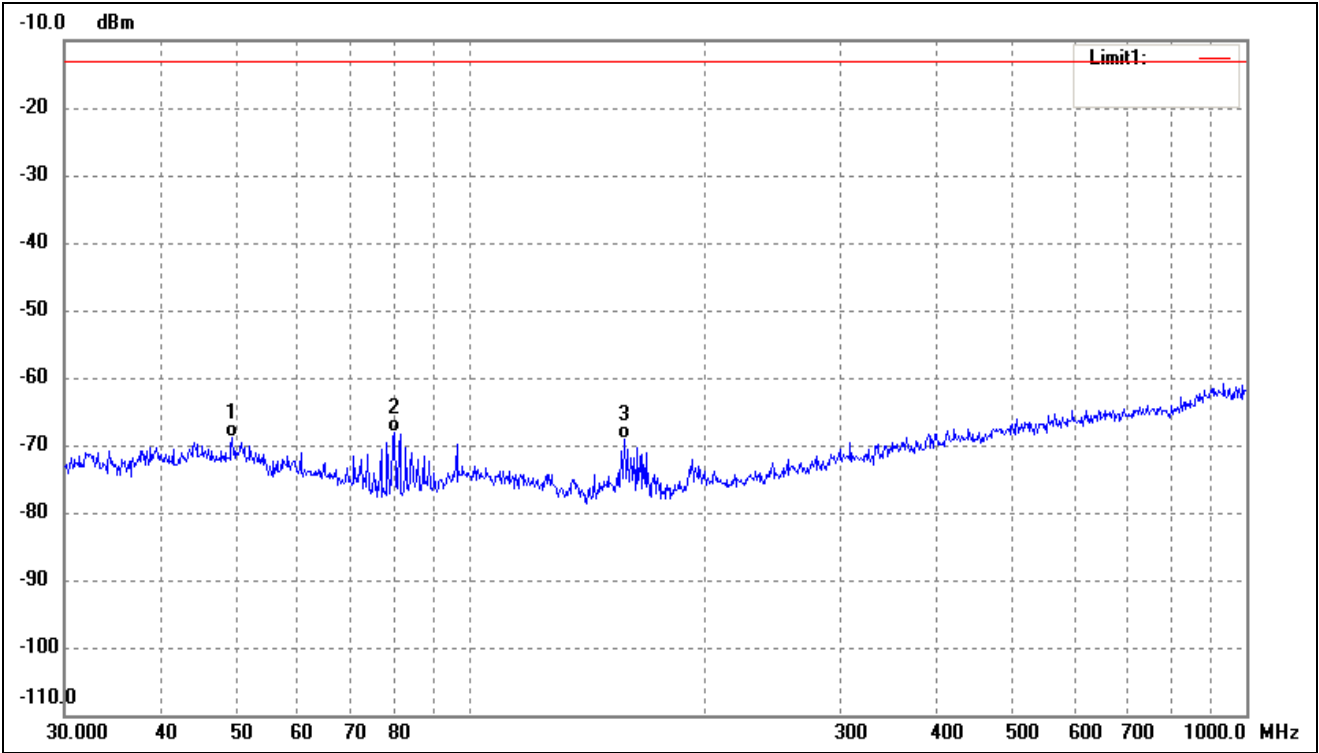

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.3594	-69.19	0.23	-68.96	-13.00	-55.96	-	-	QP
2	79.8003	-63.04	-4.97	-68.01	-13.00	-55.01	-	-	QP
3	158.1123	-65.41	-3.72	-69.13	-13.00	-56.13	-	-	QP

Note: $Margin = (Reading + Correct) - Limit$

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- For Cellular Band_GPRS850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-34.73	4.94	-29.79	-13	-16.79	H
2472.6	-41.73	8.46	-33.27	-13	-20.27	H
1648.4	-34.25	4.94	-29.31	-13	-16.31	V
2472.6	-44.73	8.46	-36.27	-13	-23.27	V
Middle Channel (836.6MHz)						
1673.2	-34.56	5.11	-29.45	-13	-16.45	H
2509.8	-42.36	8.54	-33.82	-13	-20.82	H
1673.2	-35.04	5.11	-29.93	-13	-16.93	V
2509.8	-44.91	8.54	-36.37	-13	-23.37	V
High Channel (848.8MHz)						
1697.6	-36.96	5.25	-31.71	-13	-18.71	H
2546.4	-43.73	8.57	-35.16	-13	-22.16	H
1697.6	-34.23	5.25	-28.98	-13	-15.98	V
2546.4	-41.56	8.57	-32.99	-13	-19.99	V

- For PCS Band_GPRS1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-40.3	10.54	-29.76	-13	-16.76	H
5550.6	-47.29	13.37	-33.92	-13	-20.92	H
3700.4	-39.8	10.54	-29.26	-13	-16.26	V
5550.6	-46.04	13.37	-32.67	-13	-19.67	V
Middle Channel (1880MHz)						
3760.0	-42.72	10.64	-32.08	-13	-19.08	H
5640.0	-47.7	13.54	-34.16	-13	-21.16	H
3760.0	-41.46	10.64	-30.82	-13	-17.82	V
5640.0	-49.27	13.54	-35.73	-13	-22.73	V
High Channel (1909.8MHz)						
3819.6	-41.01	10.74	-30.27	-13	-17.27	H
5729.4	-48.65	13.71	-34.94	-13	-21.94	H
3819.6	-42.39	10.74	-31.65	-13	-18.65	V
5729.4	-47.68	13.71	-33.97	-13	-20.97	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

8.3 Summary of Test Results/Plots

Please refer to Appendix E

9. Modulation characteristics


9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

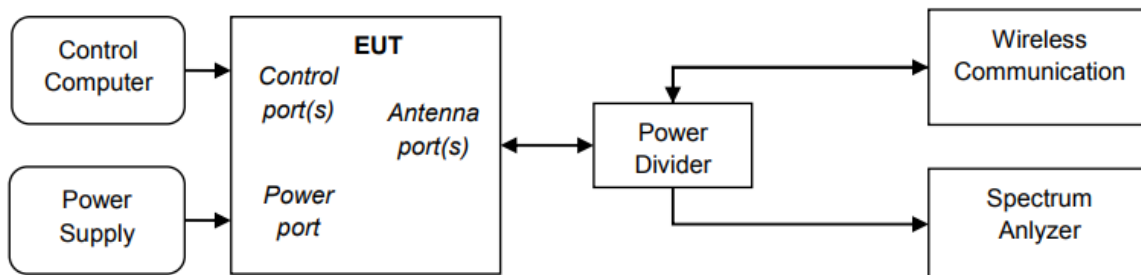

9.3 Summary of Test Results/Plots

Only the worst case was selected to record

Please refer to Appendix F

APPENDIX SUMMARY

Project No.	WTX21X03024173W	Test Engineer	Combat
Start date	2021/03/30	Finish date	2021/03/31
Temperature	24℃	Humidity	52%
RF specifications	GPRS/EGPRS		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

APPENDIX A

Conducted Average power

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GPRS(1Slot)	32.81	32.84	33.22	29.20	29.01	28.50
EGPRS(1Slot)	27.16	27.00	27.54	25.55	25.52	25.34

APPENDIX B




Peak-to-average Ratio (PAR) of Transmitter




PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GPRS(1 Slot)	661	1850.2	4.87	13
EDGE(1 Slot)	661	1850.2	5.14	13

Note: Only the worst case was selected to record.




APPENDIX C

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GPRS850 (GMSK,1Slot)	128	824.20	247.8072	318.977
	190	836.60	239.5334	306.824
	251	848.80	240.1629	313.867
EGPRS850 (8PSK,1Slot)	128	824.20	242.6433	309.680
	190	836.60	241.9176	310.853
	251	848.80	245.7113	309.722
GPRS1900 (GMSK,1Slot)	512	1850.20	246.7773	308.546
	661	1880.00	245.0338	316.609
	810	1909.80	247.7591	317.458
EGPRS1900 (8PSK,1Slot)	512	1850.20	242.9728	317.965
	661	1880.00	250.2971	317.757
	810	1909.80	261.5915	352.869

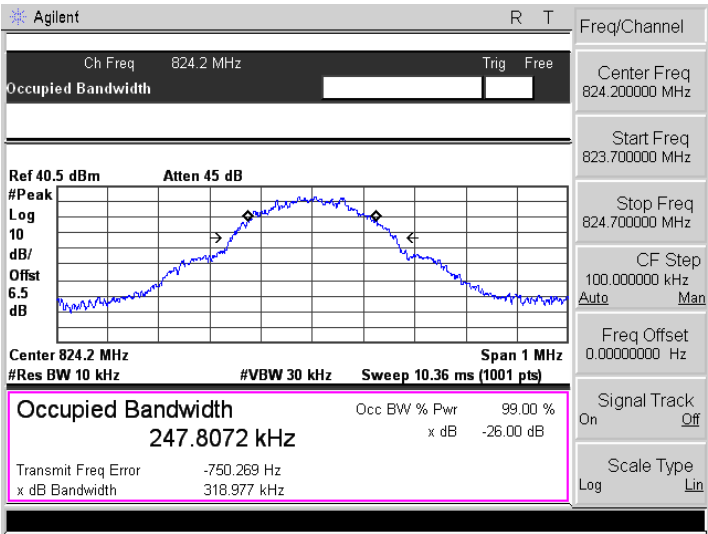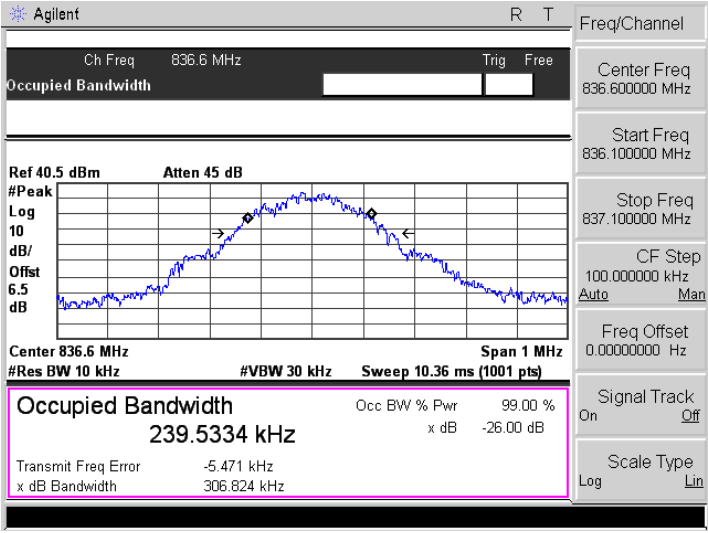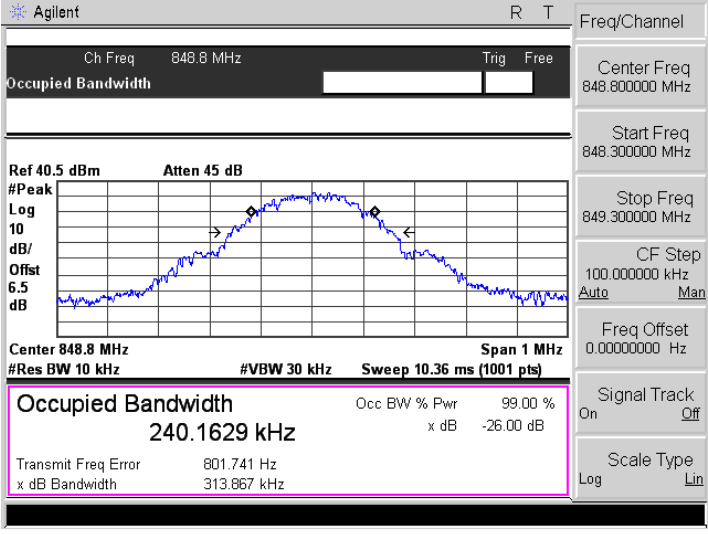GPRS850 (GMSK,1Slot)-Low	
GPRS850 (GMSK,1Slot)-Middle	
GPRS850 (GMSK,1Slot)-High	

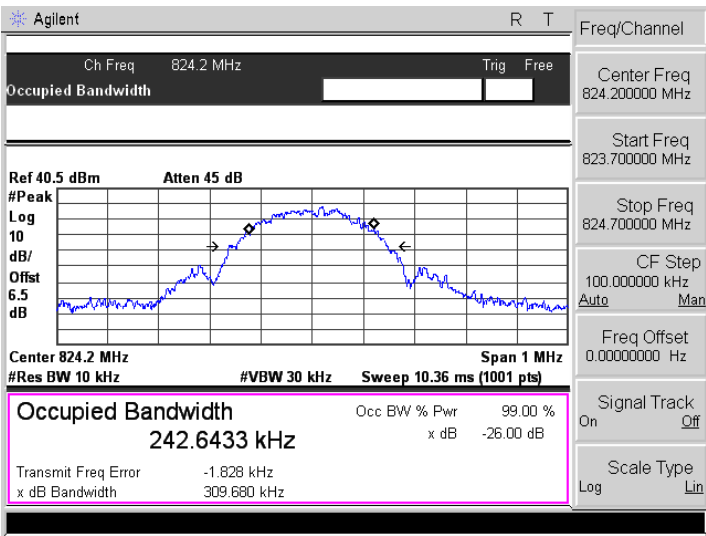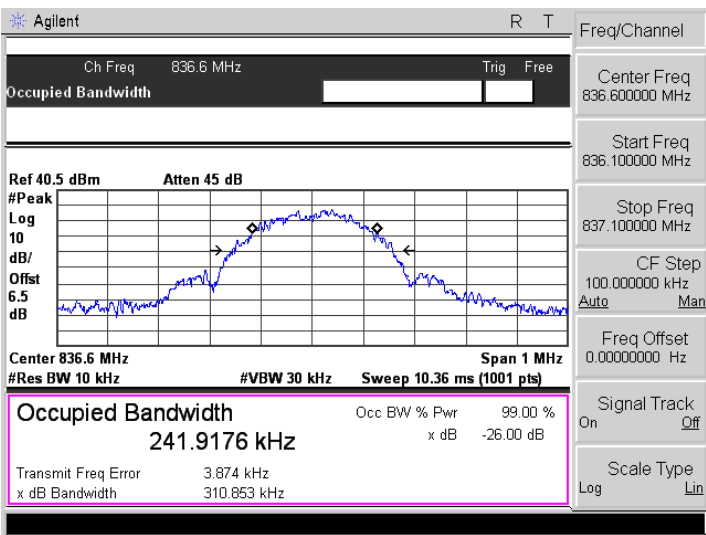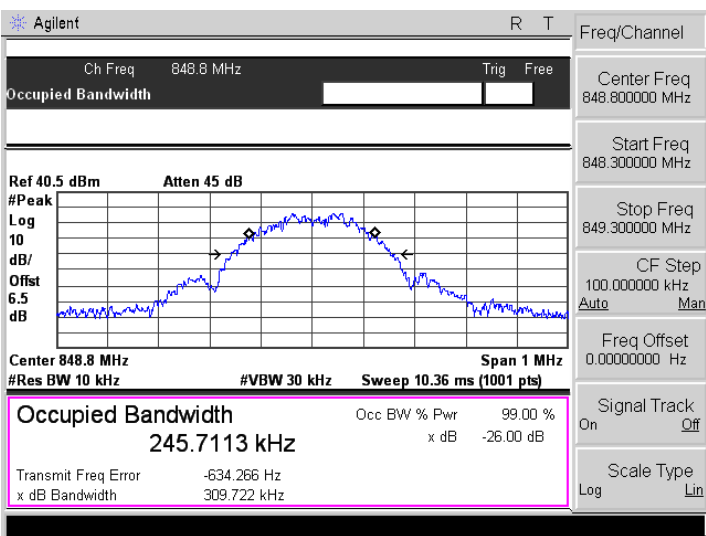EGPRS850 (8PSK,1Slot)-Low	
EGPRS850 (8PSK,1Slot)-Middle	
EGPRS850 (8PSK,1Slot)-High	


GPRS1900 (GMSK,1Slot)-Low	Agilent R T Ch Freq 1.8502 GHz Trig Free Occupied Bandwidth Ref 40.5 dBm Atten 45 dB #Peak Log 10 dB/ Offset 6.5 dB Center 1.85 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 246.7773 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.836 kHz x dB Bandwidth 308.546 kHz Freq/Channel Center Freq 1.85020000 GHz Start Freq 1.84970000 GHz Stop Freq 1.85070000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GPRS1900 (GMSK,1Slot)-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Ref 40.5 dBm Atten 45 dB #Peak Log 10 dB/ Offset 6.5 dB Center 1.88 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 245.0338 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.259 kHz x dB Bandwidth 316.609 kHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87950000 GHz Stop Freq 1.88050000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GPRS1900 (GMSK,1Slot)-High	Agilent R T Ch Freq 1.9098 GHz Trig Free Occupied Bandwidth Ref 40.5 dBm Atten 45 dB #Peak Log 10 dB/ Offset 6.5 dB Center 1.91 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 247.7591 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 3.037 kHz x dB Bandwidth 317.458 kHz Freq/Channel Center Freq 1.90980000 GHz Start Freq 1.90930000 GHz Stop Freq 1.91030000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

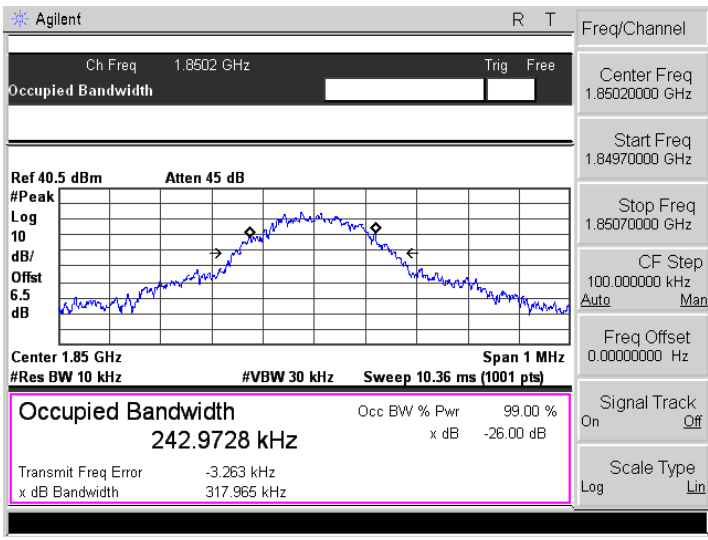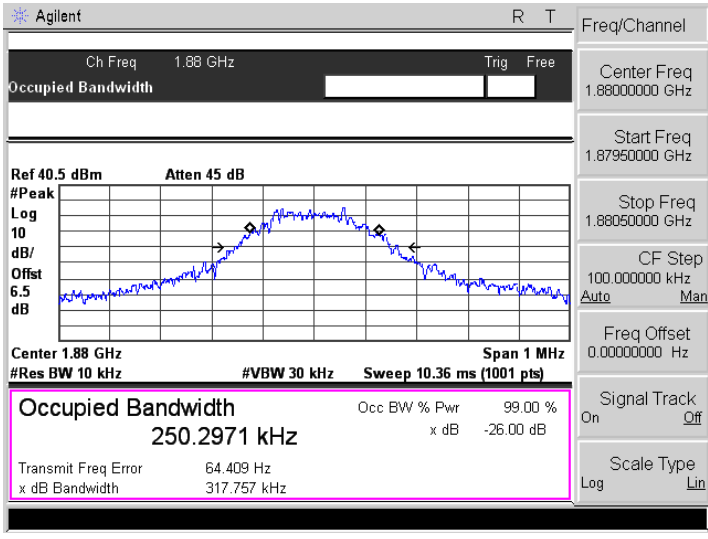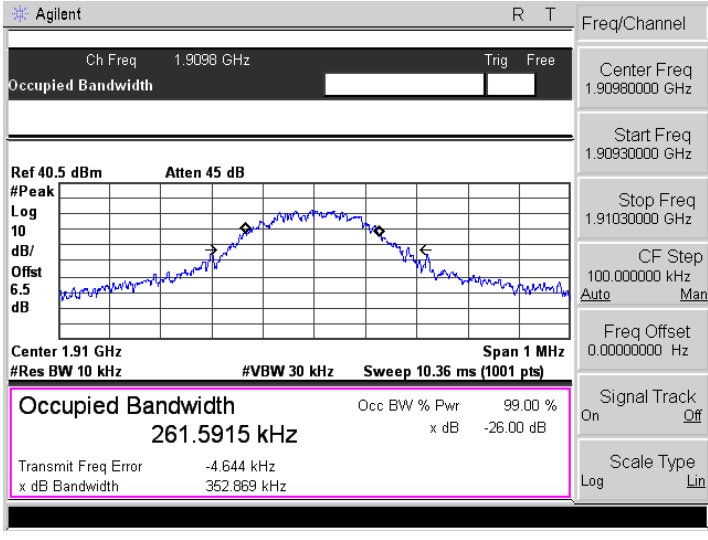EGPRS1900 (8PSK,1Slot)-Low	
EGPRS1900 (8PSK,1Slot)-Middle	
EGPRS1900 (8PSK,1Slot)-High	



APPENDIX D

Out of Band Emissions at Antenna Terminal


GPRS850
(GMSK,1Slot)-Low



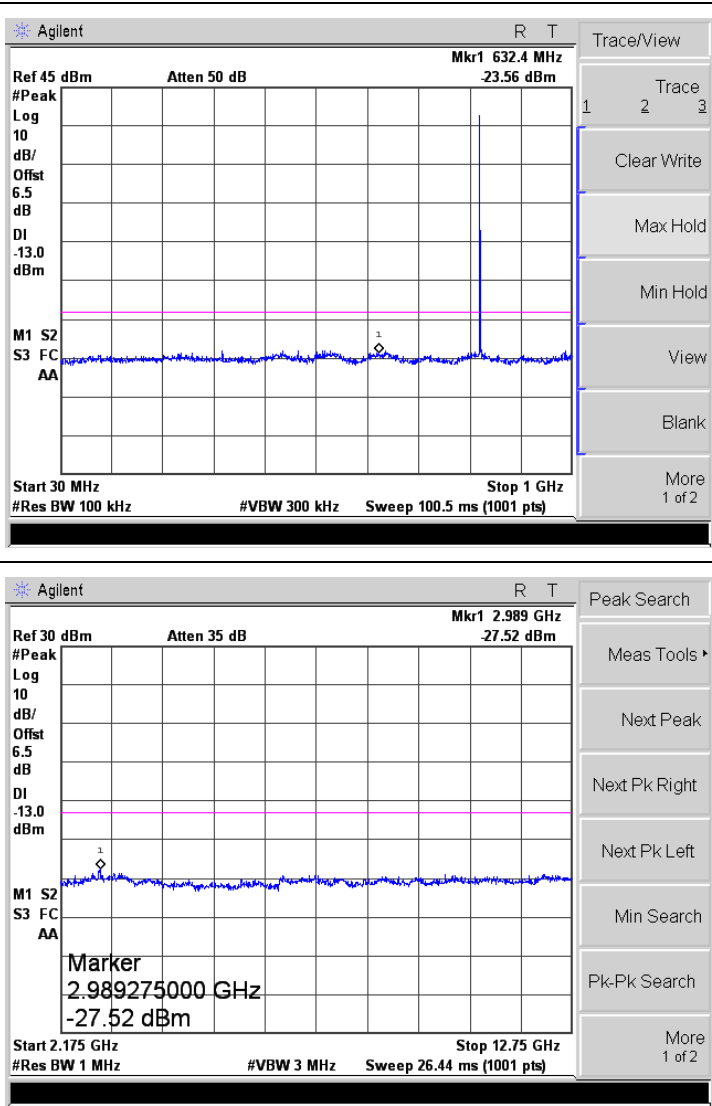


GPRS850
(GMSK,1Slot)-Middle

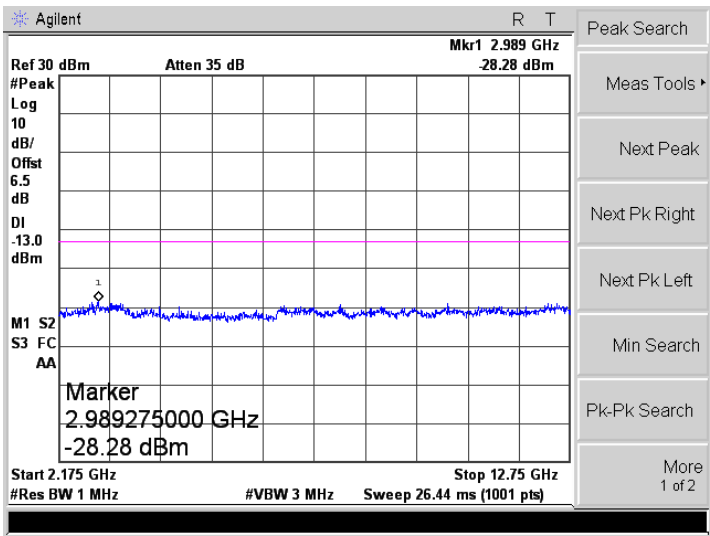
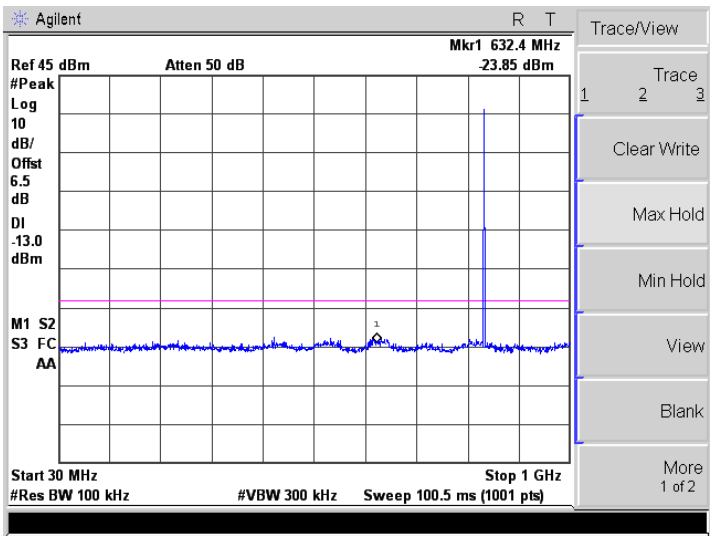


GPRS850
(GMSK)-High

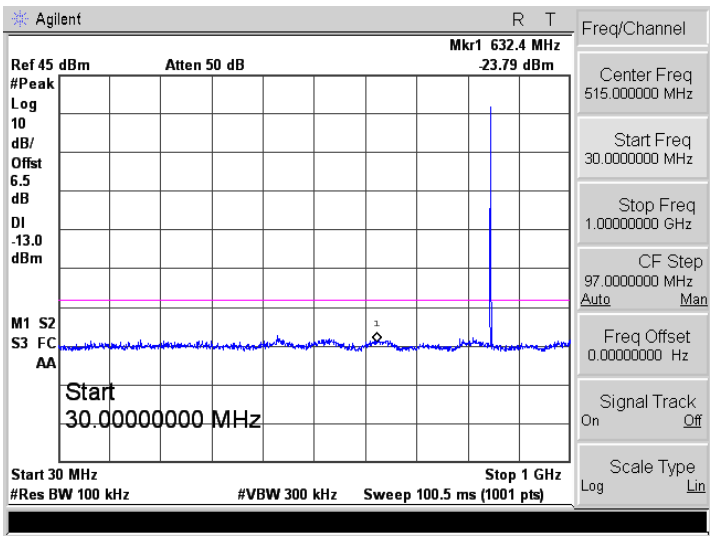


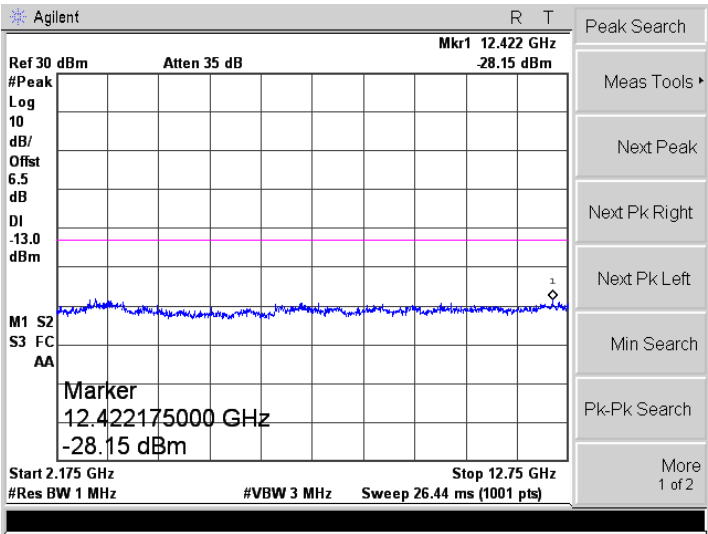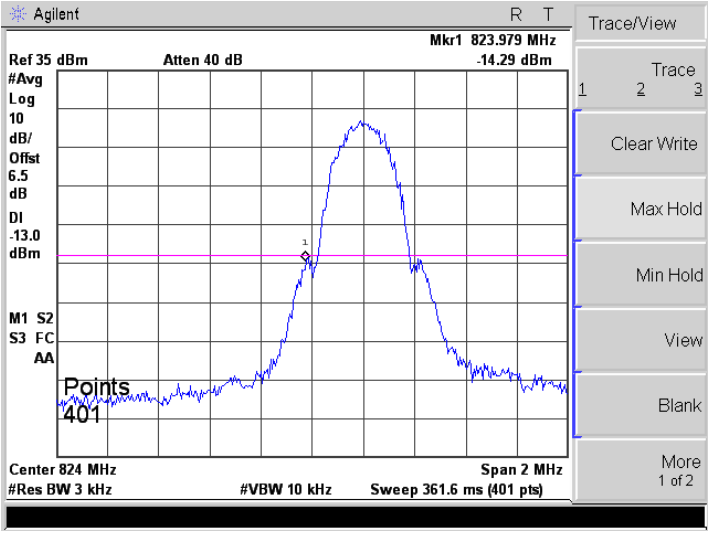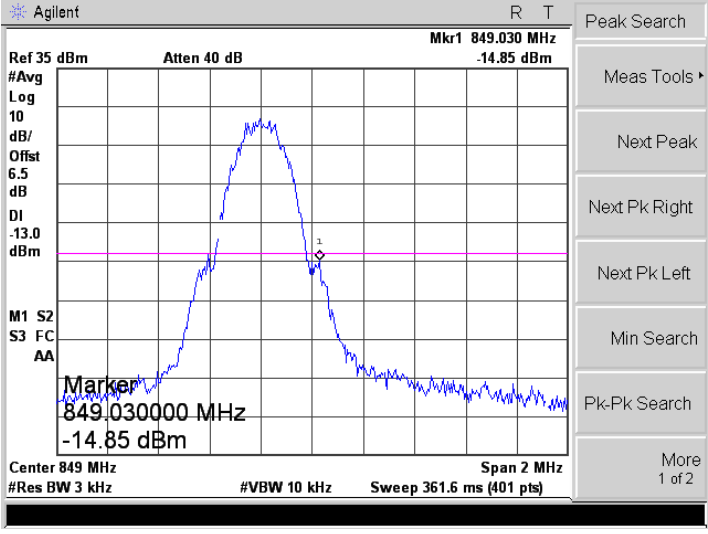
	
Bandedge	
	

EGPRS850
(8PSK,1Slot)-Low

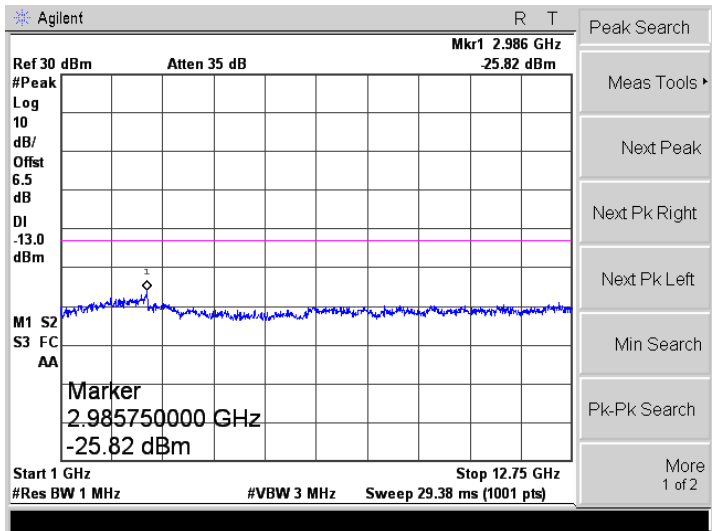
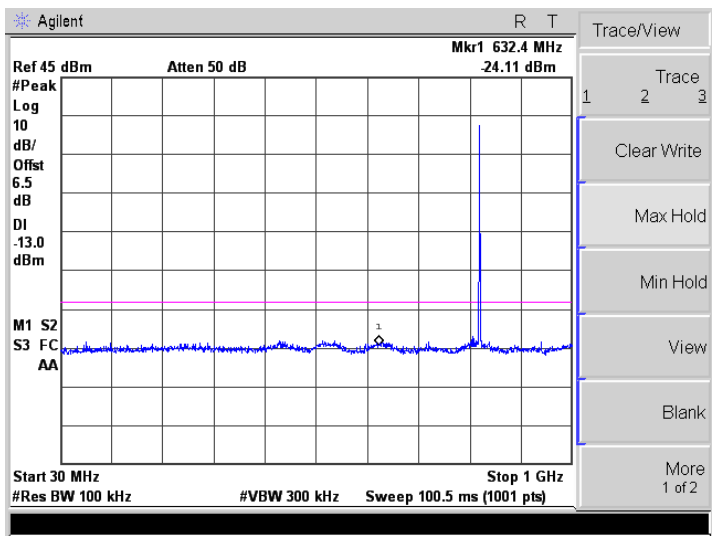


EGPRS850
(8PSK,1Slot)-Middle



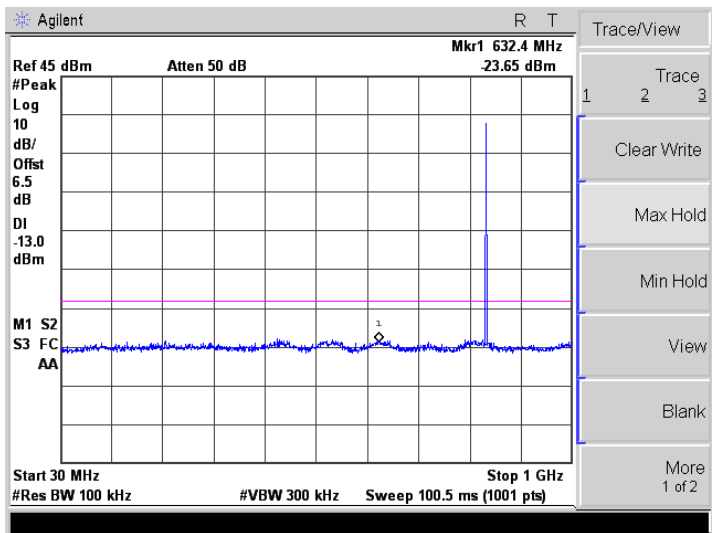


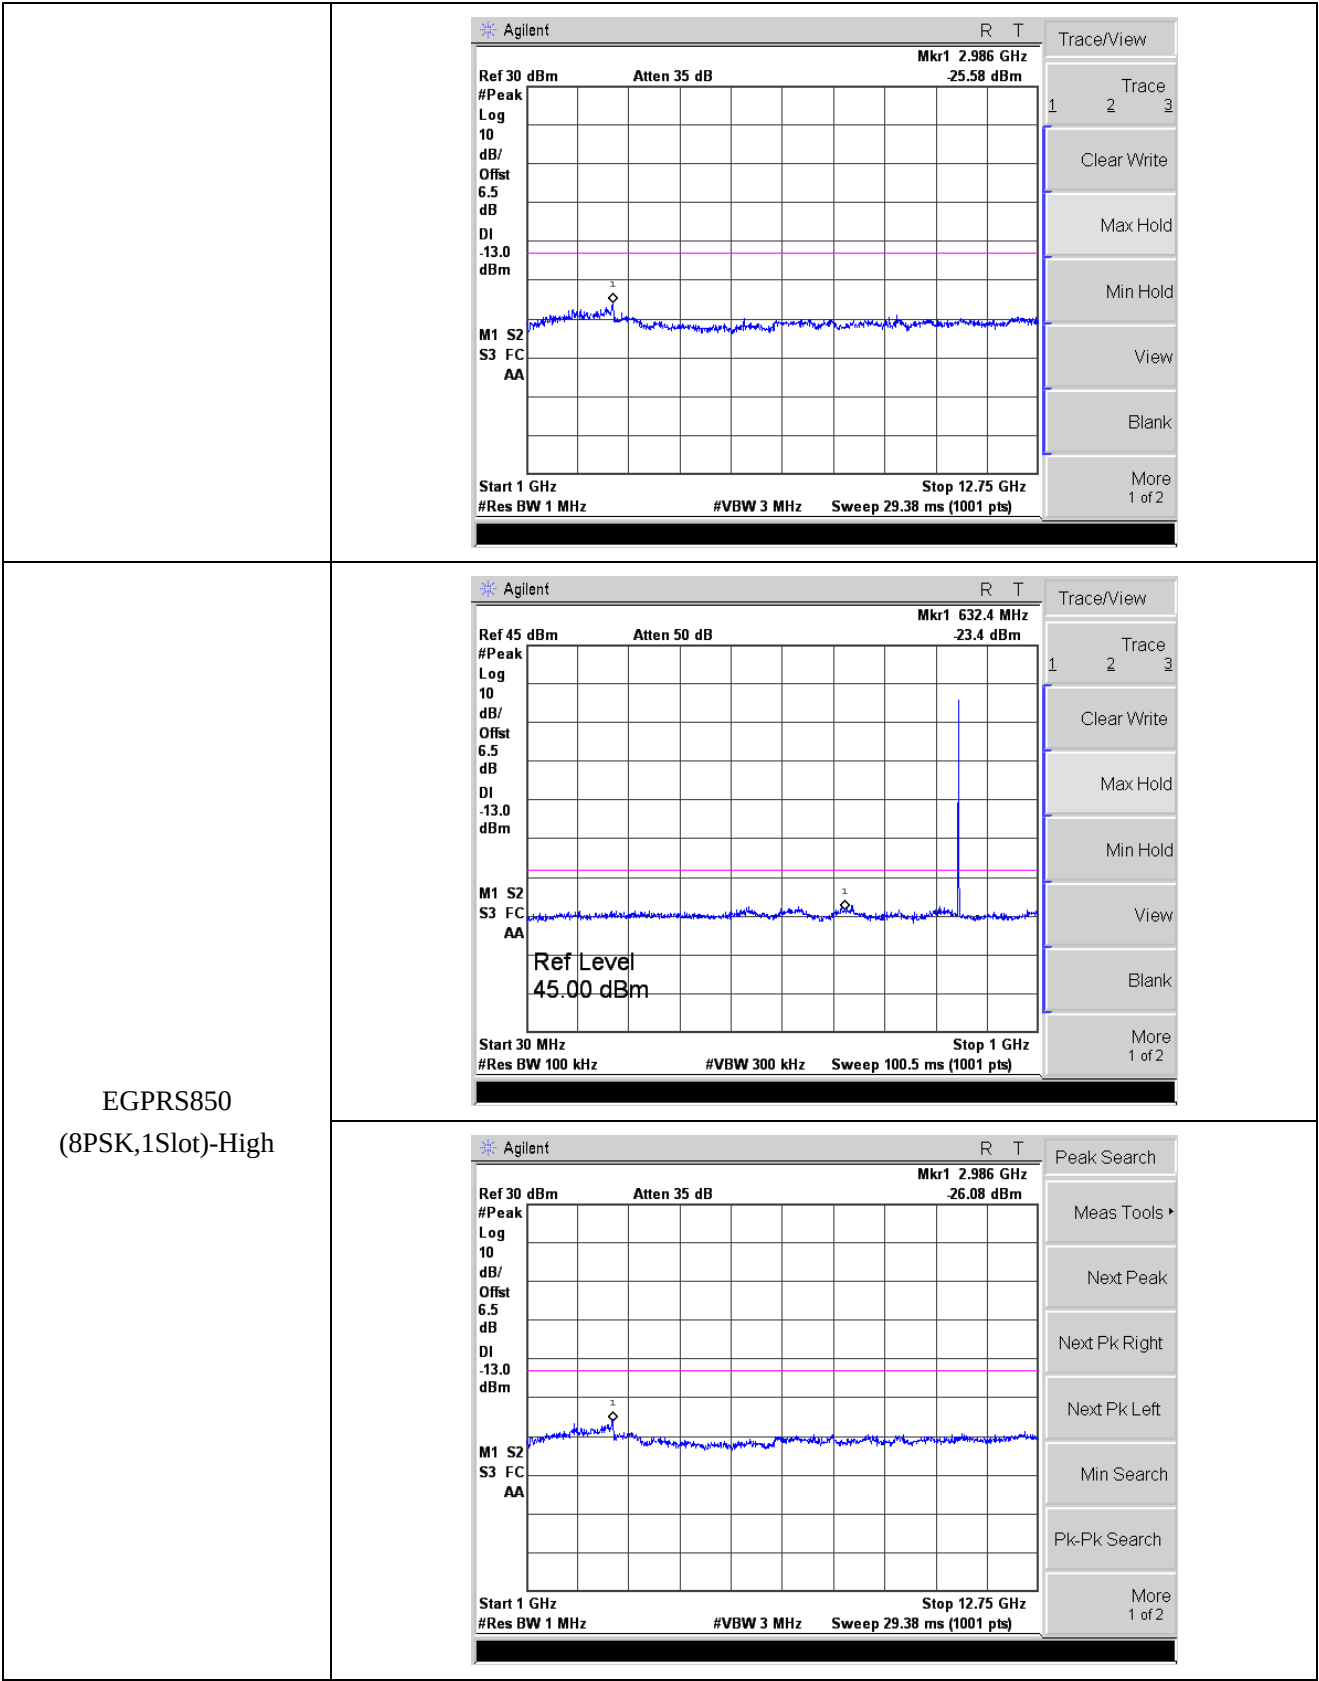




Bandedge

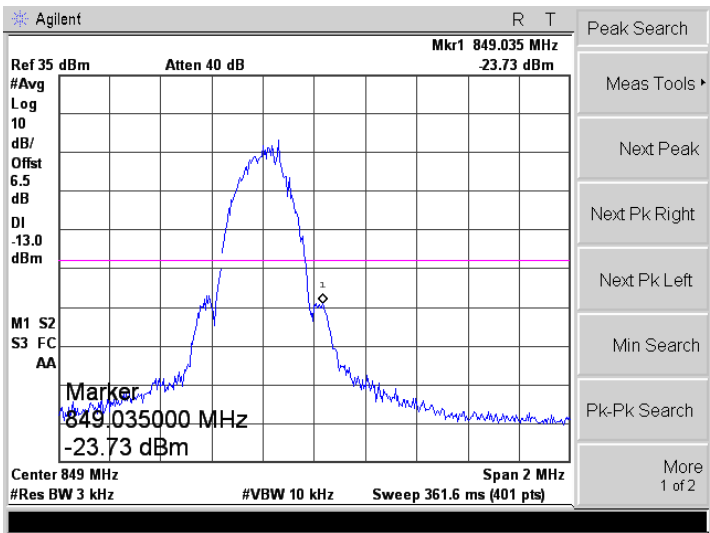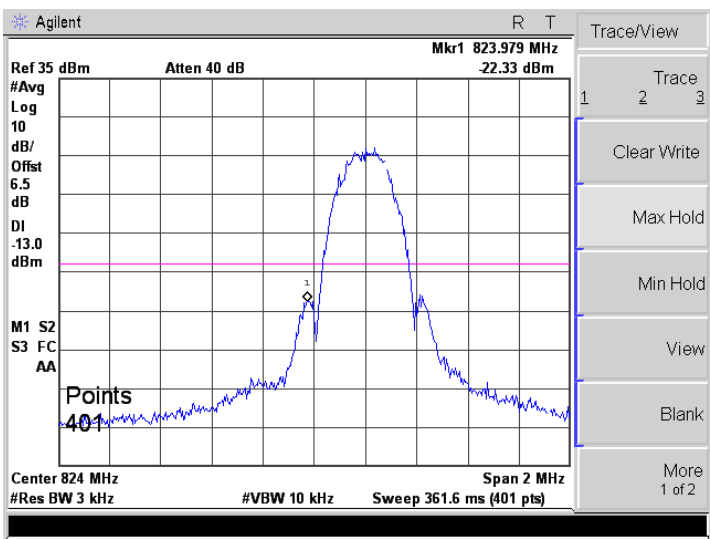




PCS1900
(GMSK)-Low

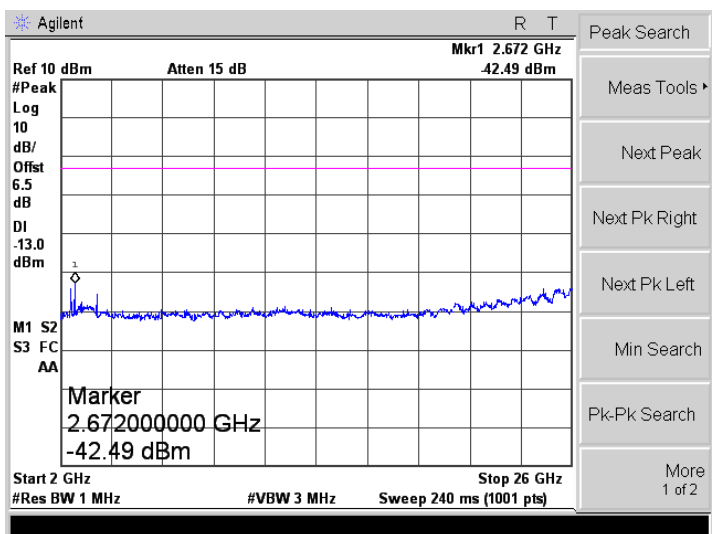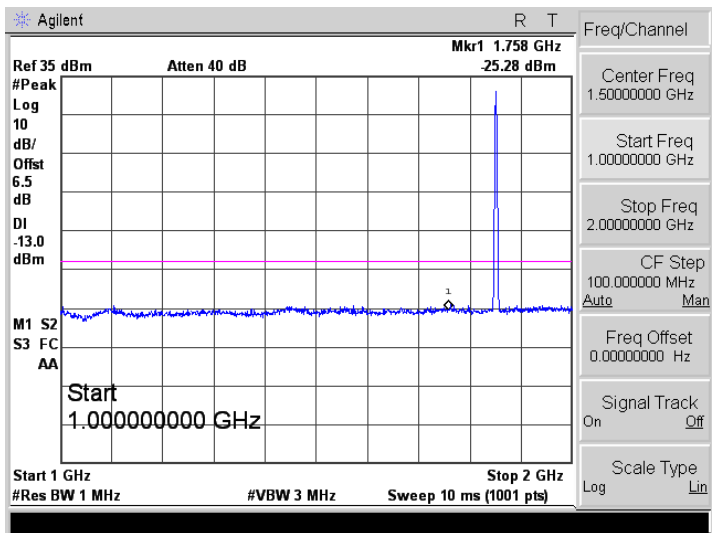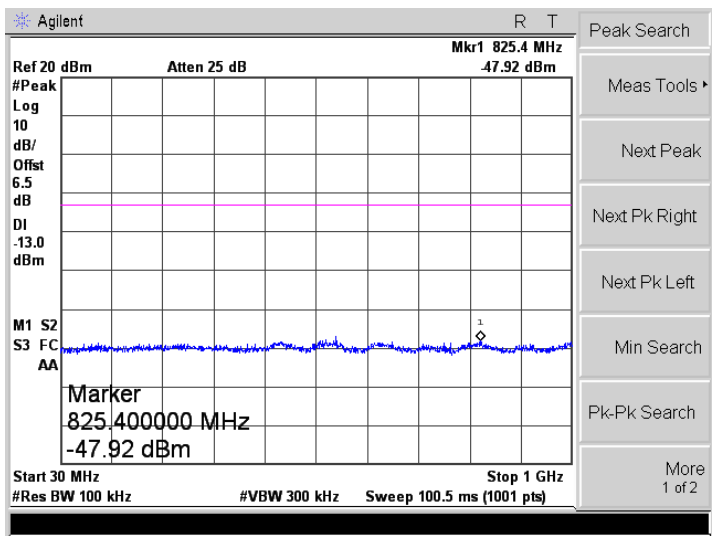



PCS1900
(GMSK)-Middle

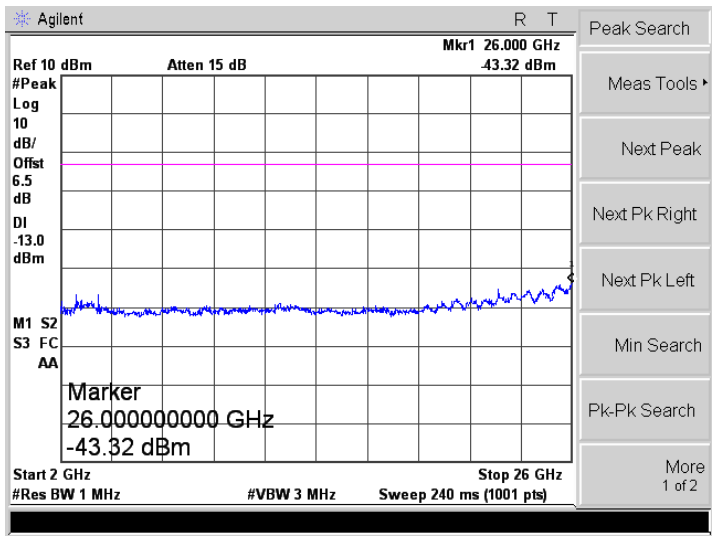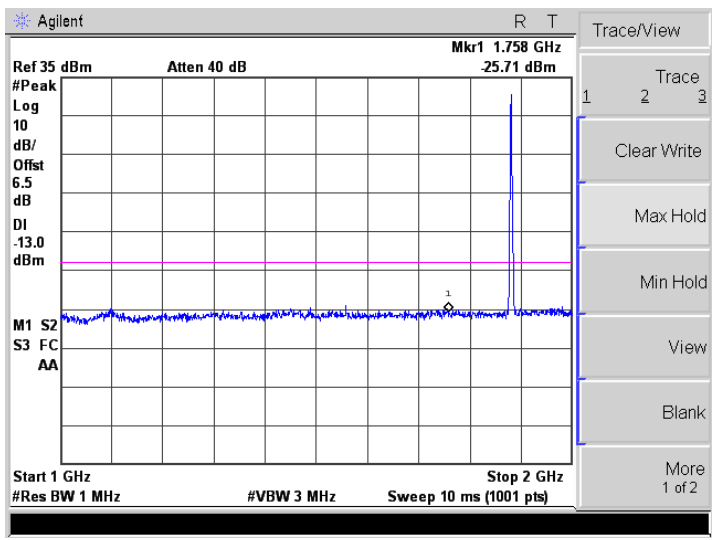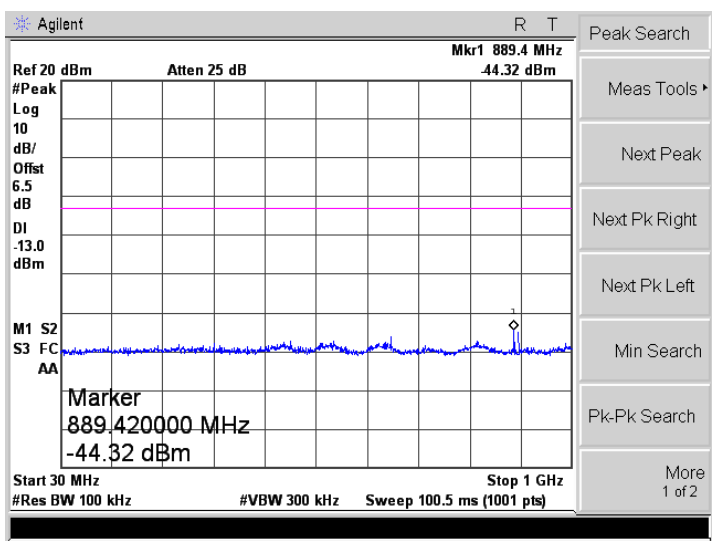


PCS1900
(GMSK)-High

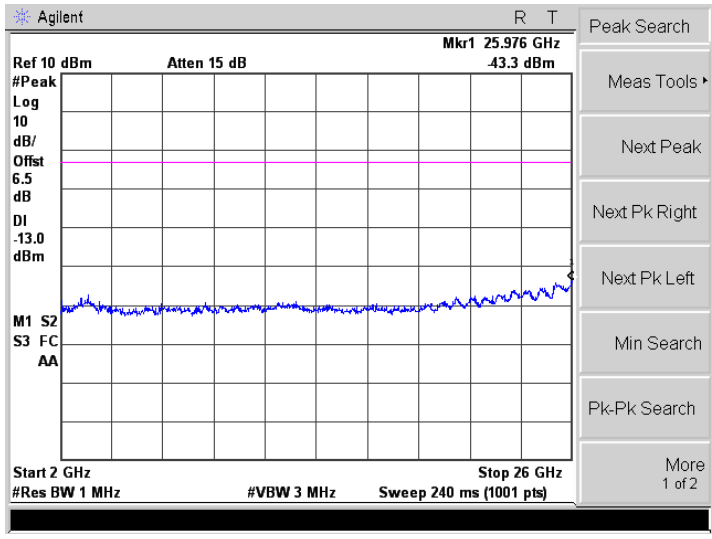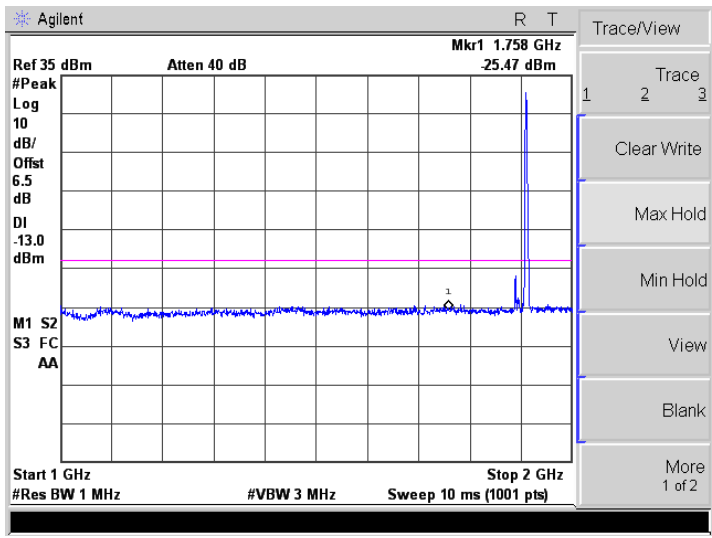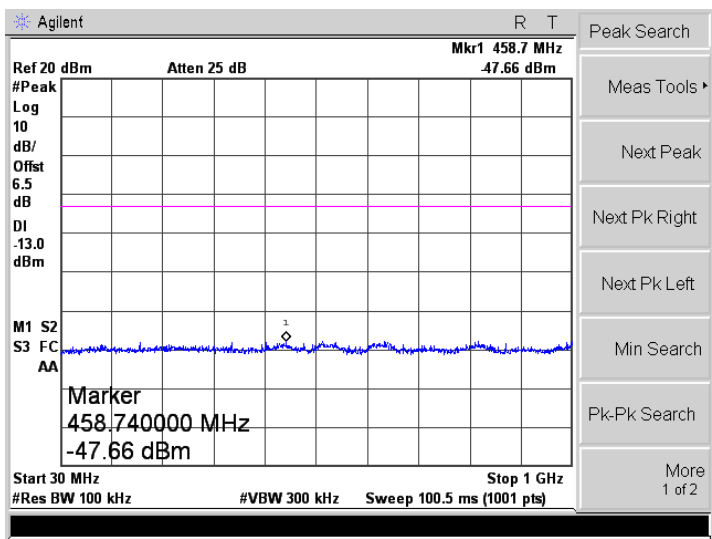



Bandedge

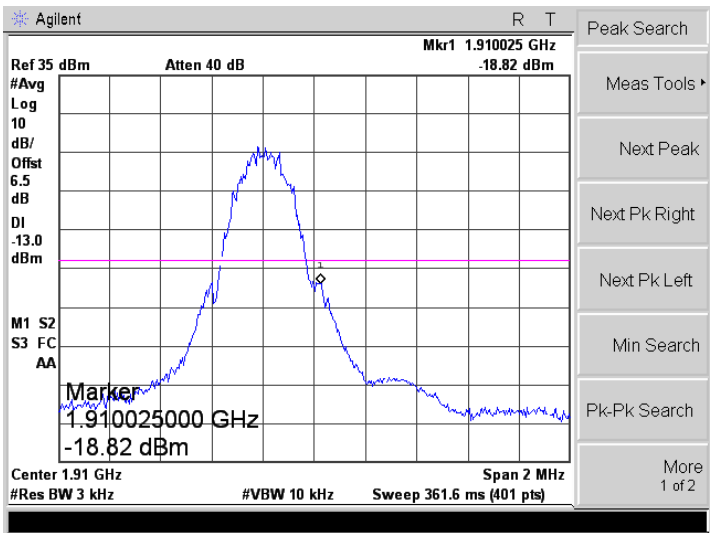
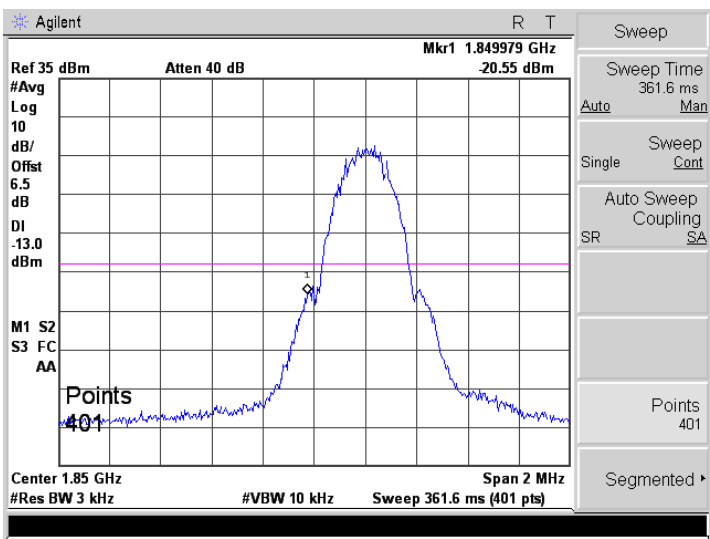



GPRS1900
(GMSK,1Slot)-Low

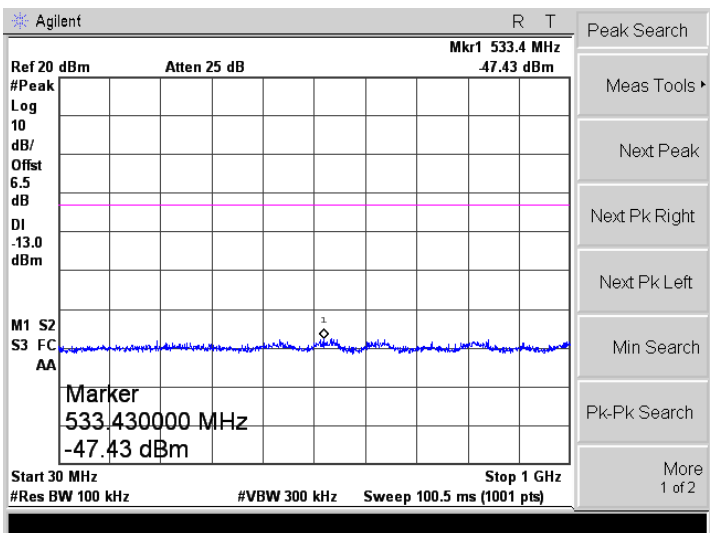



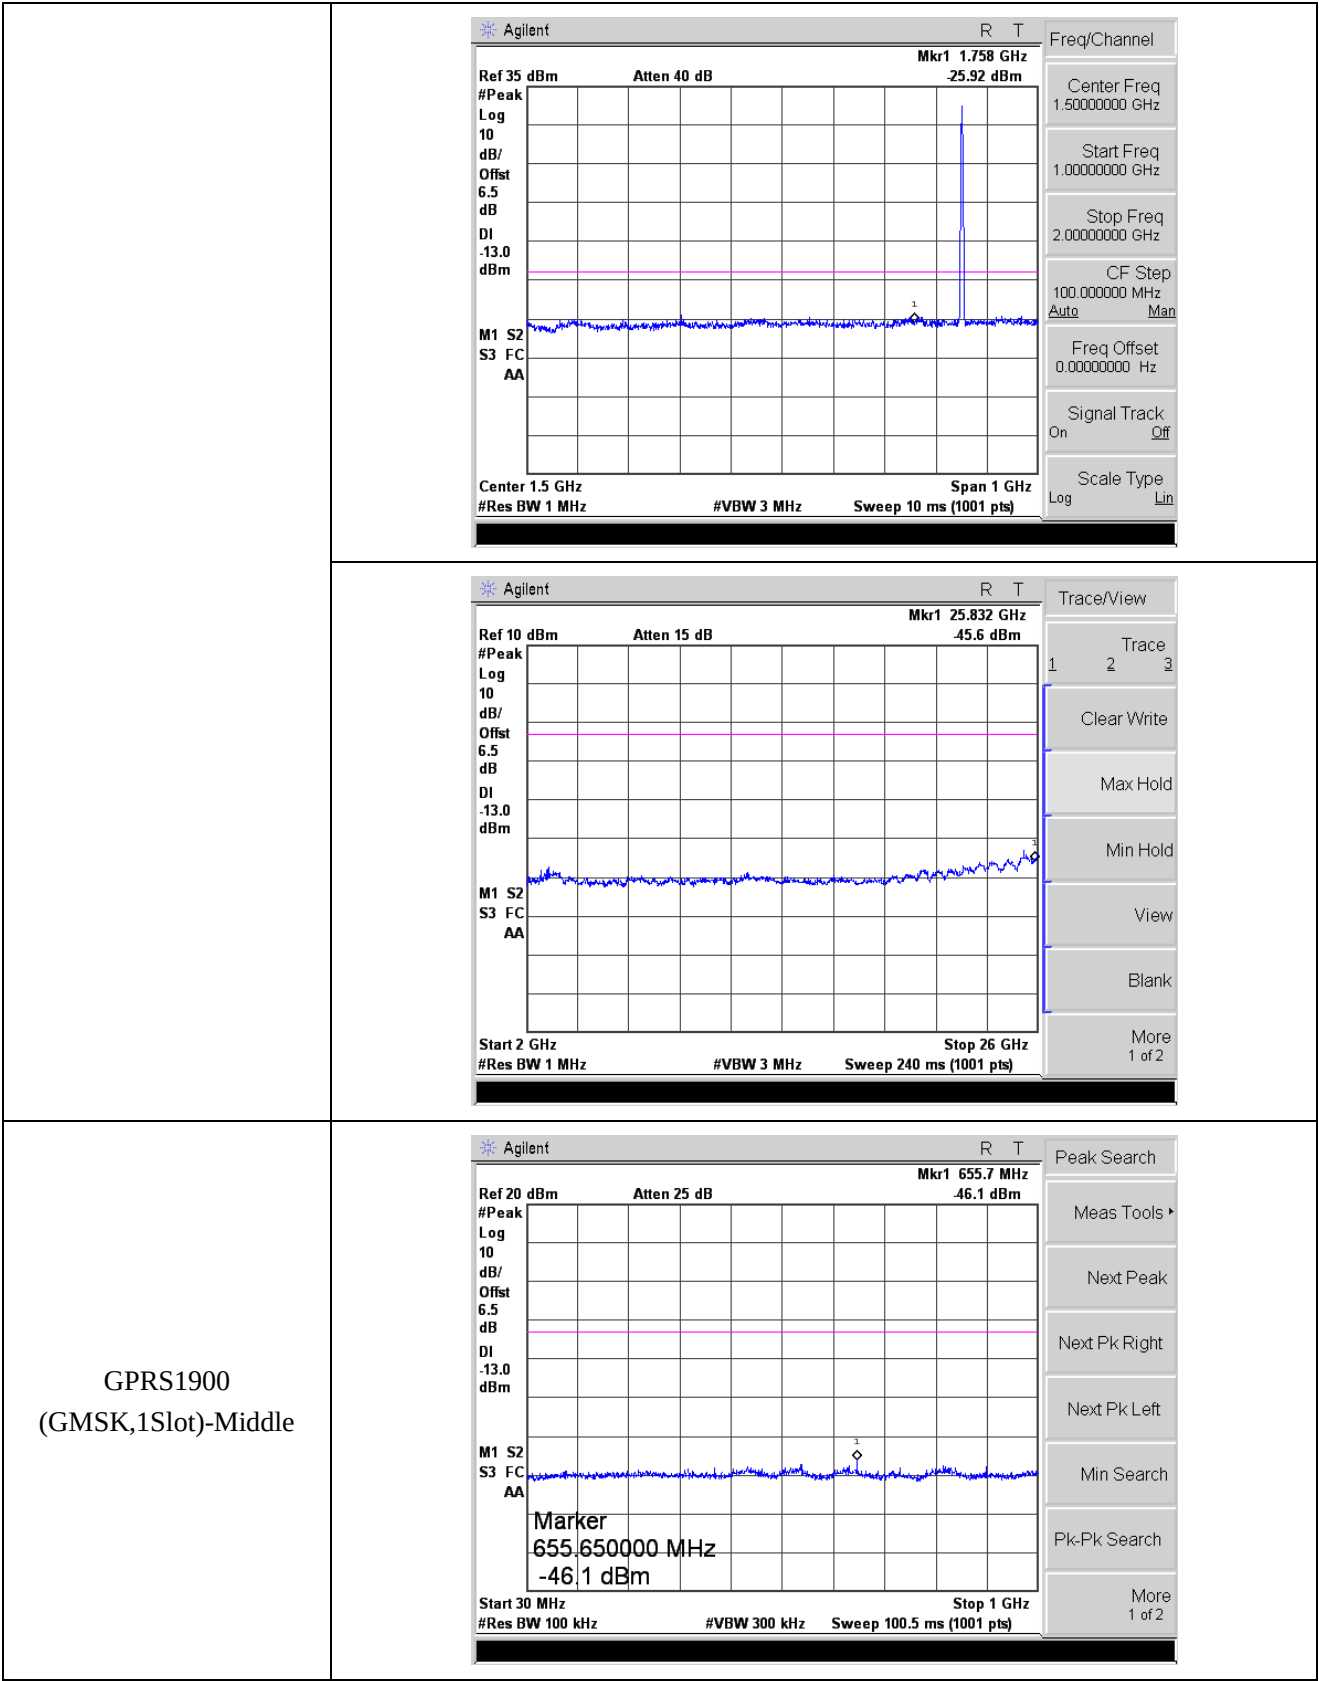


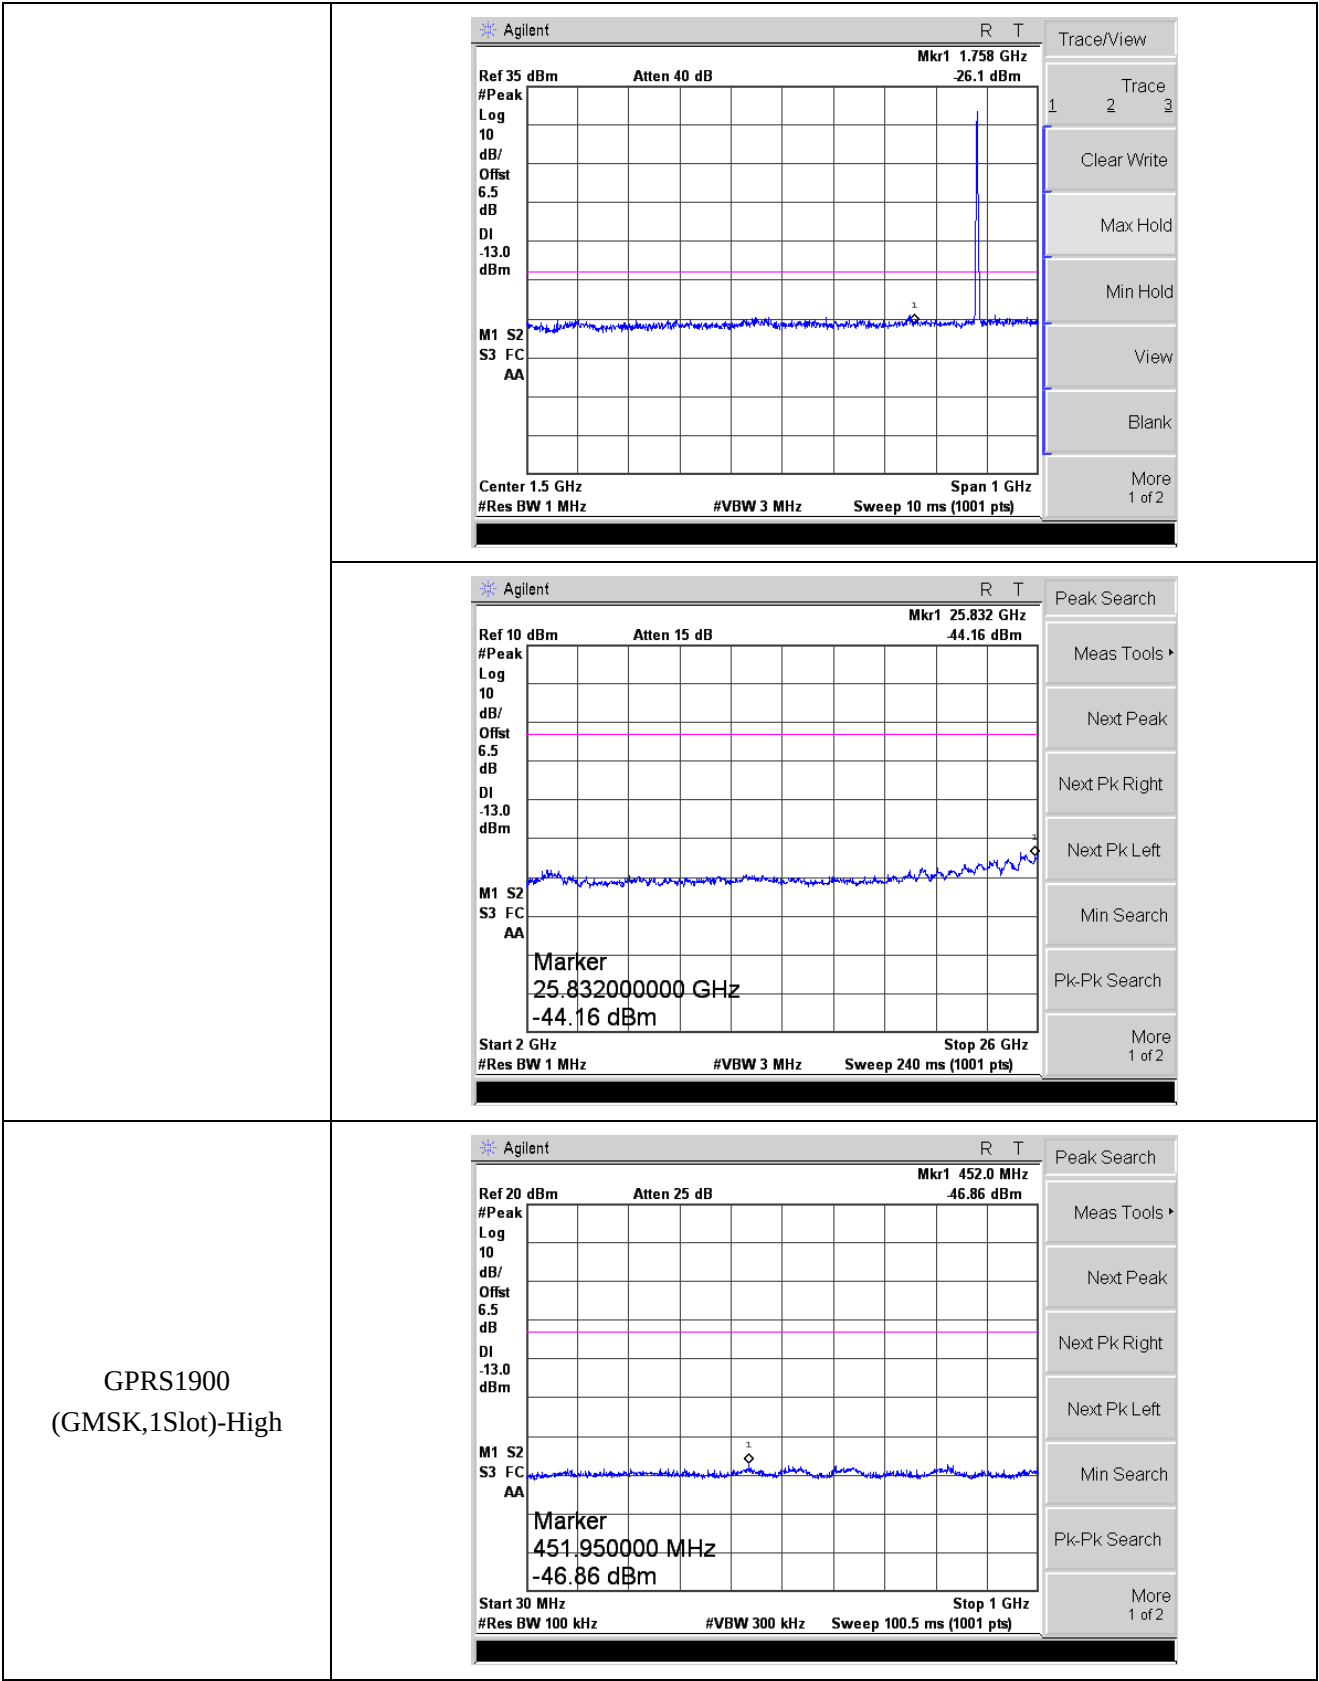


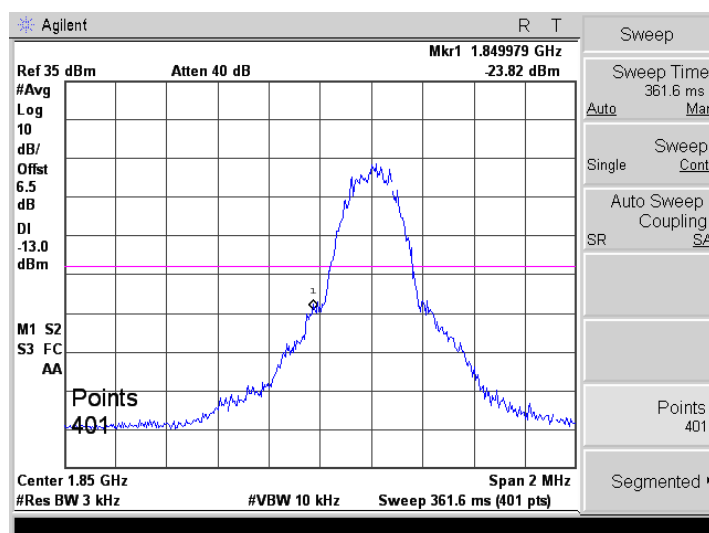



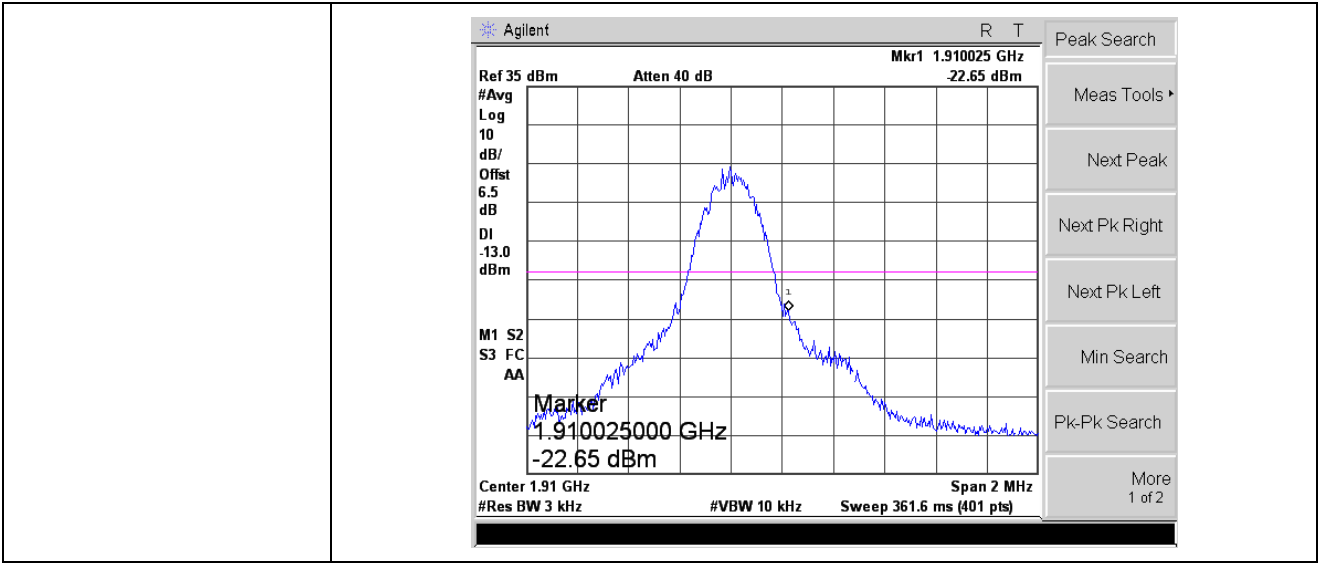




EGPRS1900
(8PSK,1Slot)-Low

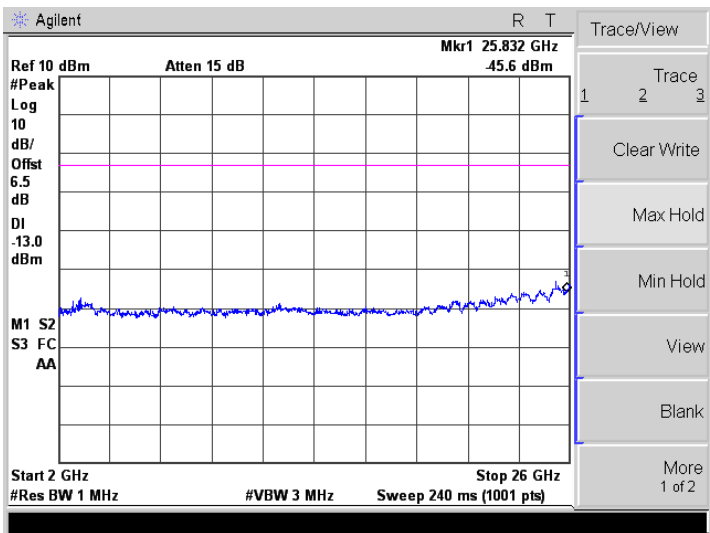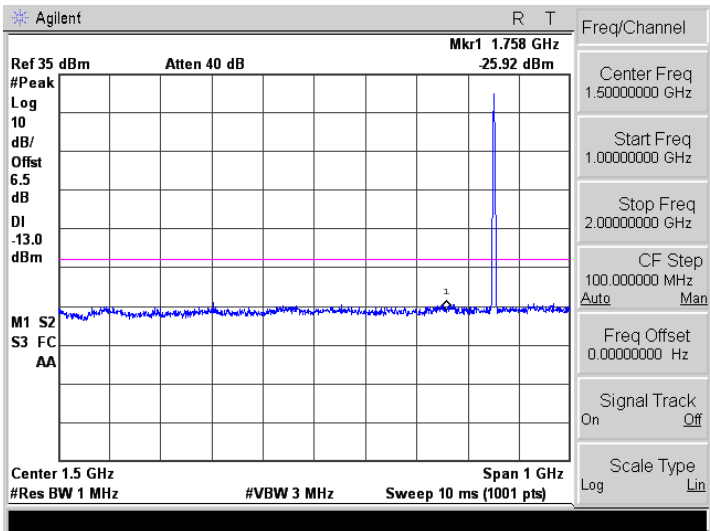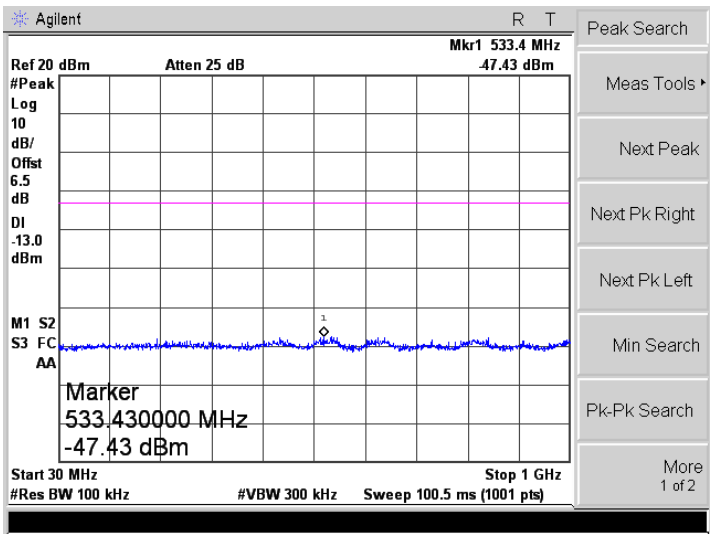



EGPRS1900
(8PSK,1Slot)-Middle

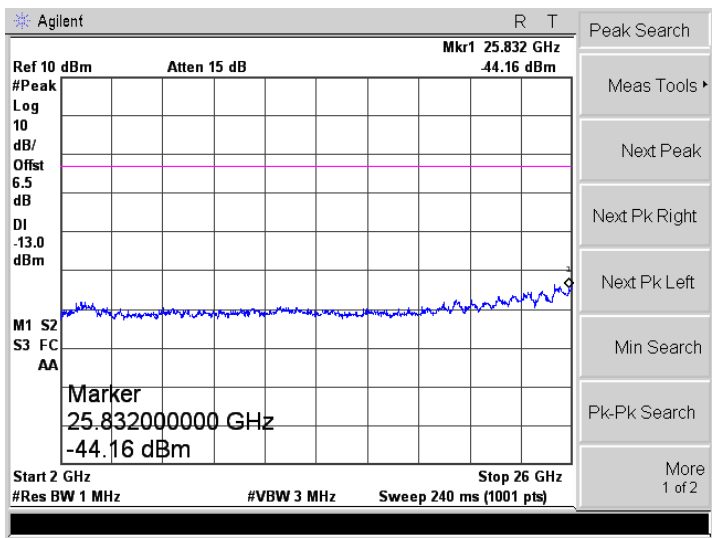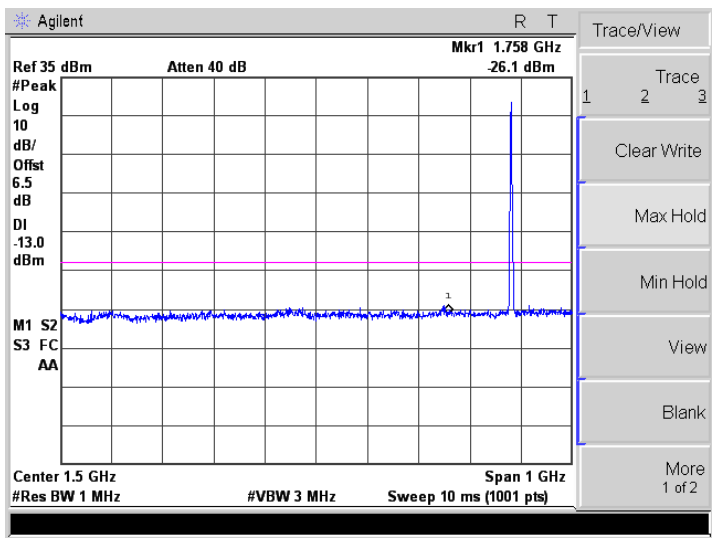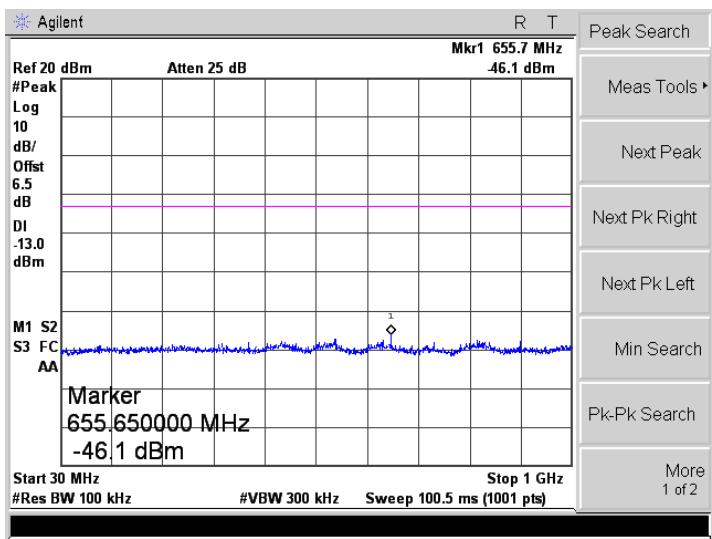

EGPRS1900
(8PSK,1Slot)-High

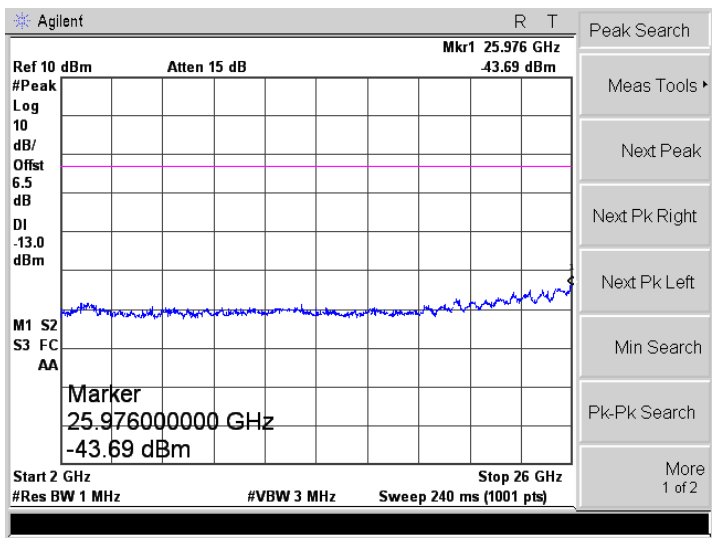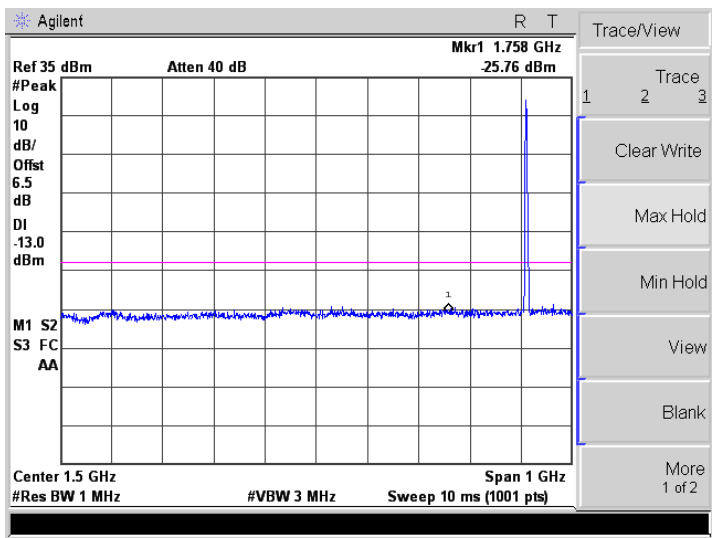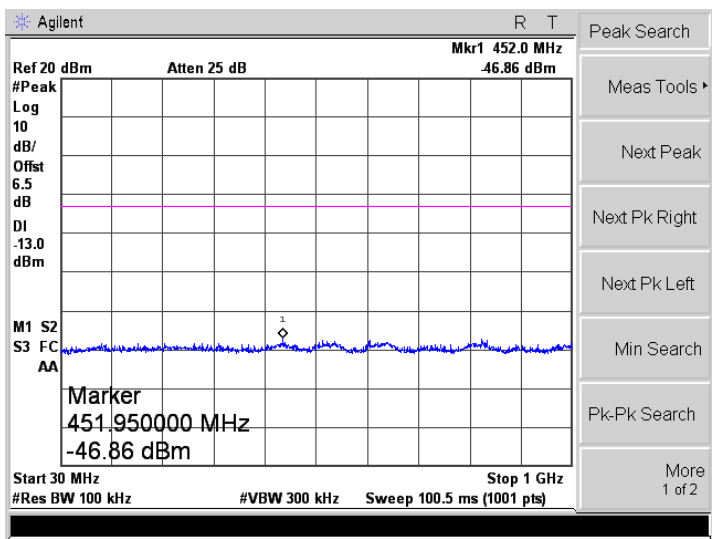

Bandedge

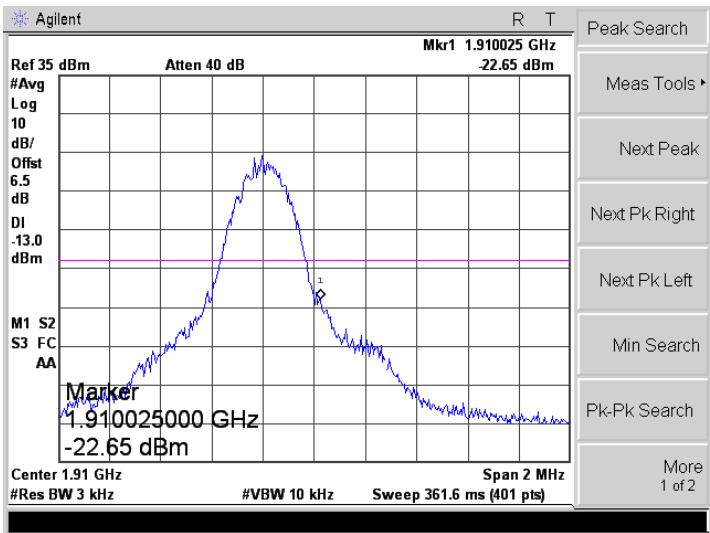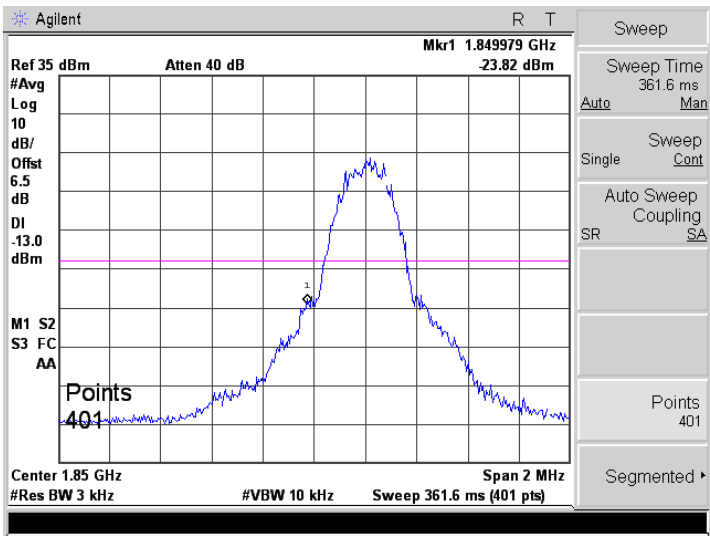

APPENDIX E

Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/ middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.2V

➤ Frequency stability V.S. Temperature measurement


Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	53	0.0634	2.50	Pass
	-20	48	0.0570		
	-10	43	0.0515		
	0	36	0.0432		
	10	32	0.0386		
	20	25	0.0294		
	30	31	0.0368		
	40	35	0.0423		
	50	42	0.0497		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	63	0.0336	2.50	Pass
	-20	58	0.0311		
	-10	54	0.0286		
	0	47	0.0250		
	10	41	0.0217		
	20	34	0.0180		
	30	40	0.0213		
	40	45	0.0241		
	50	50	0.0266		

➤ Frequency stability V.S. Voltage measurement


Reference Frequency: GSM850 (GPRS link) Middle channel=190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	71	0.0846	2.50	Pass
	NV	60	0.0717		
	LV	52	0.0616		
Reference Frequency: PCS1900 (GPRS link) Middle channel=661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	75	0.0401	2.50	Pass
	NV	62	0.0331		
	LV	51	0.0270		

APPENDIX F


Modulation characteristics

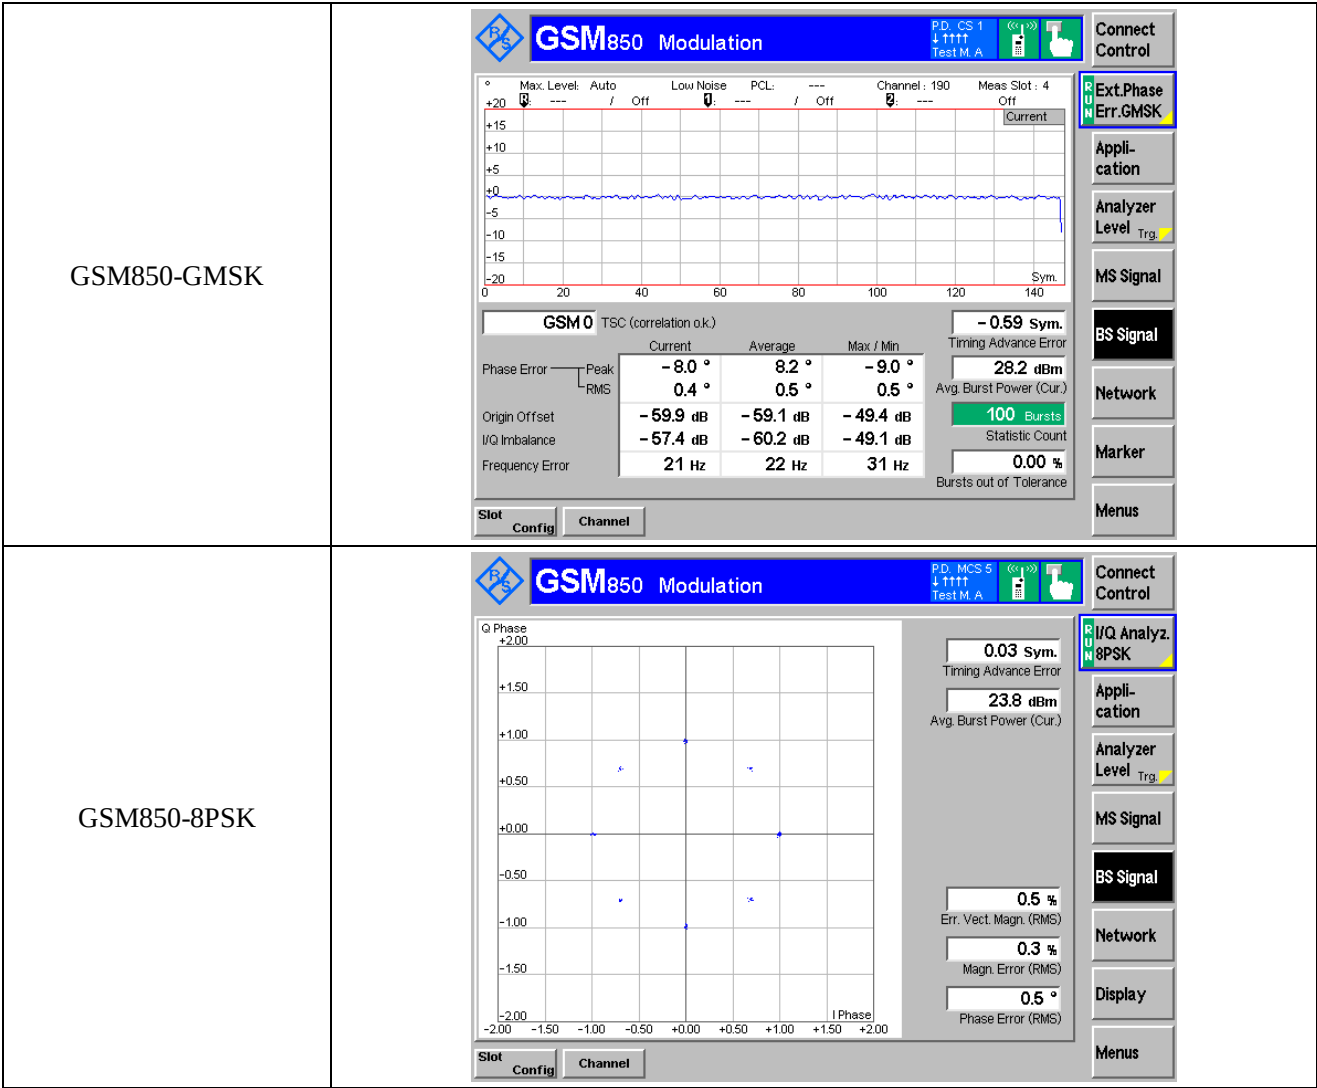

GSM1900-GMSK

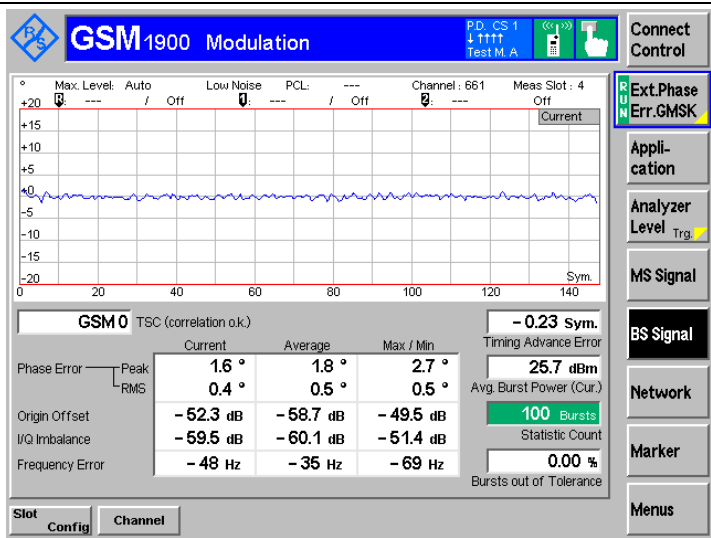

GSM1900-8PSK

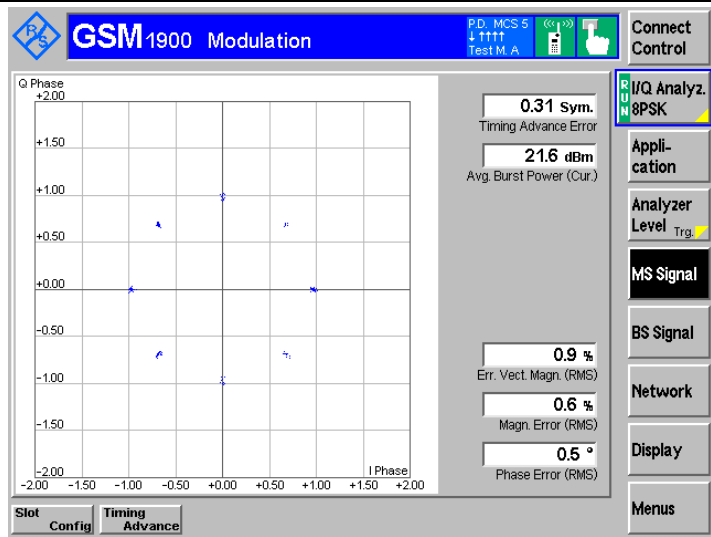

APPENDIX PHOTOGRAPH

Please refer to “ANNEX”

******* END OF REPORT *******