

Inter Lab

Final Report on

Model: NLI HU

(Types: BE L003, BE L004, BE L005)

Report Reference: MDE_HARMAN_1303_FCCe_LevelC

acc. to Title 47 CFR chapter I part 15 subpart ${\sf C}$

FCC ID: 2ACRLBEL005

Date: October 16, 2014

Test Laboratory:

7Layers AG Borsigstr. 11 40880 Ratingen Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG Borsigstrasse 11 40880 Ratingen, Germany Phone: +49 (0) 2102 749 0 Fax: +49 (0) 2102 749 350 www.7Layers.com Aufsichtsratsvorsitzender • Chairman of the Supervisory Board: Peter Mertel Vorstand • Board: Dr. H.- J. Meckelburg Dr. H. Ansorge

Düsseldorf, HRB 44096 USt-IdNr • VAT No.: DE 203159652 TAX No. 147/5869/0385

Registergericht • registered in:



FCC ID: 2ACRLBEL005

1 Administrative Data

1.1 Project Data

Project Responsible:

Aleksey Yevdokymov

Date Of Test Report:

2014/10/16

Date of first test:

2014/06/25

Date of last test:

2014/10/18

1.2 Applicant Data

Company Name:

Harman Automotive Electronic Systems (Suzhou) Co., Ltd.

Street:

No.125, Fangzhou Road

City:

215024 SIP Su Zhou, Jiang Su Province

Country:

P.R. China

Contact Person:

Mrs. Danie Hong

Phone:

+86 512 6255 4740

E-Mail:

Danie.Hong@harman.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

7 layers DE

Company Name :

7 layers AG

Street:

Borsigstrasse 11

City:

40880 Ratingen

Country:

Germany

Contact Person :

Mr. Michael Albert

Phone :

+49 2102 749 201

Fax :

+49 2102 749 444

E Mail:

Michael.Albert@7Layers.com

Laboratory Details

Lab ID Identification

Responsible

Accreditation Info

Lab 1

Radiated Emissions

RF Test Solution

DAkkS-Registration no. D-PL-12140-01-01

Lab 2

Regulatory Bluetooth

Mr. Robert Machulec Mr. Jimmy Chatheril Mr. Sören Berentzen

Mr. Marco Kullik

DAkkS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

Carsten Steinröder

responsible for tests performed in: Lab 1, Lab 2

Mayers

7 layers AG, Borsigstr. 11 40880 Ratingen, Germany Phone +49 (0)2102 749 0



144015

1.5 Signature of the Accreditation Responsible

[B RETKA]

Accreditation scope responsible person responsible for Lab 1, Lab 2



FCC ID: 2ACRLBEL005

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: NLI HU (Type: BE L003)

Manufacturer:

Company Name: Please see applicant data

Contact Person: -

Parameter List:

Parameter name Value Antenna Gain -5.0 (dBi) DC Power Supply 13.5 (V) highest channel (BT) 2480 (MHz) lowest channel (BT) 2402 (MHz) mid channel (BT) 2441 (MHz)

OUT: NLI HU (Type: BE L004)

Manufacturer:

Company Name: Please see applicant data

Contact Person: -

Parameter List:

Parameter name Value Antenna Gain -5.0 (dBi) DC Power Supply 13.5 (V) highest channel (BT) 2480 (MHz) 2402 lowest channel (BT) (MHz) mid channel (BT) 2441 (MHz)

OUT: NLI HU (Type: BE L005)

Manufacturer:

Company Name: Please see applicant data

Contact Person: -

Parameter List:

Parameter name Value Antenna Gain -5.0 (dBi) DC Power Supply 13.5 (V) highest channel (BT) 2480 (MHz) lowest channel (BT) 2402 (MHz) mid channel (BT) 2441 (MHz)



FCC ID: 2ACRLBEL005

2.2 Detailed Description of OUT Samples

Sample: ac01

OUT Identifier NLI HU (Type: BE L005)
Sample Description conducted sample

HW StatusSW StatusR12

Low Voltage9 VLow Temp.-40 °CHigh Voltage16 VHigh Temp.+70 °CNominal Voltage13.5 VNormal Temp.+25 °C

Sample: ba01

OUT Identifier NLI HU (Type: BE L003)
Sample Description conducted sample

HW StatusD SampleSW StatusR12

Sample: bb01

OUT Identifier NLI HU (Type: BE L003)

Sample Description radiated sample

Serial No. 0007063
HW Status D Sample
SW Status R12

Sample: cc01

OUT Identifier NLI HU (Type: BE L005)

Sample Descriptionradiated sampleHW StatusD SampleSW StatusR12

Low Voltage9 VLow Temp.-40 °CHigh Voltage16 VHigh Temp.+70 °CNominal Voltage13.5 VNormal Temp.+25 °C



Sample: db01

OUT Identifier NLI HU (Type: BE L004) Sample Description conducted sample

0007297 Serial No. HW Status D Sample SW Status R12

Low Voltage 9 V Low Temp. -40 °C +70 °C High Voltage 16 V High Temp. +25 °C Nominal Voltage 13.5 V Normal Temp.

Sample: dd01

OUT Identifier NLI HU (Type: BE L004)

Sample Description radiated sample Serial No. 0007294 HW Status D Sample SW Status R12

Low Voltage 9 V Low Temp. -40 °C High Temp. +70 °C High Voltage 16 V Nominal Voltage 13.5 V Normal Temp. +20 °C



FCC ID: 2ACRLBEL005

2.3 OUT Features

Features for OUT: NLI HU (Type: BE L003)

Designation Description Allowed Values Supported Value(s)

Features for scope: FCC_v2

BT EUT supports Bluetooth data rate of 1 Mbps

with GFSK modulation in the band 2400 MHz -

2483.5 MHz

DC The OUT is powered by or connected to DC

EDR2 EUT supports Bluetooth using data rate of 2

Mbps with PI/4 DQPSK modulation in the band

2400 MHz - 2483.5 MHz

EDR3 EUT supports Bluetooth using data rate of 3

Mbps with 8DPSK modulation in the band 2400

MHz - 2483.5 MHz

Iant Integral Antenna: permanent fixed antenna,

which may be built-in, designed as an indispensable part of the equipment

TantC temporary antenna connector, which may be

only built-in for testing, designed as an

example part of the equipment

Features for OUT: NLI HU (Type: BE L004)

Designation Description Allowed Values Supported Value(s)

Features for scope: FCC_v2

BT EUT supports Bluetooth data rate of 1 Mbps

with GFSK modulation in the band 2400 MHz -

2483.5 MHz

DC The OUT is powered by or connected to DC

EDR2 EUT supports Bluetooth using data rate of 2

Mbps with PI/4 DOPSK modulation in the band

2400 MHz - 2483.5 MHz

EDR3 EUT supports Bluetooth using data rate of 3

Mbps with 8DPSK modulation in the band 2400

MHz - 2483.5 MHz

Iant Integral Antenna: permanent fixed antenna,

which may be built-in, designed as an indispensable part of the equipment

TantC temporary antenna connector, which may be

only built-in for testing, designed as an example part of the equipment

Features for OUT: NLI HU (Type: BE L005)

Designation Description Allowed Values Supported Value(s)

Features for scope: FCC_v2

BT EUT supports Bluetooth data rate of 1 Mbps

with GFSK modulation in the band 2400 MHz -

2483.5 MHz

DC The OUT is powered by or connected to DC EDR2 EUT supports Bluetooth using data rate of 2

EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band

2400 MHz - 2483.5 MHz

EDR3 EUT supports Bluetooth using data rate of 3

Mbps with 8DPSK modulation in the band 2400

MHz - 2483.5 MHz

Iant Integral Antenna: permanent fixed antenna,

which may be built-in, designed as an indispensable part of the equipment



FCC ID: 2ACRLBEL005

Features for OUT: NLI HU (Type: BE L005)

Designation Description Allowed Values Supported Value(s)

TantC temporary antenna connector, which may be only built-in for testing, designed as an

example part of the equipment

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No. List of OUT samples List of auxiliary equipment

Sample No. Sample Description AE No. AE Description

AC01_L005 (Level C (BE 005))

Sample: ac01 conducted sample

BA01_L003 (Level C (BE L003))

Sample: ba01 conducted sample

BB01_L003 (Level C (BE L003) radiated setup)

Sample: bb01 radiated sample

CC01_L005 (Level C (BE L005) radiated setup)

Sample: cc01 radiated sample

DB01_L004 (Level C (BE L004))

Sample: db01 conducted sample

DD01_L004 (Level C (radiated setup))

Sample: dd01 radiated sample



FCC ID: 2ACRLBEL005

3 Results

3.1 General

Documentation of tested

devices:

Available at the test laboratory.

Interpretation of the

test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is

conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment

implementation.

Note: Worst Case Selection:

The type: BE L004 has been identified as worst case model,

based on the test results of the following tests:

15c.4 Peak Power Output

15c.2 Spurious radiated emissions

Therefore, full testing has been performed only for the type BE

L004

This test report replaces the test report with the reference:

MDE_HARMAN_1303_FCCd_LevelC

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

Designation Description

FCC47CFRChIPART15c247RADIO

FREQUENCY DEVICES

Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

Test Specification: FCC part 2 and 15
Version 10-1-13 Edition

Title: PART 2 - GENERAL RULES AND REGULATIONS

PART 15 - RADIO FREQUENCY DEVICES



3.4 Summary

Test Case Identifier / Name			Lab	
Test (condition)	Result	Date of Test	Ref.	Setup
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b),	§15.209		
15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power	Passed	2014/10/18	Lab 1	BB01_L003
	Passed	2014/08/18	Lab 1	CC01_L005
	Passed	2014/08/12	Lab 1	DD01_L004
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Occupeid Bandwidth Summary	Passed	2014/06/25	Lab 2	DB01_L004
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Peak power output Summary	Passed	2014/07/04	Lab 2	BA01_L003
	Passed	2014/07/04	Lab 2	AC01_L005
	Passed	2014/06/25	Lab 2	DB01_L004
15c.5 Spurious RF conducted emissions §15.	247 (d)			
15c.5; = BT transmit mode: Low/Mid/High Frequency	Passed	2014/06/25	Lab 2	DB01_L004
15c.6 Band edge compliance §15.247 (d)				
15c.6; Band edge compliance Summary	Passed	2014/06/25	Lab 1	DB01_L004
15c.7 Dwell time §15.247 (a) (1) (iii)	Dagged	2014/06/25	1-62	DB01 1004
15c.7; Dwell time Summary	Passed	2014/06/25	Lab 2	DB01_L004
15c.8 Channel separation §15.247 (a) (1) 15c.8; Channel separation Summary	Passed	2014/06/25	Lab 2	DB01_L004
15c.9 Number of hopping frequencies §15.24 15c.9; Number of hopping frequencies Summary	7 (a) (1) (iii) Passed	2014/06/25	Lab 2	DB01_L004



FCC ID: 2ACRLBEL005

3.5 Detailed Results

3.5.1 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b),

§15.209

Test1: 15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power

Result:

Passed

Setup No.:

DD01_L004

Date of Test:

2014/08/12 15:38

Body:

FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification:

FCC part 2 and 15

Detailed Results:

Type: BE L004

Frequency ran	Frequency range 9 kHz - 1 GHz												
Modulation	TX Frequency (MHz)	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]		Margin QPK [dB]	Result						
		Ver + Hor					Passed						

Frequency ran	ge 1 GHz - 25 G	iHz								
Modulation	TX Frequency (MHz)	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	value PK			Margin AV [dB]	Result
FSK	2402	Ver + Hor	74	54	1600	53.87	37.59	20.13	16.41	Passed
FSK	2480	Ver + Hor	74	54	1600	54.24	37.59	19.76	16.41	Passed
PSK	2402	Ver + Hor	74	54	1600	53.62	37.52	20.38	16.48	Passed
PSK	2441	Ver + Hor	74	54	1600	53.75	37.90	20.25	16.10	Passed
PSK	2480	Ver + Hor	74	54	1600	53.98	36.05	20.02	17.95	Passed

Remark 1: No (further) spurious emissions in the range 20 dB below the limit found.

Remark 2: For PSK modulation, the measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.

Worst Case Selection

Type: BE L004 has been considered as worst case, do to highest spurious emissions



FCC ID: 2ACRLBEL005

Test1: 15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power

Result:

Passed

Setup No.:

CC01_L005

Date of Test:

2014/08/18 10:33

Body:

FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification:

FCC part 2 and 15

Detailed Results:

Type: BE L005

Frequency range 9 kHz - 1 GHz

Modulation TX Frequency (MHz) Ant. [dBµV] Frequency [MHz] Corrected value QPK [dB] Result [dBµV] [dBµV] Passed

Modulation	TX Frequency (MHz)	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	[MHz]	value PK	value AV		Margin AV [dB]	Result
						[dBµV]	[dBµV]			
FSK	2402	Ver + Hor	74	54	1200	54.44	33.86	19.56	20.14	Passed
FSK	2441	Ver + Hor	74	54	1600	53.74	34.66	20.26	19.34	Passed
FSK	2480	Ver + Hor	74	54	1200	55.30	34.50	18.70	19.50	Passed
FSK	2480	Ver + Hor	74	54	1600	54.36	34.68	19.64	19.32	Passed
PSK	2402	Ver + Hor	74	54	1600	55.75	34.68	18.25	19.32	Passed
PSK	2441	Ver + Hor	74	54	1200	55.55	34.50	18.45	19.50	Passed
PSK	2441	Ver + Hor	74	54	1600	56.12	34.76	17.88	19.24	Passed
PSK	2441	Ver + Hor	74	54	1200	53.56	34.57	20.44	19.43	Passed
PSK	2441	Ver + Hor	74	54	1600	54.62	34.67	19.38	19.33	Passed

Remark 1: No (further) spurious emissions in the range 20 dB below the limit found.

Remark 2: For PSK modulation, the measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.



FCC ID: 2ACRLBEL005

Test1: 15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power

Result:

Passed

Setup No.:

BB01_L003

Date of Test:

2014/10/18 10:08

Body:

FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification:

FCC part 2 and 15

Detailed Results:

Type: BE L003

Modulation	TX Frequency			Margin QPK [dB]	Result
		Ver + Hor			Passed

Frequency range 1 GHz - 25 GHz

Modulation	(MHz)			[dBµV]	[MHz]	value PK			AV [dB]	Result
FSK	2441	Ver + Hor	74	54	1600	52.75	35.26	21.25	18.74	Passed
PSK										

Remark 1: No (further) spurious emissions in the range 20 dB below the limit found.

Remark 2: For PSK modulation, the measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.



15c.3 Occupied bandwidth §15.247 (a) (1) 3.5.2

Test: 15c.3; Occupeid Bandwidth Summary

Result:

Setup No.: DB01_L004

2014/06/25 15:39 Date of Test:

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES


Test Specification: FCC part 2 and 15



FCC ID: 2ACRLBEL005

Detailed Results:

Modulation	Frequency	Occupied Bandwidth MHz		
	2402 MHz	0.9440		
GFSK	2441 MHz	0.9440		
	2480 MHz	0.9380		
	2402 MHz	1.2760		
PI/4 DQPSK	2441 MHz	1.2760		
	2480 MHz	1.2700		
	2402 MHz	1.2450		
8DPSK	2441 MHz	1.2450		
	2480 MHz	1.1910		

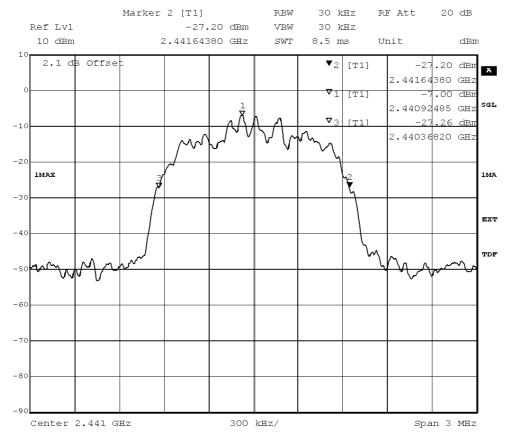

20dB Bandwidth

Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1275.6 Date: 25.JUN.2014 08:42:07



15c.4 Peak power output §15.247 (b) (1) 3.5.3

Test1: 15c.4; Peak power output Summary

Setup No.: DB01_L004

Date of Test: 2014/06/25 15:40

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15



FCC ID: 2ACRLBEL005


Detailed Results:

Type: L004		Conducted Transmitter Power							
Antenna Gain: -5.0 dBi		2402 MHz		2441 MHz		2480 MHz			
		Output	Output	Output	Output	Output	Output		
		Power	Power	Power	Power	Power	Power		
Modulation	Conditions	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)		
GFSK	TN, VN	-2.14	0.61	-3.32	0.47	-3.07	0.49		
п/4 DQPSK	TN, VN	-0.71	0.85	-1.66	0.68	-1.11	0.77		
8-DPSK	TN, VN	-0.11	0.97	-1.12	0.77	0.96	1.25		

Max Conducted Output Power (FSK Modulation)	-2.14	dBm	0.61	mW
Max Conducted Output Power (PSK Modulation)	0.96	dBm	1.25	mW

Worst Case Selection

Type L004 has been considered as worst case, due to highest output power value

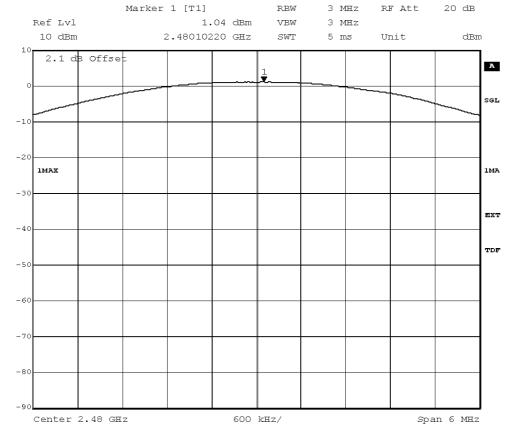

Title: Peak outputpower Power Comment A: CH T: 2480 MHz
Date: 27.JUN.2014 10:10:56 Title:



Test1: 15c.4; Peak power output Summary

Result: Passed

Setup No.: AC01_L005

Date of Test: 2014/07/04 16:18

FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES Body:

Test Specification: FCC part 2 and 15

Detailed Results:

Type: BE LO	05	Conducted Transmitter Power					
Antenna Gain	ı: -5.0 dBi	2402 MHz		2441 MHz		2480 MHz	
		Output	Output	Output	Output	Output	Output
		Power	Power	Power	Power	Power	Power
Modulation	Conditions	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)
GFSK	TN, VN	-1.6	0.69	-2.54	0.56	-2.3	0.59
п/4 DQPSK	TN, VN	-0.16	0.96	-0.83	0.83	-0.4	0.91
8-DPSK	TN, VN	-0.05	0.99	-0.94	0.81	-0.41	0.91

Max Conducted Output Power (FSK Modulation)	-1.6	dBm	0.69	mW
Max Conducted Output Power (PSK Modulation)	-0.05	dBm	0.99	mW

Test2: 15c.4; Peak power output Summary

Result: Passed

Setup No.: BA01_L003

Date of Test: 2014/07/04 16:50

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Type: BE L0	03		Conducted Transmitter Power						
Antenna Gain: -5.0 dBi		2402 MHz		2441 MHz		2480 MHz			
		Output	Output	Output	Output	Output	Output		
		Power	Power	Power	Power	Power	Power		
Modulation	Conditions	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)		
GFSK	TN, VN	-2.56	0.55	-3.21	0.48	-3.73	0.42		
п/4 DQPSK	TN, VN	-1.09	0.78	-1.64	0.69	-2.1	0.62		
8-DPSK	TN, VN	-1.21	0.76	-1.66	0.68	-2.17	0.61		

Max Conducted Output Power (FSK Modulation)	-2.56	dBm	0.55	mW
Max Conducted Output Power (PSK Modulation)	-1.09	dBm	0.78	mW



3.5.4 15c.5 Spurious RF conducted emissions §15.247 (d)

Test: 15c.5; = BT transmit mode: Low/Mid/High Frequency

Passed

Setup No.: DB01_L004

2014/06/25 15:45 Date of Test:

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




FCC ID: 2ACRLBEL005

Detailed Results:

betailed Results	<u> </u>				
Mode / Channel	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK / 2402	-		-2.86		None found
GFSK / 2441	-		-3.82		None found
GFSK / 2480	-		-3.59		None found
4 DQPSK / 2402	-		-3.45		None found
4 DQPSK / 2441	-		-4.29		None found
4 DQPSK / 2480	-		-3.86		None found
8DPSK / 2402	-		-3.21		None found
8DPSK / 2441	-		-4.37		None found
8DPSK / 2480	-		0.65		None found

* No futher peaks found within 20 dB of the limit line.

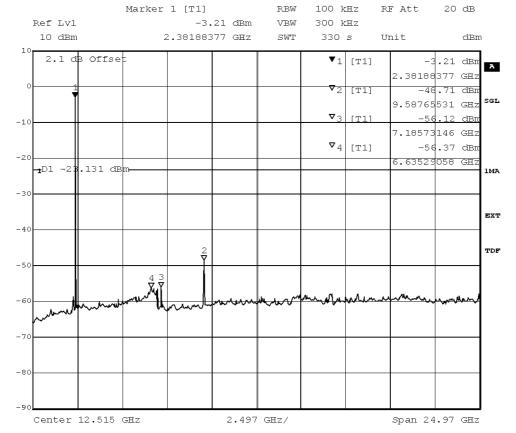

Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 25.JUN.2014 07:59:36



Result:

Reference: MDE_HARMAN_1303_FCCe_LevelC acc. to Title 47 CFR chapter I part 15 subpart C FCC ID: 2ACRLBEL005

15c.6 Band edge compliance §15.247 (d) 3.5.5

Passed

Test: 15c.6; Band edge compliance Summary

Setup No.: DB01_L004

2014/06/25 15:43 Date of Test:

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




FCC ID: 2ACRLBEL005

Detailed Results:

Method: conducted

non-hopping mode

	Frequency	Measured value	Reference value	Limit	Margin to limit
Modulation	MHz	dBm	dBm	dBm	dB
GFSK	2400	-61.67	-2.49	-22.49	39.18
4DQPSK	2400	-55.45	-3.26	-23.26	32.19
8DPSK	2400	-53.86	-3.13	-23.13	30.73
GFSK	2483.5	-64.08	-3.44	-23.44	40.64
4DQPSK	2483.5	-61.34	-3.85	-23.85	37.49
8DPSK	2483.5	-61.04	-3.56	-23.56	37.48




Pitle: Band Edge Compliance Comment A: CH B: 2402 MHz Date: 25.JUN.2014 07:47:35

Method: conducted

hopping mode (according FCC Public Notice DA 00-705)


	Frequency	Measured value	Reference value	Limit	Margin to limit
Modulation	MHz	dBm	dBm	dBm	dB
GFSK	2400	-53.32	-2.78	-22.78	30.54
4DQPSK	2400	-54.08	-3.16	-23.16	30.92
8DPSK	2400	-53.08	-3.15	-23.15	29.93
GFSK	2483.5	-53.98	-3.97	-23.97	30.01
4DQPSK	2483.5	-54.01	-4.22	-24.22	29.79
8DPSK	2483.5	-53.9	-4.29	-24.29	29.61





Method = radiated

Modulation	TX on	_	-	Limit AV [dBµV]	•	[dBµV]		_	Margin AV [dB]	Result
GFSK	2480 MHz	Ver + Hor	74	54	2483.5	47.23	35.22	26.77	18.78	Passed
PI/4 DQPSK	2480 MHz	Ver + Hor	74	54	2483.5	48.33	35.35	25.67	18.65	Passed
8DPSK	2480 MHz	Ver + Hor	74	54	2483.5	48.85	35.35	25.15	18.65	Passed

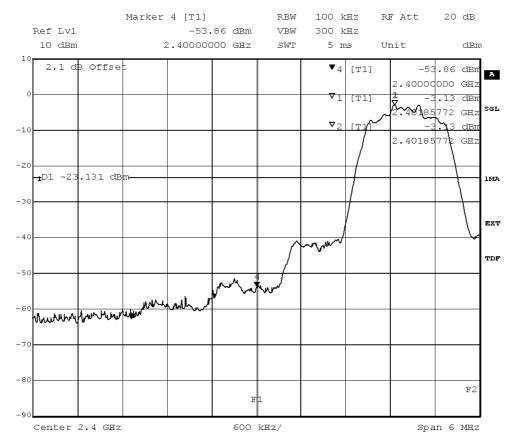

Title: Band Edge Compliance
Comment A: CE B: 2402 MHz
Date: 25.JUN.2014 07:47:35



FCC ID: 2ACRLBEL005

3.5.6 15c.7 Dwell time §15.247 (a) (1) (iii)

Test: 15c.7; Dwell time Summary

Result: Passed

Setup No.: DB01_L004


Date of Test: 2014/06/25 15:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Packet type	Time slot length	Dwell time	Dwell time ms
GFSK	DH5	2.91	time slot length * 1600/5 /79 * 31.6	372.48
4-DQPSK	2-DH5	2.91	time slot length * 1600/5 /79 * 31.6	372.48
8DPSK	3-DH5	2.81	time slot length * 1600/5 /79 * 31.6	359.68

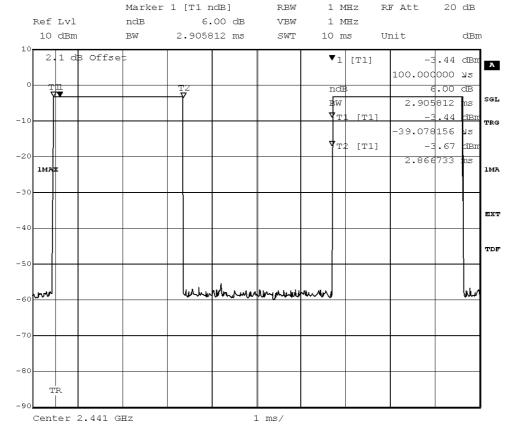

Title: Dwell time
Comment A: CH M: 2441 MHz
Date: 25.JUN.2014 09:05:04



FCC ID: 2ACRLBEL005

3.5.7 15c.8 Channel separation §15.247 (a) (1)

Test: 15c.8; Channel separation Summary

Result: Passed

Setup No.: DB01_L004


Date of Test: 2014/06/25 15:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Channel Seperation
GFSK	1 MHz
PI/4 DQPSK	1 MHz
8DPSK	1 MHz

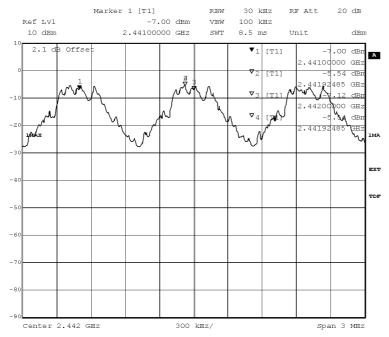

Title: Channel separation
Comment A: CH H: Hopping
Date: 27.JUN.2014 10:22:56



FCC ID: 2ACRLBEL005

3.5.8 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)

Test: 15c.9; Number of hopping frequencies Summary

Result: Passed

Setup No.: DB01_L004


Date of Test: 2014/06/25 15:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Number of hopping channels
GFSK	79
PI/4 DQPSK	79
8DPSK	79

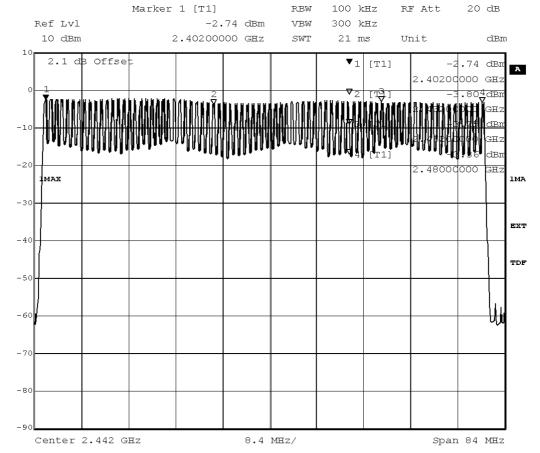

Title: Number of hopping frequencies Comment A: CH H: Hopping

Comment A: CH H: Hopping
Date: 27.JUN.2014 10:31:55



Test Equipment Details

4.1 **List of Used Test Equipment**

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID: Lab 1 Manufacturer: Frankonia

Description: Anechoic Chamber for radiated testing

10.58x6.38x6.00 m³ Type:

Calibration Details Last Execution Next Exec. 2014/01/09 2017/01/09 NSA (FCC)

Single Devices for Anechoic Chamber

Single Device Name	Туре	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ Calibration Details	none	Frankonia Last Execution Next Exec.
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	ВВ4312-С30-Н3	-	Siemens&Matsushita



Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 1

Equipment for emission measurements Description:

Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

_			
Single Device Name	Туре	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
Biconical dipole	VUBA 9117 Calibration Details	9117-108	Schwarzbeck Last Execution Next Exec.
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	Calibration Details Standard Calibration		Last Execution Next Exec. 2012/06/26 2015/06/25
High Dans Eller		0042011	, ,
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Logper. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard Calibration		2012/12/18 2015/12/17
Logper. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH



Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Туре	Serial Number	Manufacturer
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH)

Test Equipment Auxiliary Test Equipment

Lab ID: Lab 1

Manufacturer: see single devices

Description: Single Devices for various Test Equipment

Type: various Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Туре	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
,	Calibration Details		Last Execution Next Exec.
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/07/29 2014/07/28
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Test Equipment Digital Signalling Devices

Lab ID: Lab 1

Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

	-		
Single Device Name	Туре	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	СВТ	100589	Rohde & Schwarz GmbH & Co. KG
5¢ 52.	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	HW/SW Status		Date of Start Date of End
	B11, B21V14, B21-2, B41, B52V14, B53-2, B56V14, B68 3v04, PCMCIA, Software: K21 4v21, K22 4v21, K23 4v21, K24 K43 4v21, K53 4v21, K56 4v22, K57 K59 4v22, K61 4v22, K62 4v22, K68 Firmware: μP1 8v50 02.05.06	U65V04 4 4v21, K42 4v21, 7 4v22, K58 4v22, 8 4v22, K64 4v22, 8 4v22, K69 4v22	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/12/07 2014/12/06
	HW/SW Status		Date of Start Date of End
	HW options: B11, B21V14, B21-2, B41, B52V14, B54V14, B56V14, B68 3v04, B95, P0 SW options: K21 4v11, K22 4v11, K23 4v11, K24 K28 4v10, K42 4v11, K43 4v11, K53 K66 4v10, K68 4v10, Firmware: μP1 8v40 01.12.05 SW:	CMCIA, U65V02 4 4v11, K27 4v10,	2007/01/02
	K62, K69		
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



Test Equipment Emission measurement devices

Lab ID: Lab 1

Description: Equipment for emission measurements

Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Туре	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/05/13 2015/05/12
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/05/13 2015/05/12
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard Calibration		2014/01/07 2016/01/31
	HW/SW Status		Date of Start Date of End
	Firmware-Update 4.34.4 from 3.45	during calibration	2009/12/03

Test Equipment Multimeter 12

Lab 2 Lab ID:

Ex-Tech 520 Description: Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Туре	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
,	Calibration Details		Last Execution Next Exec.
	Customized calibration	·	2013/12/04 2015/12/03



Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 2

Description: Regulatory Bluetooth RF Tests

Type: Bluetooth RF

Serial Number:

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Туре	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
orne ob r	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/08/28 2014/08/27
	Standard calibration		2014/08/29 2015/08/28
Power Meter NRVD	NRVD Calibration Details	832025/059	Last Execution Next Exec.
	Standard calibration Standard calibration		2013/08/26 2014/08/25 2014/08/29 2015/08/28
	Standard Cambration		2014/08/29 2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/08/28 2014/08/27
	Standard calibration		2014/08/28 2015/08/27
Power Supply	NGSM 32/10	2725	
,	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/06/20 2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/08/27 2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
223. 4.0. 5 4005	Calibration Details		Last Execution Next Exec.
	Standard calibration		2013/06/21 2016/06/20

Test Equipment Shielded Room 07

Lab ID:

Shielded Room 4m x 6m Description:



FCC ID: 2ACRLBEL005

Test Equipment T/A Logger 13

Lab ID: Lab 1

Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Туре	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
,	Calibration Details		Last Execution Next Exec.
	Customized calibration		2013/02/07 2015/02/06

Test Equipment T/H Logger 12

Lab ID: Lab 1

Description: Lufft Opus10 Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Туре	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
,	Calibration Details		Last Execution Next Exec.
	Customized calibration		2013/01/07 2015/01/06

Test Equipment T/H Logger 15

Lab ID:Lab 2Description:Lufft Opus10Serial Number:13985

Single Devices for T/H Logger 15

Single Device Name	Туре	Serial Number	Manufacturer
ThermoHygro Datalogger 15 (Environ)	Opus10 THI (8152.00)	13985	Lufft Mess- und Regeltechnik GmbH
,	Calibration Details		Last Execution Next Exec.
	Customized calibration		2013/01/07 2015/01/06

Test Equipment Temperature Chamber 01

Lab ID: Lab 2

Manufacturer: see single devices

Description: Temperature Chamber KWP 120/70

Type: Weiss

Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Туре	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	Calibration Details		Last Execution Next Exec.
	Customized calibration		2014/03/12 2016/03/11



- 5 **Annex**
- 5.1 **Additional Information for Report**



Summary o	of Test Results		
The EUT complied with all performed tests as listed in the summary section of this report.			
Technical R	Report Summary		
Type of Au	thorization :		
Certification	n for an Intentional Radiator (Frequency Hopping Spread Spectrum).		
Applicable	FCC Rules		
	n accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 e following subparts are applicable to the results in this test report		
Part 2, Sub	part J - Equipment Authorization Procedures, Certification		
Part 15, Su	bpart C – Intentional Radiators		
§ 15.201	Equipment authorization requirement		
§ 15.207	Conducted limits		
§ 15.209	Radiated emission limits; general requirements		
§ 15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz		
additional o	documents		
30, 2000. 1	vere selected and performed with reference to the FCC Public Notice DA 00-705, released March Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI 9 is applied.		
Description	of Methods of Measurements		
Conducted	emissions (AC power line)		
Standard	FCC Part 15, Subpart C		

The test was performed according to: ANSI C 63.4,

Test Description



FCC ID: 2ACRLBEL005

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50µH || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold

- Frequency range: 150 kHz - 30 MHz

- Frequency steps: 5 kHz - IF-Bandwidth: 9 kHz

- Measuring time / Frequency step: 20 ms

- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak - IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead reference ground (PE grounded)
- 2) Phase lead reference ground (PE grounded)
- 3) Neutral lead reference ground (PE floating)
- 4) Phase lead reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz) QP Limit (dBμV) AV Limit (dBμV) 0.15 - 0.566 to 56 56 to 46

0.5 - 5 56 46 5 - 3050

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

FCC Part 15, Subpart C Standard

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30

The EUT was connected to the spectrum analyzer via a short coax cable.



FCC ID: 2ACRLBEL005

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

- 1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = 1.0 MHz / 2/3 = 1.5 MHz
- If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) ==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss. Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz



FCC ID: 2ACRLBEL005

- Video Bandwidth (VBW): 300 kHz

- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4–2009. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 0.15 and 0.15 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz 10 kHz
- Measuring time / Frequency step: 100 ms
- 2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 1000 MHz
- Frequency steps: 60 kHzIF-Bandwidth: 120 kHz
- Measuring time / Frequency step: $100 \mu s$ (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°



FCC ID: 2ACRLBEL005

- Turntable step size: 90°

- Height variation range: 1 - 3 m - Height variation step size: 2 m Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak - Maxhold

- Measured frequencies: in step 1 determined frequencies

- IF - Bandwidth: 120 kHz - Measuring time: 100 ms

- Turntable angle range: -180 to +180° - Turntable step size: 45°

- Height variation range: 1 - 4 m - Height variation step size: 0.5 m Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for

each frequency (of step 1):

- Frequency

- Azimuth value (of turntable)

- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°

- Antenna height: 0.5 m Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $+/-22.5^{\circ}$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± -25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak - Maxhold

- Measured frequencies: in step 1 determined frequencies

- IF - Bandwidth: 120 kHz - Measuring time: 100 ms

- Turntable angle range: -22.5° to +22.5° around the determined value

- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)

- Measured frequencies: in step 1 determined frequencies

- IF - Bandwidth: 120 kHz - Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.



FCC ID: 2ACRLBEL005

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHzLimit (μ V/m) Measurement distance (m) Limit(dB μ V/m @10m) 0.009 - 0.49 2400/F(kHz) 300 Limit (dB μ V/m)+30dB 0.49 - 1.705 24000/F(kHz) 30 Limit (dB μ V/m)+10dB

1.705 - 30 30 30 Limit (dBμV/m)+10dB

Frequency in MHzLimit (µV/m) Measurement distance (m) Limit (dBµV/m)

30 - 88 100 3 40.0 88 - 216 150 3 43.5 216 - 960 200 3 46.0 above 960 500 3 54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit $(dB\mu V/m) = 20 \log (Limit (\mu V/m)/1\mu V/m)$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the



FCC ID: 2ACRLBEL005

desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

. . .

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Dwell time

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = 1600 * 1/s for DH1 packets = 1600 s-1
- hop rate = 1600/3 * 1/s for DH3 packets = 533.33 s-1
- hop rate = 1600/5 * 1/s for DH5 packets = 320 s-1
- number of hopping channels = 79
- 31.6 s = 0.4 seconds multiplied by the number of hopping channels = 0.4 s * 79

The highest value of the dwell time is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

Channel separation

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits



FCC ID: 2ACRLBEL005

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Number of hopping frequencies

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement.

The number of hopping frequencies is independent from the modulation pattern. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

Detector: Peak-MaxholdCentre frequency: 2442 MHz

- Frequency span: 84 MHz

Resolution Bandwidth (RBW): 100 kHzVideo Bandwidth (VBW): 300 kHz

- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.

Bluetooth® equipment:

Measurement FCC reference IC reference
Conducted emissions on AC mains § 15.207 RSS-Gen Issue 3: 7.2.4
Occupied bandwidth § 15.247 (a) (1) RSS-210 Issue 8: A8.1
Peak power output § 15.247 (b) (1) RSS-210 Issue 8: A8.4

Spurious RF conducted emissions § 15.247 (d) RSS-Gen Issue 3: 6;RSS-210 Issue 8: A8.5 Spurious radiated emissions § 15.247 (d) RSS-Gen Issue 3: 6;RSS-210 Issue 8: A8.5

Band edge compliance § 15.247 (d) RSS-210 Issue 8: A8.5

Dwell time § 15.247 (a) (1) (iii) RSS-210 Issue 8: A8.1

Channel separation § 15.247 (a) (1) RSS-210 Issue 8: A8.1

No. of hopping frequencies § 15.247 (a) (1) RSS-210 Issue 8: A8.1


Antenna requirement § 15.203 / 15.204 RSS-Gen Issue 8: 7.1.2

Digital Apparatus:

MeasurementFCC referenceIC referenceConducted Emissions(AC Power Line)§15.107ICES-003 Issue 5Spurious Radiated Emissions§15.109ICES-003 Issue 5



Setup Drawings

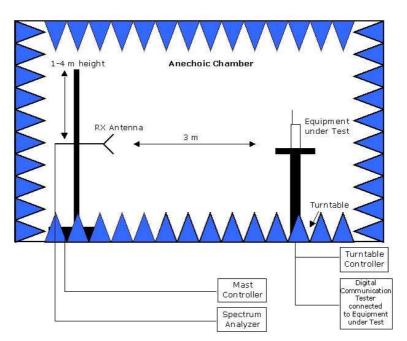

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane. Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



6 **Index**

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	2
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	4
2.1 General OUT Description	4
2.2 Detailed Description of OUT Samples	5
2.3 OUT Features	7
2.4 Setups used for Testing	8
3 Results	9
3.1 General	9
3.2 List of the Applicable Body	9
3.3 List of Test Specification	9
3.4 Summary	10
3.5 Detailed Results	11
3.5.1 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	11
3.5.2 15c.3 Occupied bandwidth §15.247 (a) (1)	14
3.5.3 15c.4 Peak power output §15.247 (b) (1)	16
3.5.4 15c.5 Spurious RF conducted emissions §15.247 (d)	19
3.5.5 15c.6 Band edge compliance §15.247 (d)	21
3.5.6 15c.7 Dwell time §15.247 (a) (1) (iii)	24
3.5.7 15c.8 Channel separation §15.247 (a) (1)	25
3.5.8 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	26
4 Test Equipment Details	27
4.1 List of Used Test Equipment	27
5 Annex	34



	Reference: MDE_HARMAN_1303_FCCe_LevelC
	acc. to Title 47 CFR chapter I part 15 subpart C
	FCC ID: 2ACRLBEL005
5.1 Additional Information for Report	34
6 Index	44