



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Fax: +86-512-66308368
Web: www.mrt-cert.com

Report No.: 1511RSU00904
Report Version: V01
Issue Date: 12-30-2015

MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 ZigBee 802.15.4

FCC ID: 2ACS5-CGO4

IC: 11554B-CGO4

APPLICANT: Yuneec Technology Co., Limited

Application Type: Certification

Product: 3-Axis Gimbal Camera

FCC Model No.: CGO4***** (The “*” can be 0 to 9, a to z, A to Z, blank or plus, for marketing purpose.)

IC Model No.: CGO4

Brand Name: YUNEEC

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15.247

IC Rule(s): RSS-247 Issue 1

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v03r03

Test Date: November 20 ~ December 24, 2015

Reviewed By :

(Robin Wu)

Approved By :

(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r03. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1511RSU00904	Rev. 01	Initial report	12-30-2015

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Standard	7
2.3. Operation Frequency / Channel List	7
2.4. Description of Available Antennas	8
2.5. Description of Antenna RF Port	8
2.6. Test Mode	8
2.7. Test Software	8
2.8. Device Capabilities	9
2.9. Test Configuration	9
2.10. EMI Suppression Device(s)/Modifications	9
2.11. Labeling Requirements	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT	15
7.1. Summary	15
7.2. 6dB Bandwidth Measurement	16
7.2.1. Test Limit	16
7.2.2. Test Procedure used	16
7.2.3. Test Setting	16
7.2.4. Test Setup	16
7.2.5. Test Result	17
7.3. Output Power Measurement	18

7.3.1.	Test Limit	18
7.3.2.	Test Procedure Used	18
7.3.3.	Test Setting.....	18
7.3.4.	Test Setup.....	18
7.3.5.	Test Result of Peak Output Power	19
7.4.	Power Spectral Density Measurement	20
7.4.1.	Test Limit	20
7.4.2.	Test Procedure Used	20
7.4.3.	Test Setting.....	20
7.4.4.	Test Setup.....	20
7.4.5.	Test Result.....	21
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	22
7.5.1.	Test Limit	22
7.5.2.	Test Procedure Used	22
7.5.3.	Test Settiting	22
7.5.4.	Test Setup.....	23
7.5.5.	Test Result.....	24
7.6.	Radiated Spurious Emission Measurement	26
7.6.1.	Test Limit	26
7.6.2.	Test Procedure Used	26
7.6.3.	Test Setting.....	26
7.6.4.	Test Setup.....	28
7.6.5.	Test Result.....	30
7.7.	Radiated Restricted Band Edge Measurement	42
7.7.1.	Test Result.....	42
7.8.	AC Conducted Emissions Measurement.....	58
7.8.1.	Test Limit	58
7.8.2.	Test Setup.....	58
7.8.3.	Test Result.....	58
8.	CONCLUSION.....	59

§2.1033 General Information

Applicant:	Yuneec Technology Co., Limited
Applicant Address:	2/F Man Shung Industrial Building, 7 Lai Yip Street, Kwun Tong, Hong Kong
Manufacturer:	Yuneec International (China) Co., Ltd.
Manufacturer Address:	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.247
IC Rule:	RSS-247 Issue 1
FCC Model No.:	CGO4***** (The “*” can be 0 to 9, a to z, A to Z, blank or plus, for marketing purpose.)
IC Model No.:	CGO4
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	3-Axis Gimbal Camera
IC Model No.	CGO4
FCC Model No.	CGO4***** (The “*” can be 0 to 9, a to z, A to Z, blank or plus, for marketing purpose.)
WLAN Specification	802.11a
ZigBee Specification	802.15.4

2.2. Product Specification Subjective to this Standard

Product Specification Subjective to this Standard	
Frequency Range	2405 ~ 2475 MHz
Number of Channels	15
Channel Spacing	5MHz
Type of Modulation	O-QPSK
Maximum Output Power	16.51dBm

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel List


Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz

2.4. Description of Available Antennas

Antenna Type	Manufacturer	Frequency Band (GHz)	Max Peak Gain (dBi)
Dipole Antenna 1#	Yuneec Technology Co., Limited	2.4	1.71
Dipole Antenna 2#		2.4	1.71
Omni-directional Antenna 1#		5.8	-3.66
Omni-directional Antenna 2#		5.8	-3.66

Note: For 2.4GHz ZigBee & 5.8GHz WLAN, it has two diversity antennas (TX and RX) which are used to avoid dropouts due to multipath fading. Only one antenna is selected for use at any time through the on-board RF switch.

2.5. Description of Antenna RF Port

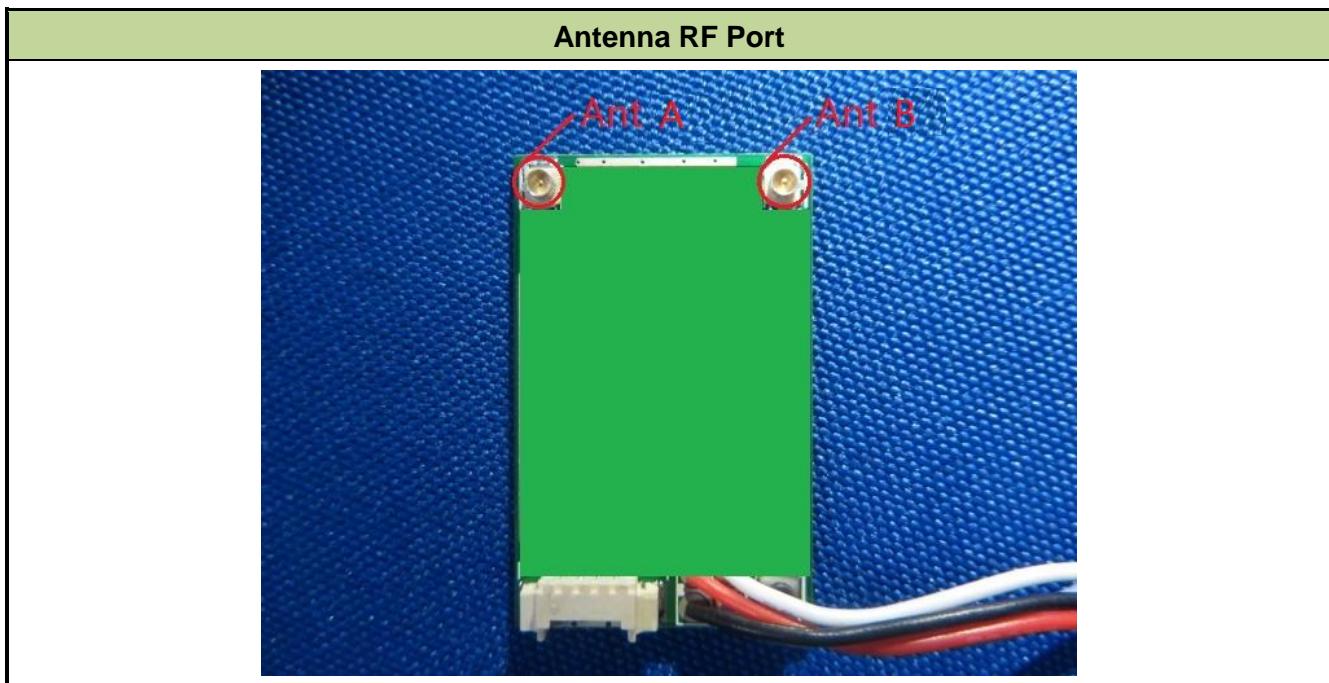

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.15.4
-----------	------------------------------

2.7. Test Software


The test utility software used during testing was engineering directive ordered by applicant.

2.8. Device Capabilities

This device contains the following capabilities:

2.4GHz Zigbee (DTS) and 5.8GHz WLAN (UNII)

Note: 2.4GHz Zigbee (DTS) operation is possible in 5MHz channel bandwidth. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

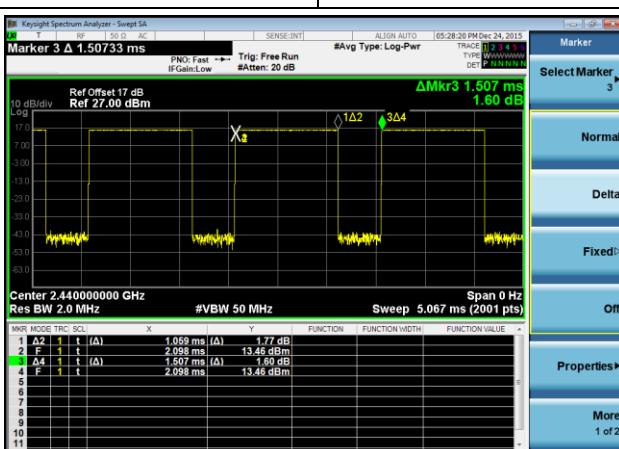Test Mode	Duty Cycle																																																																							
802.15.4	70.27%																																																																							
 <p>The screenshot shows a Keysight Spectrum Analyzer interface. The main display shows a signal with markers labeled Δ2 and Δ4. The status bar indicates a center frequency of 2.440000000 GHz, a resolution bandwidth of 2.0 MHz, a video bandwidth of 50 MHz, a sweep time of 5.067 ms (2001 points), and a span of 0 Hz. The right side of the screen shows a 'Marker' context menu with options: Marker, Select Marker, Normal, Delta, Fixed, Off, Properties, and More. A table below the menu lists markers with their corresponding times and values:</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION HGT/H</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>t (Δ)</td> <td>1.058 ms</td> <td>1.77 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td>2.098 ms</td> <td>13.46 dBm</td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>1</td> <td>t (Δ)</td> <td>1.507 ms</td> <td>1.60 dB</td> </tr> <tr> <td>4</td> <td>F</td> <td>1</td> <td>t</td> <td>2.098 ms</td> <td>13.46 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Marker	X	Y	FUNCTION	FUNCTION HGT/H	FUNCTION VALUE	1	Δ2	1	t (Δ)	1.058 ms	1.77 dB	2	F	1	t	2.098 ms	13.46 dBm	3	Δ4	1	t (Δ)	1.507 ms	1.60 dB	4	F	1	t	2.098 ms	13.46 dBm	5						6						7						8						9						10						11					
Marker	X	Y	FUNCTION	FUNCTION HGT/H	FUNCTION VALUE																																																																			
1	Δ2	1	t (Δ)	1.058 ms	1.77 dB																																																																			
2	F	1	t	2.098 ms	13.46 dBm																																																																			
3	Δ4	1	t (Δ)	1.507 ms	1.60 dB																																																																			
4	F	1	t	2.098 ms	13.46 dBm																																																																			
5																																																																								
6																																																																								
7																																																																								
8																																																																								
9																																																																								
10																																																																								
11																																																																								

2.9. Test Configuration

The **3-Axis Gimbal Camera FCC ID: 2ACS5-CGO4** was tested per the guidance of KDB 558074 D01v03r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r03 were used in the measurement of the **3-Axis Gimbal Camera FCC ID: 2AC55-CGO4**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the 3-Axis Gimbal Camera is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **3-Axis Gimbal Camera FCC ID: 2ACS5-CGO4** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2016/11/03
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2016/11/20

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2016/12/08
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2016/04/16
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2016/03/29
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2016/12/14
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2016/11/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2016/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2016/11/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2016/05/08
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2016/05/08
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06112	1 year	2016/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: Yuneec Technology Co., Limited
FCC ID: 2AC55-CGO4
IC: 11554B-CGO4
FCC Classification: Digital Transmission System (DTS)
Data Rate(s) Tested: 250kbps

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	RSS-247 [5.4(4)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm}$ / 3kHz Band		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc}(\text{Peak})$		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Not Required	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test Bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For the test item 6dB Bandwidth & Power Spectral Density & Band Edge / Out-of-Band Emissions, we selected the worst-case antenna port A to perform testing.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v03r03 – Section 8.2 Option 2

7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

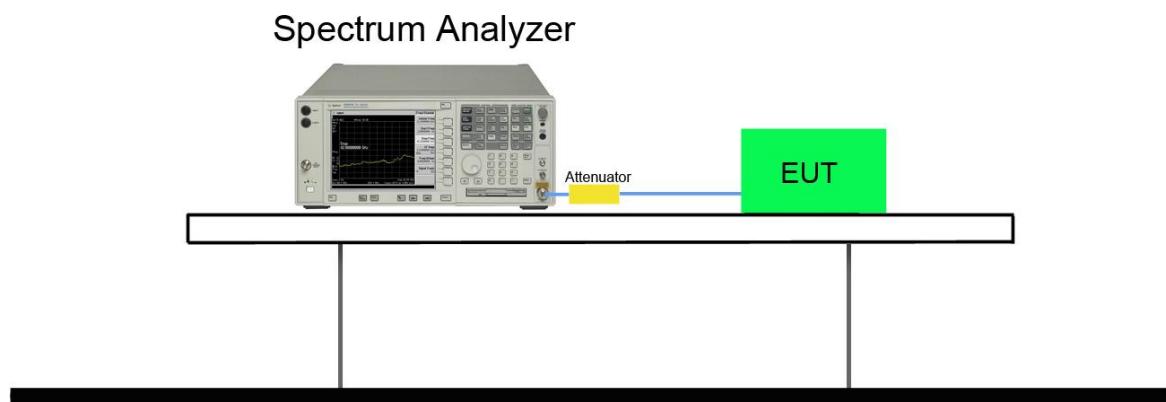

7.2.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.63	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.64	≥ 0.5	Pass
802.15.4	O-QPSK	25	2475	1.65	≥ 0.5	Pass

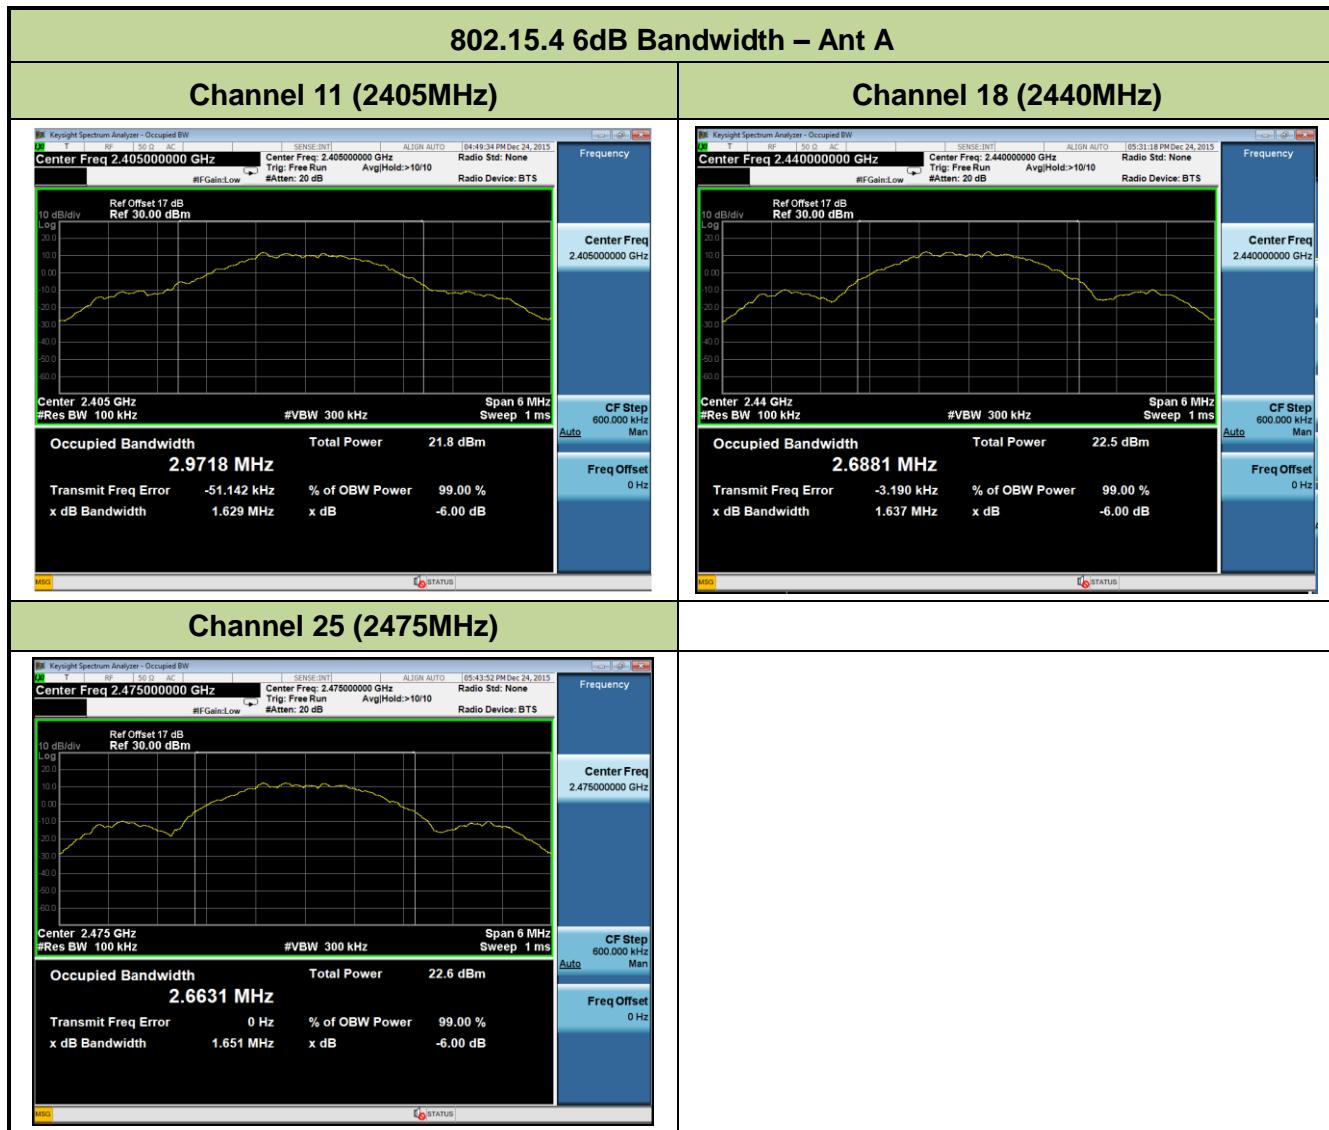

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v03r03 - Section 9.1.2 PKPM1 Peak Power Method (for signals with $BW \leq 50\text{MHz}$)

7.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS $BW \leq 50\text{MHz}$)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a $VBW = 195\text{MHz}$ so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

7.3.4. Test Setup

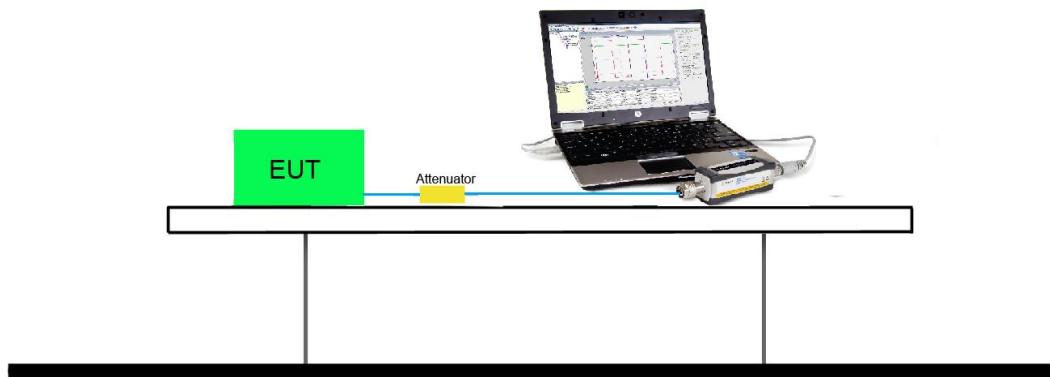

7.3.5. Test Result of Peak Output Power

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Peak Output Power (dBm)		Limit (dBm)	E.I.R.P (dBm)		Limit (dBm)	Result
				Ant A	Ant B		Ant A	Ant B		
802.15.4	O-QPSK	11	2405	15.32	15.49	≤ 30	17.03	17.20	≤ 36	Pass
802.15.4	O-QPSK	18	2440	15.96	15.46	≤ 30	17.67	17.17	≤ 36	Pass
802.15.4	O-QPSK	25	2475	16.51	16.12	≤ 30	18.22	17.83	≤ 36	Pass

Note: E.I.R.P (dBm) = Peak Output Power (dBm) + Antenna Gain (dBi).

Test Result of Average Output Power for Report Only

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Average Output Power (dBm)		Limit (dBm)	E.I.R.P (dBm)		Limit (dBm)	Result
				Ant A	Ant B		Ant A	Ant B		
802.15.4	O-QPSK	11	2405	15.26	14.95	≤ 30	16.97	16.66	≤ 36	Pass
802.15.4	O-QPSK	18	2440	15.82	15.15	≤ 30	17.53	16.86	≤ 36	Pass
802.15.4	O-QPSK	25	2475	15.81	15.94	≤ 30	17.52	17.65	≤ 36	Pass

Note: E.I.R.P (dBm) = Peak Output Power (dBm) + Antenna Gain (dBi).

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


7.4.2. Test Procedure Used

KDB 558074 D01v03r03 - Section 10.2 Method PKPSD

7.4.3. Test Setting


1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

7.4.4. Test Setup

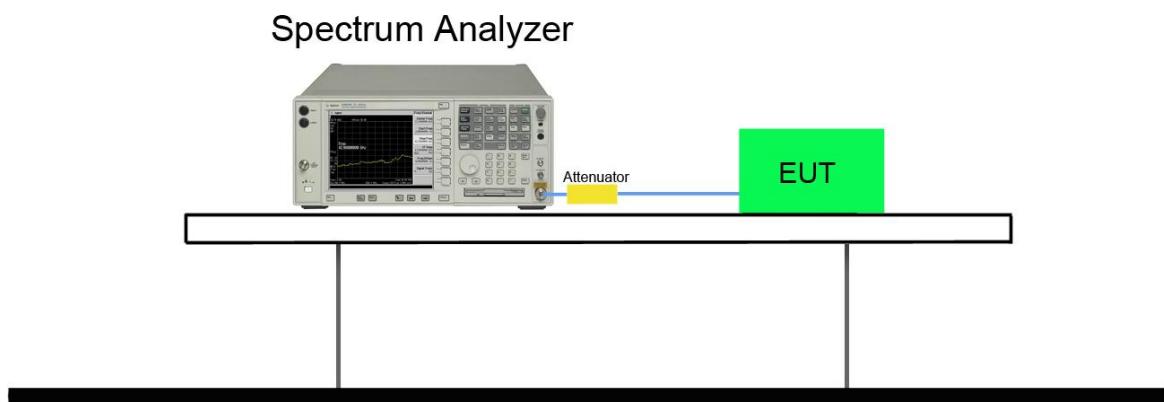

7.4.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.15.4	O-QPSK	11	2405	1.59	≤ 8	Pass
802.15.4	O-QPSK	18	2445	2.71	≤ 8	Pass
802.15.4	O-QPSK	25	2480	2.53	≤ 8	Pass

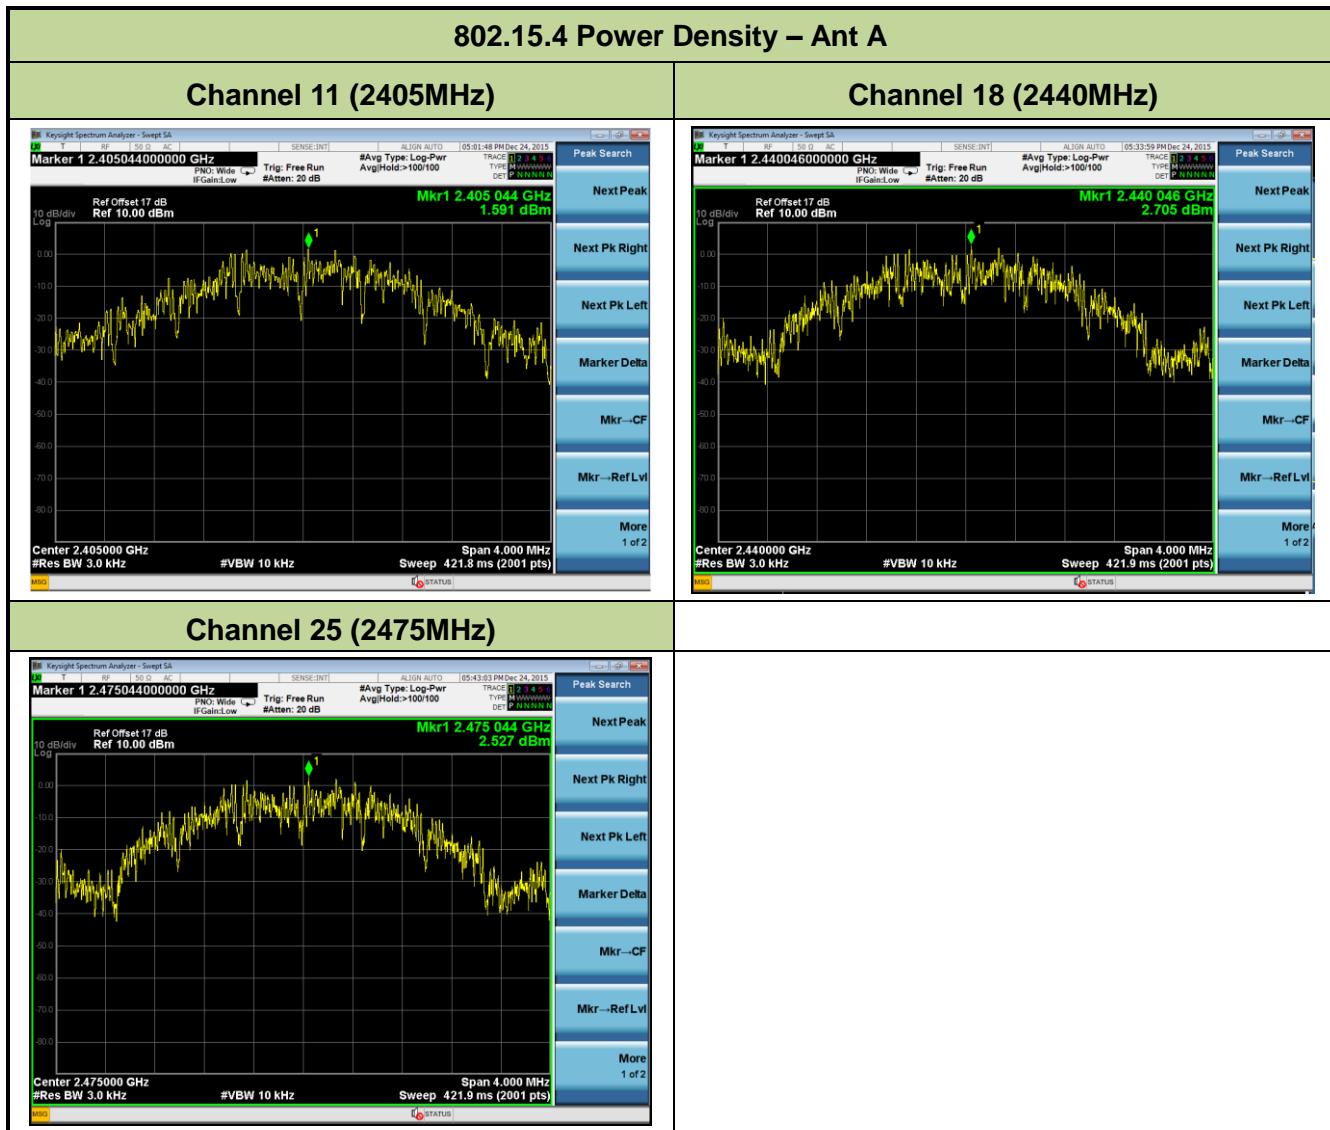

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

KDB 558074 D01v03r03 - Section 11.2 & Section 11.3

7.5.3. Test Setting


1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to \geq 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW \geq 3 x RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement


- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize


7.5.4. Test Setup

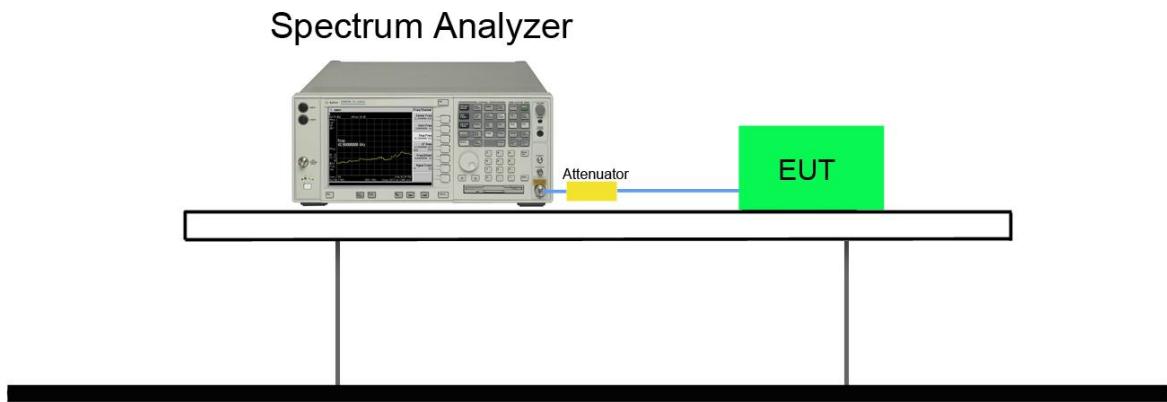

7.5.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Limit	Result
802.15.4	O-QPSK	11	2405	20dBc	Pass
802.15.4	O-QPSK	18	2440	20dBc	Pass
802.15.4	O-QPSK	25	2475	20dBc	Pass

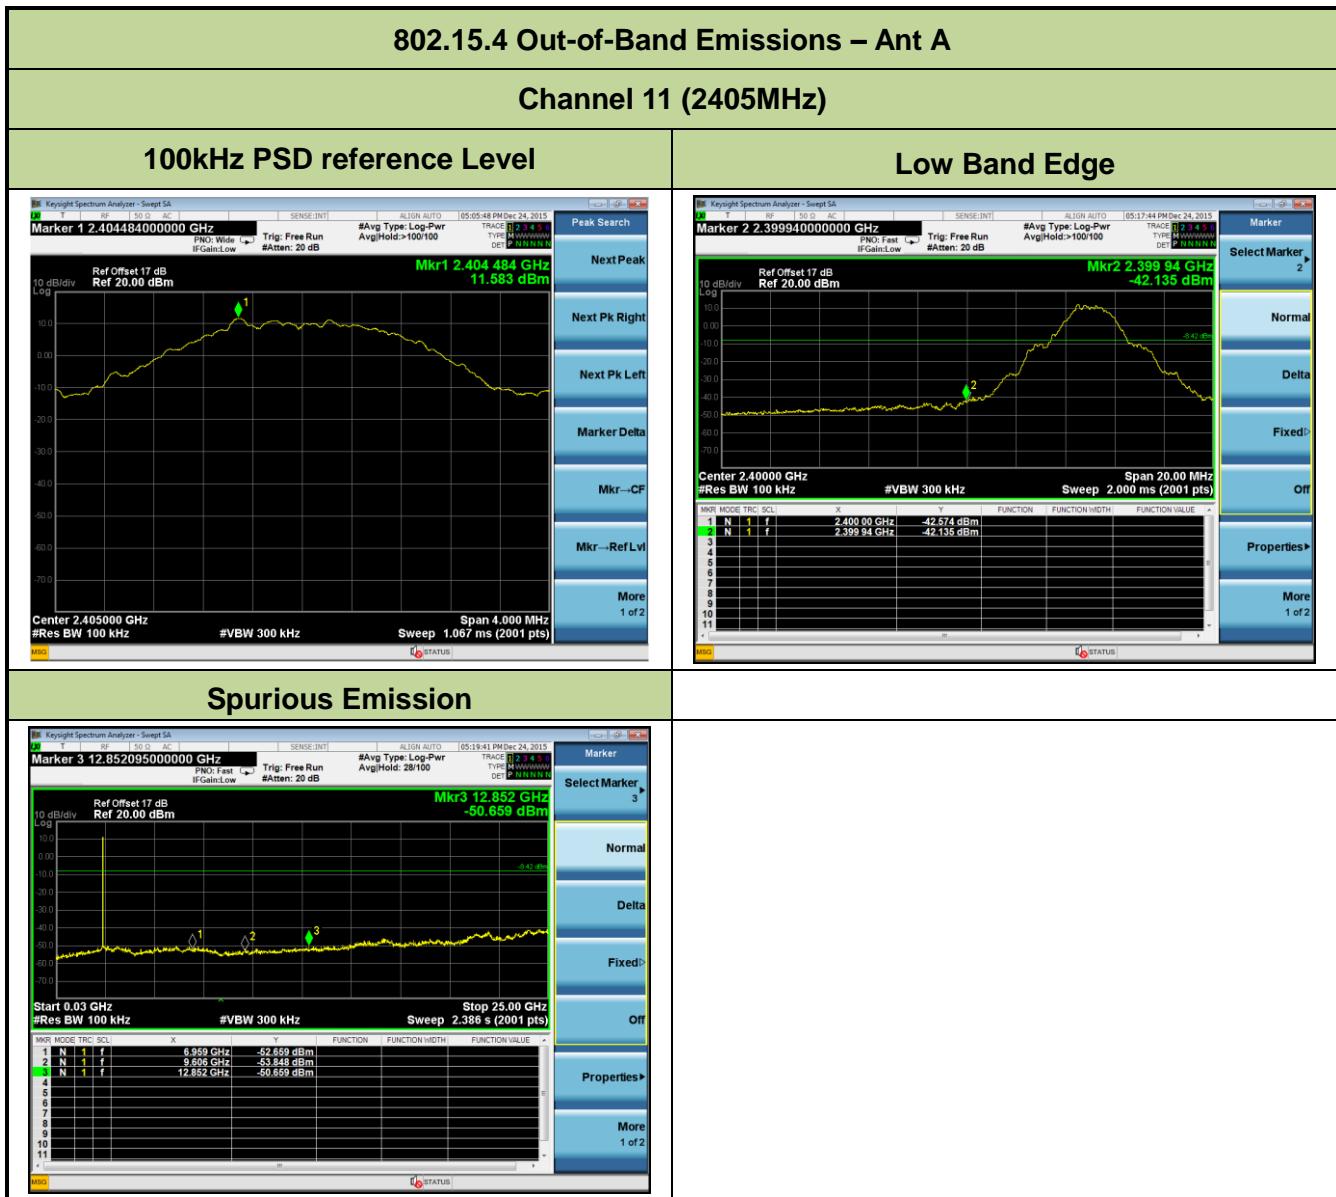

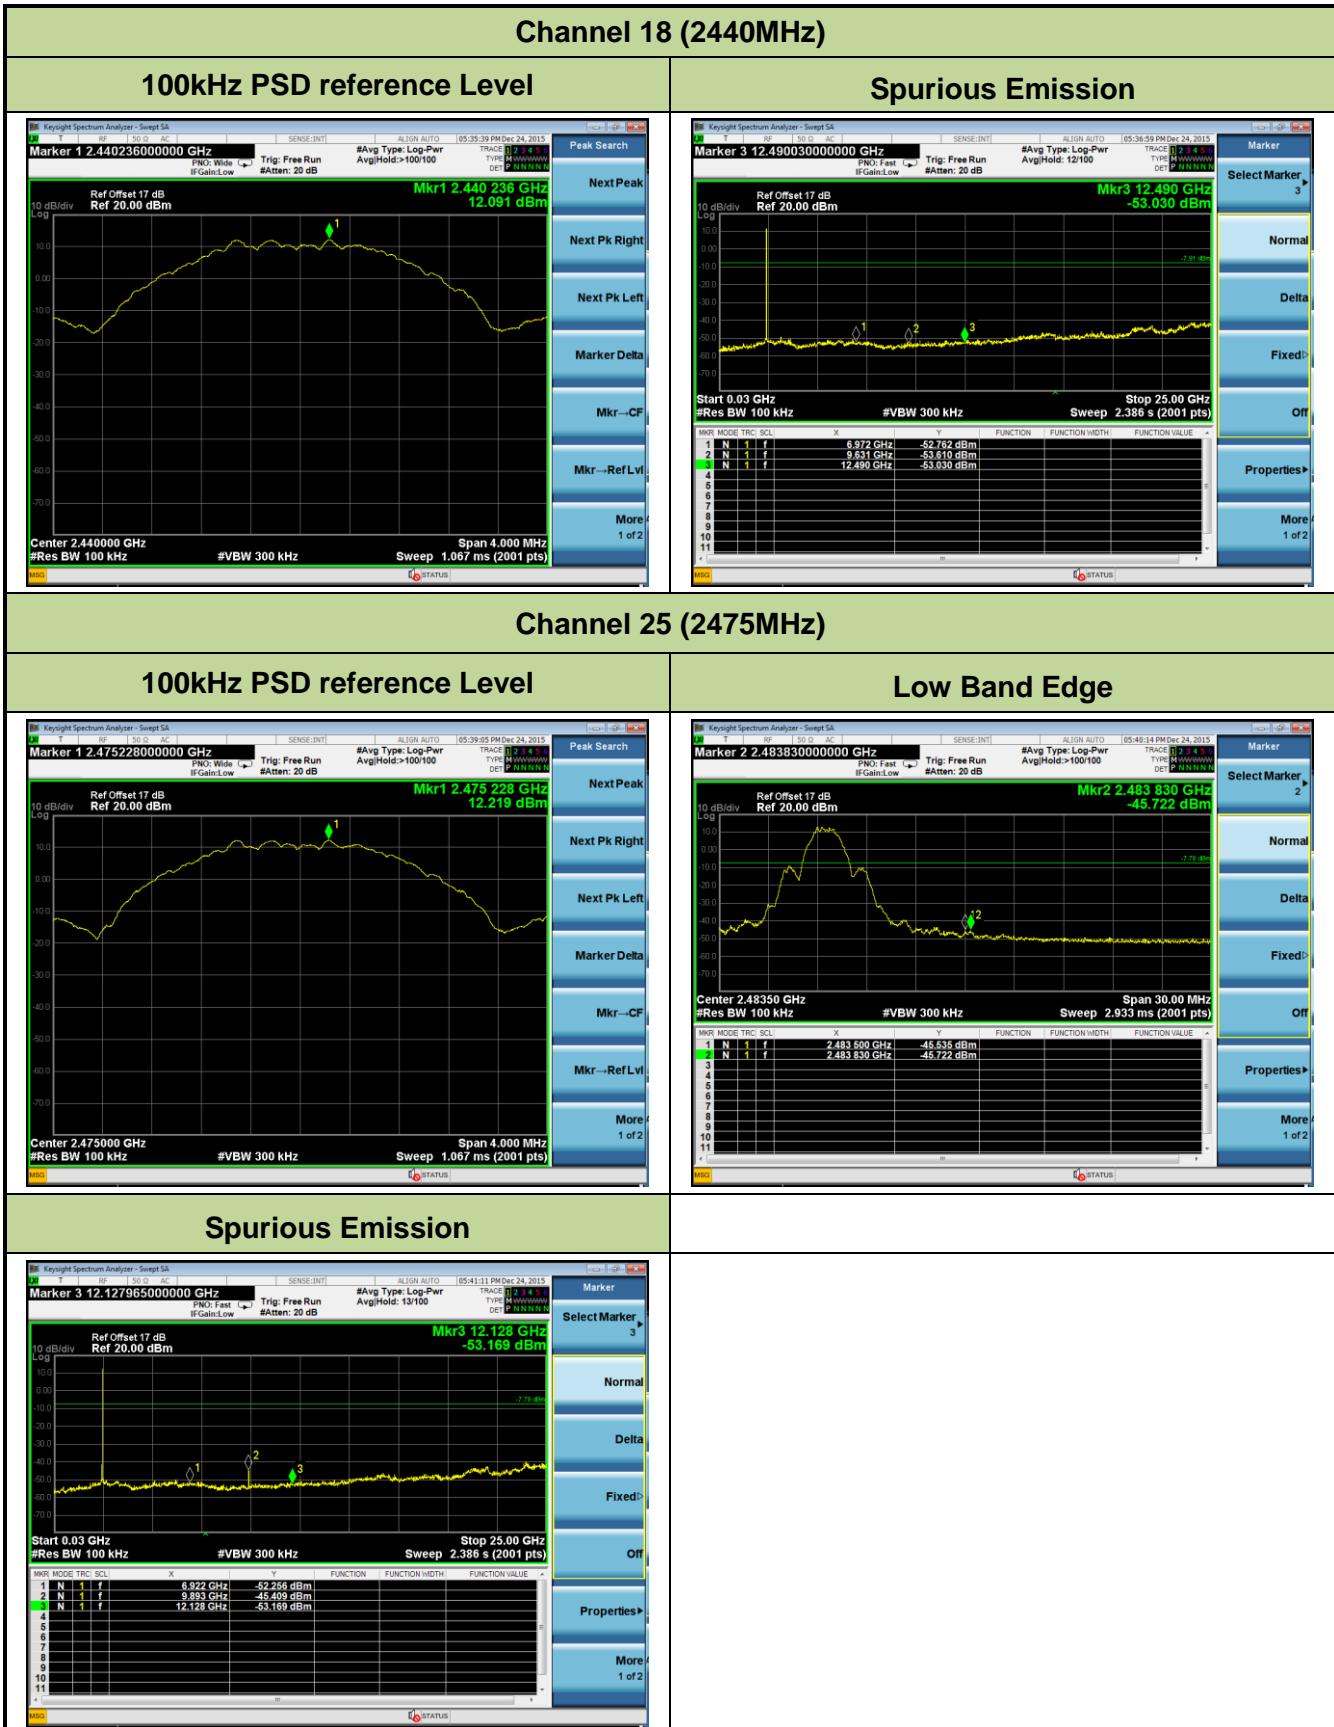

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

KDB 558074 D01v03r03 – Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r03 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r03 – Section 12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r03

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1—RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements per Section 12.2.5.3 of KDB 558074 D01v03r03


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces



7.6.4. Test Setup

9kHz ~ 30MHz Test Setup:

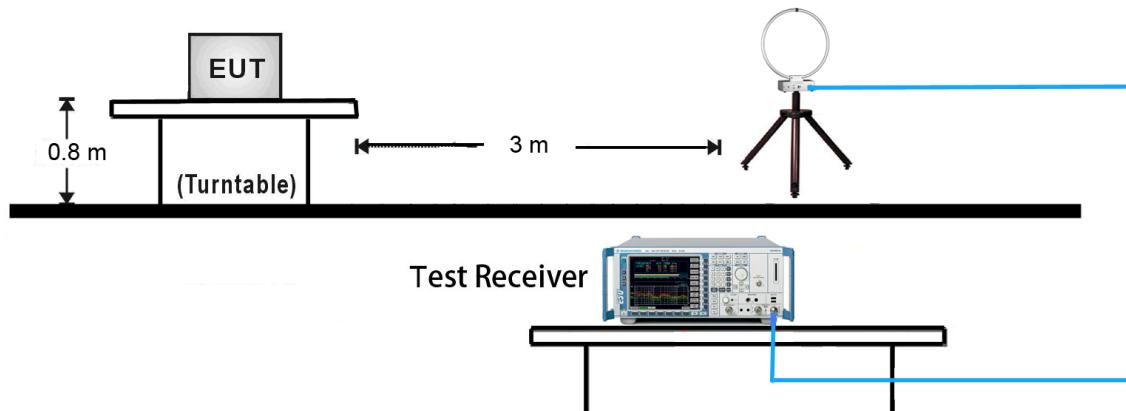

30MHz ~ 1GHz Test Setup:

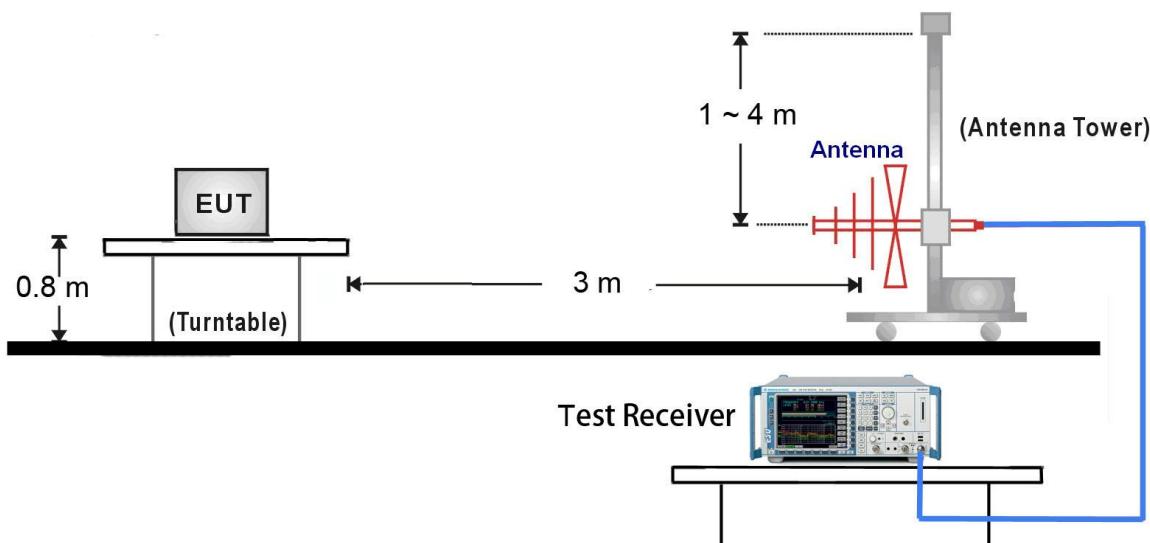

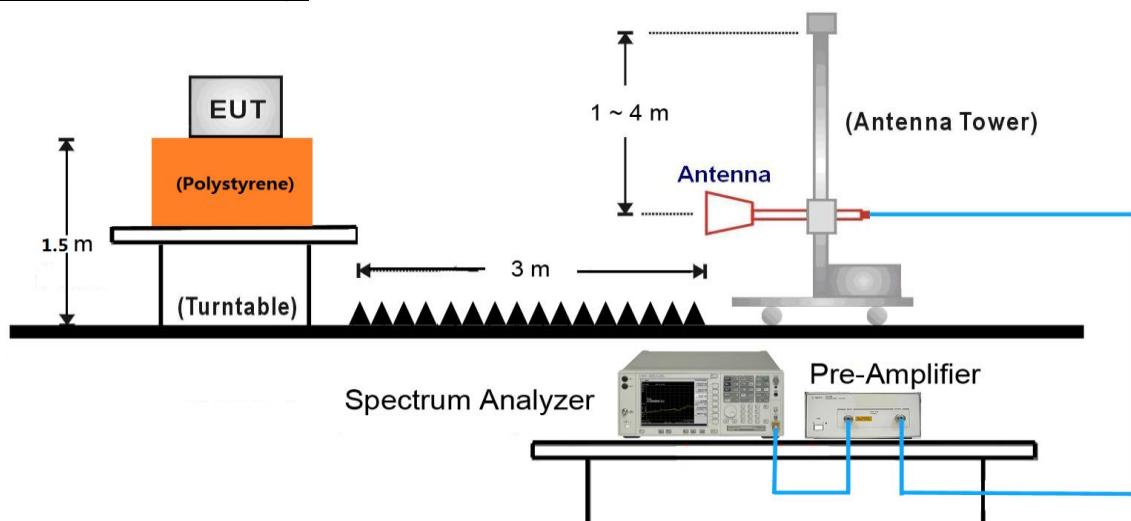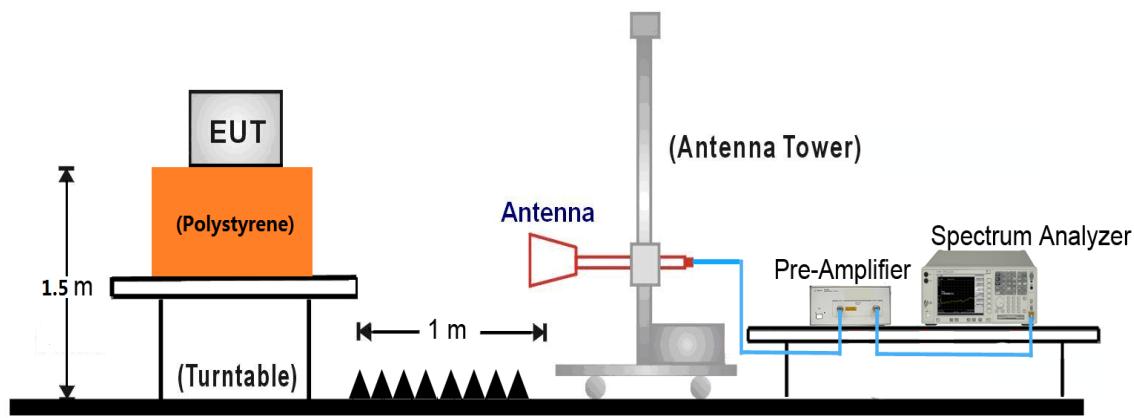1GHz ~ 18GHz Test Setup:

18GHz ~25GHz Test Setup:


7.6.5. Test Result

Test Mode:	802.15.4 – Ant A	Test Site:	AC1
Test Channel:	11	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4808.0	58.6	2.0	60.6	74.0	-13.4	Peak	Horizontal
	4808.0	48.6	2.0	50.6	54.0	-3.4	Average	Horizontal
	5360.5	38.6	2.0	40.6	74.0	-33.4	Peak	Horizontal
*	7213.5	48.6	9.7	58.3	84.8	-26.5	Peak	Horizontal
*	9619.0	41.6	11.1	52.7	84.8	-32.1	Peak	Horizontal
	4808.0	58.0	2.0	60.0	74.0	-14.0	Peak	Vertical
	4808.0	51.2	2.0	53.2	54.0	-0.8	Average	Vertical
	5360.5	38.8	2.0	40.8	74.0	-33.2	Peak	Vertical
*	7213.5	51.9	9.7	61.6	84.8	-23.2	Peak	Vertical
*	9619.0	43.8	11.1	54.9	84.8	-29.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.8dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.15.4 – Ant A	Test Site:	AC1
Test Channel:	18	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4884.5	55.5	2.0	57.5	74.0	-16.5	Peak	Horizontal
	4884.5	48.6	2.0	50.6	54.0	-3.4	Average	Horizontal
	7315.5	49.0	9.7	58.7	74.0	-15.3	Peak	Horizontal
	7315.5	41.2	9.7	50.9	54.0	-3.1	Average	Horizontal
*	9219.5	35.4	11.6	47.0	85.2	-38.2	Peak	Horizontal
*	9755.0	43.3	11.4	54.7	85.2	-30.5	Peak	Horizontal
	4884.5	57.1	2.0	59.1	74.0	-14.9	Peak	Vertical
	4884.5	49.2	2.0	51.2	54.0	-2.8	Average	Vertical
	7315.5	51.5	9.7	61.2	74.0	-12.8	Peak	Vertical
	7315.5	43.6	9.7	53.3	54.0	-0.7	Average	Vertical
*	9763.5	41.9	11.4	53.3	85.2	-31.9	Peak	Vertical
*	10239.5	36.3	12.9	49.2	85.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.2dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.15.4 – Ant A	Test Site:	AC1
Test Channel:	25	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4952.5	51.8	1.9	53.7	74.0	-20.3	Peak	Horizontal
	7426.0	51.2	9.8	61.0	74.0	-13.0	Peak	Horizontal
	7426.0	42.4	9.8	52.2	54.0	-1.8	Average	Horizontal
*	9899.5	45.1	11.8	56.9	82.0	-25.1	Peak	Horizontal
*	10545.5	34.8	13.9	48.7	82.0	-33.3	Peak	Horizontal
	4952.5	53.5	1.9	55.4	74.0	-18.6	Peak	Vertical
	4952.5	43.7	1.9	45.6	54.0	-8.4	Average	Vertical
	7426.0	51.7	9.8	61.5	74.0	-12.5	Peak	Vertical
	7426.0	41.0	9.8	50.8	54.0	-3.2	Average	Vertical
*	9899.5	47.4	11.8	59.2	82.0	-22.8	Peak	Vertical
*	10528.5	33.9	13.9	47.8	82.0	-34.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (102.0dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.15.4 – Ant B	Test Site:	AC1
Test Channel:	11	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4808.0	58.3	2.0	60.3	74.0	-13.7	Peak	Horizontal
	4808.0	46.1	2.0	48.1	54.0	-5.9	Average	Horizontal
	5054.5	38.5	2.2	40.7	74.0	-33.3	Peak	Horizontal
*	7213.5	47.9	9.7	57.6	84.5	-26.9	Peak	Horizontal
*	9619.0	42.8	11.1	53.9	84.5	-30.6	Peak	Horizontal
	4808.0	58.3	2.0	60.3	74.0	-13.7	Peak	Vertical
	4808.0	46.1	2.0	48.1	54.0	-5.9	Average	Vertical
	5071.5	38.2	2.3	40.5	74.0	-33.5	Peak	Vertical
*	7213.5	52.0	9.7	61.7	84.5	-22.8	Peak	Vertical
*	9619.0	43.6	11.1	54.7	84.5	-29.8	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.5dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.15.4 – Ant B	Test Site:	AC1
Test Channel:	18	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4876.0	55.1	1.9	57.0	74.0	-17.0	Peak	Horizontal
	4876.0	42.2	1.9	44.1	54.0	-9.9	Average	Horizontal
	7315.5	48.4	9.7	58.1	74.0	-15.9	Peak	Horizontal
	7315.5	39.9	9.7	49.6	54.0	-4.4	Average	Horizontal
*	9602.0	35.3	11.4	46.7	84.8	-38.1	Peak	Horizontal
*	9755.0	41.0	11.4	52.4	84.8	-32.4	Peak	Horizontal
	4884.5	57.3	2.0	59.3	74.0	-14.7	Peak	Vertical
	4884.5	44.9	2.0	46.9	54.0	-7.1	Average	Vertical
	7315.5	51.3	9.7	61.0	74.0	-13.0	Peak	Vertical
	7315.5	40.6	9.7	50.3	54.0	-3.7	Average	Vertical
*	9619.0	36.4	11.1	47.5	84.8	-37.3	Peak	Vertical
*	9763.5	41.3	11.4	52.7	84.8	-32.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.8dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.15.4 – Ant B	Test Site:	AC1
Test Channel:	25	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4952.5	52.2	1.9	54.1	74.0	-19.9	Peak	Horizontal
	7426.0	51.5	9.8	61.3	74.0	-12.7	Peak	Horizontal
	7426.0	42.4	9.8	52.2	54.0	-1.8	Average	Horizontal
*	9899.5	46.9	11.8	58.7	81.8	-23.1	Peak	Horizontal
*	10214.0	35.1	12.6	47.7	81.8	-34.1	Peak	Horizontal
	4952.5	54.8	1.9	56.7	74.0	-17.3	Peak	Vertical
	4952.5	45.2	1.9	47.1	54.0	-6.9	Average	Vertical
	7426.0	51.5	9.8	61.3	74.0	-12.7	Peak	Vertical
	7426.0	43.2	9.8	53.0	54.0	-1.0	Average	Vertical
*	9636.0	36.4	11.4	47.8	81.8	-34.0	Peak	Vertical
*	9899.5	47.2	11.8	59.0	81.8	-22.8	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (101.8dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2015/12/15 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Worse Case Mode: Transmit at channel 2480MHz Ant A	

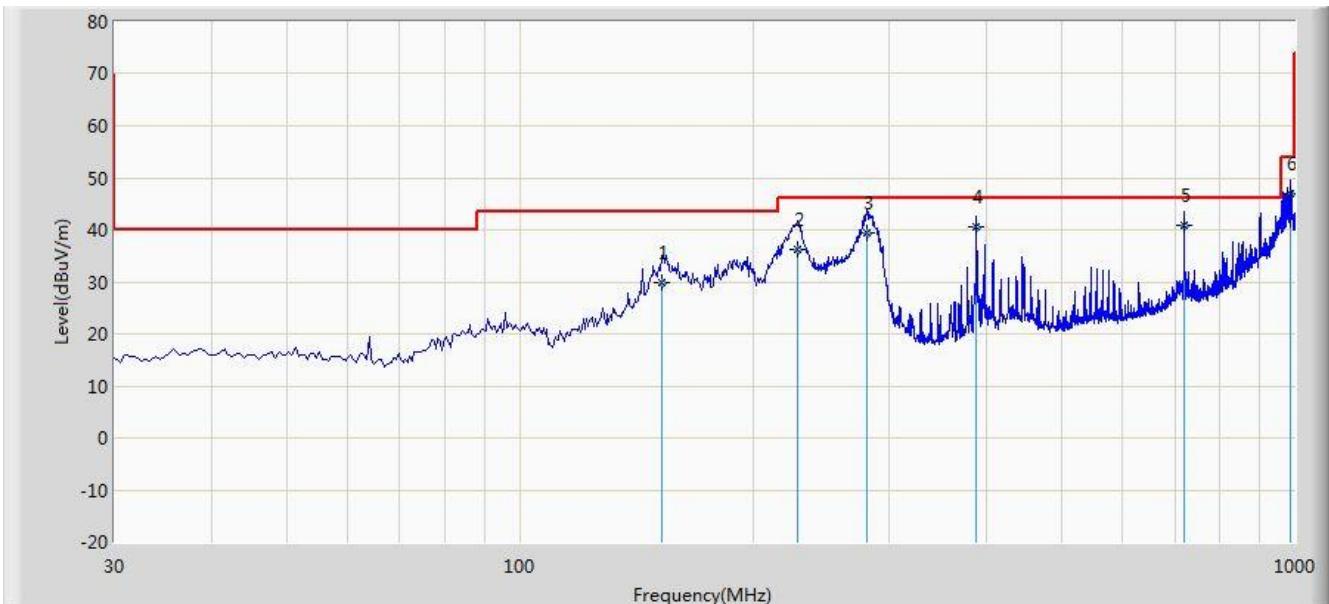


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			152.240	29.918	14.730	-13.582	43.500	15.188	QP
2			228.450	36.264	23.850	-9.736	46.000	12.414	QP
3			280.840	39.537	25.700	-6.463	46.000	13.837	QP
4			388.000	40.493	24.240	-5.507	46.000	16.253	QP
5	*		720.010	40.817	18.530	-5.183	46.000	22.287	QP
6			987.850	46.966	21.890	-7.034	54.000	25.076	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/15 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Worse Case Mode: Transmit at channel 2480MHz Ant A	

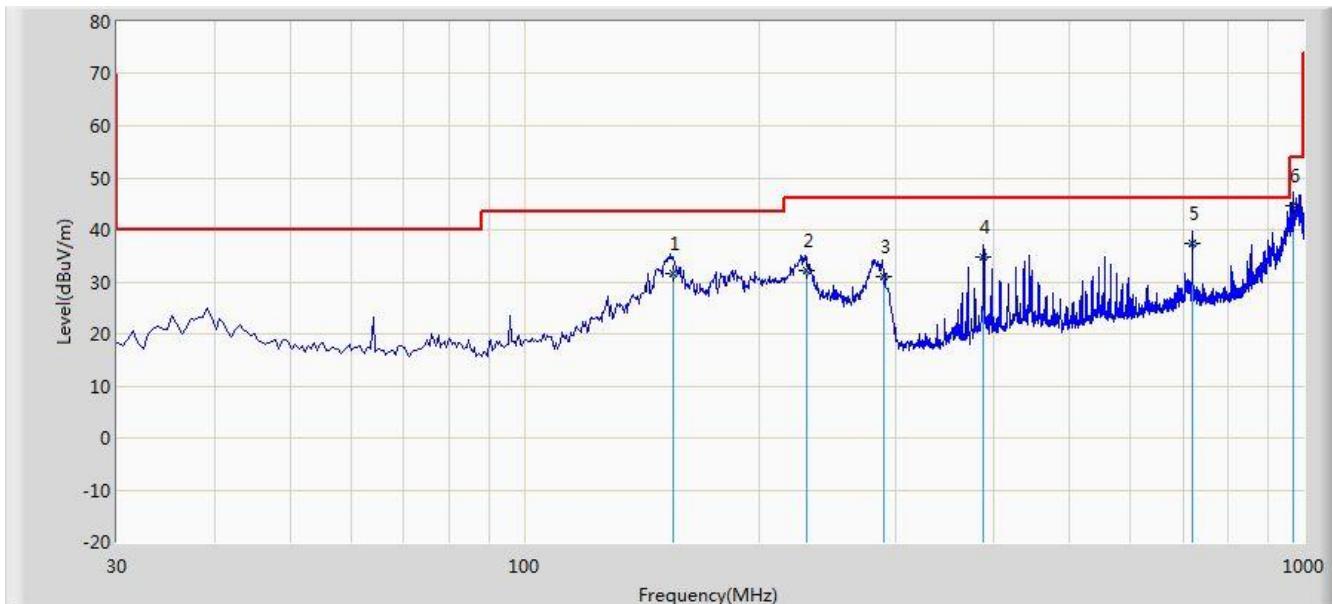


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			155.200	31.675	16.490	-11.825	43.500	15.185	QP
2			230.060	32.144	19.640	-13.856	46.000	12.505	QP
3			288.640	31.025	17.020	-14.975	46.000	14.004	QP
4			388.500	34.899	18.640	-11.101	46.000	16.259	QP
5	*		720.240	37.519	15.230	-8.481	46.000	22.288	QP
6			968.120	44.601	19.600	-9.399	54.000	25.001	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/15 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: 3-Axis Gimbal Camera	Power: By Battery
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

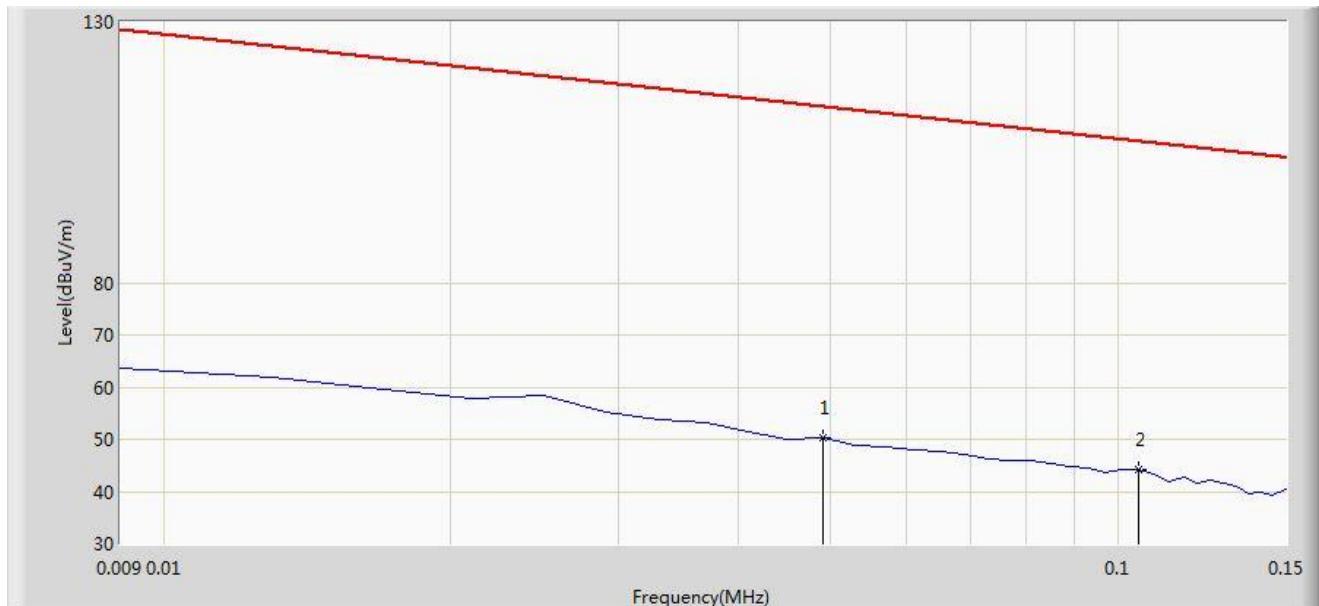


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	PK
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor. (dB).

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/15 - 18:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: 3-Axis Gimbal Camera	Power: By Battery
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

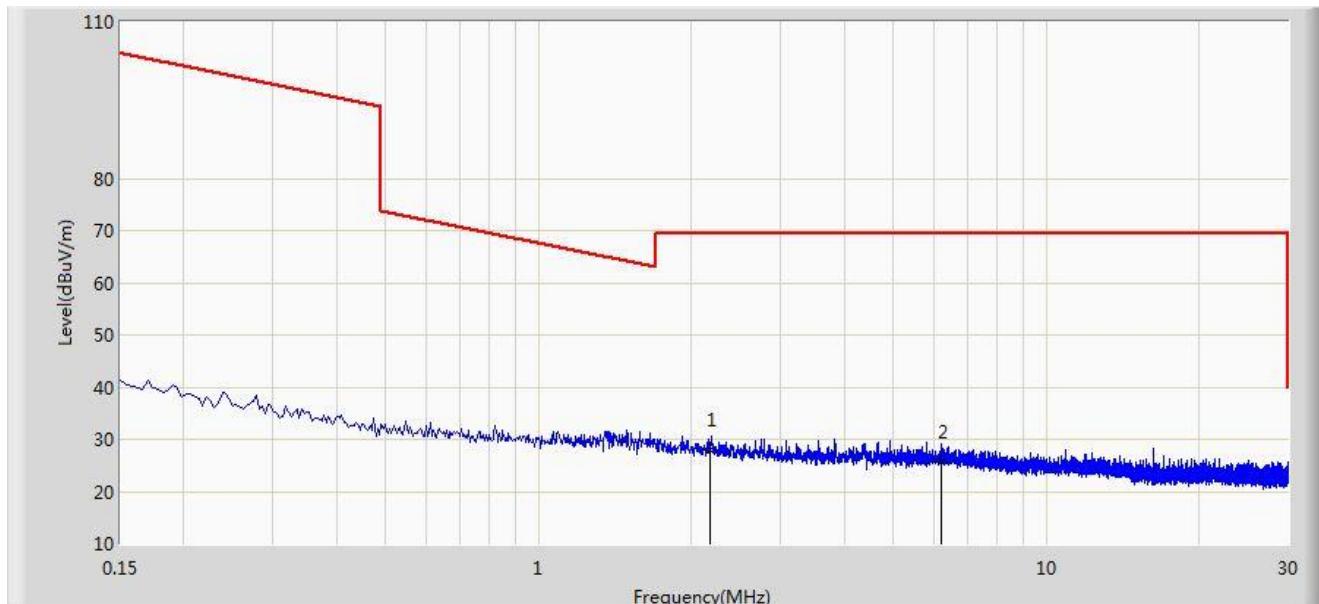


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2.175	27.894	7.735	-41.606	69.500	20.159	QP
2			6.216	25.672	5.318	-43.828	69.500	20.354	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB).

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Limit@3m = $20 \times \log(30\mu\text{V}/\text{m}) + 20 \times \log(30\text{m}/3\text{m}) = 49.5\text{dB}\mu\text{V}/\text{m}$ (Average detector), and $69.5\text{dB}\mu\text{V}/\text{m}$ (Peak detector).

Site: AC1	Time: 2015/12/15- 21:20
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

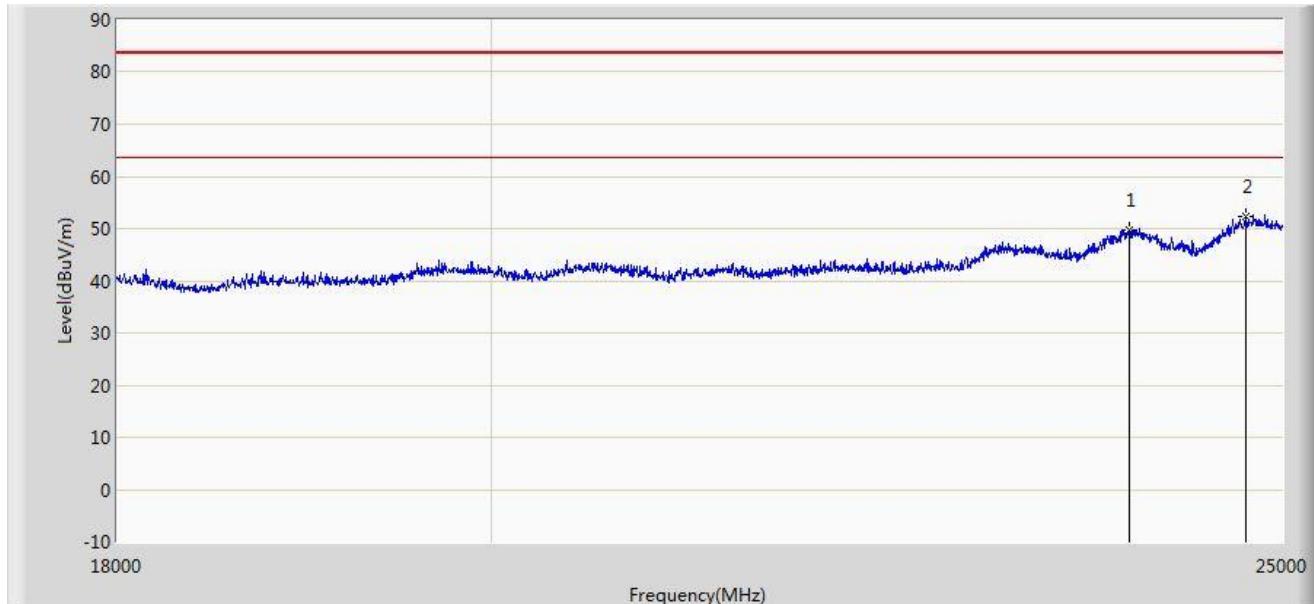


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23943.000	49.776	35.866	-33.724	83.500	13.910	PK
2		*	24741.000	52.375	37.681	-31.125	83.500	14.694	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/15 - 21:32
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery

Note: There is the ambient noise within frequency range 18GHz~25GHz.

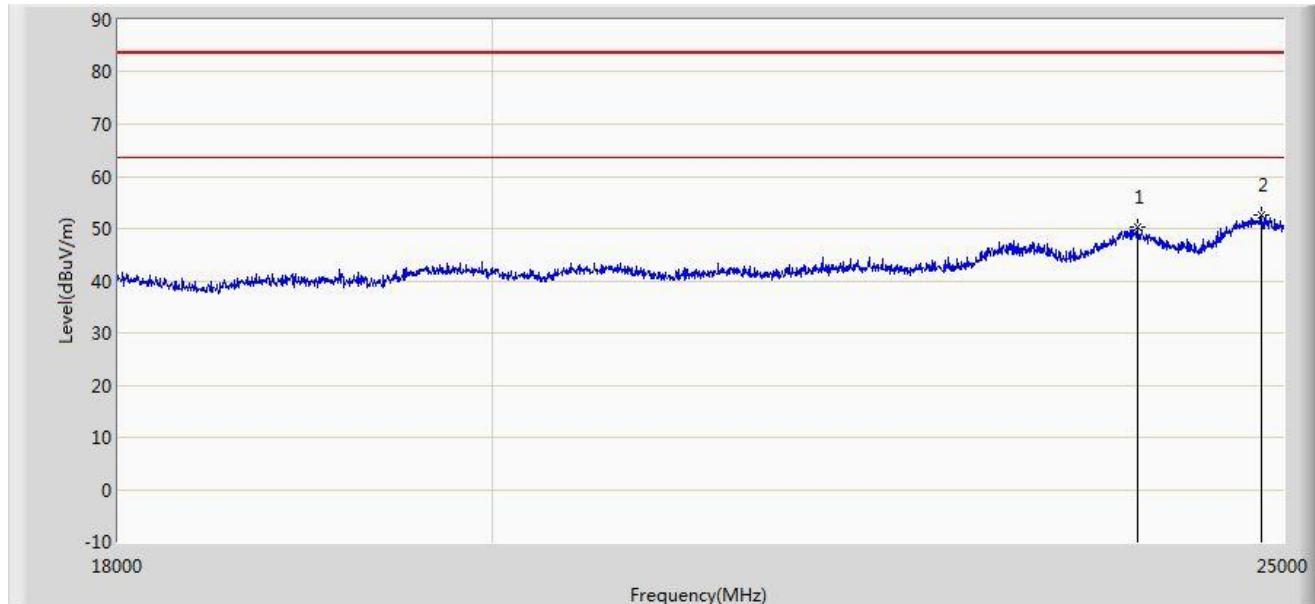

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23999.000	50.379	36.435	-33.121	83.500	13.944	PK
2		*	24846.000	52.503	37.735	-30.997	83.500	14.768	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Limit@1m = $20 \cdot \log(500 \mu V/m) + 20 \cdot \log(3m/1m) = 63.5 \mu V/m$ (Average detector), and $83.5 \mu V/m$ (Peak detector).

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC2	Time: 2015/12/24 - 09:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant A	

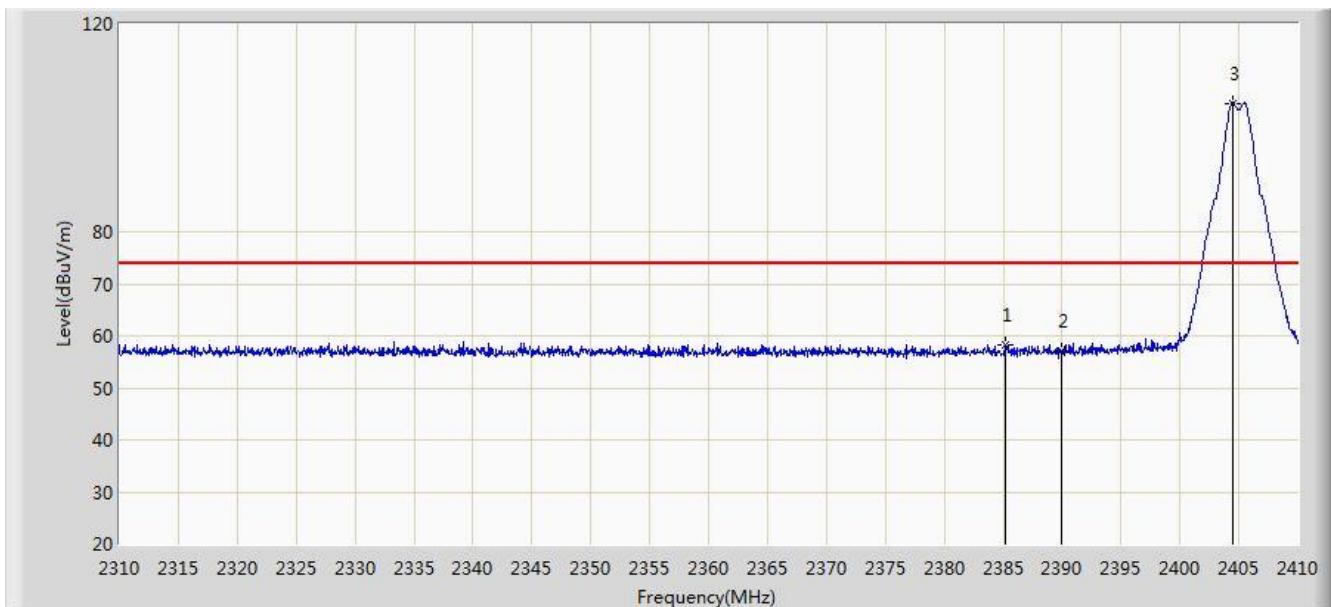


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2385.150	58.253	25.890	-15.747	74.000	32.363	PK
2			2390.000	57.047	24.679	-16.953	74.000	32.368	PK
3		*	2404.500	104.776	72.437	N/A	N/A	32.339	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 09:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant A	

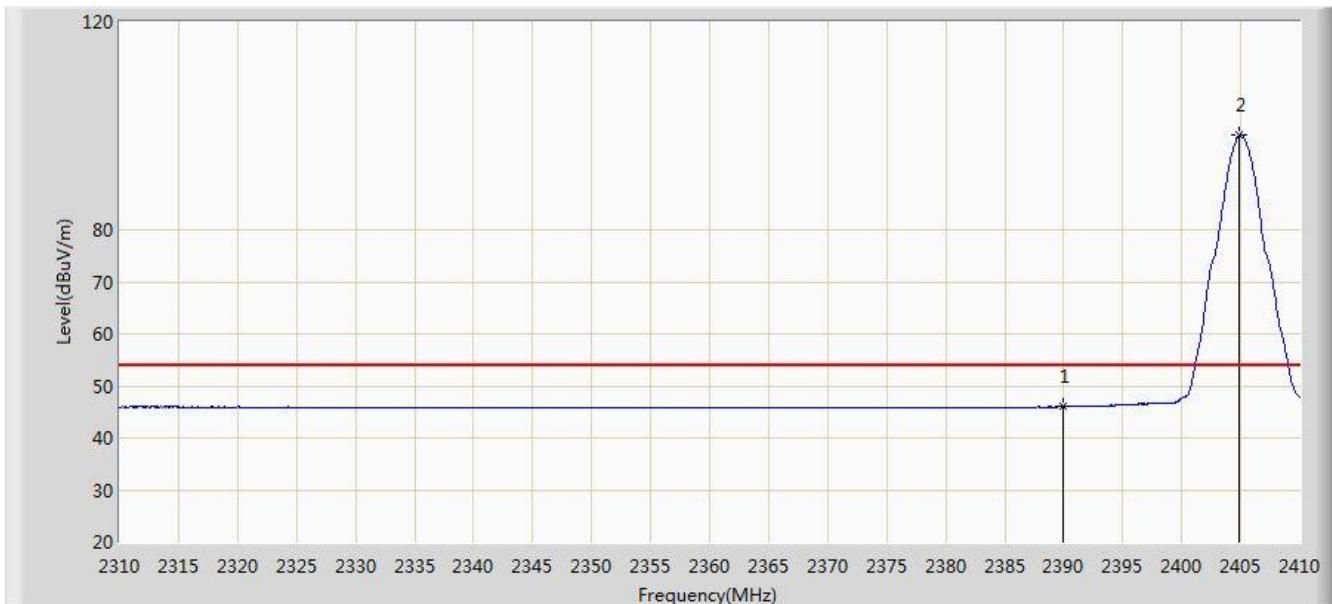


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.978	13.610	-8.022	54.000	32.368	AV
2		*	2404.900	98.206	65.868	N/A	N/A	32.338	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 09:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant A	

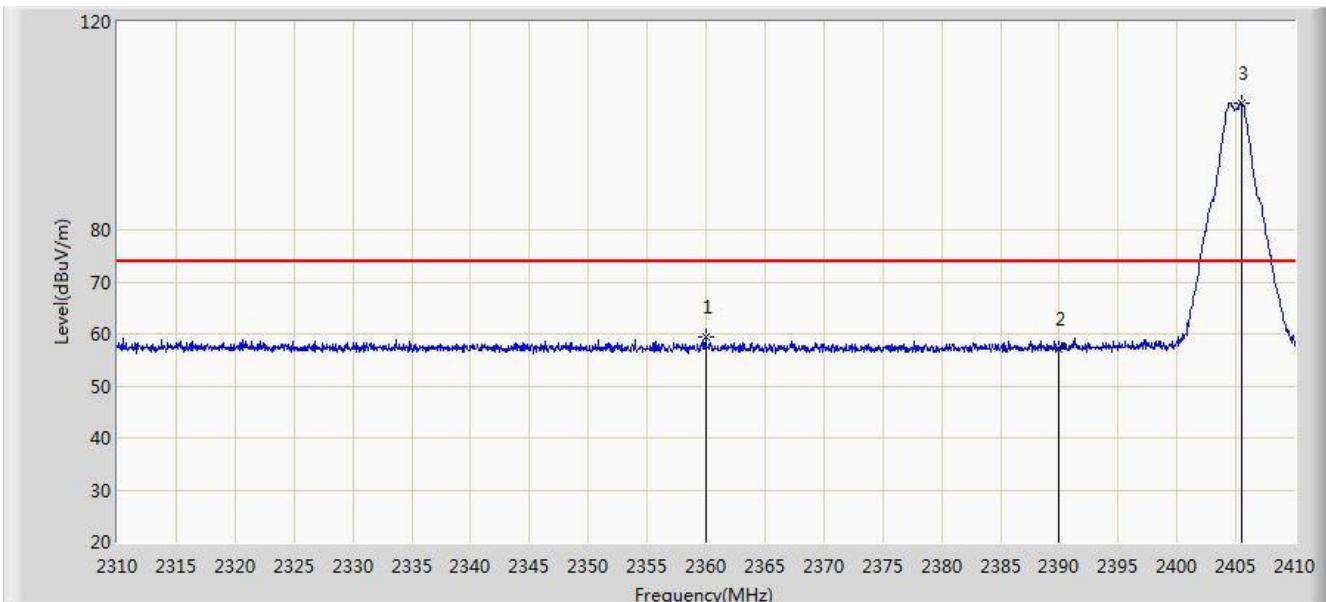


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2359.950	59.294	26.877	-14.706	74.000	32.417	PK
2			2390.000	57.096	24.728	-16.904	74.000	32.368	PK
3	*		2405.450	104.375	72.039	N/A	N/A	32.336	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 09:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant A	

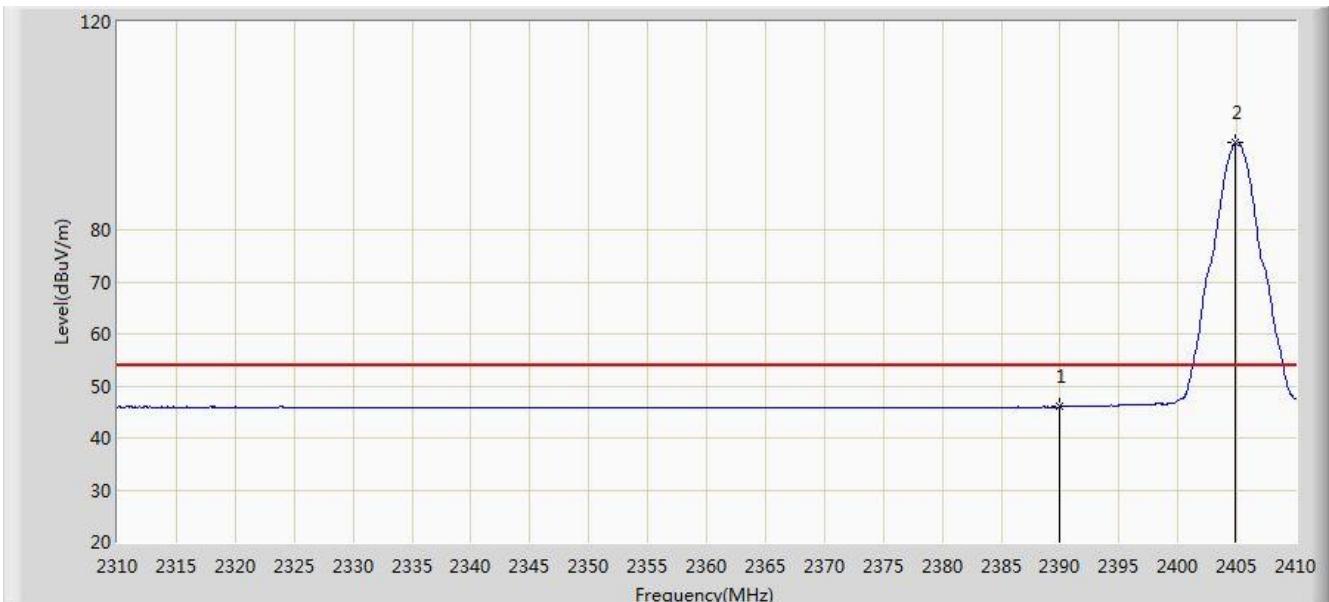


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.966	13.598	-8.034	54.000	32.368	AV
2		*	2404.900	96.911	64.573	N/A	N/A	32.338	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant A	

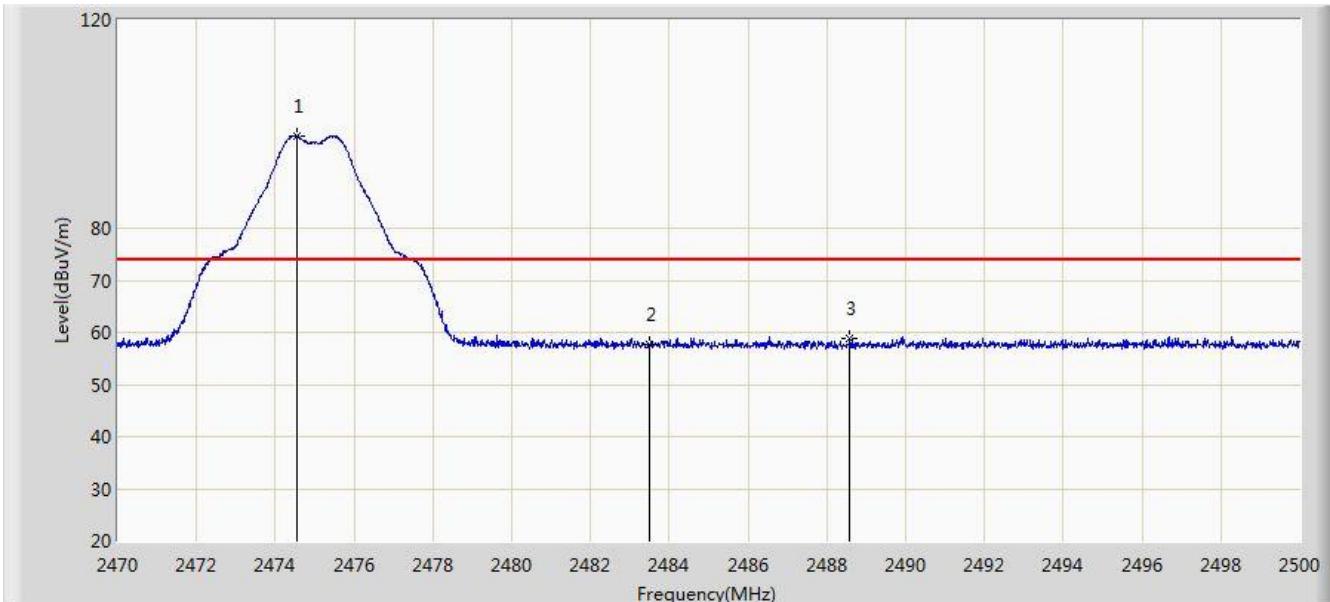


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.560	97.615	65.292	N/A	N/A	32.323	PK
2			2483.500	57.720	25.371	-16.280	74.000	32.349	PK
3			2488.570	58.859	26.502	-15.141	74.000	32.357	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant A	

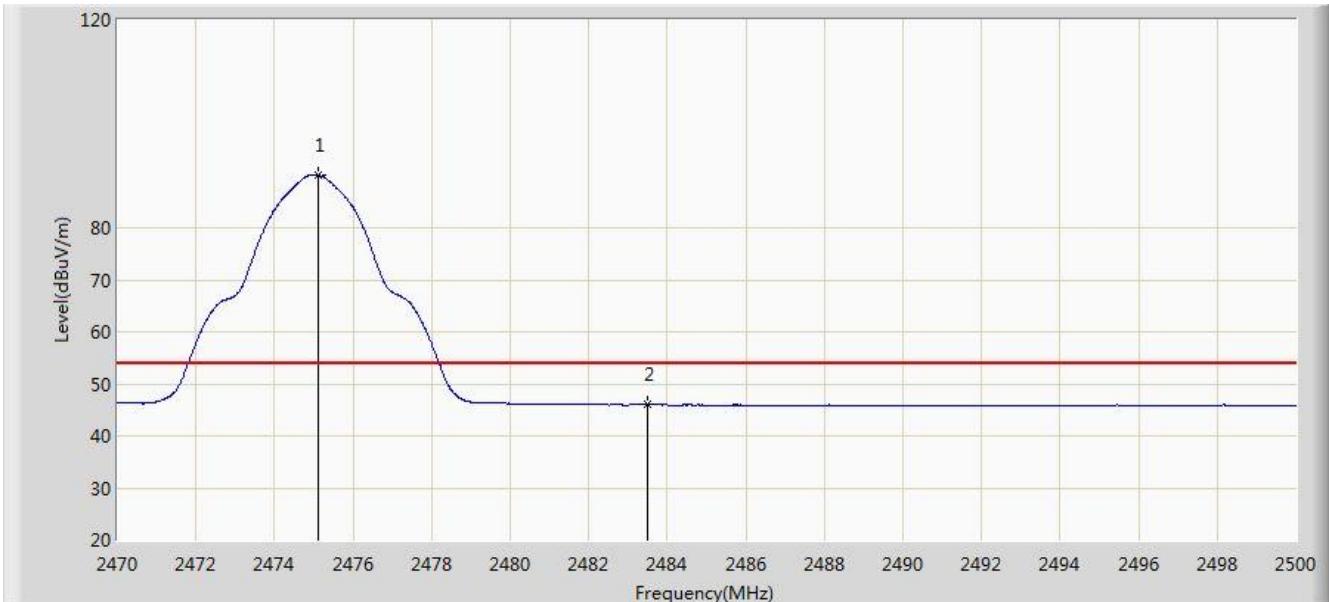


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2475.115	90.142	57.817	N/A	N/A	32.325	AV
2			2483.500	45.984	13.635	-8.016	54.000	32.349	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant A	

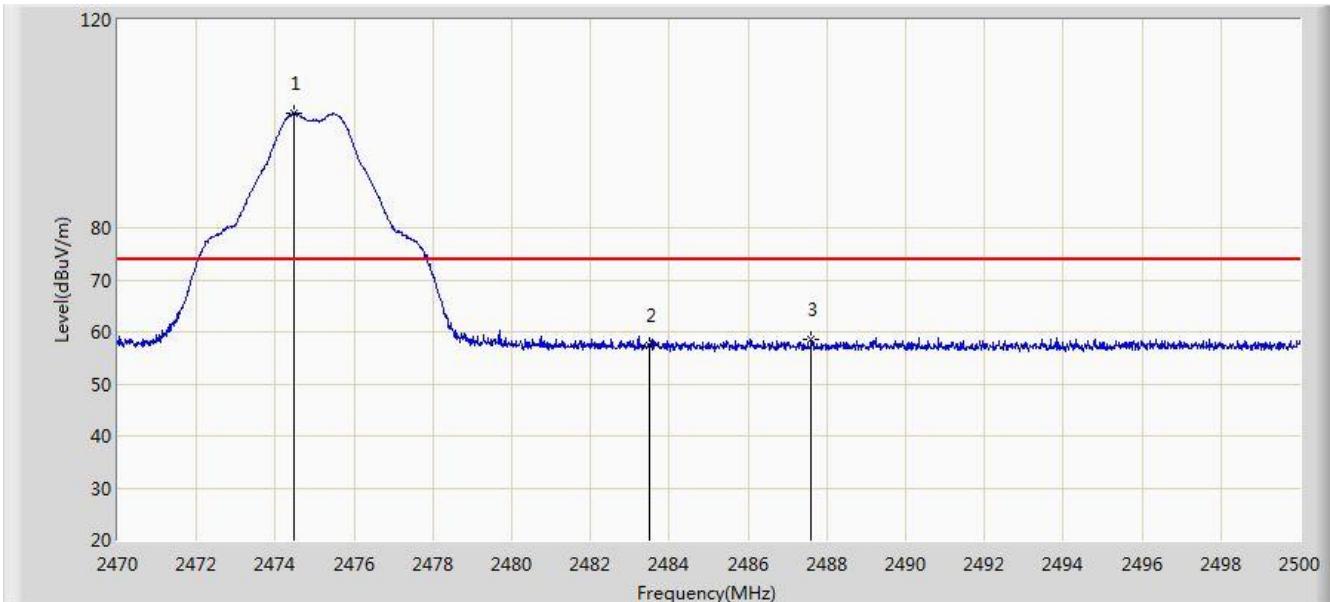


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2474.470	101.952	69.629	N/A	N/A	32.322	PK
2			2483.500	57.449	25.100	-16.551	74.000	32.349	PK
3			2487.610	58.602	26.246	-15.398	74.000	32.355	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant A	

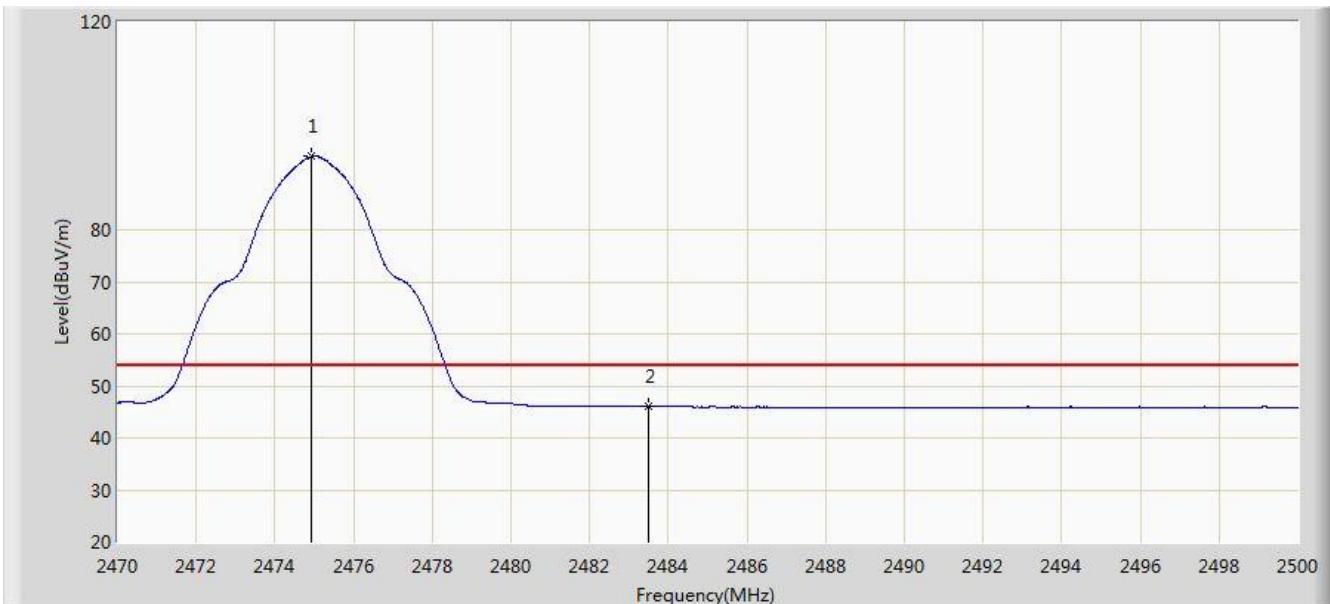


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.935	94.073	61.748	N/A	N/A	32.324	AV
2			2483.500	46.028	13.679	-7.972	54.000	32.349	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant B	

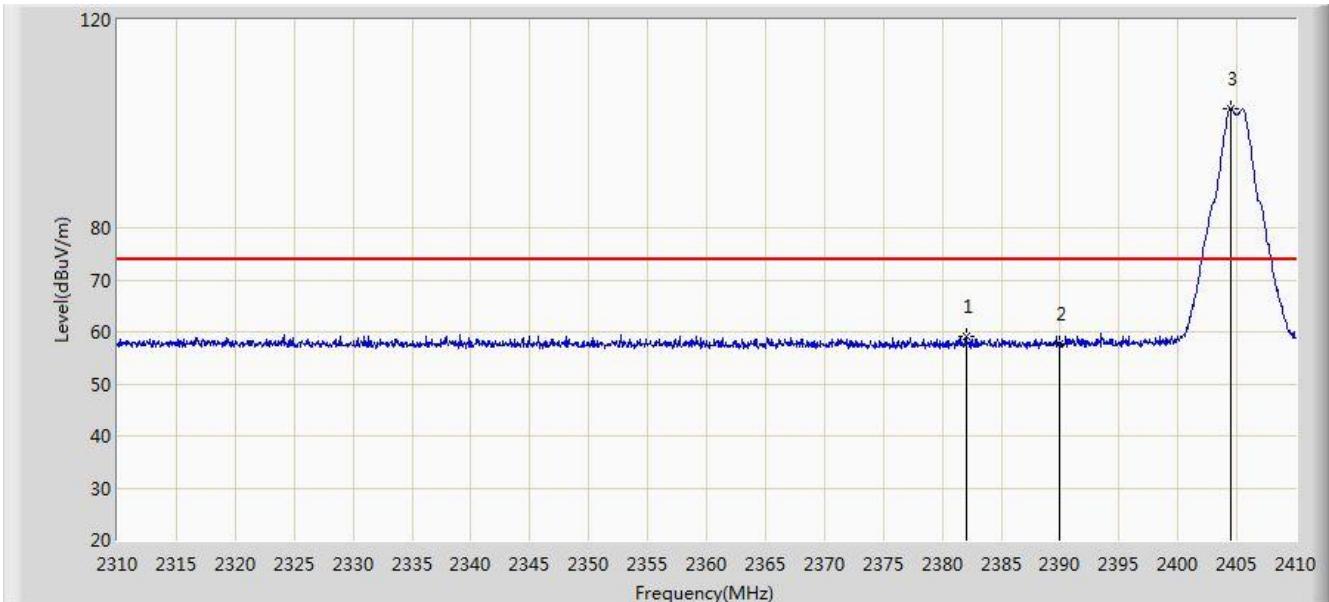


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.000	59.272	26.912	-14.728	74.000	32.361	PK
2			2390.000	57.787	25.419	-16.213	74.000	32.368	PK
3	*		2404.500	102.872	70.533	N/A	N/A	32.339	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant B	

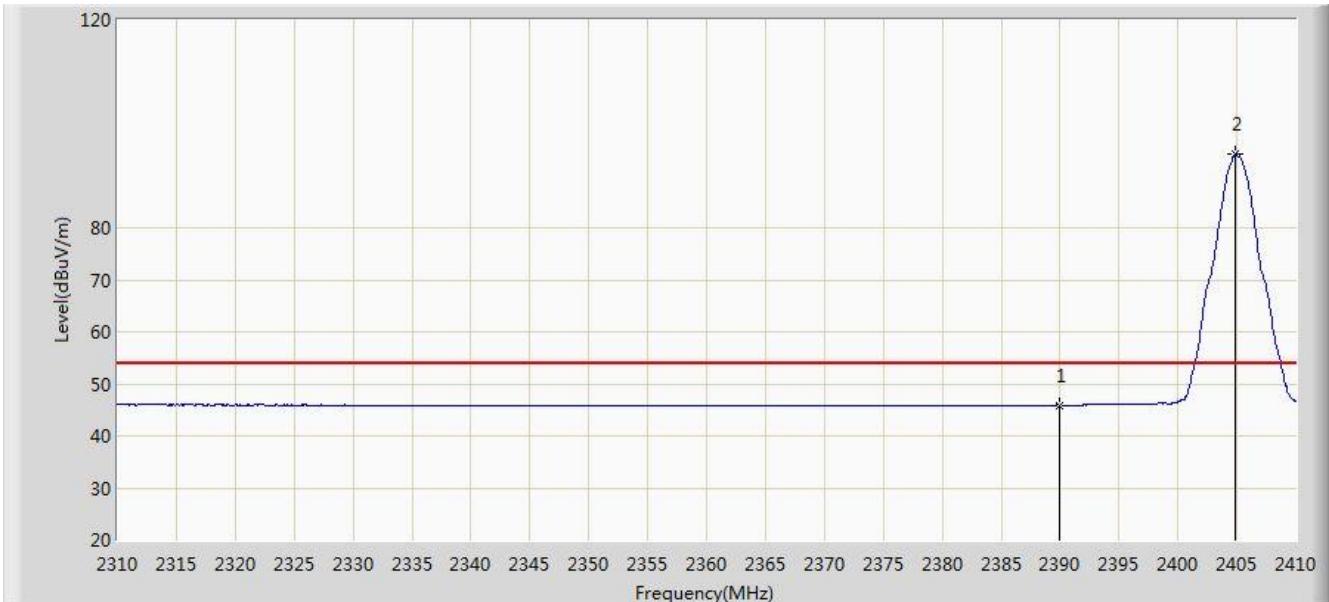


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.941	13.573	-8.059	54.000	32.368	AV
2		*	2404.850	94.100	61.762	N/A	N/A	32.339	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant B	

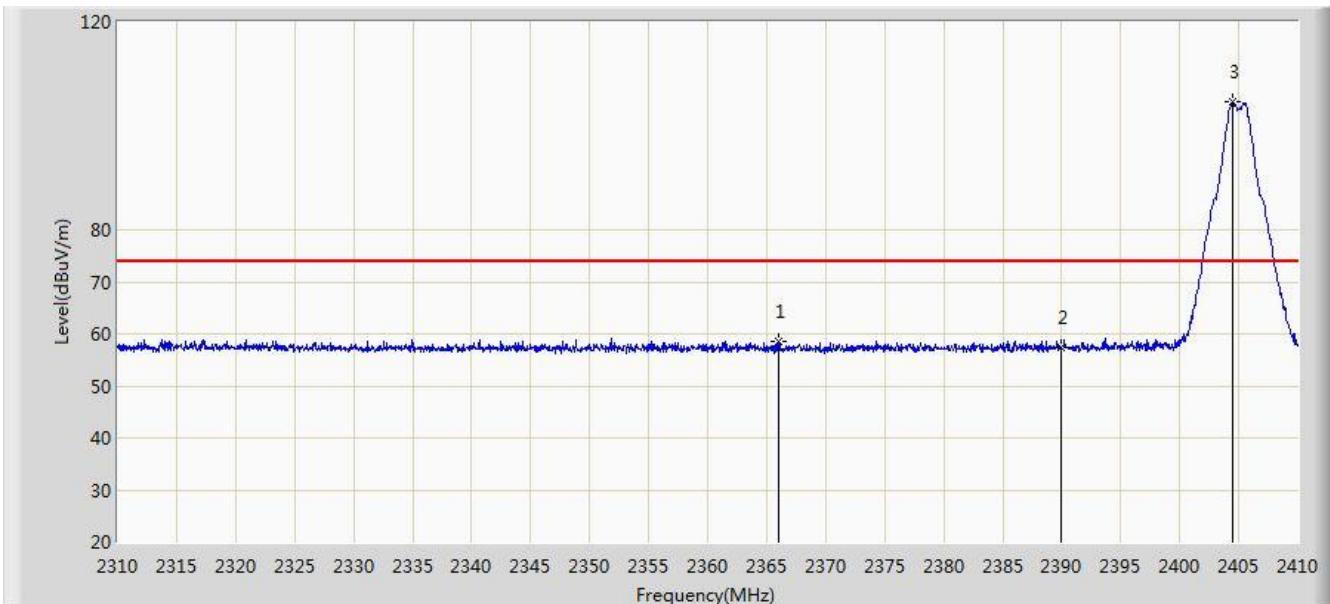


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2366.000	58.505	26.110	-15.495	74.000	32.395	PK
2			2390.000	57.423	25.055	-16.577	74.000	32.368	PK
3	*	*	2404.500	104.502	72.163	N/A	N/A	32.339	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2405MHz Ant B	

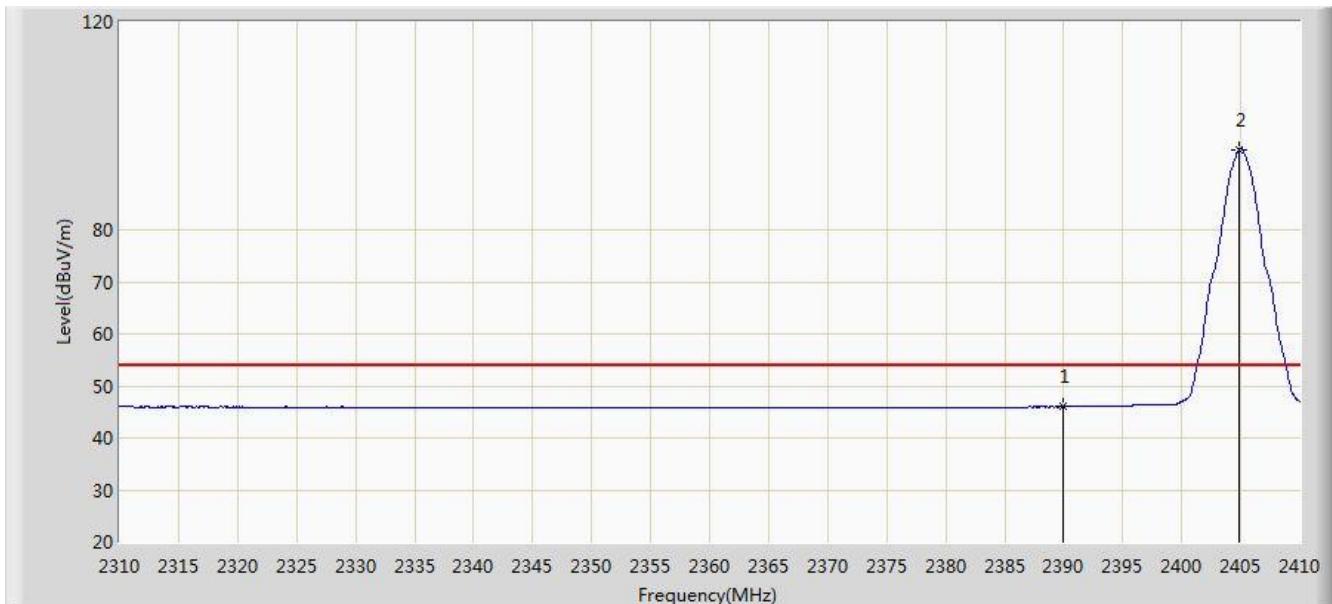


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.988	13.620	-8.012	54.000	32.368	AV
2		*	2404.850	95.379	63.041	N/A	N/A	32.339	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant B	

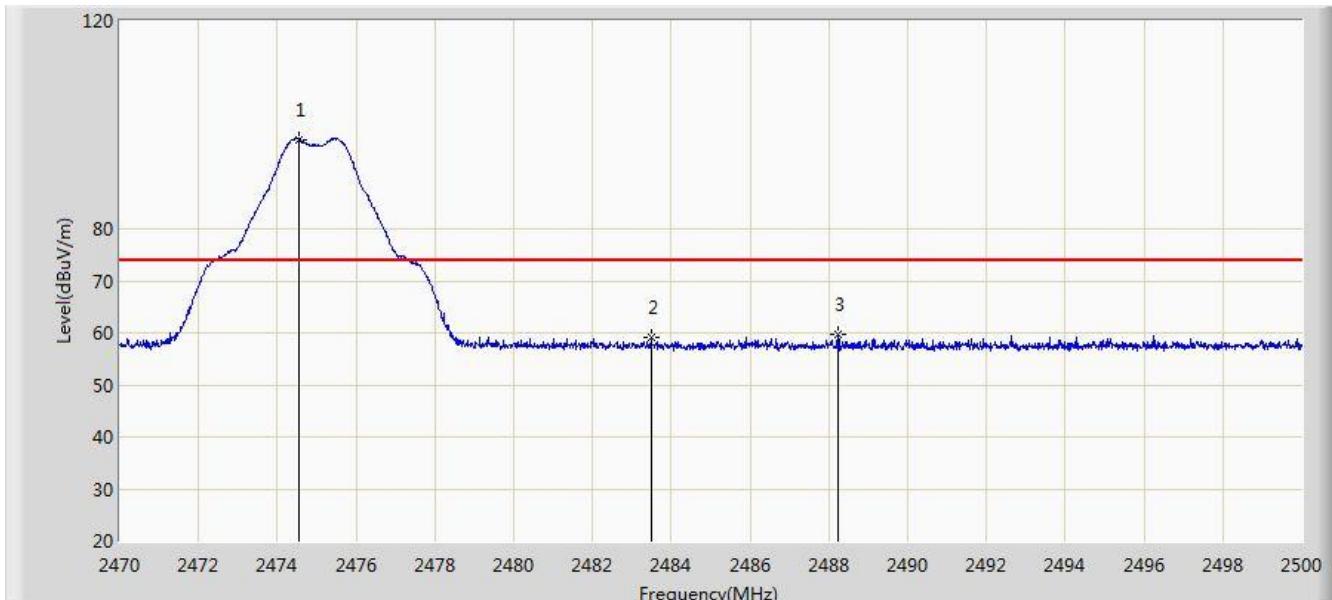


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.560	97.192	64.869	N/A	N/A	32.323	PK
2			2483.500	59.147	26.798	-14.853	74.000	32.349	PK
3			2488.240	59.788	27.431	-14.212	74.000	32.356	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant B	

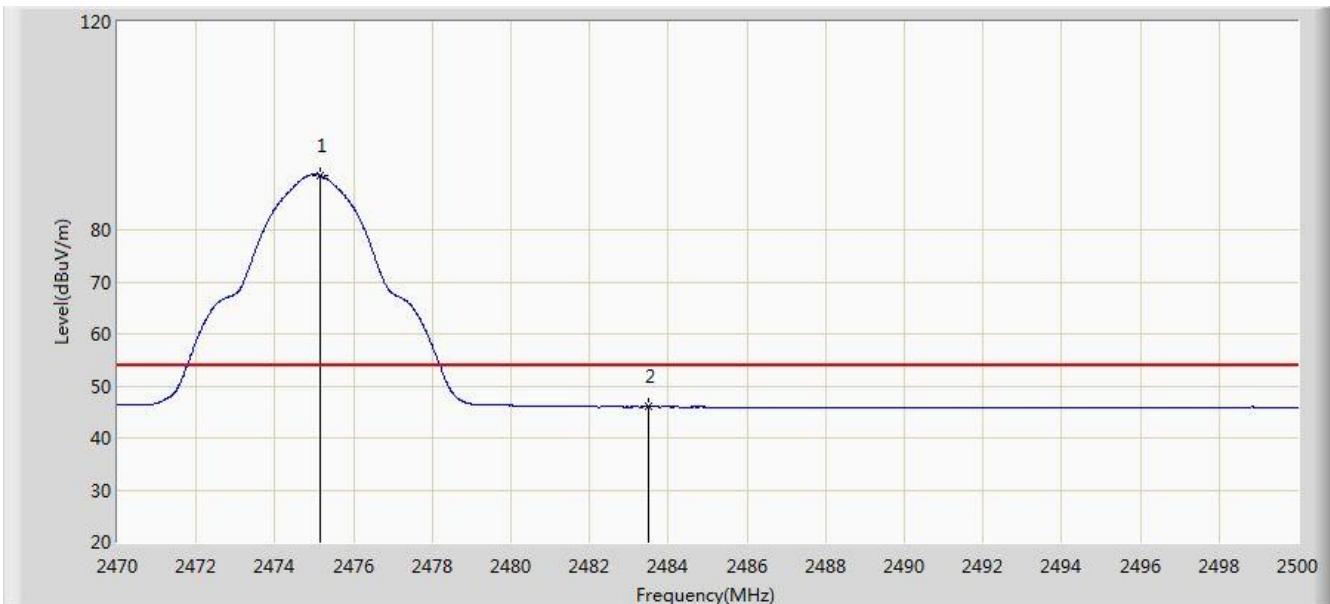


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2475.160	90.440	58.114	N/A	N/A	32.326	AV
2			2483.500	45.948	13.599	-8.052	54.000	32.349	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant B	

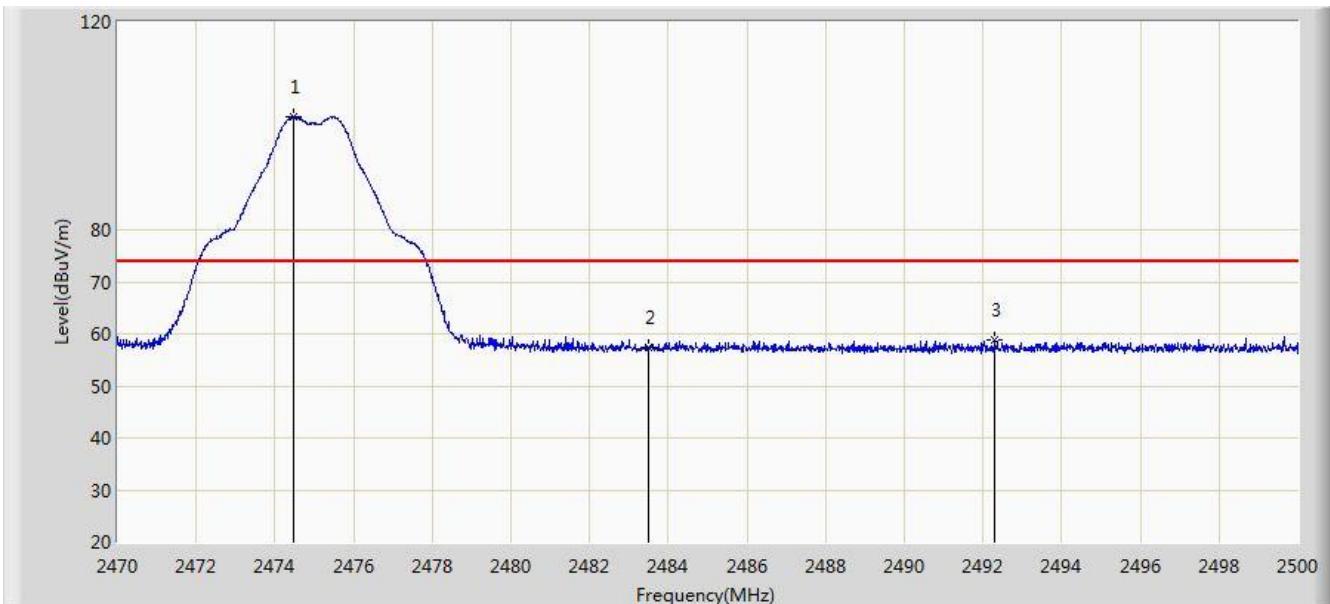


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*		2474.470	101.833	69.510	N/A	N/A	32.322	PK
2			2483.500	57.427	25.078	-16.573	74.000	32.349	PK
3			2492.290	58.707	26.344	-15.293	74.000	32.364	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2015/12/24 - 10:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 3-Axis Gimbal Camera	Power: By Battery
Test Mode: Transmit at Channel 2475MHz Ant B	

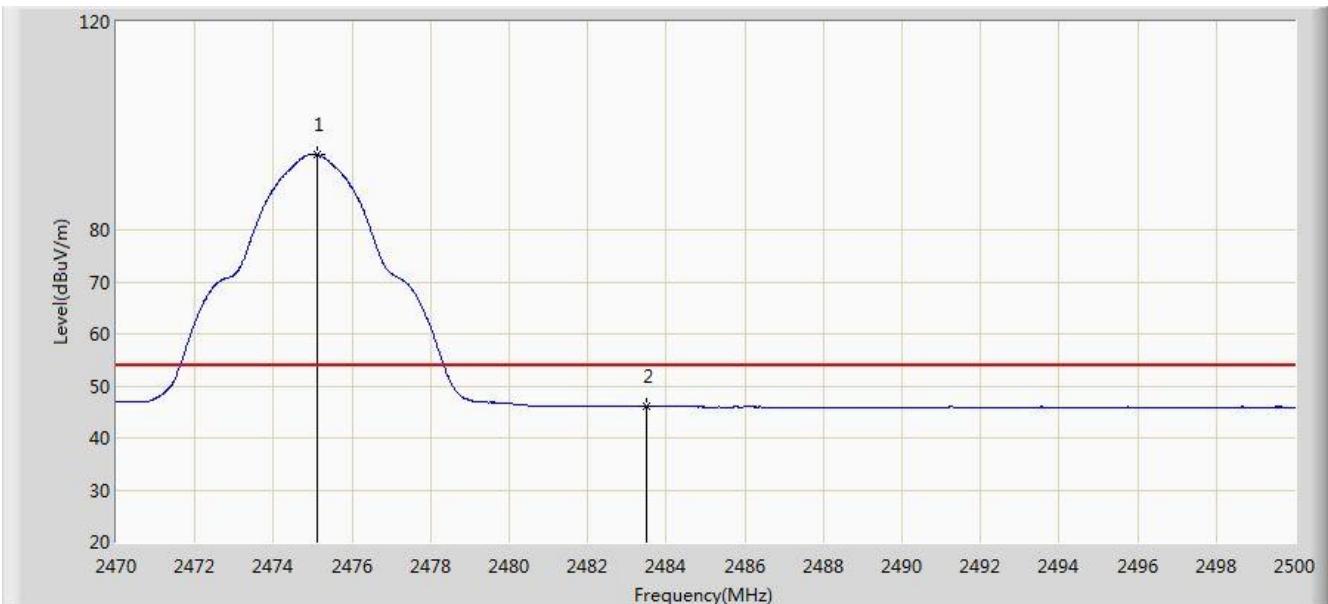

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1		*	2475.115	94.474	62.149	N/A	N/A	32.325	AV
2			2483.500	46.053	13.704	-7.947	54.000	32.349	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

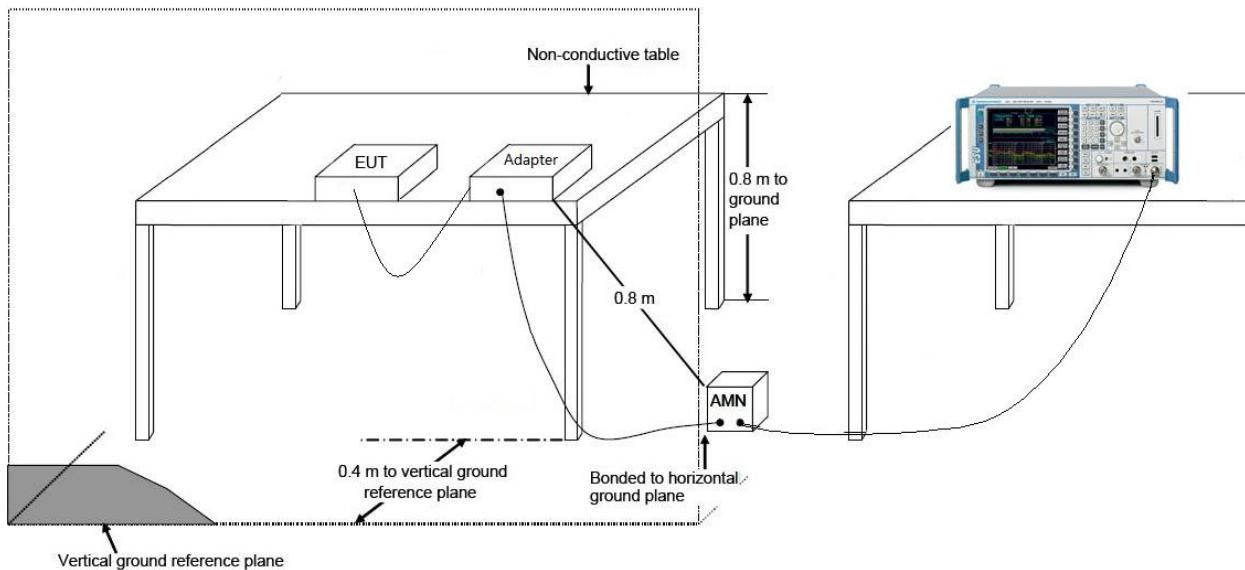

7.8.3. Test Result

The EUT is powered by battery, so this test item is not applicable.

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **3-Axis Gimbal Camera FCC ID: 2AC55-CGO4** is in compliance with Part 15C of the FCC Rules.

The End
