



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Fax: +86-512-66308368
Web: www.mrt-cert.com

Report No.: 1511RSU00702
Report Version: V03
Issue Date: 01-12-2016

MEASUREMENT REPORT

FCC PART 15.407 / RSS-247 WLAN 802.11a

FCC ID: 2ACS5-ST12
IC: 11554B-ST12
APPLICANT: Yuneec Technology Co., Limited

Application Type: Certification
Product: Radio Controller
Model No.: ST12
Brand Name: YUNEEC
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
IC Rule(s): RSS-247 Issue 1, RSS-Gen Issue 4
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v01,
Test Date: November 20 ~ January 12, 2016

Reviewed By :

(Robin Wu)

Approved By :

(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1511RSU00702	Rev. 01	Initial report	12-22-2015
1511RSU00702	Rev. 02	Update some test data and test description	01-12-2016
1511RSU00702	Rev. 03	Add the RSS-Gen rule	01-12-2016

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Working Frequencies for this report	7
2.3. Description of Available Antennas.....	7
2.4. Description of Antenna RF Port	8
2.5. Test Mode	8
2.6. Test Software.....	8
2.7. Device Capabilities	9
2.8. Test Configuration	9
2.9. EMI Suppression Device(s)/Modifications.....	9
2.10. Labeling Requirements.....	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary	15
7.2. 26dB Bandwidth Measurement.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup	17
7.2.5. Test Result.....	18
7.3. 6dB Bandwidth Measurement.....	19
7.3.1. Test Limit	19
7.3.2. Test Procedure used.....	19

7.3.3. Test Setting.....	19
7.3.4. Test Setup	19
7.3.5. Test Result.....	20
7.4. Output Power Measurement.....	21
7.4.1. Test Limit	21
7.4.2. Test Procedure Used	21
7.4.3. Test Setting.....	21
7.4.4. Test Setup	21
7.4.5. Test Result.....	22
7.5. Power Spectral Density Measurement.....	23
7.5.1. Test Limit	23
7.5.2. Test Procedure Used	23
7.5.3. Test Setting.....	23
7.5.4. Test Setup	24
7.5.5. Test Result.....	25
7.6. Frequency Stability Measurement.....	26
7.6.1. Test Limit	26
7.6.2. Test Procedure Used	26
7.6.3. Test Setup	26
7.6.4. Test Result.....	27
7.7. Radiated Spurious Emission Measurement	28
7.7.1. Test Limit	28
7.7.2. Test Procedure Used	28
7.7.3. Test Setting.....	28
7.7.4. Test Setup	29
7.7.5. Test Result.....	31
7.8. Radiated Restricted Band Edge Measurement	40
7.8.1. Test Limit	40
7.8.2. Test Result of Radiated Restricted Band Edge	43
7.9. AC Conducted Emissions Measurement.....	51
7.9.1. Test Limit	51
7.9.2. Test Procedure	51
7.9.3. Test Setup	52
7.9.4. Test Result.....	53
8. CONCLUSION.....	55

§2.1033 General Information

Applicant:	Yuneec Technology Co., Limited
Applicant Address:	2/F Man Shung Industrial Building, 7 Lai Yip Street, Kwun Tong, Hong Kong
Manufacturer:	Yuneec International (China) Co., Ltd.
Manufacturer Address:	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	809388
IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.407
IC Rule(s):	RSS-247 Issue 1, RSS-Gen Issue 4
Model No.:	ST12
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Unlicensed National Information Infrastructure (UNII)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Radio Controller
Model No.	ST12
Brand Name	YUNEEC
Frequency Range	802.11a: 5745~5825MHz
Maximum Peak Output Power	6.80dBm
Type of Modulation	802.11a: OFDM


2.2. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745 MHz	153	5765 MHz	157	5785 MHz
161	5805 MHz	165	5825 MHz	--	--

2.3. Description of Available Antennas

Antenna Type	Manufacturer	Frequency Band (GHz)	Max Peak Gain (dBi)
Dipole Antenna A#	Yuneec Technology Co., Limited	2.4	1.71
Dipole Antenna B#		2.4	1.71
Panel Antenna		5	2.48

2.4. Description of Antenna RF Port

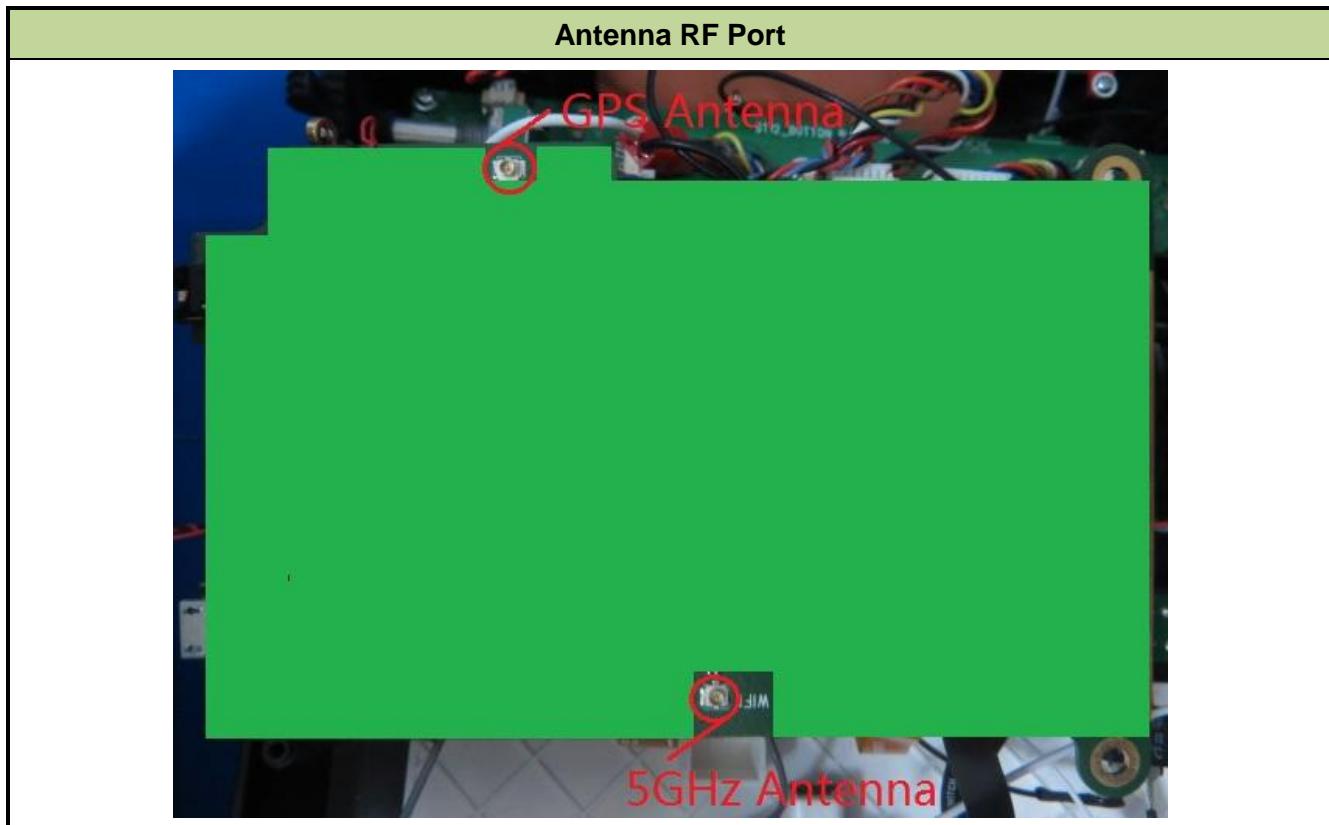

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
-----------	-----------------------------

2.6. Test Software


The test utility software used during testing was engineering directive ordered by applicant.

2.7. Device Capabilities

This device contains the following capabilities:

2.4GHz Zigbee (DTS) and 5.8GHz WLAN (UNII)

Note: 5GHz (UNII) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

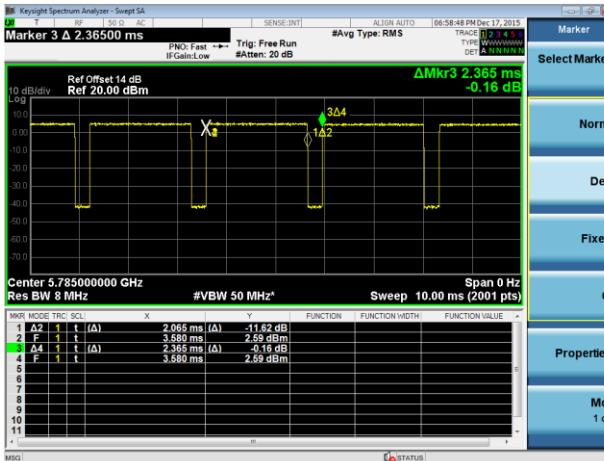Test Mode	Duty Cycle																														
802.11a	87.32 %																														
 <p>The screenshot shows a Keysight Spectrum Analyzer interface. The main display shows a signal with markers labeled X3, X4, and X2. The center frequency is 5.785000000 GHz, resolution bandwidth is 8 MHz, and span is 0 Hz. The table below lists marker data:</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Mode</th> <th>Start Frequency (GHz)</th> <th>End Frequency (GHz)</th> <th>Width (ms)</th> <th>Value (dBm)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>1</td> <td>2.065 ms</td> <td>-11.62 dBm</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>1</td> <td>3.580 ms</td> <td>2.59 dBm</td> </tr> <tr> <td>3</td> <td>A4</td> <td>1</td> <td>1</td> <td>2.365 ms</td> <td>-0.16 dBm</td> </tr> <tr> <td>4</td> <td>F</td> <td>1</td> <td>1</td> <td>3.580 ms</td> <td>2.59 dBm</td> </tr> </tbody> </table>	Marker	Mode	Start Frequency (GHz)	End Frequency (GHz)	Width (ms)	Value (dBm)	1	A2	1	1	2.065 ms	-11.62 dBm	2	F	1	1	3.580 ms	2.59 dBm	3	A4	1	1	2.365 ms	-0.16 dBm	4	F	1	1	3.580 ms	2.59 dBm	
Marker	Mode	Start Frequency (GHz)	End Frequency (GHz)	Width (ms)	Value (dBm)																										
1	A2	1	1	2.065 ms	-11.62 dBm																										
2	F	1	1	3.580 ms	2.59 dBm																										
3	A4	1	1	2.365 ms	-0.16 dBm																										
4	F	1	1	3.580 ms	2.59 dBm																										

2.8. Test Configuration

The **Radio Controller FCC ID: 2ACS5-ST12** was tested per the guidance of KDB 789033 D02v01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v01 were used in the measurement of the **Radio Controller FCC ID: 2AC55-ST12**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.9.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of **Radio Controller** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Radio Controller** FCC ID: **2ACS5-ST12** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2016/11/03
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2016/11/20

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2016/12/08
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2016/04/16
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2016/03/29
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2016/12/14
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2016/11/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2016/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2016/11/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2016/05/08
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2016/05/08
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06112	1 year	2016/11/20

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 40GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: Yuneec Technology Co., Limited

FCC ID: 2ACS5-ST12

IC: 11554B-ST12

Model No.: ST12

Data Rate(s) Tested: 6Mbps ~ 54Mbps (a);

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(3)	Maximum Conducted Output Power	≤ 30 dBm U-NII-3		Pass	Section 7.4
15.407(a)(3), (5)	Peak Power Spectral Density	≤ 30 dBm/500kHz U-NII-3		Pass	Section 7.5
15.407(g)	Frequency Stability	N/A		Pass	Section 7.6
15.407(b)(4)	Undesirable Emissions	≤ -27dBm/MHz EIRP ≤ -17dBm/MHz EIRP	Radiated	Pass	Section 7.7 & 7.8
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.9

RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-247 §6.2	99% Bandwidth	N/A	Conducted	Pass	Section 7.2
RSS-247 §6.2.4	6dB Bandwidth	>500kHz		Pass	Section 7.3
RSS-247 §6.2.4	Max Conducted Output Power	≤ 30 dBm		Pass	Section 7.4
RSS-247 §6.2.4	Peak Power Spectral Density	≤ 30 dBm/500kHz		Pass	Section 7.5
RSS-Gen [8.11]	Frequency Stability	N/A		Pass	Section 7.6
RSS-247 §6.2.4	Out-of-Band Emissions	≤ -27dBm/MHz EIRP ≤ -17dBm/MHz EIRP	Radiated	Pass	Section 7.7 & 7.8
RSS-247 §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in RSS-Gen [8.9]		Pass	
RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< RSS-Gen [8.8] limits	Line Conducted	Pass	Section 7.9

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v01 – Section C.1

7.2.3. Test Setting


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

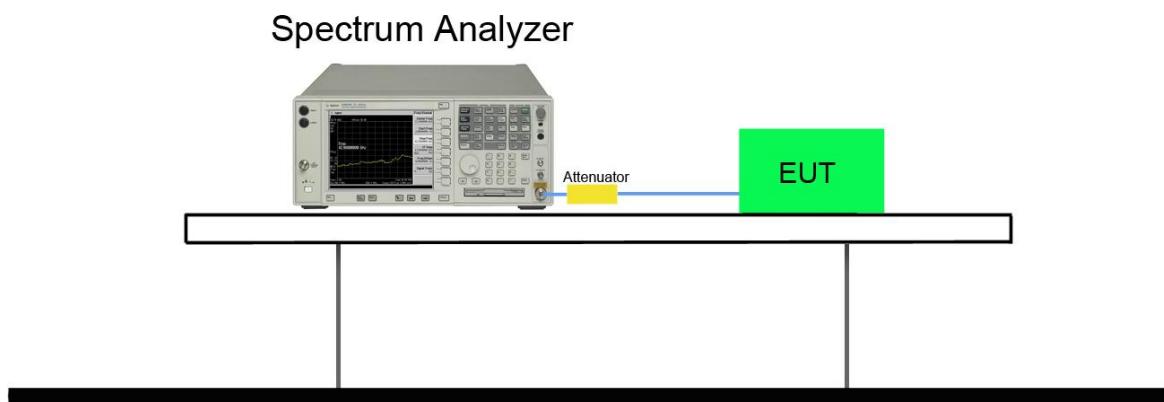

7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6	149	5745	18.69	16.39
802.11a	6	157	5785	18.57	16.38
802.11a	6	165	5825	18.78	16.41

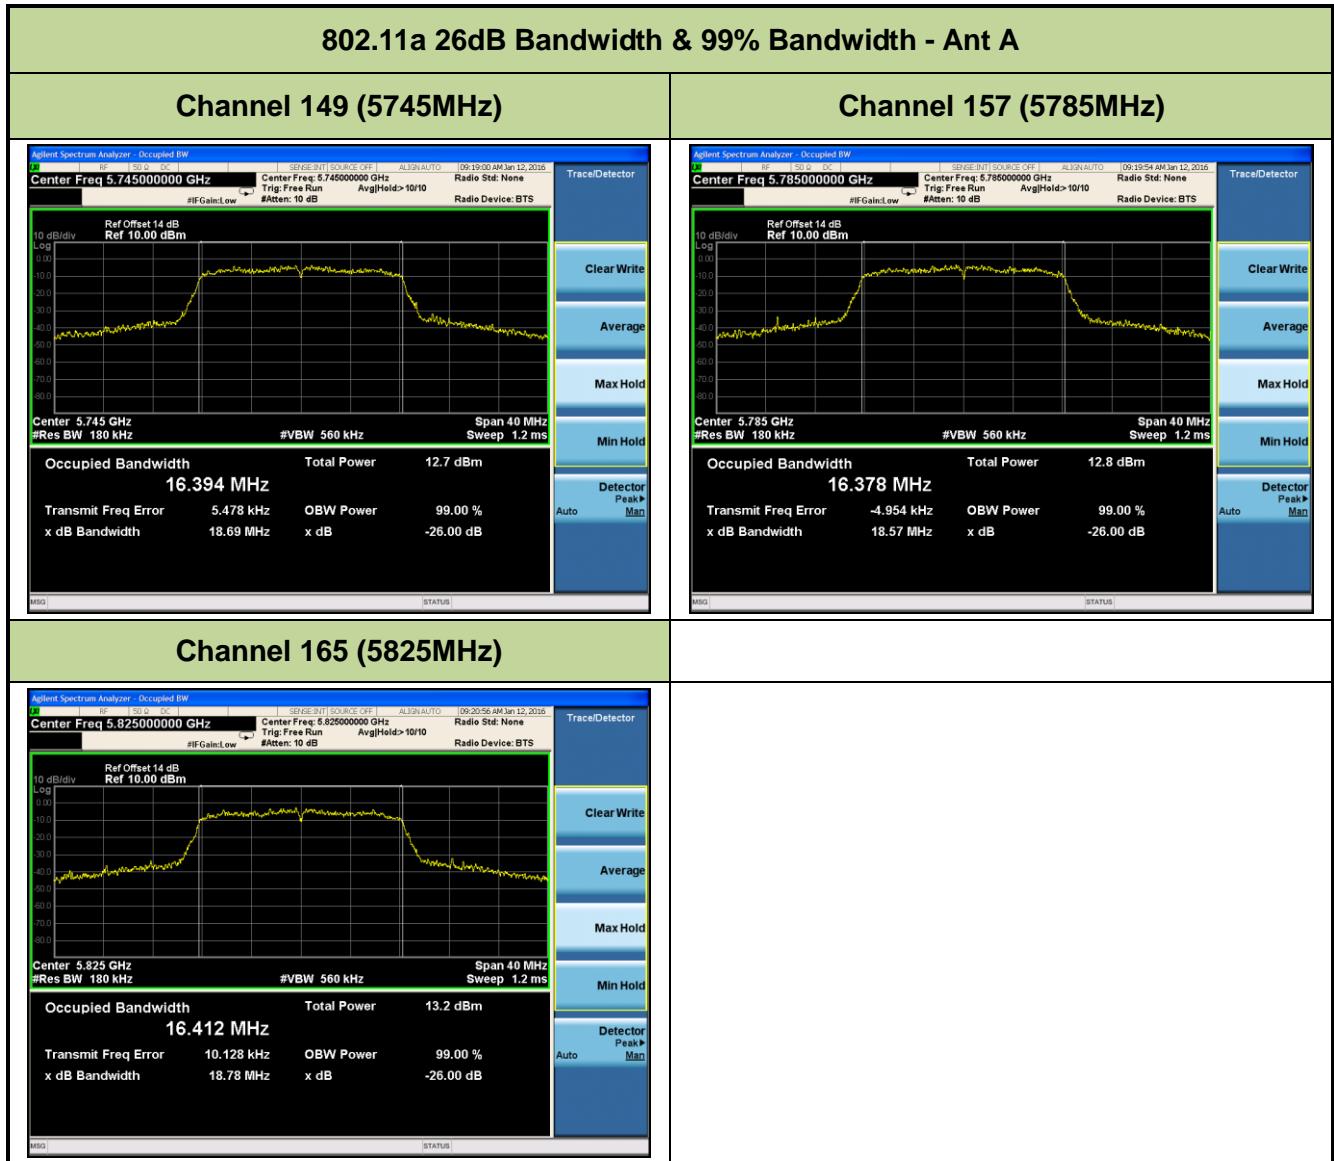

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v01 – Section C.2

7.3.3. Test Setting


1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

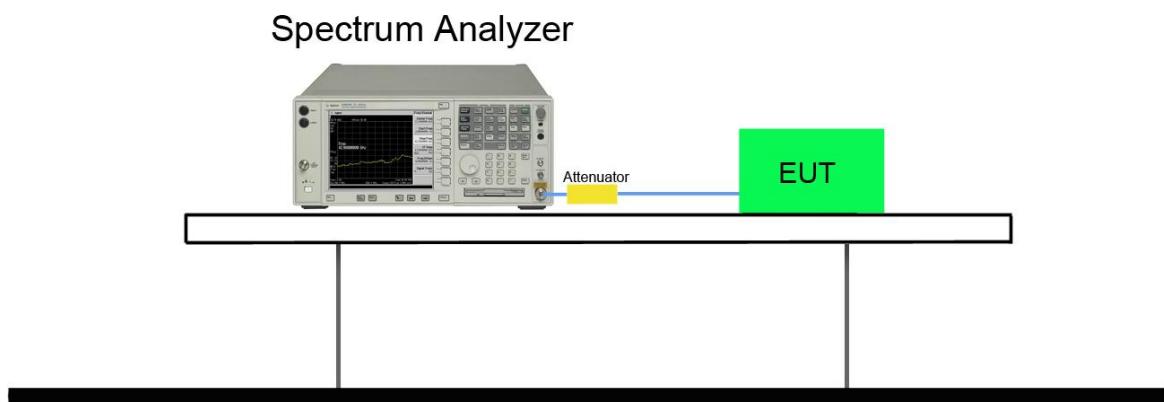

7.3.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6	149	5745	16.31	≥ 0.5	Pass
802.11a	6	157	5785	15.67	≥ 0.5	Pass
802.11a	6	165	5825	14.74	≥ 0.5	Pass

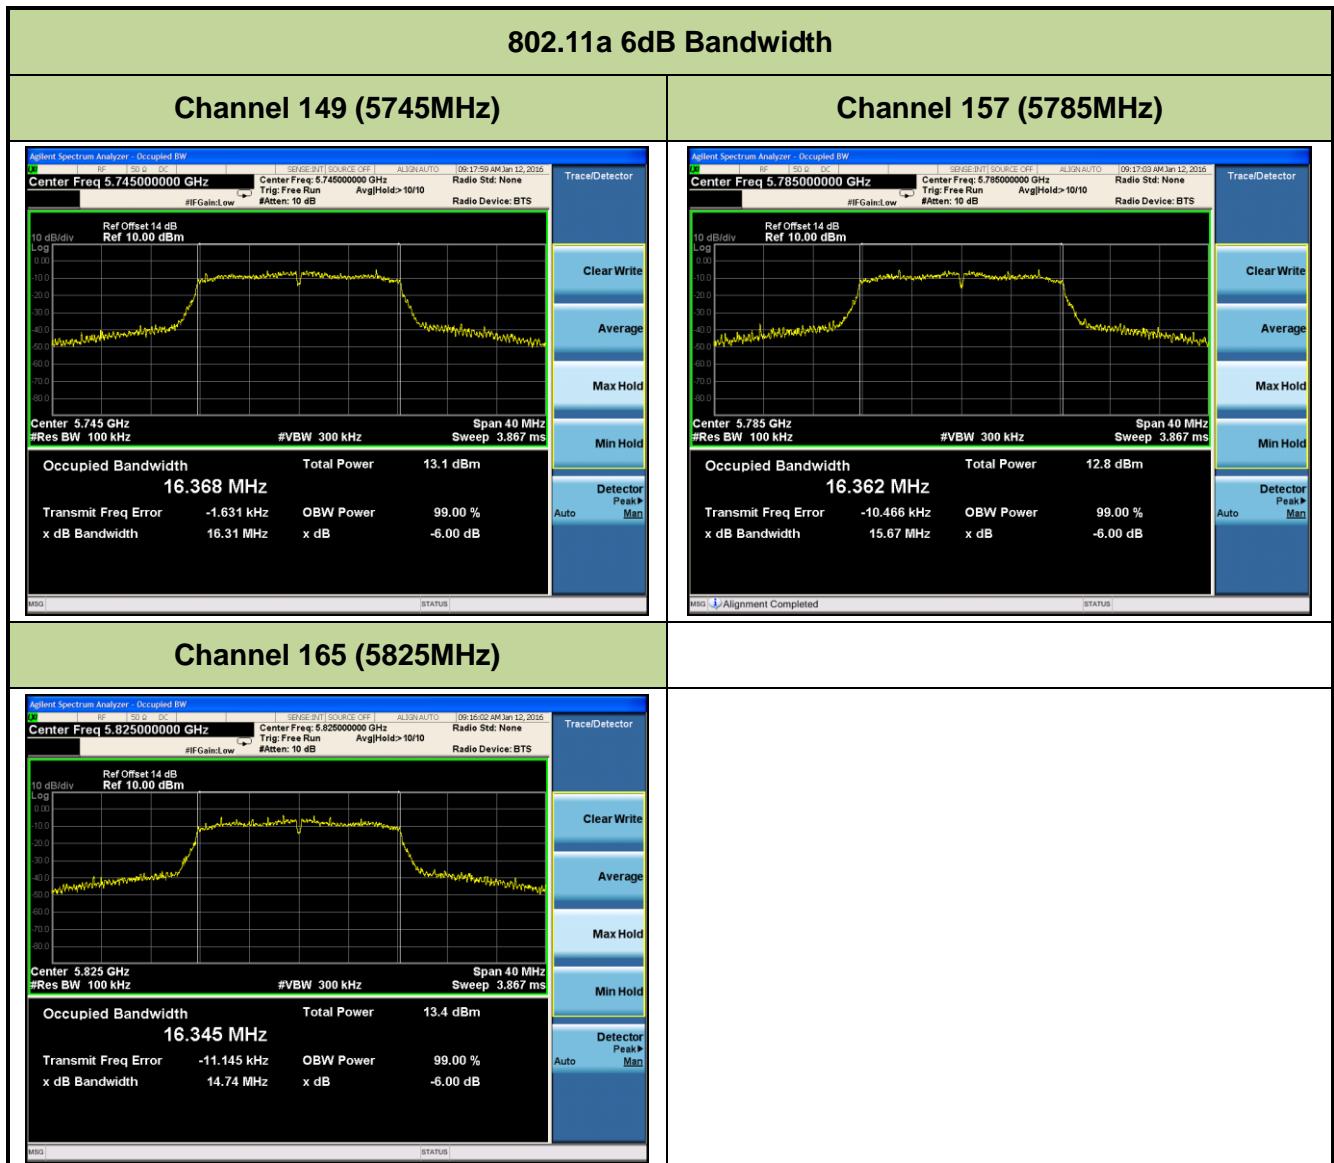

7.4. Output Power Measurement

7.4.1. Test Limit

For FCC

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

For IC

For the 5.725-5.85 GHz band, the maximum conducted output power shall not exceed 1 W.


7.4.2. Test Procedure Used

KDB 789033 D02v01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.4.4. Test Setup

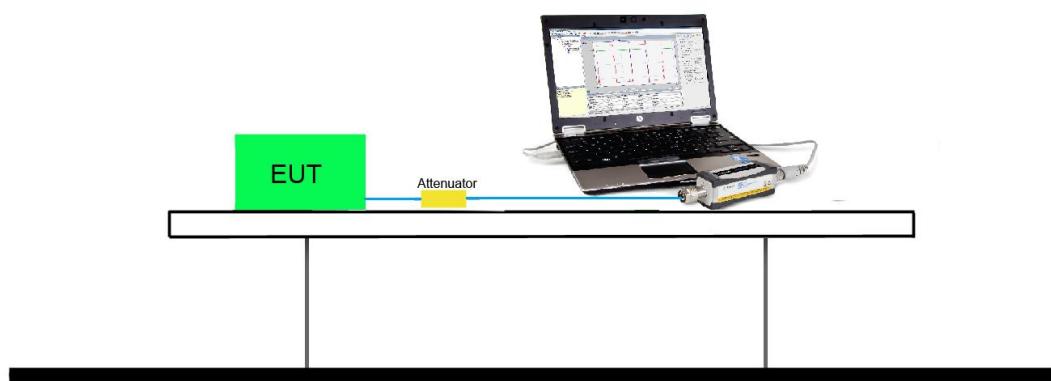

7.4.5. Test Result

Power evaluation under the different rate

Test Mode	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)
802.11a	5785	4	6.71
		24	6.45
		54	6.08

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11a	6	149	5745	6.67	≤ 30.00	Pass
11a	6	157	5785	6.71	≤ 30.00	Pass
11a	6	165	5825	6.80	≤ 30.00	Pass

7.5. Power Spectral Density Measurement

7.5.1. Test Limit

For FCC

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For IC

For the 5.725-5.85 GHz band, the power spectral density shall not exceed 30 dBm in any 500 kHz band.


7.5.2. Test Procedure Used

KDB 789033 D02v01 - Section F

7.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 7$ dB to the measured result


7.5.4. Test Setup

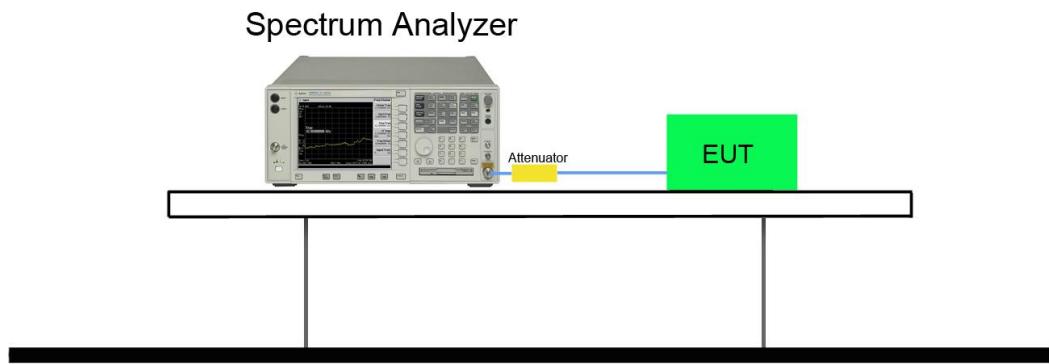

7.5.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	6	149	5745	-11.943	87.32	7	-4.354	≤ 30.00	Pass
11a	6	157	5785	-12.046	87.32	7	-4.457	≤ 30.00	Pass
11a	6	165	5825	-11.346	87.32	7	-3.757	≤ 30.00	Pass

Note: When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = Ant 1 PSD (dBm/100kHz) + $10 \log(1/\text{duty cycle})$ + Constant Factor.

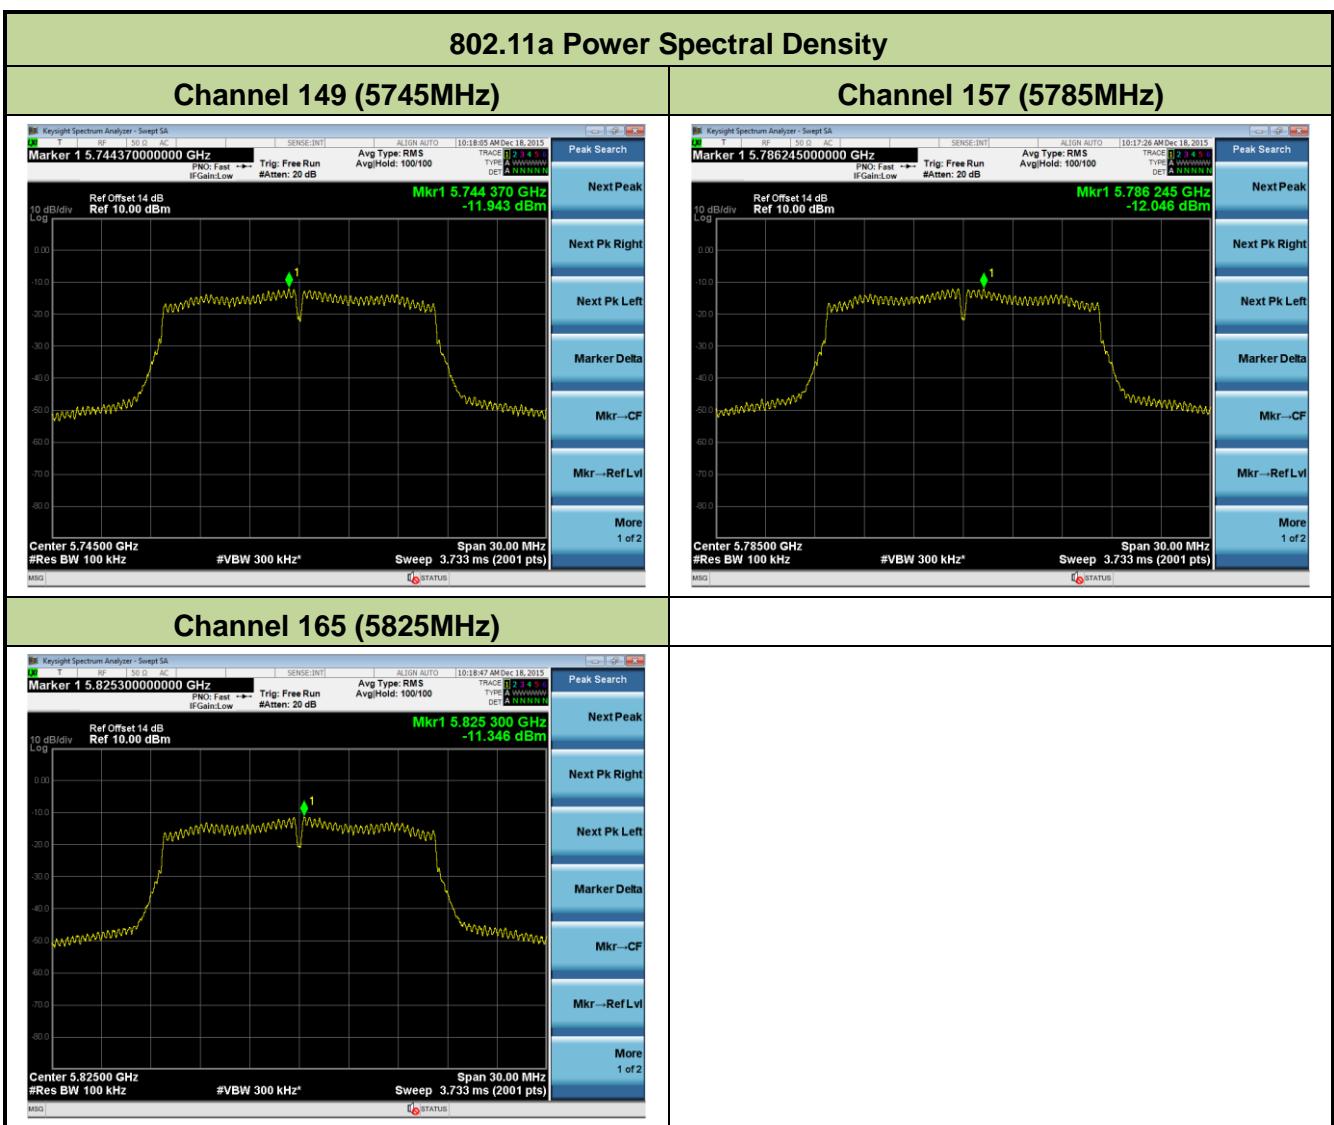

7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.6.2. Test Procedure Used


Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3. Test Setup

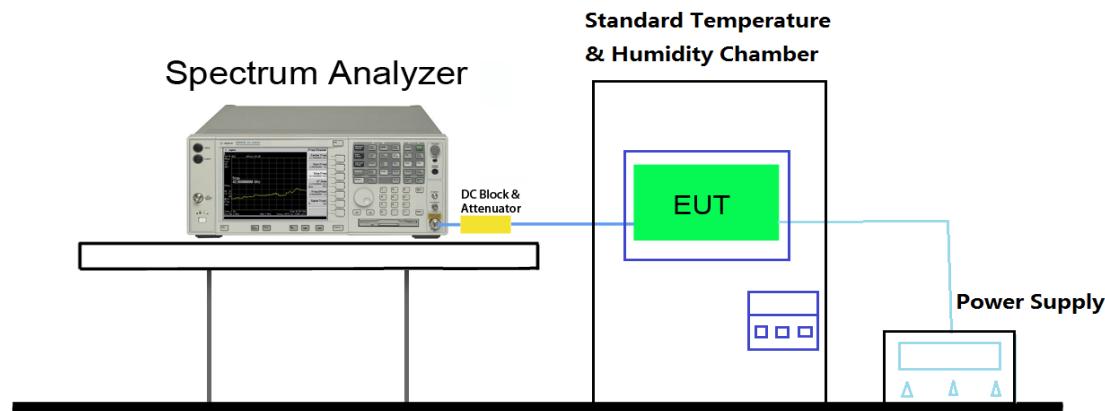

7.6.4. Test Result

Test Engineer	Milo Li	Temperature	-20 ~ 50°C
Test Time	12-10-2015	Relative Humidity	50%RH

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	3.7	- 30	-3.43	-2.80	-3.84	-4.21
		- 20	-3.25	-5.40	-0.03	-4.58
		- 10	1.18	0.54	0.57	-4.56
		0	-3.68	1.22	-3.07	-1.93
		+ 10	-4.12	0.38	-2.17	2.48
		+ 20 (Ref)	-4.33	-0.16	-3.84	1.71
		+ 30	-2.00	-4.72	0.24	-3.99
		+ 40	-3.09	-3.59	-0.40	-0.14
		+ 50	-2.14	-5.32	-2.10	-1.20
115%	4.26	+ 20	-3.91	-4.80	0.82	-1.22
85%	3.15	+ 20	-2.06	-2.94	-3.86	-4.52

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) – Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v01 – Section G

7.7.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize




Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

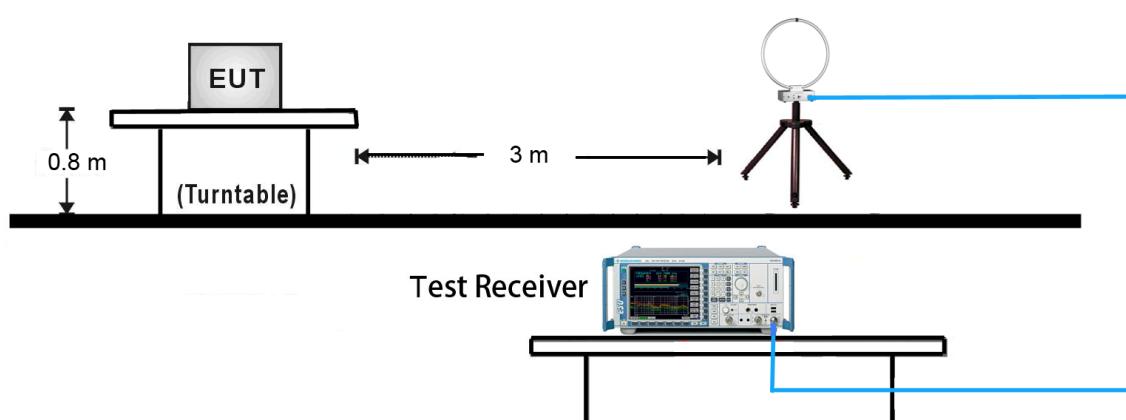7.7.4. Test Setup**9kHz ~ 30MHz Test Setup:**

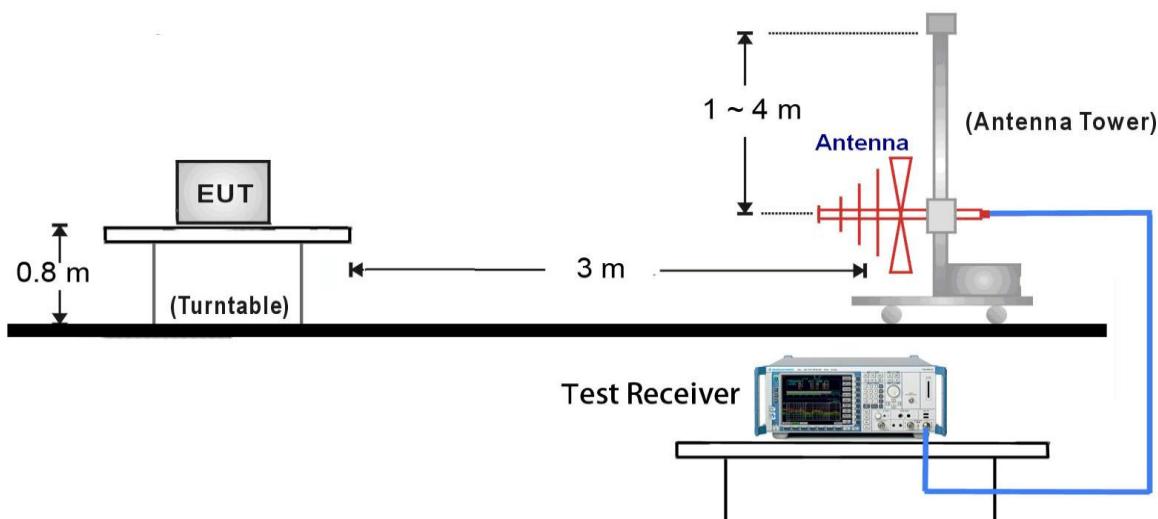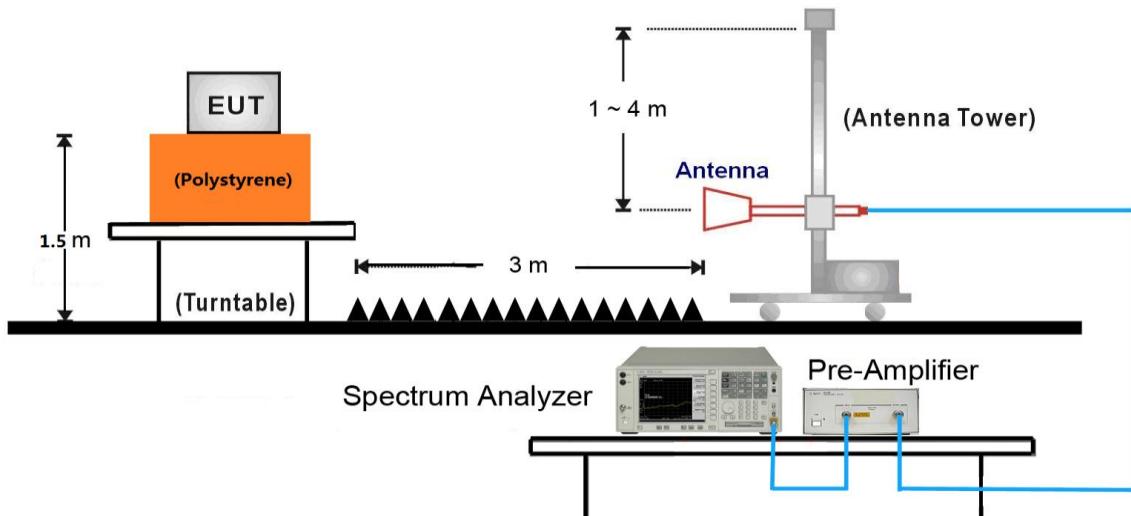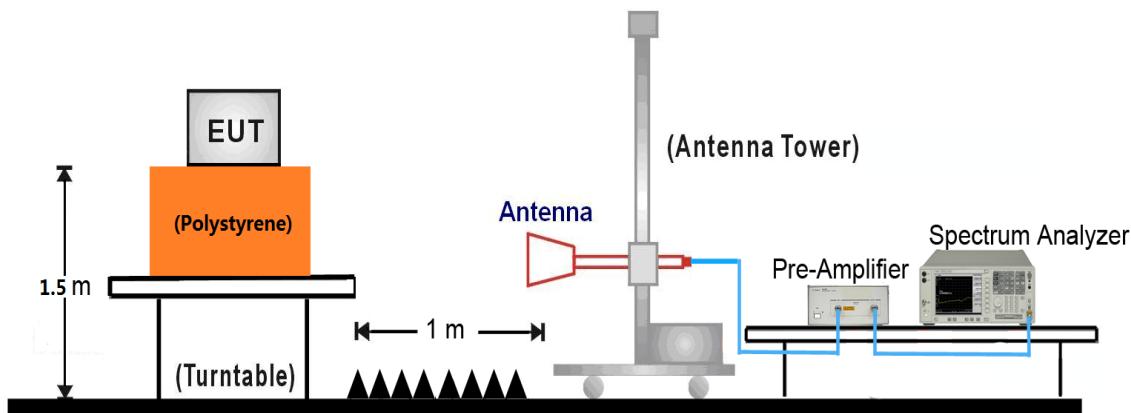30MHz ~ 1GHz Test Setup:

1GHz ~18GHz Test Setup:

18GHz ~40GHz Test Setup:


7.7.5. Test Result

Test Mode:	802.11a	Test Site:	AC1
Test Channel:	149	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	7766.0	37.8	8.2	46.0	68.2	-22.2	Peak	Horizontal
*	8607.5	37.4	8.8	46.2	68.2	-22.0	Peak	Horizontal
	9457.5	35.9	10.5	46.4	74.0	-27.6	Peak	Horizontal
	11642.0	39.8	12.4	52.2	74.0	-21.8	Peak	Horizontal
*	7834.0	37.4	8.4	45.8	68.2	-22.4	Peak	Vertical
*	8616.0	36.8	8.8	45.6	68.2	-22.6	Peak	Vertical
	9491.5	36.4	10.6	47.0	74.0	-27.0	Peak	Vertical
	11650.5	42.9	12.3	55.2	74.0	-18.8	Peak	Vertical
	11650.5	32.3	12.3	44.6	54.0	-9.4	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz or -17dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.11a	Test Site:	AC1
Test Channel:	157	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	7817.0	37.4	8.4	45.8	68.2	-22.4	Peak	Horizontal
*	8590.5	36.6	8.7	45.3	68.2	-22.9	Peak	Horizontal
	9304.5	36.0	10.4	46.4	74.0	-27.6	Peak	Horizontal
	11565.5	39.7	12.7	52.4	74.0	-21.6	Peak	Horizontal
	7987.0	36.5	8.7	45.2	68.2	-23.0	Peak	Vertical
*	8616.0	36.4	8.8	45.2	68.2	-23.0	Peak	Vertical
*	9364.0	35.4	10.5	45.9	74.0	-28.1	Peak	Vertical
	11574.0	42.1	12.6	54.7	74.0	-19.3	Peak	Vertical
	11574.0	30.1	12.6	42.7	54.0	-11.3	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz or -17dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Test Mode:	802.11a	Test Site:	AC1
Test Channel:	165	Test Engineer:	Peak Wang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	7953.0	35.9	8.6	44.5	68.2	-23.7	Peak	Horizontal
*	8828.5	36.6	9.1	45.7	68.2	-22.5	Peak	Horizontal
	9483.0	35.3	10.6	45.9	74.0	-28.1	Peak	Horizontal
	11489.0	40.5	12.8	53.3	74.0	-20.7	Peak	Horizontal
	7910.5	36.6	8.4	45.0	68.2	-23.2	Peak	Vertical
*	8709.5	36.1	9.0	45.1	68.2	-23.1	Peak	Vertical
*	9355.5	36.1	10.5	46.6	74.0	-27.4	Peak	Vertical
	11497.5	41.9	12.8	54.7	74.0	-19.3	Peak	Vertical
	11497.5	31.7	12.8	44.5	54.0	-9.5	Average	Vertical


Note 1: “*” is not in restricted band, its limit is -27dBm/MHz or -17dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2015/12/06 - 17:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Worst Mode: Transmit at Channel 5745MHz	

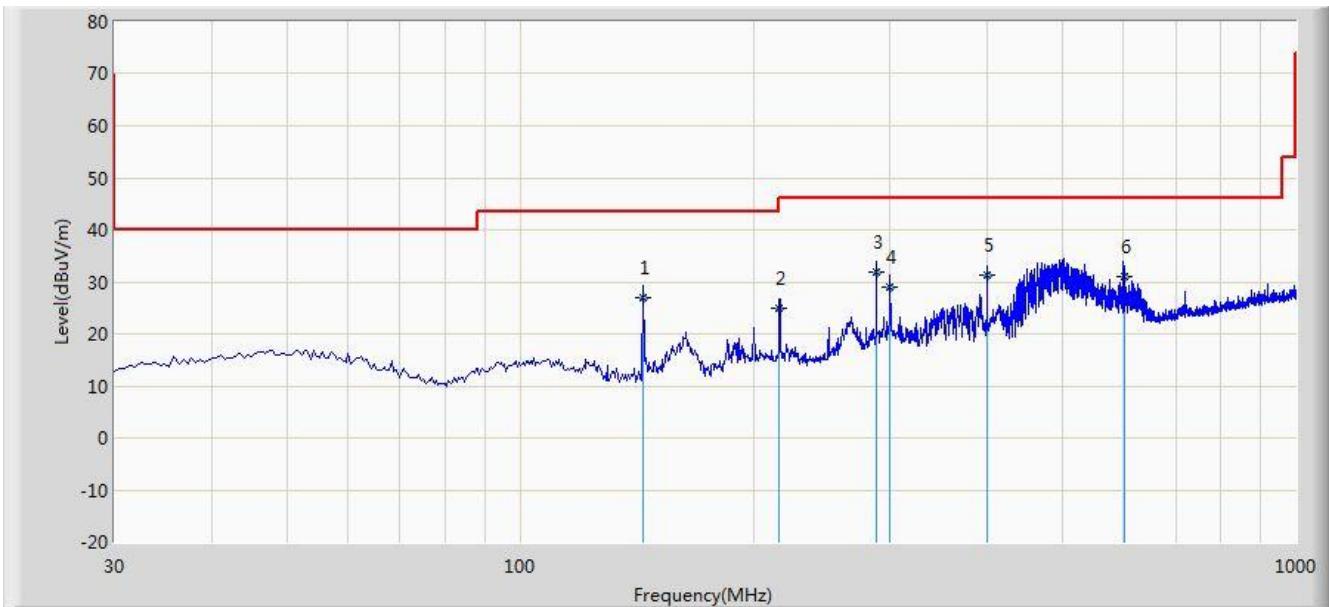


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			144.200	26.926	17.520	-16.574	43.500	9.405	QP
2			215.640	25.040	12.520	-18.460	43.500	12.521	QP
3		*	288.150	31.821	17.520	-14.179	46.000	14.301	QP
4			300.030	28.861	14.300	-17.139	46.000	14.561	QP
5			400.300	31.401	14.670	-14.599	46.000	16.732	QP
6			600.120	31.154	11.060	-14.846	46.000	20.094	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/06 - 17:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Worst Mode: Transmit at Channel 5745MHz	

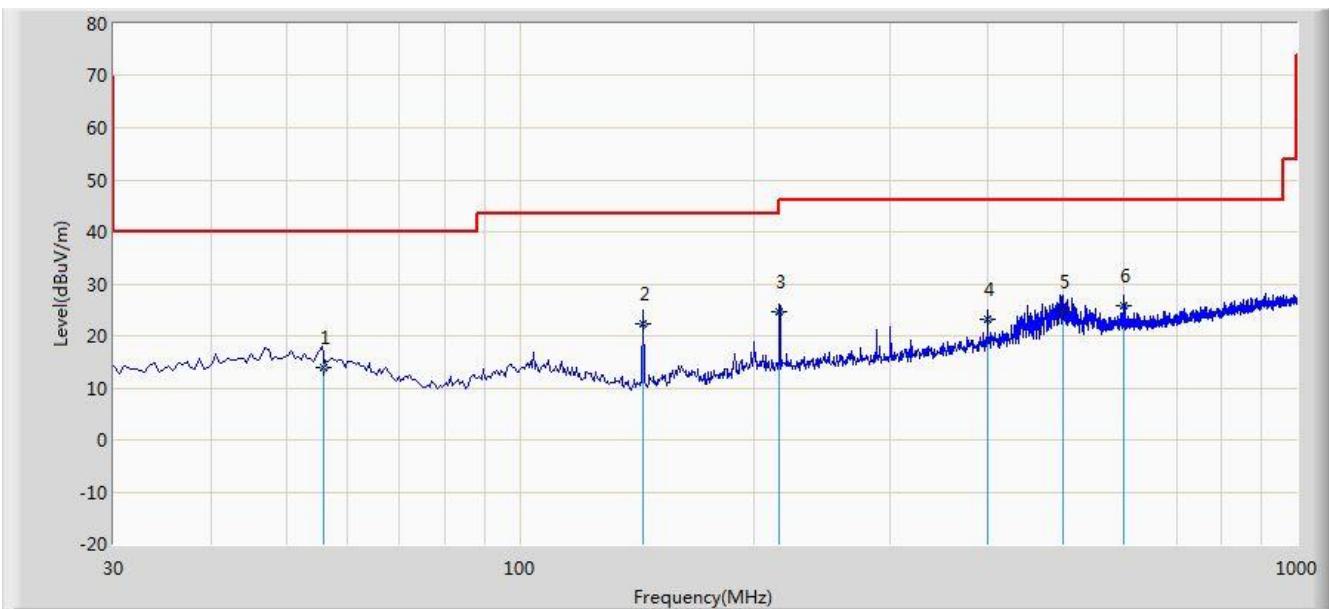


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			55.830	13.853	-0.630	-26.147	40.000	14.484	QP
2			144.060	22.185	12.780	-21.315	43.500	9.405	QP
3		*	215.830	24.497	11.970	-19.003	43.500	12.527	QP
4			400.070	23.225	6.500	-22.775	46.000	16.725	QP
5			500.080	24.631	6.300	-21.369	46.000	18.331	QP
6			600.060	25.713	5.620	-20.287	46.000	20.093	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/06 - 19:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Radio Controller	Power: By Battery

Note: There is the ambient noise within frequency range 9kHz~30MHz.

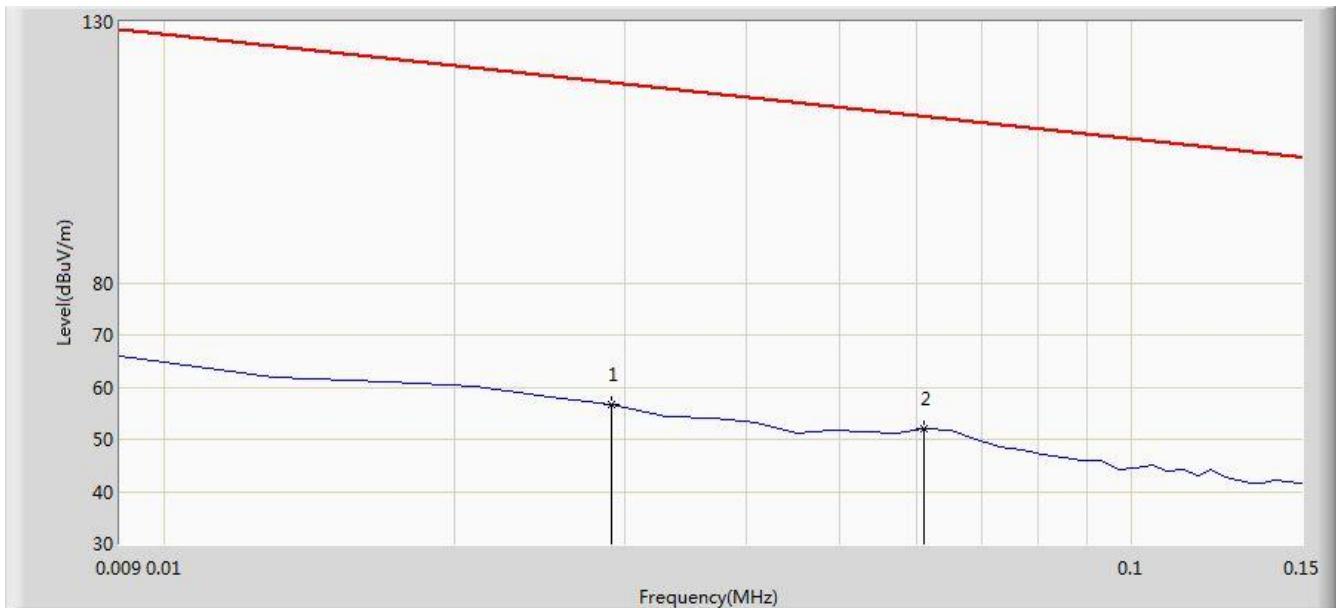


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.029	56.610	35.660	-61.732	118.342	21.049	PK
2		*	0.061	51.899	31.588	-59.988	111.887	20.311	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/06 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Radio Controller	Power: By Battery
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

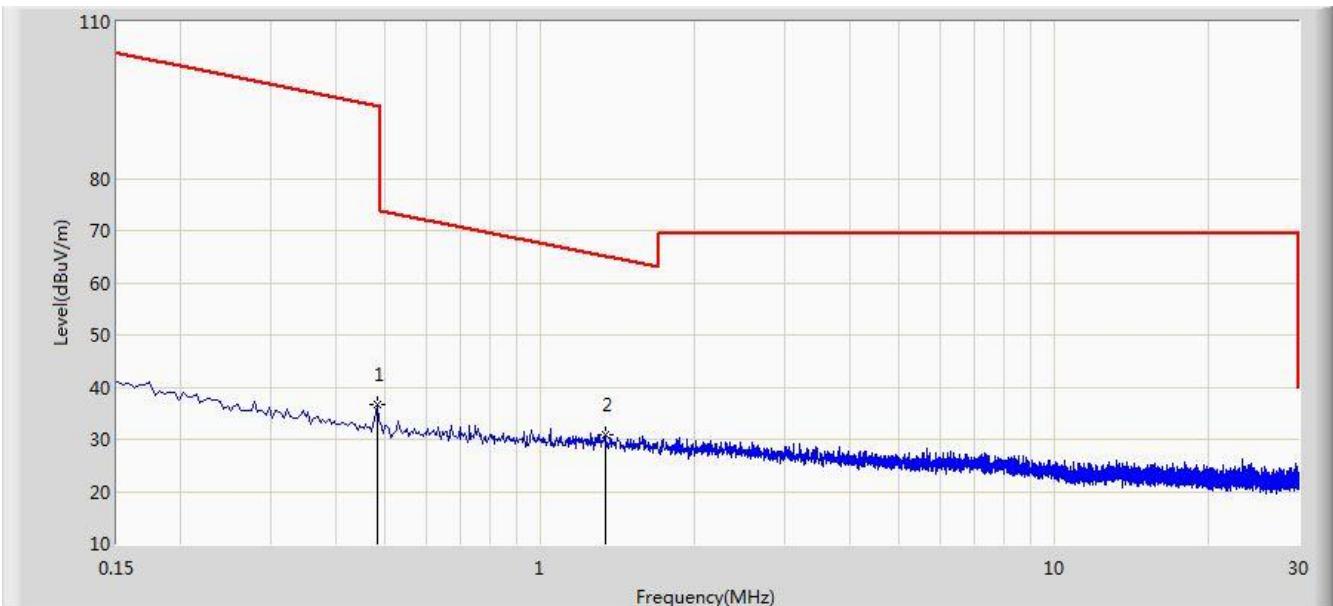


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.482	36.584	16.183	-57.359	93.943	20.401	PK
2		*	1.338	31.001	10.512	-34.098	65.099	20.489	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/12/06 - 21:25
Limit: FCC_Part15.209_RE(1m)	Engineer: Milo Li
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Note: There is the ambient noise within frequency range 18GHz~40GHz.	

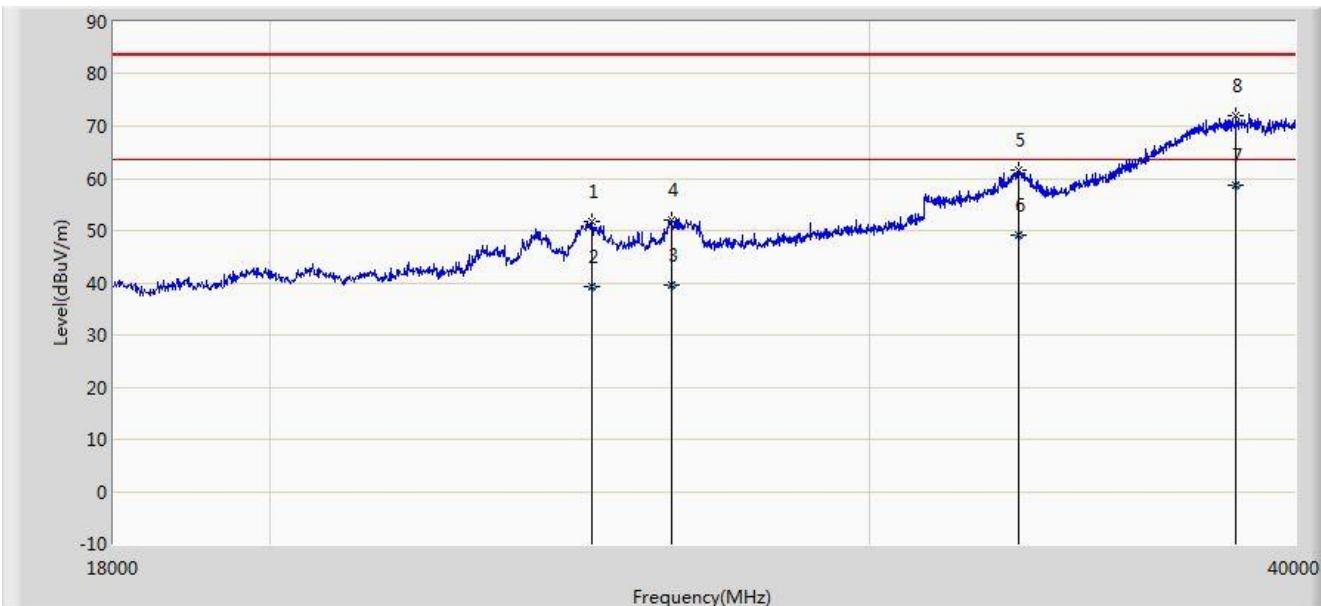


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			24864.000	51.836	37.061	-31.664	83.500	14.775	PK
2			24864.088	39.225	24.450	-24.275	63.500	14.775	AV
3			26260.988	39.469	24.050	-24.031	63.500	15.419	AV
4			26261.000	51.956	36.537	-31.544	83.500	15.419	PK
5			33180.000	61.461	39.940	-22.039	83.500	21.521	PK
6			33180.361	49.061	27.540	-14.439	63.500	21.521	AV
7	*		38437.980	58.523	31.190	-4.977	63.500	27.333	AV
8			38438.000	72.021	44.688	-11.479	83.500	27.333	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Limit@1m = $20 \cdot \log(500\mu\text{V}/\text{m}) + 20 \cdot \log(3\text{m}/1\text{m}) = 63.5\text{dB}\mu\text{V}/\text{m}$ (Average detector), and $83.5\text{dB}\mu\text{V}/\text{m}$ (Peak detector).

Site: AC1	Time: 2015/12/06 - 21:28
Limit: FCC_Part15.209_RE(1m)	Engineer: Milo Li
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Note: There is the ambient noise within frequency range 18GHz~40GHz.	

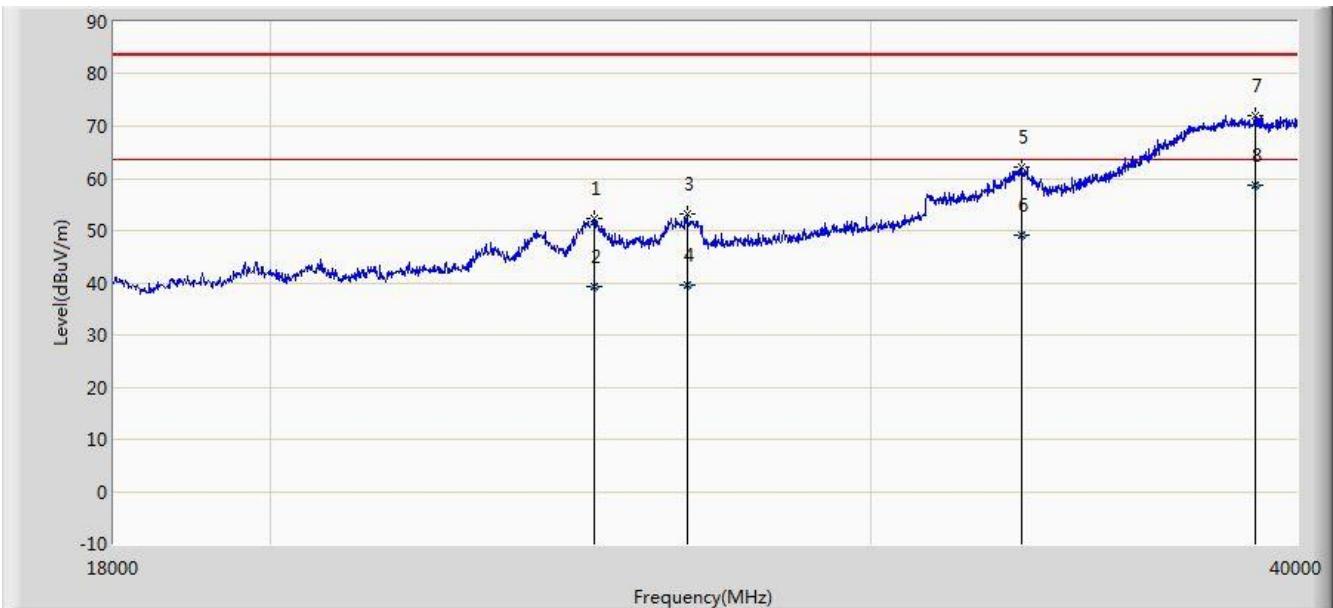

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			24886.000	52.313	37.528	-31.187	83.500	14.785	PK
2			24886.970	39.234	24.449	-24.266	63.500	14.785	AV
3			26503.000	53.227	37.207	-30.273	83.500	16.020	PK
4			26503.872	39.572	23.550	-23.928	63.500	16.022	AV
5			33213.000	62.110	40.572	-21.390	83.500	21.538	PK
6			33213.984	49.098	27.560	-14.402	63.500	21.538	AV
7			38900.000	72.096	44.211	-11.404	83.500	27.885	PK
8		*	38900.755	58.705	30.820	-4.795	63.500	27.885	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Limit@1m = $20 \cdot \log(500\mu\text{V}/\text{m}) + 20 \cdot \log(3\text{m}/1\text{m}) = 63.5\text{dB}\mu\text{V}/\text{m}$ (Average detector), and $83.5\text{dB}\mu\text{V}/\text{m}$ (Peak detector).

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For RSS-Gen Section 8.10 Requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 -1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 -2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 -3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 -13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

Note: *Certain frequency bands listed in Table 6 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the

devices are set out in the 200- and 300-series of RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus.

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


Refer to KDB 789033 D02v01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Result of Radiated Restricted Band Edge

Site: AC1	Time: 2015/12/17 - 15:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5745MHz	

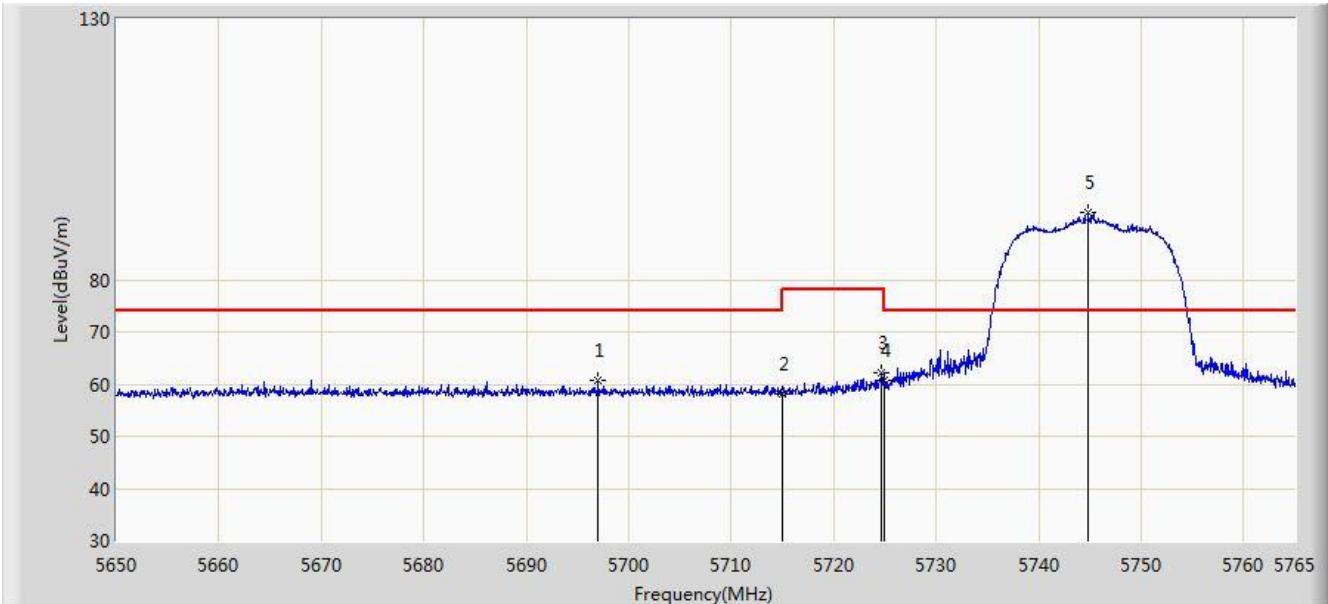


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5697.035	60.767	57.052	-13.233	74.000	3.714	PK
2			5715.000	58.006	54.245	-15.994	74.000	3.761	PK
3			5724.635	62.123	58.333	-16.077	78.200	3.790	PK
4			5725.000	60.798	57.007	-17.402	78.200	3.791	PK
5		*	5744.817	92.994	89.142	N/A	N/A	3.851	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5745MHz	

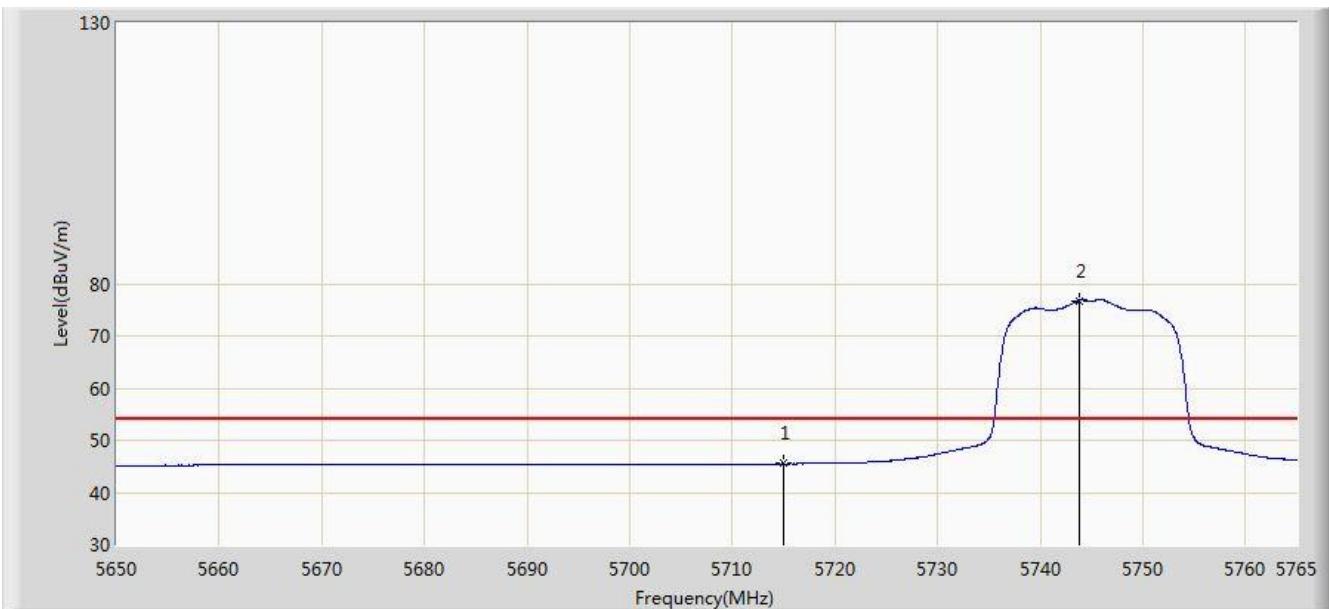


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	45.514	41.753	-8.486	54.000	3.761	AV
2	*		5743.783	76.797	72.949	N/A	N/A	3.848	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 15:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5745MHz	

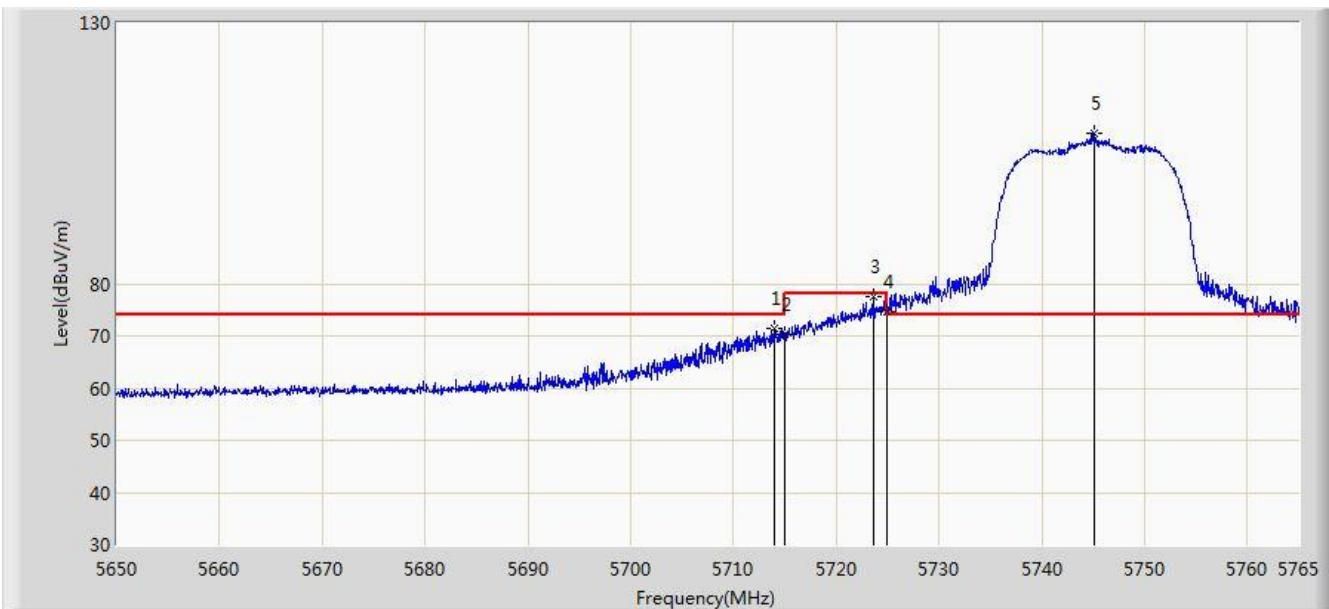


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.055	71.499	67.741	-2.501	74.000	3.758	PK
2			5715.000	70.199	66.438	-3.801	74.000	3.761	PK
3			5723.600	77.553	73.766	-0.647	78.200	3.787	PK
4			5725.000	74.715	70.924	-3.485	78.200	3.791	PK
5	*		5745.163	108.942	105.089	N/A	N/A	3.854	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 15:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5745MHz	

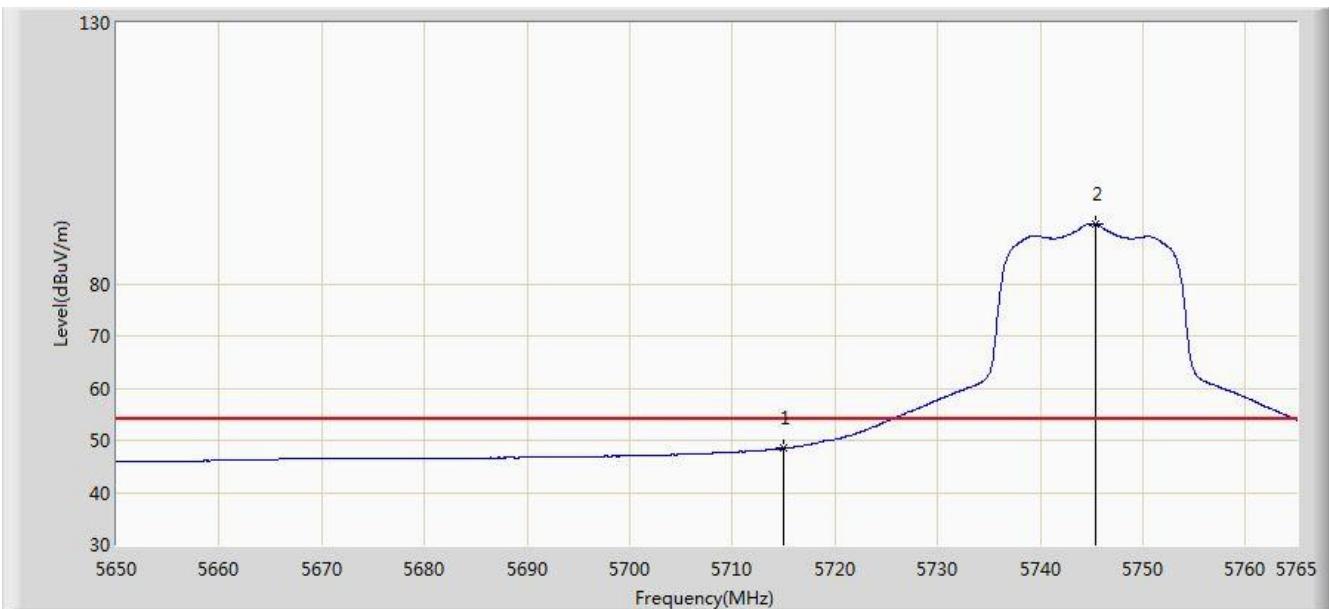


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.462	44.701	-5.538	54.000	3.761	AV
2	*		5745.450	91.486	87.632	N/A	N/A	3.854	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5825MHz	

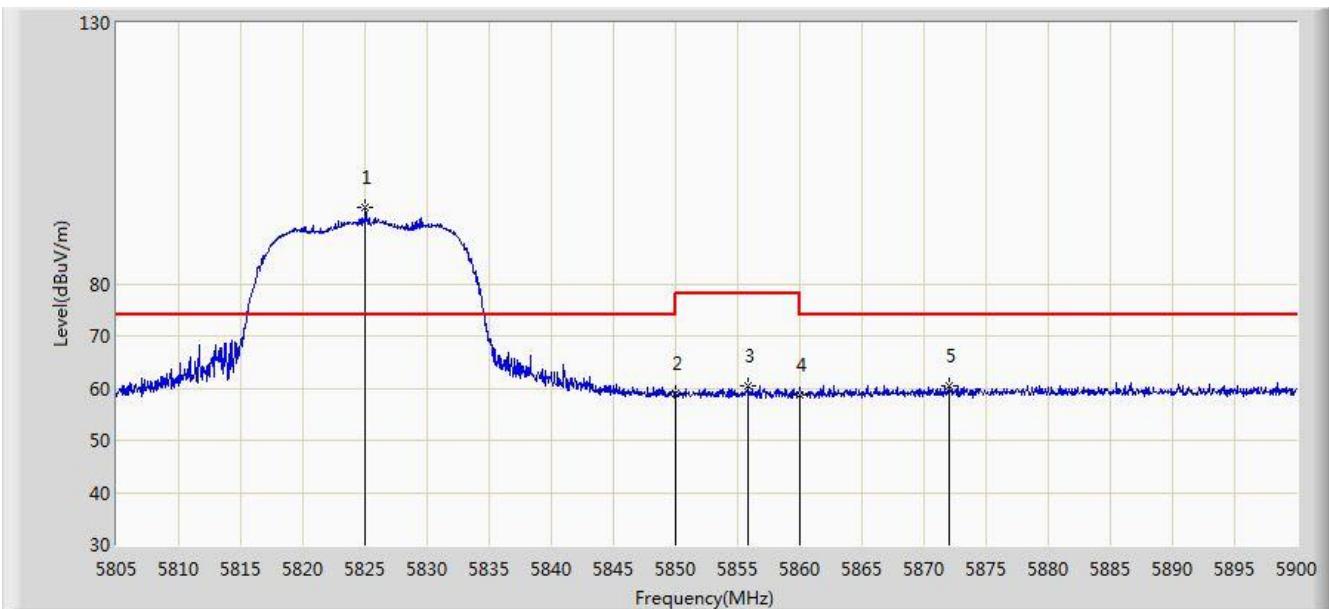


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5824.998	94.556	90.551	N/A	N/A	4.006	PK
2			5850.000	58.926	54.869	-19.274	78.200	4.058	PK
3			5855.825	60.385	56.324	-17.815	78.200	4.061	PK
4			5860.000	58.623	54.560	-15.377	74.000	4.064	PK
5			5872.022	60.366	56.270	-13.634	74.000	4.096	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 16:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5825MHz	

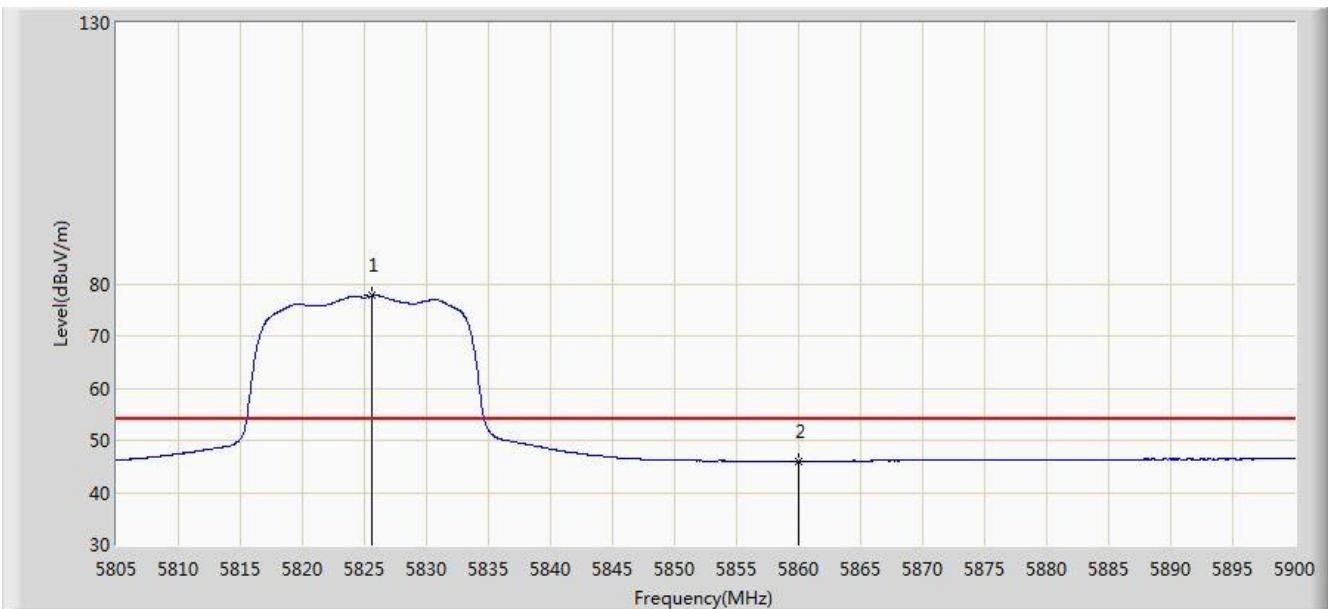


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5825.615	77.687	73.680	N/A	N/A	4.006	AV
2			5860.000	45.977	41.914	-8.023	54.000	4.064	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 16:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5825MHz	

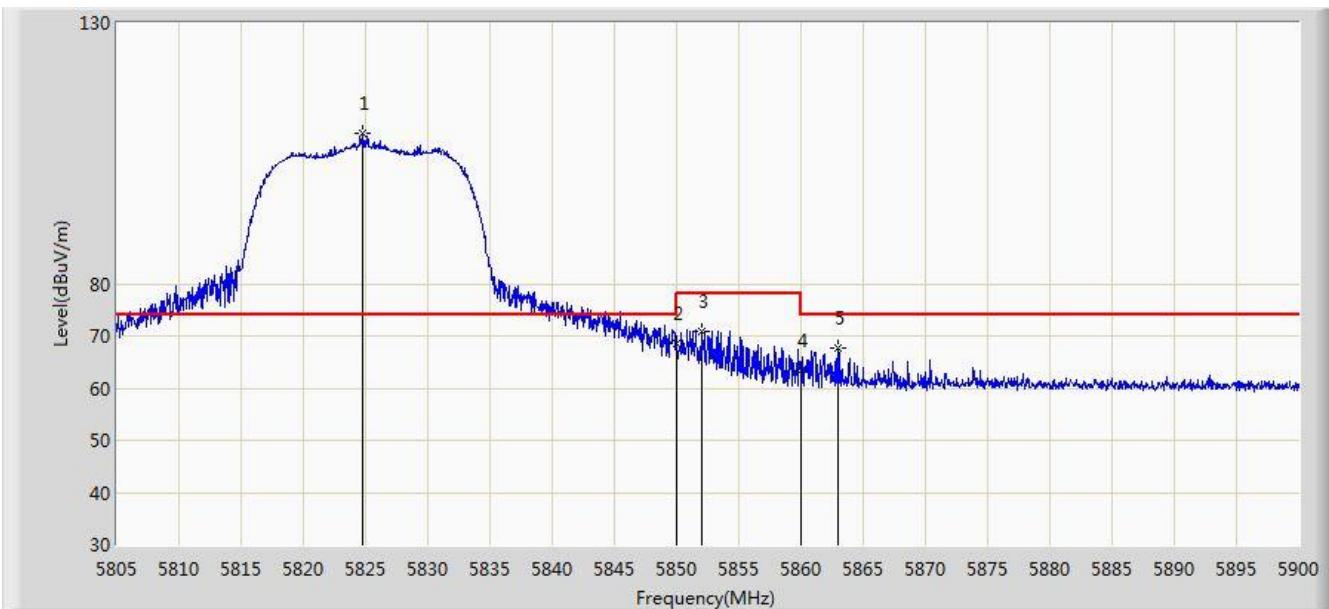


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5824.808	108.895	104.890	N/A	N/A	4.005	PK
2			5850.000	68.643	64.586	-9.557	78.200	4.058	PK
3			5851.978	70.986	66.928	-7.214	78.200	4.058	PK
4			5860.000	63.471	59.408	-10.529	74.000	4.064	PK
5			5862.950	67.796	63.728	-6.204	74.000	4.068	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/12/17 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Radio Controller	Power: By Battery
Test Mode: Transmit at Channel 5825MHz	

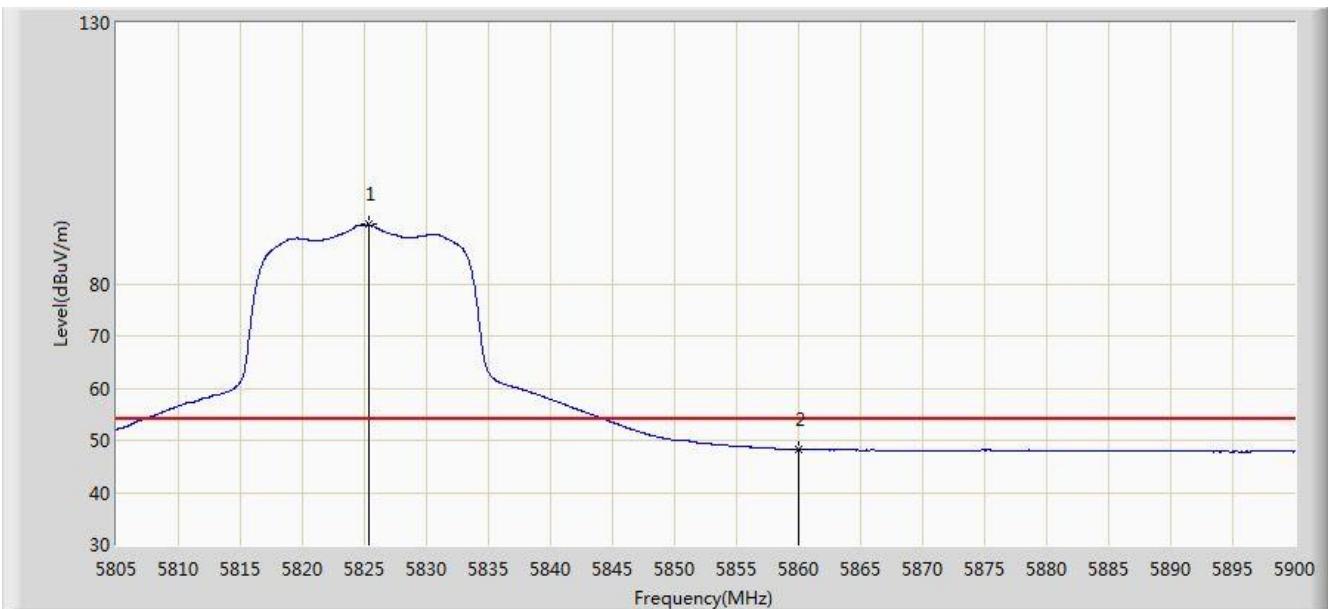

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5825.330	91.329	87.323	N/A	N/A	4.006	AV
2			5860.000	48.253	44.190	-5.747	54.000	4.064	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB)

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 & RSS-Gen Issue 4 Section 8.8 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

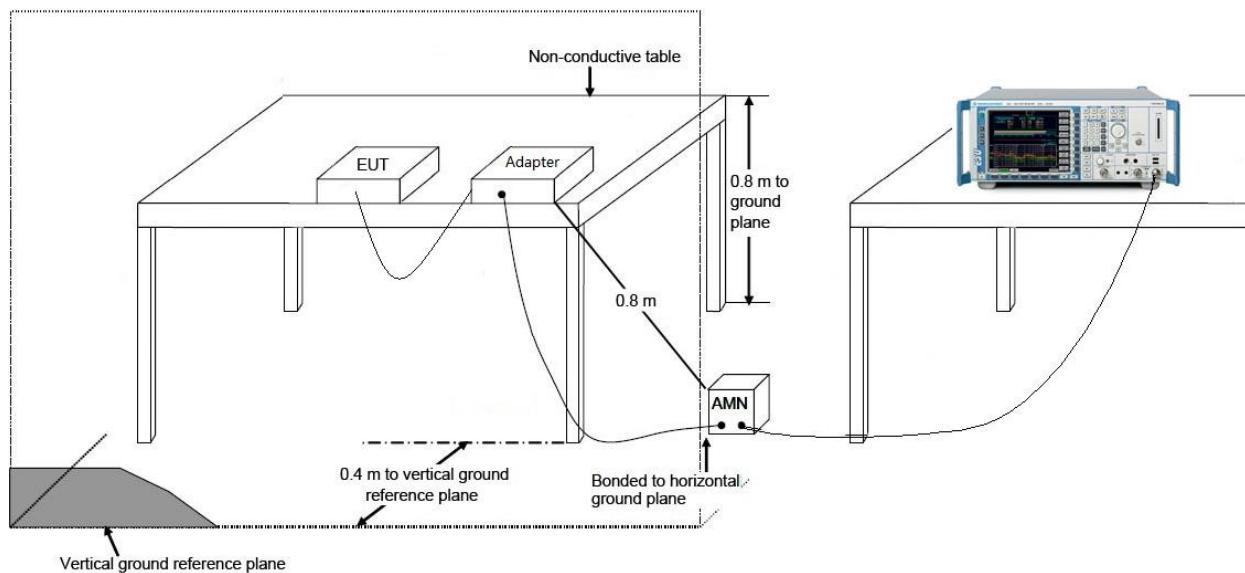

7.9.4. Test Result

Site: SR2	Time: 2015/12/01 - 11:27
Limit: FCC_Part15.207_CE_AC Power	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Radio Controller	Power: AC 120V/60Hz
Note: Mode 1	

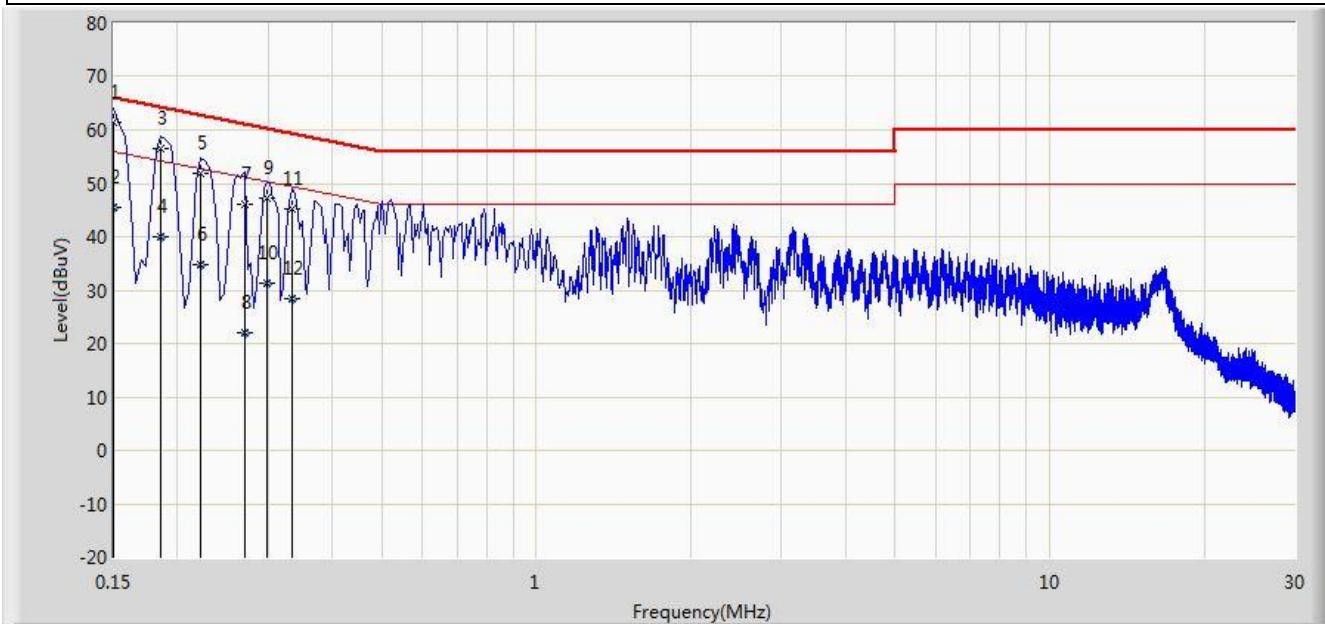


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V)	Factor (dB)	Type
1		*	0.150	61.464	50.296	-4.536	66.000	11.168	QP
2			0.150	45.409	34.241	-10.591	56.000	11.168	AV
3			0.186	56.382	46.344	-7.831	64.213	10.039	QP
4			0.186	39.977	29.939	-14.236	54.213	10.039	AV
5			0.222	51.817	41.877	-10.926	62.744	9.941	QP
6			0.222	34.833	24.892	-17.911	52.744	9.941	AV
7			0.270	46.189	36.209	-14.929	61.118	9.980	QP
8			0.270	21.960	11.980	-29.158	51.118	9.980	AV
9			0.298	47.288	37.285	-13.011	60.298	10.002	QP
10			0.298	31.409	21.407	-18.889	50.298	10.002	AV
11			0.334	45.288	35.257	-14.063	59.351	10.031	QP
12			0.334	28.541	18.509	-20.811	49.351	10.031	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/12/01 - 11:32
Limit: FCC_Part15.207_CE_AC Power	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Radio Controller	Power: AC 120V/60Hz
Note: Mode 1	

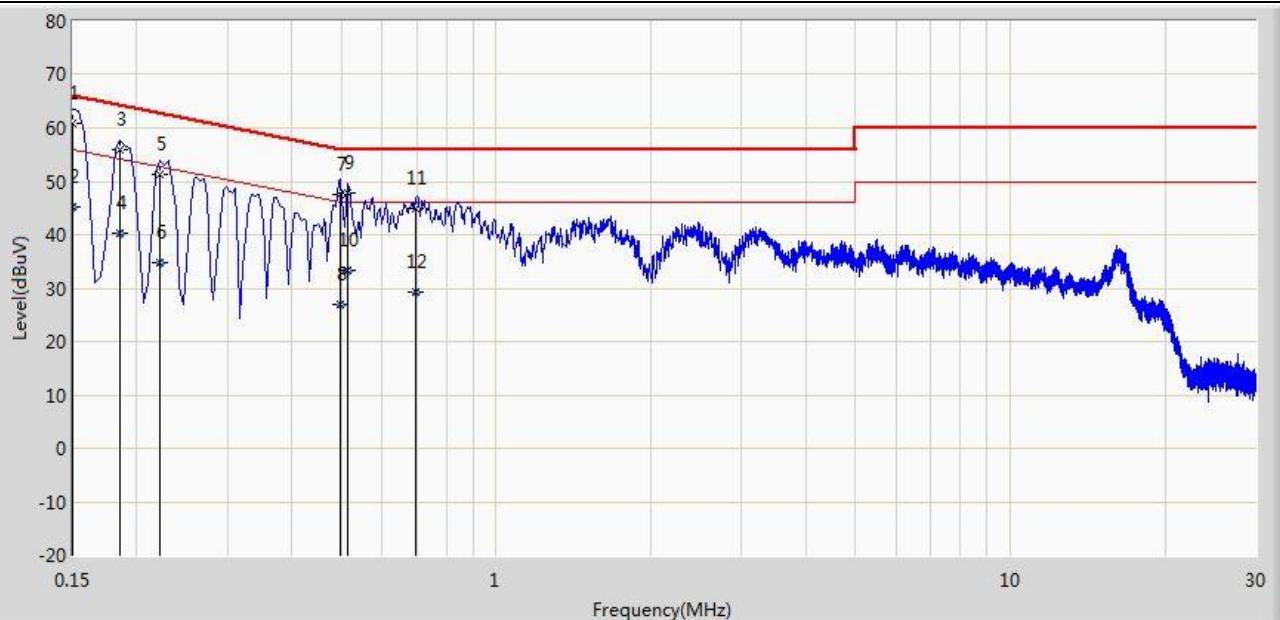

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	60.777	49.635	-5.223	66.000	11.142	QP
2			0.150	45.274	34.132	-10.726	56.000	11.142	AV
3			0.186	55.942	45.907	-8.271	64.213	10.035	QP
4			0.186	40.159	30.124	-14.054	54.213	10.035	AV
5			0.222	51.368	41.388	-11.376	62.744	9.980	QP
6			0.222	34.725	24.746	-18.019	52.744	9.980	AV
7			0.498	47.407	37.229	-8.626	56.033	10.178	QP
8			0.498	26.928	16.750	-19.106	46.033	10.178	AV
9			0.514	47.917	37.741	-8.083	56.000	10.176	QP
10			0.514	33.455	23.279	-12.545	46.000	10.176	AV
11			0.698	44.893	34.817	-11.107	56.000	10.076	QP
12			0.698	29.171	19.095	-16.829	46.000	10.076	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Radio Controller FCC ID:**

2ACS5-ST12 Mode Number: ST12 is in compliance with Part 15E of the FCC Rules.

The End