


TEST REPORT

Applicant: Yuneec Technology Co., Limited
Address: Unit 2301, 23/F, 9 Chong Yip Street, Kwun Tong, Kowloon, Hong Kong
Equipment Type: Smart Remote Controller
Model Name: T-One
Brand Name: YUNEEC
FCC ID: 2ACS5-TONE
ISED Number: 11554B-TONE
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 2
(refer section 3.1)
Test Date: Jun. 24, 2022
Date of Issue: Jun. 27, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming

(Technical Director)



Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jun. 27, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Technical Information	6
2.6	Additional Instructions.....	7
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments.....	9
4.2	Test Equipment List.....	9
4.3	Test Software List.....	9
4.4	Description of Test Setup	10
4.5	Measurement Results Explanation Example.....	13
5	TEST ITEMS	14
5.1	Antenna Requirements	14
5.2	Number of Hopping Frequency	15
5.3	Peak Output Power and E.I.R.P	16
5.4	Occupied Bandwidth.....	17

5.5	Hopping Frequency Separation	18
5.6	Time of Occupancy (Dwell time)	19
5.7	Conducted Spurious Emission & Authorized-band band-edge.....	20
5.8	Conducted Emission.....	21
5.9	Radiated Spurious Emission.....	22
5.10	Band Edge (Restricted-band band-edge).....	24
ANNEX A	TEST RESULT	25
A.1	Number of Hopping Frequency	25
A.2	Peak Output Power and E.I.R.P	25
A.3	Occupied Bandwidth.....	25
A.4	Hopping Frequency Separation	25
A.5	Time of Occupancy (Dwell time)	25
A.6	Conducted Spurious Emissions & Authorized-band band-edge	25
A.7	Conducted Emissions	26
A.8	Radiated Emission.....	28
A.9	Band Edge (Restricted-band band-edge).....	32
ANNEX B	TEST SETUP PHOTOS	33
ANNEX C	EUT EXTERNAL PHOTOS.....	33
ANNEX D	EUT INTERNAL PHOTOS.....	33

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Yuneec Technology Co., Limited
Address	Unit 2301, 23/F, 9 Chong Yip Street, Kwun Tong, Kowloon, Hong Kong

2.2 Manufacturer Information

Manufacturer	Yuneec International (China) Co., Ltd
Address	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China

2.3 Factory Information

Factory	Yuneec International (China) Co., Ltd
Address	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Smart Remote Controller
Model Name Under Test	T-One
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	Tone20220322
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	2.4G ISM Band (OFDM modulation)
-----------------------------------	---------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	OFDM
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	0.25 Mbps
Frequency Range	The frequency range used is 2405 MHz – 2473 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of Channel	18
Nominal Channel Bandwidth	1.4MHz
Tested Channel	Low channel (2405 MHz), Middle channel(2441 MHz), High channel (2473 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	5 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Adaptive or non-adaptive	non-adaptive
The Max RF Output power	18.45 dBm

Channel List

Number	Frequency (MHz)	Number	Frequency (MHz)
1	2405(Low)	10	2441(Middle)
2	2409	11	2445
3	2413	12	2449
4	2417	13	2453
5	2421	14	2457
6	2425	15	2461
7	2429	16	2465
8	2433	17	2469
9	2437	18	2473(High)

2.6 Additional Instructions

EUT Software Settings:


Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Artosyn Test System_4.4.8		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220

Mode	Channel	Frequency (MHz)	Soft Set
Ground Mode	Low	2406	8
	Middle	2441	8
	High	2476	8

Run Software:

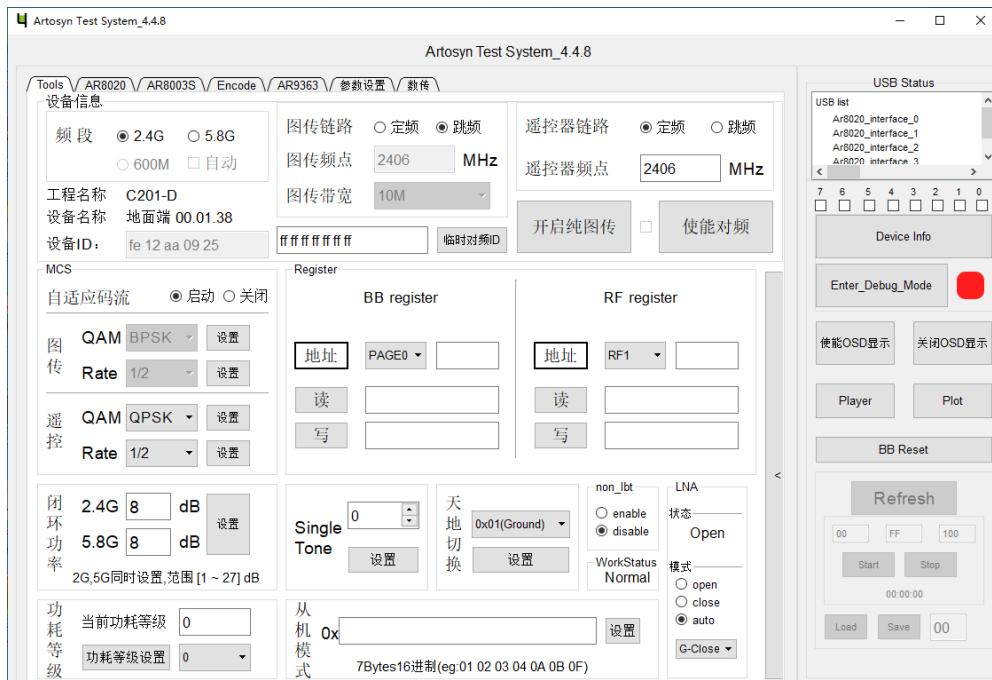

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	--	Pass <small>Note 1</small>
2	Number of Hopping Frequency	15.247(a)	RSS-247, 5.1 (4)	ANNEX A.1	Pass
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	ANNEX A.3	Pass
5	Hopping Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	ANNEX A.8	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	ANNEX A.9	Pass
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	N/A <small>Note 2</small>

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note ³: The RF module (Model Name: YUNC201-D) installed in the EUT is electronically and mechanically identical to the original certified module in the test report No. BL-EC2220046-601, so just Conducted Emissions & cabinet radiated test of Radiated Emission and Band Edge (Restricted-band band-edge) were retested in this report. Other test items please refer to the report of No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%				
Atmospheric Pressure	100 kPa to 102 kPa				
Temperature	NT (Normal Temperature)				20°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)				12 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2022.05.19	2023.05.18
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2022.05.19	2023.05.18
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.09.13	2022.09.12
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.10.10	2022.10.09
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2022.02.19	2024.09.03
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List


Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Description of Test Setup

4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:
 Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

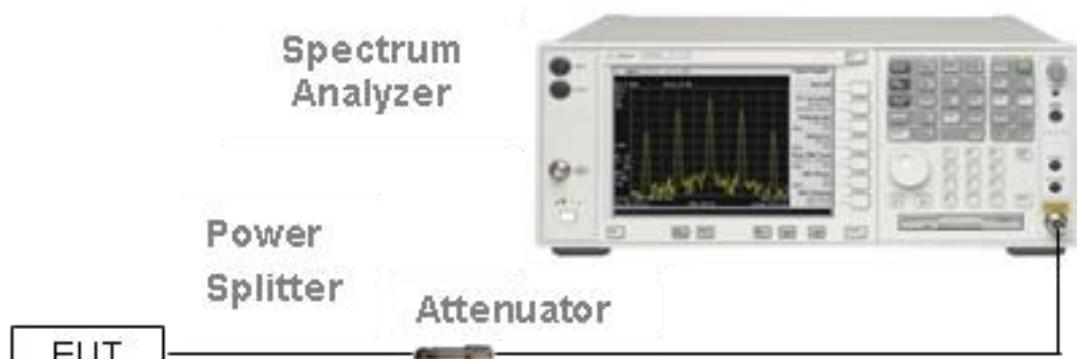


(Diagram 1)

4.4.2 For AC Power Supply Port Test

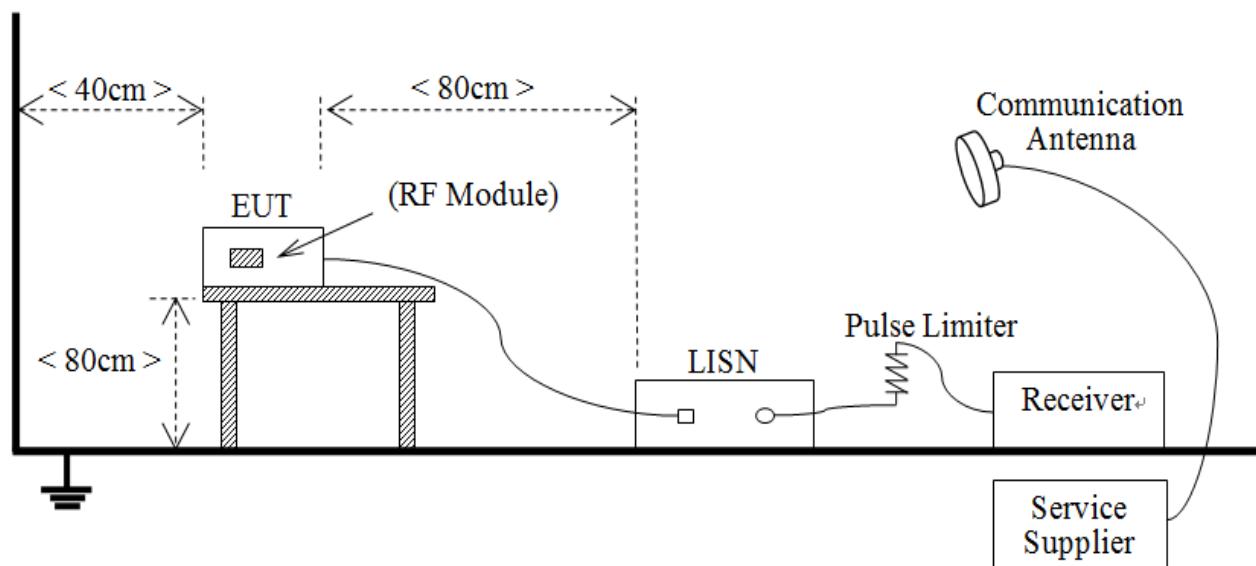


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

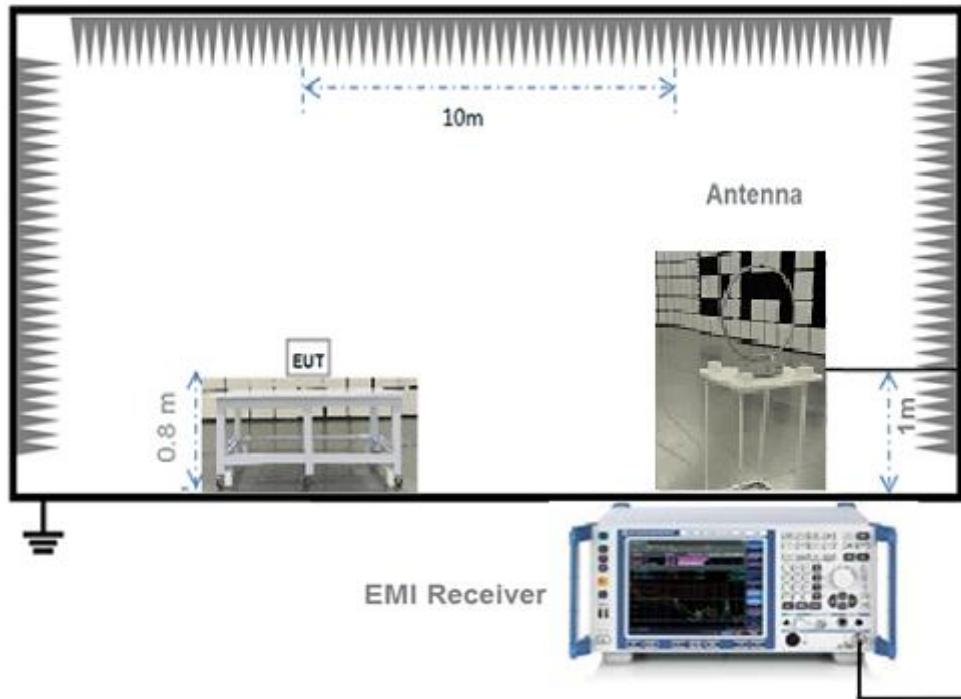


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

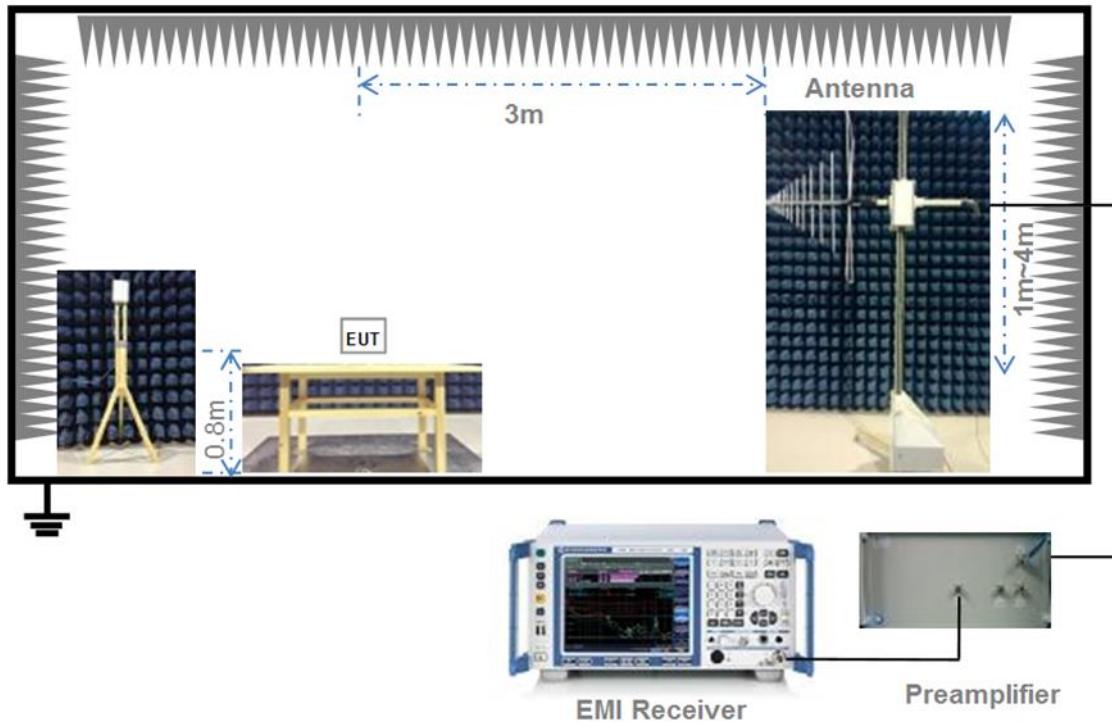

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

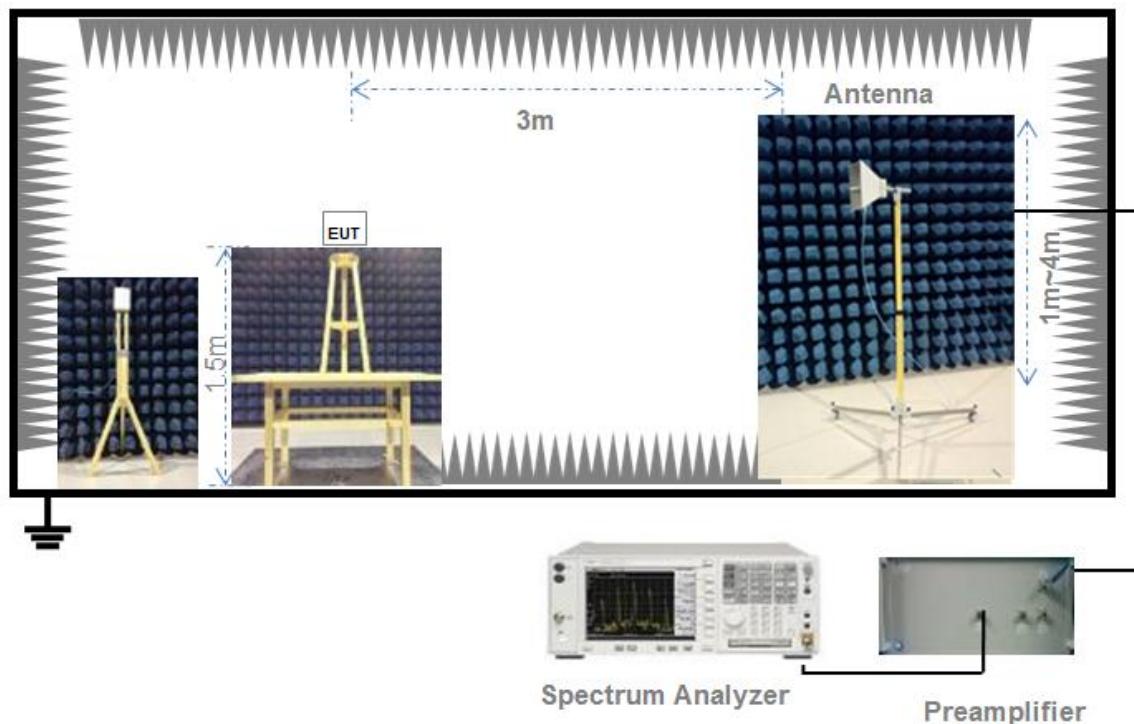

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dB_{UV}/m) = Peak Emission Level (dB_{UV}/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = 20 * log (Duty cycle).

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = 20 * log ((2.9 * 3) / 100) = -21.21 dB

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dB_{UV}/m.

Example:

Average Emission Level (dB_{UV}/m) = Peak Emission Level (dB_{UV}/m) + duty cycle correction factor (dB)
= 45.61 + (-21.21) = 24.4 (dB_{UV}/m)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Hopping Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB μ V/m@3m (AV) and 74dB μ V/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency

Note: Number of Hopping Frequency test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.1 Number of Hopping Frequency.**

A.2 Peak Output Power and E.I.R.P

Note: Peak Output Power and E.I.R.P test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.2 Peak Output Power and E.I.R.P.**

A.3 Occupied Bandwidth

Note: Occupied Bandwidth test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.3 Occupied Bandwidth.**

A.4 Hopping Frequency Separation

Note: Hopping Frequency Separation test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.4 Hopping Frequency Separation.**

A.5 Time of Occupancy (Dwell time)

Note: Time of Occupancy (Dwell time) test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.5 Time of Occupancy (Dwell time).**

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Note: Conducted Spurious Emissions & Authorized-band band-edge test please refer to the Report. No. BL-EC2220046-601 issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 22, 2022., **Section A.6 Conducted Spurious Emissions & Authorized-band band-edge).**


A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

PHASE L

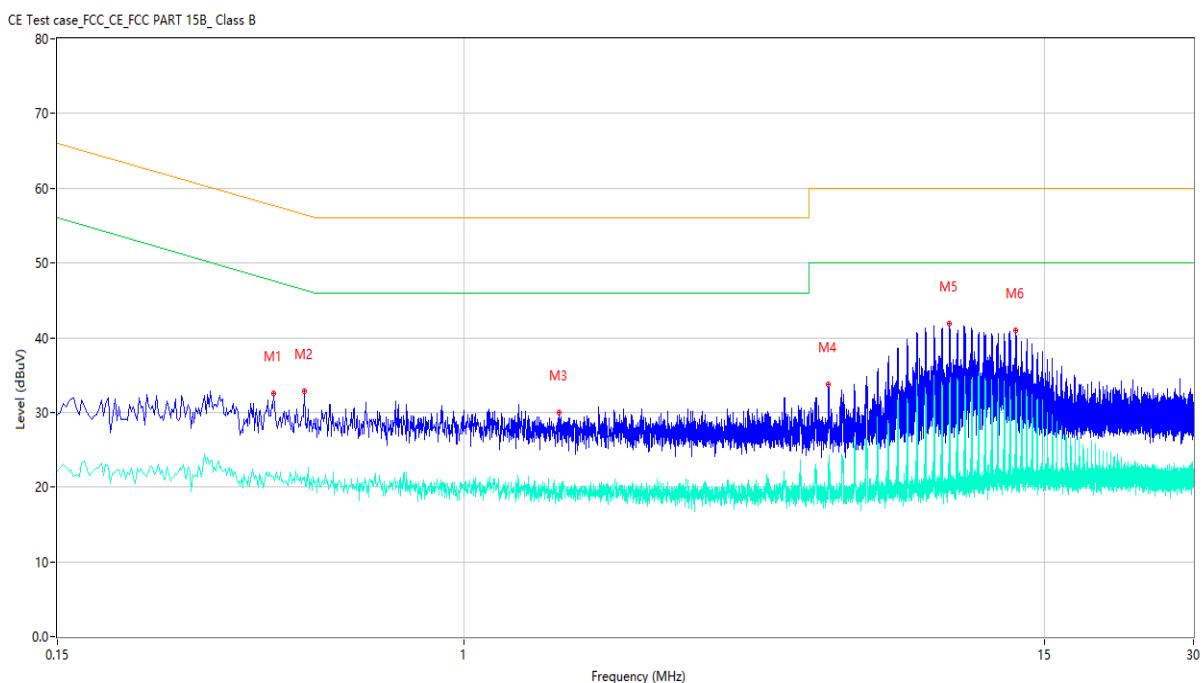

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.412	32.59	10.48	57.61	-25.02	Peak	L	Pass
1**	0.412	21.38	10.48	47.61	-26.23	AV	L	Pass
2	0.474	32.83	10.27	56.44	-23.61	Peak	L	Pass
2**	0.474	21.38	10.27	46.44	-25.06	AV	L	Pass
3	1.560	29.98	10.18	56.00	-26.02	Peak	L	Pass
3**	1.560	18.06	10.18	46.00	-27.94	AV	L	Pass
4	5.474	33.75	10.50	60.00	-26.25	Peak	L	Pass
4**	5.474	22.76	10.50	50.00	-27.24	AV	L	Pass
5	9.624	41.84	10.72	60.00	-18.16	Peak	L	Pass
5**	9.624	33.89	10.72	50.00	-16.11	AV	L	Pass
6	13.094	41.03	11.08	60.00	-18.97	Peak	L	Pass
6**	13.094	32.16	11.08	50.00	-17.84	AV	L	Pass

PHASE N

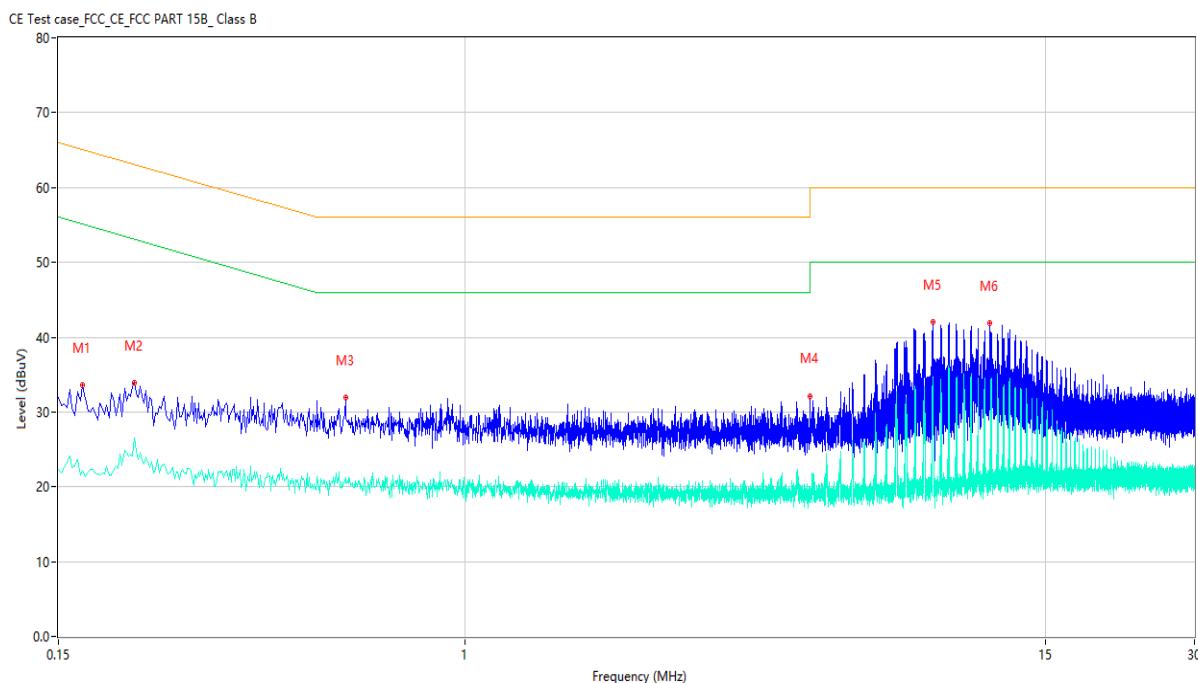

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	33.58	10.11	65.06	-31.48	Peak	N	Pass
1**	0.168	22.09	10.11	55.06	-32.97	AV	N	Pass
2	0.214	33.88	10.33	63.05	-29.17	Peak	N	Pass
2**	0.214	26.54	10.33	53.05	-26.51	AV	N	Pass
3	0.572	31.96	10.12	56.00	-24.04	Peak	N	Pass
3**	0.572	21.32	10.12	46.00	-24.68	AV	N	Pass
4	5.004	32.10	10.46	60.00	-27.90	Peak	N	Pass
4**	5.004	19.79	10.46	50.00	-30.21	AV	N	Pass
5	8.856	42.05	10.63	60.00	-17.95	Peak	N	Pass
5**	8.856	34.51	10.63	50.00	-15.49	AV	N	Pass
6	11.552	41.85	10.81	60.00	-18.15	Peak	N	Pass
6**	11.552	23.32	10.81	50.00	-26.68	AV	N	Pass

A.8 Radiated Emission

Test Data and Plots


Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

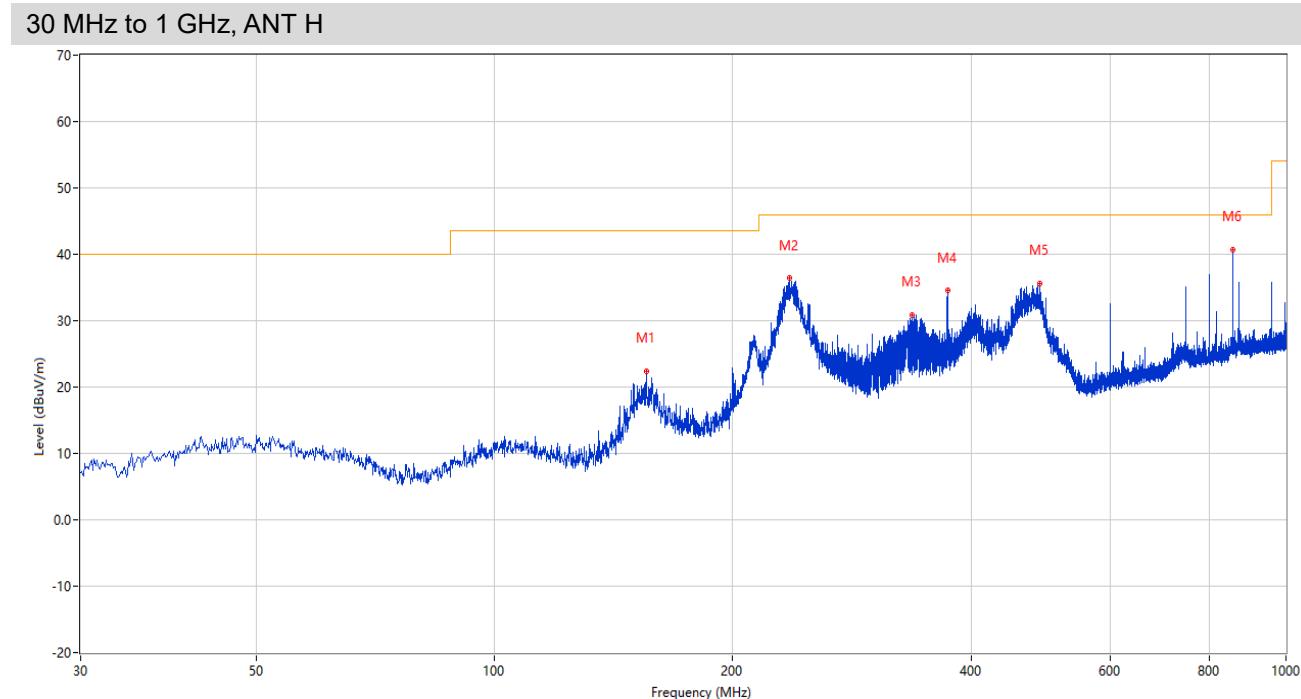

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	155.615	22.43	-29.05	43.5	-21.07	Peak	165.00	100	Horizontal	Pass
2	235.640	36.40	-25.12	46.0	-9.60	Peak	269.00	100	Horizontal	Pass
3	337.369	30.78	-22.72	46.0	-15.22	Peak	70.00	100	Horizontal	Pass
4	373.501	34.57	-22.12	46.0	-11.43	Peak	23.00	100	Horizontal	Pass
5	488.568	35.65	-19.62	46.0	-10.35	Peak	120.00	100	Horizontal	Pass
6	855.955	40.73	-12.21	46.0	-5.27	Peak	358.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

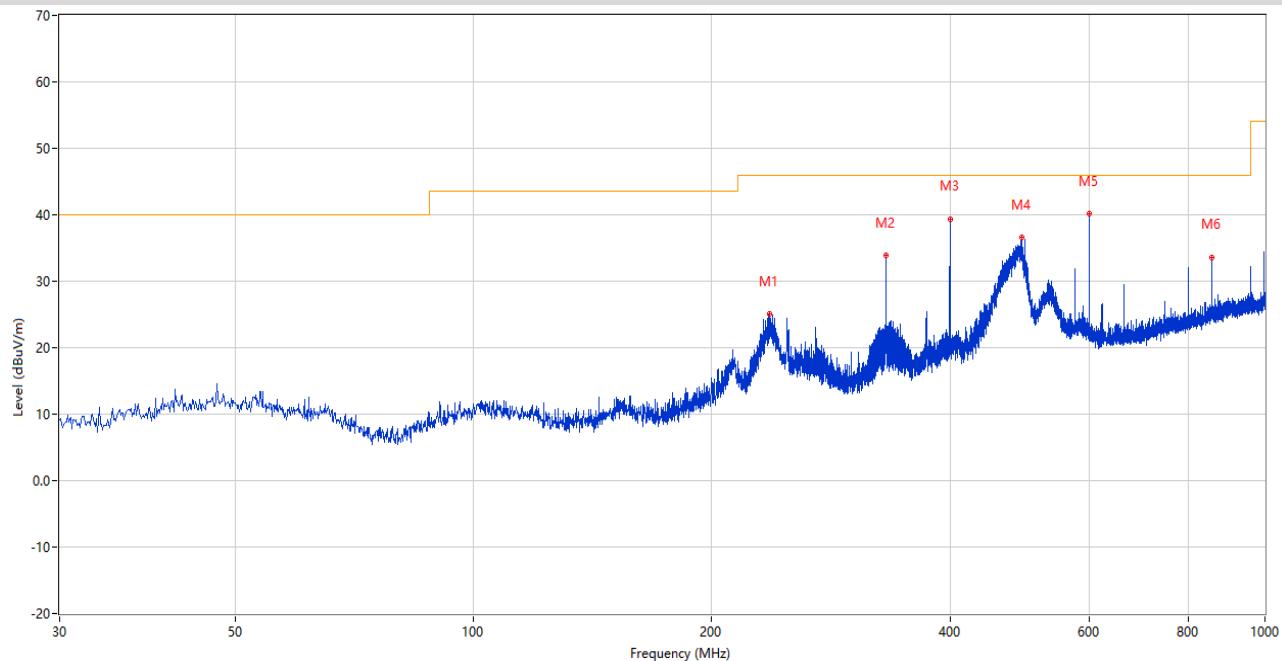


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	236.731	25.06	-25.17	46.0	-20.94	Peak	360.00	100	Vertical	Pass
2	332.034	33.84	-22.91	46.0	-12.16	Peak	227.00	100	Vertical	Pass
3	400.055	39.34	-21.40	46.0	-6.66	Peak	306.00	100	Vertical	Pass
4	492.326	36.57	-19.56	46.0	-9.43	Peak	56.00	100	Vertical	Pass
5	599.996	40.17	-16.54	46.0	-5.83	Peak	167.00	100	Vertical	Pass
6	855.955	33.59	-12.21	46.0	-12.41	Peak	154.00	100	Vertical	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

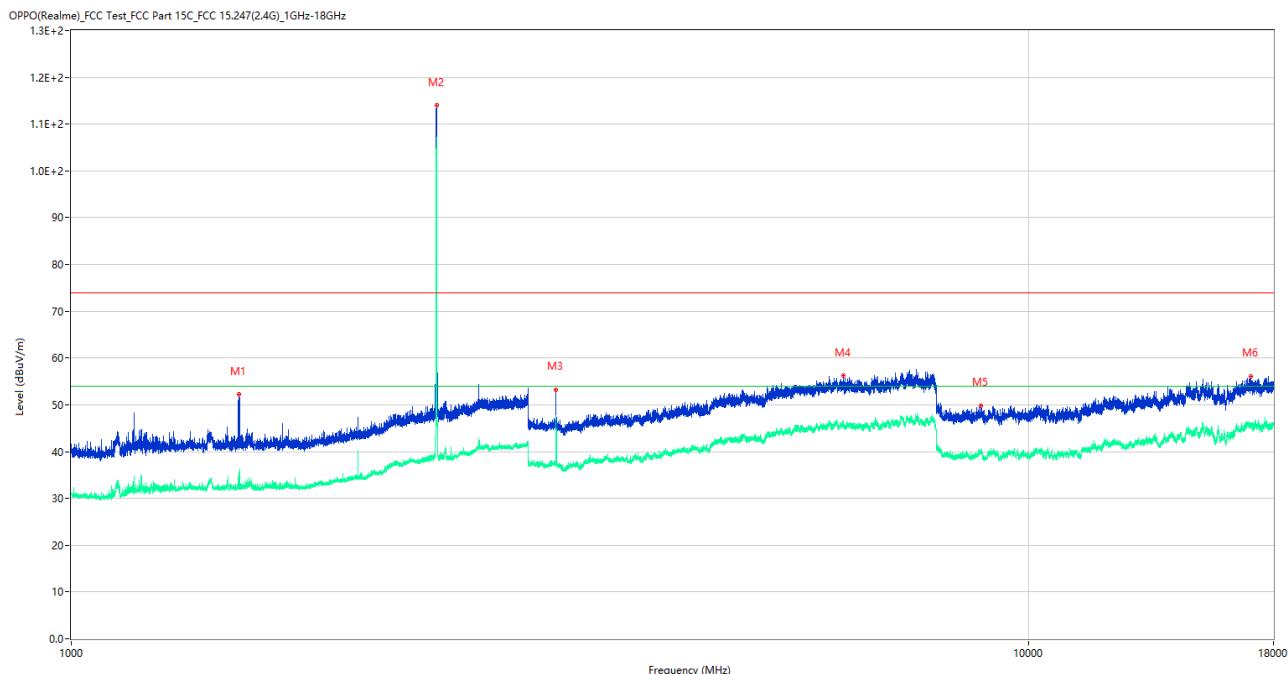Cabinet Radiated Test Data**OFDM LOW CHANNEL 1 GHz to 18 GHz, ANT V**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.750	52.33	-16.48	74.0	-21.67	Peak	114.00	100	Vertical	Pass
1**	1497.750	34.72	-16.48	54.0	-19.28	AV	114.00	100	Vertical	Pass
2	2405.000	113.95	-11.22	74.0	39.95	Peak	116.00	100	Vertical	N/A
2**	2405.000	106.25	-11.22	54.0	52.25	AV	116.00	100	Vertical	N/A
3	3208.125	53.27	-6.52	74.0	-20.73	Peak	266.00	100	Vertical	Pass
3**	3208.125	43.48	-6.52	54.0	-10.52	AV	266.00	100	Vertical	Pass
4	6395.000	56.21	2.13	74.0	-17.79	Peak	257.00	100	Vertical	Pass
4**	6395.000	45.88	2.13	54.0	-8.12	AV	257.00	100	Vertical	Pass
5	8916.250	49.86	-3.17	74.0	-24.14	Peak	109.00	100	Vertical	Pass
5**	8916.250	40.09	-3.17	54.0	-13.91	AV	109.00	100	Vertical	Pass
6	17036.250	56.14	4.38	74.0	-17.86	Peak	267.00	100	Vertical	Pass
6**	17036.250	45.78	4.38	54.0	-8.22	AV	267.00	100	Vertical	Pass

OFDM LOW CHANNEL 1 GHz to 18 GHz, ANT H

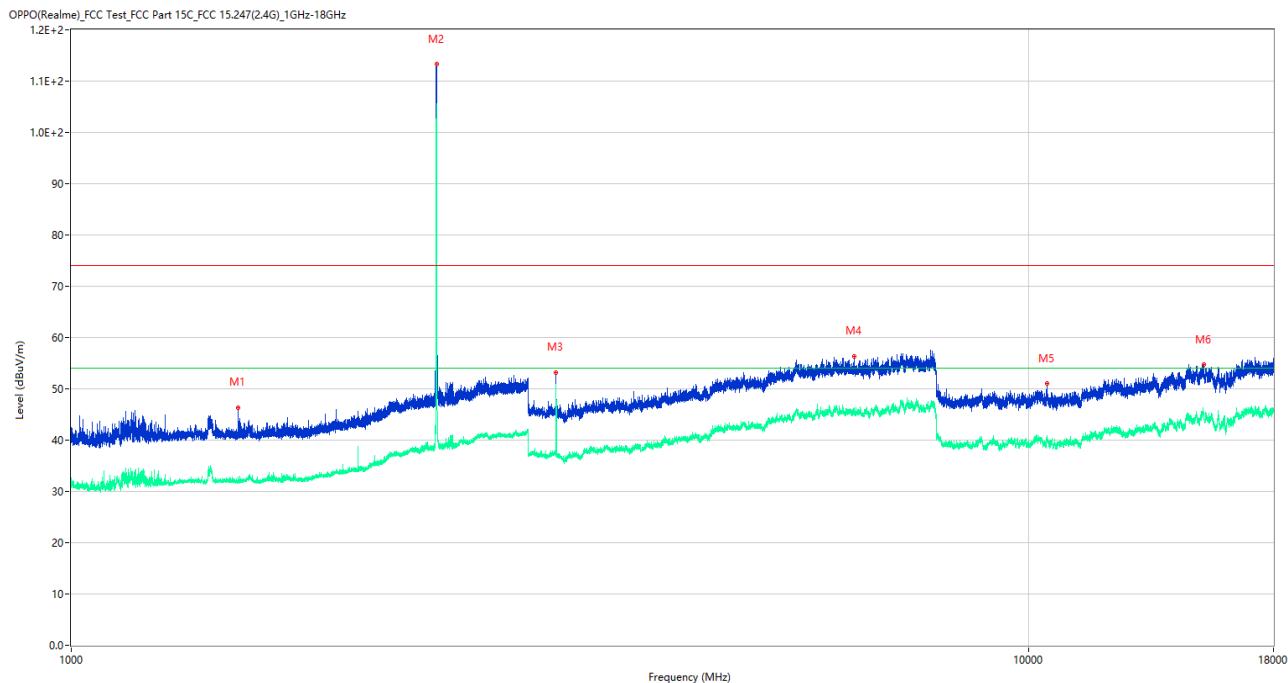

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.750	46.38	-16.50	74.0	-27.62	Peak	353.00	100	Horizontal	Pass
1**	1493.750	32.88	-16.50	54.0	-21.12	AV	353.00	100	Horizontal	Pass
2	2405.250	113.32	-11.22	74.0	39.32	Peak	103.00	100	Horizontal	N/A
2**	2405.250	105.65	-11.22	54.0	51.65	AV	103.00	100	Horizontal	N/A
3	3208.125	53.18	-6.52	74.0	-20.82	Peak	127.00	100	Horizontal	Pass
3**	3208.125	49.15	-6.52	54.0	-4.85	AV	127.00	100	Horizontal	Pass
4	6566.875	56.35	2.06	74.0	-17.65	Peak	191.00	100	Horizontal	Pass
4**	6566.875	46.04	2.06	54.0	-7.96	AV	191.00	100	Horizontal	Pass
5	10435.000	50.99	-2.30	74.0	-23.01	Peak	240.00	100	Horizontal	Pass
5**	10435.000	39.94	-2.30	54.0	-14.06	AV	240.00	100	Horizontal	Pass
6	15221.250	54.74	4.43	74.0	-19.26	Peak	247.00	100	Horizontal	Pass
6**	15221.250	44.66	4.43	54.0	-9.34	AV	247.00	100	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

OFDM LOW CHANNEL

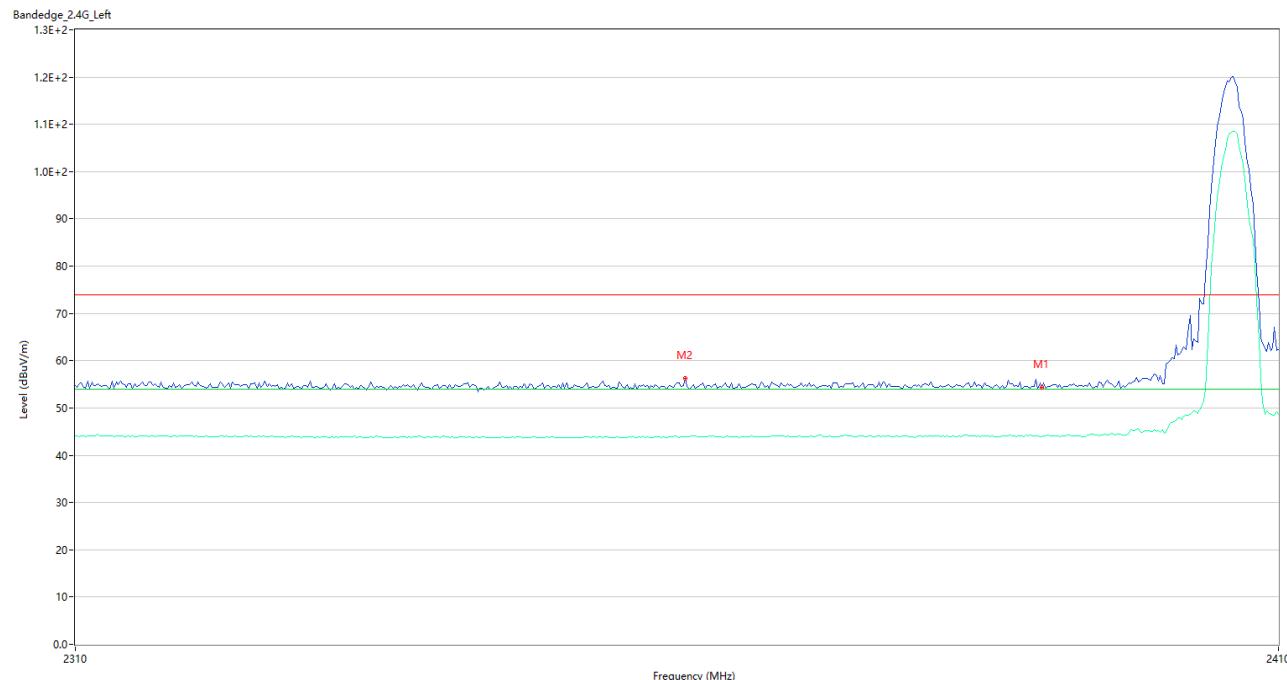

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.34	0.23	74.0	-19.66	Peak	2.23	150	Vertical	Pass
1**	2390.000	43.93	0.23	54.0	-10.07	AV	2.23	150	Vertical	Pass
2	2360.167	56.18	0.05	74.0	-17.82	Peak	134.00	150	Vertical	Pass
2**	2360.167	43.90	0.05	54.0	-10.10	AV	134.00	150	Vertical	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC2220625-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC2220625-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC2220625-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--