

RF TEST REPORT

Applicant Shanghai High-Flying Electronics
Technology Co., Ltd.

FCC ID 2ACSVHF-LPT262

Product Low Power 2.4GWi-Fi6 + BLE
Module

Model HF-LPT262

Report No. EFTA25010229-IE-06-R1

Issue Date April 17, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2024)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. Maximum output power	8
5.2. 99% Bandwidth and 6dB Bandwidth	13
5.3. Band Edge	50
5.4. Power Spectral Density	73
5.5. Spurious RF Conducted Emissions.....	94
5.6. Unwanted Emission	129
5.7. Conducted Emission.....	189
6. Main Test Instruments.....	194
ANNEX A: The EUT Appearance.....	195
ANNEX B: Test Setup Photos.....	196

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: January 23, 2025 ~ April 14, 2025 Date of Sample Received: January 17, 2025			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Shanghai High-Flying Electronics Technology Co., Ltd.
Applicant address	Building 17, No.1500 Zu Chong Zhi Road, Pudong District, Shanghai, China
Manufacturer	Shanghai High-Flying Electronics Technology Co., Ltd.
Manufacturer address	Building 17, No.1500 Zu Chong Zhi Road, Pudong District, Shanghai, China

2.2. General Information

EUT Description	
Model	HF-LPT262
Lab internal SN	EFTA25010229/S01
Hardware Version	V4.0
Software Version	V.1.0.12
Power Supply	AC adapter
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	1.0 dBi
Additional Beamforming Gain	NA
Operating Frequency Range(s)	802.11b/g/n(HT20)/ax(HE20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz Bluetooth LE V5.4: 2402 ~2480 MHz
Modulation Type	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDM 802.11ax RU: OFDMA Bluetooth LE: GFSK
Max. Output Power	Wi-Fi 2.4GHz: 18.72 dBm Bluetooth LE: 15.72 dBm
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2024) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth (Low Energy)	1Mbps; 2Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0

5. Test Case Results

5.1. Maximum output power


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1\text{W (30dBm)}$
----------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Power Index						
Channel	802.11b	802.11g	802.11n HT20	802.11ax HE20	Channel	802.11n HT40
CH1	78	15	15	15	CH3	13
CH6	78	15	15	15	CH6	13
CH11	78	15	15	15	CH9	13

Power Index		
Bluetooth (Low Energy)		
Channel	1M	2M
CH0	default	default
CH19	default	default
CH39	default	default

Test Mode	Duty cycle	Duty cycle correction Factor (dB)
802.11b	0.99	0.00
802.11g	0.96	0.18
802.11n HT20	0.97	0.15
802.11n HT40	0.93	0.30
802.11ax HE20	0.92	0.35
Bluetooth LE (1M)	0.612	2.131
Bluetooth LE (2M)	0.317	4.985
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.		

SU Mode

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	17.15	17.15	30	PASS
	2437/CH 6	17.12	17.12	30	PASS
	2462/CH11	17.14	17.14	30	PASS
802.11g	2412/CH 1	14.67	14.85	30	PASS
	2437/CH 6	14.54	14.72	30	PASS
	2462/CH11	14.46	14.64	30	PASS
802.11n HT20	2412/CH 1	14.75	14.90	30	PASS
	2437/CH 6	14.37	14.52	30	PASS
	2462/CH11	14.38	14.53	30	PASS
802.11n HT40	2422/CH3	14.79	15.09	30	PASS
	2437/CH6	14.62	14.92	30	PASS
	2452/CH9	14.63	14.93	30	PASS
802.11ax HE20	2412/CH 1	14.71	15.06	30	PASS
	2437/CH 6	14.52	14.87	30	PASS
	2462/CH11	14.36	14.70	30	PASS
Bluetooth (Low Energy) (1M)	2402/CH0	13.08	15.21	30	PASS
	2440/CH19	13.36	15.49	30	PASS
	2480/CH39	12.69	14.82	30	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	10.32	15.31	30	PASS
	2440/CH19	10.74	15.72	30	PASS
	2480/CH39	10.10	15.08	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

RU Mode

Test Mode	Duty cycle	Duty cycle correction Factor (dB)
802.11ax HE20 26-Tones:RU Index 0	0.992	0.00
802.11ax HE20 26-Tones:RU Index 4	0.992	0.00
802.11ax HE20 26-Tones:RU Index 8	0.992	0.00
02.11ax HE20 52-Tones:RU Index 37	0.984	0.00
802.11ax HE20 52-Tones:RU Index 38	0.984	0.00
802.11ax HE20 52-Tones:RU Index 40	0.985	0.00
02.11ax HE20 106-Tones:RU Index 53	0.968	0.14
02.11ax HE20 106-Tones:RU Index 54	0.971	0.13
02.11ax HE20 242-Tones:RU Index 61	0.939	0.27
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.		

Power Index				
Channel	802.11ax HE20 26-Tones	802.11ax HE20 52-Tones	802.11ax HE20 106-Tones	802.11ax HE20 242-Tones
CH1	18	18	16	16
CH6	20	20	20	20
CH11	20	20	20	20

Test Mode	Carrier frequency (MHz)/ Channel	RU Index	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11ax HE20 26-Tones	2412	0	15.77	15.77	30	PASS
	2437	4	18.72	18.72	30	PASS
	2462	8	17.53	17.53	30	PASS
802.11ax HE20 52-Tones	2412	37	15.89	15.89	30	PASS
	2437	38	18.28	18.28	30	PASS
	2462	40	17.56	17.56	30	PASS
802.11ax	2412	53	14.05	14.19	30	PASS

HE20 106-Tones	2437	53	18.06	18.20	30	PASS
	2462	54	17.82	17.95	30	PASS
802.11ax HE20 242-Tones	2412	61	14.14	14.41	30	PASS
	2437	61	18.01	18.28	30	PASS
	2462	61	17.69	17.96	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor						

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Detector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that "Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz."

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:
SU Mode

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.000	10.054	500	PASS
	2437	11.995	9.746	500	PASS
	2462	11.990	9.989	500	PASS
802.11g	2412	16.701	16.338	500	PASS
	2437	16.695	16.329	500	PASS
	2462	16.705	16.333	500	PASS
802.11n HT20	2412	17.701	17.594	500	PASS
	2437	17.694	17.578	500	PASS
	2462	17.701	17.600	500	PASS
802.11n HT40	2422	36.191	35.064	500	PASS
	2437	36.177	35.025	500	PASS
	2452	36.160	35.059	500	PASS
802.11ax HE20	2412	18.897	18.792	500	PASS
	2437	18.928	18.967	500	PASS
	2462	18.899	18.889	500	PASS
Bluetooth (Low Energy) (1M)	2402	1.031	0.681	500	PASS
	2440	1.031	0.671	500	PASS
	2480	1.028	0.696	500	PASS
Bluetooth (Low Energy) (2M)	2402	2.056	1.156	500	PASS
	2440	2.057	1.144	500	PASS
	2480	2.058	1.135	500	PASS


RU Mode

Test Mode	Carrier frequency (MHz)/ Channel	RU Index	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11ax HE20 26-Tones	2412/CH 1	0	17.970	2.030	500	PASS
	2437/CH 6	4	15.176	2.661	500	PASS
	2462/CH11	8	17.523	2.034	500	PASS
802.11ax HE20 52-Tones	2412/CH 1	37	17.968	16.953	500	PASS
	2437/CH 6	38	16.885	8.766	500	PASS
	2462/CH11	40	18.017	17.003	500	PASS
802.11ax HE20 106-Tones	2412/CH 1	53	18.159	17.075	500	PASS
	2437/CH 6	53	18.156	17.290	500	PASS
	2462/CH11	54	18.110	17.068	500	PASS
802.11ax HE20 242-Tones	2412/CH 1	61	18.921	18.604	500	PASS
	2437/CH 6	61	18.992	18.799	500	PASS
	2462/CH11	61	18.973	18.805	500	PASS


99%bandwidth

SU Mode


OBW 802.11ax(HE20) 2412MHz

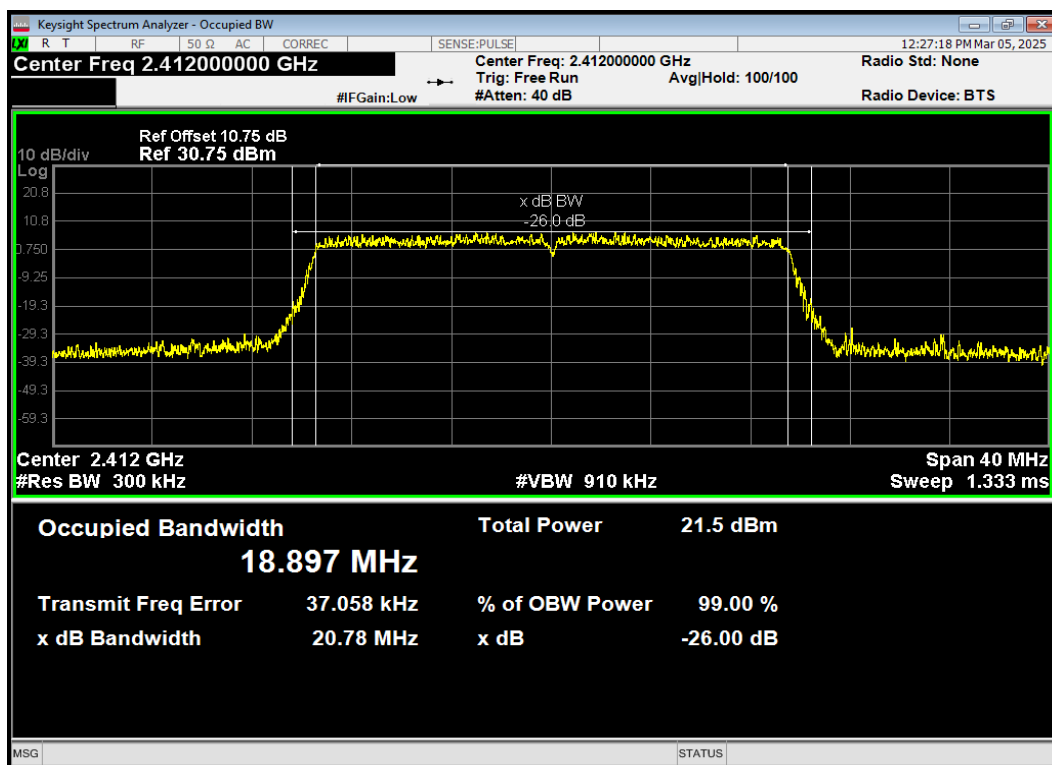


OBW 802.11ax(HE20) 2437MHz

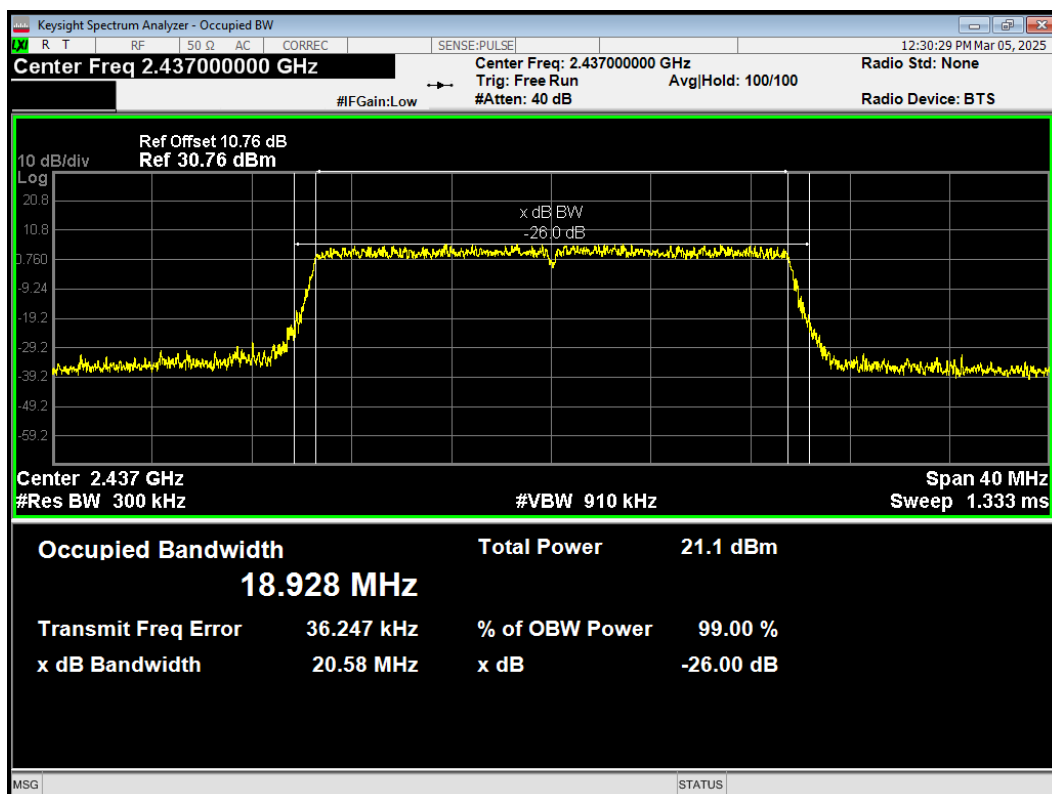


OBW 802.11ax(HE20) 2462MHz

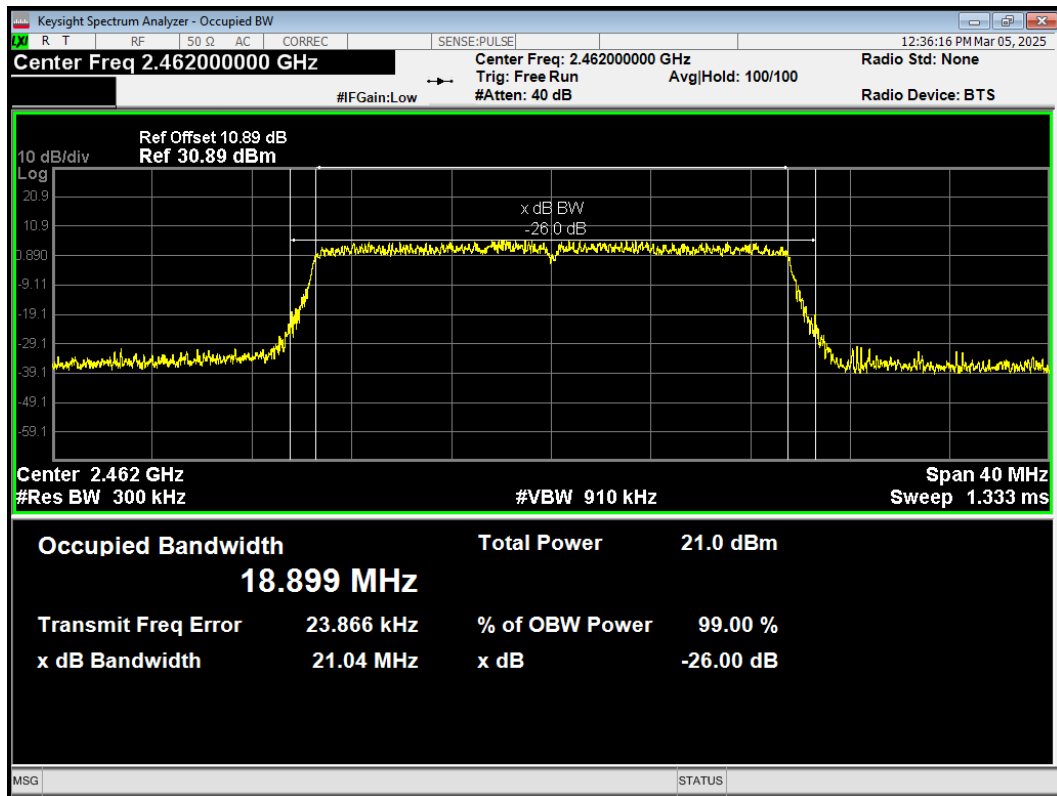


OBW 802.11b 2412MHz

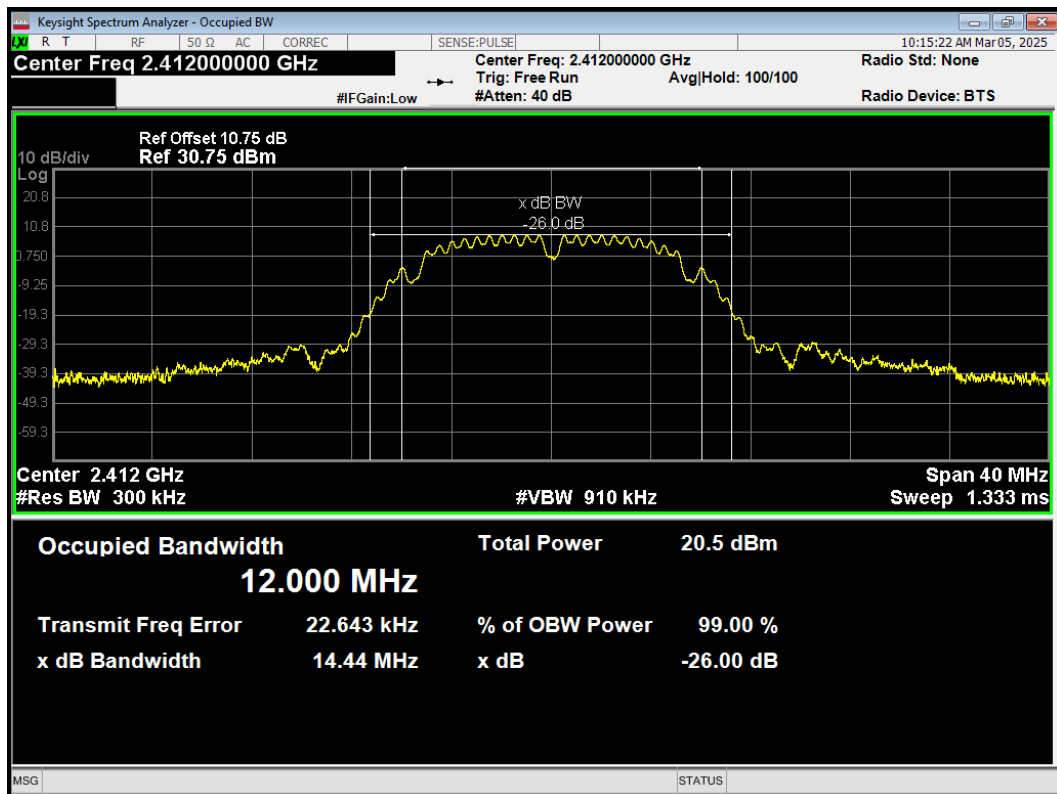


OBW 802.11b 2437MHz

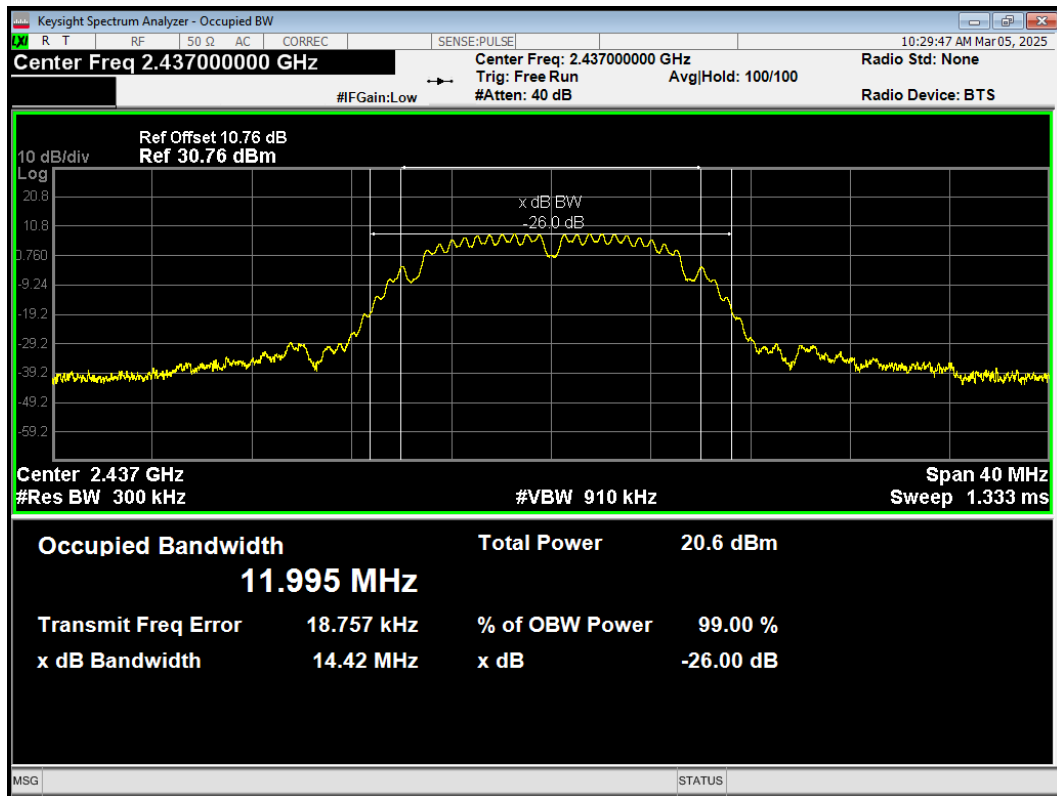


OBW 802.11b 2462MHz

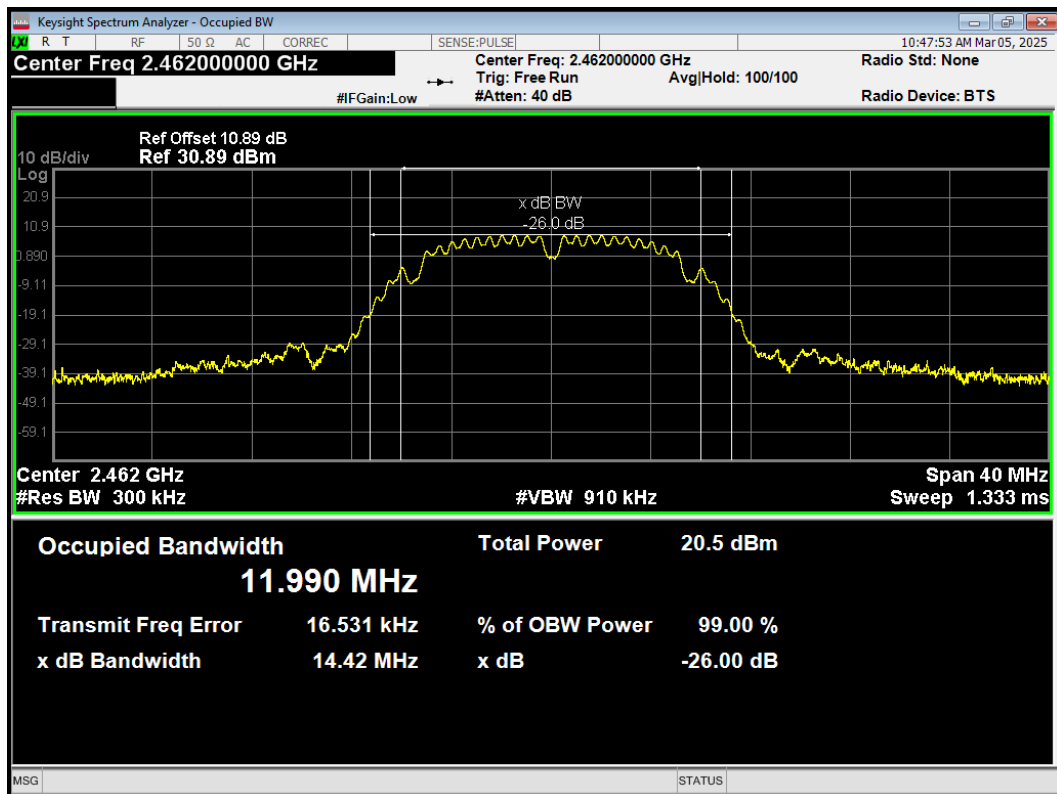


OBW 802.11g 2412MHz

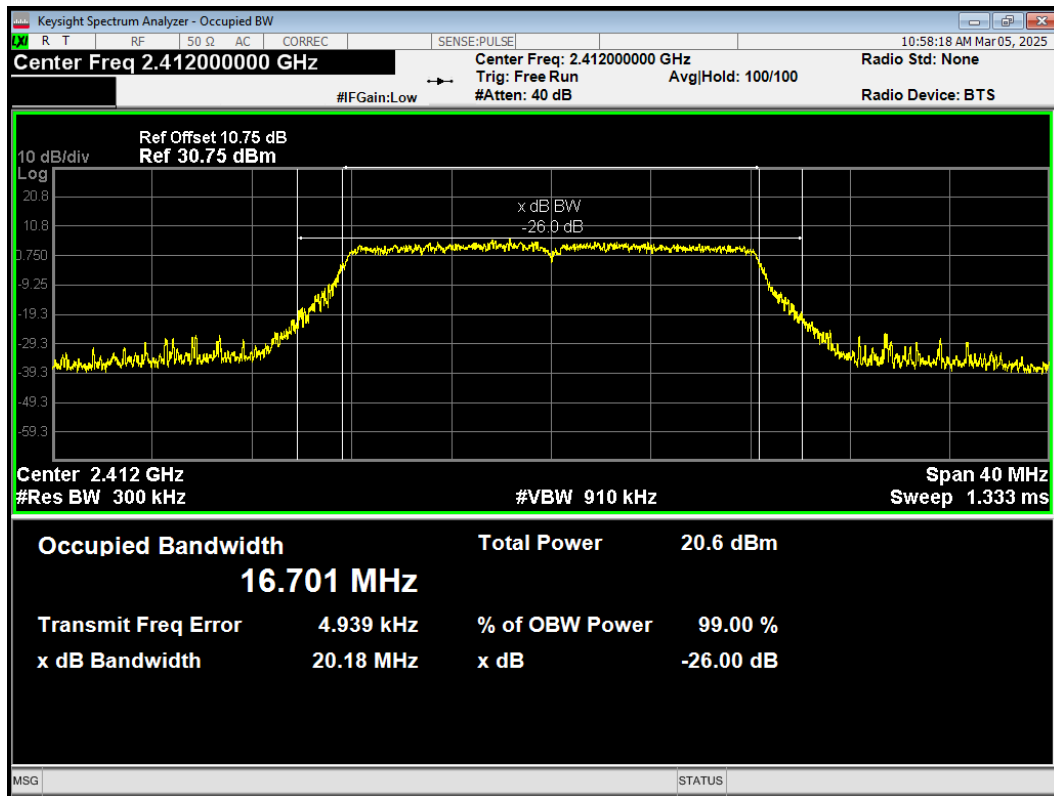


OBW 802.11g 2437MHz

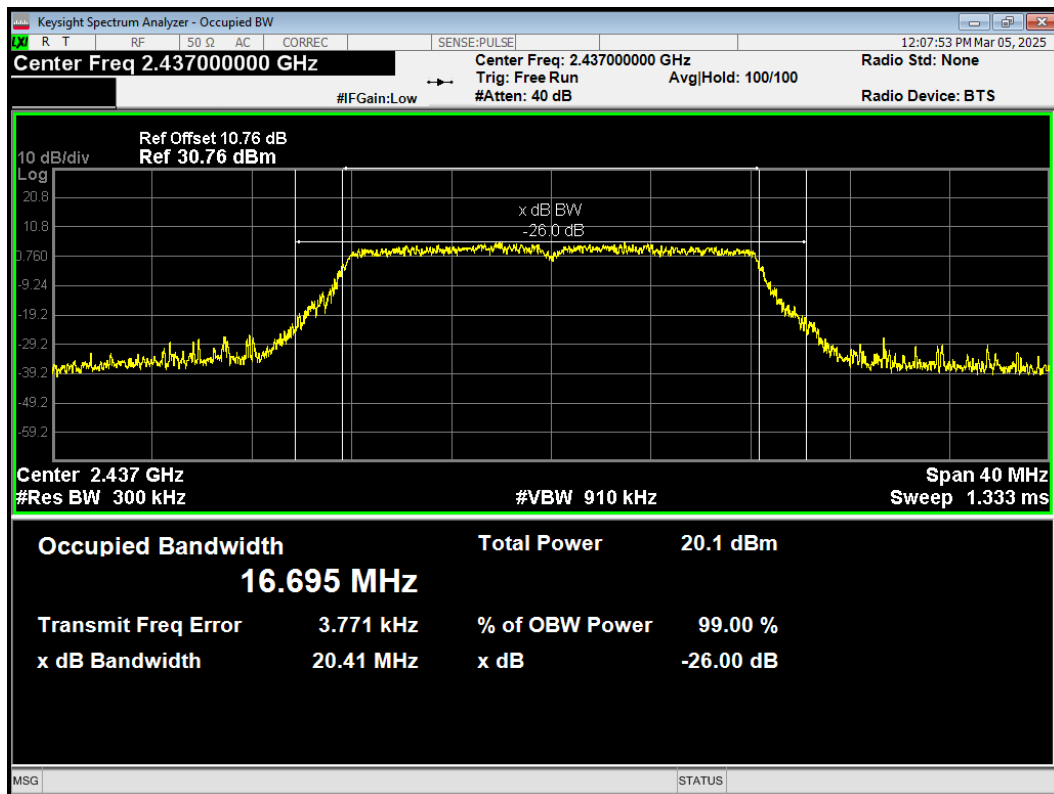


OBW 802.11g 2462MHz

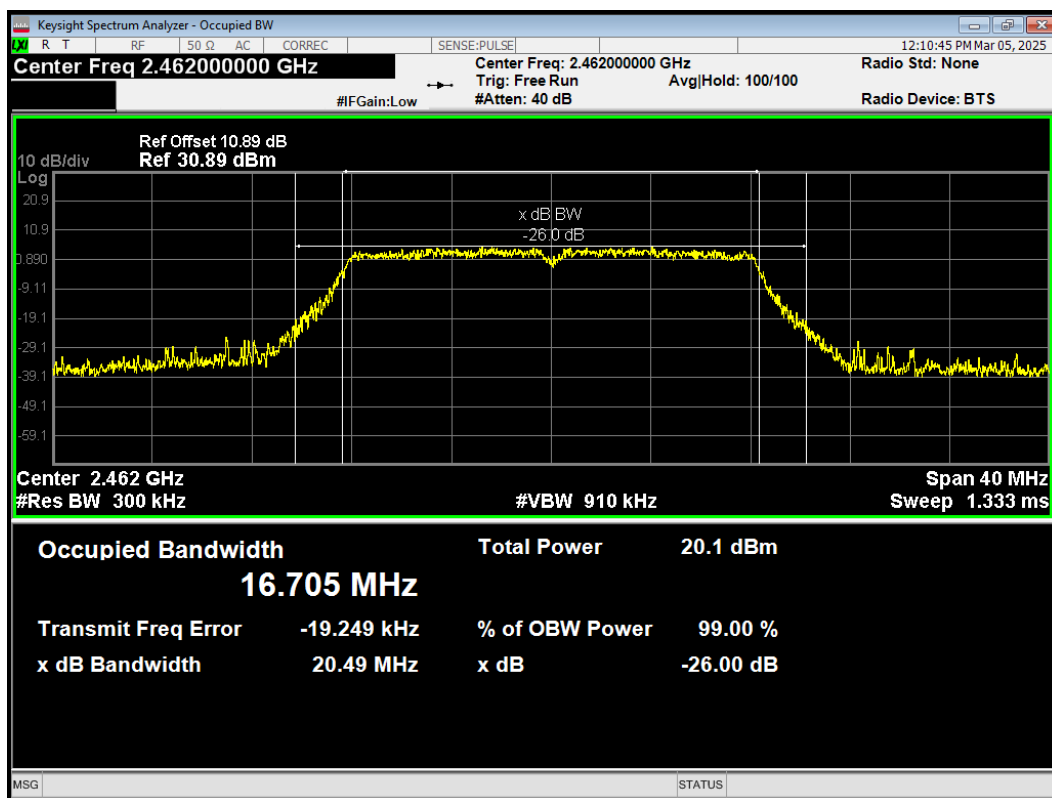


OBW 802.11n(HT20) 2412MHz

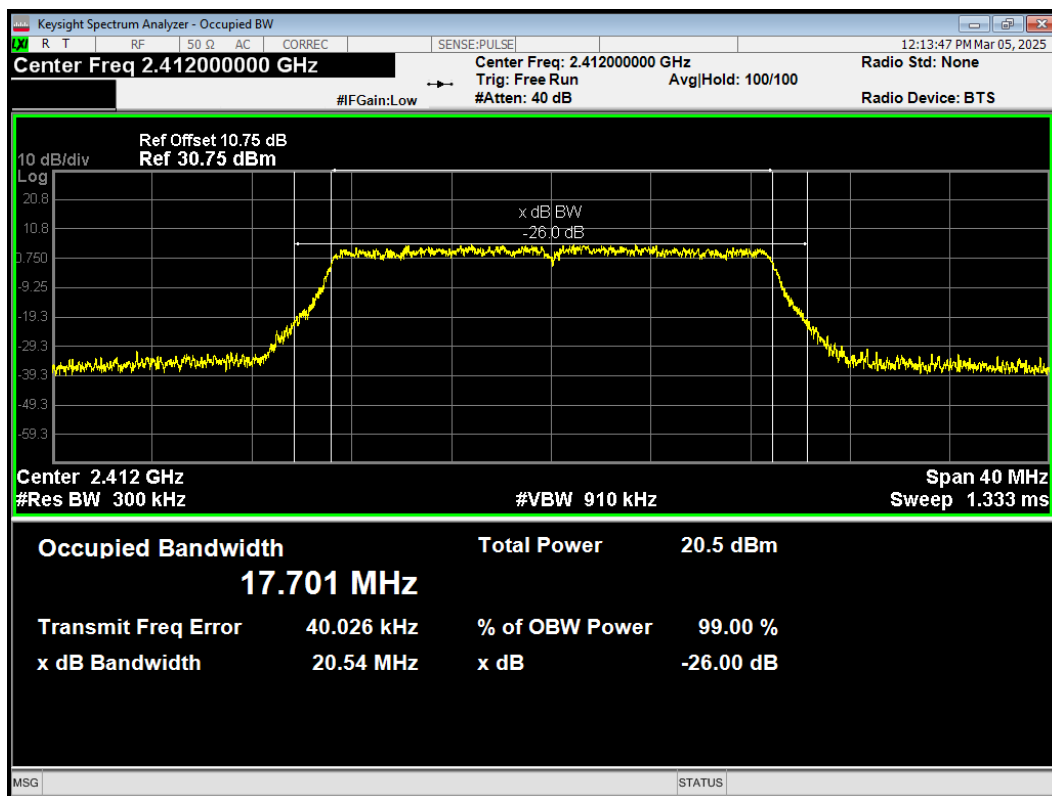


OBW 802.11n(HT20) 2437MHz

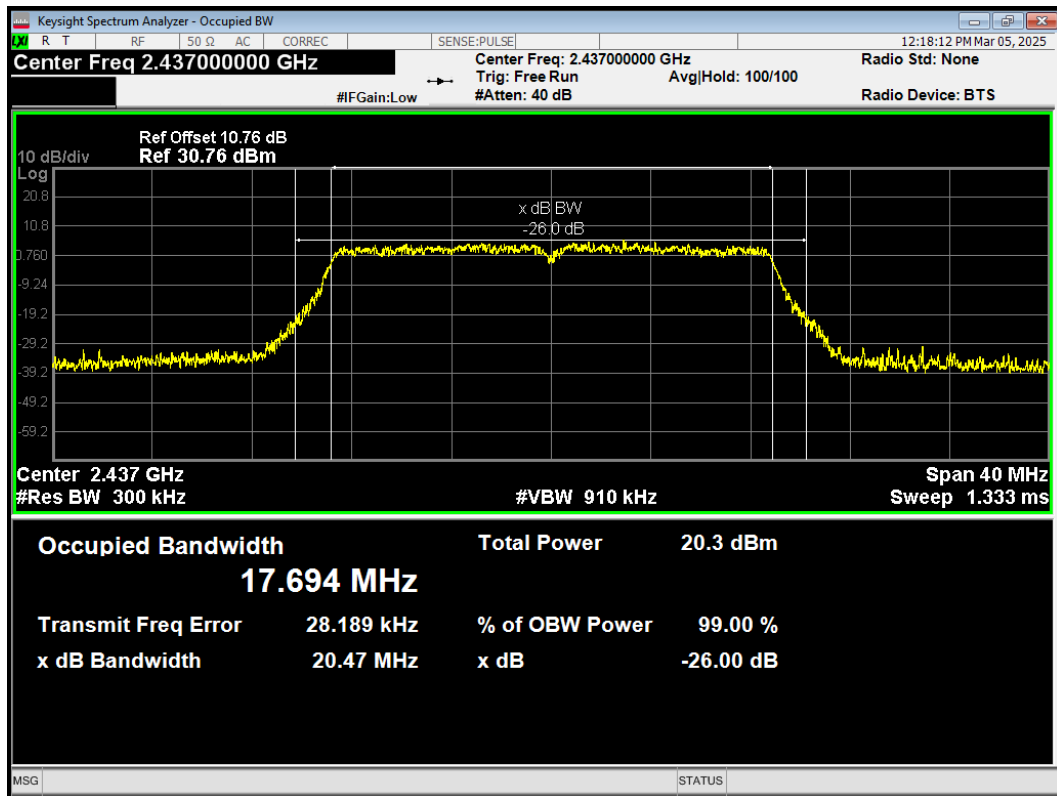


OBW 802.11n(HT20) 2462MHz

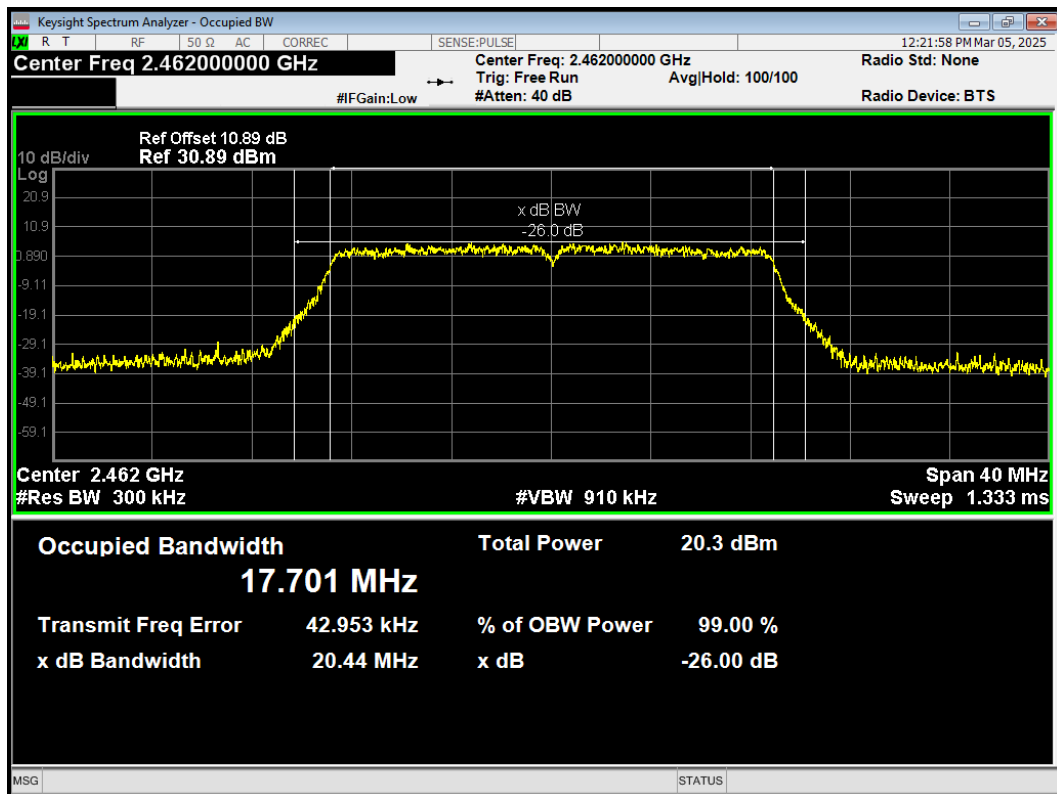


OBW 802.11n(HT40) 2422MHz

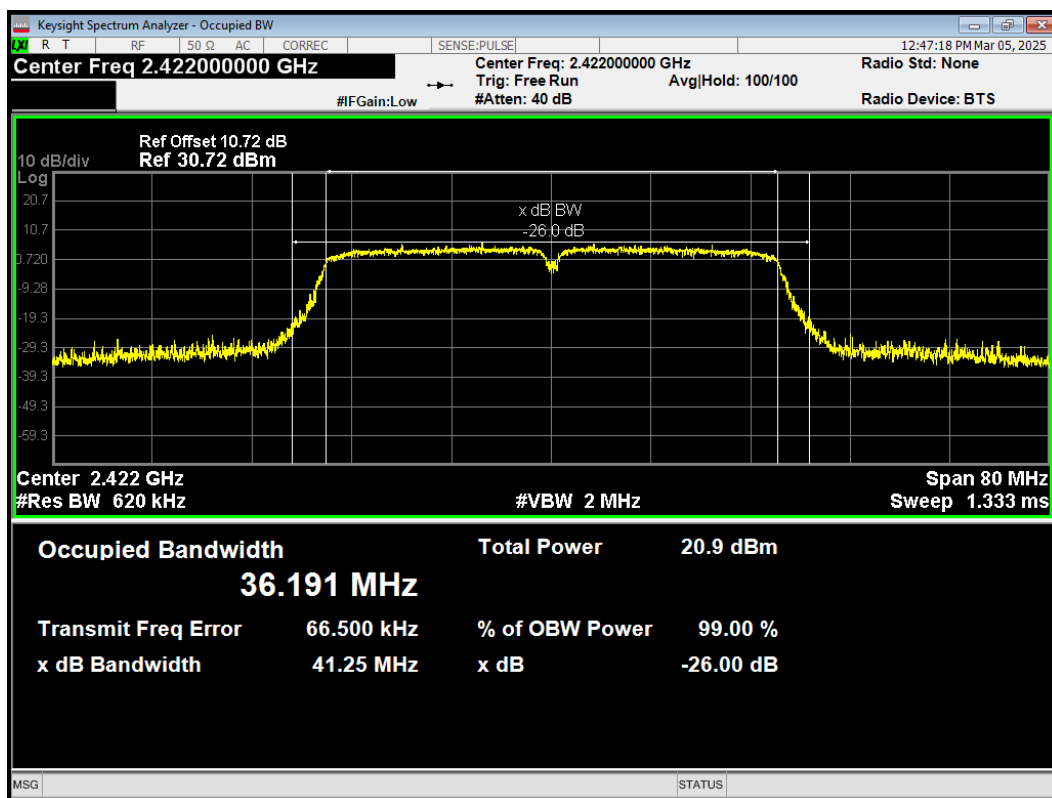


OBW 802.11n(HT40) 2437MHz

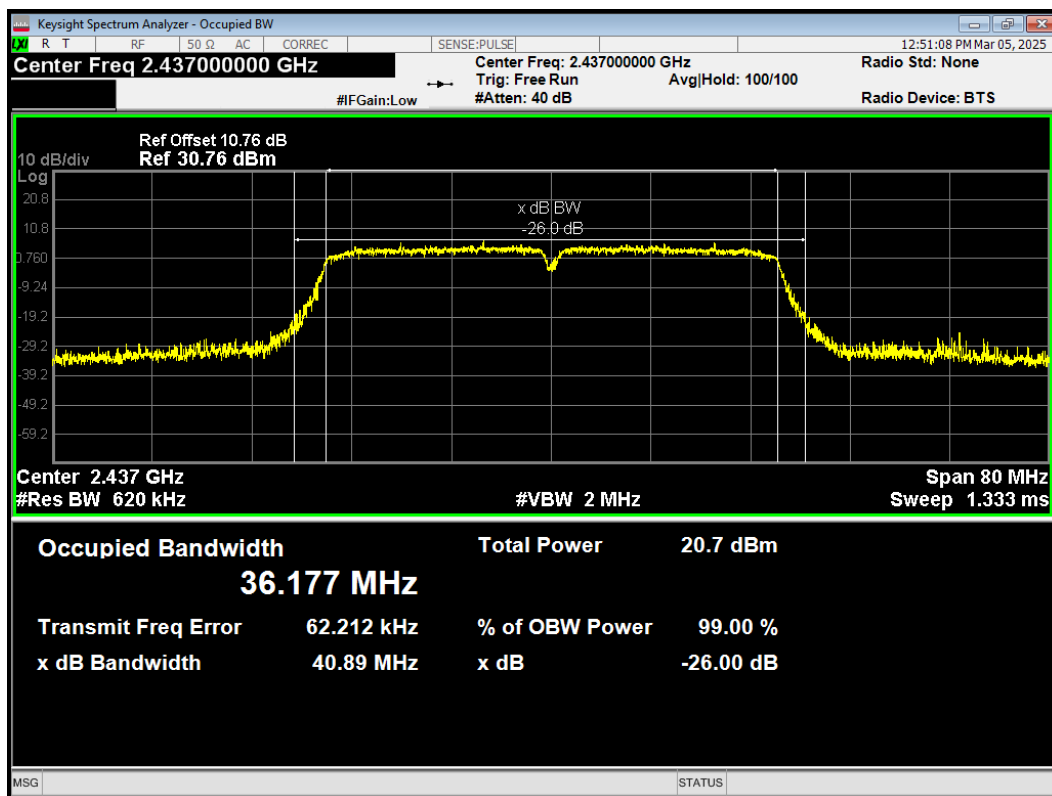


OBW 802.11n(HT40) 2452MHz

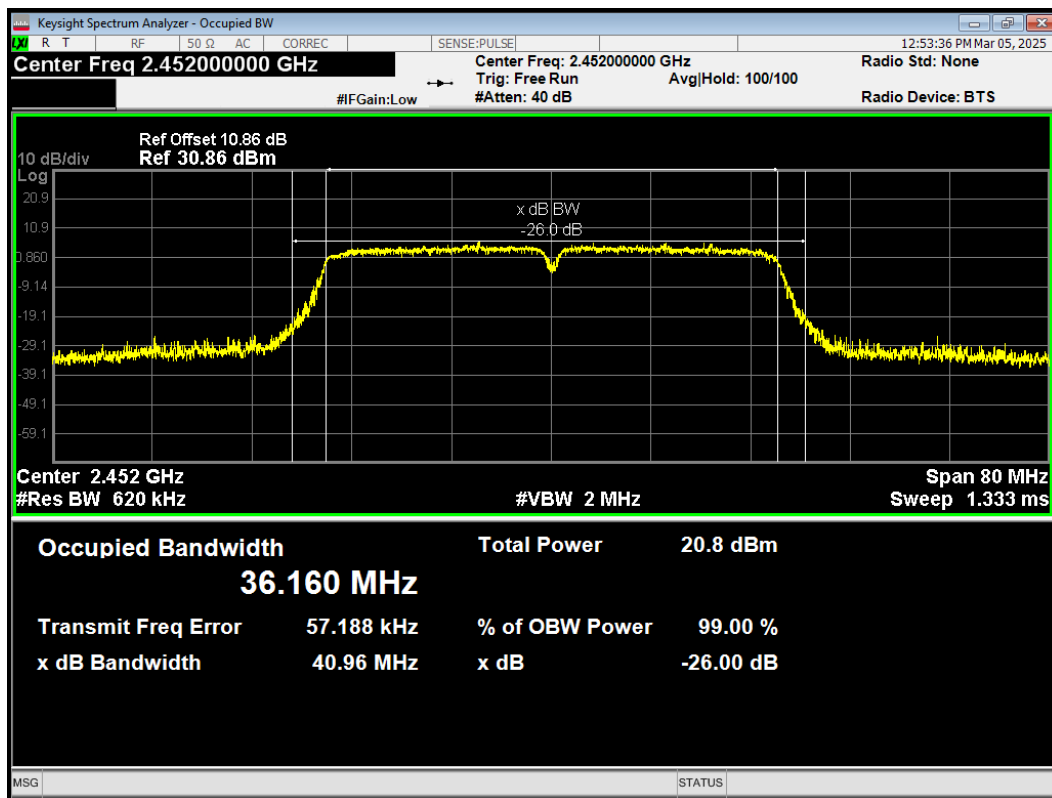


OBW BLE (1M) 2402MHz

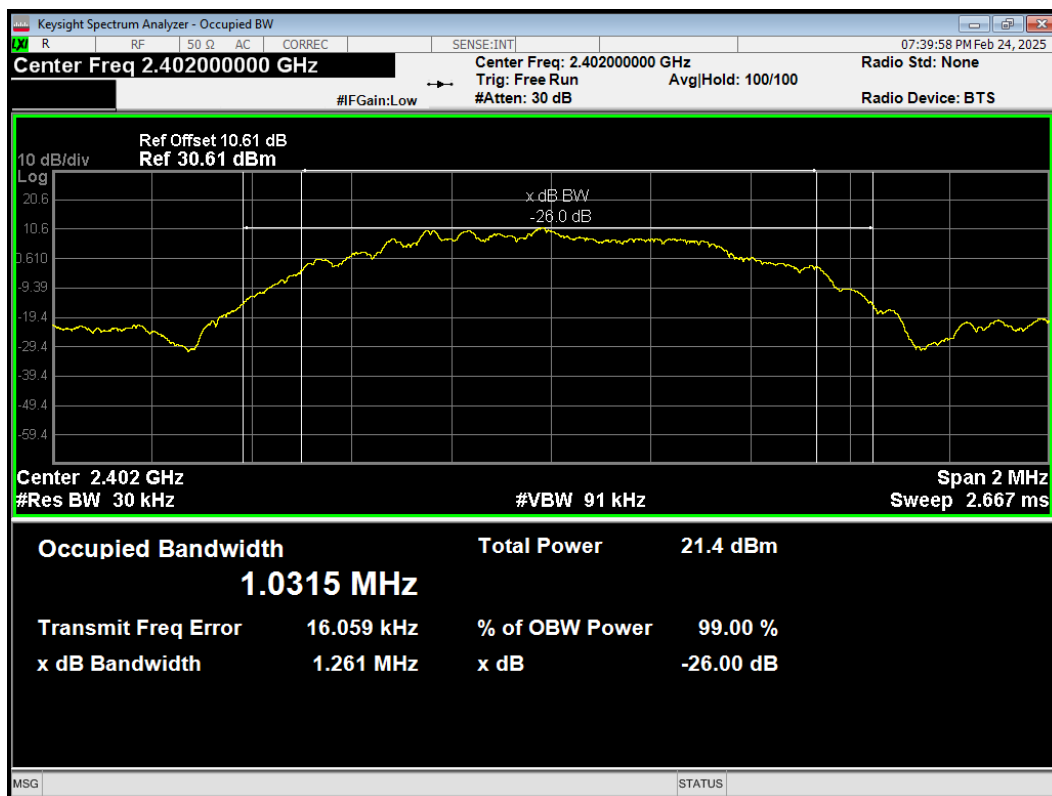


OBW BLE (1M) 2440MHz

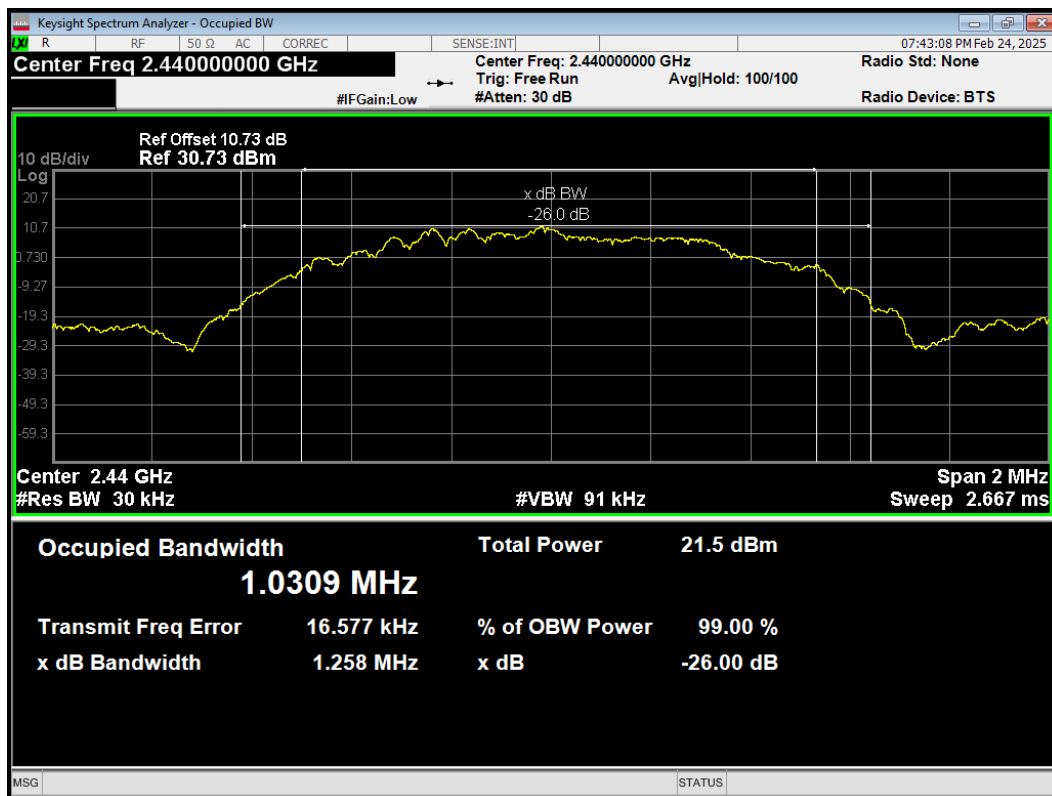


OBW BLE (1M) 2480MHz

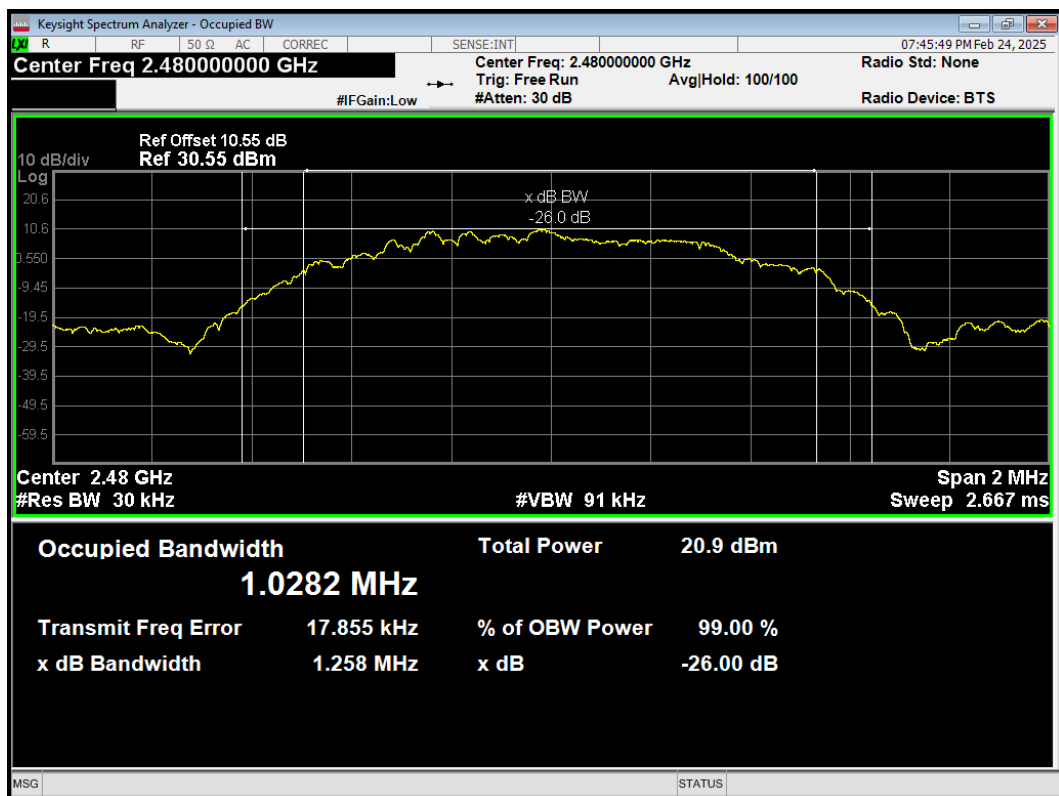


OBW BLE (2M) 2402MHz

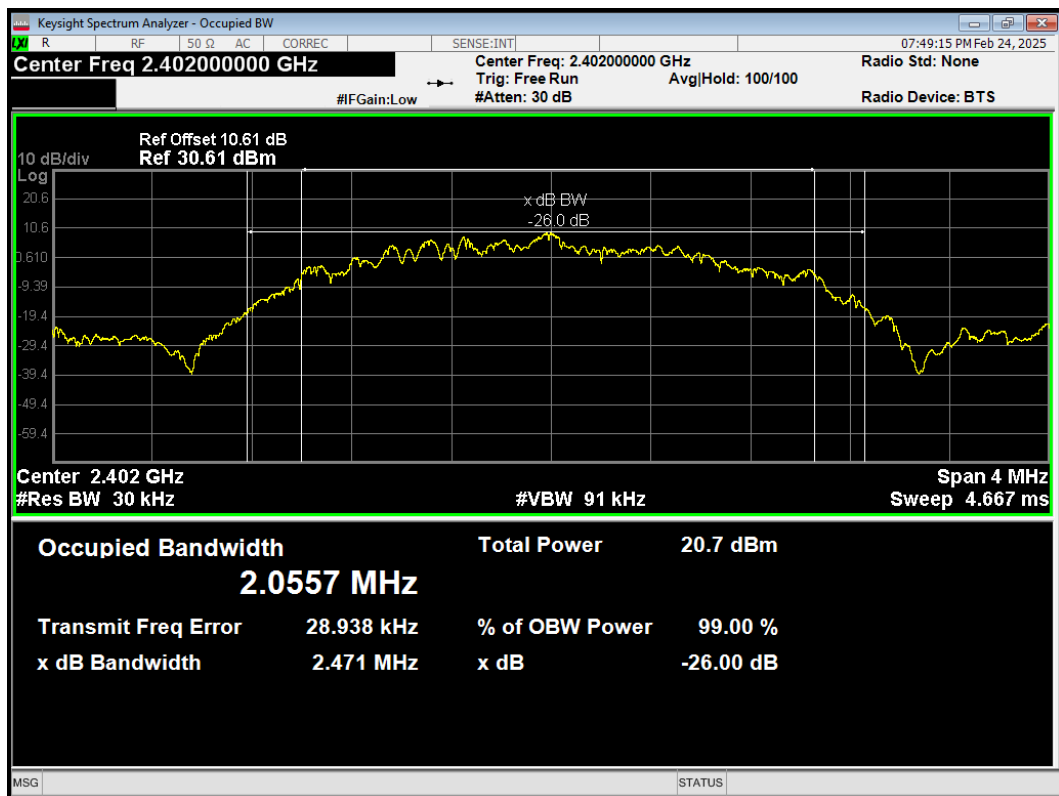

OBW BLE (2M) 2440MHz

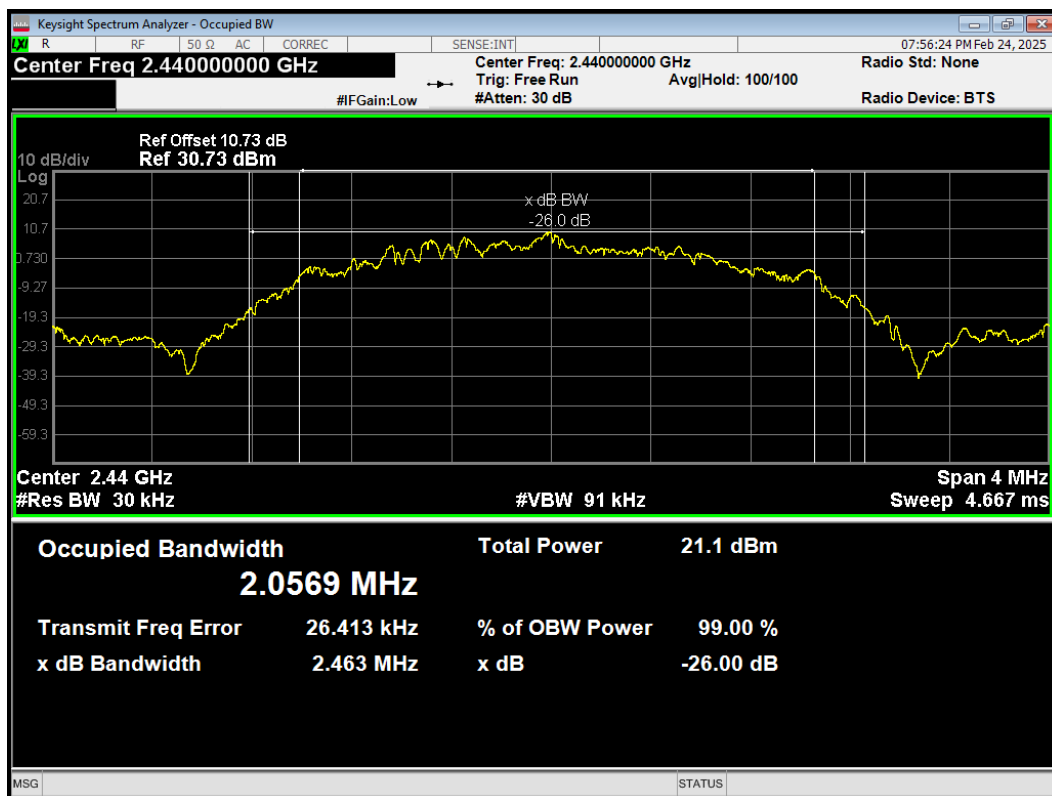


OBW BLE (2M) 2480MHz

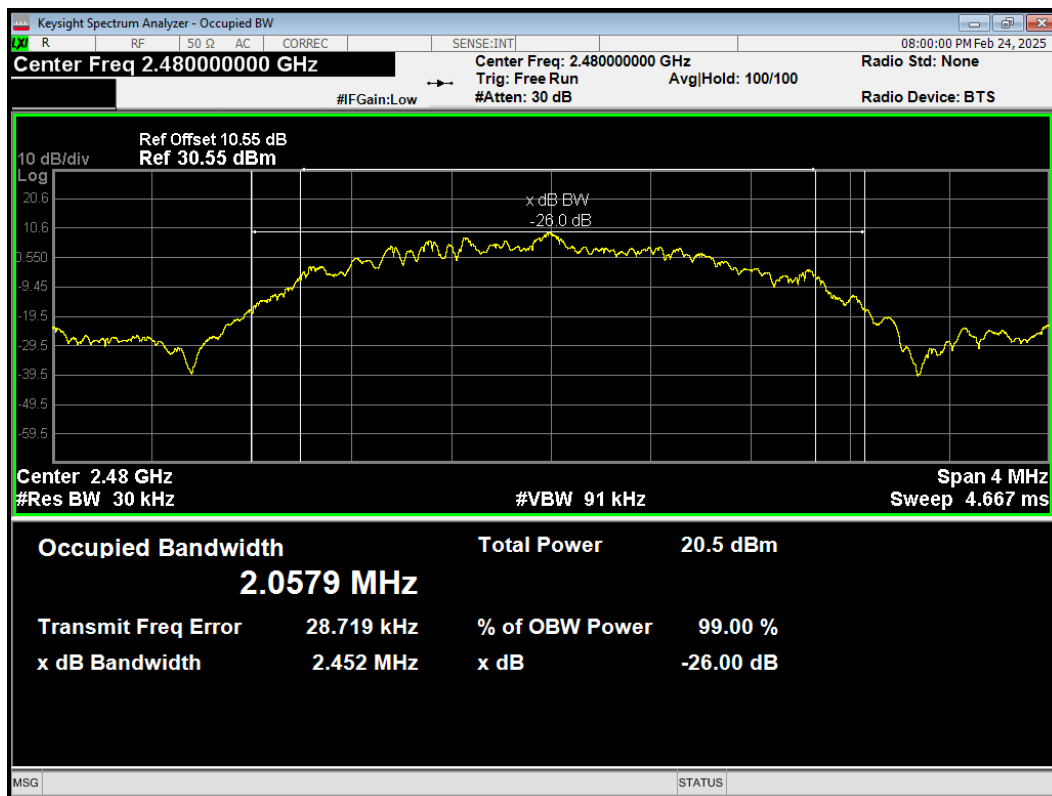


RU Mode


OBW 802.11ax(HE20) 106T 2412MHz

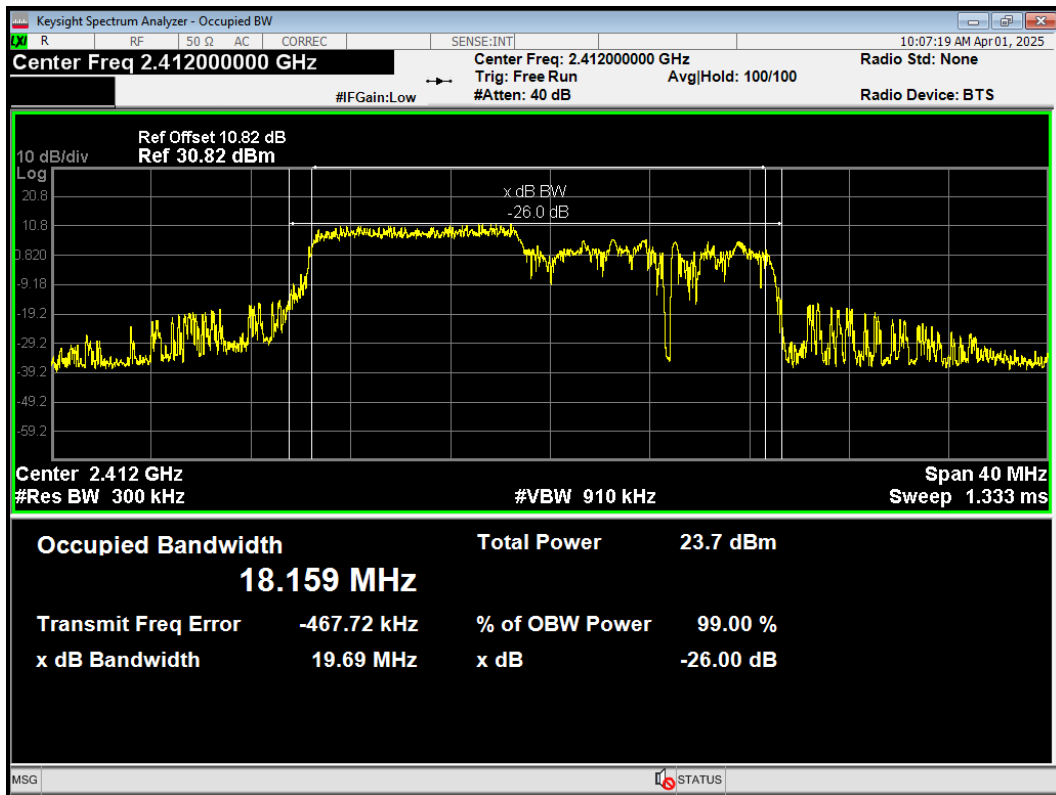


OBW 802.11ax(HE20) 106T 2437MHz

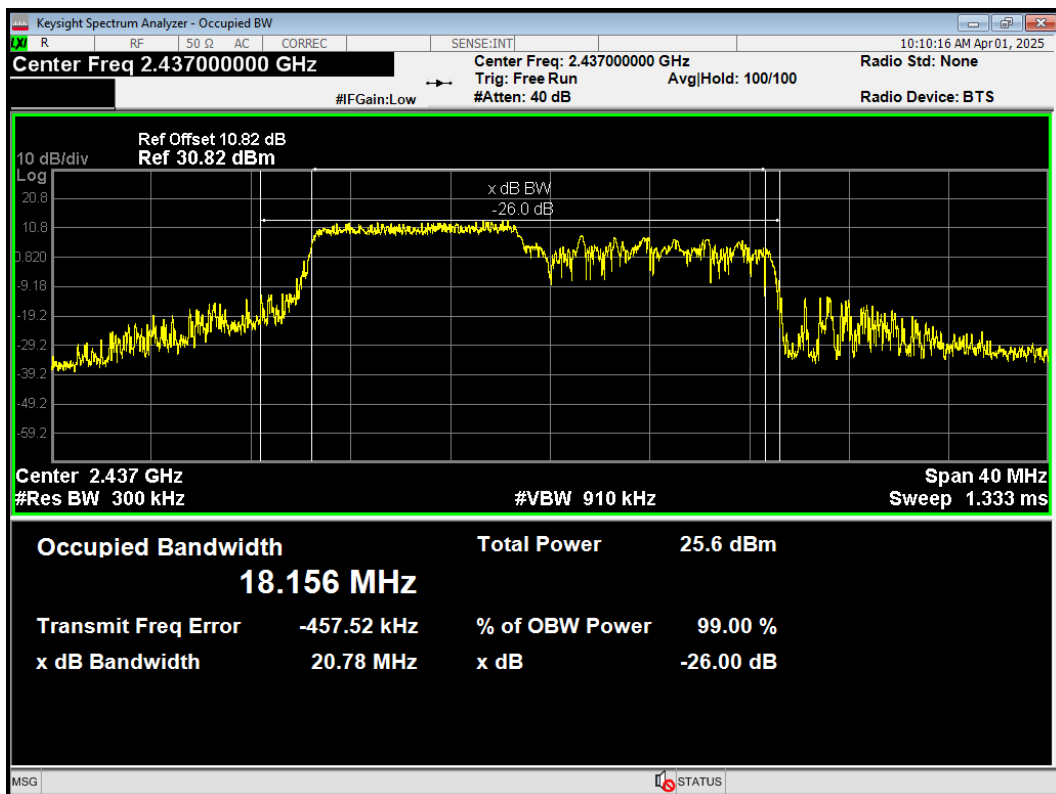


OBW 802.11ax(HE20) 106T 2462MHz

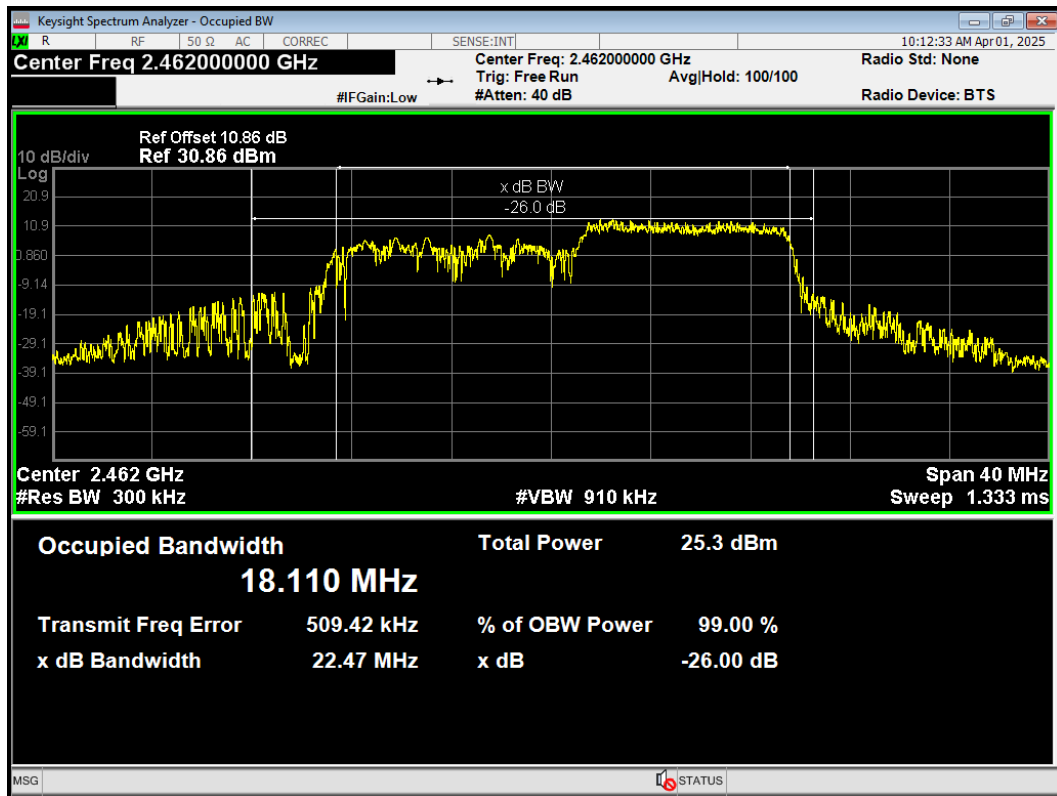


OBW 802.11ax(HE20) 242T 2412MHz

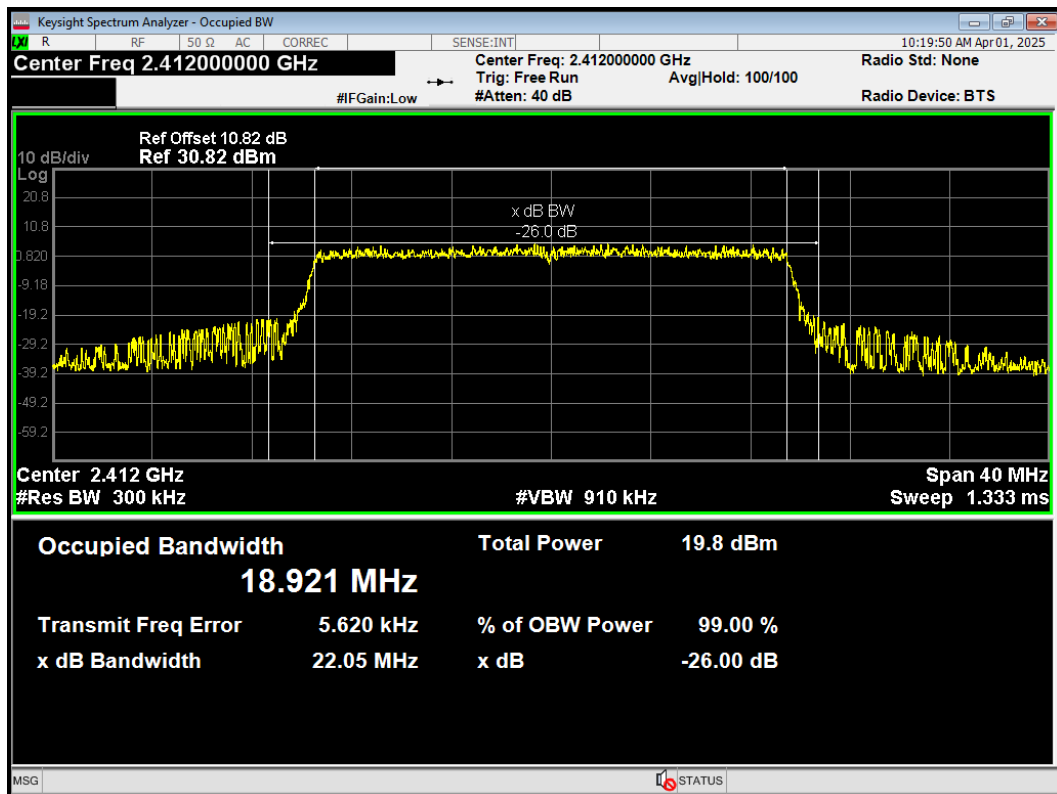


OBW 802.11ax(HE20) 242T 2437MHz

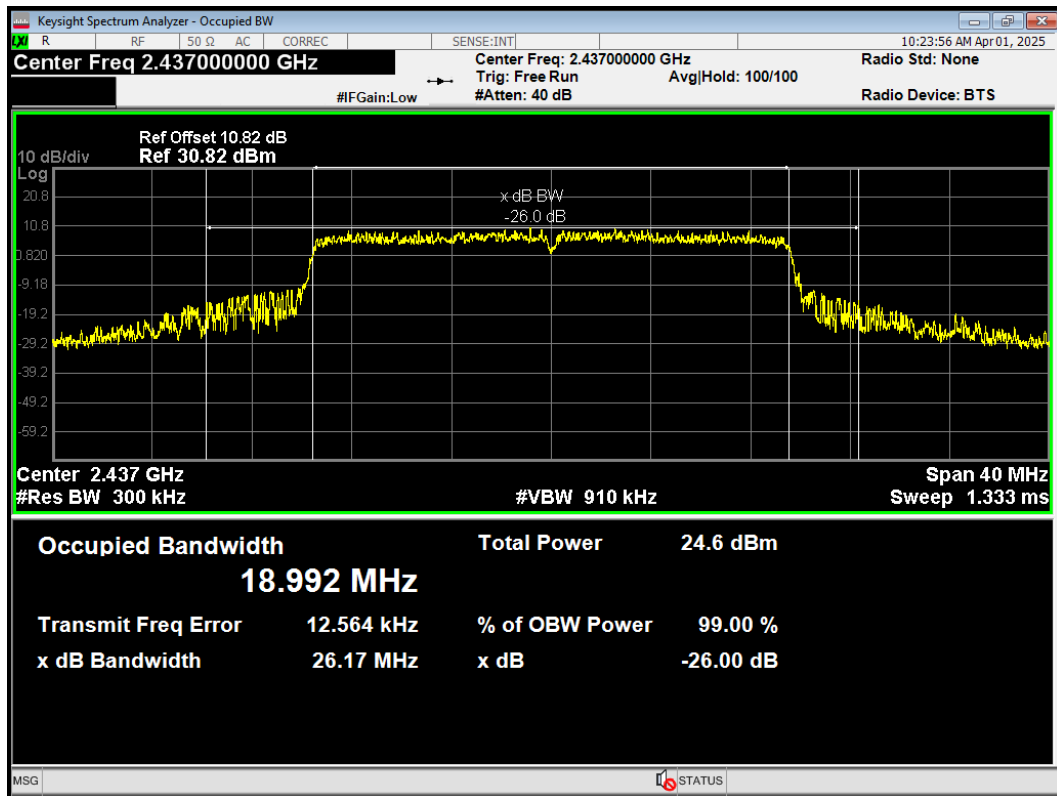


OBW 802.11ax(HE20) 242T 2462MHz

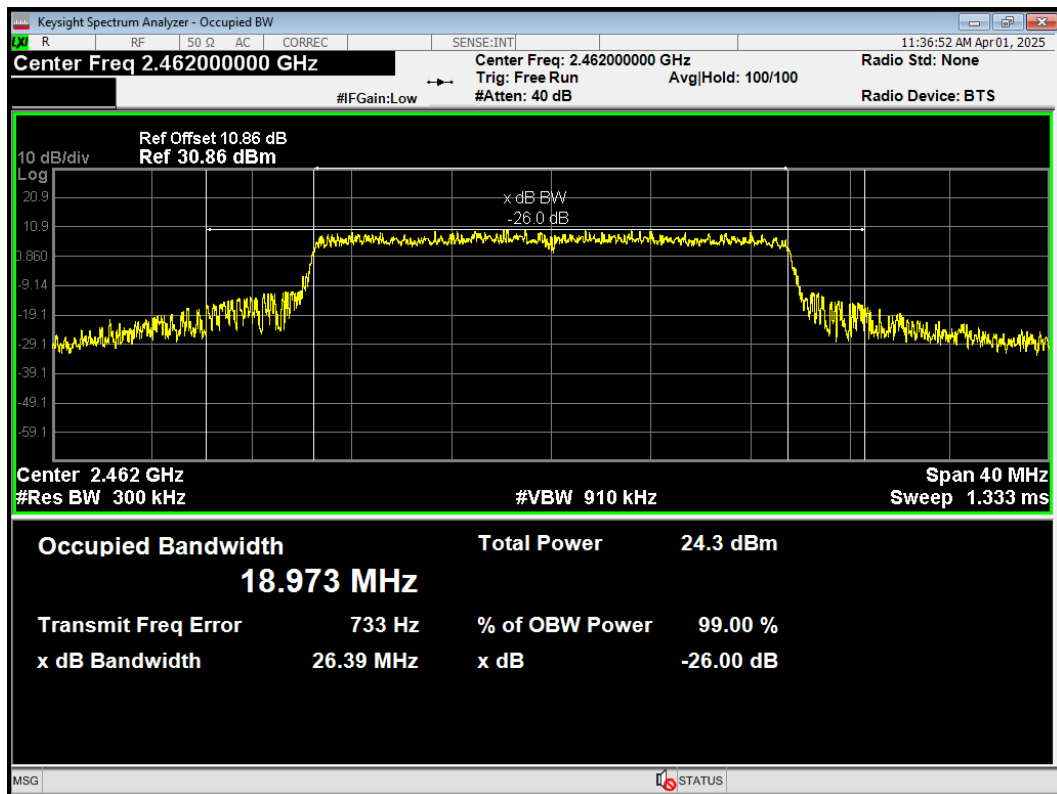


OBW 802.11ax(HE20) 26T 2412MHz

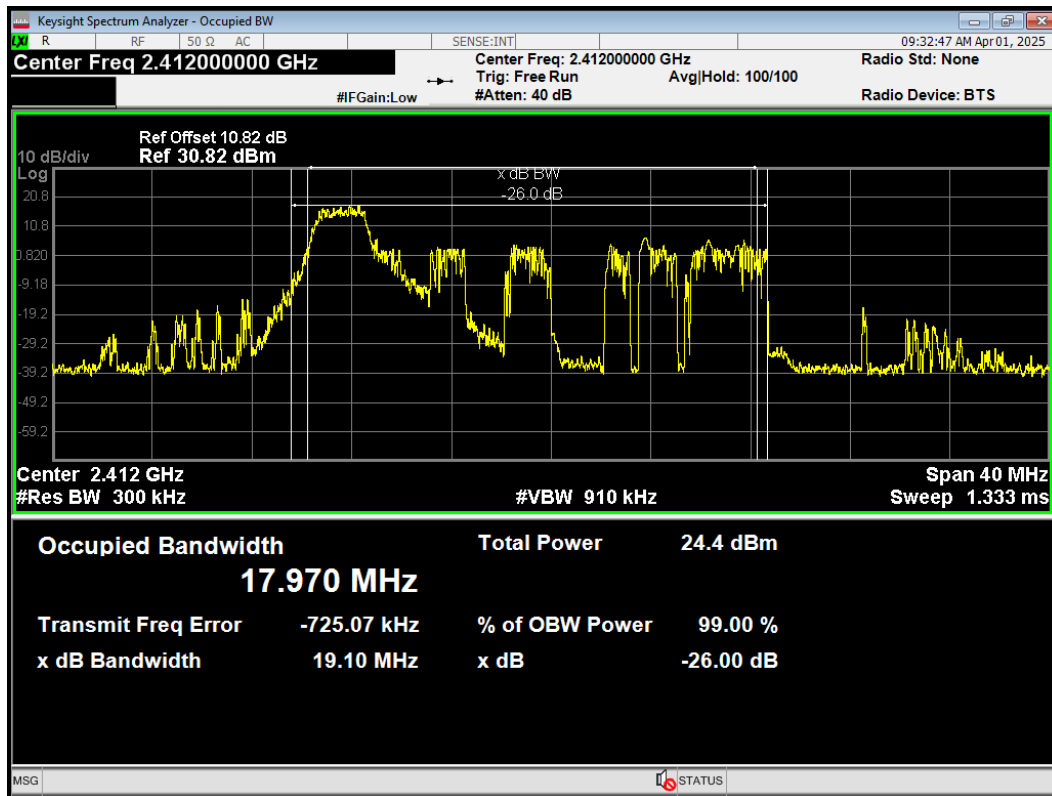


OBW 802.11ax(HE20) 26T 2437MHz

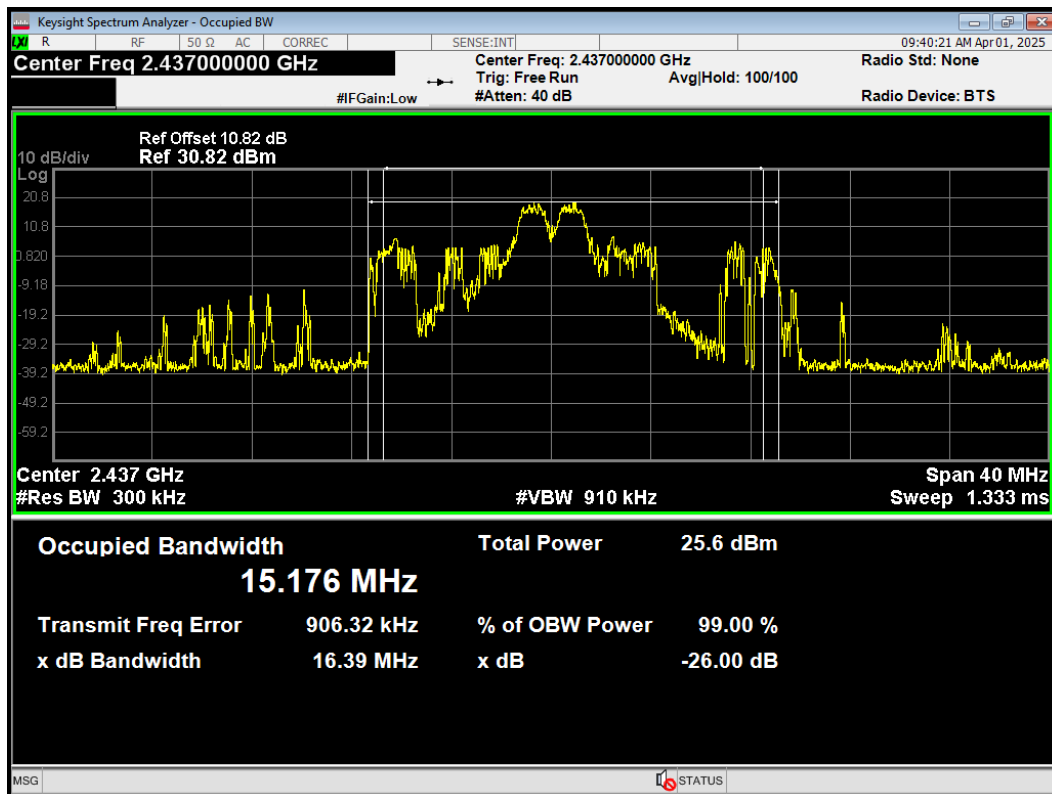


OBW 802.11ax(HE20) 26T 2462MHz

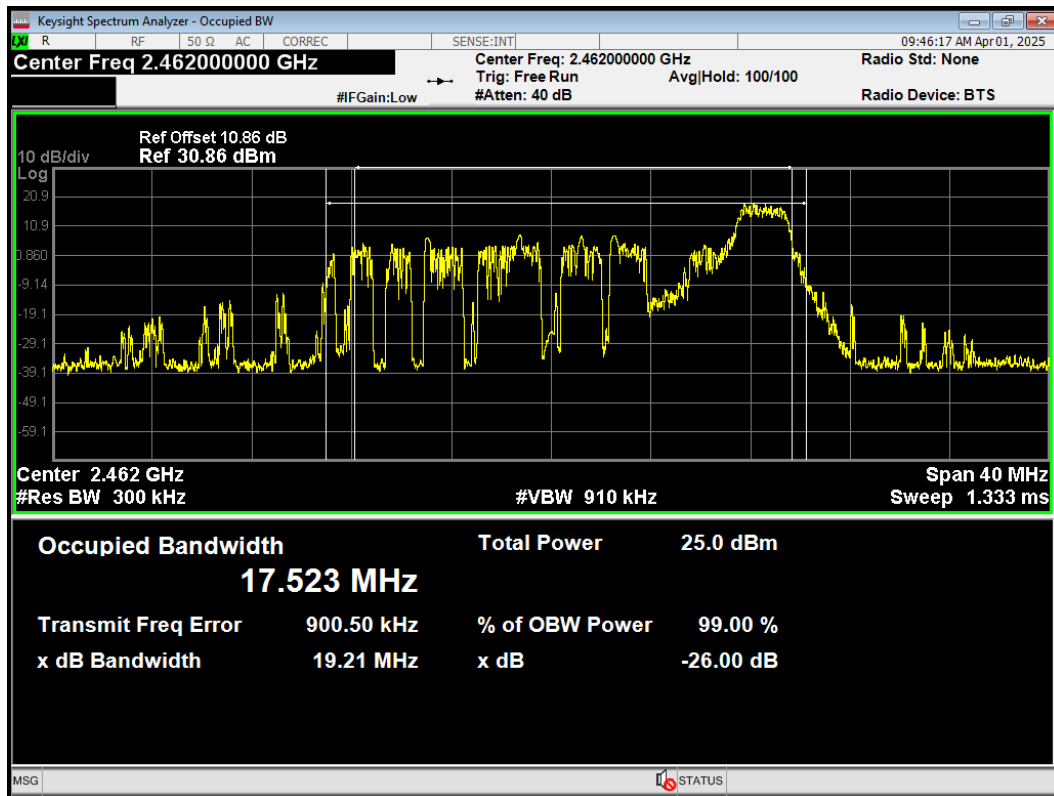


OBW 802.11ax(HE20) 52T 2412MHz

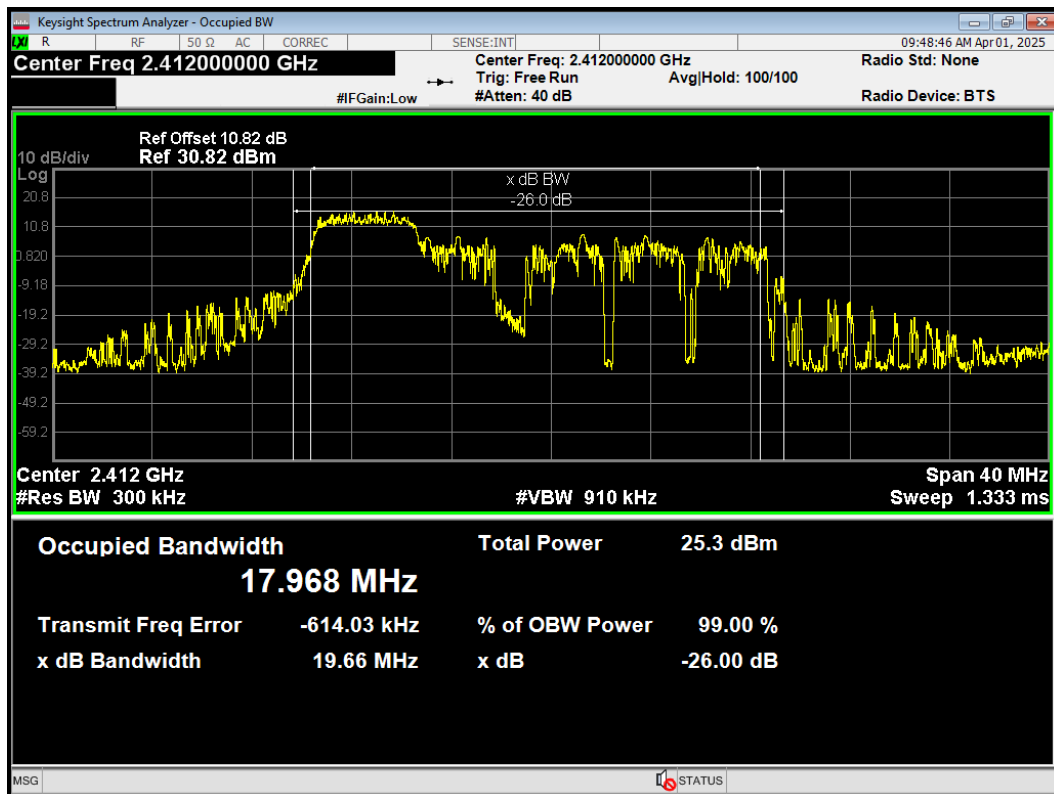

OBW 802.11ax(HE20) 52T 2437MHz

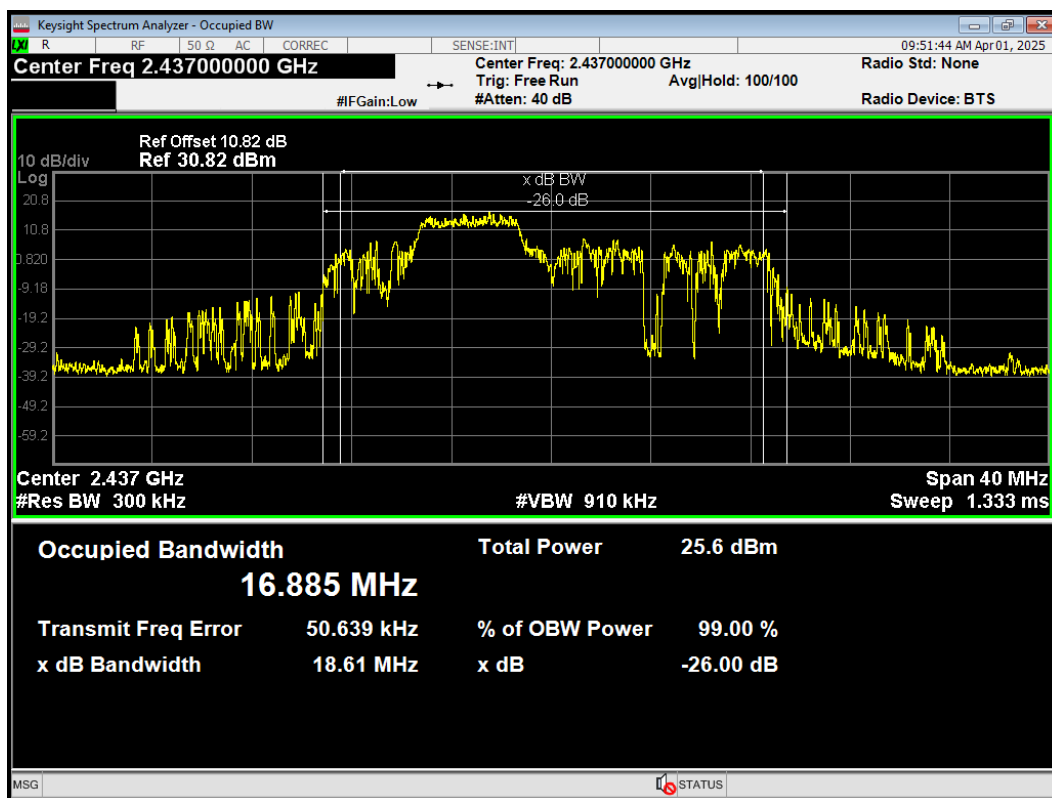


OBW 802.11ax(HE20) 52T 2462MHz

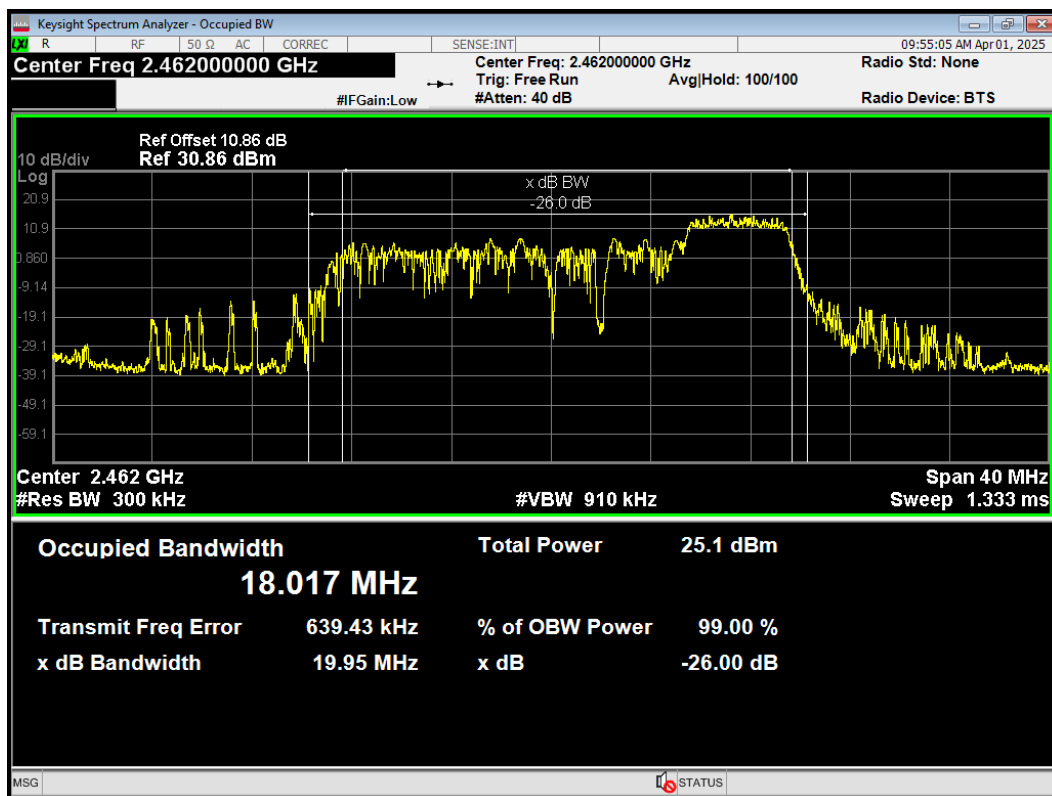


6 dB bandwidth

SU Mode


-6dB Bandwidth 802.11ax(HE20) 2412MHz

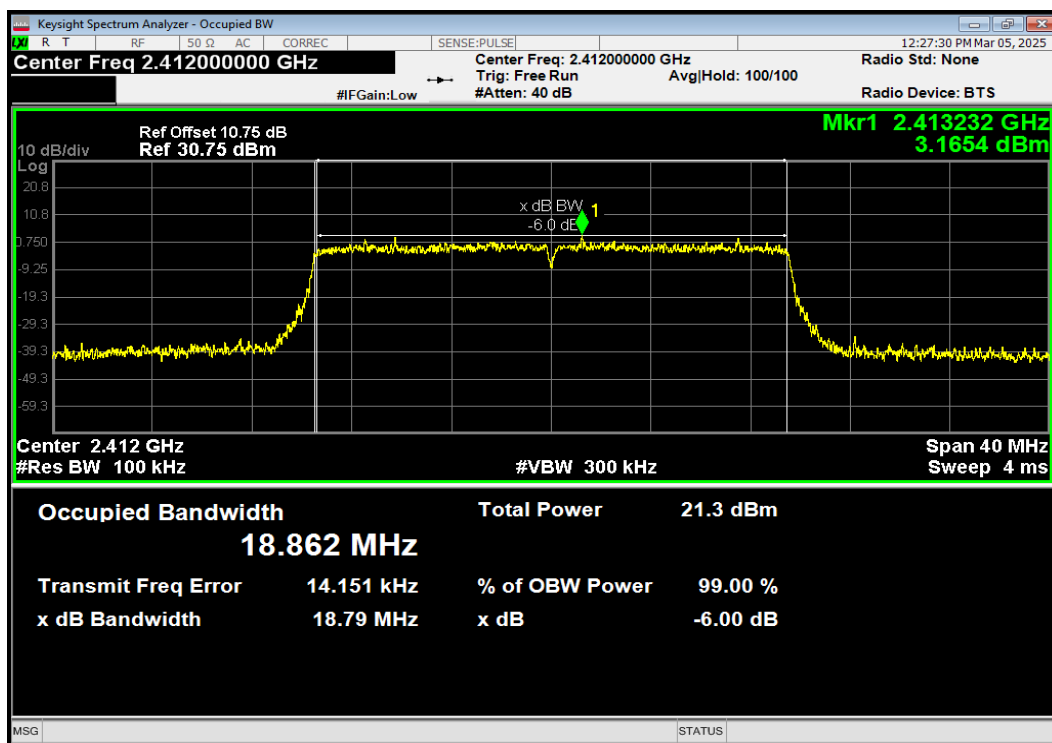


-6dB Bandwidth 802.11ax(HE20) 2437MHz

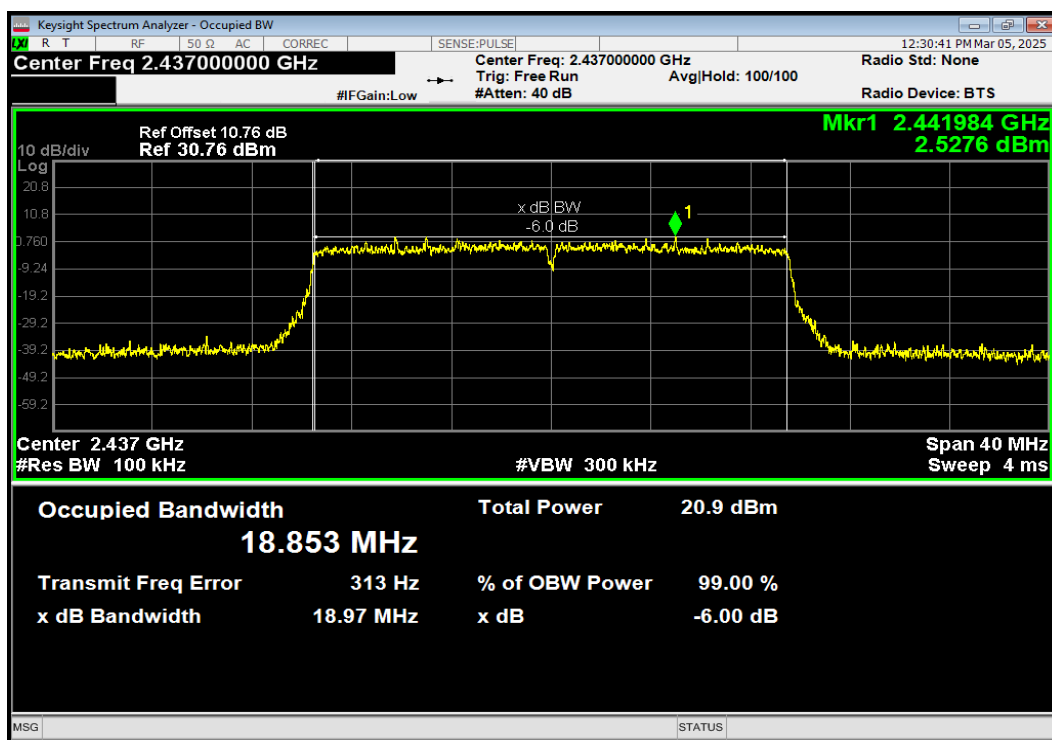


-6dB Bandwidth 802.11ax(HE20) 2462MHz

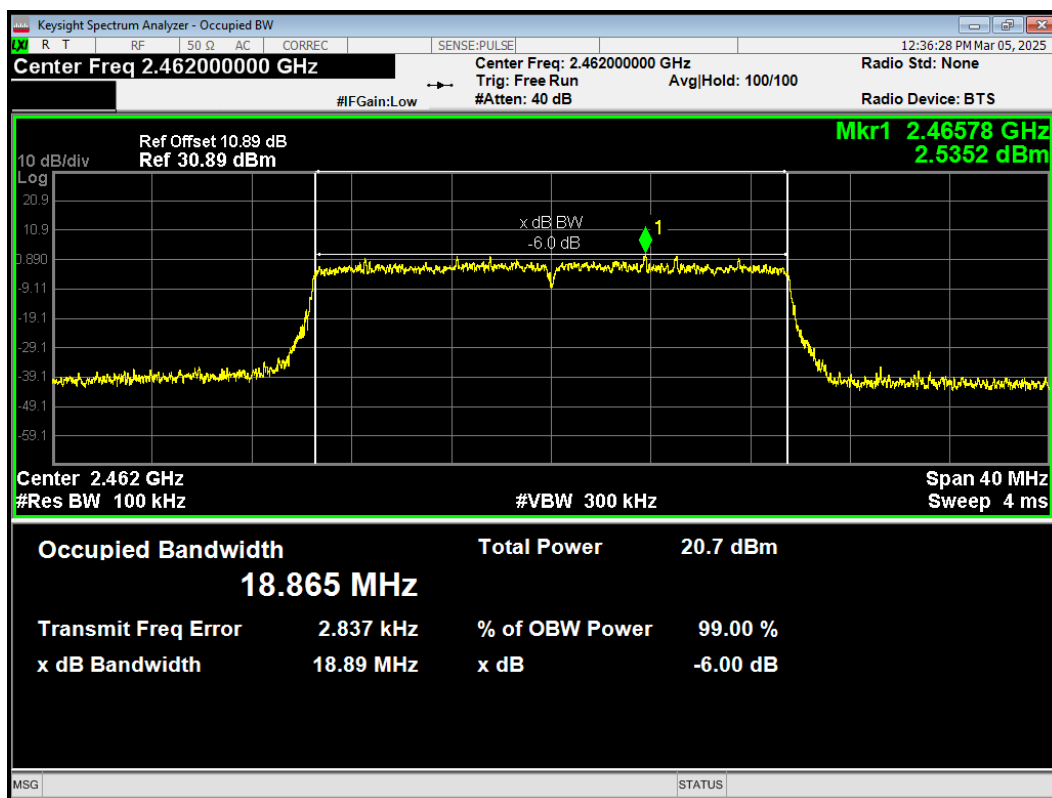


-6dB Bandwidth 802.11b 2412MHz

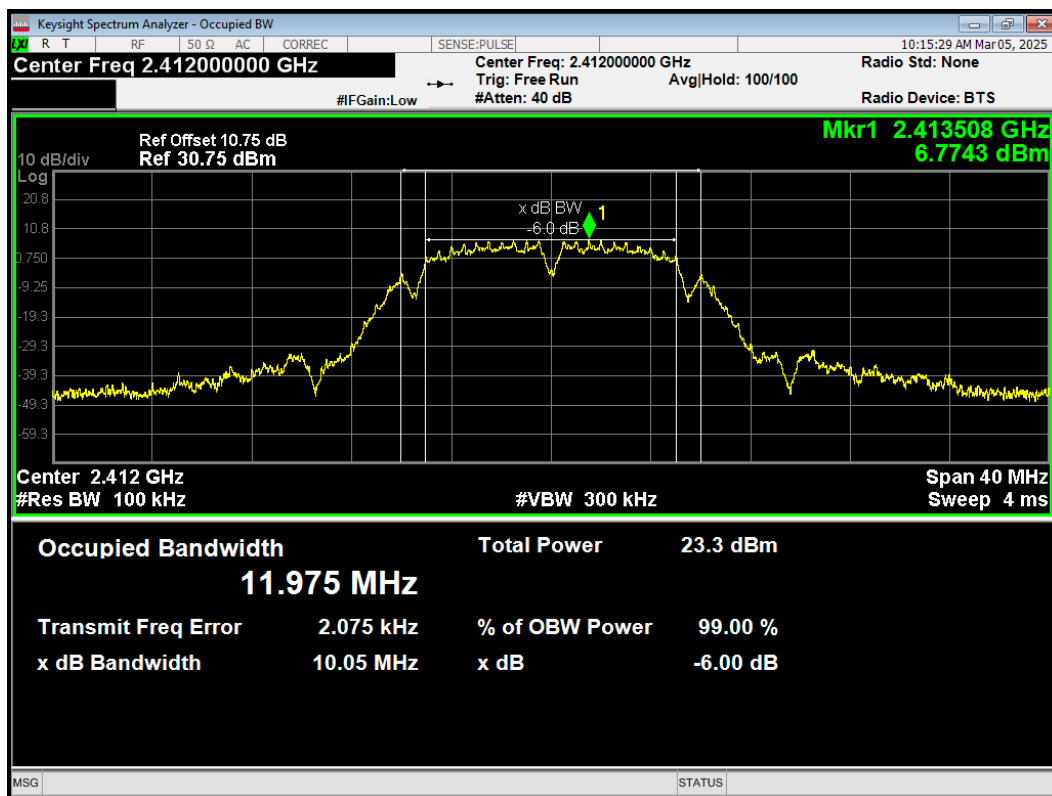


-6dB Bandwidth 802.11b 2437MHz

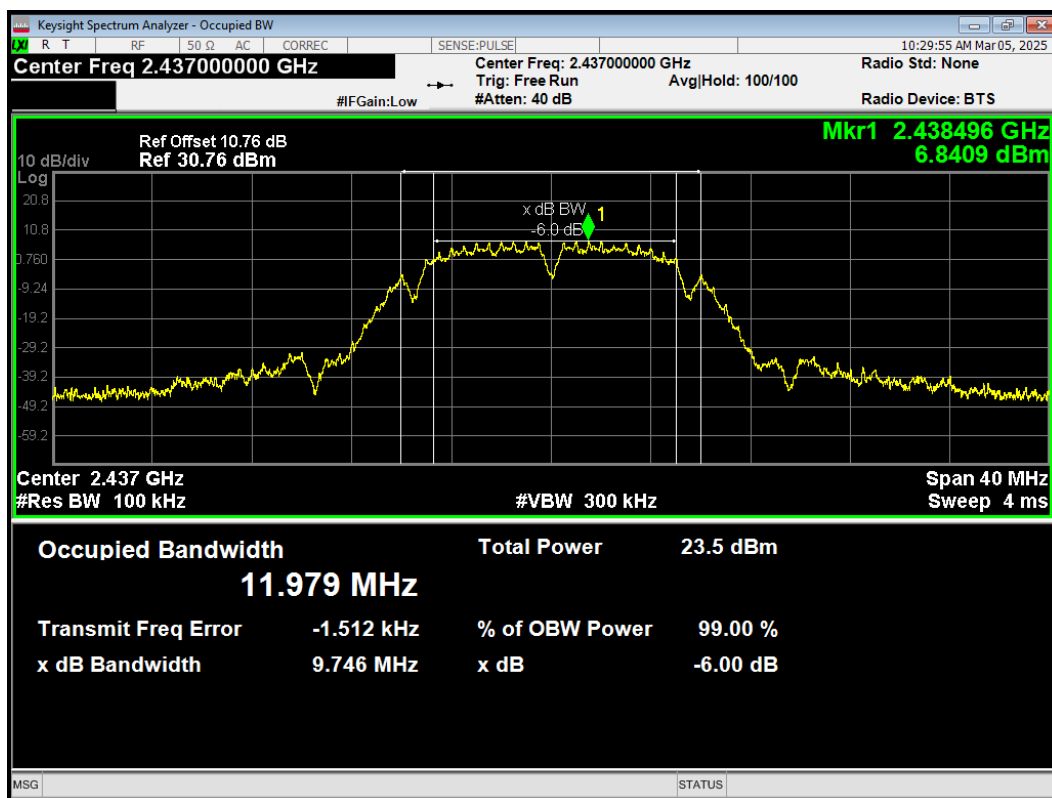


-6dB Bandwidth 802.11b 2462MHz

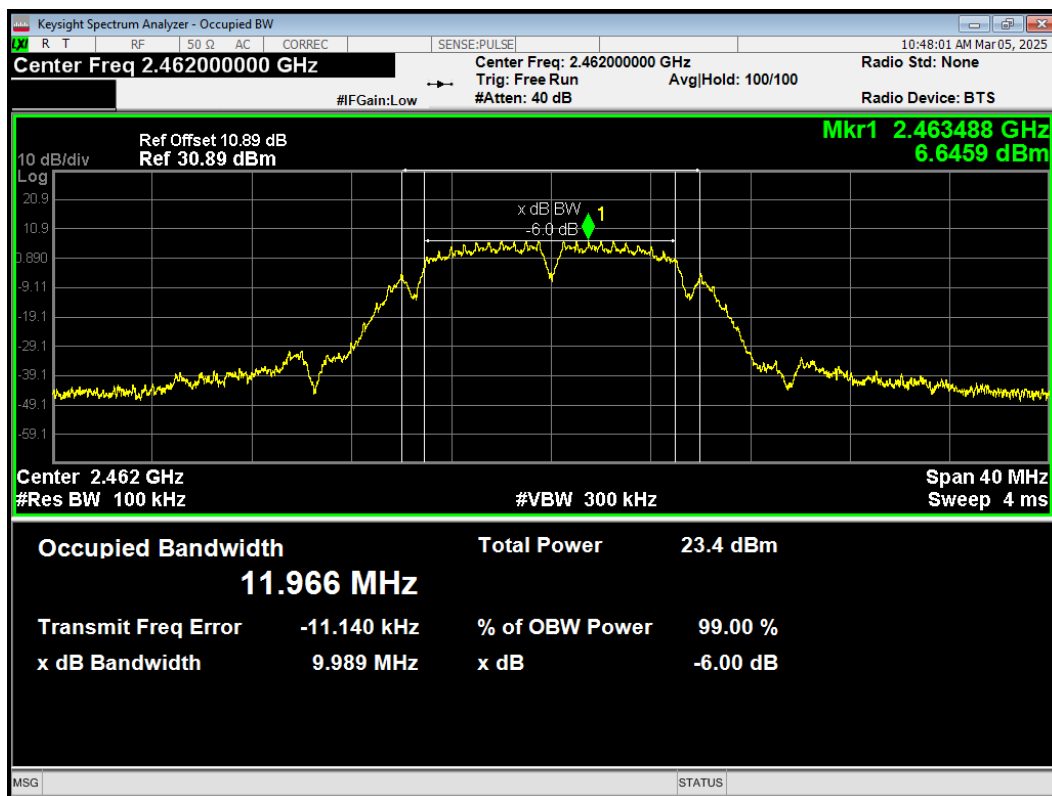


-6dB Bandwidth 802.11g 2412MHz

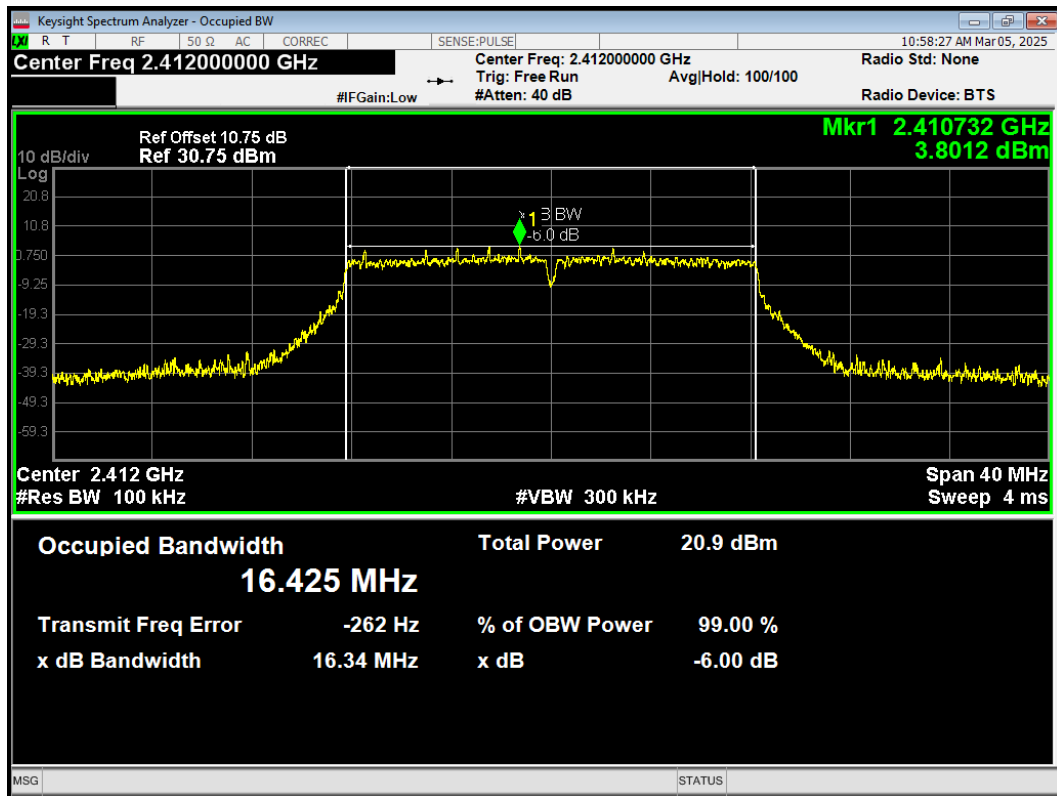


-6dB Bandwidth 802.11g 2437MHz

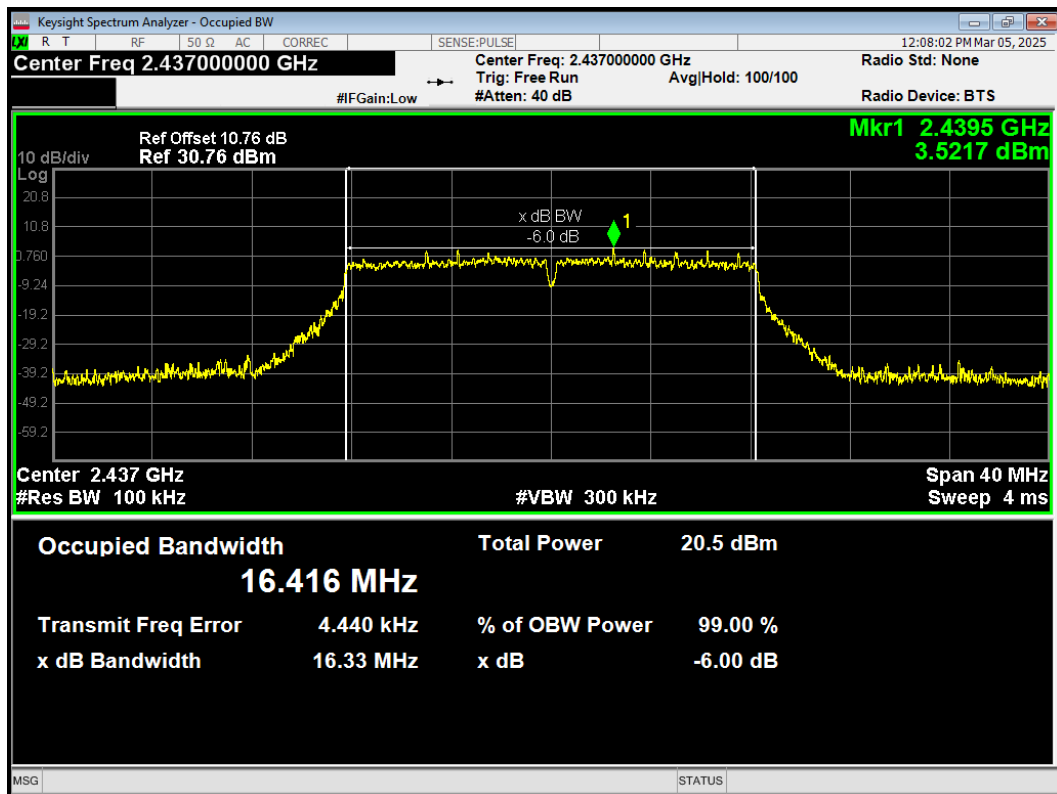


-6dB Bandwidth 802.11g 2462MHz

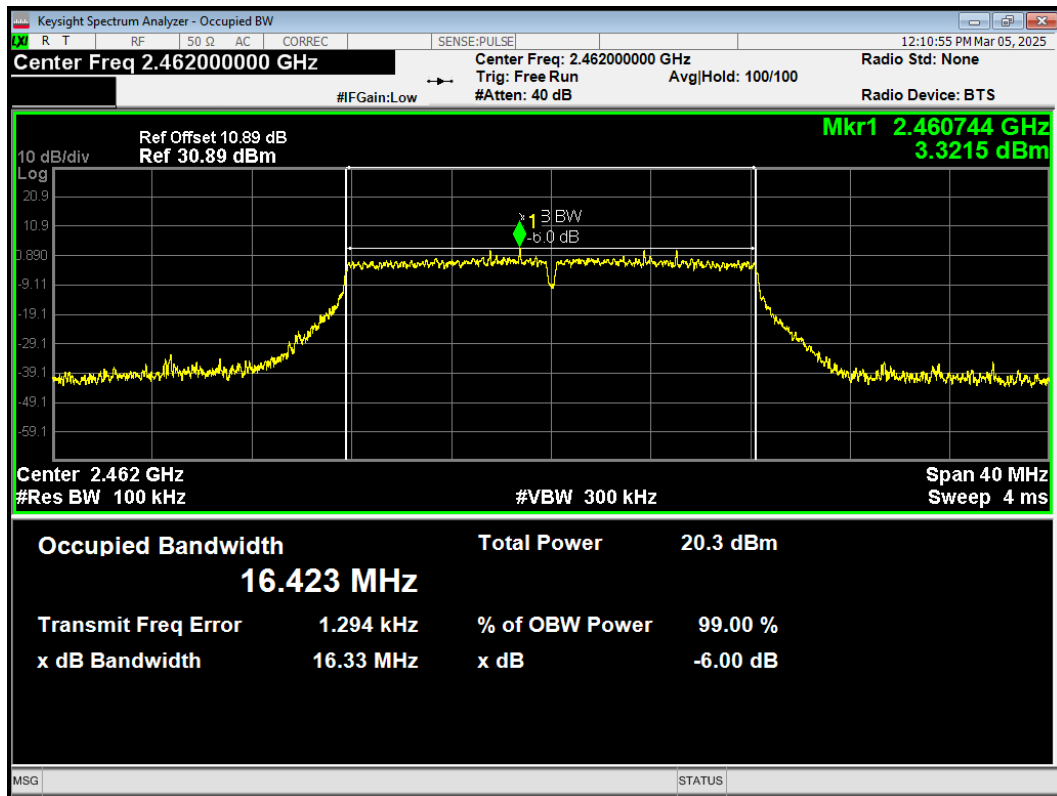


-6dB Bandwidth 802.11n(HT20) 2412MHz

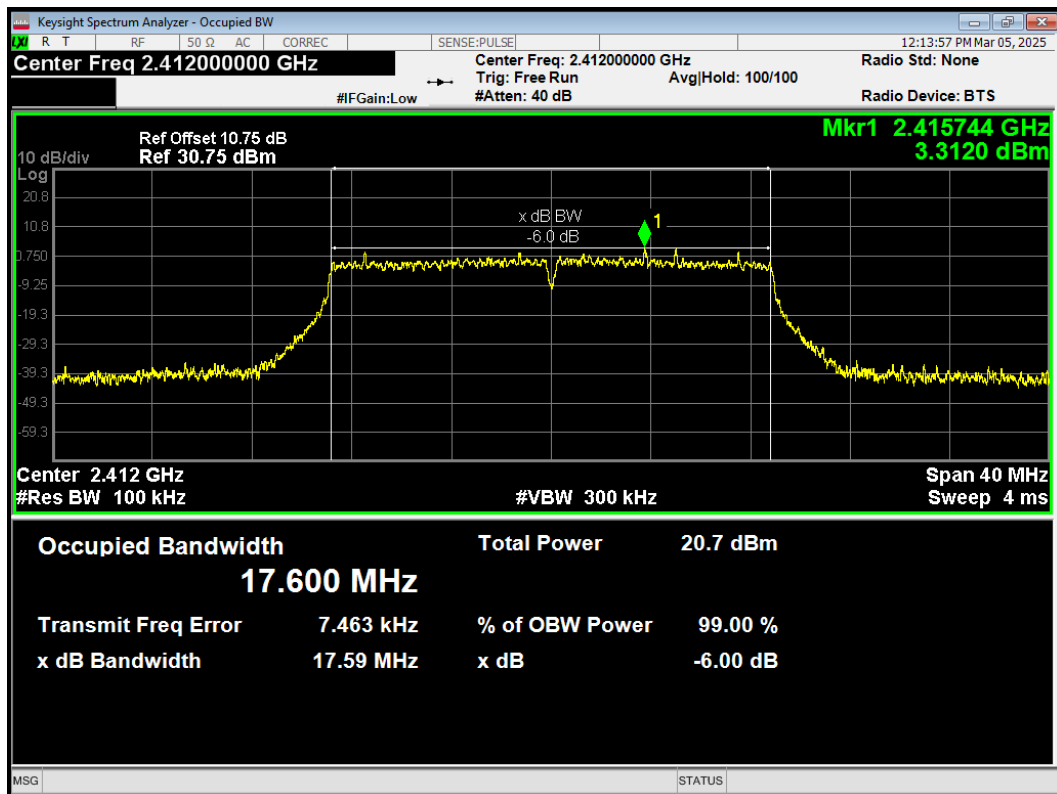


-6dB Bandwidth 802.11n(HT20) 2437MHz

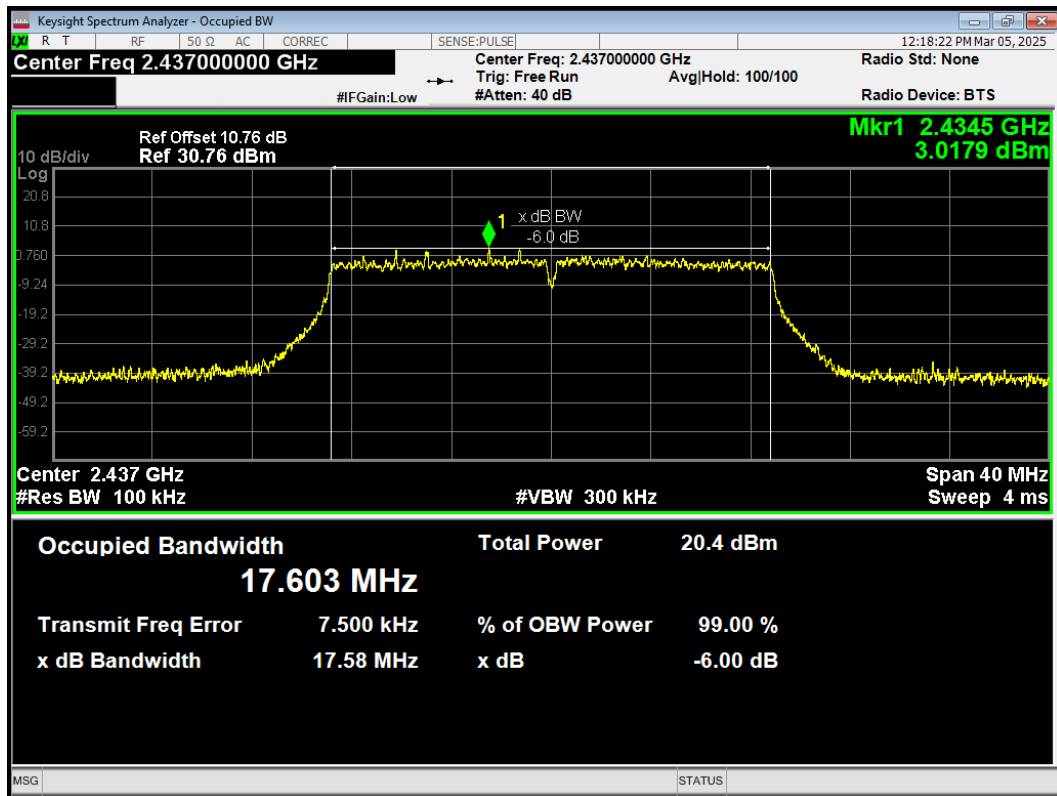


-6dB Bandwidth 802.11n(HT20) 2462MHz

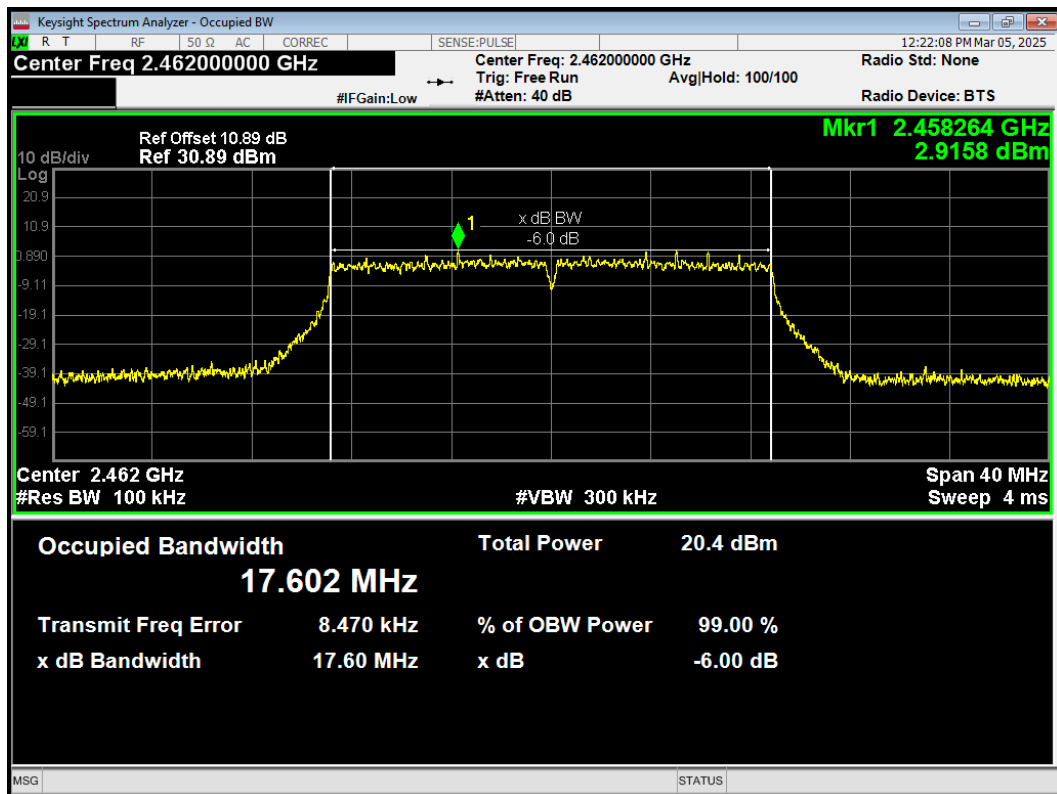


-6dB Bandwidth 802.11n(HT40) 2422MHz

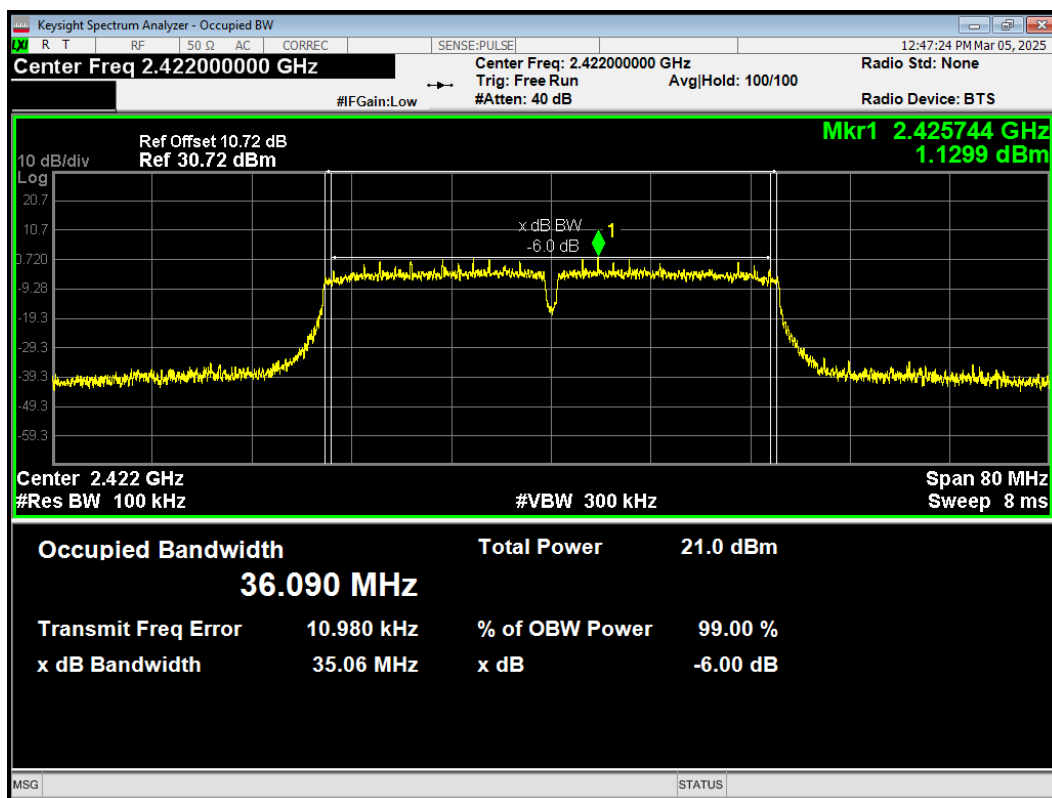


-6dB Bandwidth 802.11n(HT40) 2437MHz

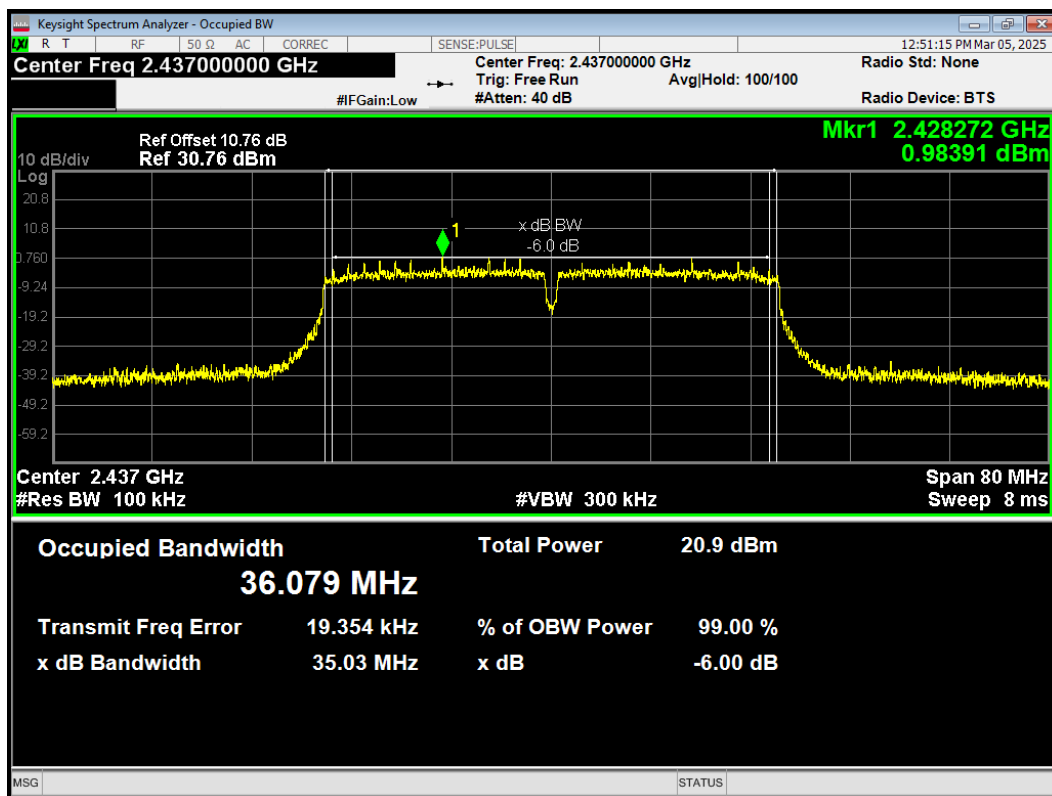


-6dB Bandwidth 802.11n(HT40) 2452MHz

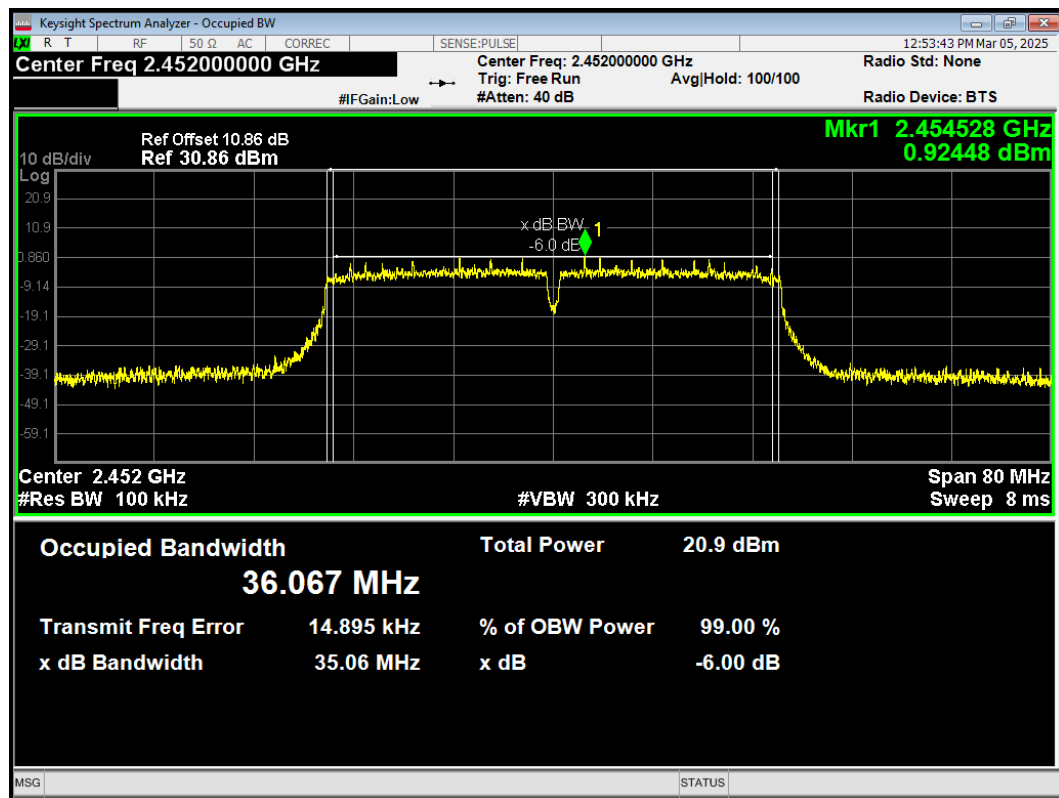


-6dB Bandwidth BLE (1M) 2402MHz

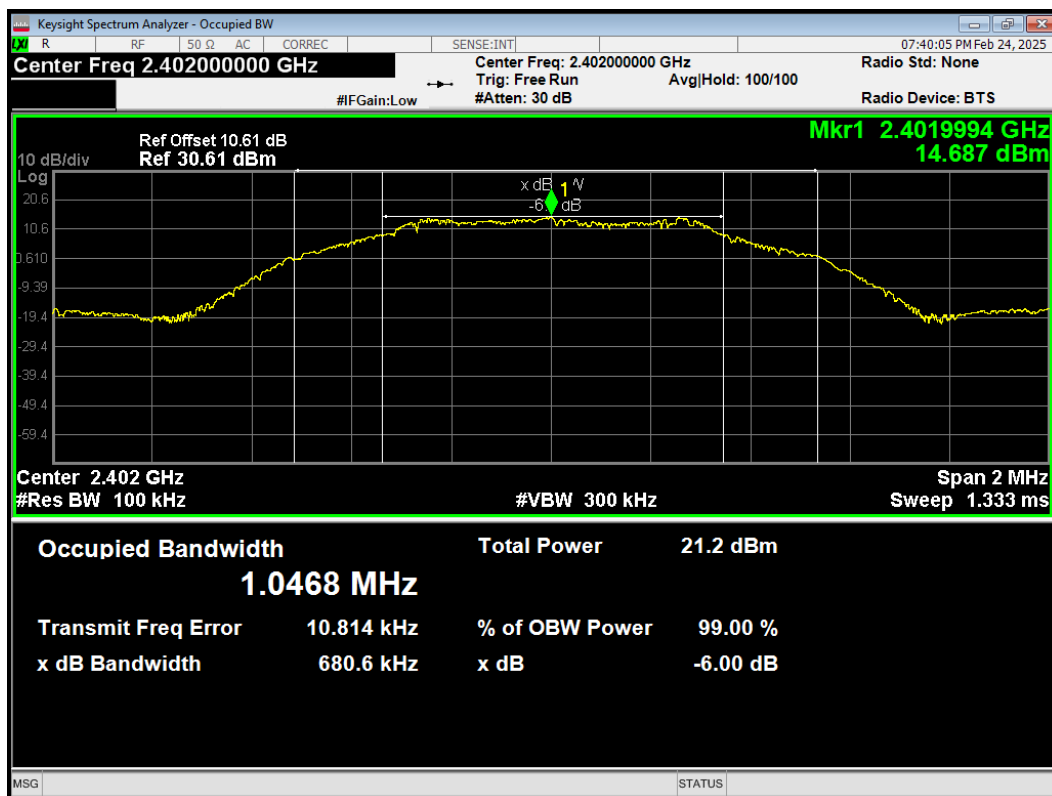


-6dB Bandwidth BLE (1M) 2440MHz

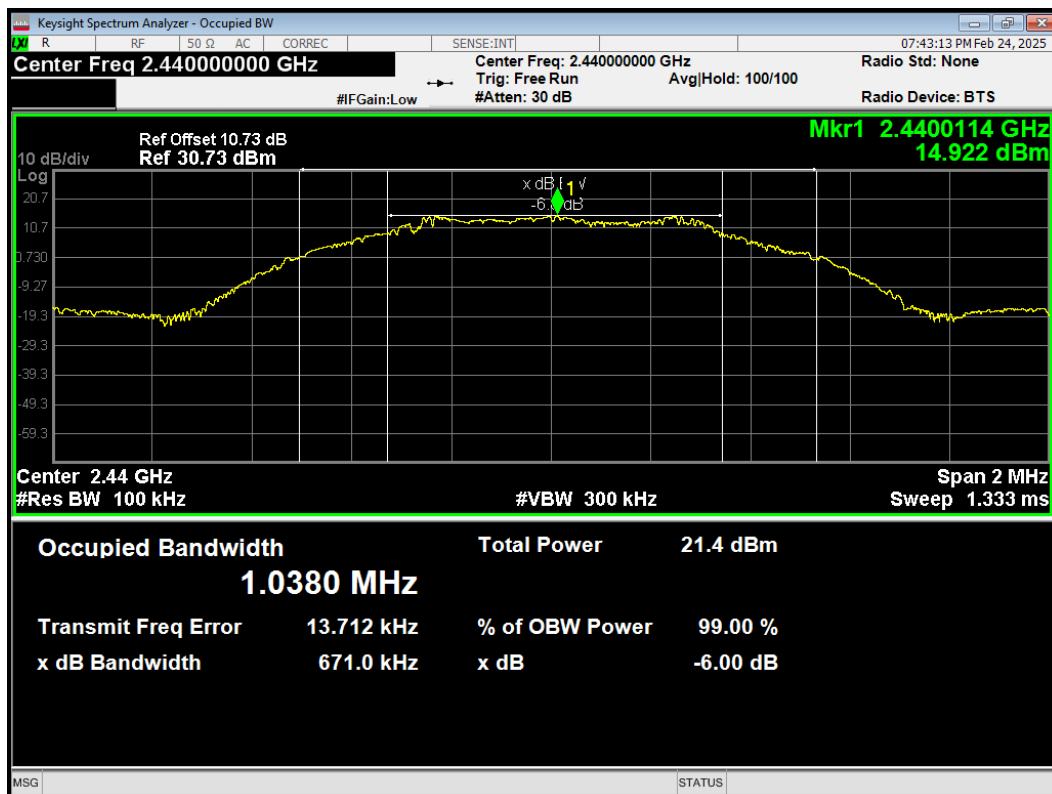


-6dB Bandwidth BLE (1M) 2480MHz

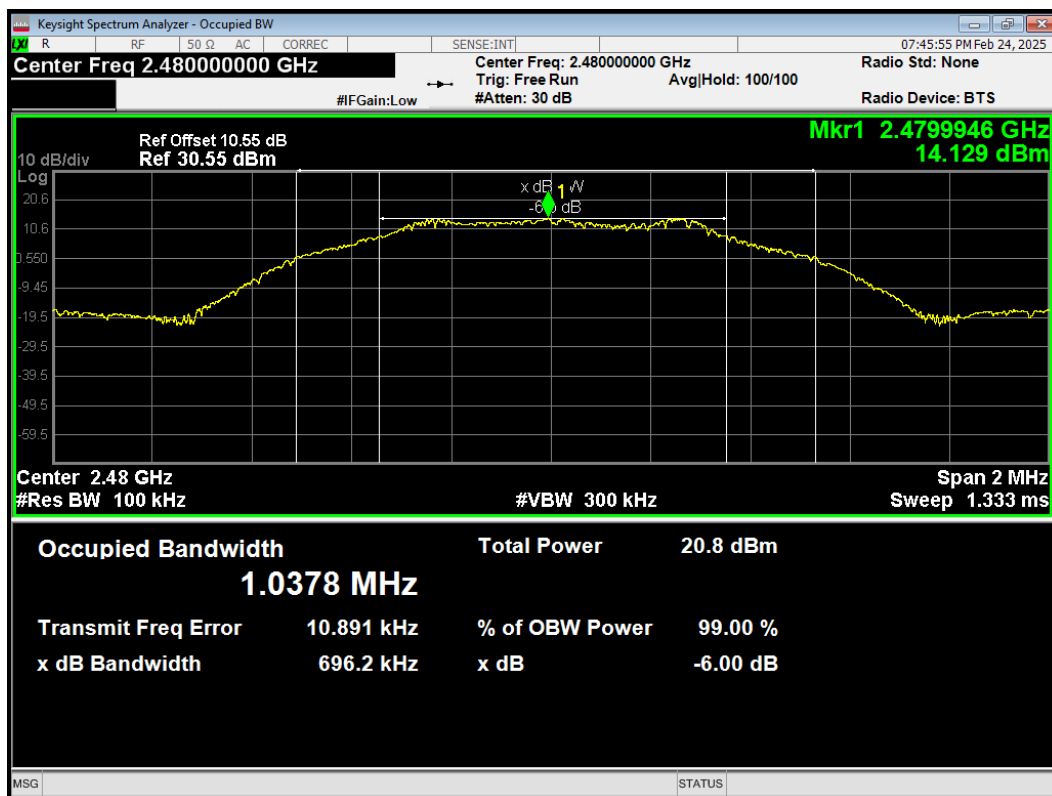


-6dB Bandwidth BLE (2M) 2402MHz

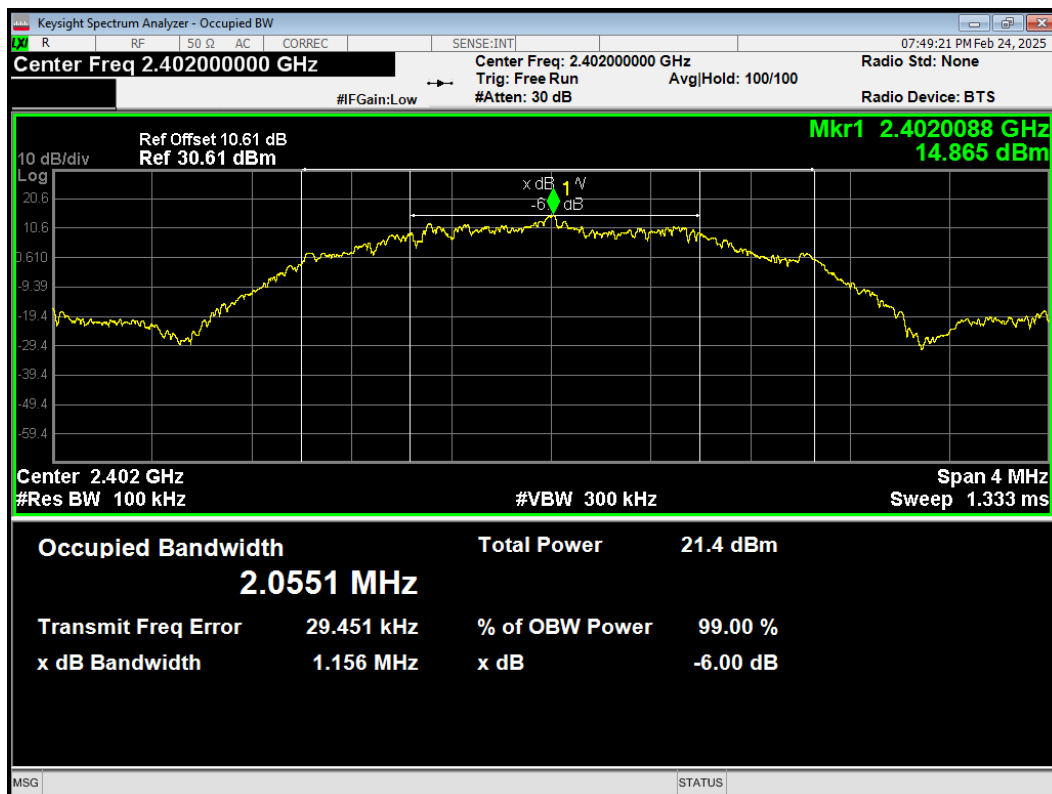

-6dB Bandwidth BLE (2M) 2440MHz

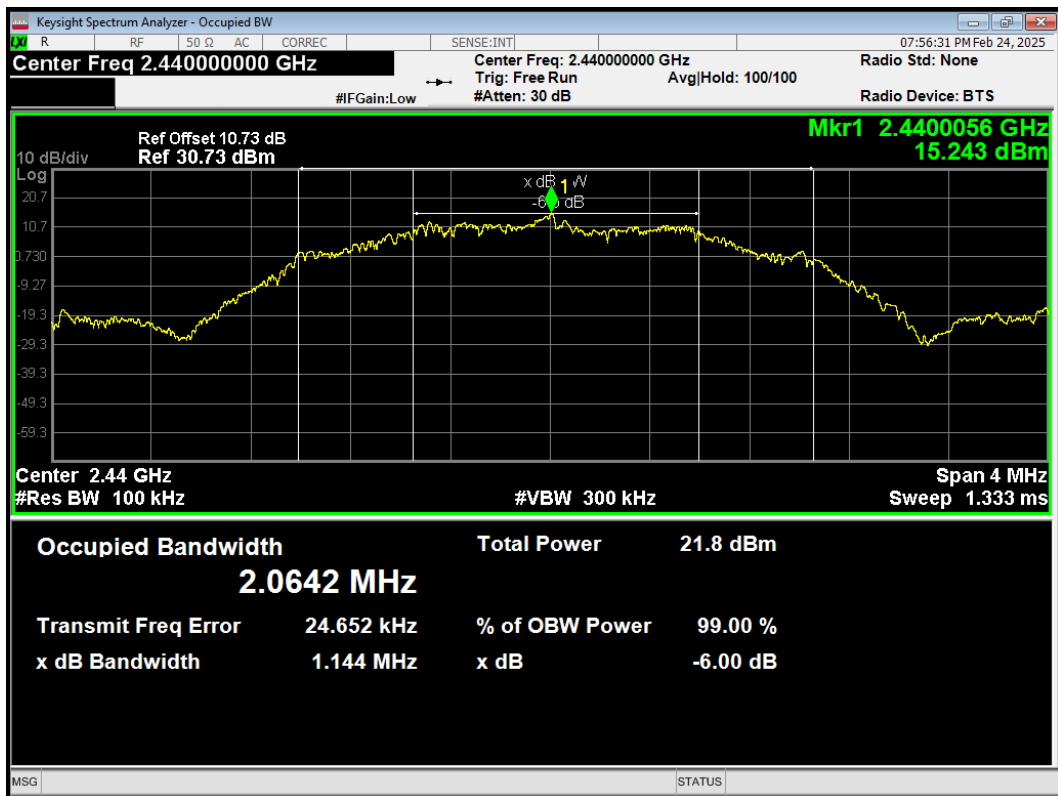


-6dB Bandwidth BLE (2M) 2480MHz

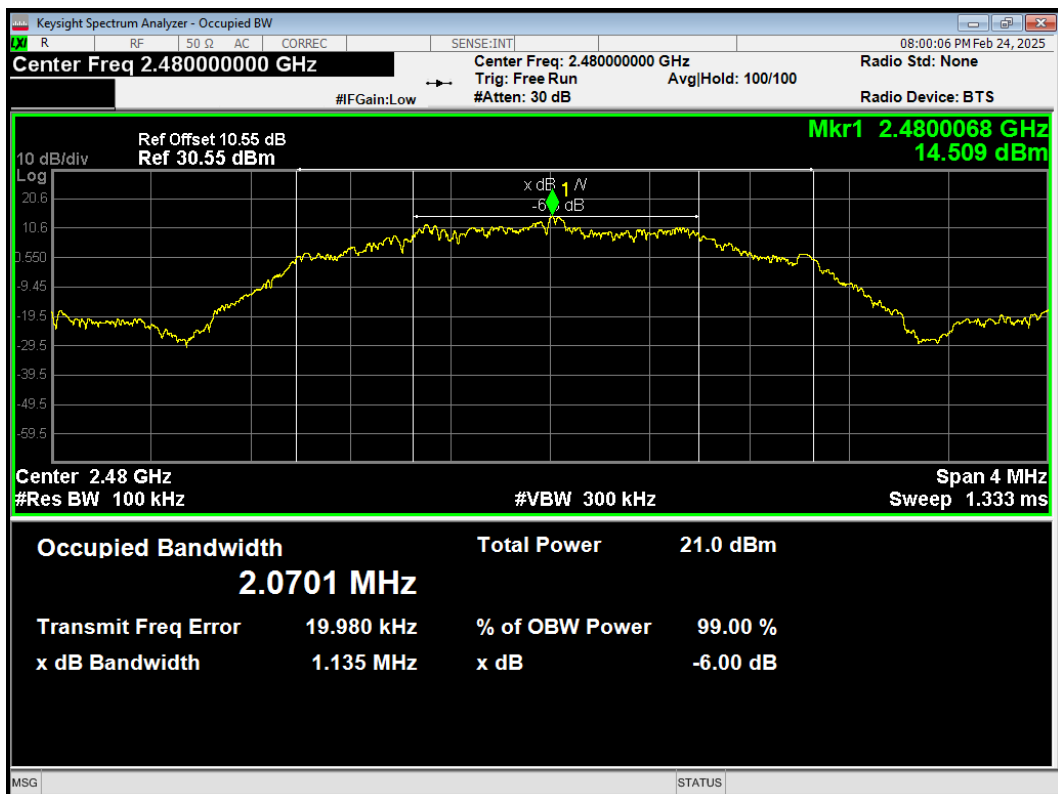


RU Mode


-6dB Bandwidth 802.11ax(HE20) 106T 2412MHz

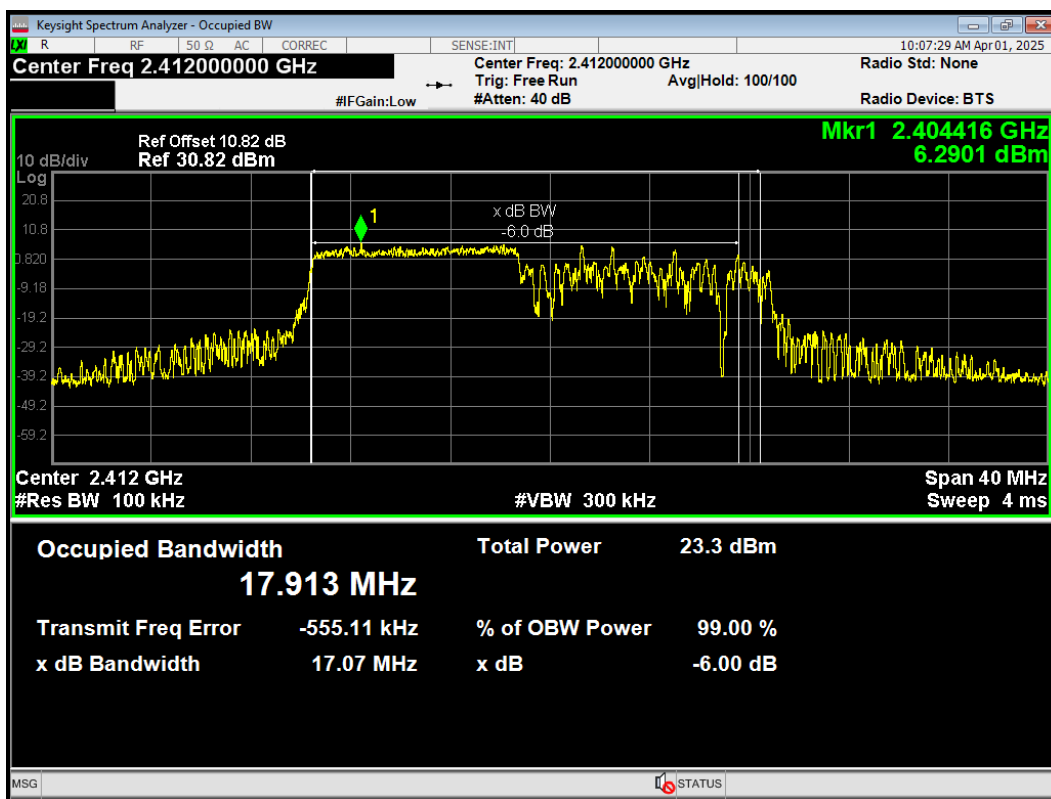


-6dB Bandwidth 802.11ax(HE20) 106T 2437MHz

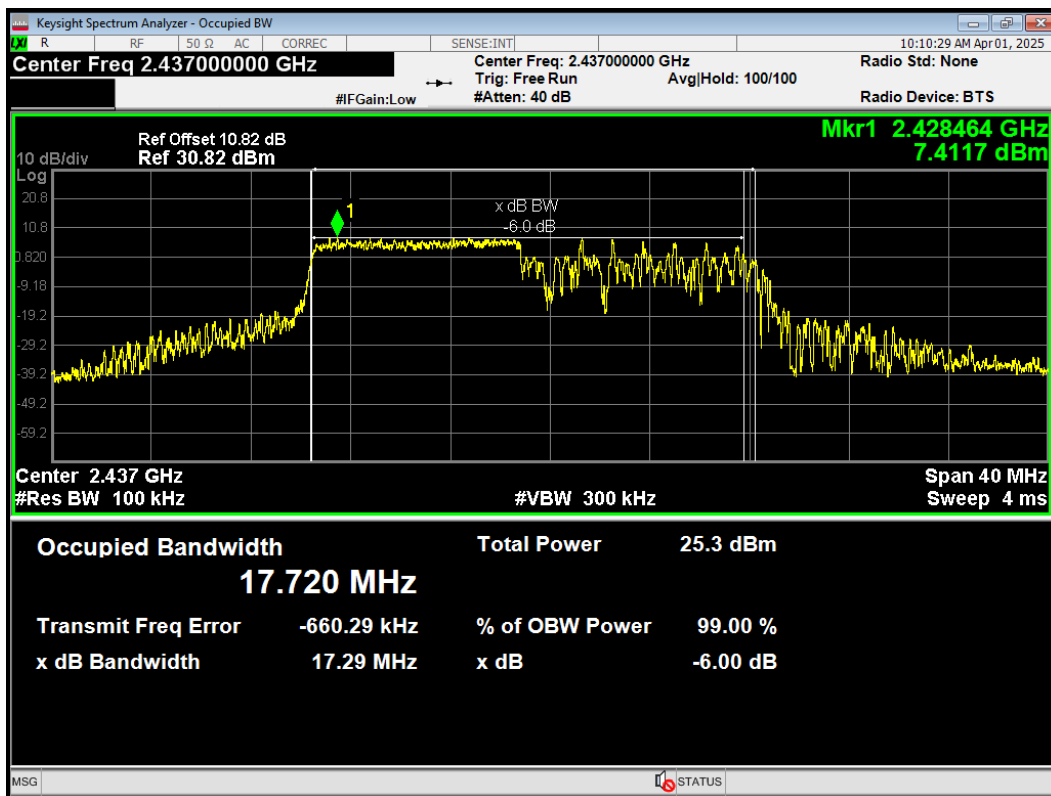


-6dB Bandwidth 802.11ax(HE20) 106T 2462MHz

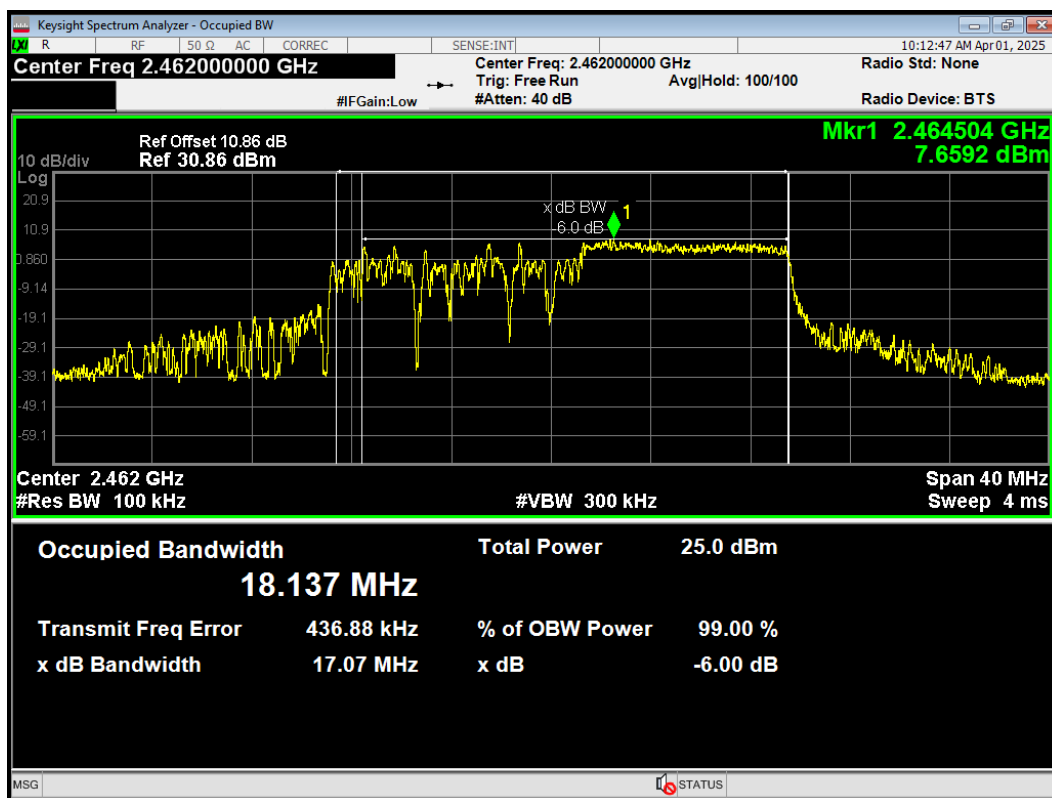


-6dB Bandwidth 802.11ax(HE20) 242T 2412MHz

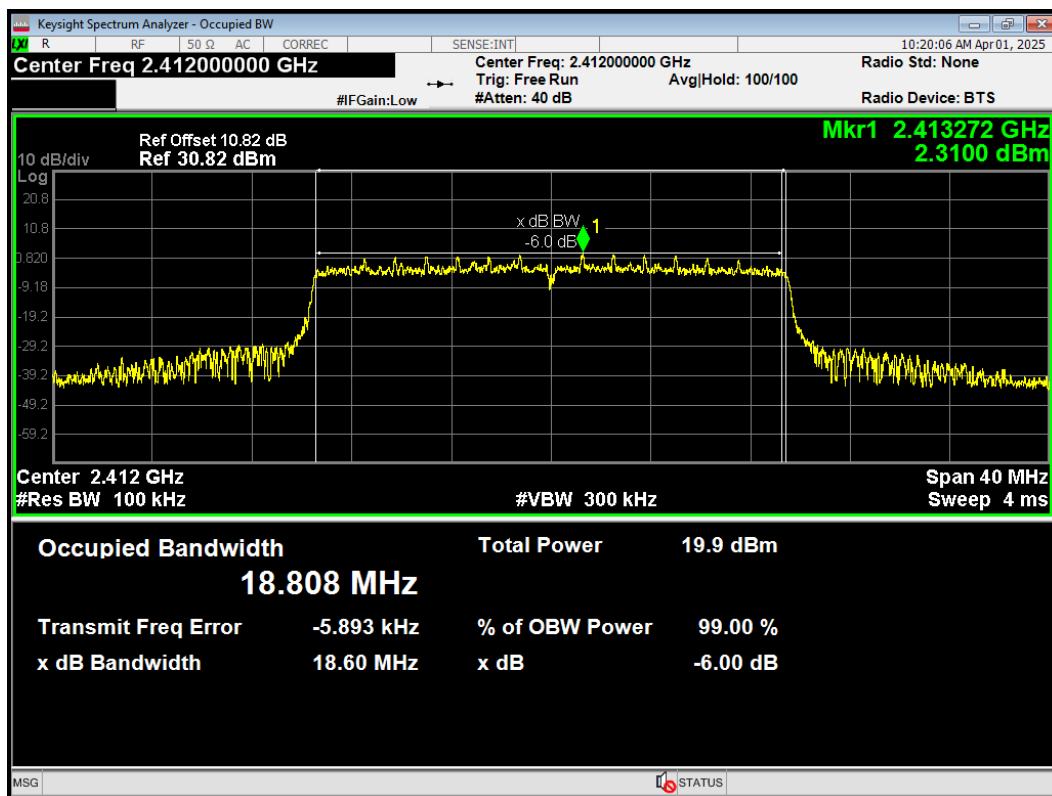


-6dB Bandwidth 802.11ax(HE20) 242T 2437MHz

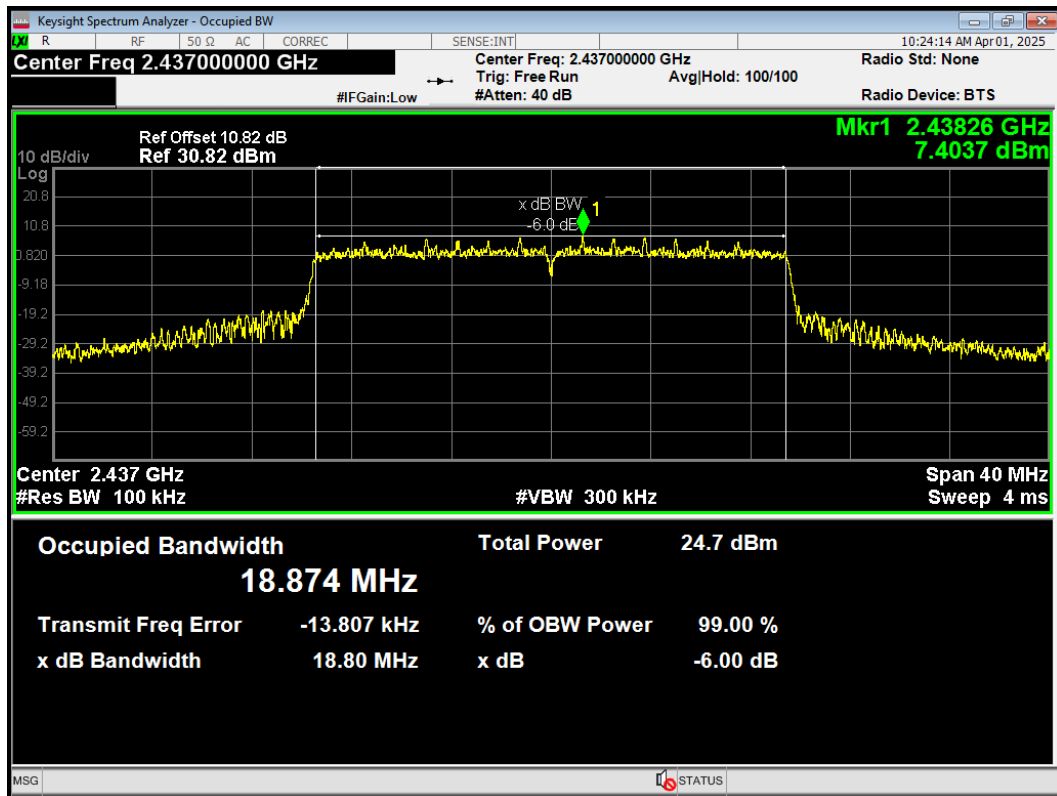


-6dB Bandwidth 802.11ax(HE20) 242T 2462MHz

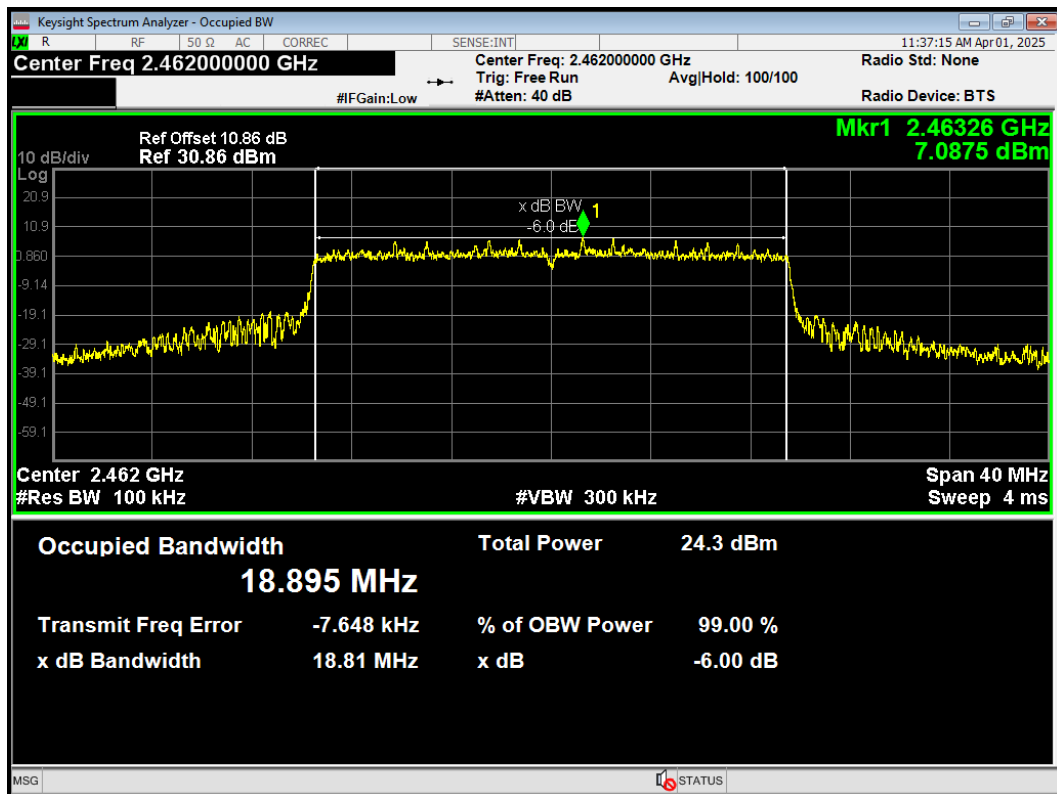


-6dB Bandwidth 802.11ax(HE20) 26T 2412MHz

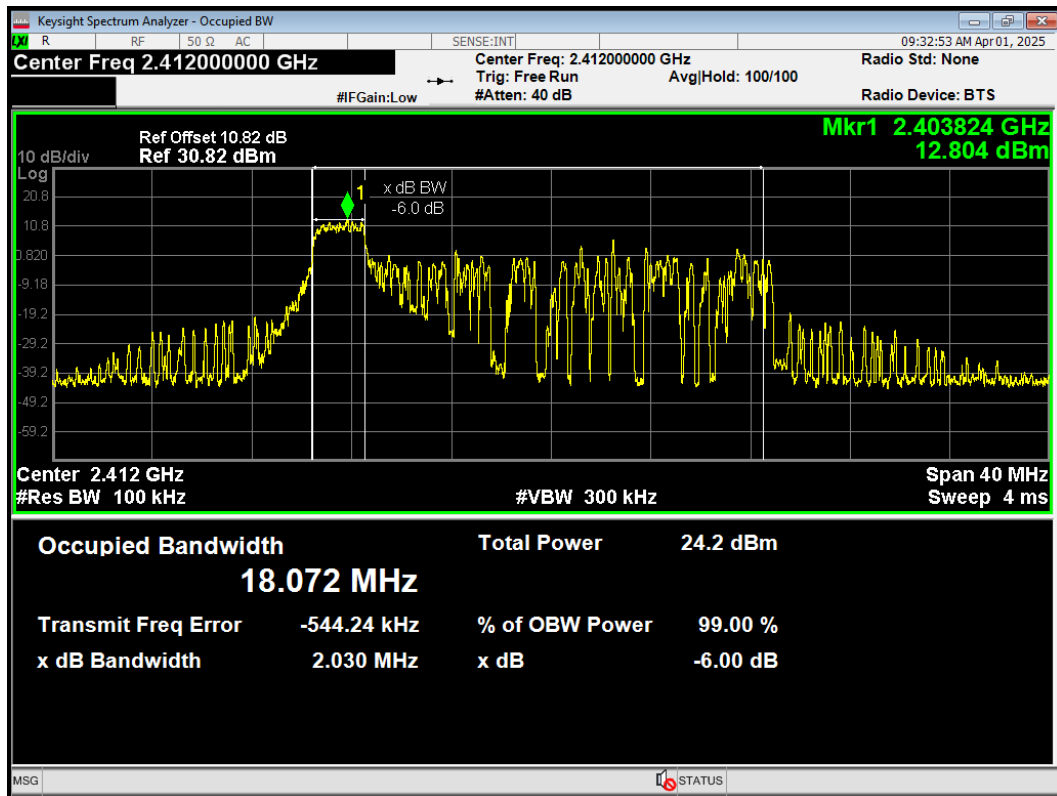


-6dB Bandwidth 802.11ax(HE20) 26T 2437MHz

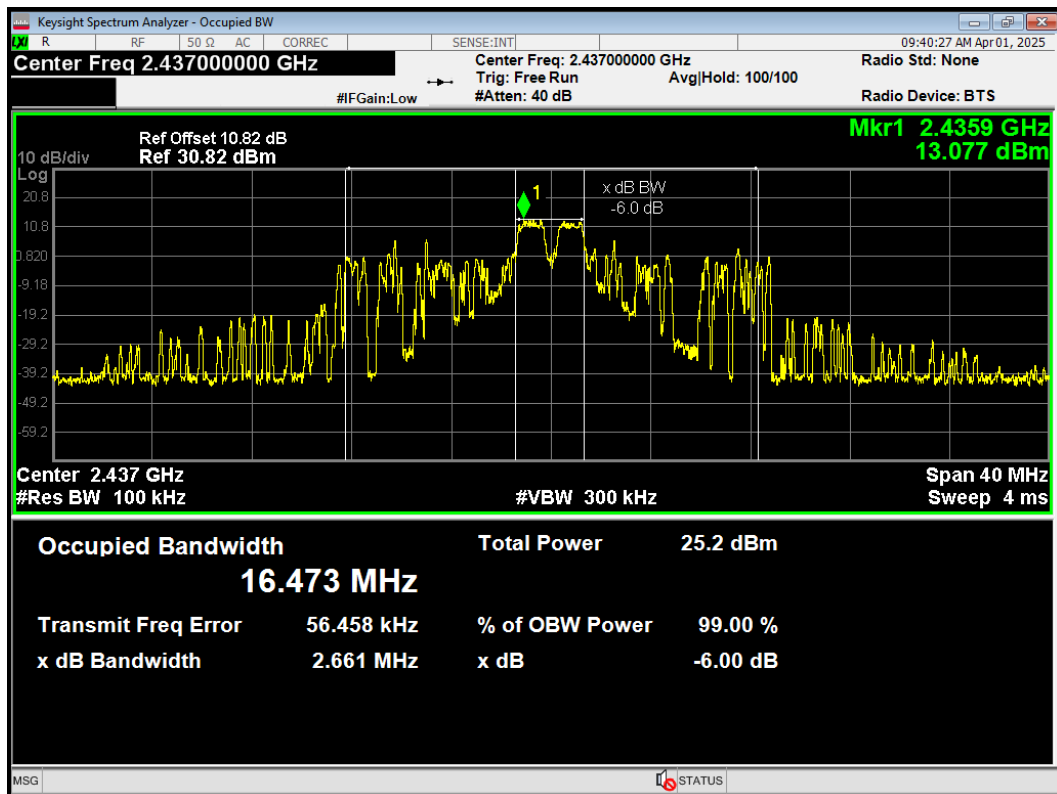


-6dB Bandwidth 802.11ax(HE20) 26T 2462MHz

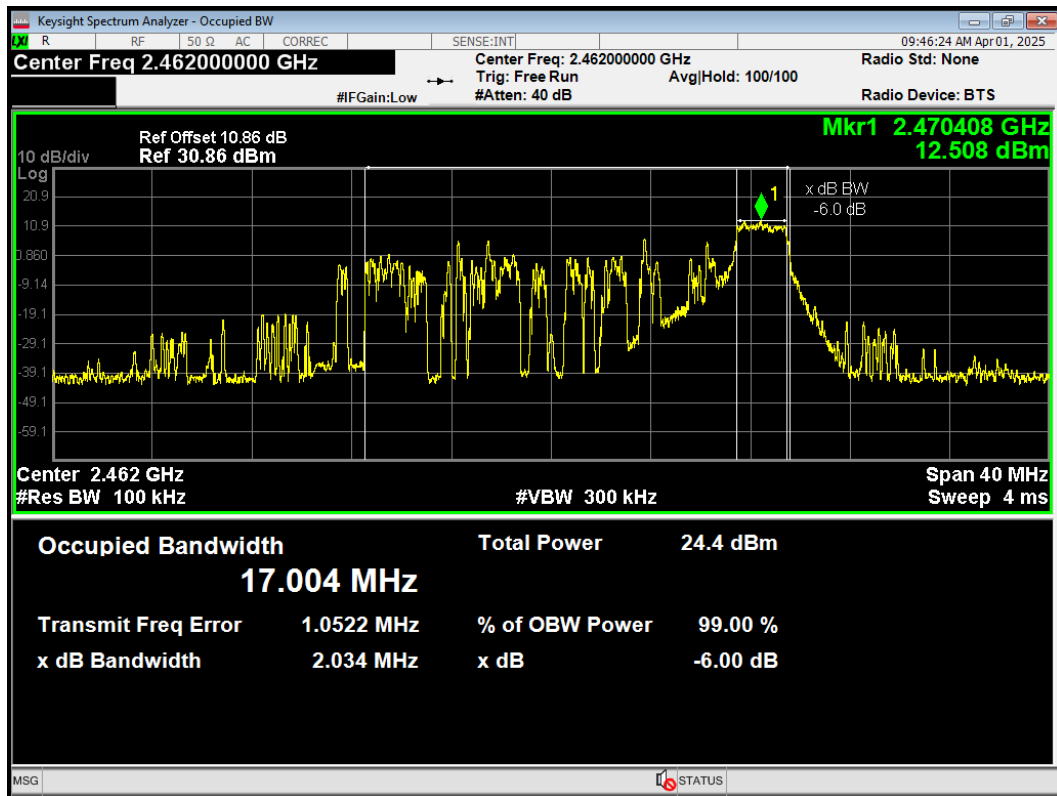


-6dB Bandwidth 802.11ax(HE20) 52T 2412MHz

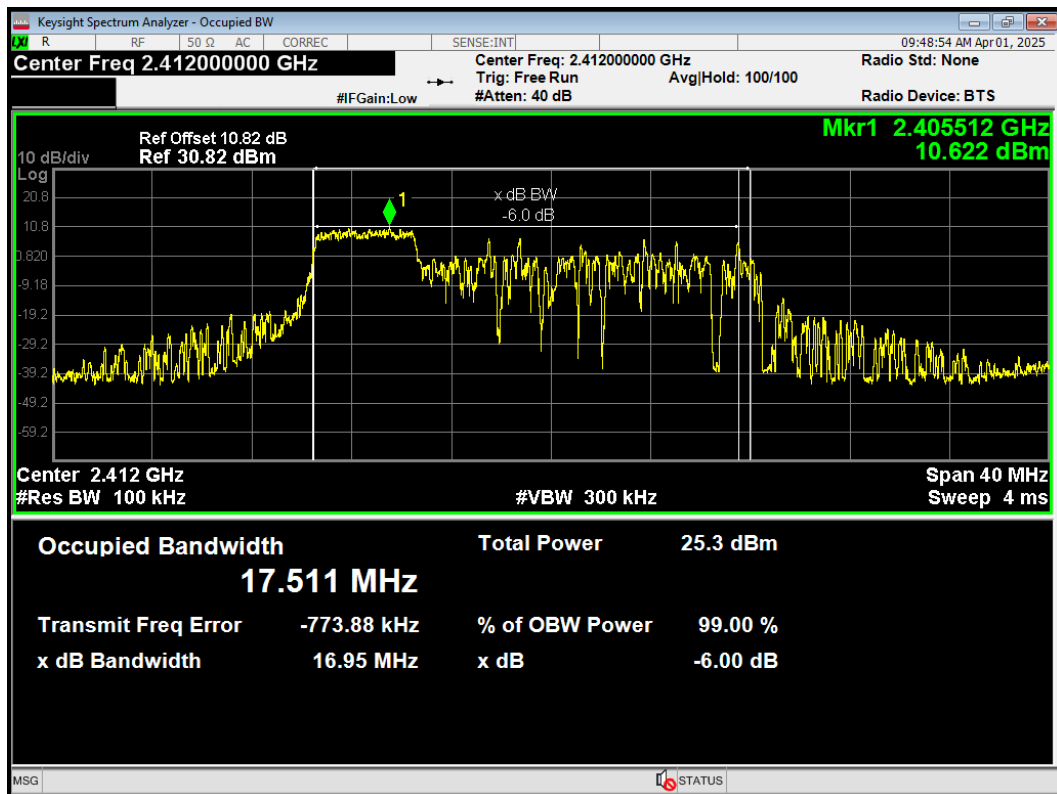

-6dB Bandwidth 802.11ax(HE20) 52T 2437MHz

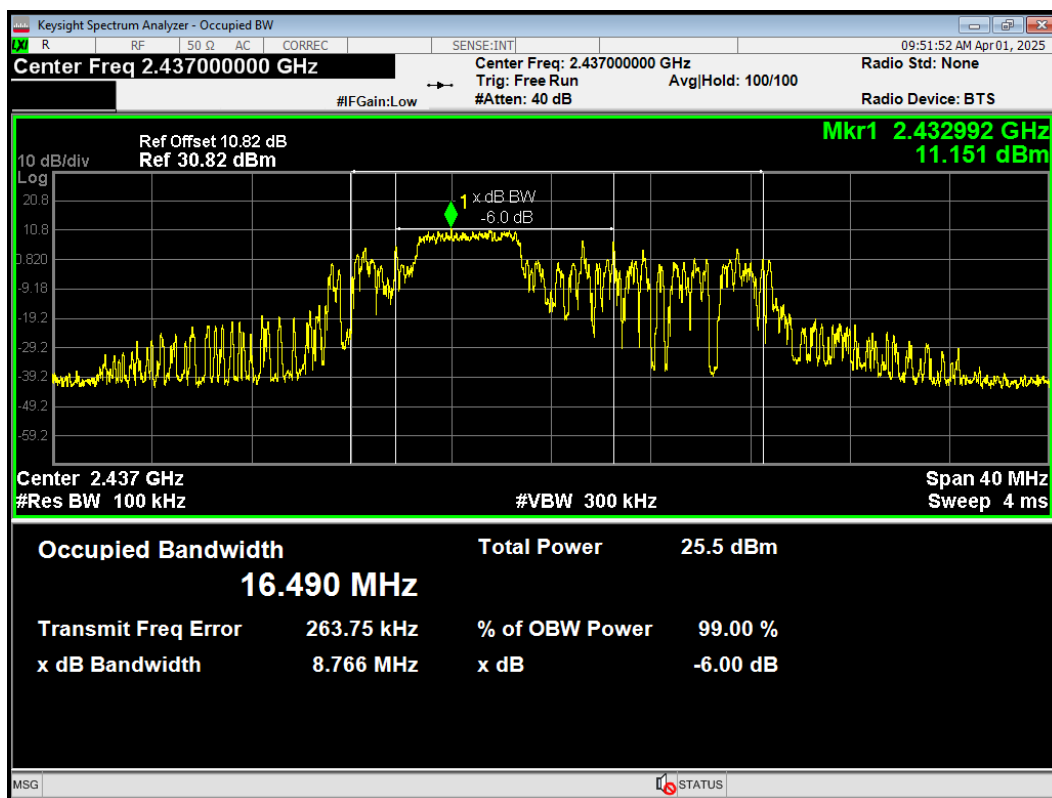

-6dB Bandwidth 802.11ax(HE20) 52T 2462MHz

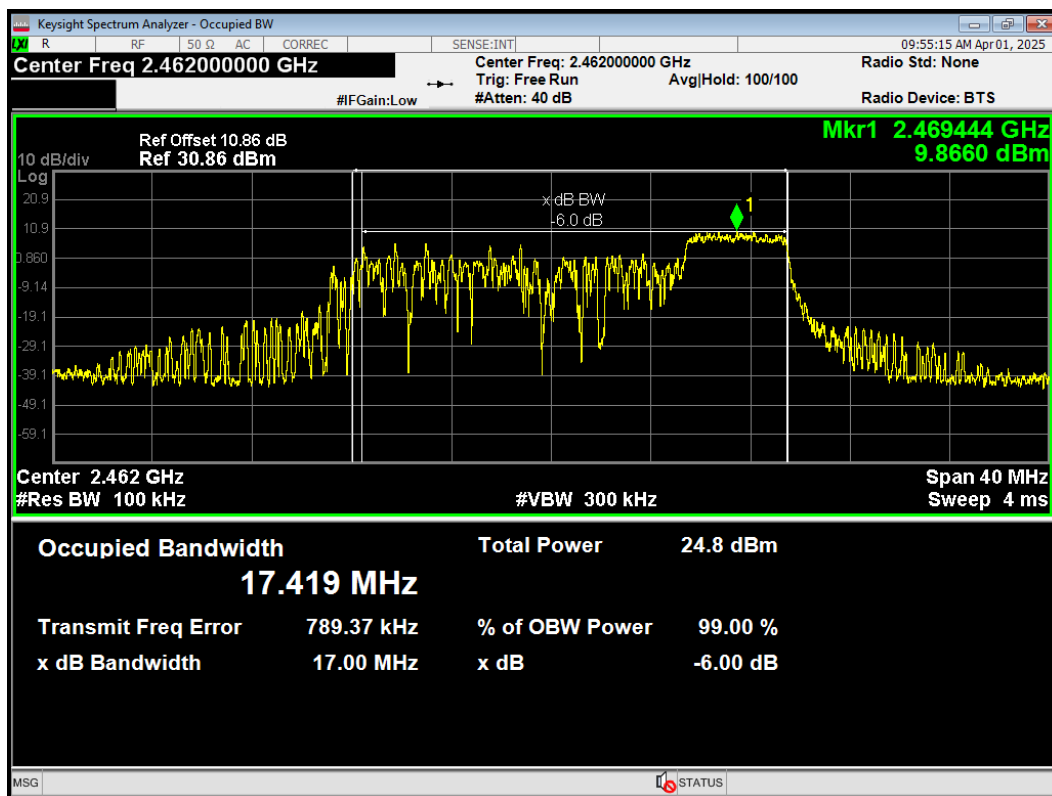

5.3. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB


Test Results: PASS

SU Mode


Band Edge 802.11ax(HE20) 2412MHz Ref

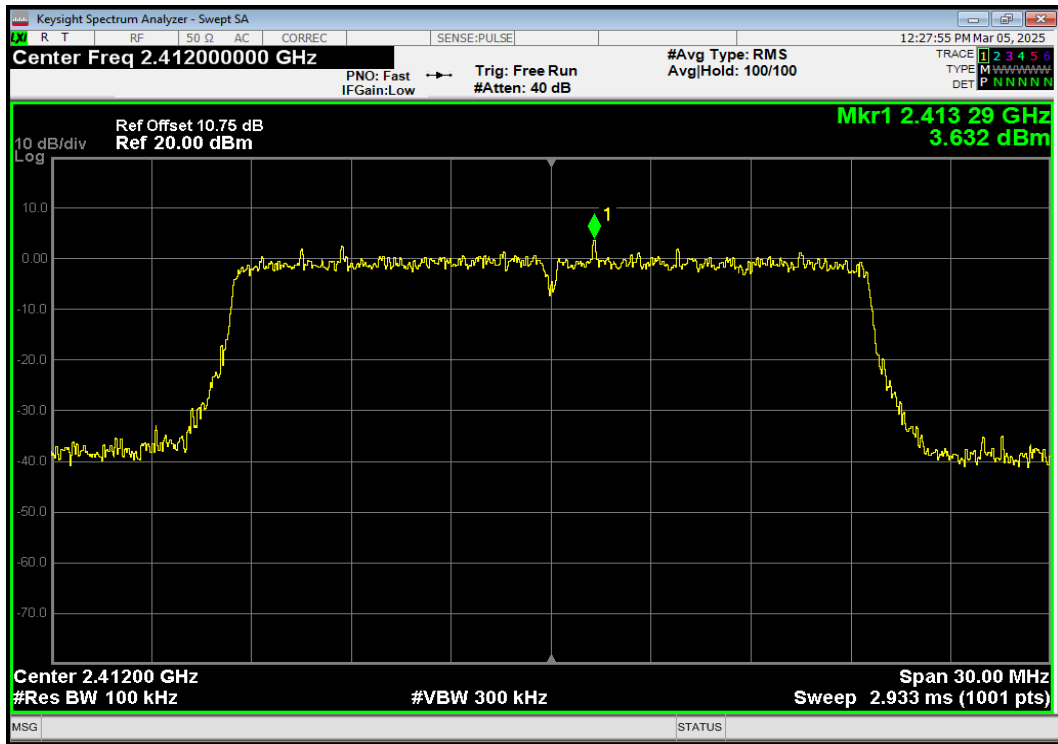


Band Edge 802.11ax(HE20) 2412MHz Emission

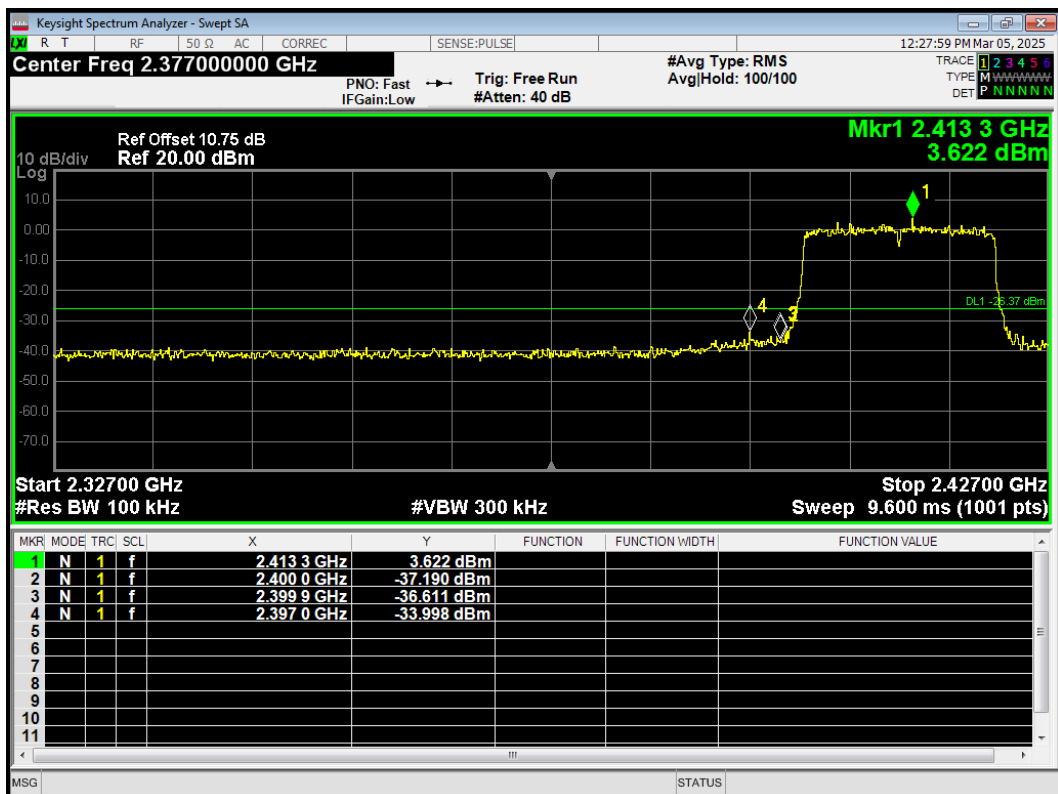


Band Edge 802.11ax(HE20) 2462MHz Ref

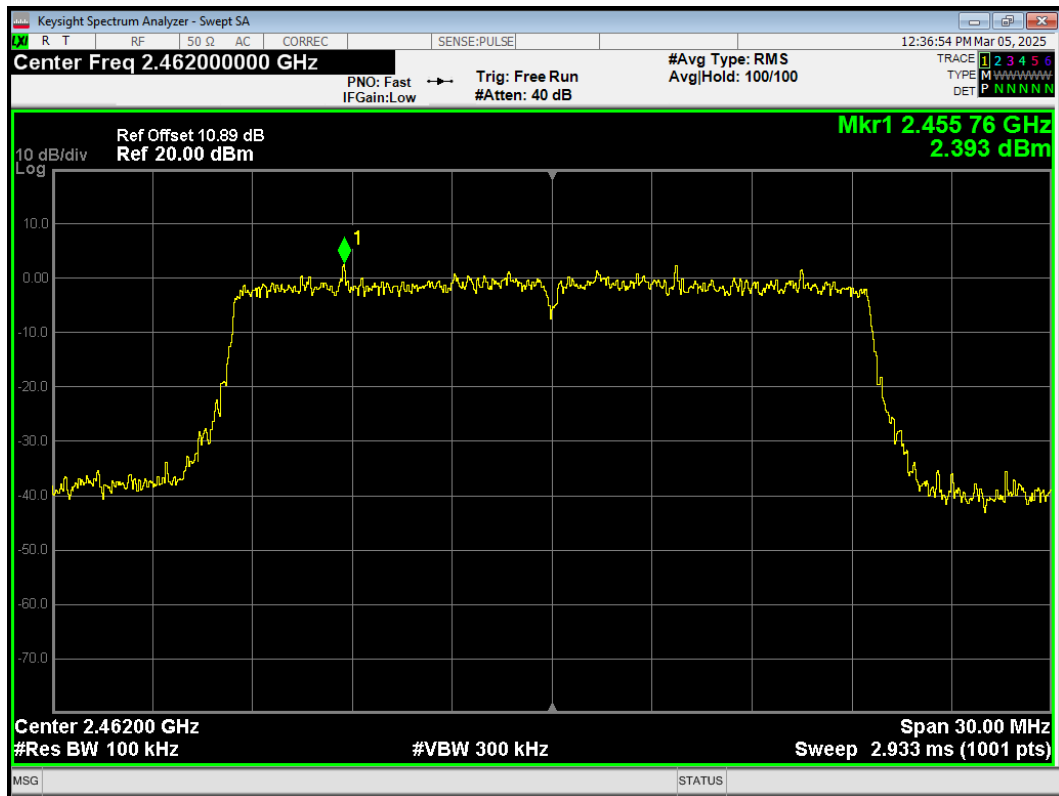


Band Edge 802.11ax(HE20) 2462MHz Emission

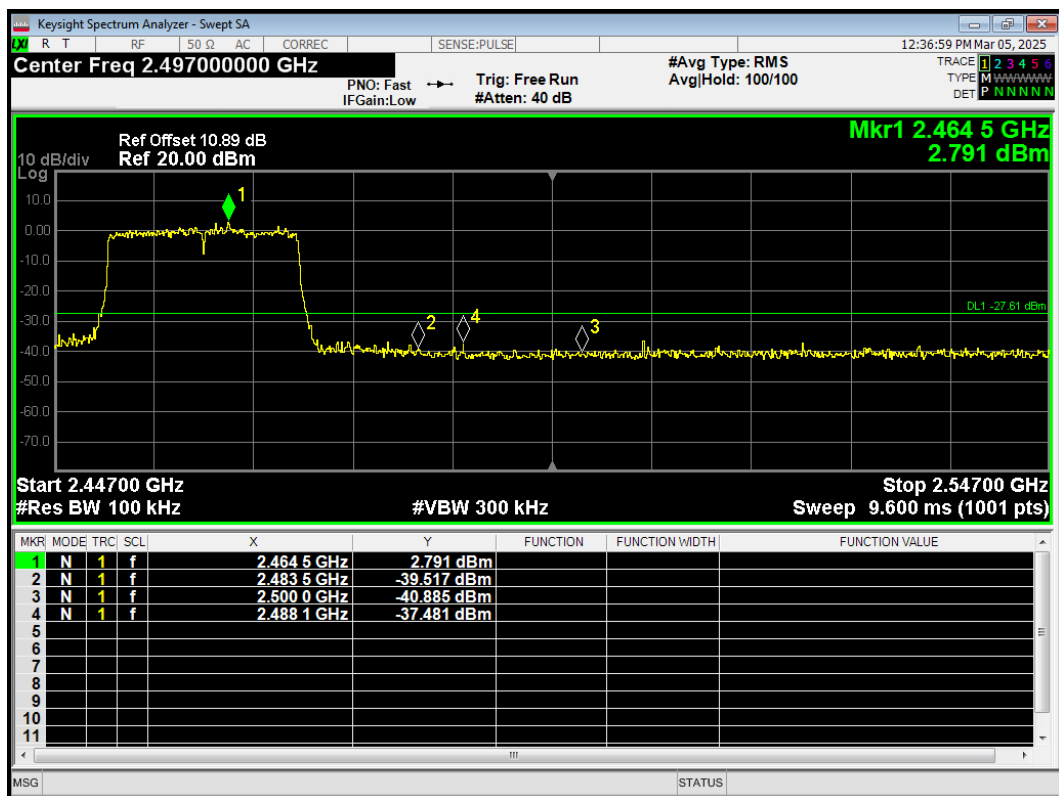

Band Edge 802.11b 2412MHz Ref

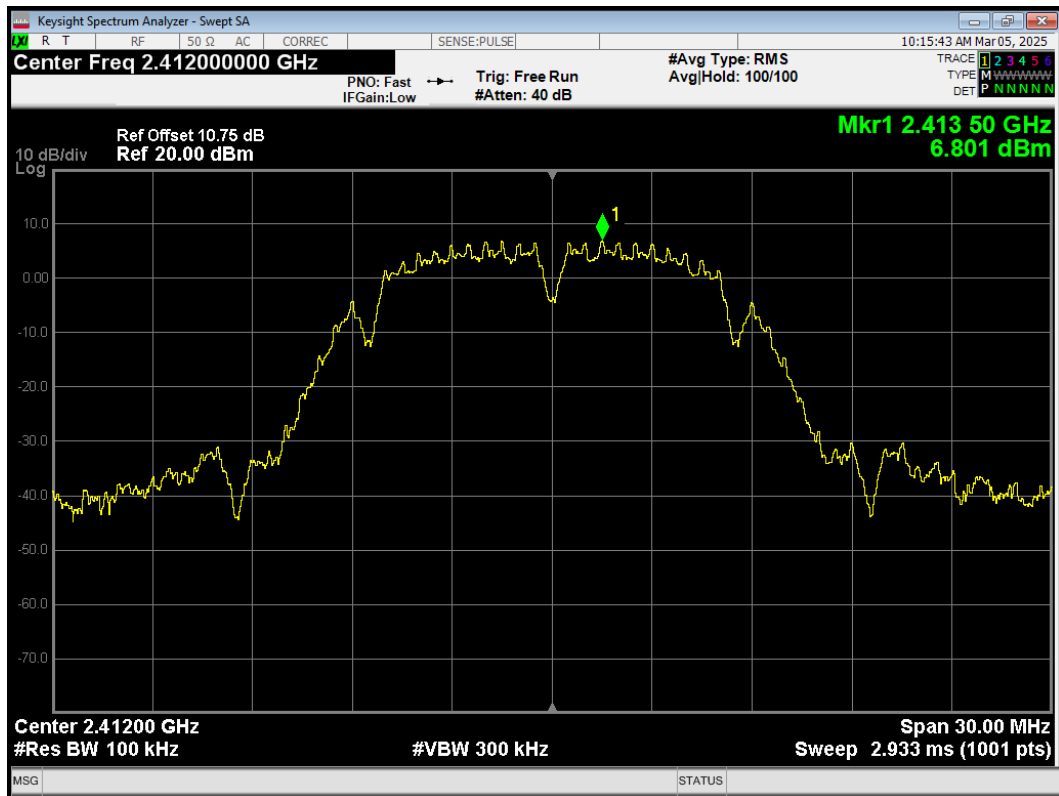


Band Edge 802.11b 2412MHz Emission

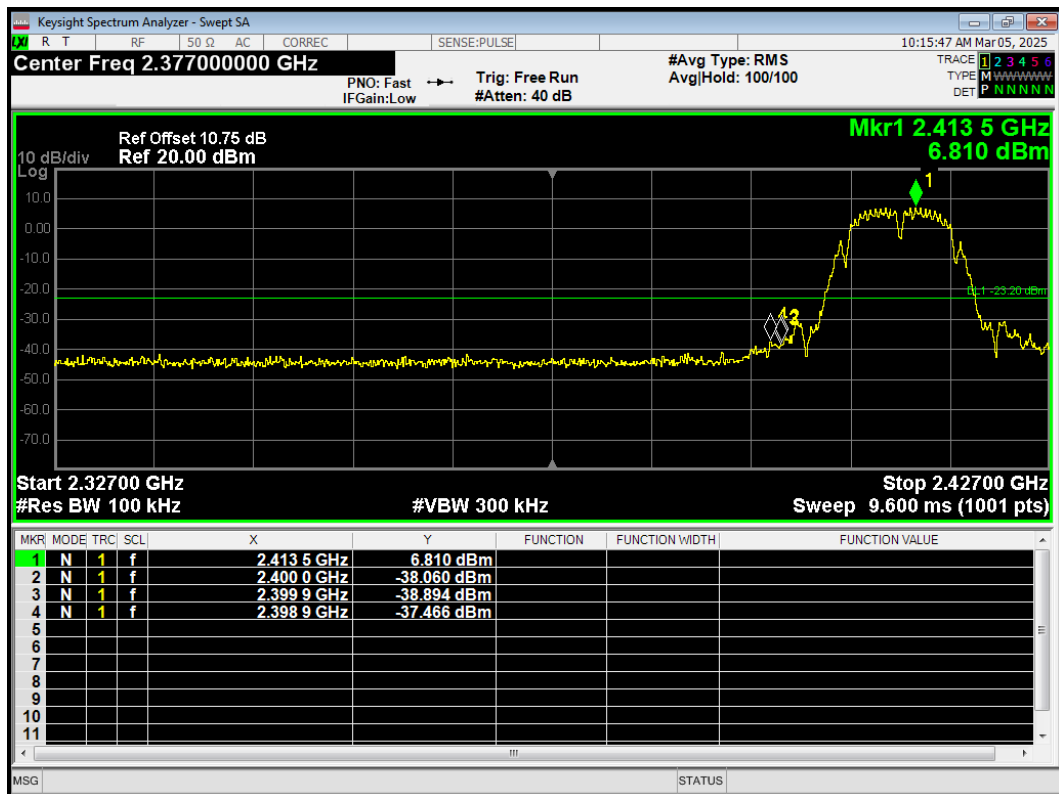


Band Edge 802.11b 2462MHz Ref




Band Edge 802.11b 2462MHz Emission

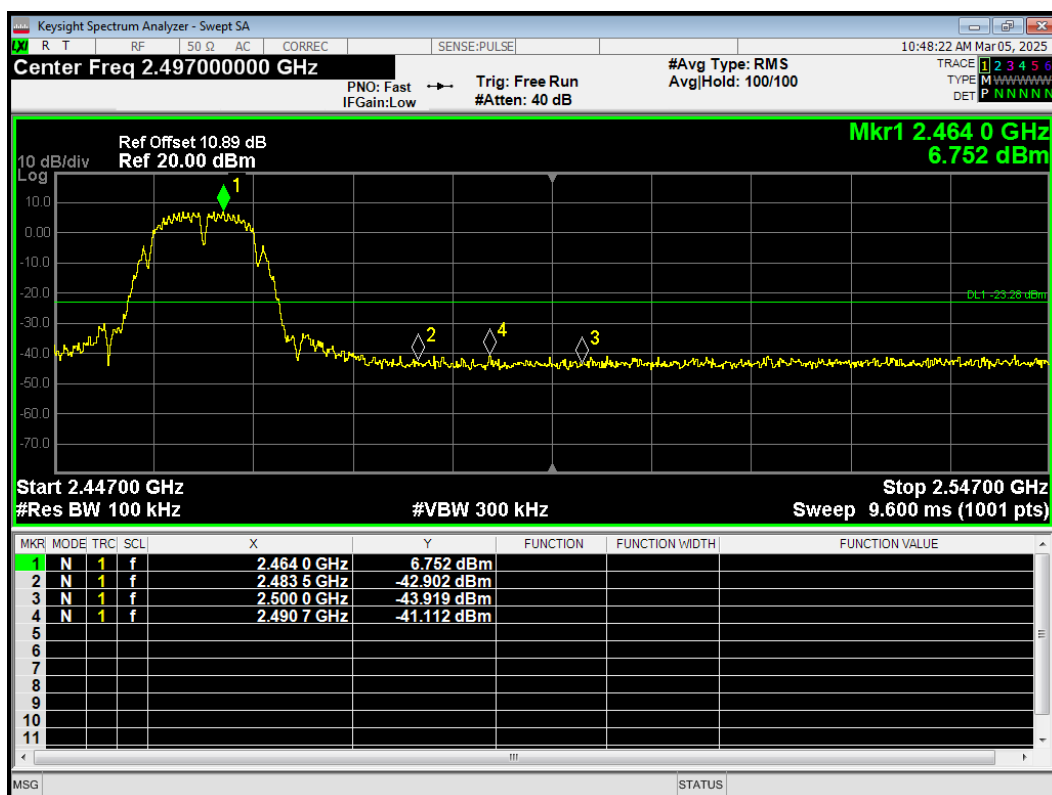


Band Edge 802.11g 2412MHz Ref

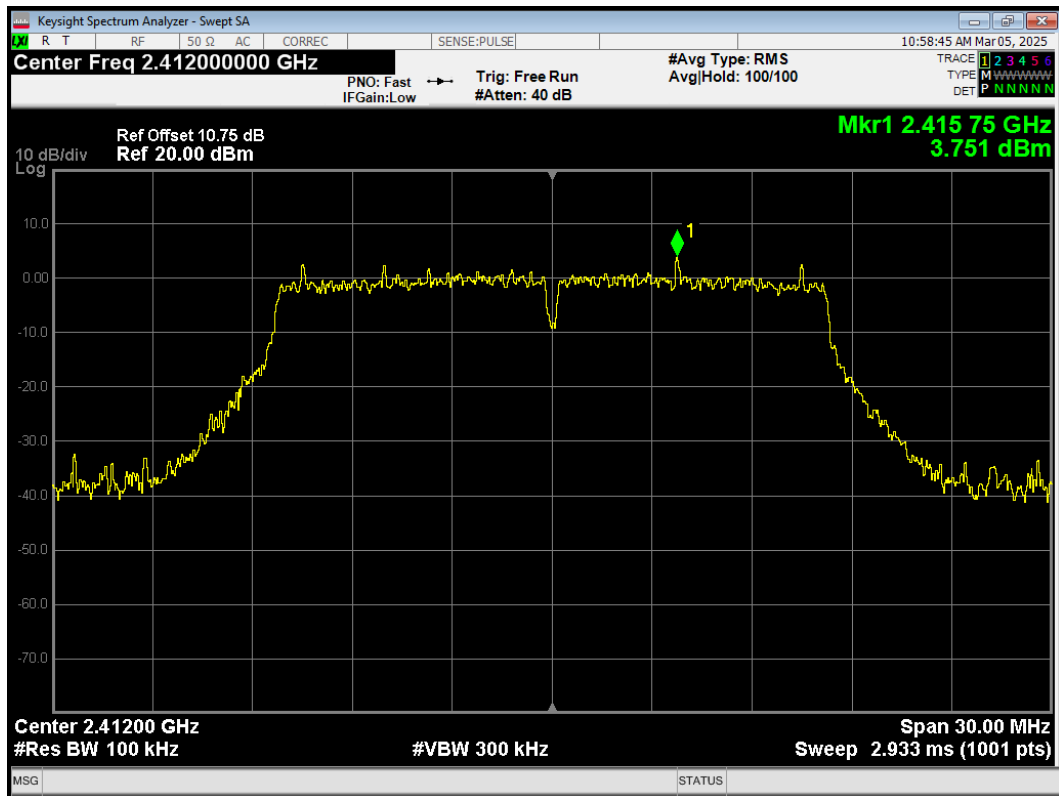


Band Edge 802.11g 2412MHz Emission

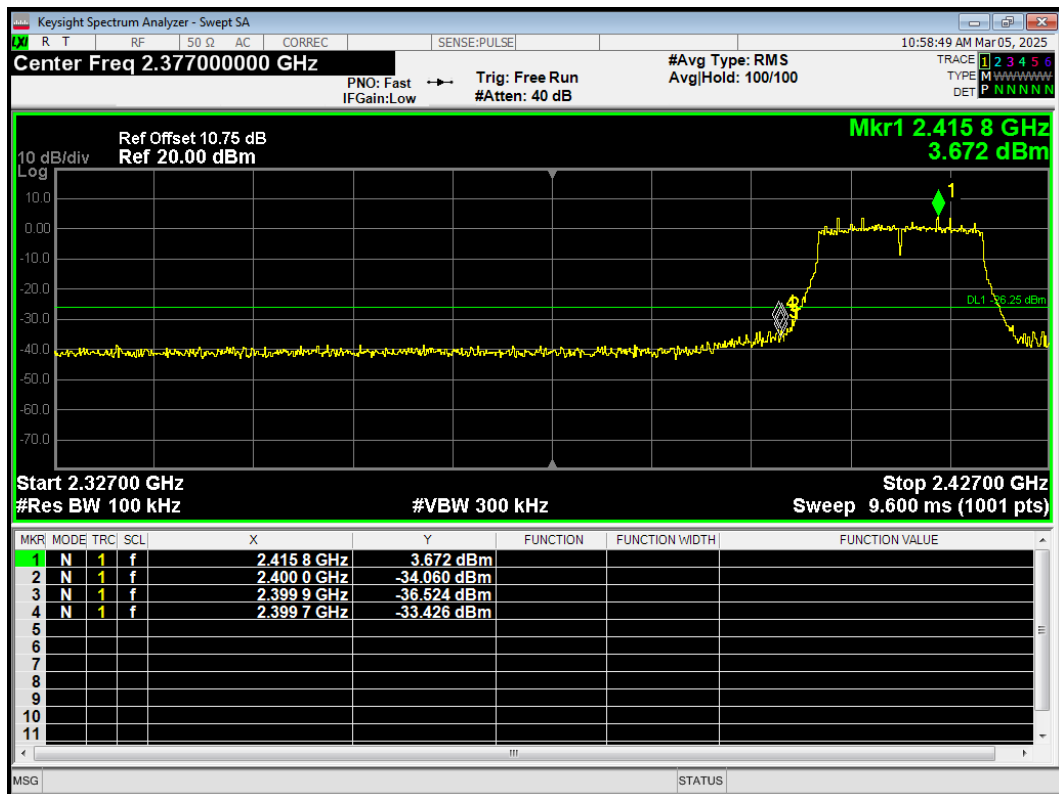


Band Edge 802.11g 2462MHz Ref

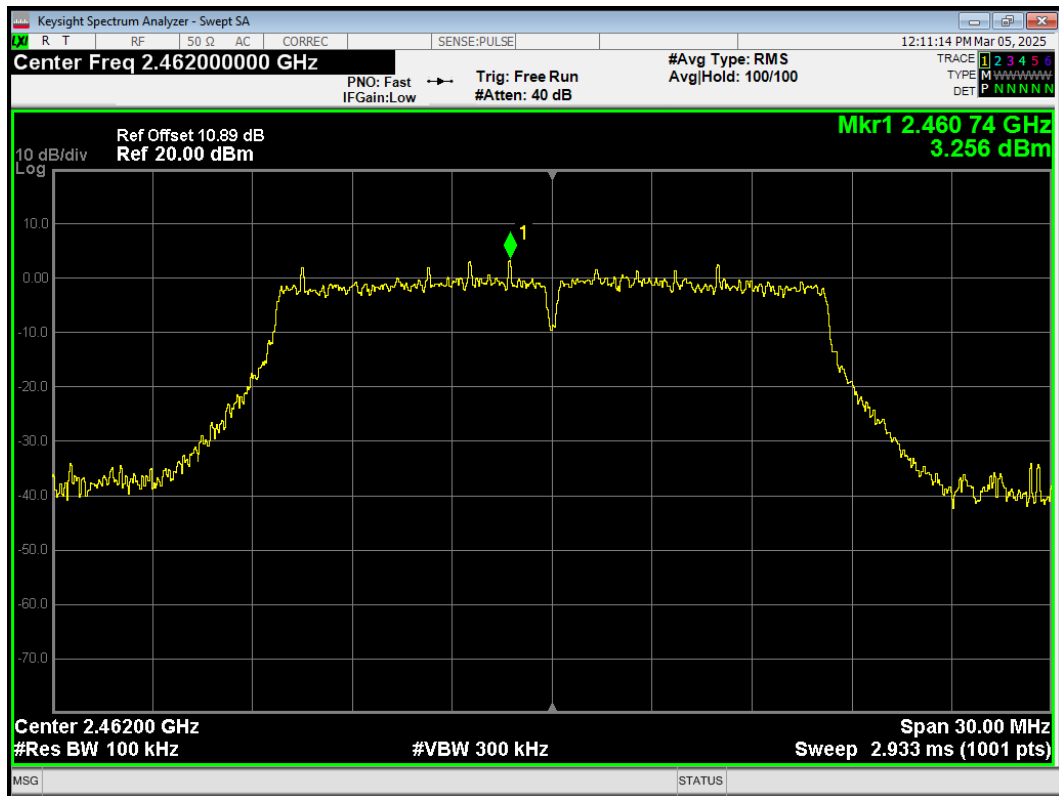


Band Edge 802.11g 2462MHz Emission

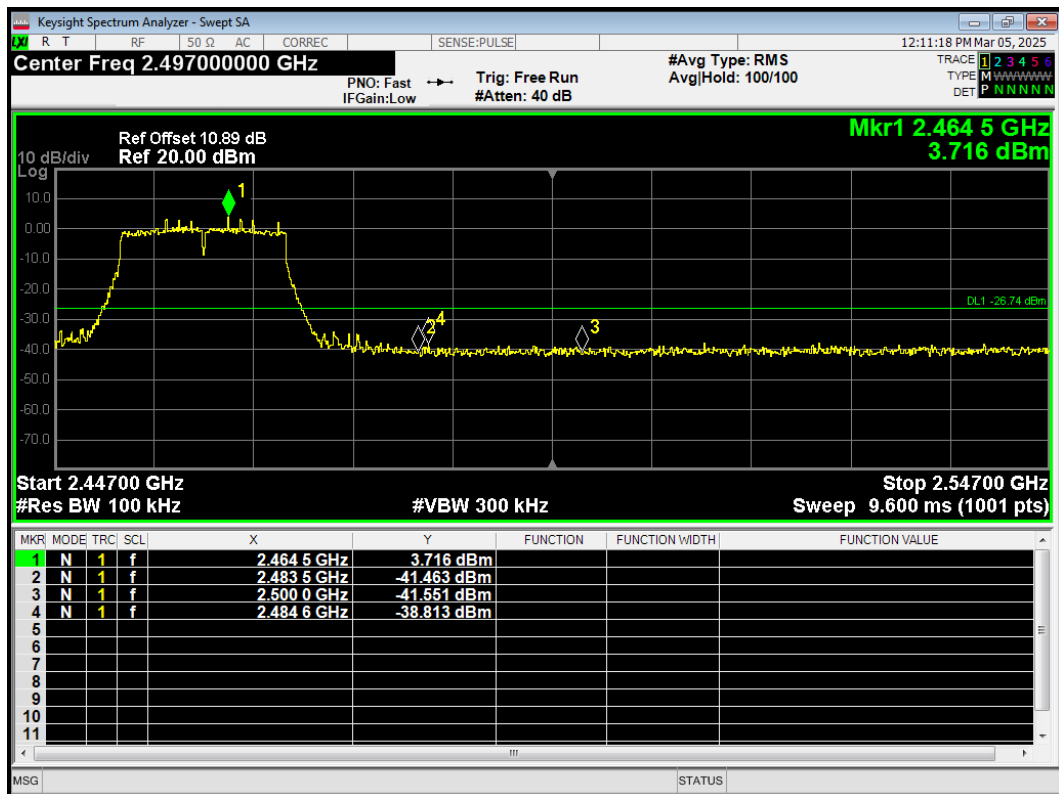


Band Edge 802.11n(HT20) 2412MHz Ref

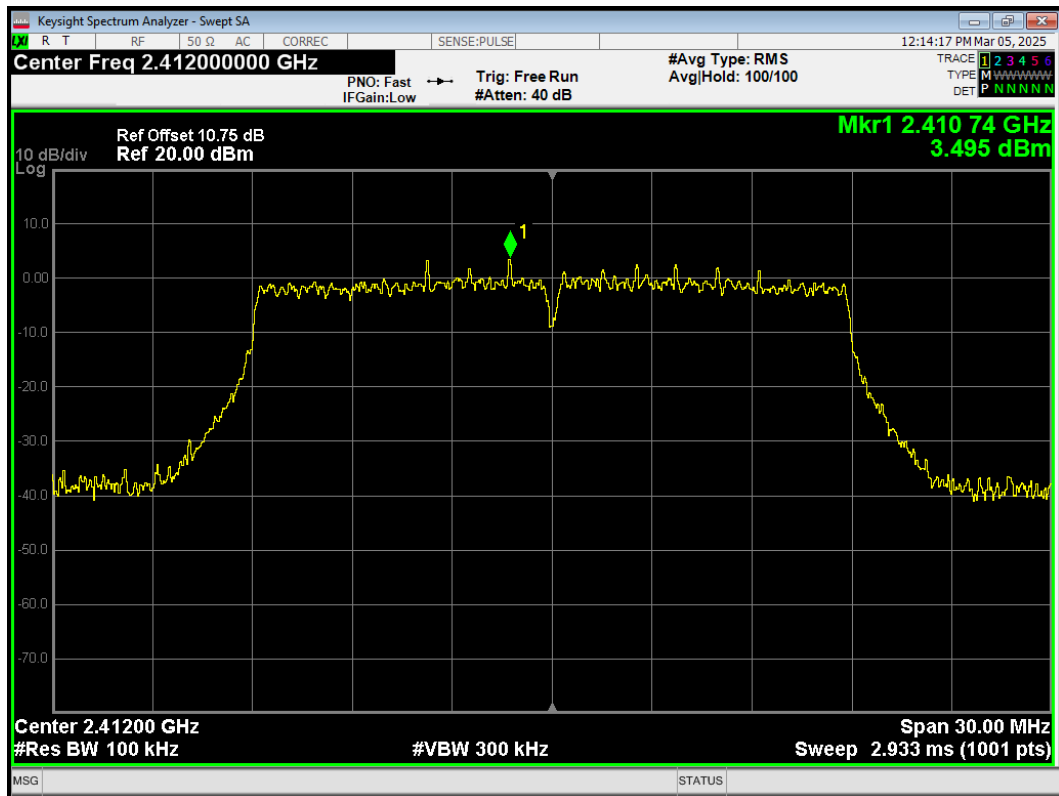


Band Edge 802.11n(HT20) 2412MHz Emission

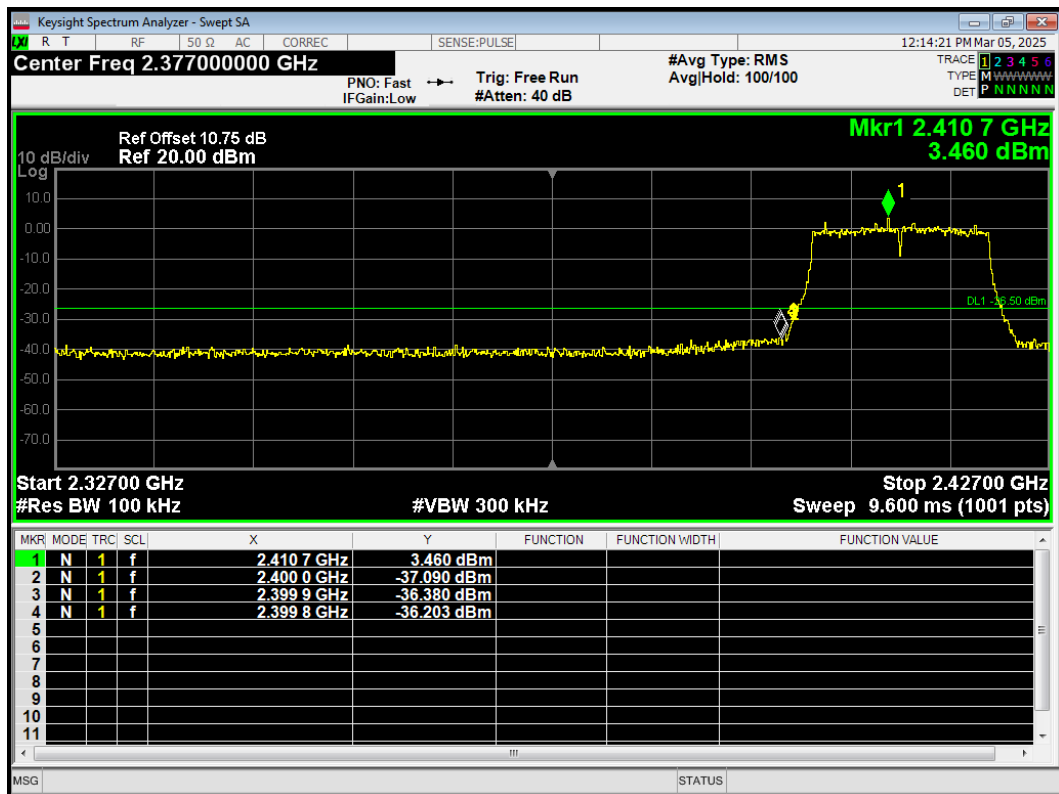


Band Edge 802.11n(HT20) 2462MHz Ref

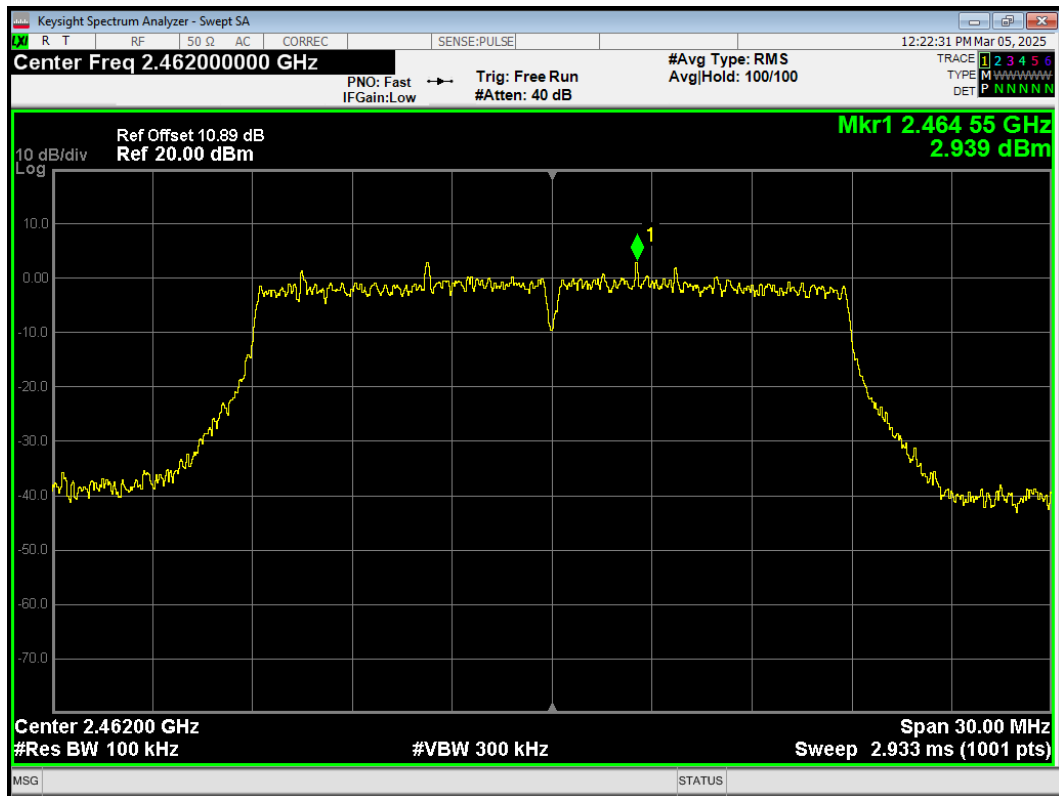


Band Edge 802.11n(HT20) 2462MHz Emission

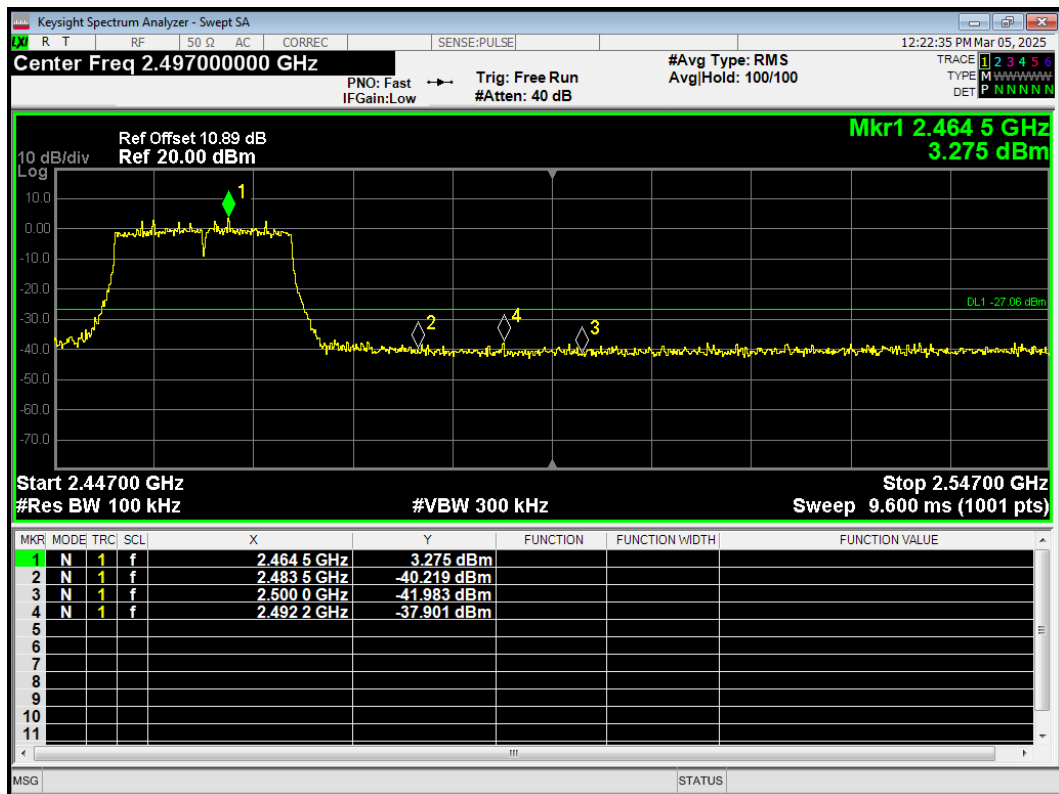


Band Edge 802.11n(HT40) 2422MHz Ref

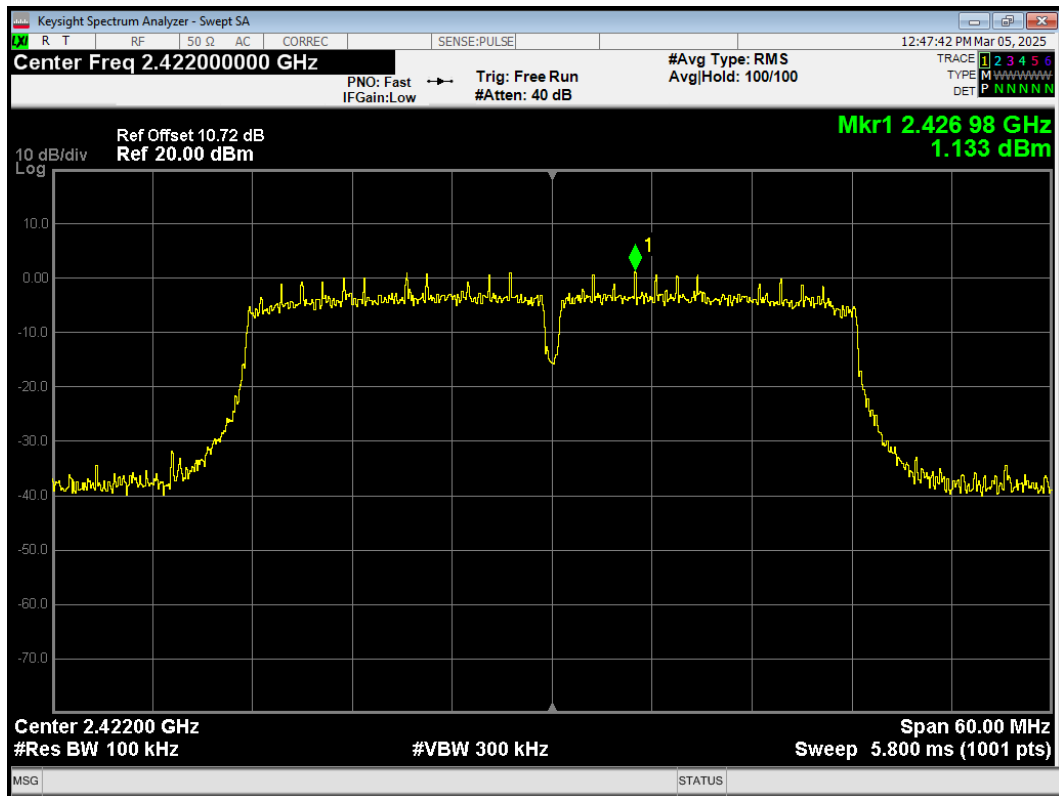


Band Edge 802.11n(HT40) 2422MHz Emission

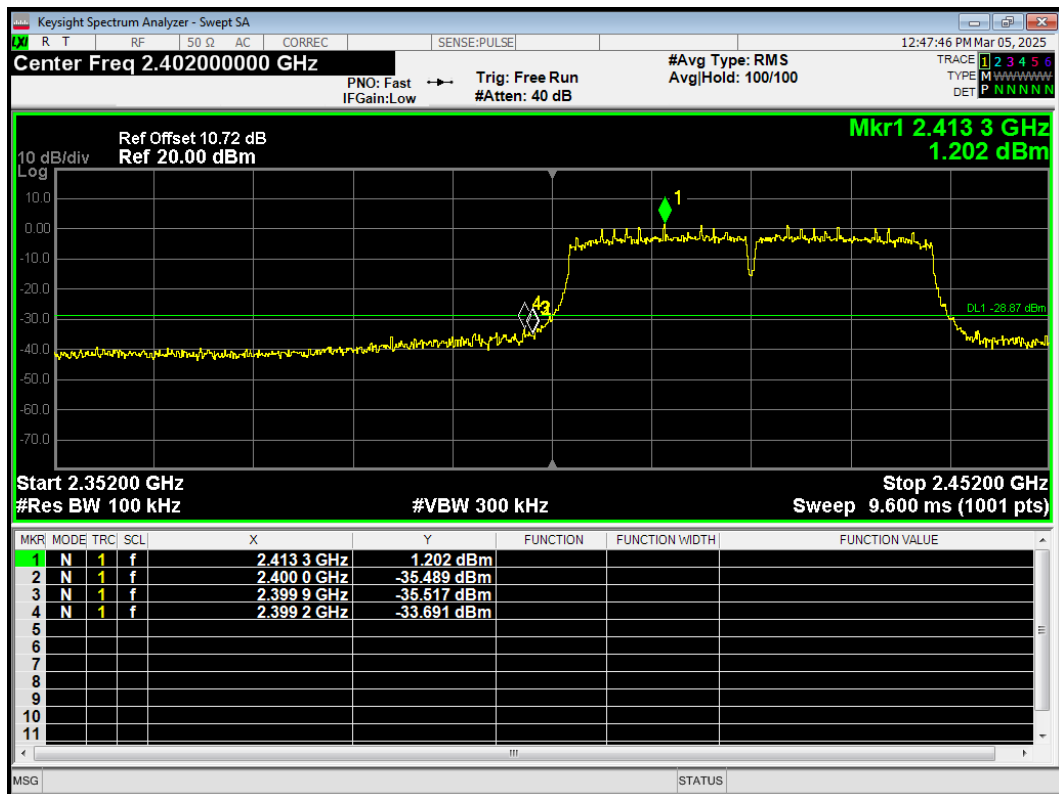


Band Edge 802.11n(HT40) 2452MHz Ref

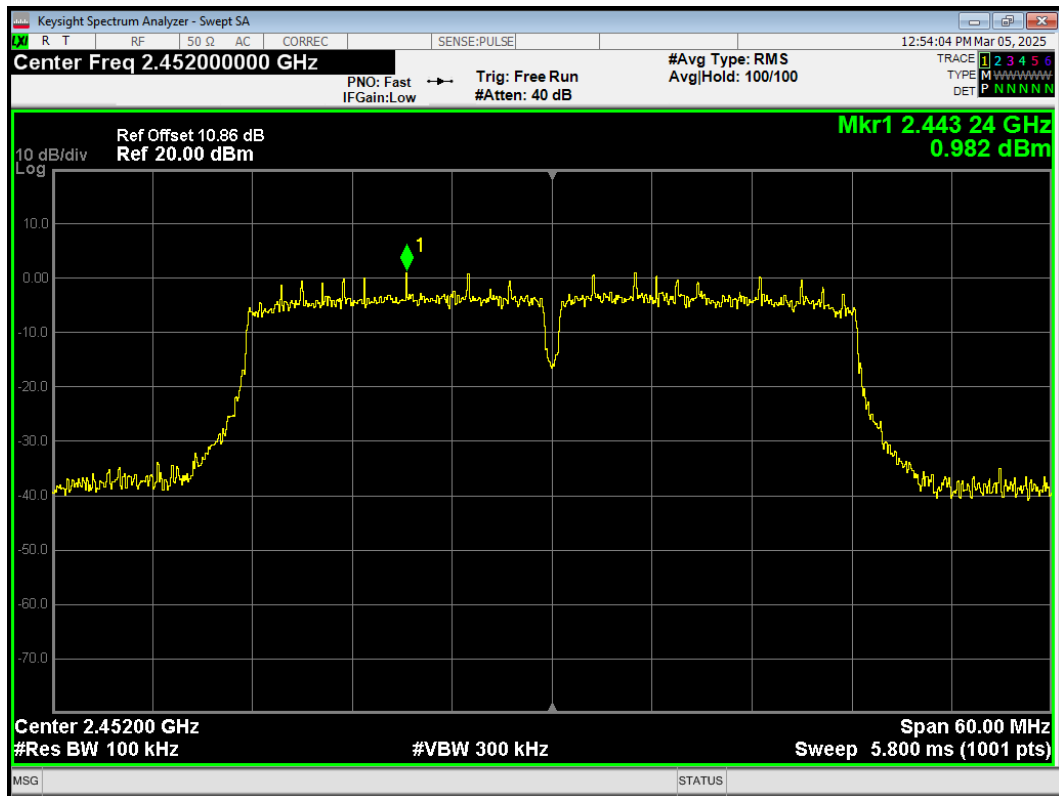


Band Edge 802.11n(HT40) 2452MHz Emission

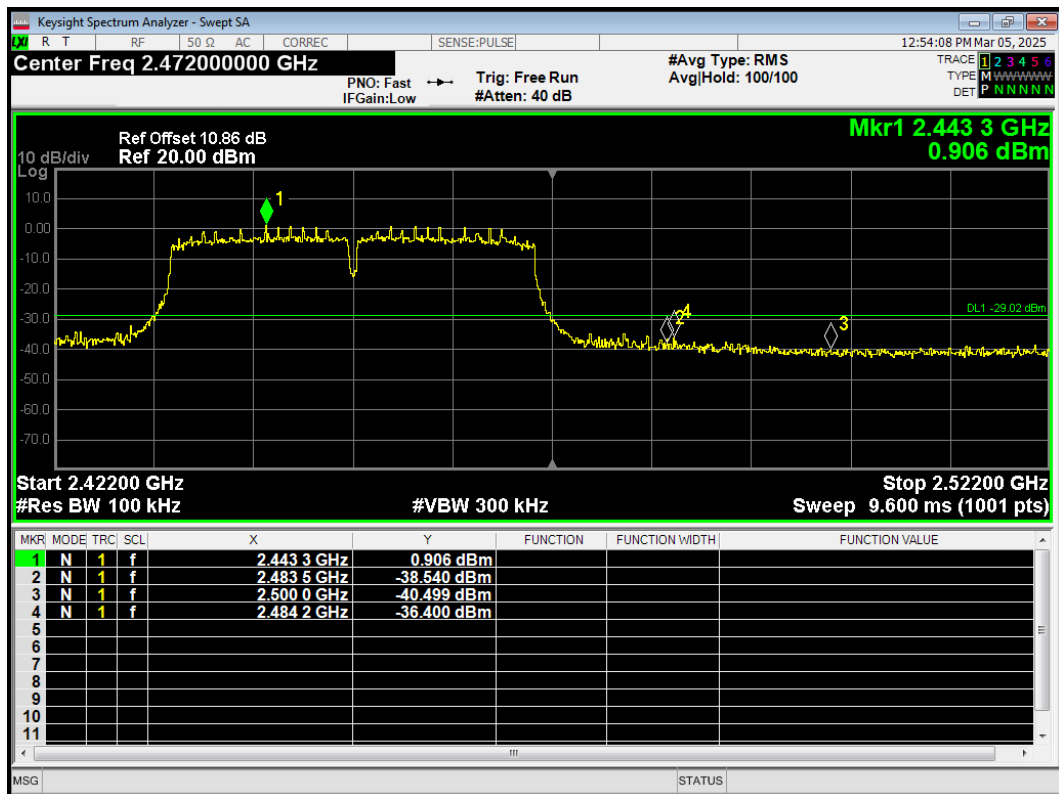


Band Edge BLE (1M) 2402MHz Ref

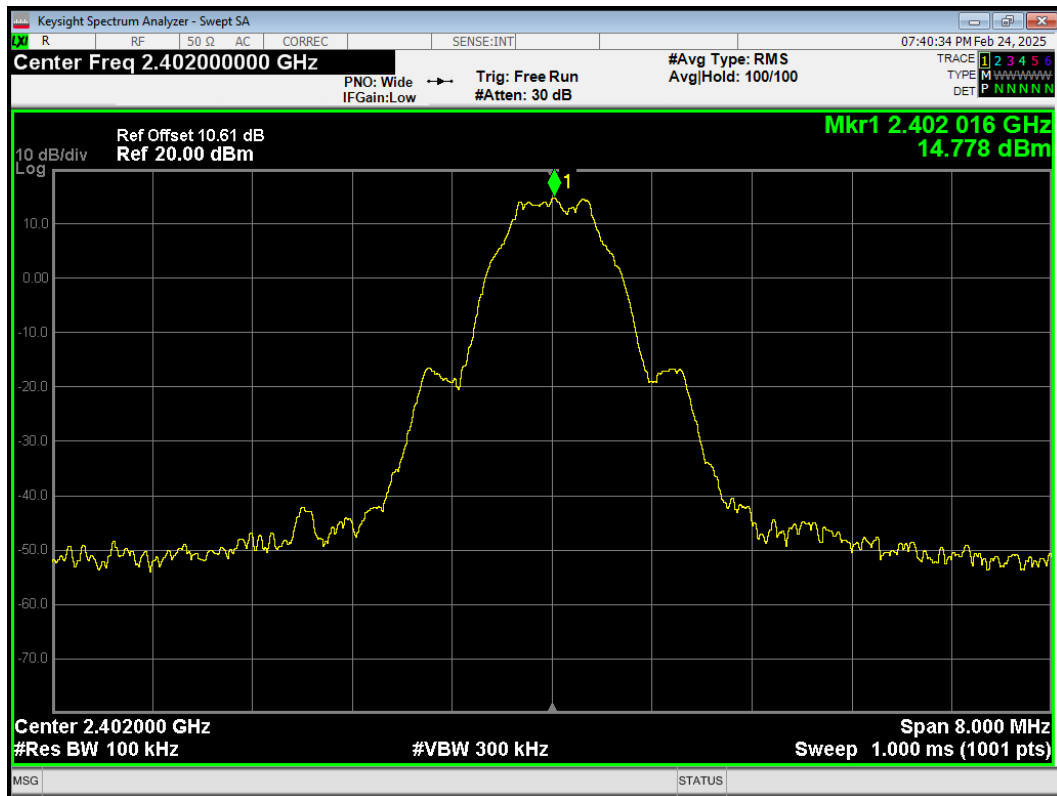


Band Edge BLE (1M) 2402MHz Emission

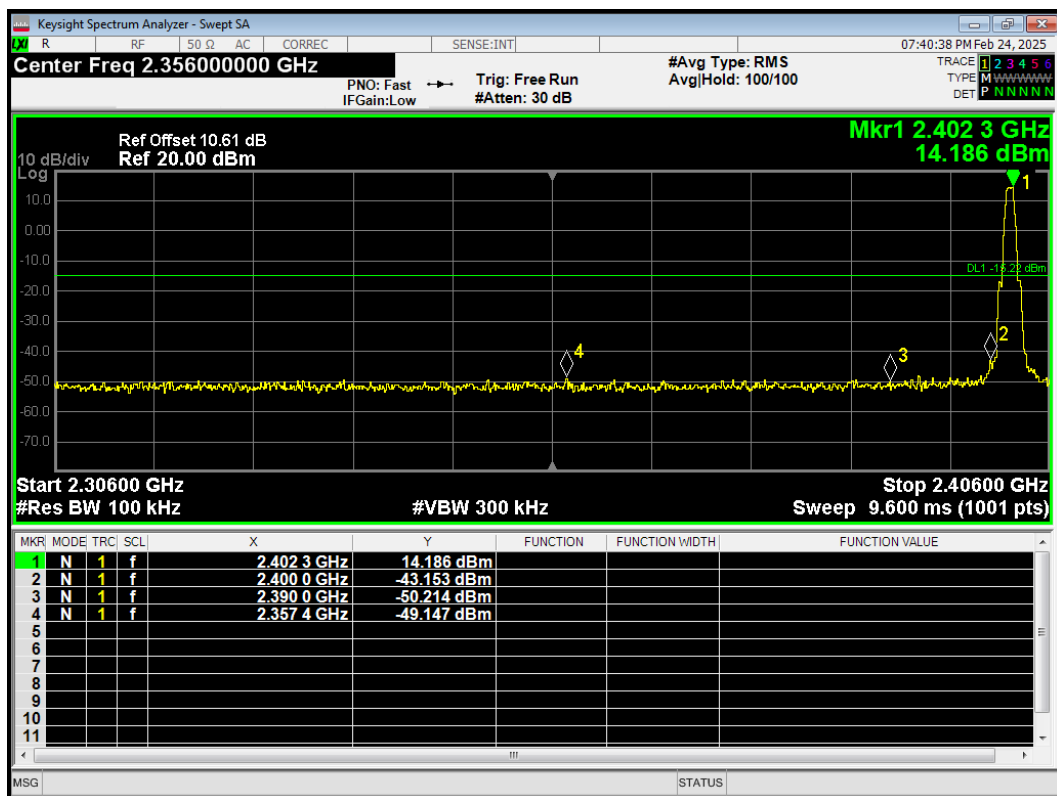


Band Edge BLE (1M) 2480MHz Ref

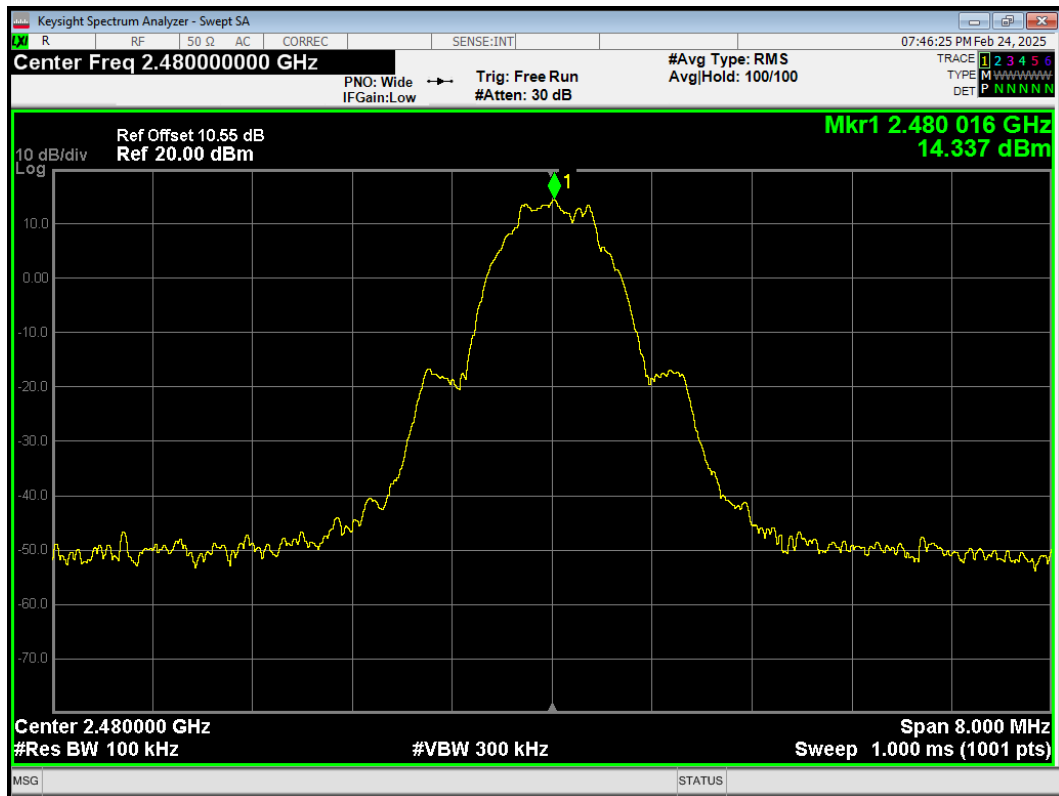


Band Edge BLE (1M) 2480MHz Emission

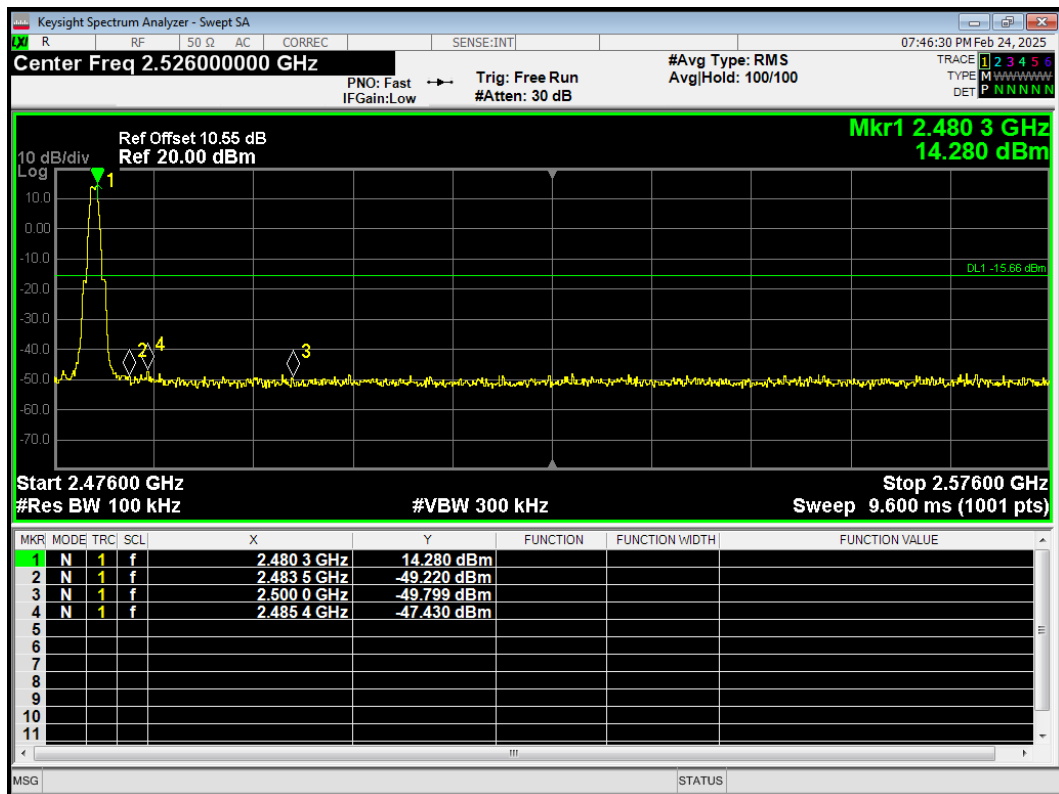

Band Edge BLE (2M) 2402MHz Ref

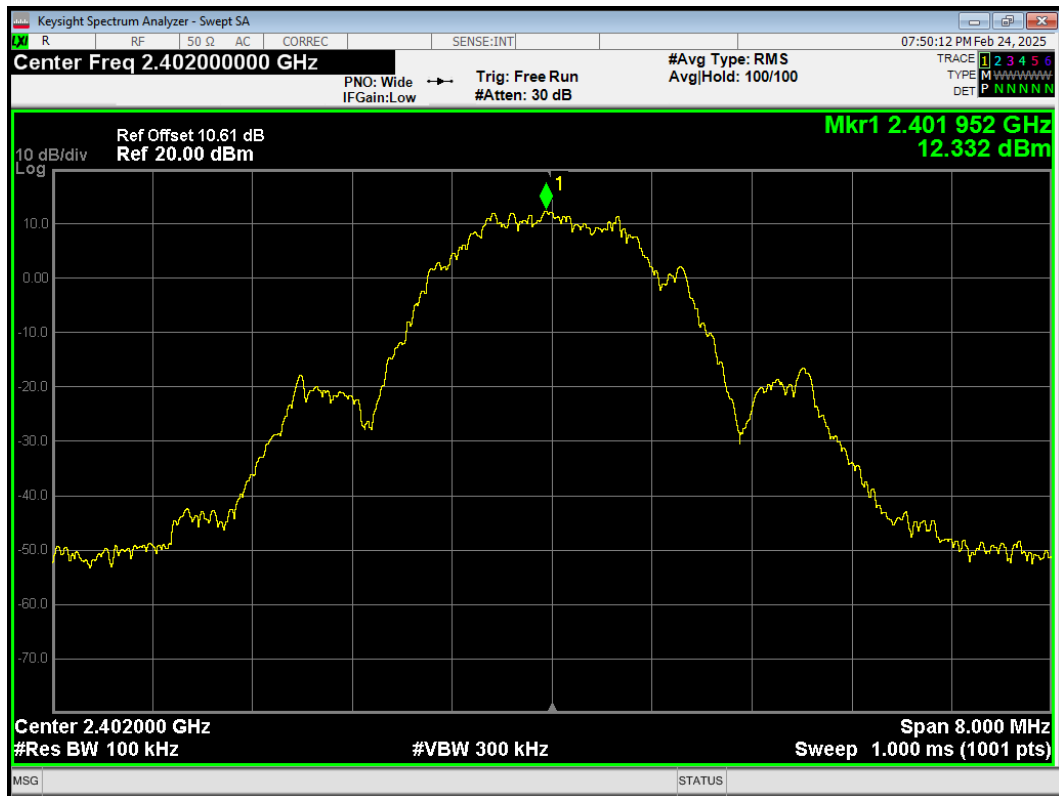


Band Edge BLE (2M) 2402MHz Emission

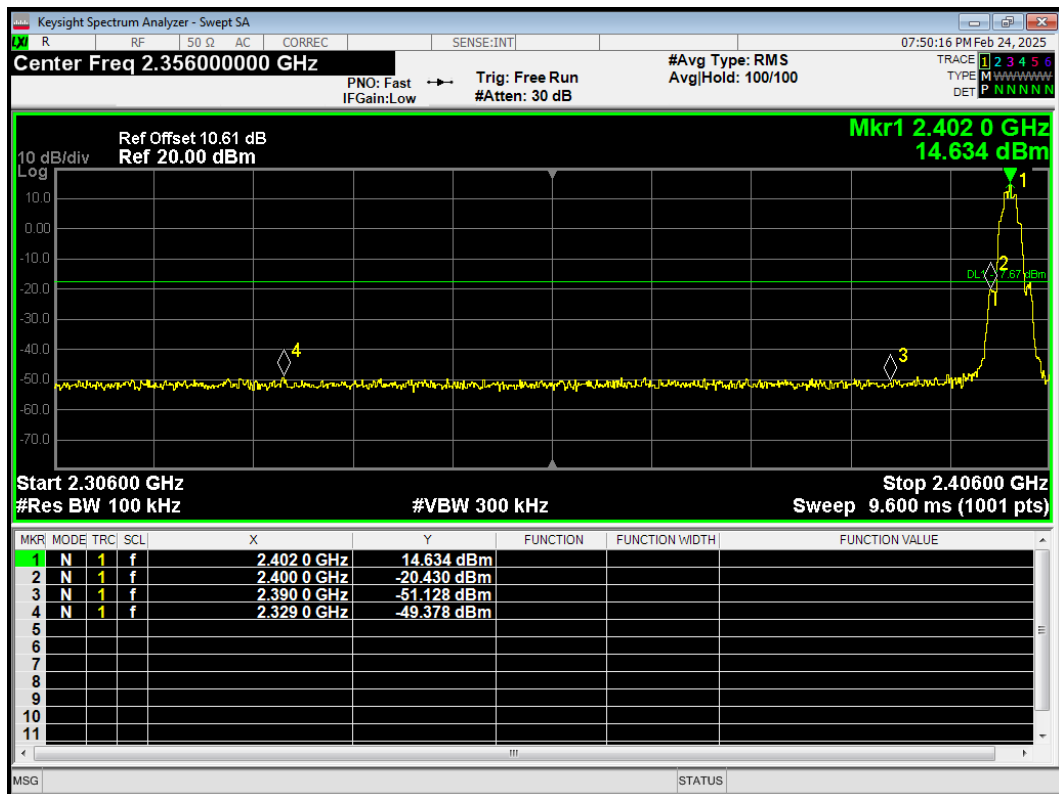

Band Edge BLE (2M) 2480MHz Ref




Band Edge BLE (2M) 2480MHz Emission

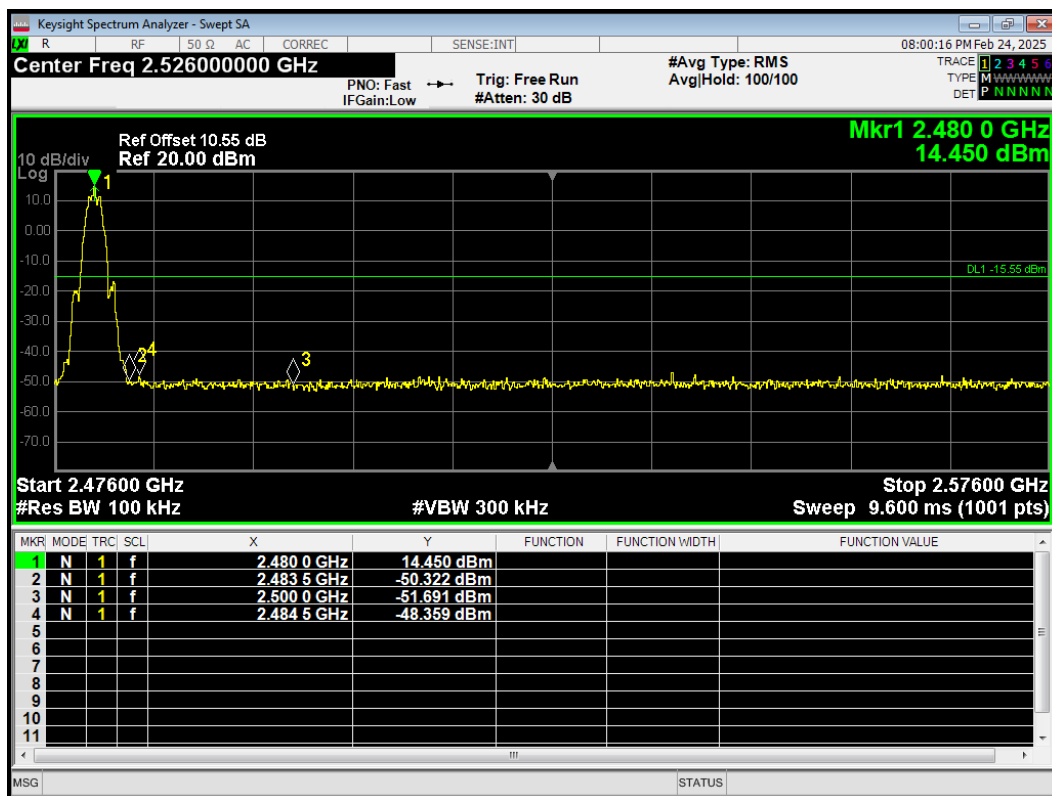


RU Mode


Band Edge 802.11ax(HE20) 106T 2412MHz Ref

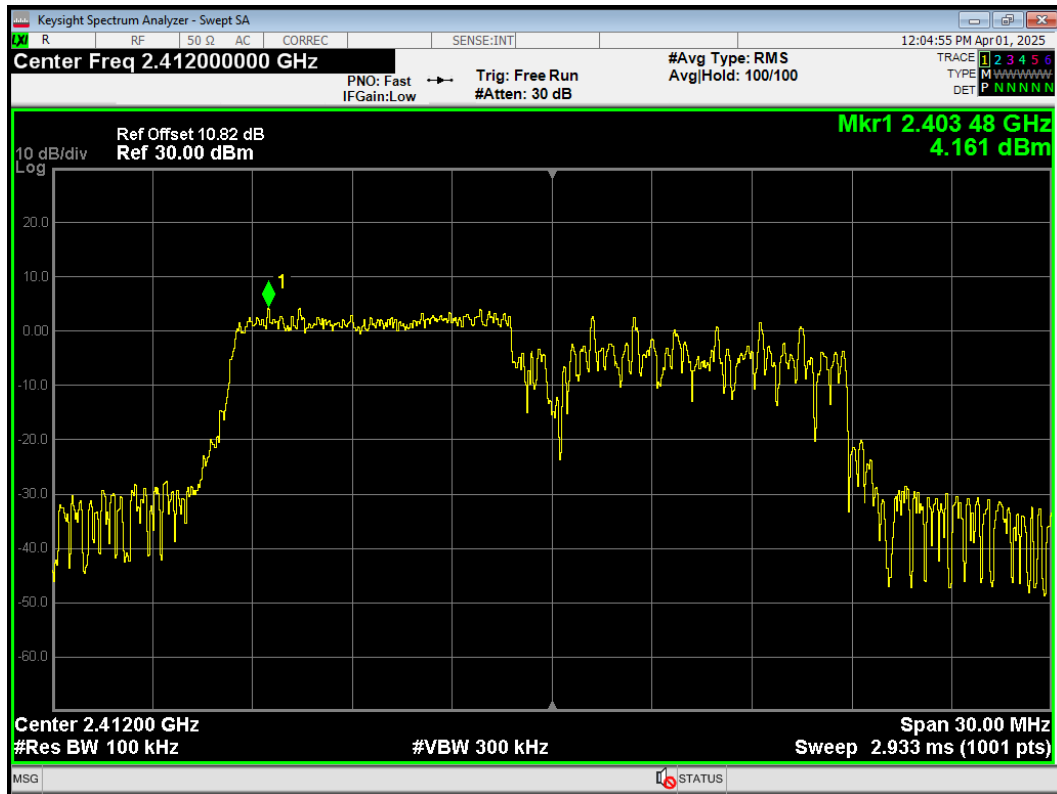


Band Edge 802.11ax(HE20) 106T 2412MHz Emission

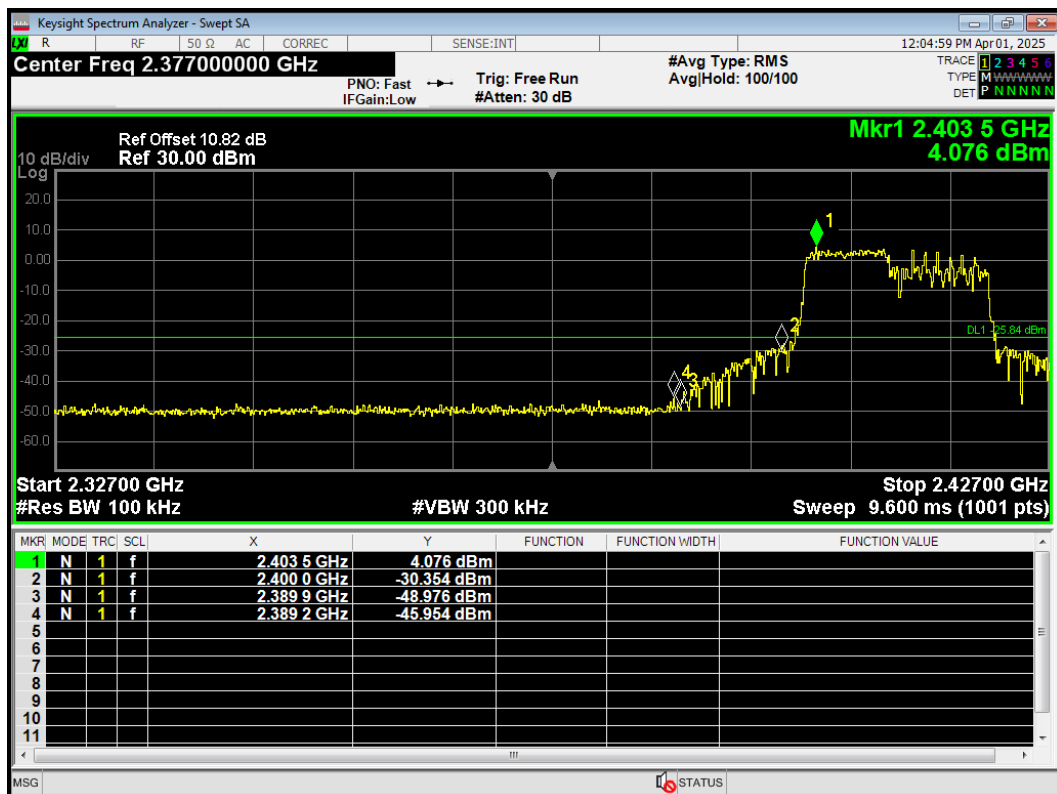


Band Edge 802.11ax(HE20) 106T 2462MHz Ref

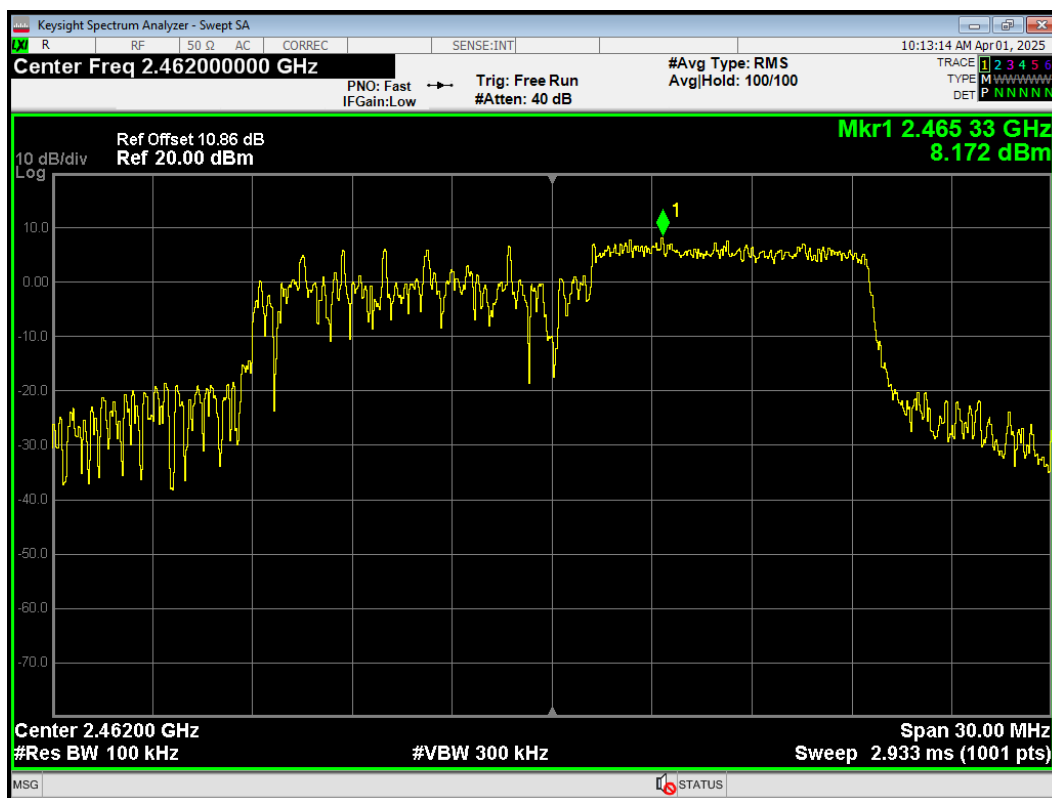


Band Edge 802.11ax(HE20) 106T 2462MHz Emission

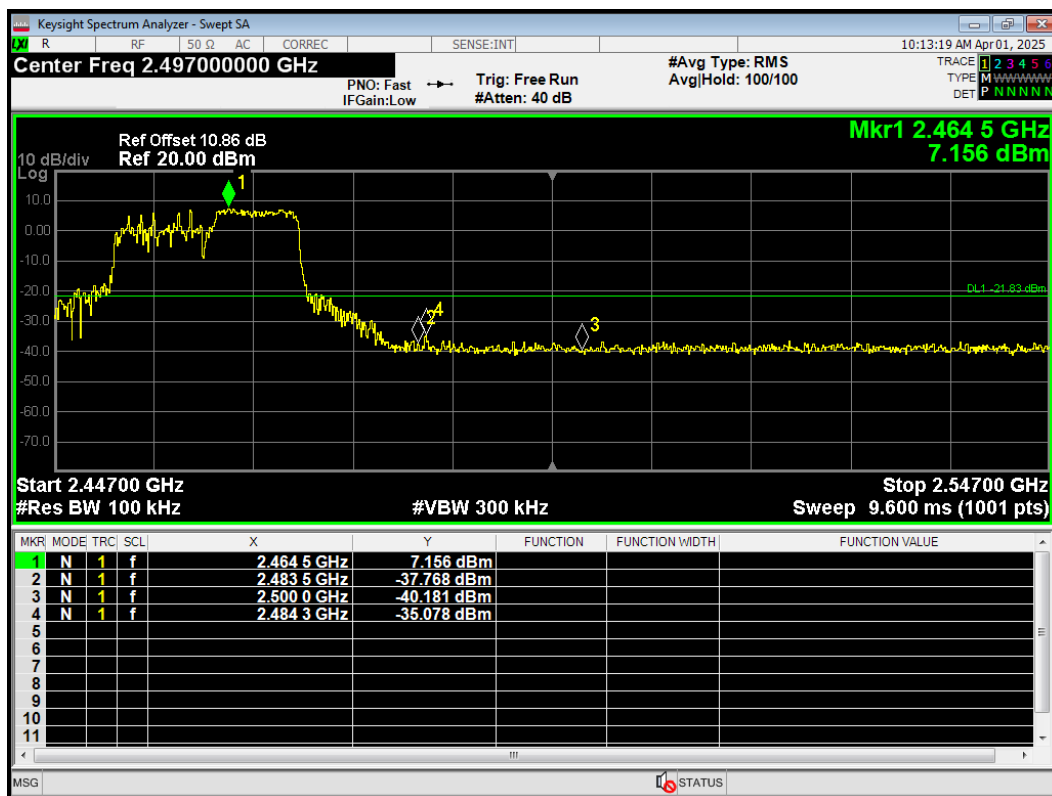


Band Edge 802.11ax(HE20) 242T 2412MHz Ref

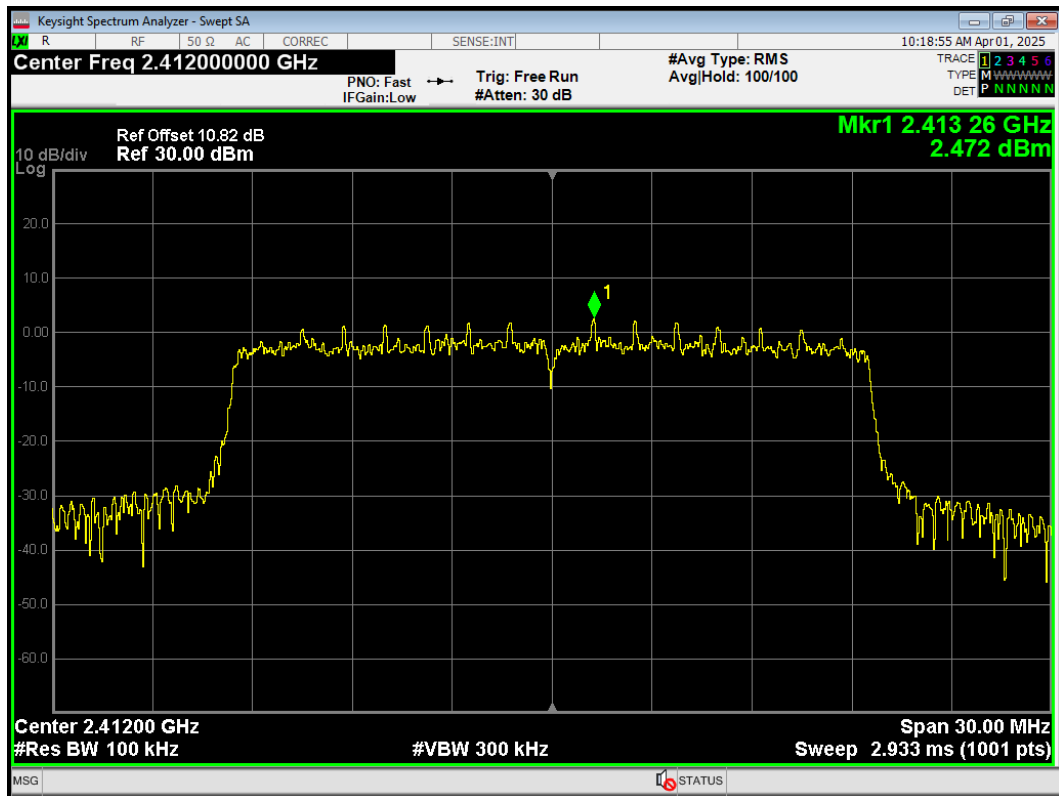


Band Edge 802.11ax(HE20) 242T 2412MHz Emission

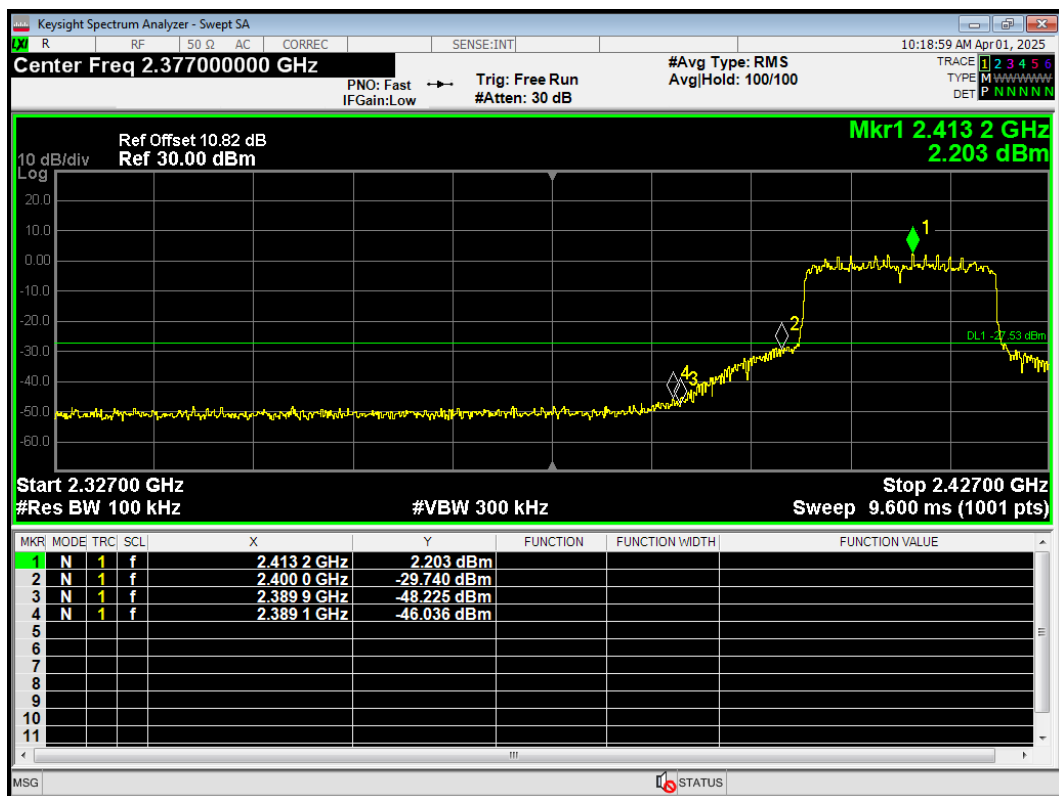


Band Edge 802.11ax(HE20) 242T 2462MHz Ref

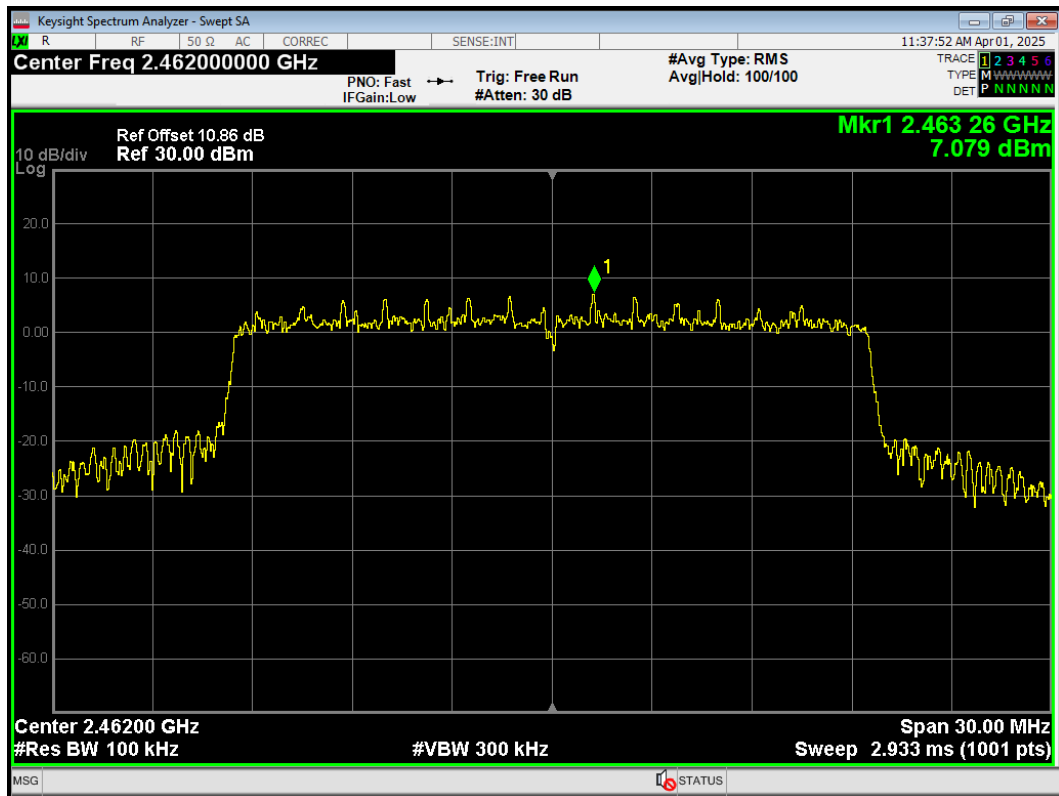


Band Edge 802.11ax(HE20) 242T 2462MHz Emission

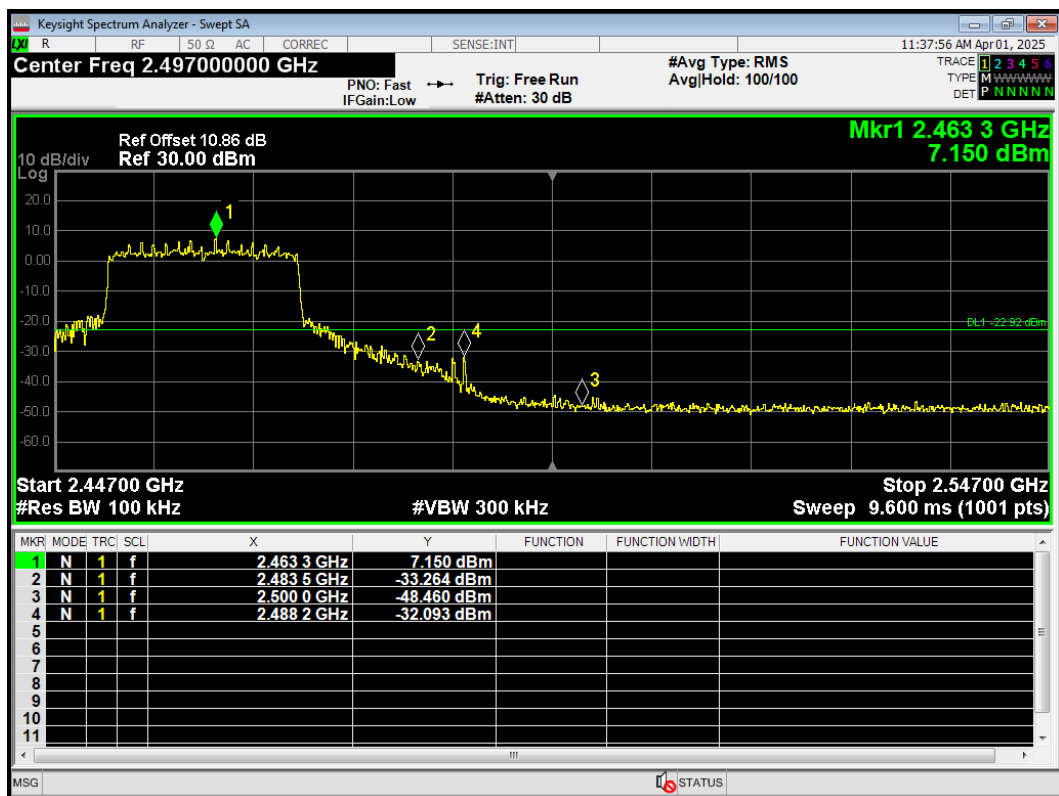


Band Edge 802.11ax(HE20) 26T 2412MHz Ref

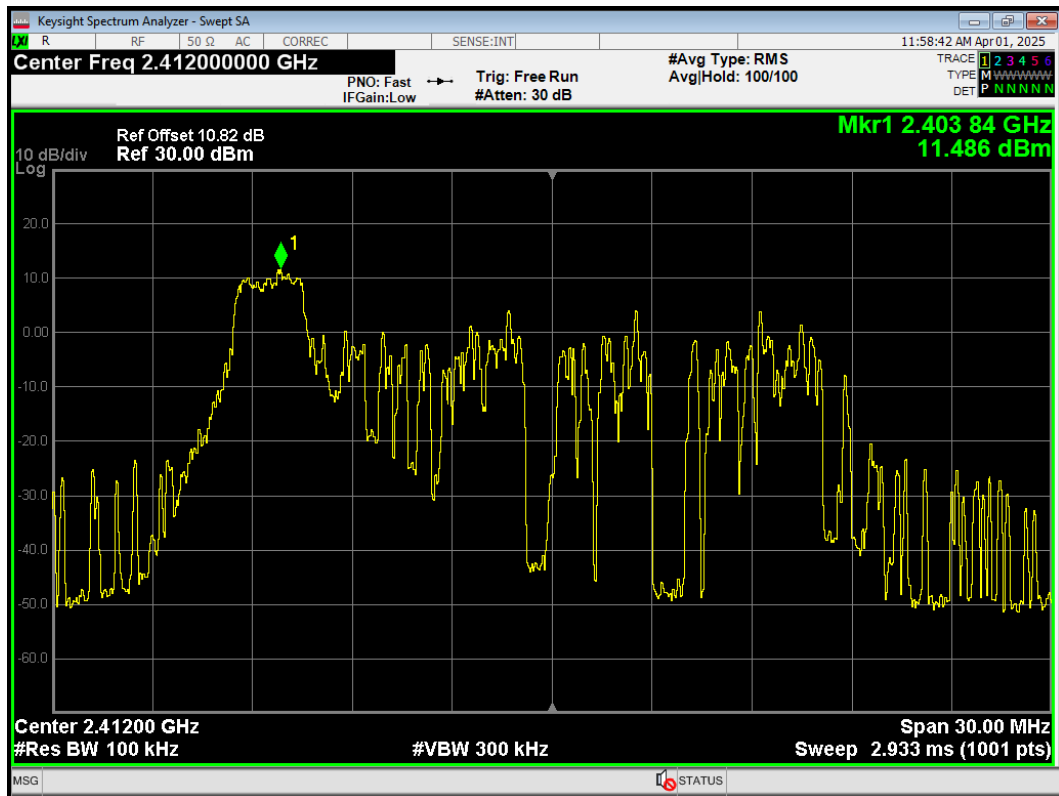


Band Edge 802.11ax(HE20) 26T 2412MHz Emission

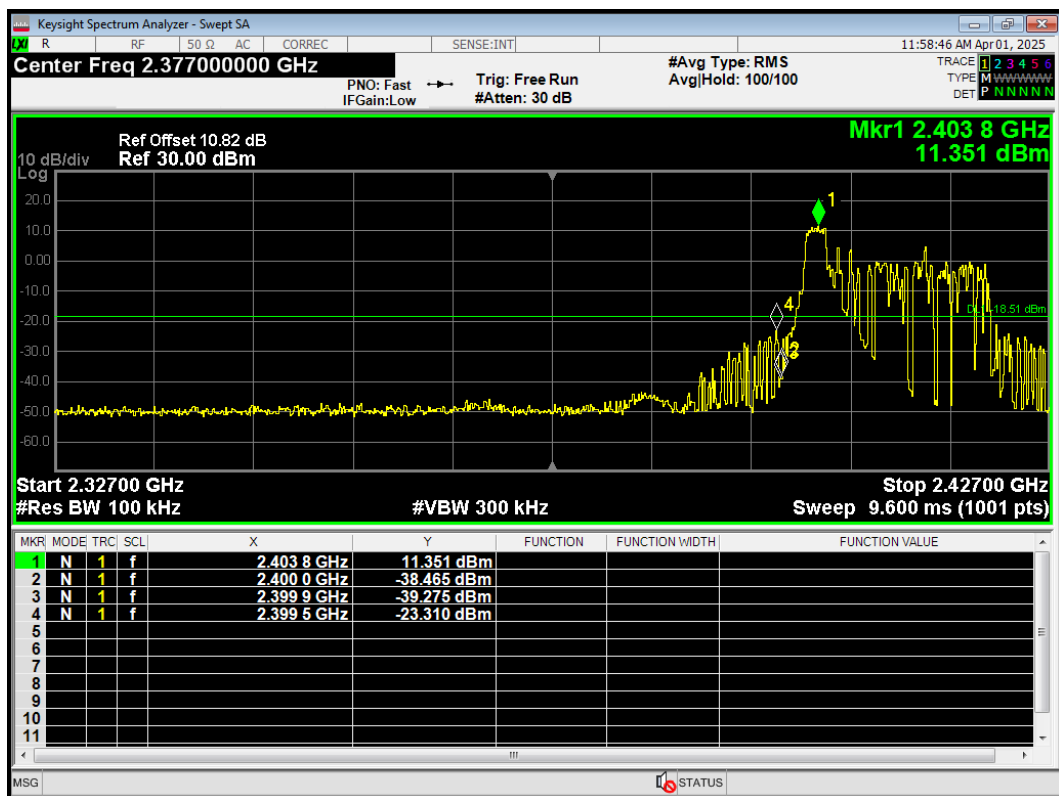


Band Edge 802.11ax(HE20) 26T 2462MHz Ref

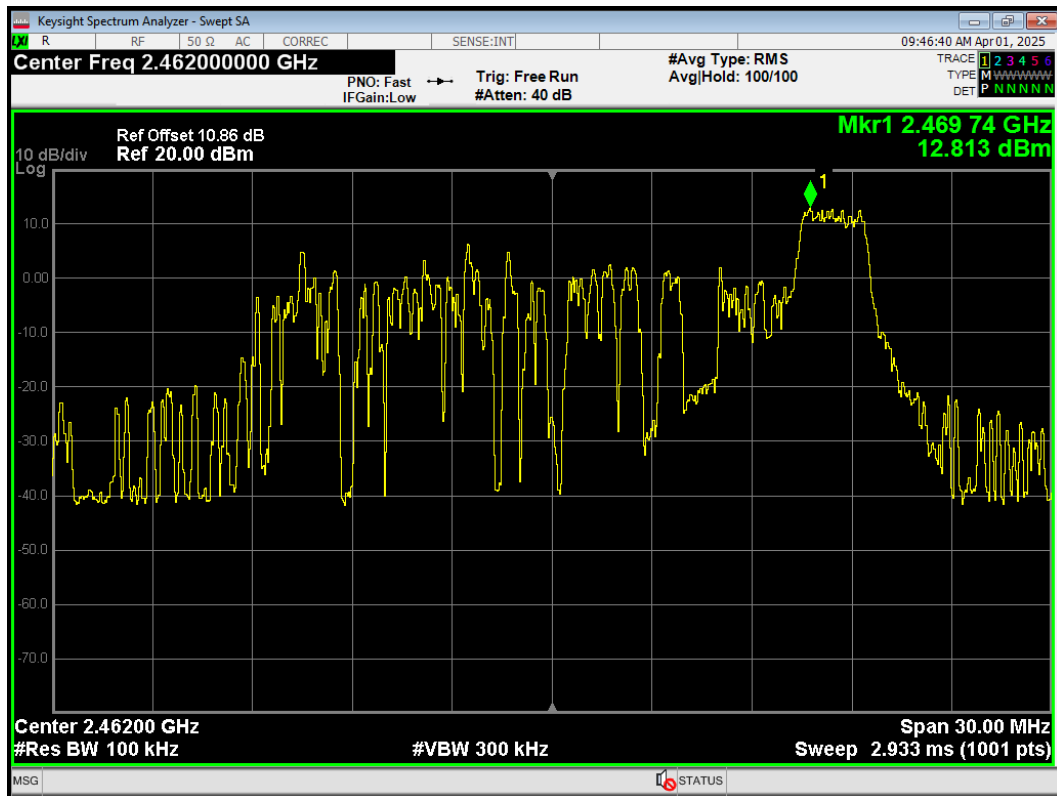


Band Edge 802.11ax(HE20) 26T 2462MHz Emission

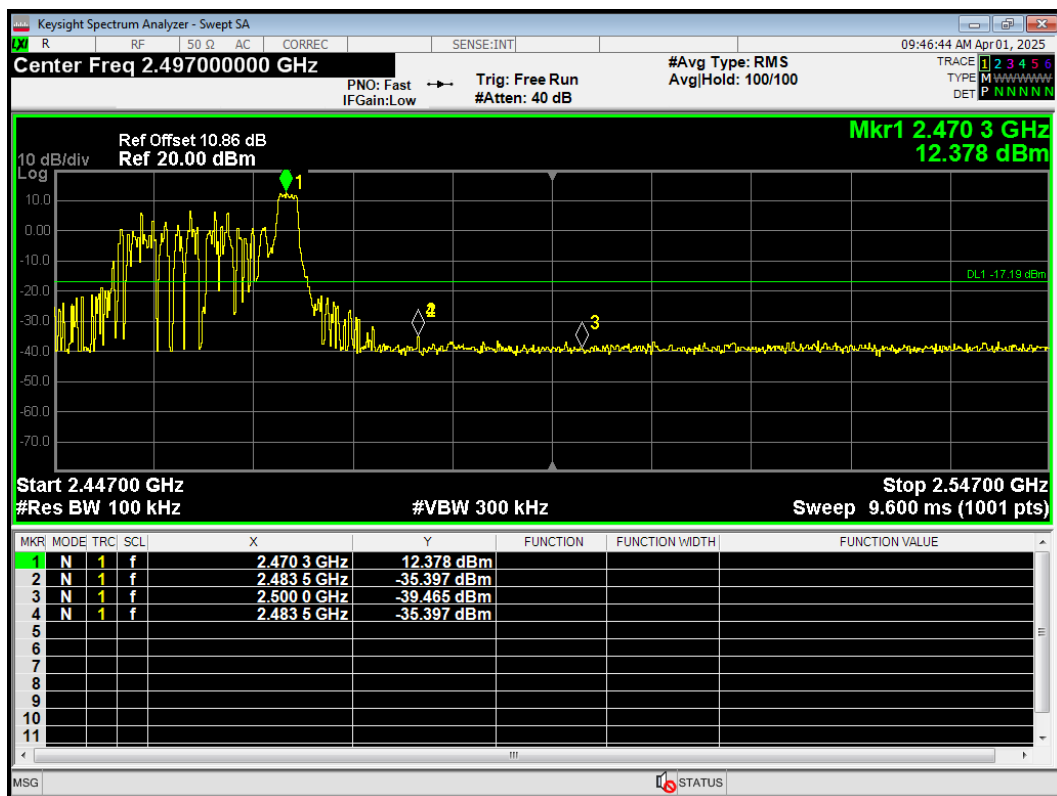


Band Edge 802.11ax(HE20) 52T 2412MHz Ref

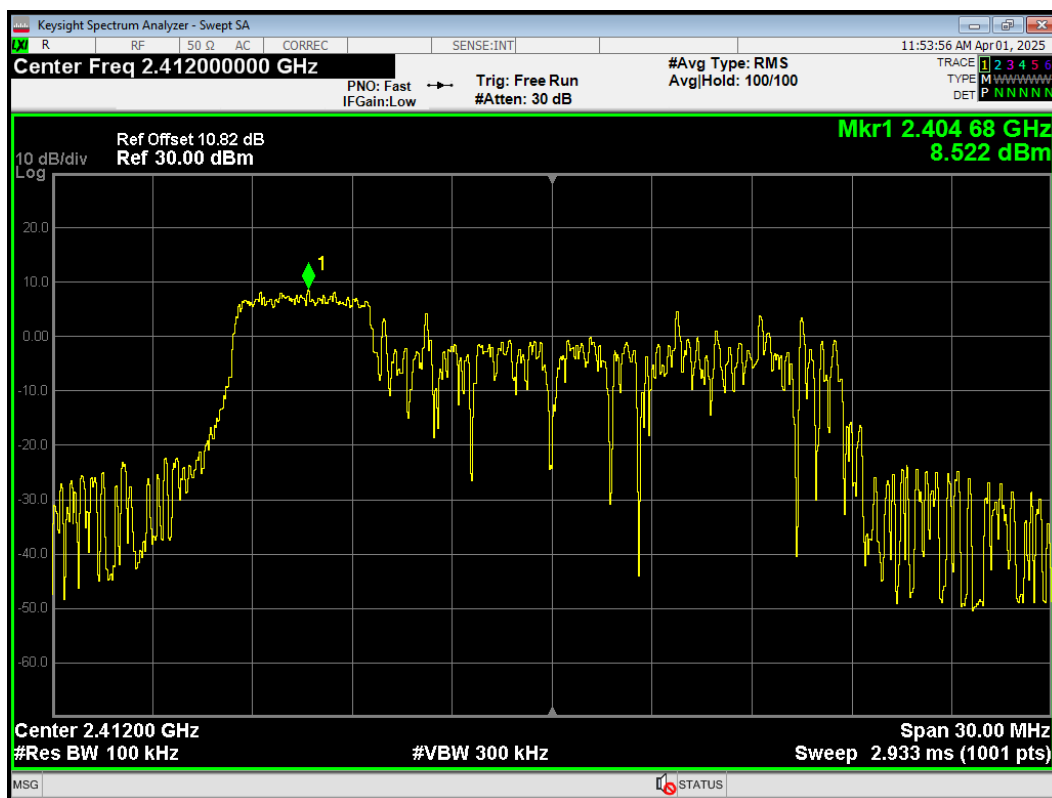

Band Edge 802.11ax(HE20) 52T 2412MHz Emission

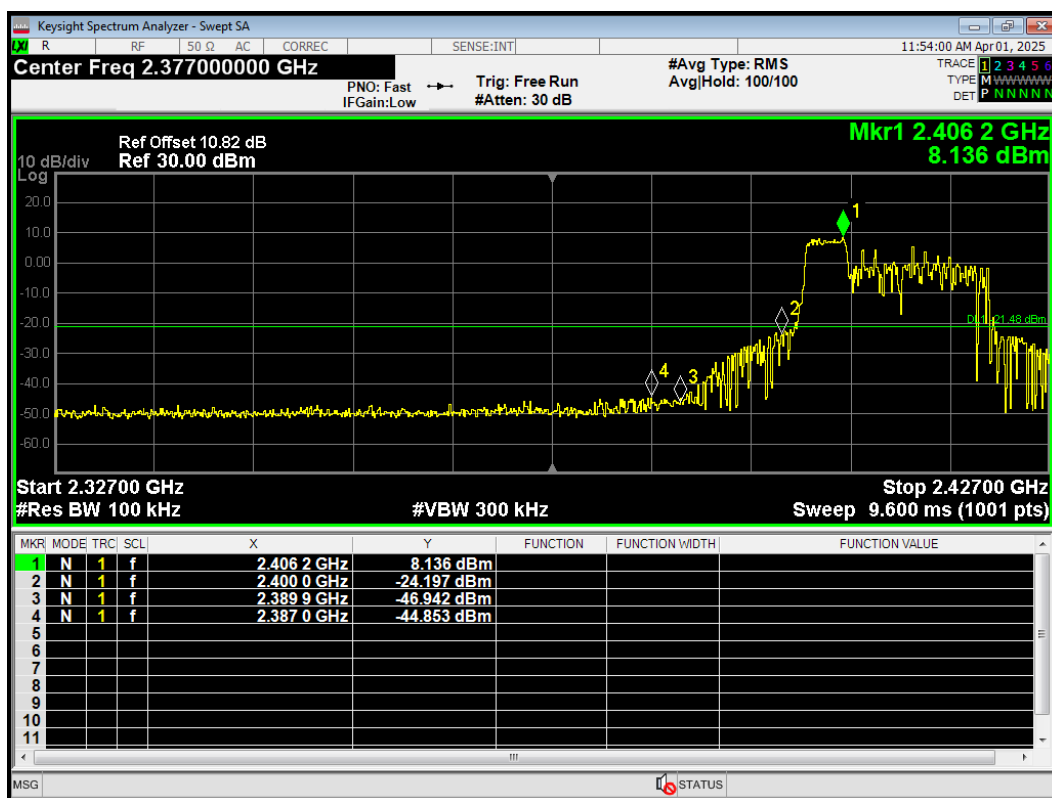

Band Edge 802.11ax(HE20) 52T 2462MHz Ref

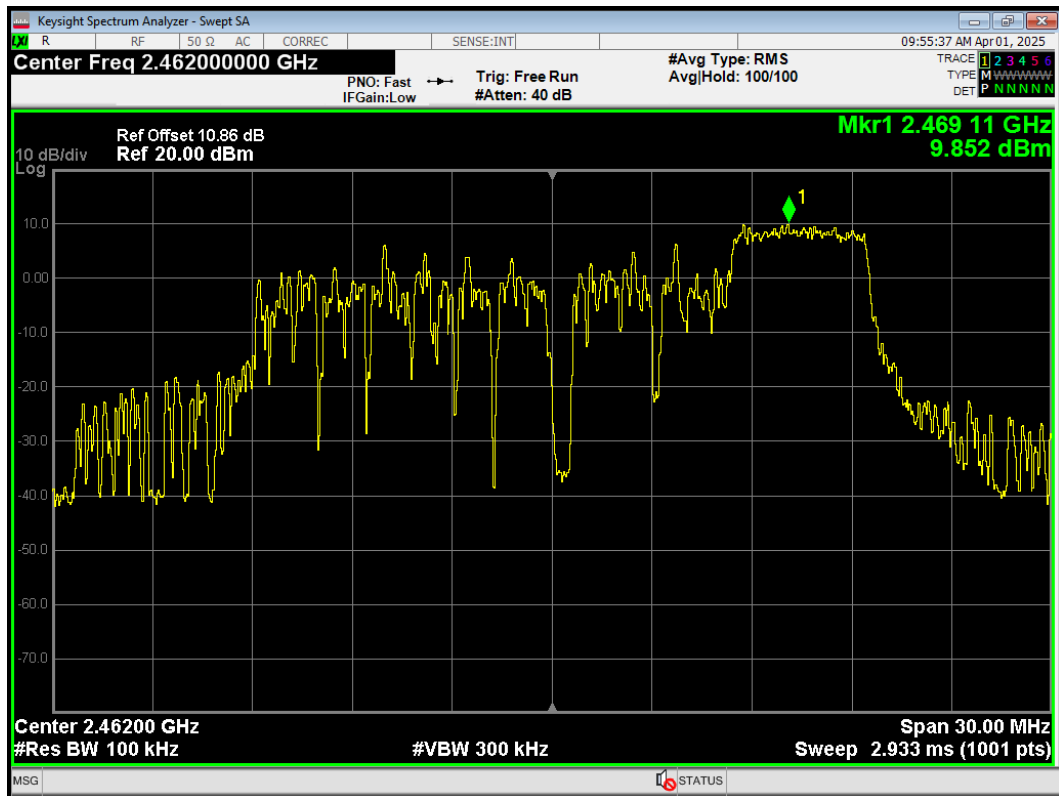

Band Edge 802.11ax(HE20) 52T 2462MHz Emission

