



H.B. Compliance Solutions

Intentional Radiator Test Report

For the

Link Labs

LL-RXR-27 Module

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 15.247 for

Frequency Hopping Spread Spectrum

Prepared for:

Link Labs

130 Holiday Ct., Suite 100

Annapolis, MD 21401

Prepared By:

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

Reviewed By:

A handwritten signature in black ink, appearing to read 'Hoosamuddin Bandukwala'.

Hoosamuddin Bandukwala



Cert # ATL-0062-E

Engineering Statement: The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 15 of the FCC Rules under normal use and maintenance.

Report Status Sheet

Revision #	Report Date	Reason for Revision
Ø	October 28, 2015	Initial Issue
1	November 30, 2015	TCB Comments

Table of Contents

EXECUTIVE SUMMARY	5
1. Testing Summary	5
EQUIPMENT CONFIGURATION	6
1. Overview	6
2. Test Facility	7
3. Description of Test Sample	7
4. Equipment Configuration	7
5. Support Equipment	7
6. Ports and Cabling Information	7
7. Method of Monitoring EUT Operation	8
8. Mode of Operation	8
9. Modifications	8
10. Disposition of EUT	8
Criteria for Un-Intentional Radiators	9
1. Radiated Emissions	9
Emissions Tests Calculations	10
Criteria for Intentional Radiators	12
2. Conducted Emissions	12
1. Occupied Bandwidth	15
2. RF Power Output	18
3. Conducted Spurious Emissions	21
4. Radiated Spurious Emissions and Restricted Band	28
6. Emissions At Band Edges	31
7. Time of Occupancy (Dwell Time)	33
8. Number of Hopping Frequencies	35
9. Carrier Frequency Separation	37

I. Test Equipment.....	39
------------------------	----

EXECUTIVE SUMMARY

1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15.247. All tests were conducted using measurement procedure from ANSI C63.10-2013, FCC Public Notice DA 00-705 FHSS Guide March 30, 2000 as appropriate.

Test Name	Test Method/Standard	Result	Comments
Unintentional Radiated Emissions	15.109	Pass	
A/C Powerline Conducted Emissions	15.207	Pass	
Occupied Bandwidth	15.247(a)(2)	Pass	
Peak Output Power	15.247(b)	Pass	
Conducted Spurious Emissions	15.247(d)	Pass	
Radiated Spurious Emissions & Restricted Band	15.247(d), 15.209(a), 15.205	Pass	
Emissions At Band Edges	15.247(d), 15.209(a), 15.205	Pass	
Time of Occupancy (Dwell Time)	15.247(a)	Pass	
Number of Hopping Channels	15.247(a)	Pass	
Carrier Frequency Separation	15.247(a)	Pass	

EQUIPMENT CONFIGURATION

1. Overview

H.B Compliance Solutions was contracted by Link Labs to perform testing on the LL-RXR-27 Module under the quotation number Q150110036 Rev.6.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Link Labs, LL-RXR-27 Module.

The tests were based on FCC Part 15 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Link Labs should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

Product Name:	LP Module
Model(s) Tested:	LL-RXR-27
FCC ID:	2ACT6LLLXR27
Supply Voltage Input:	Primary Power : 3.7 Vdc
Frequency Range:	902.2-927.8MHz
No. of Channels:	50 Channels
Necessary Bandwidth	N/A
Type(s) of Modulation:	FSK
Range of Operation Power:	0.328W
Emission Designator:	N/A
Channel Spacing(s)	None
Test Item:	Pre-Production
Type of Equipment :	Fixed
Antenna Requirement (§15.203) :	Type of Antenna: Chip and Omni Gain of Antenna: -3dBi (PCB) and 1.9dBi (Omni)
Environmental Test Conditions:	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Modification to the EUT:	None
Evaluated By:	Staff at Artesyn Embedded & H.B. Compliance Solutions
Test Date(s):	06/10/15 till 10/29/15

2. Test Facility

All testing was performed at Artesyn Embedded Technologies. This facility is located at 2900 S. Diablo Way, Suite 190, Tempe, AZ 85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Test facility at Artesyn Embedded Technologies is an A2LA accredited test site. The A2LA certificate number is 2716.01. The scope of accreditation covers the FCC Method - 47 CFR Part 15, ICES-003, CISPR 22, AS/NZS 3548 and VCCI

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Artesyn Embedded Technologies.

3. Description of Test Sample

The Link Labs, LL-RXR-27 modules are small electronic modules containing microcontroller, RF transceiver and supporting circuitry. It runs off battery powered. This model transmit data in a in the 902 to 927MHz range.

4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 1	Link Labs Module	LL-RXR-27	N/A

Table 1. Equipment Configuration

5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
#2	USB/AC Adaptor	-	-	N/A

Table 2. Support Equipment

6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
#3	Power	USB	1	2	N	DC Power

Table 3. Ports and Cabling Information

7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

8. Mode of Operation

The EUT will be configured to transmit at maximum power level. The modules were programmed with special test software that allowed to cycle through test modes. Test mode was provided to select the lower, middle and upper band of the transmitter. This software allowed the selection of the channel on the transmitter from three frequencies modulated and the other three in CW mode. These settings were created for testing purpose only.

9. Modifications

9.1 Modifications to EUT

No modifications were made to the EUT

9.2 Modifications to Test Standard

No Modifications were made to the test standard.

10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Link Labs upon completion of testing & certification

Criteria for Un-Intentional Radiators

1. Radiated Emissions

Test Requirement(s):	§15.109	Test Engineer(s):	Frank Farrone
Test Results:	Pass	Test Date(s):	10/05/2015

Test Procedures:

The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by varying table azimuth, antenna height, and manipulating cables.

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.

Tests were made with the antenna positioned in both the horizontal and vertical polarization planes. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 3 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
30 MHz to 1 GHz	120 kHz	120 kHz	N/A
1 GHz to 11 GHz	1MHz	N/A	1MHz
Measurements were made using the bandwidths and detectors specified. The video filter was at least as wide as the IF bandwidth of the measuring receiver.			

Table 4. Radiated Emissions – Measurement Bandwidth

Emissions Tests Calculations

In the case of indoor measurements, radiated emissions measurements are made by the manipulation of correction factors using Rohde and Schwarz ES-K1 software. This is done automatically by the software during the final measurement process.

In both cases, the level of the Field Strength of the interfering signal is calculated by adding the Antenna Factor, Cable Factor and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + (CF - AG)$$

Where: FS = Field Strength

RA = Receiver (indicated) Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

This laboratory uses an approach of combining the CF and AG using an end-to-end measurement of the entire cabling system, including the test cable, any in-line amplifiers, attenuators, or transient protection networks, all measured in-situ.


For a sample calculation, assume a receiver reading of 52.5 dBuV is obtained. With an antenna factor of 7.4 and a combined cable factor (CF + AG) of -27.9:

$$FS = 52.5 + 7.4 + (-27.9) = 32 \text{ dBuV/m}$$


$$FS = 32 \text{ dBuV/m}$$

If desired, this can be converted into its corresponding level in uV/m:

$$FS = 10^{((32 \text{ dBuV/m})/20)} = 39.8 \text{ uV/m}$$

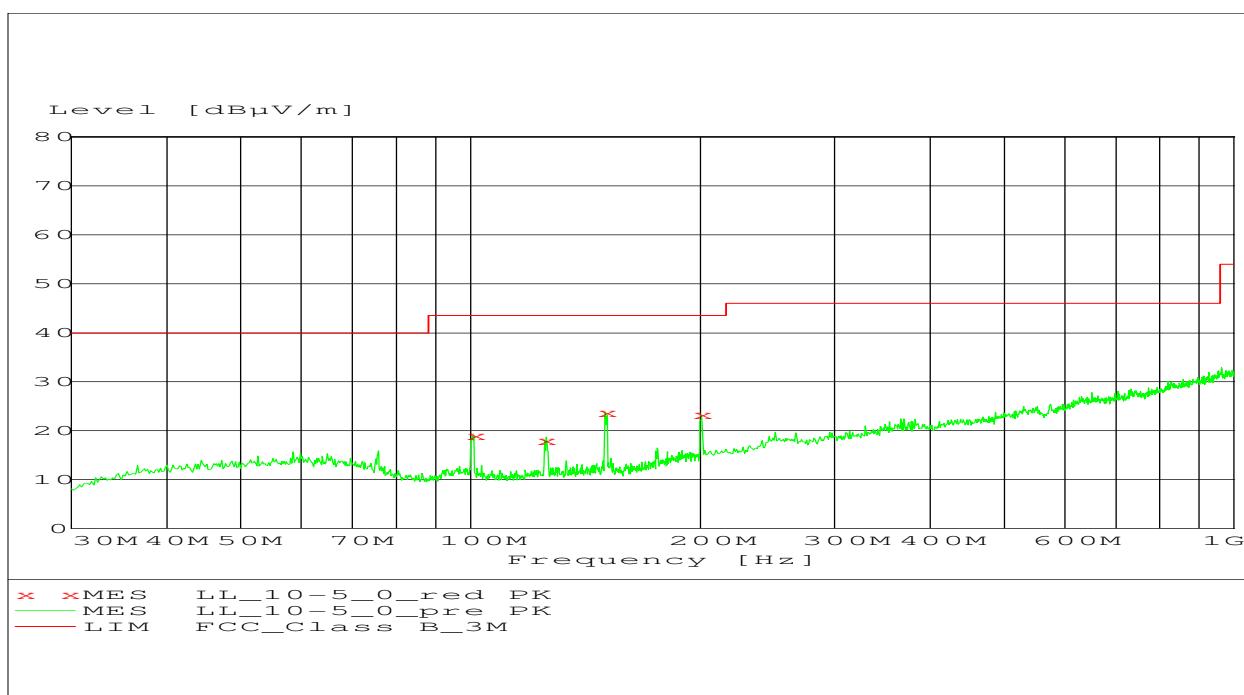

Plot 1 – Radiated Emissions – 30MHz to 1GHz

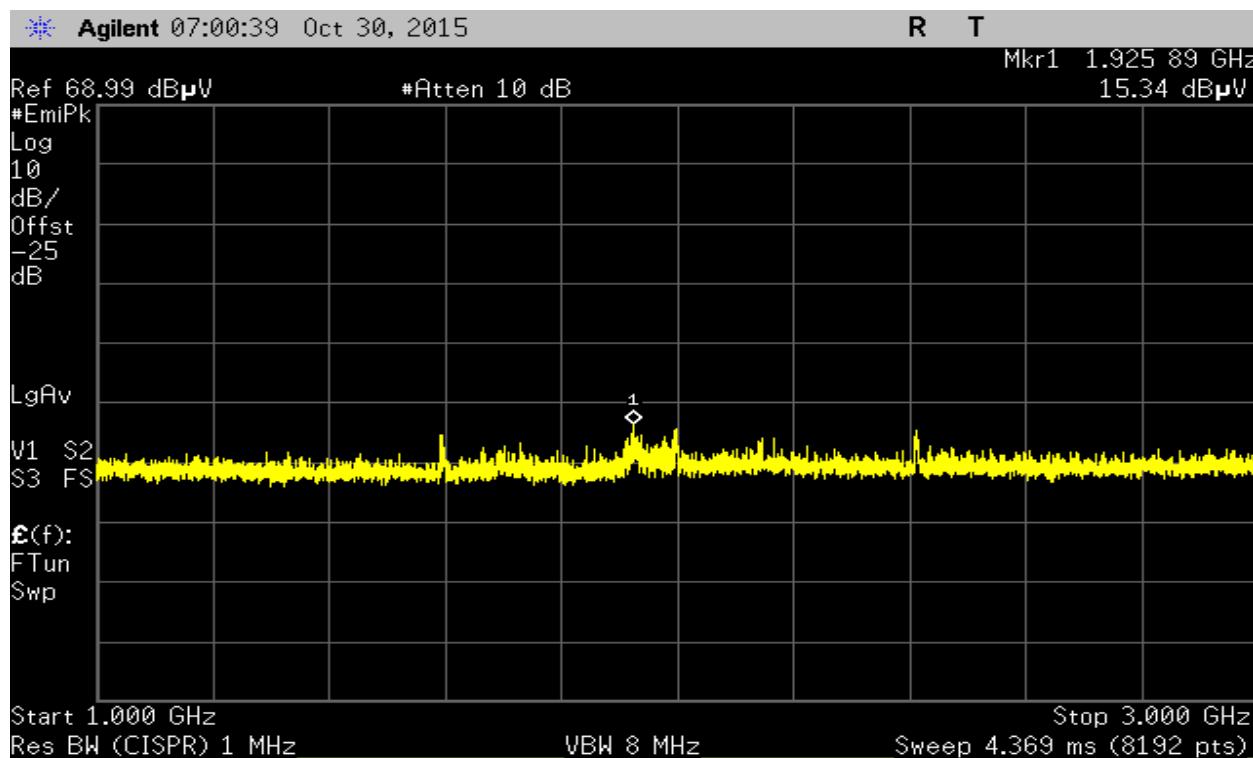

Plot 2 – Radiated Emissions – 1GHz to 3GHz (For Industry Canada RSS-GEN)

Criteria for Intentional Radiators

2. Conducted Emissions

Test Requirement(s):	§15.207	Test Engineer(s):	None
Test Results:	N/A	Test Date(s):	None

Test Procedures: The EUT was placed on a non-metallic table, 80cm above the ground plane inside a shielded enclosure. The EUT was powered through a $50\Omega/50\mu\text{H}$ LISN. The conducted emissions tests were performed using the mode of operation and configuration noted within this report. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are the same as those cords normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network). All 50 Ohm measuring ports of the LISN are terminated by 50 Ohms, either by the 50 Ohm EMI receiver or a 50 Ohm resistive load.

Refer to the Emissions Tests Calculations section in the Radiated Emissions section for sample calculations. For the purposes of the conducted emissions test, the Antenna Factor (AF) is replaced by the LISN correction factor.


Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.150 - 30	9.0	9.0	9.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			

Table 1. Conducted Emissions – Measurement Bandwidth

Frequency Range (MHz)	15.107(b), Class A Limits (dBuV)		15.107(a), Class B Limits (dBuV)	
	Quasi-Peak	Average	Quasi Peak	Average
0.15 – 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 – 30	73	60	60	50

Note 1 – The lower limit shall apply at the transition frequencies.

Table 2. Conducted Emissions Limits – FCC Limits from Section 15.107(a)(b)

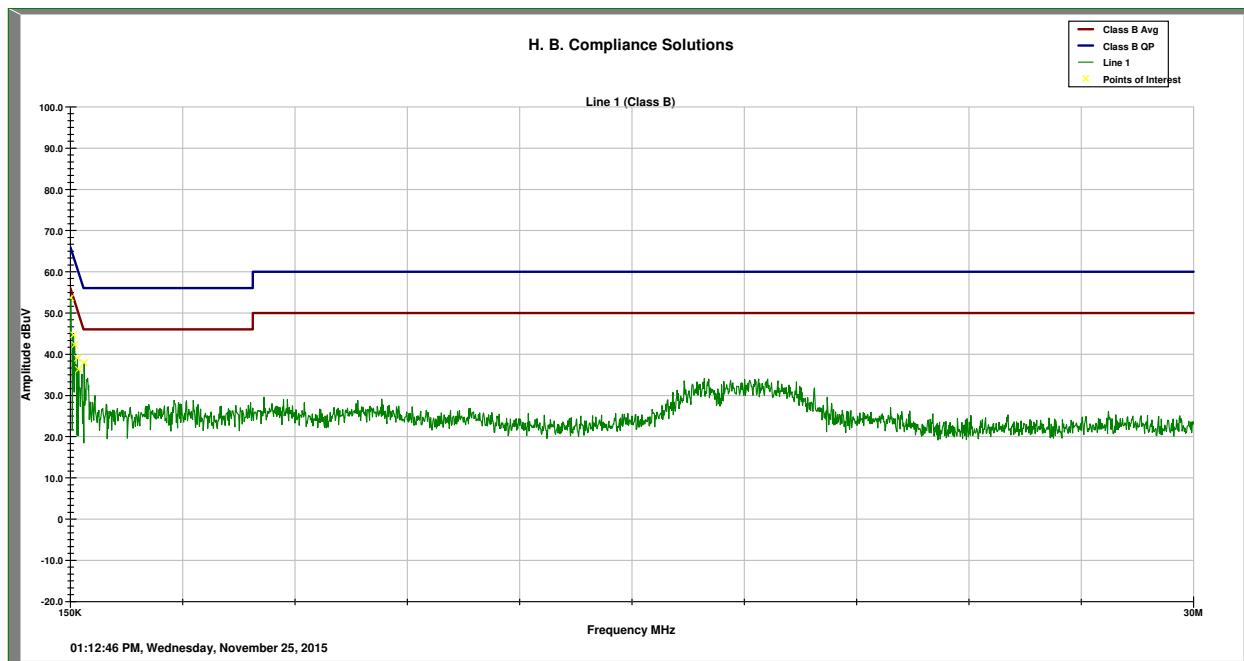


Plot 1 – Conducted Emission Plot – Line Side (Class B)

Frequency (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)
0.151	49.14	65.95	-16.81
0.225	41.08	63.83	-22.75
0.260	38.28	62.85	-24.57
0.342	32.41	60.49	-28.08
0.386	29.74	59.23	-29.49
0.527	32.41	56.0	-23.59

Table 3. Measurement Results for QP

Frequency (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)
0.151	19.41	55.95	-36.54
0.225	9.13	53.83	-44.70
0.260	19.73	52.85	-33.12
0.342	16.6	50.49	-33.89
0.386	14.04	49.23	-35.18
0.527	16.94	46.9	-29.05

Table 4. Measurement Results for Average

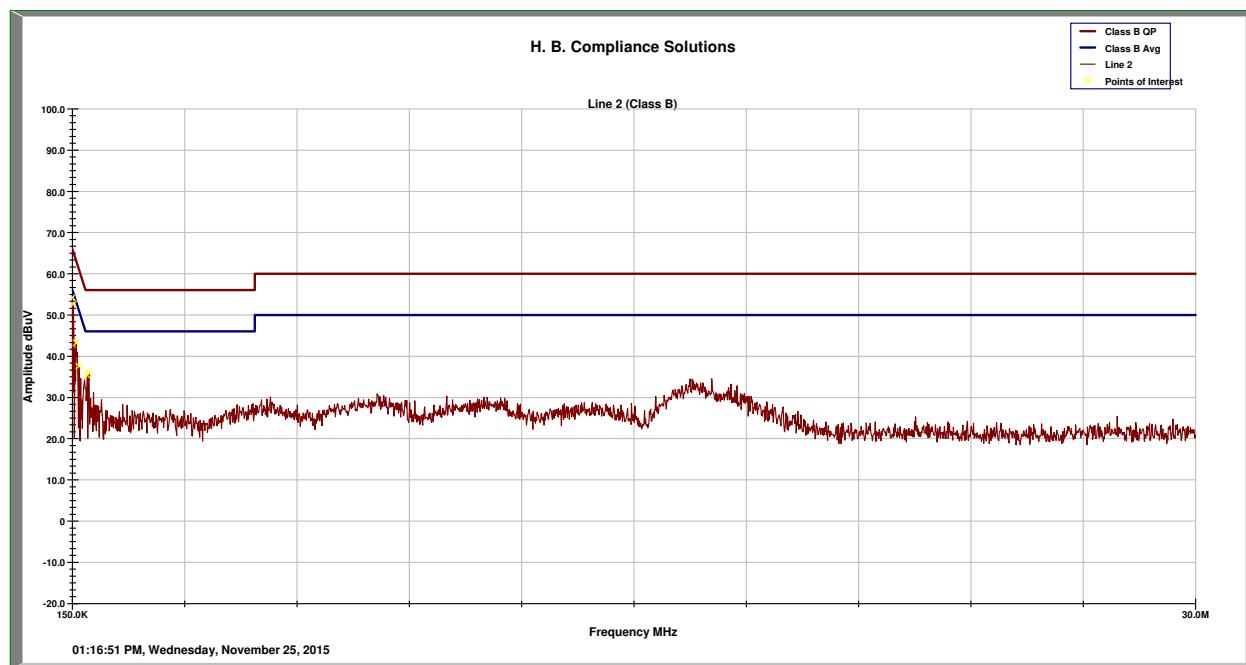

Plot 2 – Conducted Emissions – Neutral Side (Class B)

Frequency (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)
0.150	49.48	65.99	-16.51
0.163	47.4	65.62	-18.22
0.246	38.52	63.24	-24.72
0.312	33.41	61.35	-27.94
0.556	34.45	56.0	-21.55
0.593	33.79	56.0	-22.21

Table 5. Measurement Results for Quasi Peak

Frequency (MHz)	Measured Level (dBuV)	Limit (dBuV)	Margin (dB)
0.150	21.41	55.99	-34.58
0.163	16.38	55.62	-39.24
0.246	10.28	53.24	-42.95
0.312	10.04	51.35	-41.31
0.556	20.86	46.0	-25.13
0.593	18.41	46.0	-27.58

Table 6. Measurement Results for Average

1. Occupied Bandwidth

Test Requirement(s):	15.247(a)(2), ANSI C63.10	Test Engineer(s):	Keith T B.
Test Results:	Pass	Test Date(s):	09/16/15

Test Procedure: As required by 47 CFR 15.247(a): For Frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer. The measured highest peak power was set relative to zero dB reference. The RBW of the Spectrum Analyzer was set to 100kHz and VBW>RBW. Measurements were carried out at the low, mid and high channels of the TX band at the output terminals of the EUT.

Frequency (MHz)	Recorded Measurement	Specification Limit
902.2	223.27 kHz	≤ 250 KHz
916.0	220.67 kHz	≤ 250 KHz
927.8	224.93 kHz	≤ 250 KHz

Table 3. Occupied Bandwidth Summary, Test Results


Frequency (MHz)	Recorded Measurement
902.2	182.83 kHz
916.0	182.70 kHz
927.8	188.62 kHz

Table 4. 99% Bandwidth, Test Results


The following pages show measurements of Occupied Bandwidth plots:

Agilent 14:13:30 Sep 16, 2015


R T

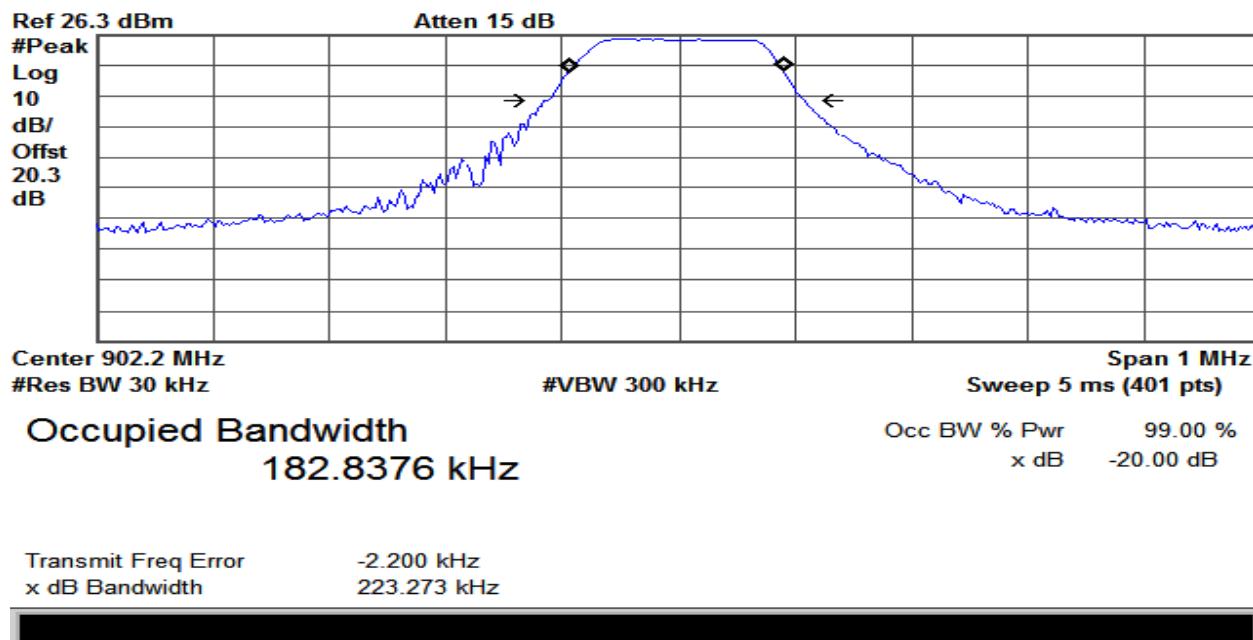

Plot 3 – Lowest Channel – 20dB BW (FHSS Mode)

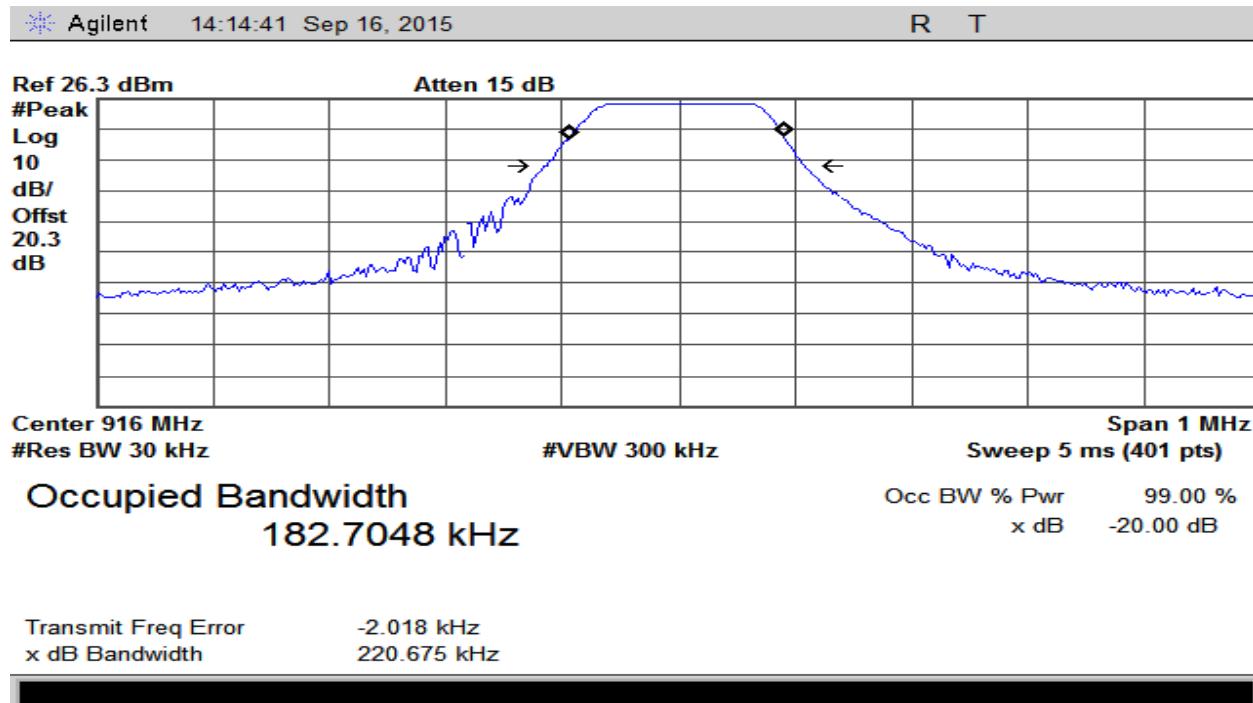

Plot 4 – Middle Channel – 20dB BW (FHSS Mode)

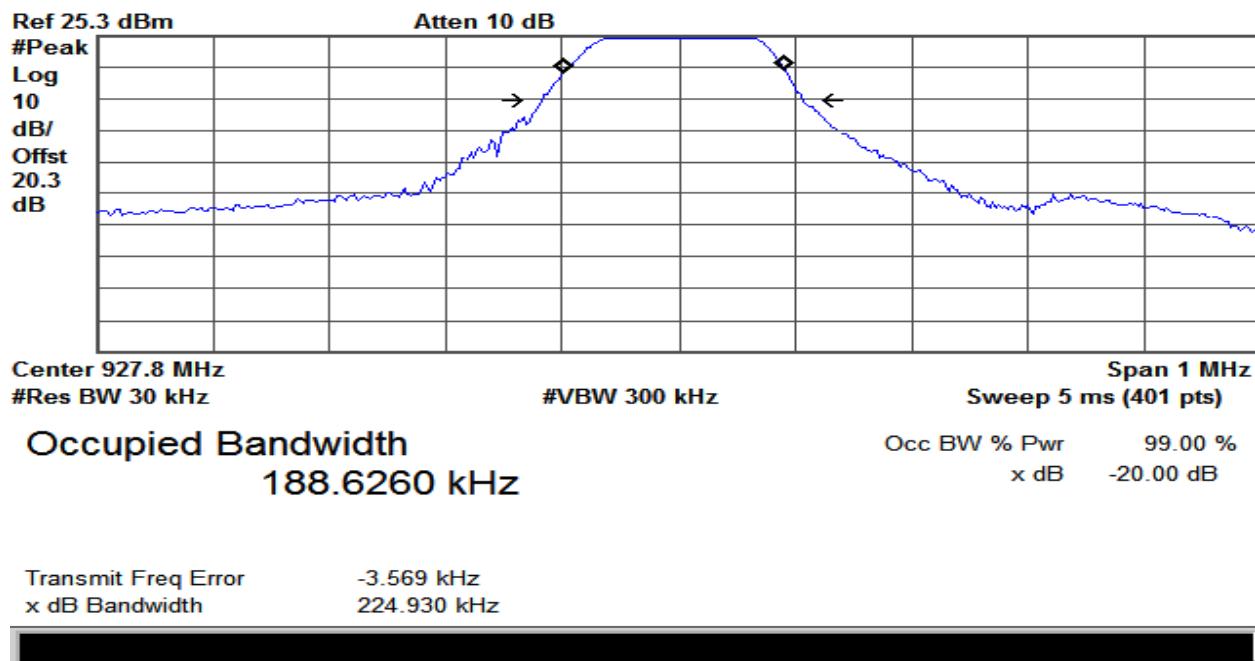

Plot 5 – Highest Channel – 20dB BW (FHSS Mode)

2. RF Power Output


Test Requirement(s):	§15.247(b)(3)	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	09/01/15

Test Procedures: As required by 47 CFR 15.247(b)(3), RF Power output measurements were made at the RF output terminals of the EUT


Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer capable of making power measurements. Measurements were made at the low, mid, and high channels of the entire frequency band.

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Specification Limit
902.2	25.16	0.328	1W
916	25.01	0.316	1W
927.8	24.87	0.206	1W


Table 5. RF Power Output, Test Results

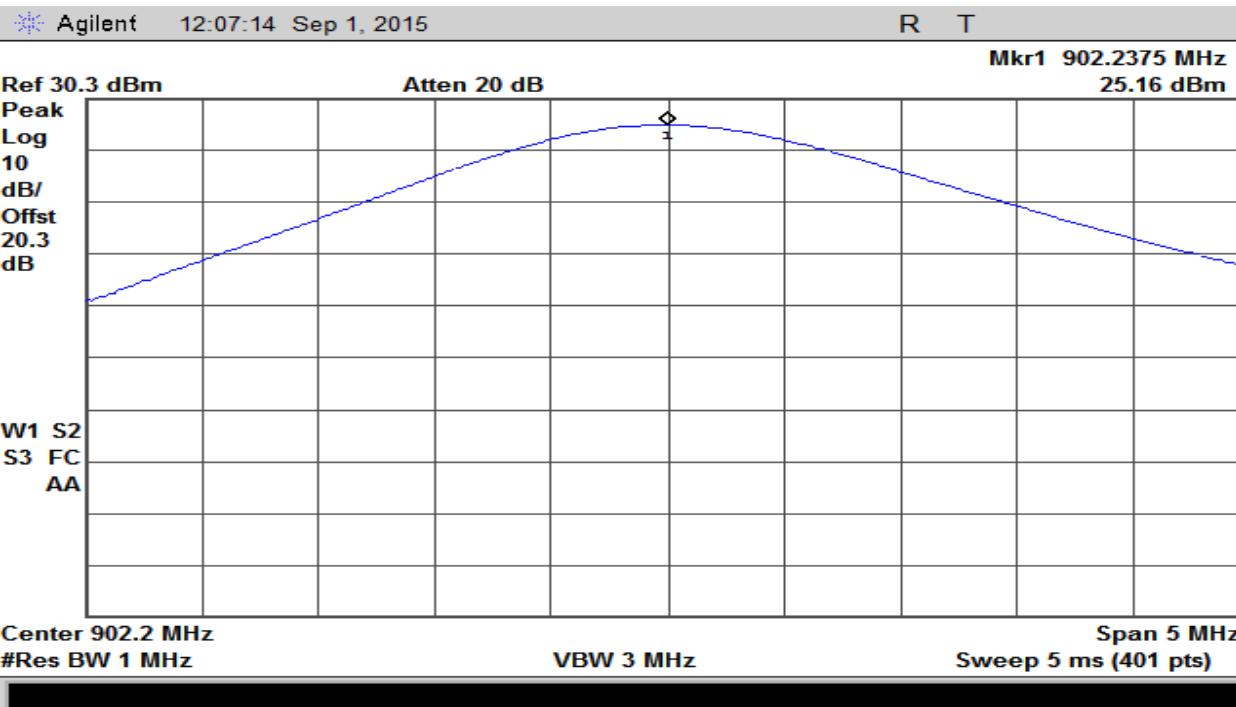

Plot 6 – Output Power – Low

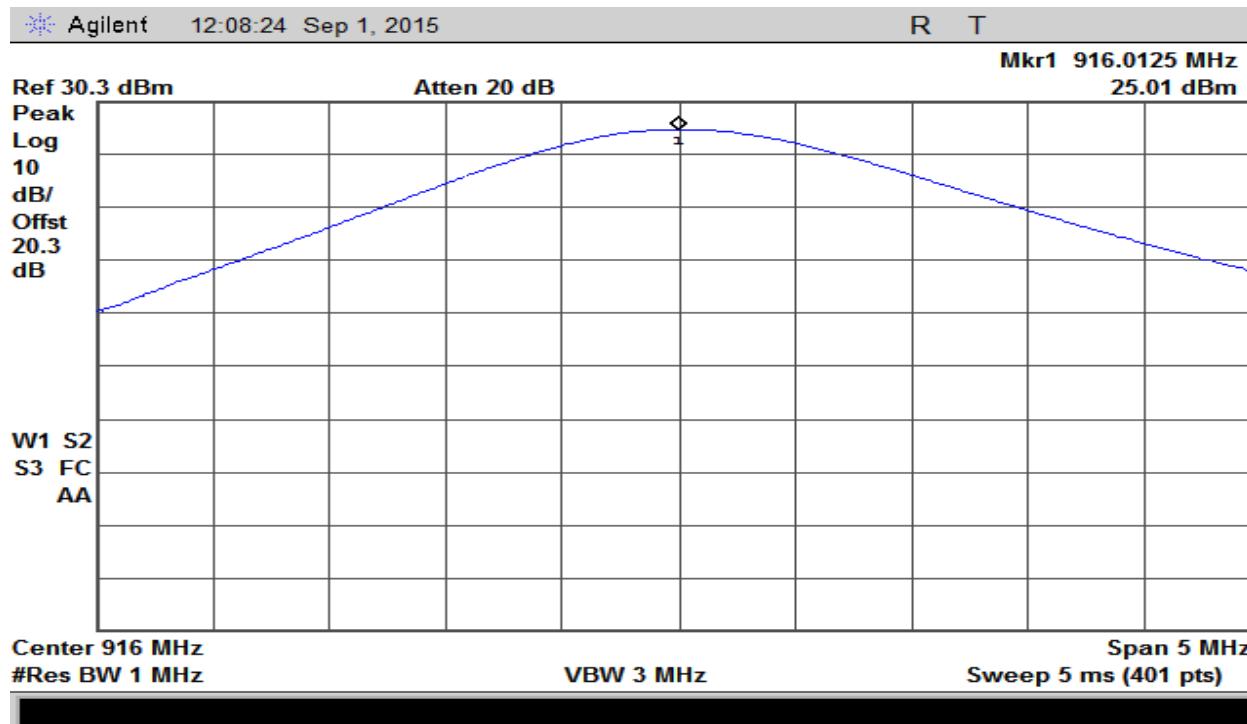

Plot 7 – Output Power – Mid

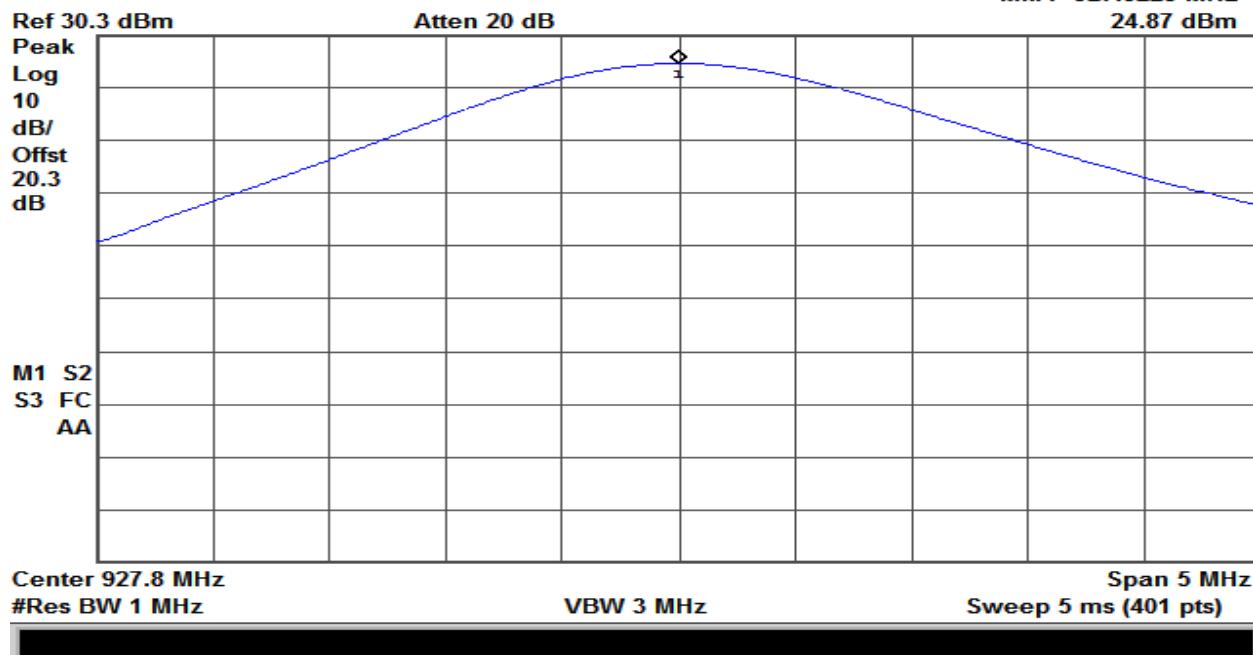

Plot 8 – Output Power – High

3. Conducted Spurious Emissions

Test Requirement(s):	§15.247(c)	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	09/08/15

Test Procedures:	<p>As required by 47 CFR 15.247(c): In any 100kHz bandwidth the frequency band in which the spread spectrum or digitally modulation intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either and RF conducted or a radiated measurement. Conducted spurious emissions at antenna terminal measurements were made at the RF output antenna terminal of the EUT.</p> <p>Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer with RBW set to 100KHz and $VBW \geq RBW$. The Spectrum Analyzer was set to sweep from 30MHz up to 10th harmonic of the fundamental or 40GHz whichever is the lesser. Measurements were made at the low, mid and high frequency of the transmit band.</p>
-------------------------	--

Test Data

Frequency (MHz)	Measured Level (dBm)	Limit (dBm)
2707	-29.67	5.0
6892	-31.0	5.0
6667	-30.33	5.0

Table 6. Lowest Channel – Conducted Spurious Emissions, Test Results

Frequency (MHz)	Measured Level (dBm)	Limit (dBm)
2747	-30.33	5.0
7133	-31.67	5.0

Table 7. Middle Channel – Conducted Spurious Emissions, Test Results


Frequency (MHz)	Measured Level (dBm)	Limit (dBm)
1387	-31.1	5.0
2780	-29.67	5.0
7742	-30.83	5.0

Table 8. Highest Channel – Conducted Spurious Emissions, Test Results


Agilent 13:55:40 Sep 8, 2015

R T


Mkr1 903.0 MHz
25.02 dBm

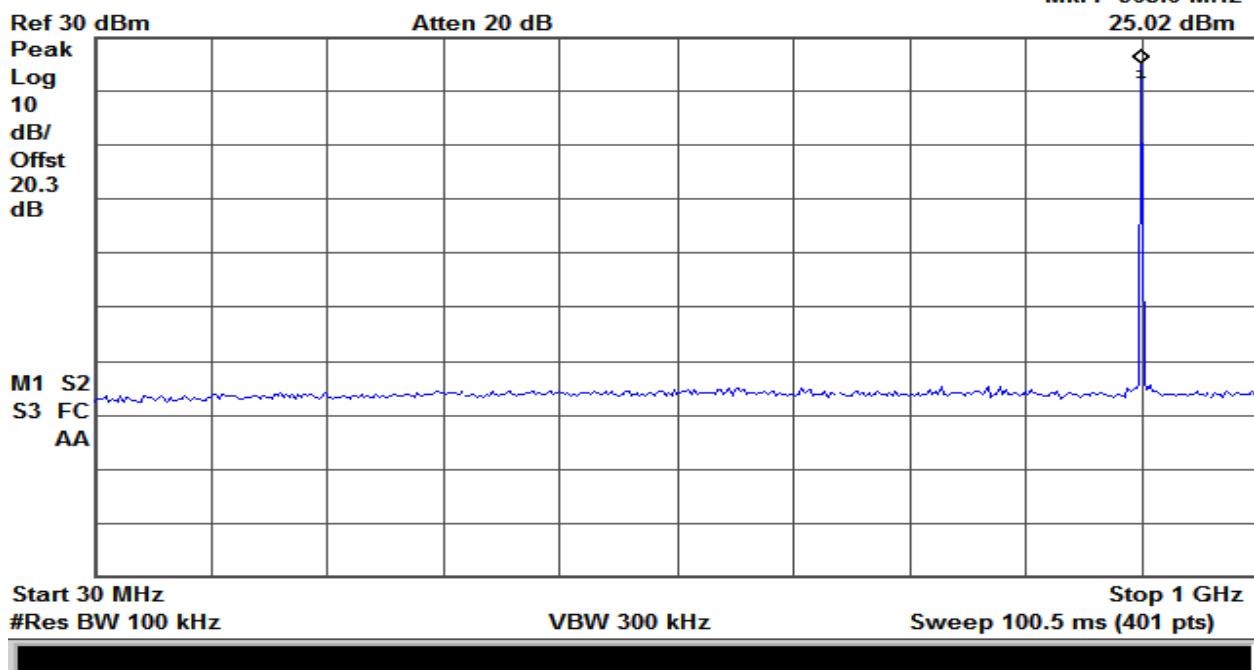


Plot 9 – Low Band – 30MHz to 1GHz

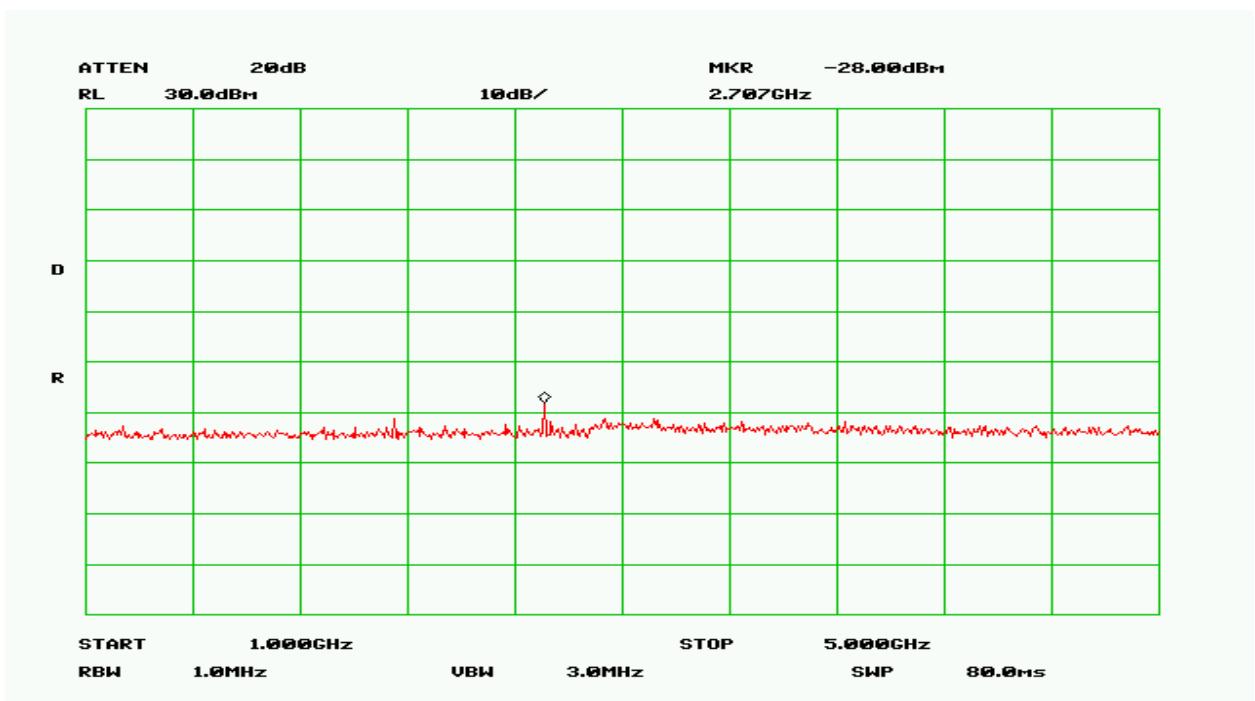


Plot 10 – Low Band – 1GHz to 5GHz

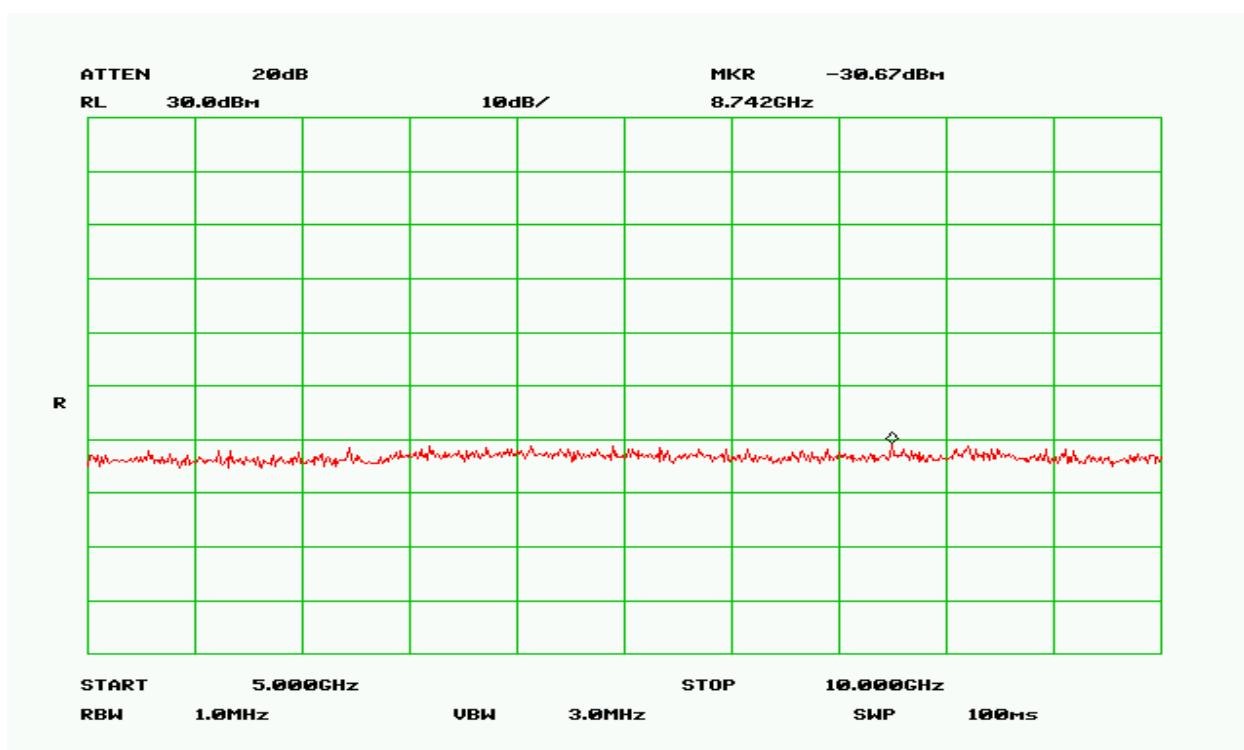


Plot 11 – Low Band – 5GHz to 10GHz

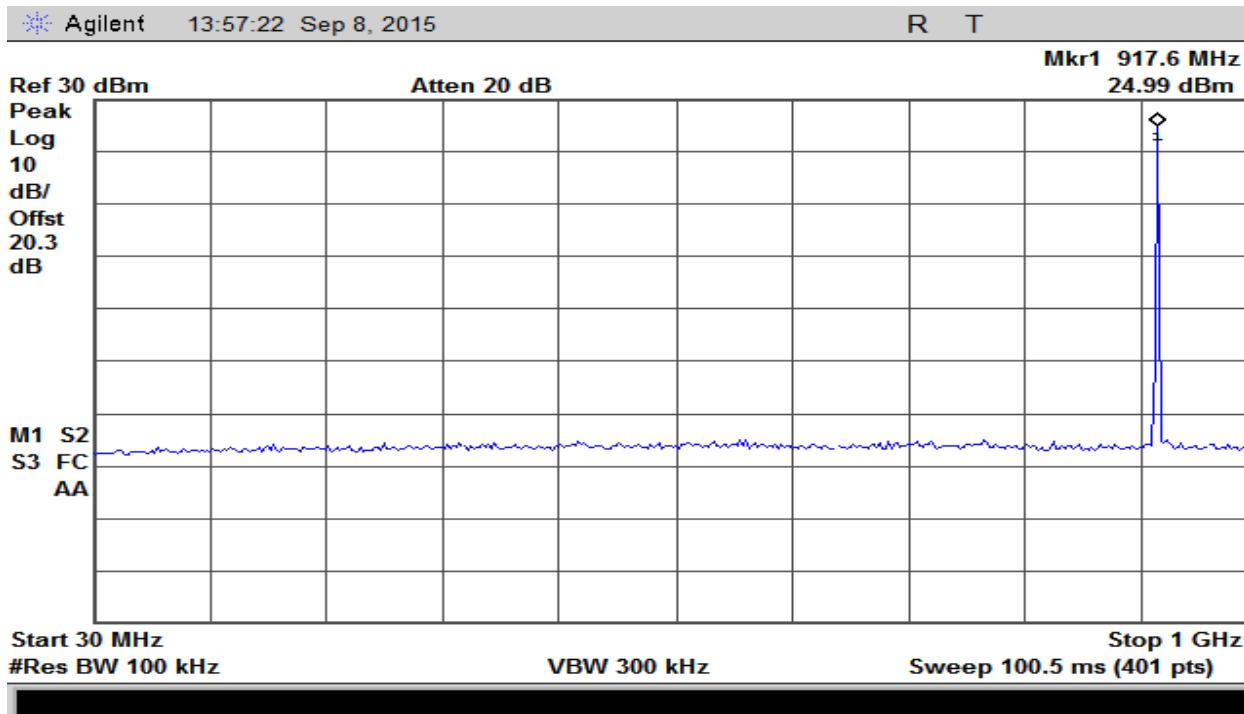


Plot 12 – Mid Band – 30MHz to 1GHz

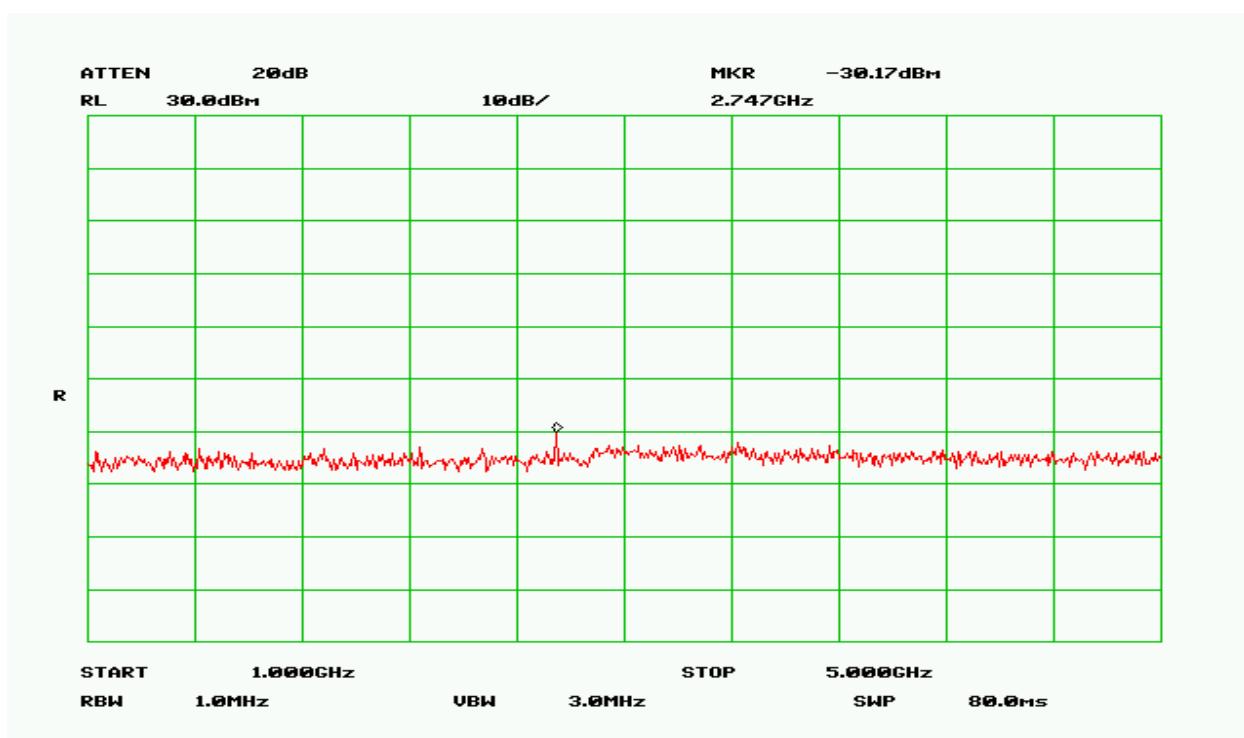


Plot 13 – Mid Band – 1GHz to 5GHz

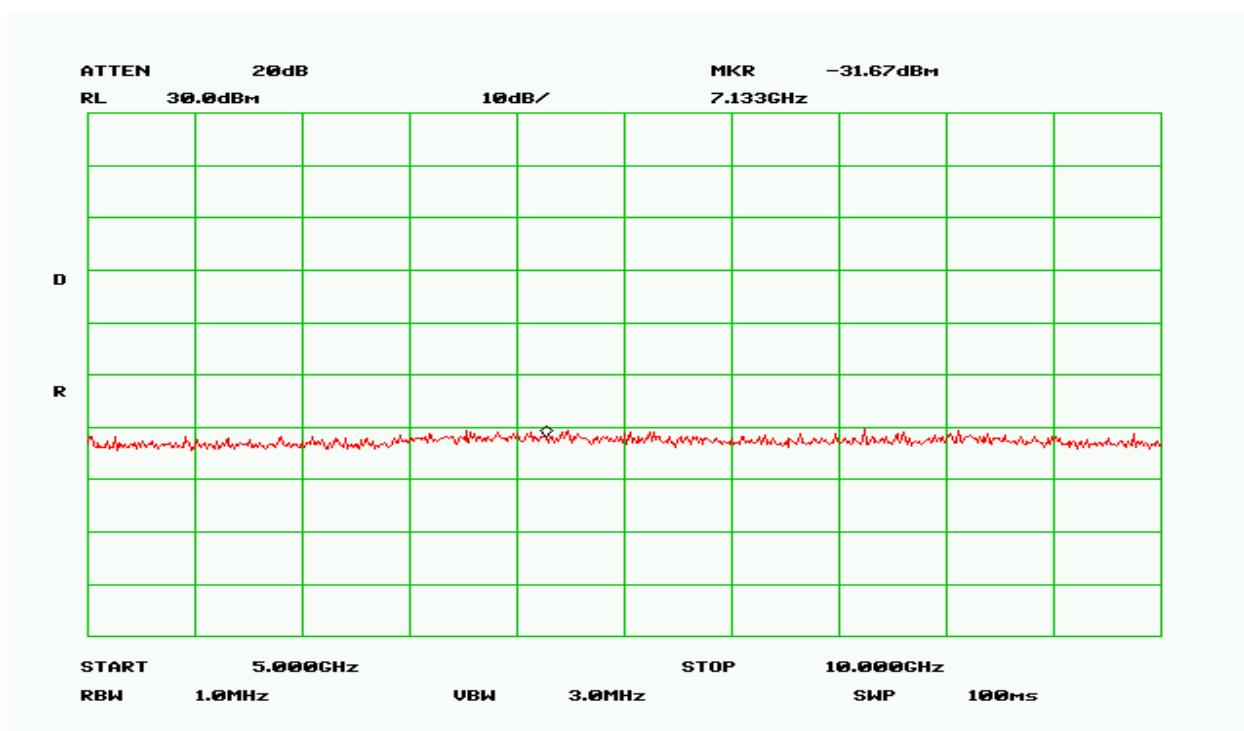


Plot 14 – Mid Band – 5GHz to 10GHz

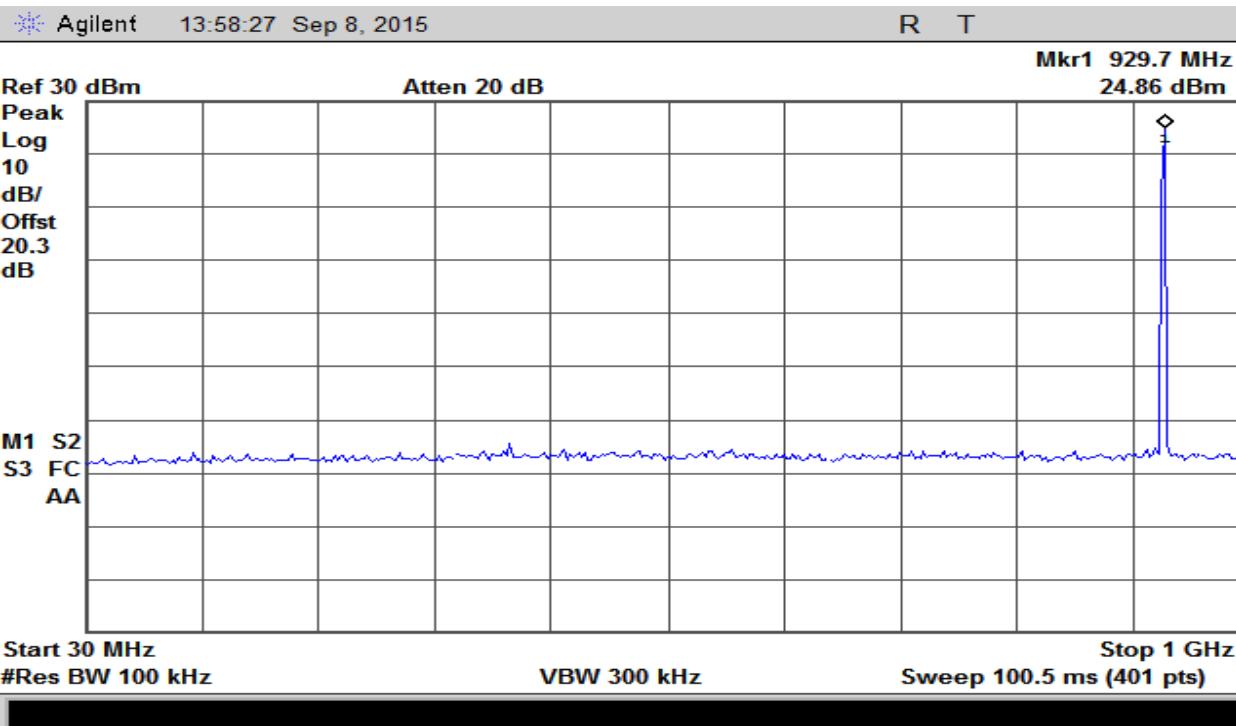

Plot 15 – High Band – 30MHz to 1GHz

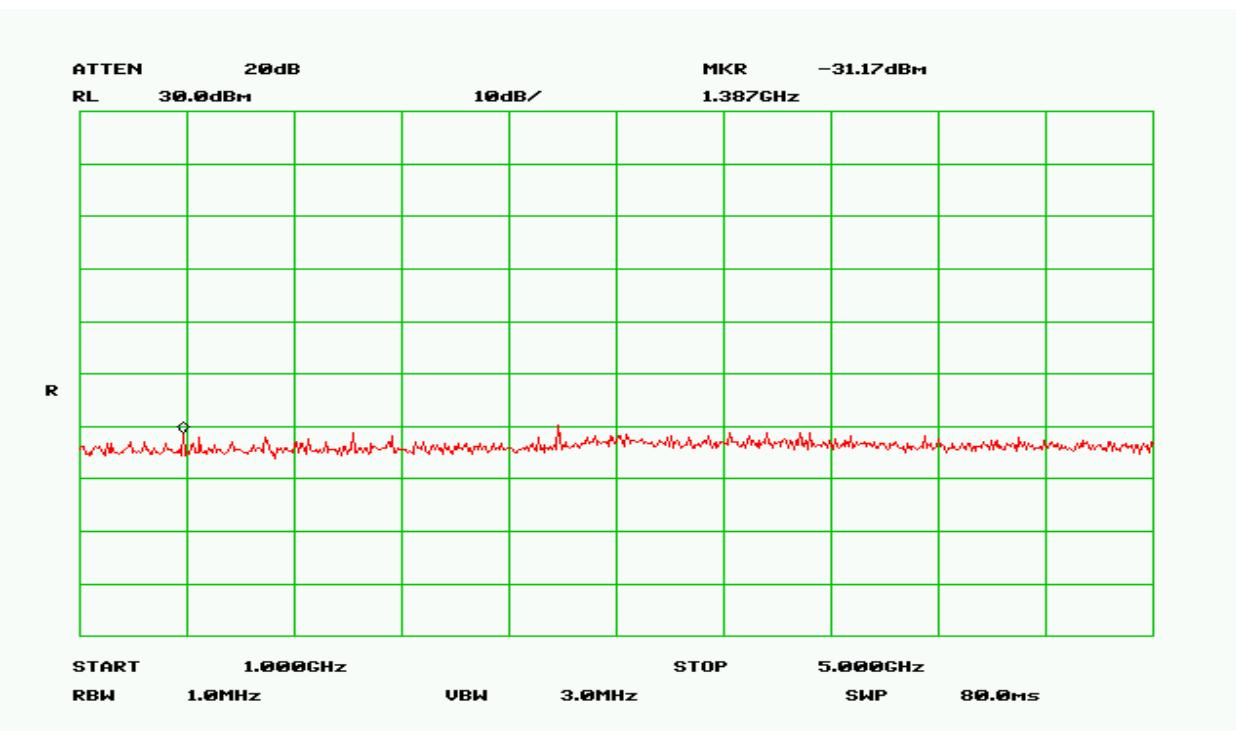

Plot 16 – High Band – 1GHz to 5GHz

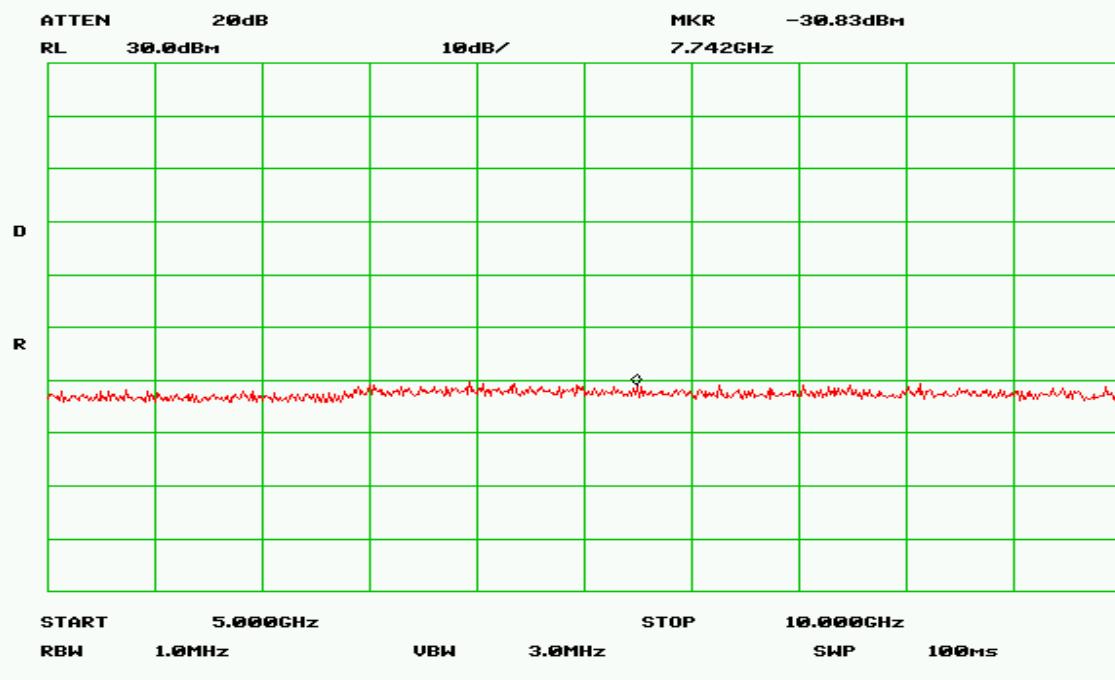

Plot 17 – High Band – 5GHz to 10GHz

4. Radiated Spurious Emissions and Restricted Band

Test Requirement(s):	§15.247(d), 15.209(a), 15.205	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	09/16/15

Test Procedures: As required by 47 CFR 15.247, Radiated spurious measurements were made in accordance with the procedures of the FCC Public Notice DA 00-705.

The EUT was placed on a non-reflective table inside a 3 meter semi-anechoic room. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to the 10th harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was rotated throughout the X-axis, Y-axis and Z-axis. Worst case is X-axis

Detector Setting	Resolution Bandwidth	Video Bandwidth	Span
Peak	1MHz	1MHz	As necessary
Average	1MHz	10Hz	0 Hz

Table 9. Analyzer Settings

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m))	Average Limit (dBuV/m)
1804.4	54.9	115.5	-	95.5
2706.6*	52.4	74.0	47.6	54.0
3608.8*	51.7	74.0	-	54.0

Table 10 - Spurious Radiated Emission Data – Low Band –PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1832	53.47	115.5	-	95.5
2748*	54.77	74.0	49.1	54.0
3664*	53.5	74.0	-	54.0

Table 11 – Spurious Radiated Emission Data – Mid Band- PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1855.6	52.6	115.5	-	95.5
2783.4*	56.1	115.5	51.27	54.0

Table 12- Spurious Radiated Emission Data – High Band - PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1804.4	54.43	114.4	-	94.5
2706.6*	55.6	74.0	48.1	54.0
3608.8*	57.4	74.0	46.23	54.0

Table 13– Spurious Radiated Emission Data – Low Band – Omni Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1832	55.43	114.4	-	94.5
2748*	56.1	74.0	51.1	54.0
3664*	51.5	74.0	-	54.0
4580	53.43	114.4	42.04	94.5

Table 14– Spurious Radiated Emission Data – Mid Band – Omni Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
1855.6	54.1	114.4	-	94.5
2783.4*	55.27	74.0	48.43	54.0
3711.2*	58.89	74.0	48.73	54.0
4639	54.1	114.4	43.7	94.5

Table 15– Spurious Radiated Emission Data – High Band – Omni Antenna

NOTE 1: There were no detectable emissions above the 5th harmonic.

NOTE 2: Frequency marked with “*” falls under the restricted band

6. Emissions At Band Edges

Test Requirement(s):	§15.247(d)	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	09/16/15


Test Procedures: As required by 47 CFR 15.247, Band edge radiated emissions measurements were made at the RF antenna output terminals of the EUT using the marker-delta method.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.


The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The EUT was set up at maximum power, first on the lowest operating channel, then on the highest operating channel of the transmit band.

Frequency (MHz)	Measured Level	Detector	Limit
902	-46.46dB	Peak	-20dBc
928	-40.41dB	Peak	-20dBc

Table 16 – Band Edge Emissions Summary

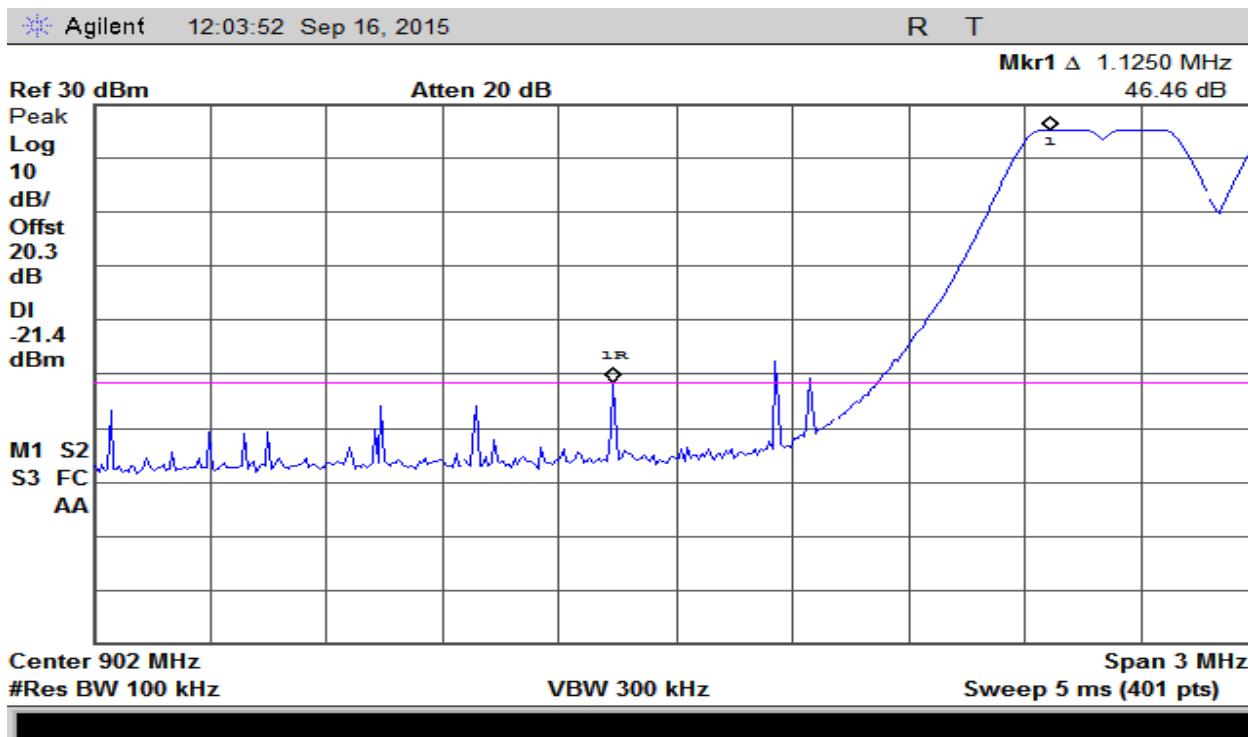

Plot 18 - Band Edge – Low Channel

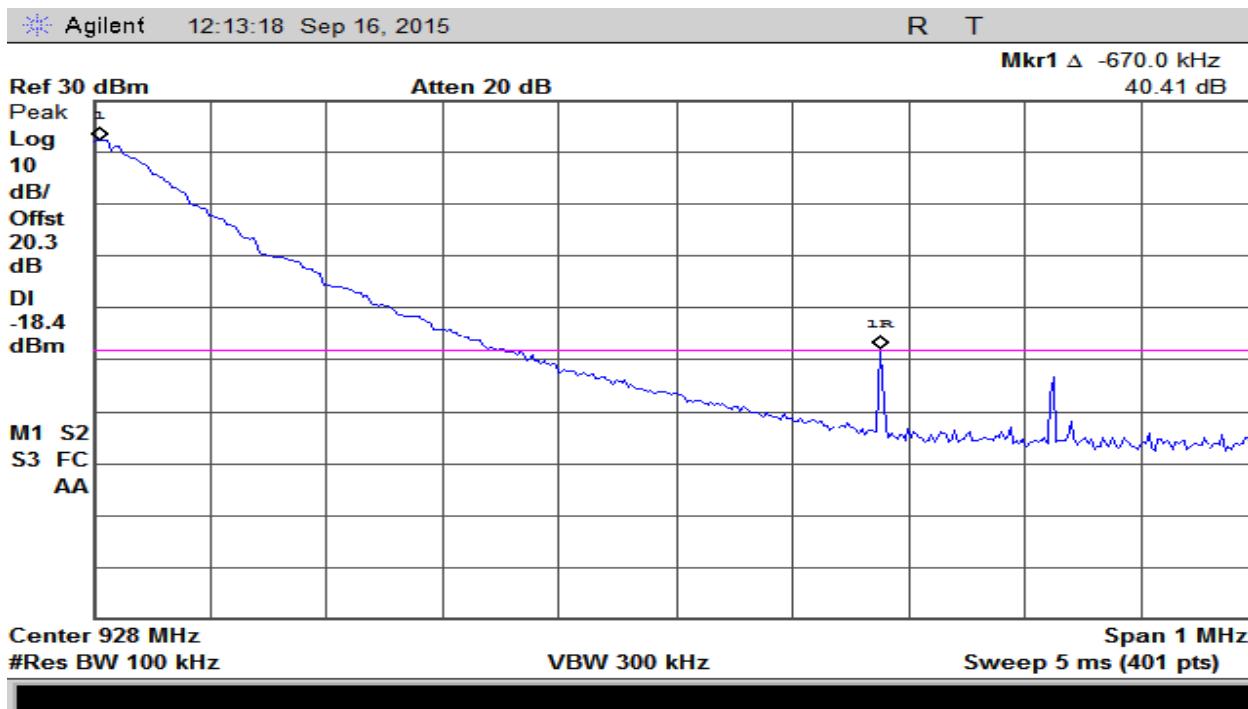

Plot 19 – Band Edge - High Channel

7. Time of Occupancy (Dwell Time)

Test Requirement(s):	§15.247(a)	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	10/29/15


Test Procedures: As required by 47 CFR 15.247(a), for frequency hopping spread spectrum operating at 902-928MHz with 20dB bandwidth less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. Measurements were made with device hopping function enabled.

The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT.


Detector Setting	Resolution Bandwidth	Video Bandwidth	Span
Peak	1MHz	1MHz	0

Table 17 – Analyzer settings

Calculation: At channel 916MHz, there is 1 burst in 20 seconds. Time period of each burst is 390msec. Therefore device meets the 0.4 sec requirement in a 20 second period.

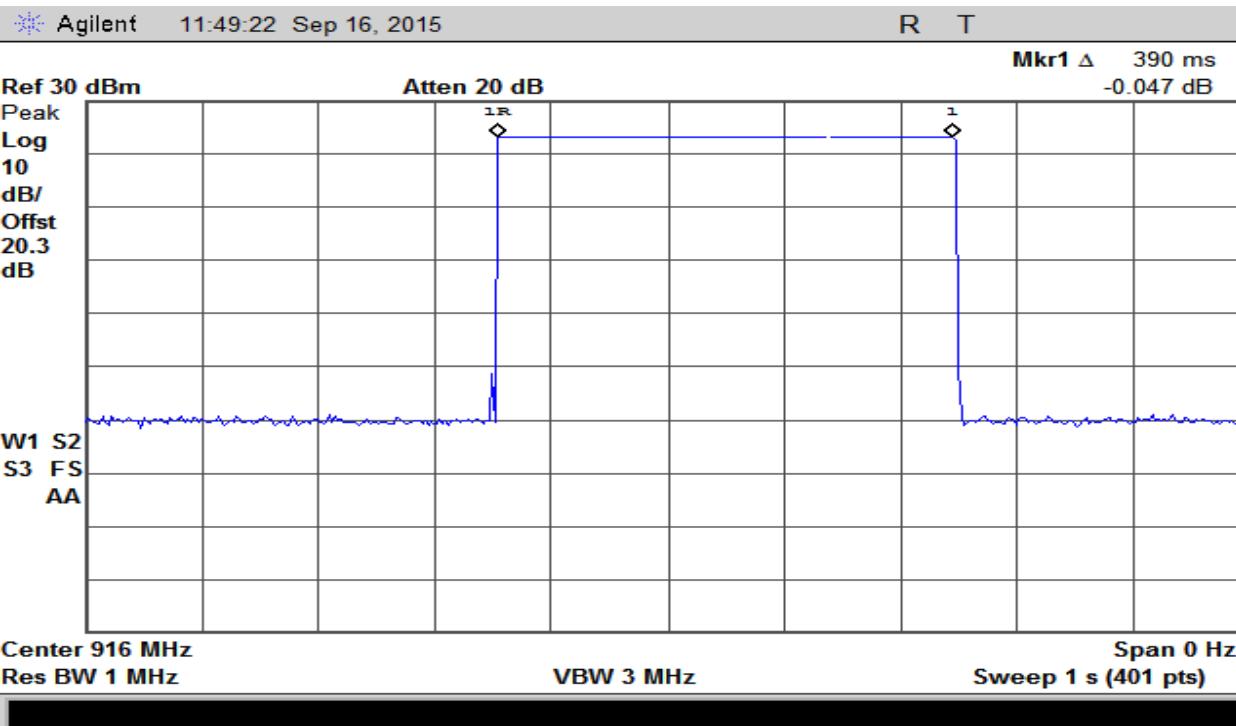

Plot 20 – Dwell Time

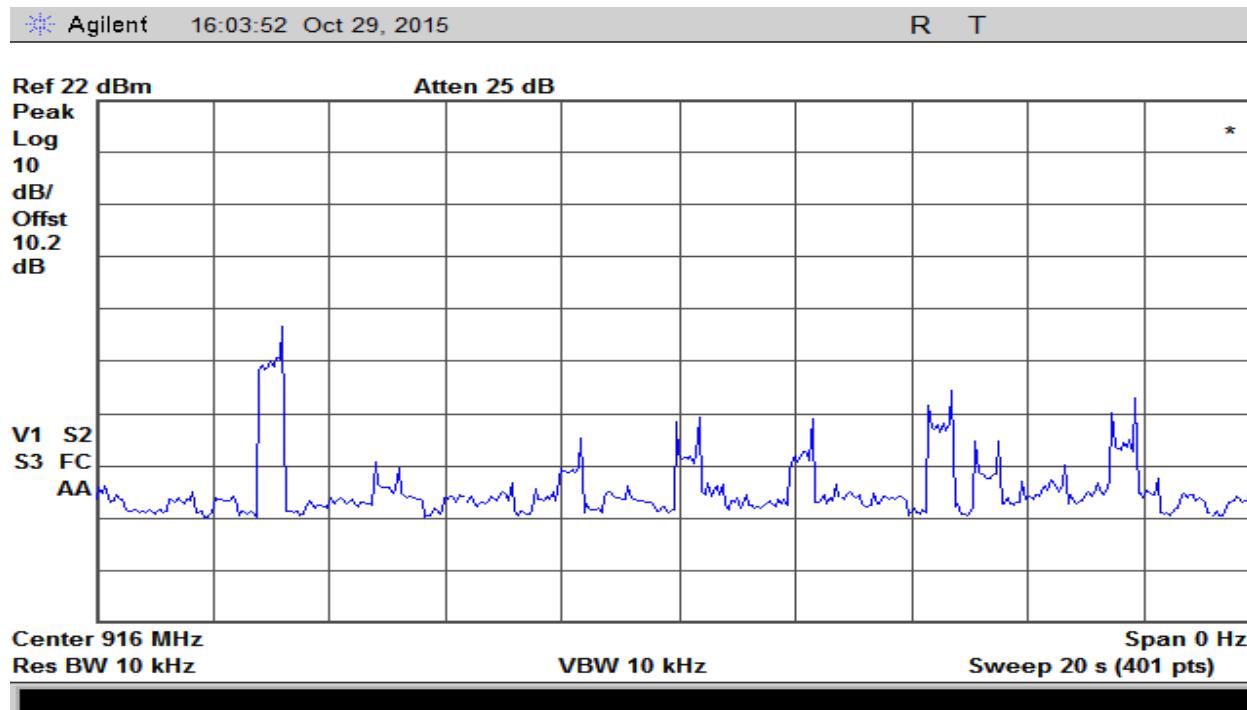


Plot 21 – # of Hops in 20 second period –

8. Number of Hopping Frequencies


Test Requirement(s):	§15.247(a)	Test Engineer(s):	Hoosam B.
Test Results:	Pass	Test Date(s):	08/15/14

Test Procedures: As required by 47 CFR 15.247(a), for frequency hopping spread spectrum operating at 902-928MHz with 20dB bandwidth less than 250 kHz, the system shall use at least 50 hopping frequencies. Measurements were made with device hopping function enabled.

The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT. Peak detector was used and trace was set to max hold

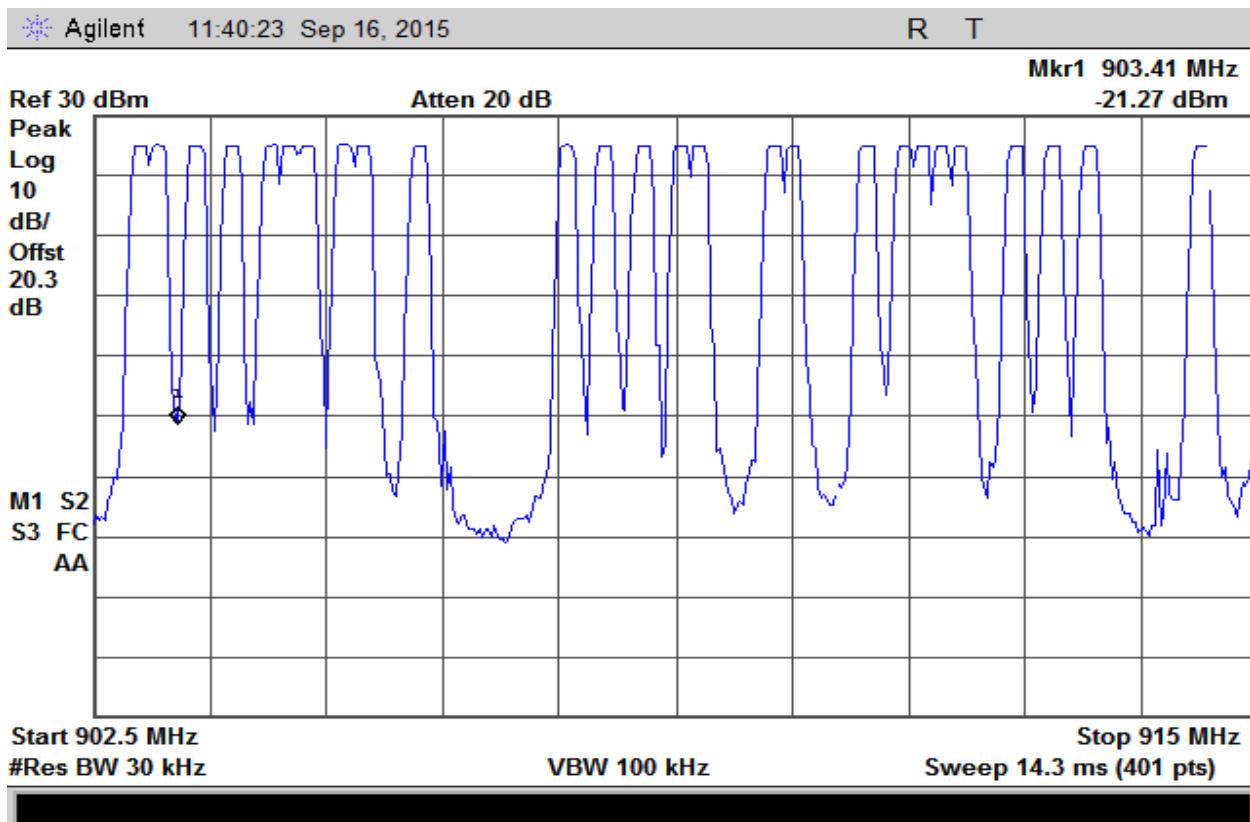

Plot 22 – Number of Frequency Hops – 902.5MHz to 915MHz

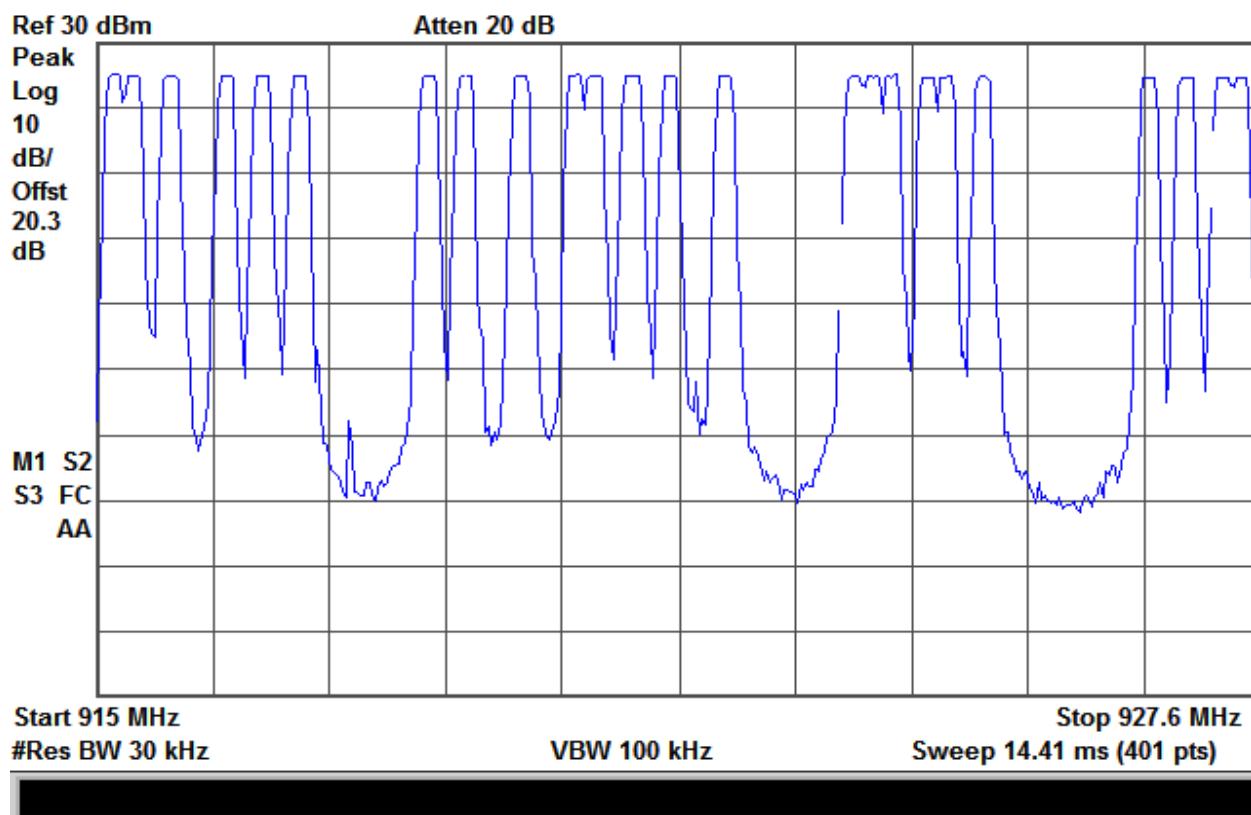

Plot 23 – Number of Frequency Hops – 915MHz to 927.6MHz

9. Carrier Frequency Separation


Test Requirement(s):	§15.247(a)(1)	Test Engineer(s):	Keith T.
Test Results:	Pass	Test Date(s):	09/16/15

Test Procedures: As required by 47 CFR 15.247(a), for frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Measurements were made with device hopping function enabled.

The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT. Peak detector was used and trace was set to max hold.

Frequency Measured (MHz)	Frequency Separation (kHz)	Detector	Limit (20dB BW)
916.0	600 kHz	Peak	220.67 kHz

Table 18 – Carrier Frequency Separation - Summary

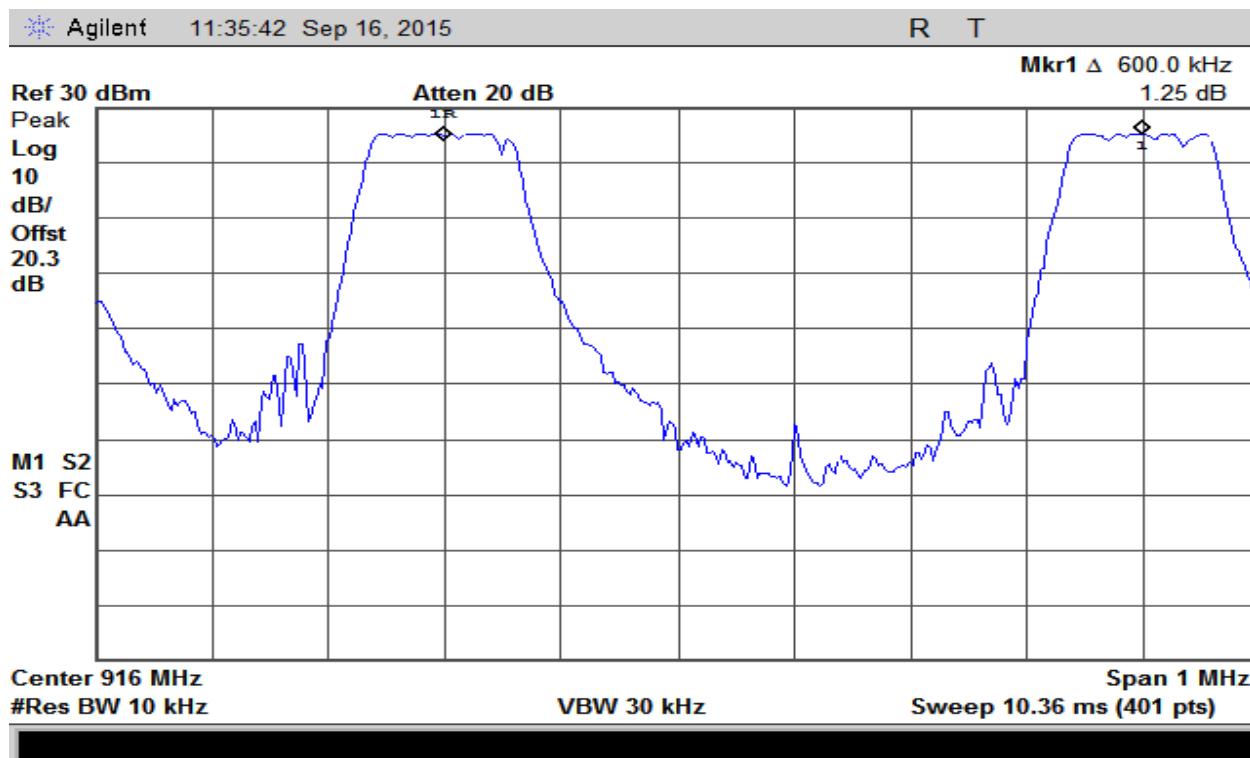

Plot 24 – Carrier Frequency Separation (Using Delta Marker Method)

I. Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E4402B	US41192757	Jan/27/15	Jan/27/16
Temperature Meter	Control Company	6066N53	140536623	Aug/08/14	Aug/08/16
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Oct/03/15	Oct/03/16
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Sep/19/14	Sep/19/15
High Pass Filter	Mini-Circuits	VHF-3100+	1023	Verified	
EMI Receiver	R&S	ESCS-30	828985/007	Dec/02/14	Dec/02/15
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
Signal Generator	R&S	SMY02	1062.5502.12	Verified	
Attenuator 10dB	Huber+Suhner	6810.17.A	747300	Verified	
Horn Antenna	Com-Power	AHA-118	711150	Feb/10/15	Feb/10/16
Bilog Antena	Chase	CBL6140	1040	Nov/09/14	Nov/09/15

Table 19 – Test Equipment List

***Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

END OF TEST REPORT