

Issued: 2017-01-17

## **TEST REPORT**

Applicant Name &

: Guangzhou MCOHome Technology Co., Ltd.

Address

Room 202, Hi-tech Innovation Plaza, Panyu Hi-tech Ecological Park, No.555

Panyu Avenue N., Guangzhou, China

Sample Description

Product : Touch Panel Switch/Touch Panel Dimmer

ID : 2ACTJMH510001

Model No. : Touch Panel Switch: MH-S511-US, MH-S511H-US, MH-S512-US, MH-S513-

US, MH-S511Z-US

Touch Panel Dimmer: MH-P511-US

Electrical Rating : 120Vac, 60Hz

MH-S511-US, MH-S512-US, MH-S513-US: output: 3.5A/each port

MH-P511-US: output: 2.5A/each port

MH-S511H-US, MH-S511Z-US: output: 10A/each port

Date Received : 06 December 2016

Date Test Conducted : 07 December 2016 – 23 December 2016

Test standards : 47 CFR PART 15 Subpart C: 2015 section 15.249

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

Prepared and Checked By:

Approved By:

Daniel He

Project Engineer

Intertek Guangzhou

Helen Ma Team Leader

Intertek Guangzhou

17 Jan., 2017 Date

Signature

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

FCC ID: 2ACTJMH510001 Page 1 of 30



Issued: 2017-01-17

# **CONTENT**

TEST	T REPORT	1	1
CON	TENT		2
1.0	Summa	ary of Test	3
2.0		l Description	
	2.1	Product Description	.4
	2.2	Related Submittal(s) Grants	. 5
	2.3	Test Methodology	. 5
	2.4	Test Facility	. 5
3.0	System	Test Configuration	6
	3.1	Justification	.6
	3.2	EUT Exercising Software	.7
	3.3	Special Accessories	.7
	3.4	Measurement Uncertainty	.7
	3.5	Equipment Modification	.7
	3.6	Support Equipment List and Description	.7
4.0	Measur	rement Results	8
	4.1	Antenna Requirement:	. 8
	4.2	Occupied Bandwidth:	.9
	4.7	Radiated Emission	
	4.8	Band Edges Requirement	21
	4.9	Conducted Emissions at Mains Terminals	24
5.0	Test Equip	ment List	.29



Issued: 2017-01-17

#### 1.0 **Summary of Test**

TEST	TEST REQUIREMENT	TEST METHOD	RESULT	
Antenna Requirement	FCC PART 15 C	FCC PART 15 C	PASS	
Timedina requirement	Section 15.203	Section 15.203	11100	
Occupied Bandwidth	FCC PART 15 C	ANSI C63.10: Clause 6.9	PASS	
occupied Buildwidth	section 15.215(c)	ANSI C03.10. Clause 0.9	17100	
	FCC PART 15 C	ANSI C63.10: Clause 6.4,		
Radiated Emission	section 15.249 (a), (d)	6.5 & 6.6	PASS	
Band Edges Measurement	FCC PART 15 C	ANSI C63.10: Clause 6.10	PASS	
5	section 15.249 (d)	111,21 000,10, 01,000		
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS	

## Remark:

N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.

FCC ID: 2ACTJMH510001 Page 3 of 30



Issued: 2017-01-17

## 2.0 General Description

## 2.1 Product Description

Operating Frequency 908.42 MHz

Type of Modulation: FSK

Number of Channels 1 Channel

Channel Separation: N/A

Antenna Type FPC antenna

Antenna gain: 0 dBi Speciality: Z - wave

Function: The product is a wall switch with built-in Z-Wave module. It

supports basic command class, it supports basic command class, association command class, which can control all associated

devices synchronously.

#### Model differences:

The circuit and PCB layout are similar for the five models, MH-P511-US is a touch dimmer, other four models are touch switches, the output for the four switches are different: MH-S511-US has one output port, MH-S512-US has two output ports, MH-S513-US has three output ports, model MH-S511H-US has one output port, its output current is 10A, while MH-S511-US is 3.5A. The difference between MH-S511H-US and MH-S511Z-US is the relay, and MH-S511Z-US has one more mechanical switch.

Based on above statement, select MH-P511-US and MH-S513-US to performed Radiated Emission and Conducted Emission tests, other frequency spectrum test are performed on MH-S513-US.

FCC ID: 2ACTJMH510001 Page 4 of 30



Issued: 2017-01-17

#### 2.2 Related Submittal(s) Grants

This is an application for certification of:

DXX- Part 15 Low Power Communications Device Transmitter.

Remaining portions are subject to the following procedures:

1. Receiver portion: Verification Procedure.

## 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10:2013. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

## 2.4 Test Facility

All of the tests are performed at: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China.

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

FCC ID: 2ACTJMH510001 Page 5 of 30



Issued: 2017-01-17

## 3.0 System Test Configuration

#### 3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, AC power line was manipulated to produce worst case emissions. It was powered by AC 120V/60Hz supply.

The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

FCC ID: 2ACTJMH510001 Page 6 of 30



Issued: 2017-01-17

## 3.2 EUT Exercising Software

No special software used during test.

## 3.3 Special Accessories

No special accessories used during test.

## 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

## 3.5 Equipment Modification

Any modifications installed previous to testing by Guangzhou MCOHome Technology Co., Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

## 3.6 Support Equipment List and Description

N/A

FCC ID: 2ACTJMH510001 Page 7 of 30



Issued: 2017-01-17

## 4.0 Measurement Results

## 4.1 Antenna Requirement:

Standard requirement


15.203 requirement:

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


**EUT Antenna** 

The antenna is a FPC antenna and no consideration of replacement. The best case gain of the antenna is 0 dBi.

## MH-P511-US:

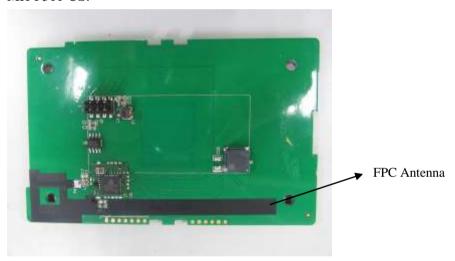

#### MH-S513-US:

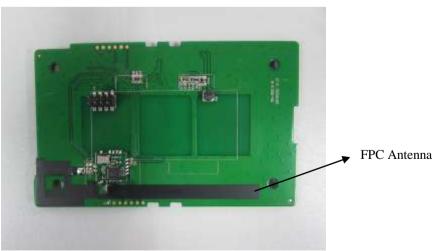

FCC ID: 2ACTJMH510001 Page 8 of 30



Issued: 2017-01-17

## 4.2 Occupied Bandwidth:

Test Requirement: FCC PART 15 C section 15.215(c)

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency

band designated in the rule section under which the equipment is

operated.


Test Method: ANSI C63.10: Clause 6.9

Test Status: Pre-Scan has been conducted to determine the worst-case mode

from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The highest, middle and the lowest channels were

selected for the final test as listed below.

**Test Configuration:** 

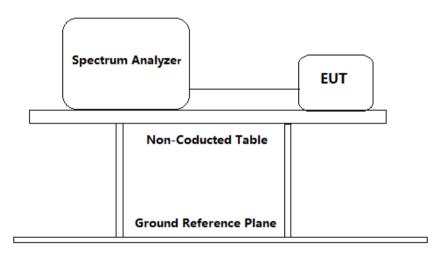

#### Test Procedure:

The transmitter was operated at its maximum carrier power measured under normal test conditions.

- a) The instrument center frequency was set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer was between 1.5 times and 5.0 times the OBW(20 dB Bandwidth).
- b) The nominal IF filter bandwidth (3 dB RBW) was in the range of 1% to 5% of the OBW, and VBW was approximately three times the RBW.

FCC ID: 2ACTJMH510001 Page 9 of 30



Issued: 2017-01-17


- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope was more than [10 log (OBW/RBW)] below the reference level.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) The dynamic range of the instrument at the selected RBW was more than 10 dB below the target "-20 dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW was at least 30 dB below the reference value.
- f) Peak detection and max hold mode (until the trace stabilizes) was used.
- g) Used the 20dB bandwidth function of the instrument and reported the measured bandwidth.
- h) The occupied bandwidth was reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division was clearly labeled. Tabular data was reported in addition to the plot(s).

#### 20 dB bandwidth:

Frequency	Measured 20dB	Limit	Dagult	
(MHz)	bandwidth (kHz)	(kHz)	Result	
908.398	448.60	/	Pass	

## 20dB bandwidth:

Result plot as follows:

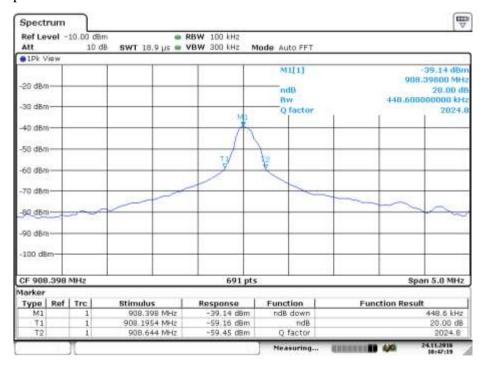

FCC ID: 2ACTJMH510001 Page 10 of 30



Issued: 2017-01-17

#### 4.7 Radiated Emission

Test Requirement: FCC PART 15 C section 15.249 (a), (d)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
(MHz)	(dBµV/m @ 3m)	(dBµV/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0

**Note:** The limits shown in the above table are based on measurements using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using a CISPR quasi-peak detector.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6

Test Status: Pre-Scan has been conducted to determine the worst-case mode

from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity

architecture).

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: The field strength of radiated emission outside of the specified frequency bands, except for harmonics at a distance of 3 meters

shall not exceed the following values:

Frequency (MHz)	Field Strength
	(dBµV/m @ 3m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

Detector: For Peak and Quasi-Peak value:

200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz

FCC ID: 2ACTJMH510001 Page 11 of 30



Issued: 2017-01-17

120 kHz for 30 MHz to 1GHz RBW = 1 MHz for  $f \ge 1$  GHz

VBW ≥ RBW

Sweep = auto

Detector function = peak for  $f \ge 1$  GHz, QP for f < 1 GHz

Trace = max hold

According 15.35(c), when the field strength (or envelope power) is not constant or it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 second, the average value of field strength or output power shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.

The average correction factor was computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency was: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:


The duration of one cycle = 102.319ms

Effective period of the cycle = 31.304 ms

DC =31.304/100=0.31304 or 31.304%

Therefore, the averaging factor is found by 20lg0.31304= -10.09

Please refer to below plots for more details.

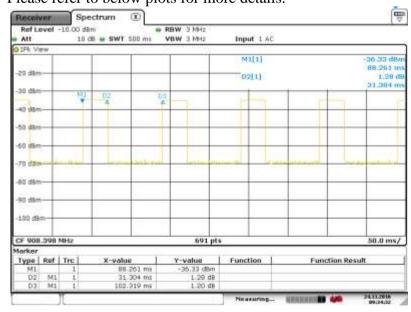

FCC ID: 2ACTJMH510001 Page 12 of 30



Issued: 2017-01-17

Section 15.205 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090 - 0.110 10.495 - 0.505 2.1735 - 2.1905 4.125 - 4.128 4.17725 - 4.17775 4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 - 8.366 8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293 12.51975 - 12.52025 12.57675 - 12.57725 13.36 - 13.41	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25 73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 - 156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2 240 - 285 322 - 335.4	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5 1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390 2483.5 - 2500 2655 - 2900 3260 - 3267 3332 - 3339 3345.8 - 3358 3600 - 4400	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2 9.3 - 9.5 10.6 - 12.7 13.25 - 13.4 14.47 - 14.5 15.35 - 16.2 17.7 - 21.4 22.01 - 23.12 23.6 - 24.0 31.2 - 31.8 36.43 - 36.5


FCC ID: 2ACTJMH510001 Page 13 of 30



Issued: 2017-01-17


# Test Configuration:

1) 9 kHz to 30 MHz emissions:

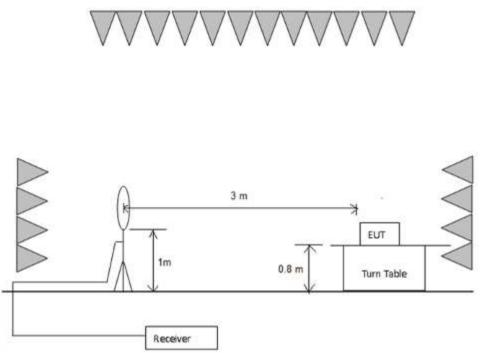

2) 30 MHz to 1 GHz emissions:



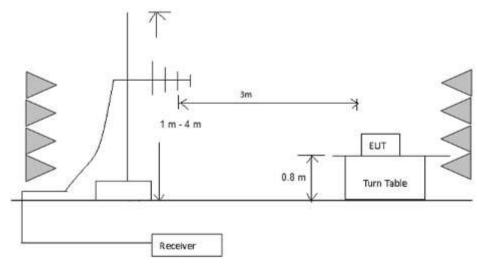


FCC ID: 2ACTJMH510001 Page 14 of 30



Issued: 2017-01-17

## 3) 1 GHz to 40 GHz emissions:



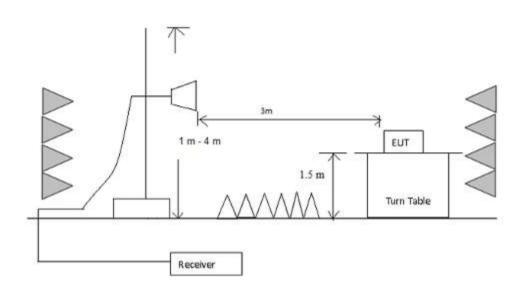



Issued: 2017-01-17

#### **Test Procedure:**

## 1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

## 2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

## 3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

FCC ID: 2ACTJMH510001 Page 16 of 30



Issued: 2017-01-17

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

## **Radiated Emissions (Below 1GHz)**

Model: MH-S513-US

Polarization	Frequency (MHz)	PK Reading (dBµV)	Correction Factor (dB)	PK Net at 3m (dBµV/m)	AV Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	908.414	52.0	25.7	77.7	94.0	-16.3
Horizontal	53.642	9.0	12.7	21.7	54.0	-32.3
Horizontal	574.531	12.2	16.3	28.5	54.0	-25.5
Vertical	908.527	43.8	25.7	69.5	94.0	-24.5
Vertical	100.438	6.6	13.2	19.8	54.0	-34.2
Vertical	407.69	10.5	14.2	24.7	54.0	-29.3

Notes:


1. All measurements were made at 3 meter.

- 2. Negative value in the margin column shows emission below limit.
- 3. When Peak emission level was below AV limit, the AV emission level was not recorded.

Test Curve:

Model: MH-S513-US

Horizontal:

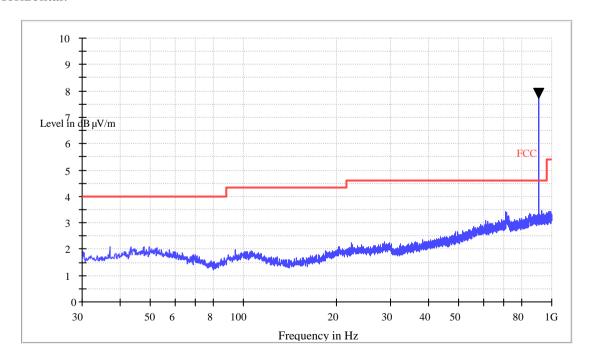


FCC ID: 2ACTJMH510001 Page 17 of 30



Issued: 2017-01-17

Model: MH-S513-US

Vertical:

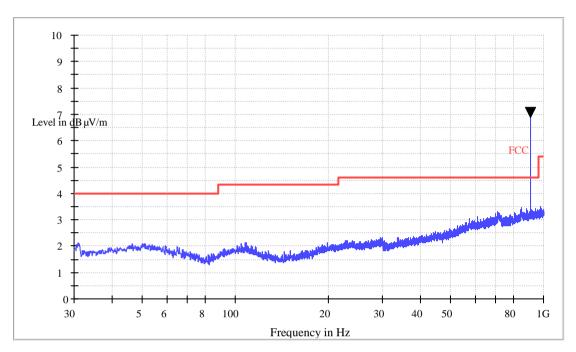

## **Radiated Emissions (Above 1GHz)**

Model: MH-S513-US

Polarization	' '	PK	Correction	PK Net	Average Limit	Margin
	(MHz)	Reading	Factor	at 3m	at 3m	(dB)
		(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	
Horizontal	1816.400	48.4	-9.6	38.8	54.0	-15.2
Horizontal	8297.600	42.9	4.9	47.8	54.0	-6.2
Horizontal	10802.800	41.1	8.0	49.1	54.0	-4.9
Vertical	1816.400	47.9	-9.6	38.3	54.0	-15.7
Vertical	5914.000	43.3	2.1	45.4	54.0	-8.6
Vertical	7030.800	44.0	2.8	46.8	54.0	-7.2

Notes:

- 1. All measurements were made at 3 meter.
- 2. Negative value in the margin column shows emission below limit.
- 3. Horn antenna is used for the emission over 1000MHz.
- 4. When Peak emission level was below AV limit, the AV emission level was not recorded.

FCC ID: 2ACTJMH510001 Page 18 of 30



Issued: 2017-01-17

## **Radiated Emissions (Below 1GHz)**

Model: MH-P511-US

Polarization	Frequency (MHz)	PK Reading (dBµV)	Correction Factor (dB)	PK Net at 3m (dBµV/m)	AV Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	908.396	56.9	25.7	82.6	94.0	-11.4
Horizontal	68.742	10.0	12.7	22.7	54.0	-31.3
Horizontal	765.900	23.2	16.3	39.5	54.0	-14.5
Vertical	908.527	50.5	25.7	76.2	94.0	-17.8
Vertical	130.532	10.4	13.2	23.6	54.0	-30.4
Vertical	509.428	19.7	14.2	33.9	54.0	-20.1


Notes:

- 1. All measurements were made at 3 meter.
- 2. Negative value in the margin column shows emission below limit.
- 3. When Peak emission level was below AV limit, the AV emission level was not recorded.

Test Curve:

Model: MH-P511-US

Horizontal:

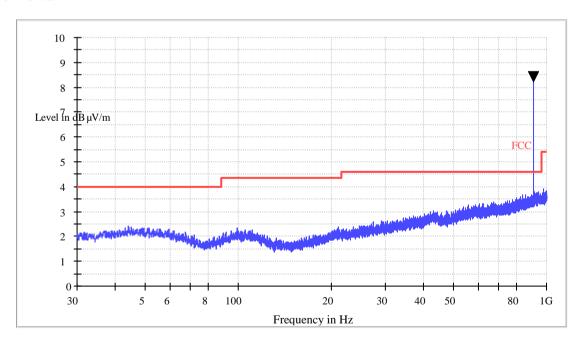


FCC ID: 2ACTJMH510001 Page 19 of 30



Issued: 2017-01-17

Model: MH-P511-US

Vertical:

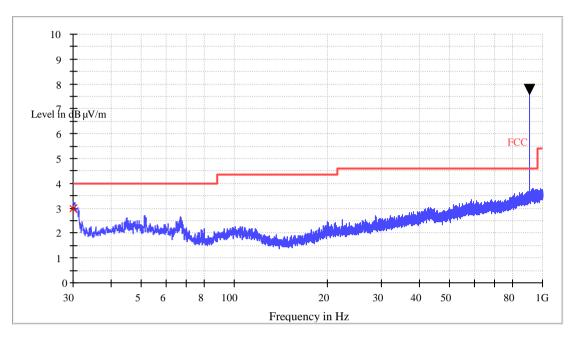

## **Radiated Emissions (Above 1GHz)**

Model: MH-P511-US

Polarization	Frequency (MHz)	PK Reading (dBµV)	Correction Factor (dB)	PK Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	1816.750	62.4	-14.8	47.6	54.0	-6.4
Horizontal	2453.500	45.1	-12.7	32.4	54.0	-21.6
Horizontal	6178.000	43.4	-7.2	36.2	54.0	-17.8
Vertical	1816.400	54.3	-14.8	39.5	54.0	-14.5
Vertical	2591.593	47.4	-12.3	35.1	54.0	-18.9
Vertical	4534.800	42.6	-8.7	33.9	54.0	-20.1

Notes:

- 1. All measurements were made at 3 meter.
- 2. Negative value in the margin column shows emission below limit.
- 3. Horn antenna is used for the emission over 1000MHz.
- 4. When Peak emission level was below AV limit, the AV emission level was not recorded.

FCC ID: 2ACTJMH510001 Page 20 of 30



Issued: 2017-01-17

## 4.8 Band Edges Requirement

Test Requirement: FCC PART 15 C section 15.249 (d)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission

limits in § 15.209, whichever is the lesser attenuation.


Frequency Band: 2400 MHz to 2483.5 MHz
Test Method: ANSI C63.10: Clause 6.10

Test Status: Pre-Scan has been conducted to determine the worst-case mode

from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The lowest, middle and the highest channels were

selected for the final test as listed below.

**Test Configuration:** 

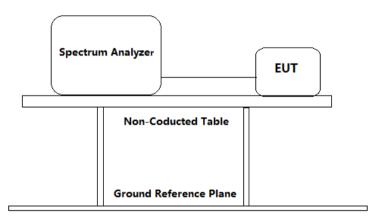



FCC ID: 2ACTJMH510001 Page 21 of 30



Issued: 2017-01-17

# Test result with plots as follows: Result plot as follows:

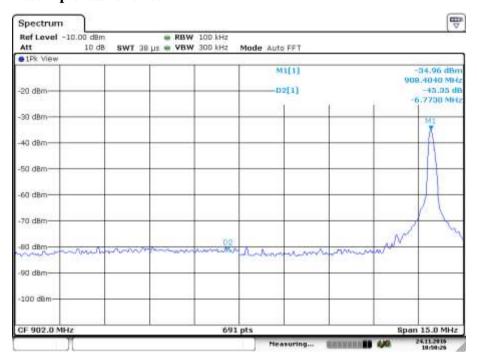

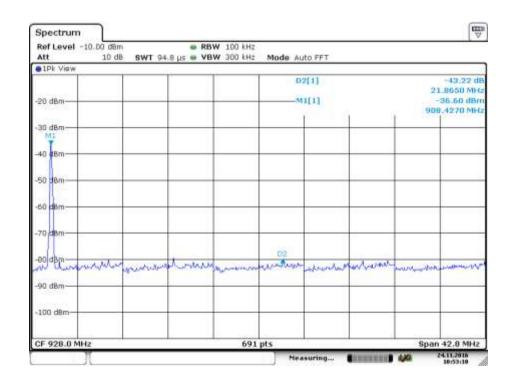

FCC ID: 2ACTJMH510001 Page 22 of 30



Issued: 2017-01-17

## Peak Measurement

Band-edge compliance is determined by applying marker-delta method, i.e (Band-edge Plot).

Compared the two models: MH-S513-US and MH-P511-US, MH-P511-US has worse Emission data at the Fundamental frequency, so select MH-P511-US for below calculation:

## (i) Lower band-edge:

Peak Resultant field strength

- =Fundamental emissions (peak value) delta from the band-edge plot
- $= 82.6 dB \mu v/m 45.35 dB$
- $= 37.25 dB \mu v/m$

## (ii) Upper band-edge:

Peak Resultant field strength

- =Fundamental emissions (peak value) delta from the band-edge plot
- $= 82.6 dB \mu v/m 43.22 dB$
- $= 39.38 dB \mu v/m$

The Peak resultant field strength meets the general radiated emission AV limit  $54dB\,\mu\nu/m$ , so it complies with the requirement.


FCC ID: 2ACTJMH510001 Page 23 of 30



Issued: 2017-01-17

#### 4.9 Conducted Emissions at Mains Terminals

## **Test Configuration:**

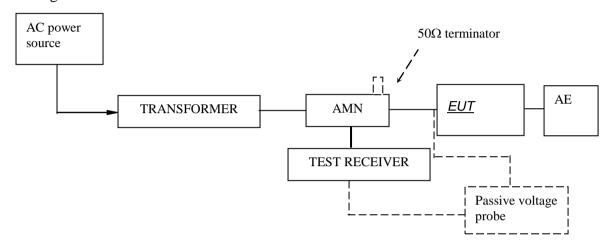

## Test Setup and Procedure

Test was performed according to ANSI C63.10 Clause 6.2. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a  $50\Omega$  linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

FCC ID: 2ACTJMH510001 Page 24 of 30




Issued: 2017-01-17

Test Data

At main terminal: Pass

Model: MH-S513-US

Tested Wire: Live Operation Mode: transmitting mode

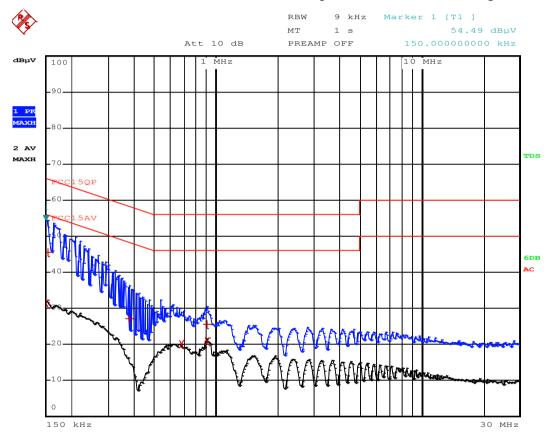

EDIT	PEAK LIST (Final	Measurement Resul	ts)
Tracel:	FCC15QP		
Trace2:	FCC15AV		
Trace3:			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	150 kHz	31.38 L1	-24.61
1 Quasi Peak	154 kHz	45.54 L1	-20.23
1 Quasi Peak	378 kHz	27.11 L1	-31.21
2 Average	678 kHz	19.94 L1	-26.05
1 Quasi Peak	906 kHz	25.63 L1	-30.36
2 Average	906 kHz	20.93 L1	-25.06


FCC ID: 2ACTJMH510001 Page 25 of 30



Issued: 2017-01-17

Model: MH-S513-US

Tested Wire: Neutral Operation Mode: Transmitting mode

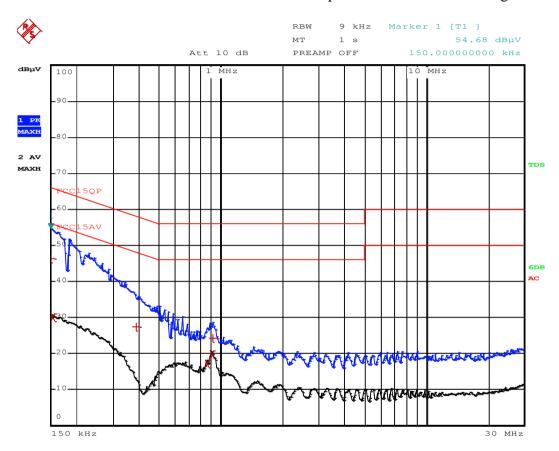

EDIT	r PEAK LIST (Final	Measurement Resul	ts)
Tracel:	FCC15QP		
Trace2:	FCC15AV		
Trace3:			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Quasi Peak	150 kHz	46.30 L1	-19.69
2 Average	154 kHz	30.04 L1	-25.73
1 Quasi Peak	386 kHz	27.41 L1	-30.73
2 Average	854 kHz	17.27 L1	-28.72
2 Average	906 kHz	19.70 L1	-26.29
1 Quasi Peak	910 kHz	24.17 L1	-31.82


FCC ID: 2ACTJMH510001 Page 26 of 30



Issued: 2017-01-17

Model: MH-P511-US

Tested Wire: Live Operation Mode: transmitting mode

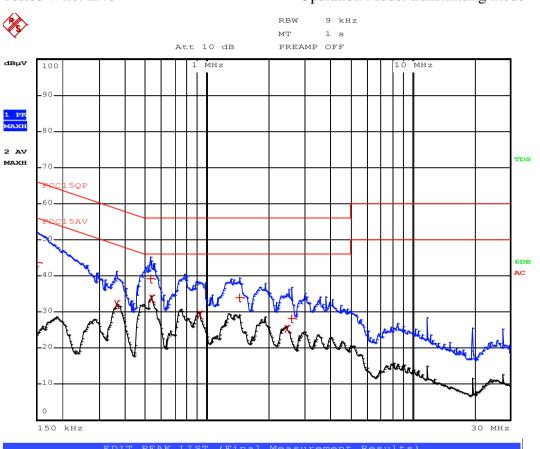


EDIT	F PEAK LIST (Final	Measurement Resul	ts)
Tracel:	FCC15QP		
Trace2:	FCC15AV		
Trace3:			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Quasi Peak	150 kHz	43.81 L1	-22.18
2 Average	362 kHz	32.05 L1	-16.63
1 Quasi Peak	530 kHz	39.26 L1	-16.73
2 Average	538 kHz	33.82 L1	-12.17
2 Average	922 kHz	29.37 L1	-16.62
1 Quasi Peak	1.45 MHz	33.89 L1	-22.10
2 Average	2.446 MHz	25.27 L1	-20.72
1 Quasi Peak	2.578 MHz	28.15 L1	-27.84



Issued: 2017-01-17

Model: MH-P511-US

Tested Wire: Neutral Operation Mode: Transmitting mode

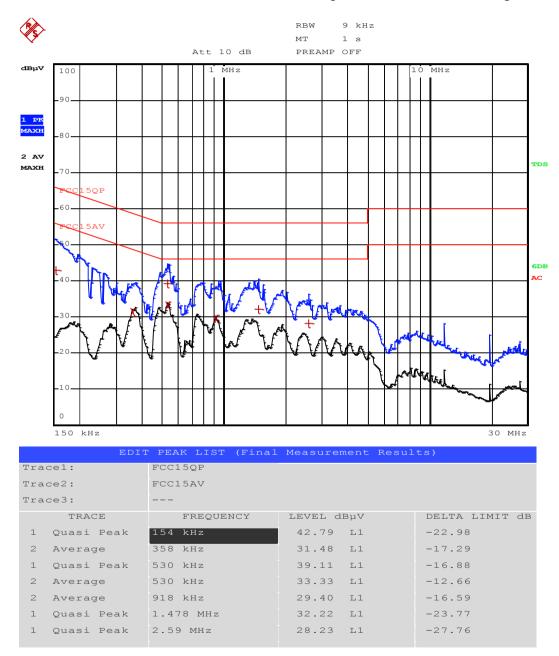

FCC ID: 2ACTJMH510001 Page 28 of 30



Issued: 2017-01-17

# 5.0 Test Equipment List

## **Radiated Emission**

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (MM-DD-YYYY)	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m <sup>3</sup>	ETS·LINDGREN	2017/5/9	1Y
EM080-05	EMI Test Receiver (9 kHz~3 GHz)	ESCI	R&S	2017/7/26	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2018/2/8	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2017/6/3	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2017/6/6	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz-1.5 GHz) (TX)	VULB 9161	SCHWARZBECK	2017/6/6	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX)	VULB 9163	SCHWARZBECK	2017/9/8	1Y
EM033-06	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(TX)	3115	ETS	2017/10/12	1Y
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX)	R&S HF907	R&S	2017/6/6	1Y
EM033-05	Pyramidal Horn Antenna (18 GHz-26.5 GHz)(TX)	3160-09	ETS	2017/3/29	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz)	R&S SCU-26	R&S	2017/4/1	1 <b>Y</b>
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU-40	R&S	2017/4/1	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	N/A	R&S	2017/5/30	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	N/A	R&S	2017/5/30	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2017/4/1	1Y
EM045-01	Broadband power meter	OSP120/OSP -B157	R&S	2018/1/5	1Y
EM082-02	Vector signal generator	SMBV100A	R&S	2017/4/18	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2017/6/11	1Y
EM085-02	Signal Generator (10MHz-40GHz)	68369B	Wiltron	2017/5/23	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM50702	Micro-Tronics	2017/5/9	1Y
SA016-16	Programmable Temperature & Humidity Test Chamber	MHU-800LJ	TERCHY	2017/10/21	1Y
SA012-74	Digital Multimeter	FLUKE175	FLUKE	2017/10/13	1Y
EM010-01	Regulated DC Power supply	PAB-3003A	GUANHUA	N/A	1Y
SA040-22	Regulated DC Power supply	IT6721	ITECH	2017/9/18	1Y
EM084-06	Audio Analyzer	8903B	НР	2017/3/29	1Y
EM084-07	Modulation Analyzer	8901B	НР	2017/6/5	1Y

FCC ID: 2ACTJMH510001 Page 29 of 30



Issued: 2017-01-17

## Conducted emission at the mains terminals test

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date	Calibration
	1. 1			(MM-DD-YYYY)	Interval
EM080-05	EMI receiver	ESCI	R&S	2017/7/26	1Y
EM006-05	LISN	ENV216	R&S	2017/9/18	1Y
SA047-79	Digital Temperature-Humidity Recorder	RC-HT601A	HATAIKE	2017/6/8	1Y
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2018/1/23	1Y

FCC ID: 2ACTJMH510001 Page 30 of 30