

P01 eMTC 2_QPSK20M_Front Face_0.5cm_Ch18700_1RB_OS0**DUT: EUT**

Communication System: eMTC; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.43, 8.43, 8.43) @ 1860 MHz; Calibrated: 2022/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.34 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.590 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 1.67 W/kg

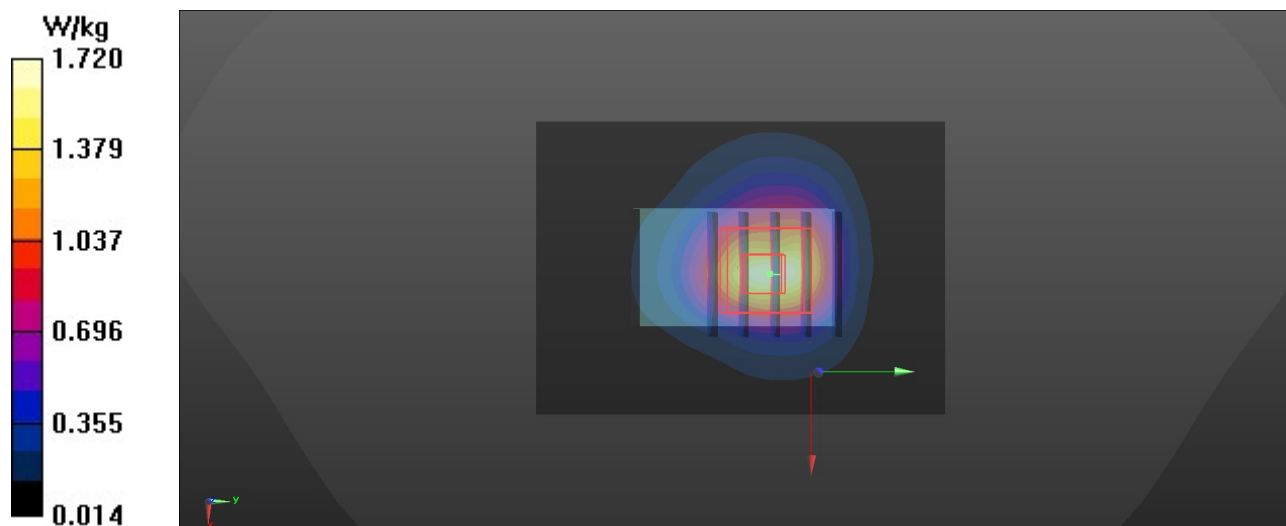

P02 eMTC 4_QPSK20M_Front Face_0.5cm_Ch20300_1RB_OS0**DUT: EUT**

Communication System: eMTC; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 39.379$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(8.79, 8.79, 8.79) @ 1745 MHz; Calibrated: 2022/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- Area Scan (51x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.71 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 34.31 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.550 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 1.48 W/kg

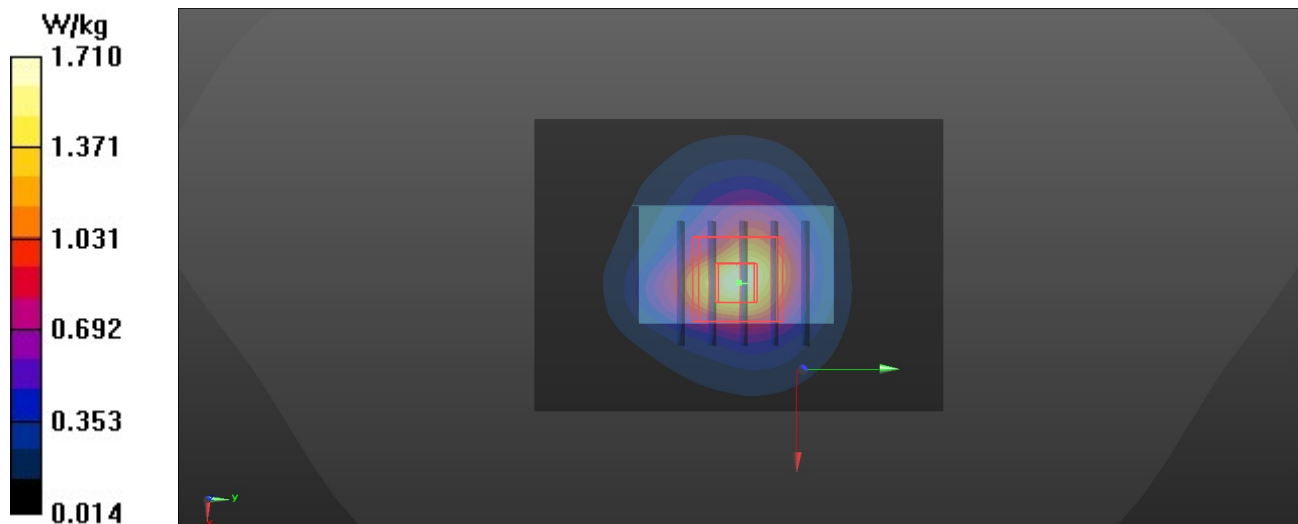

P03 eMTC 12_QPSK10M_Front Face_0.5cm_Ch23060_1RB_OS0**DUT: EUT**

Communication System: eMTC; Frequency: 704 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.592$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.44, 10.44, 10.44) @ 704 MHz; Calibrated: 2022/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x71x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.340 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.87 V/m ; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.206 W/kg ; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.340 W/kg

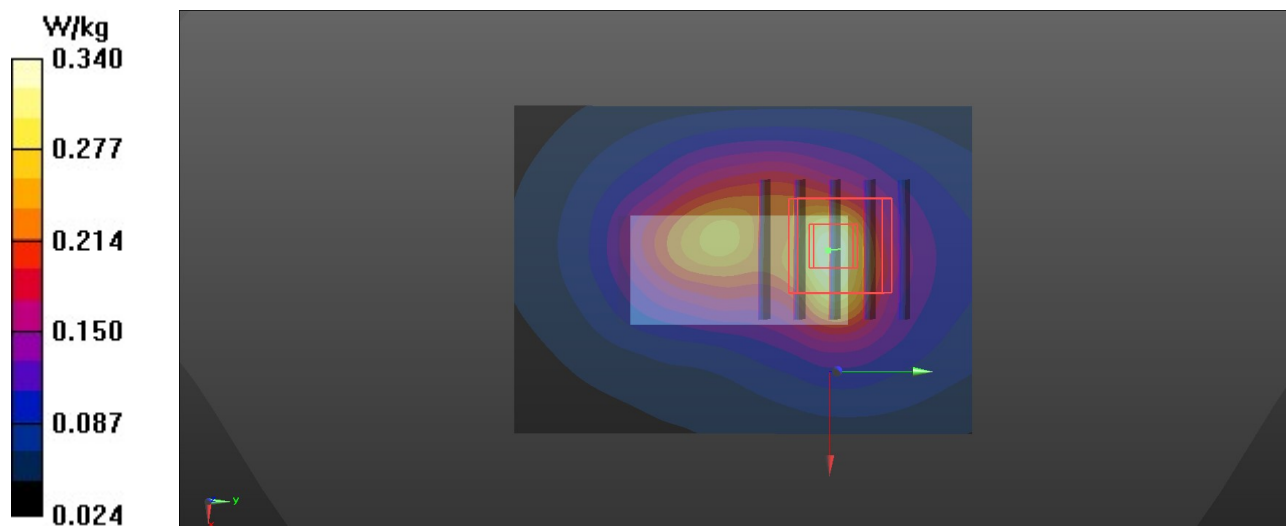

P04 eMTC 13_QPSK10M_Front Face_0.5cm_Ch23230_1RB_OS0

DUT: EUT

Communication System: eMTC; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.377$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(10.44, 10.44, 10.44) @ 782 MHz; Calibrated: 2022/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x71x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.317 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.886 V/m ; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.236 W/kg ; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.380 W/kg

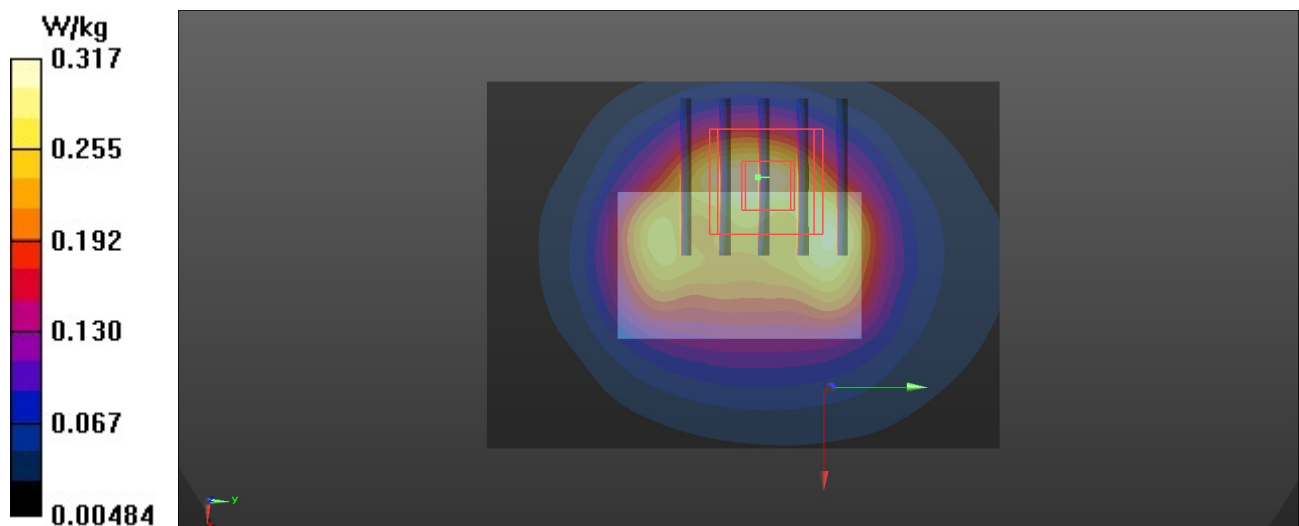

P05 802.11b_Front Face_0.5cm_Ch6**DUT: EUT**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.183$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.85, 7.85, 7.85) @ 2437 MHz; Calibrated: 2022/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- Area Scan (61x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.580 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.06 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.547 W/kg

