

TEST REPORT

Product : Spark Plug
Trade mark : Scalextric®
Model/Type reference : SA00528
Serial Number : N/A
Report Number : EED32L00061001
FCC ID : 2ACUF-SA00528
Date of Issue : Jun. 26, 2019
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Hornby Hobbies Ltd
Enterprise Road Westwood Industrial Estate, CT9 4JX,
United Kingdom

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay Zheng

Compiled by:

Kevin Lan

Reviewed by:

Ware Xin

Approved by:

Kevin yang

Date:


Jun. 26, 2019

Check No.: 1022573910



2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Jun. 26, 2019 | Original |
| | | |
| | | |

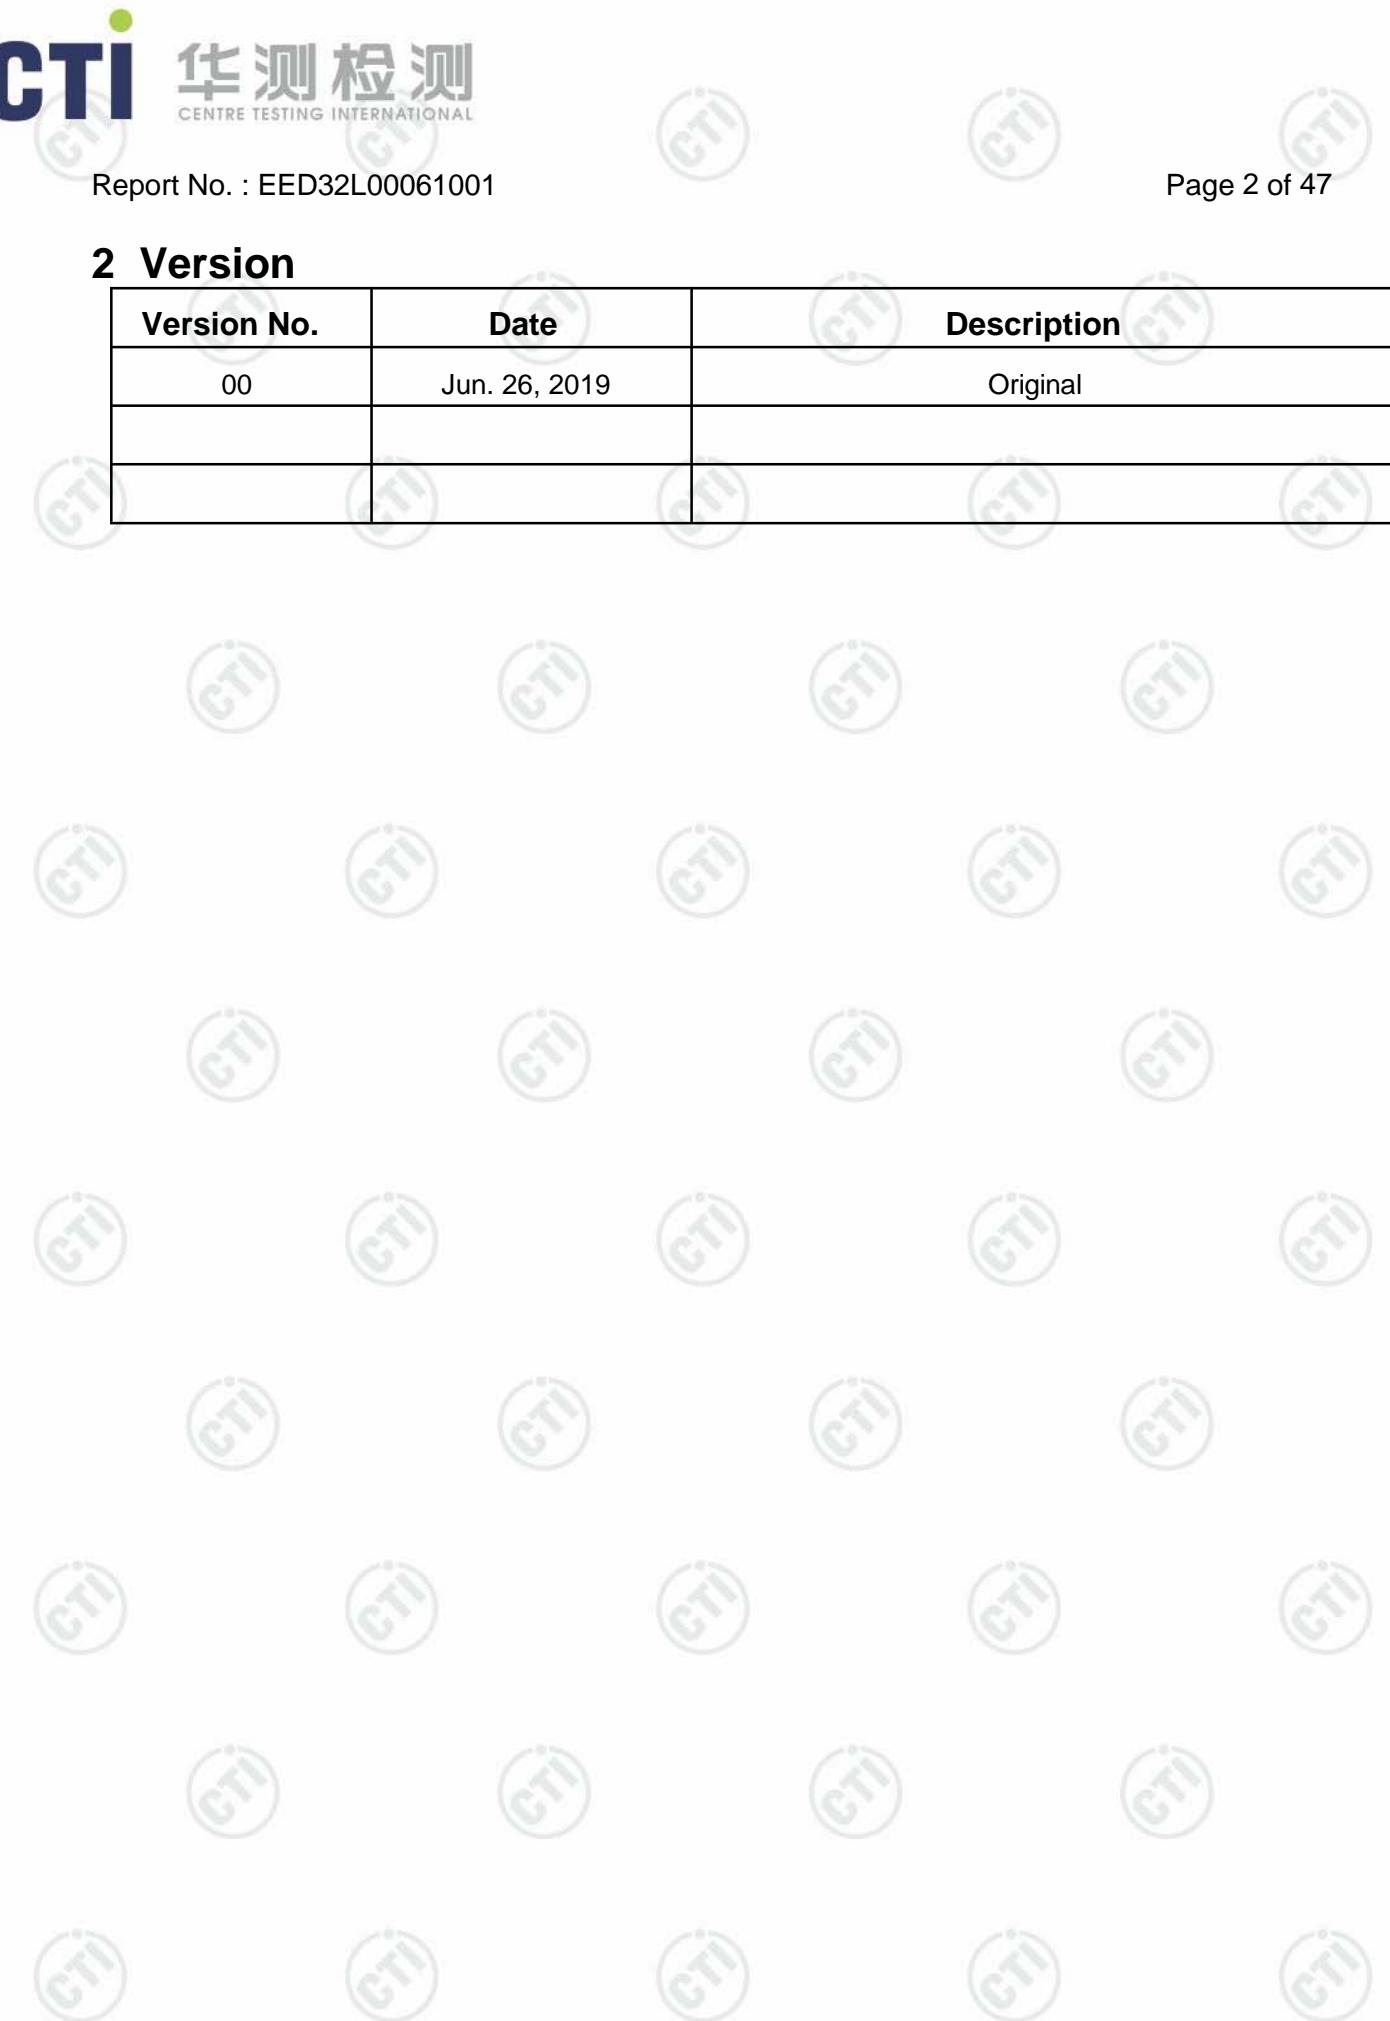

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--|---|------------------|--------|
| Antenna Requirement | 47 CFR Part 15Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 | PASS |
| Power Spectral Density | 47 CFR Part 15Subpart C Section 15.247 (e) | ANSI C63.10-2013 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


4 Content

| | |
|--|----|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENT | 4 |
| 5 TEST REQUIREMENT | 5 |
| 5.1 TEST SETUP..... | 5 |
| 5.1.1 For Conducted test setup..... | 5 |
| 5.1.2 For Radiated Emissions test setup..... | 5 |
| 5.1.3 For Conducted Emissions test setup..... | 6 |
| 5.2 TEST ENVIRONMENT..... | 6 |
| 5.3 TEST CONDITION..... | 6 |
| 6 GENERAL INFORMATION | 7 |
| 6.1 CLIENT INFORMATION..... | 7 |
| 6.2 GENERAL DESCRIPTION OF EUT..... | 7 |
| 6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD..... | 7 |
| 6.4 DESCRIPTION OF SUPPORT UNITS..... | 8 |
| 6.5 TEST LOCATION..... | 8 |
| 6.6 DEVIATION FROM STANDARDS..... | 8 |
| 6.7 ABNORMALITIES FROM STANDARD CONDITIONS..... | 8 |
| 6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 8 |
| 6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 9 |
| 7 EQUIPMENT LIST | 10 |
| 8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 14 |
| Appendix A): 6dB Occupied Bandwidth..... | 15 |
| Appendix B): Conducted Peak Output Power..... | 17 |
| Appendix C): Band-edge for RF Conducted Emissions..... | 19 |
| Appendix D): RF Conducted Spurious Emissions..... | 20 |
| Appendix E): Power Spectral Density..... | 24 |
| Appendix F): Antenna Requirement..... | 26 |
| Appendix G): AC Power Line Conducted Emission..... | 27 |
| Appendix H): Restricted bands around fundamental frequency (Radiated)..... | 30 |
| Appendix I): Radiated Spurious Emissions..... | 35 |
| PHOTOGRAPHS OF TEST SETUP | 39 |
| PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | 41 |

5 Test Requirement




5.1 Test setup

5.1.1 For Conducted test setup

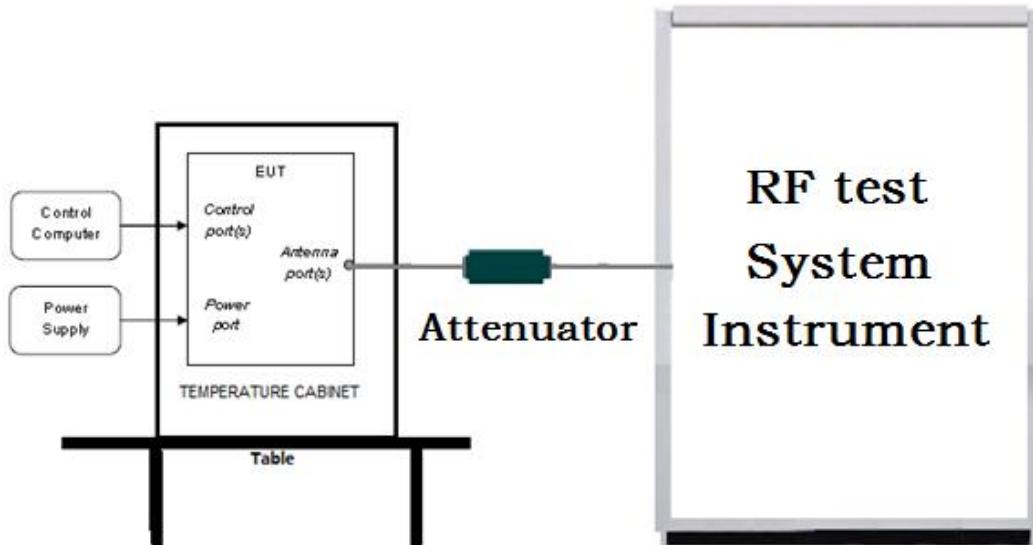


5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

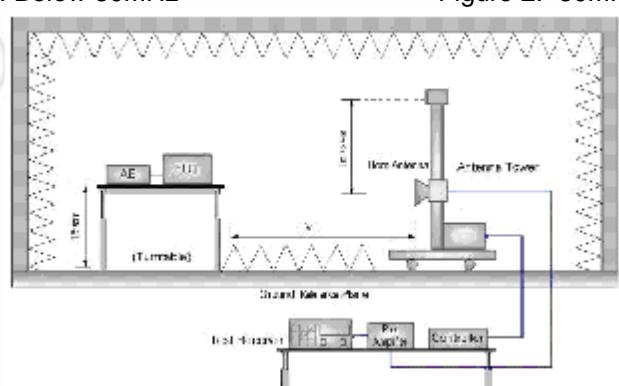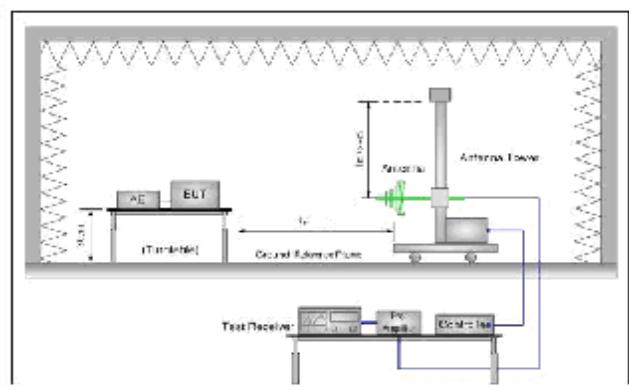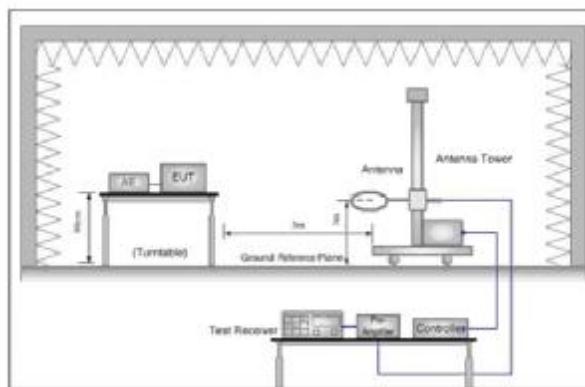

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

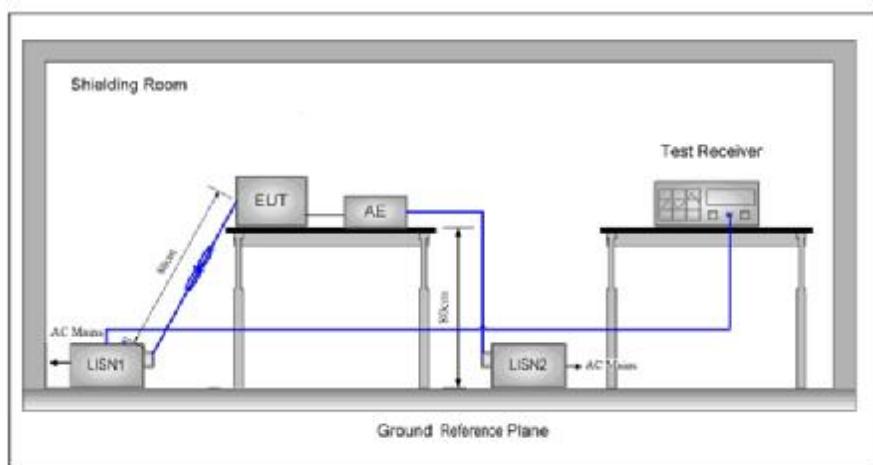

5.2 Test Environment

Operating Environment for RF conducted test:

| | |
|-----------------------|--------|
| Temperature: | 24°C |
| Humidity: | 54% RH |
| Atmospheric Pressure: | 101kPa |

5.3 Test Condition

Test channel:

| Test Mode | Tx | RF Channel | | |
|-----------|---|------------|------------|------------|
| | | Low(L) | Middle(M) | High(H) |
| GFSK | 2402MHz ~2480 MHz | Channel 1 | Channel 20 | Channel 40 |
| TX mode: | The EUT transmitted the continuous signal at the specific channel(s). | | | |

6 General Information

6.1 Client Information

| | |
|--------------------------|---|
| Applicant: | Hornby Hobbies Ltd |
| Address of Applicant: | Enterprise Road Westwood Industrial Estate, CT9 4JX, United Kingdom |
| Manufacturer: | Hornby Hobbies Ltd |
| Address of Manufacturer: | Enterprise Road Westwood Industrial Estate, CT9 4JX, United Kingdom |
| Factory: | Jianhui Plastic & Electronic Industry (Shenzhen) Co. Ltd. |
| Address of Factory: | No. 127, Sili Road, Guanlan Zhen, Longhua District, Shenzhen, China |

6.2 General Description of EUT

| | |
|----------------------------------|--|
| Product Name: | Spark Plug |
| Model No.: | SA00528 |
| Trade mark: | Scalextric® |
| EUT Supports Radios application: | BT4.0 Single Mode; 2402-2480MHz |
| Power Supply: | AC Adapter MODEL No.: P9403W INPUT: 120V AC 60Hz 0.5A OUTPUT: 15V DC 1.2A |
| Hardware Version: | C(manufacturer declare) |
| Firmware Version: | 1(manufacturer declare) |
| Sample Received Date: | Mar. 22, 2019 |
| Sample tested Date: | Apr. 16, 2019 to Jun. 14, 2019 |

6.3 Product Specification subjective to this standard

| | |
|-----------------------|-------------------------------|
| Operation Frequency: | 2402MHz~2480MHz |
| Bluetooth Version: | 4.0 |
| Modulation Technique: | DSSS |
| Modulation Type: | GFSK |
| Number of Channel: | 40 |
| Test Power Grade: | P_m4dbm(manufacturer declare) |
| Test Software of EUT: | wtcdb |
| Antenna Type: | PCB antenna |
| Antenna Gain: | 0dBi |
| Test Voltage: | AC 120V, 60Hz |

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 11 | 2422MHz | 21 | 2442MHz | 31 | 2462MHz |
| 2 | 2404MHz | 12 | 2424MHz | 22 | 2444MHz | 32 | 2464MHz |
| 3 | 2406MHz | 13 | 2426MHz | 23 | 2446MHz | 33 | 2466MHz |
| 4 | 2408MHz | 14 | 2428MHz | 24 | 2448MHz | 34 | 2468MHz |
| 5 | 2410MHz | 15 | 2430MHz | 25 | 2450MHz | 35 | 2470MHz |
| 6 | 2412MHz | 16 | 2432MHz | 26 | 2452MHz | 36 | 2472MHz |
| 7 | 2414MHz | 17 | 2434MHz | 27 | 2454MHz | 37 | 2474MHz |
| 8 | 2416MHz | 18 | 2436MHz | 28 | 2456MHz | 38 | 2476MHz |
| 9 | 2418MHz | 19 | 2438MHz | 29 | 2458MHz | 39 | 2478MHz |
| 10 | 2420MHz | 20 | 2440MHz | 30 | 2460MHz | 40 | 2480MHz |

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
 Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
 Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385
 No tests were sub-contracted.
 FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.9×10^{-8} |
| 2 | RF power, conducted | 0.46dB (30MHz-1GHz) |
| | | 0.55dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.3dB (30MHz-1GHz) |
| | | 4.5dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.5dB (9kHz to 150kHz) |
| | | 3.1dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 3.8% |
| 7 | DC power voltages | 0.026% |

7 Equipment List

| RF test system | | | | | |
|---------------------------------------|-------------------|----------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Signal Generator | Keysight | E8257D | MY53401106 | 03-01-2019 | 02-28-2020 |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 03-01-2019 | 02-28-2020 |
| Signal Generator | Keysight | N5182B | MY53051549 | 03-01-2019 | 02-28-2020 |
| High-pass filter | Sinoscite | FL3CX03WG1 8NM12-0398-0 02 | --- | 01-09-2019 | 01-08-2020 |
| High-pass filter | MICRO-TRO NICS | SPA-F-63029-4 | --- | 01-09-2019 | 01-08-2020 |
| DC Power | Keysight | E3642A | MY54426035 | 03-01-2019 | 02-28-2020 |
| PC-1 | Lenovo | R4960d | --- | 03-01-2019 | 02-28-2020 |
| BT&WI-FI Automatic control | R&S | OSP120 | 101374 | 03-01-2019 | 02-28-2020 |
| RF control unit | JS Tonscend | JS0806-2 | 15860006 | 03-01-2019 | 02-28-2020 |
| RF control unit | JS Tonscend | JS0806-1 | 15860004 | 03-01-2019 | 02-28-2020 |
| RF control unit | JS Tonscend | JS0806-4 | 158060007 | 03-01-2019 | 02-28-2020 |
| BT&WI-FI Automatic test software | JS Tonscend | JS1120-2 | --- | 03-01-2019 | 02-28-2020 |
| Temperature/ Humidity Indicator | biaozhi | HM10 | 1804186 | 10-12-2018 | 10-11-2019 |

| Conducted disturbance Test | | | | | |
|------------------------------------|--------------|-------------------------|----------------|--------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver | R&S | ESCI | 100435 | 05-25-2018 05-20-2019 | 05-24-2019 05-18-2020 |
| Temperature/ Humidity Indicator | Defu | TH128 | / | 07-02-2018 | 07-01-2019 |
| Communication test set | Agilent | E5515C | GB47050 534 | 03-01-2019 | 02-28-2020 |
| Communication test set | R&S | CMW500 | 102898 | 01-18-2019 | 01-17-2020 |
| LISN | R&S | ENV216 | 100098 | 05-11-2018 05-08-2019 | 05-10-2019 05-06-2020 |
| LISN | schwarzbeck | NNLK8121 | 8121-529 | 05-11-2018 05-08-2019 | 05-10-2019 05-06-2020 |
| Voltage Probe | R&S | ESH2-Z3 0299.7810.56 | 100042 | 06-13-2017 | 06-11-2020 |
| Current Probe | R&S | EZ-17 816.2063.03 | 100106 | 05-20-2019 | 05-18-2020 |
| ISN | TESEQ | ISN T800 | 30297 | 01-06-2019 | 01-15-2020 |
| Barometer | changchun | DYM3 | 1188 | 07-02-2018 | 07-01-2019 |

| 3M Semi/full-anechoic Chamber | | | | | |
|----------------------------------|------------------|---------------------------|---------------|--------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber & Accessory Equipment | TDK | SAC-3 | --- | 06-04-2016 05-24-2019 | 06-03-2019 05-22-2022 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 9163-401 | 12-21-2018 | 12-20-2019 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 9163-618 | 07-30-2018 | 07-29-2019 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02425 | 08-21-2018 | 08-20-2019 |
| Microwave Preamplifier | Tonscend | EMC051845S E | 980380 | 01-16-2019 | 01-15-2020 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-1869 | 04-25-2018 | 04-23-2021 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 06-05-2018 | 06-03-2021 |
| Double ridge horn antenna | A.H.SYSTEMS | SAS-574 | 374 | 06-05-2018 | 06-04-2021 |
| Pre-amplifier | A.H.SYSTEMS | PAP-1840-60 | 6041.6041 | 08-08-2018 | 08-07-2019 |
| Loop Antenna | ETS | 6502 | 00071730 | 06-22-2017 | 06-21-2019 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 04-28-2019 | 04-26-2020 |
| Receiver | R&S | ESCI | 100435 | 05-20-2019 | 05-18-2020 |
| Receiver | R&S | ESCI7 | 100938-003 | 11-23-2018 | 11-22-2019 |
| Multi device Controller | maturo | NCD/070/1071 1112 | --- | 01-09-2019 | 01-08-2020 |
| LISN | schwarzbeck | NNBM8125 | 81251547 | 05-11-2018 05-08-2019 | 05-10-2019 05-06-2020 |
| LISN | schwarzbeck | NNBM8125 | 81251548 | 05-11-2018 05-08-2019 | 05-10-2019 05-06-2020 |
| Signal Generator | Agilent | E4438C | MY45095744 | 03-01-2019 | 02-28-2020 |
| Signal Generator | Keysight | E8257D | MY53401106 | 03-01-2019 | 02-28-2020 |
| Temperature/ Humidity Indicator | Shanghai qixiang | HM10 | 1804298 | 10-12-2018 | 10-11-2019 |
| Communication test set | Agilent | E5515C | GB47050534 | 03-01-2019 | 02-28-2020 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(6M) | SF106 | 5220/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(3M) | SF106 | 5216/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(3M) | SF106 | 5217/6A | 01-09-2019 | 01-08-2020 |
| Communication test set | R&S | CMW500 | 104466 | 01-18-2019 | 01-17-2020 |
| High-pass filter | Sinoscite | FL3CX03WG1 8NM12-0398-002 | --- | 01-09-2019 | 01-08-2020 |
| High-pass filter | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX01CA09 CL12-0395-001 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX01CA08 CL12-0393-001 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX02CA04 CL12-0396-002 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX02CA03 CL12-0394-001 | --- | 01-09-2019 | 01-08-2020 |

| 3M full-anechoic Chamber | | | | | |
|--------------------------------|---------------|-------------------|---------------|--------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| RSE Automatic test software | JS Tonscend | JS36-RSE | 10166 | 06-20-2018 | 06-19-2019 |
| Receiver | Keysight | N9038A | MY57290136 | 03-27-2019 | 03-25-2020 |
| Spectrum Analyzer | Keysight | N9020B | MY57111112 | 03-27-2019 | 03-25-2020 |
| Spectrum Analyzer | Keysight | N9030B | MY57140871 | 03-27-2019 | 03-25-2020 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-075 | 04-25-2018 | 04-23-2021 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-076 | 04-25-2018 | 04-23-2021 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 9163-1148 | 04-25-2018 | 04-23-2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-832 | 04-25-2018 | 04-23-2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-829 | 04-25-2018 | 04-23-2021 |
| Communication Antenna | Schwarzbeck | CLSA 0110L | 1014 | 02-15-2018 02-14-2019 | 02-14-2019 02-12-2020 |
| Biconical antenna | Schwarzbeck | VUBA 9117 | 9117-381 | 04-25-2018 | 04-23-2021 |
| Horn Antenna | ETS-LINDGR EN | 3117 | 00057407 | 07-10-2018 | 07-08-2021 |
| Preamplifier | EMCI | EMC184055SE | 980596 | 06-20-2018 | 06-19-2019 |
| Communication test set | R&S | CMW500 | 102898 | 01-18-2019 | 01-17-2020 |
| Preamplifier | EMCI | EMC001330 | 980563 | 06-20-2018 | 06-19-2019 |
| Preamplifier | Agilent | 8449B | 3008A02425 | 08-21-2018 | 08-20-2019 |
| Temperature/Humidity Indicator | biaozhi | GM1360 | EE1186631 | 05-02-2018 04-30-2019 | 05-01-2019 04-28-2020 |
| Signal Generator | KEYSIG HT | E8257D | MY53401106 | 03-13-2018 03-01-2019 | 03-12-2019 02-28-2020 |
| Fully Anechoic Chamber | TDK | FAC-3 | --- | 01-17-2018 | 01-15-2021 |
| Filter bank | JS Tonscend | JS0806-F | 188060094 | 04-10-2018 | 04-08-2021 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0002 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0003 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 393495-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | EMC104-NMNM-1000 | SN160710 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-3.00M | 394813-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMNM-1.50M | 381964-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-7.00M | 394815-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | HF160-KMKM-3.00M | 393493-0001 | 01-09-2019 | 01-08-2020 |

8 Radio Technical Requirements Specification

Reference documents for testing:

| No. | Identity | Document Title |
|-----|--------------------|--|
| 1 | FCC Part15C (2015) | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

Test Results List:

| Test Requirement | Test method | Test item | Verdict | Note |
|-----------------------------------|-------------|---|---------|-------------|
| Part15C Section 15.247 (a)(2) | ANSI C63.10 | 6dB Occupied Bandwidth | PASS | Appendix A) |
| Part15C Section 15.247 (b)(3) | ANSI C63.10 | Conducted Peak Output Power | PASS | Appendix B) |
| Part15C Section 15.247(d) | ANSI C63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix C) |
| Part15C Section 15.247(d) | ANSI C63.10 | RF Conducted Spurious Emissions | PASS | Appendix D) |
| Part15C Section 15.247 (e) | ANSI C63.10 | Power Spectral Density | PASS | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement | PASS | Appendix F) |
| Part15C Section 15.207 | ANSI C63.10 | AC Power Line Conducted Emission | PASS | Appendix G) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS | Appendix H) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Radiated Spurious Emissions | PASS | Appendix I) |

Appendix A): 6dB Occupied Bandwidth**Test Result**

| Mode | Channel | 6dB Bandwidth [MHz] | 99% OBW[MHz] | Verdict |
|------|---------|---------------------|--------------|---------|
| BLE | LCH | 0.6758 | 1.0554 | PASS |
| BLE | MCH | 0.7054 | 1.0680 | PASS |
| BLE | HCH | 0.7019 | 1.0687 | PASS |




Test Graphs


Appendix B): Conducted Peak Output Power**Test Result**

| Mode | Channel | Conduct Peak Power[dBm] | Verdict |
|------|---------|-------------------------|---------|
| BLE | LCH | -8.997 | PASS |
| BLE | MCH | -7.884 | PASS |
| BLE | HCH | -7.298 | PASS |


Test Graphs

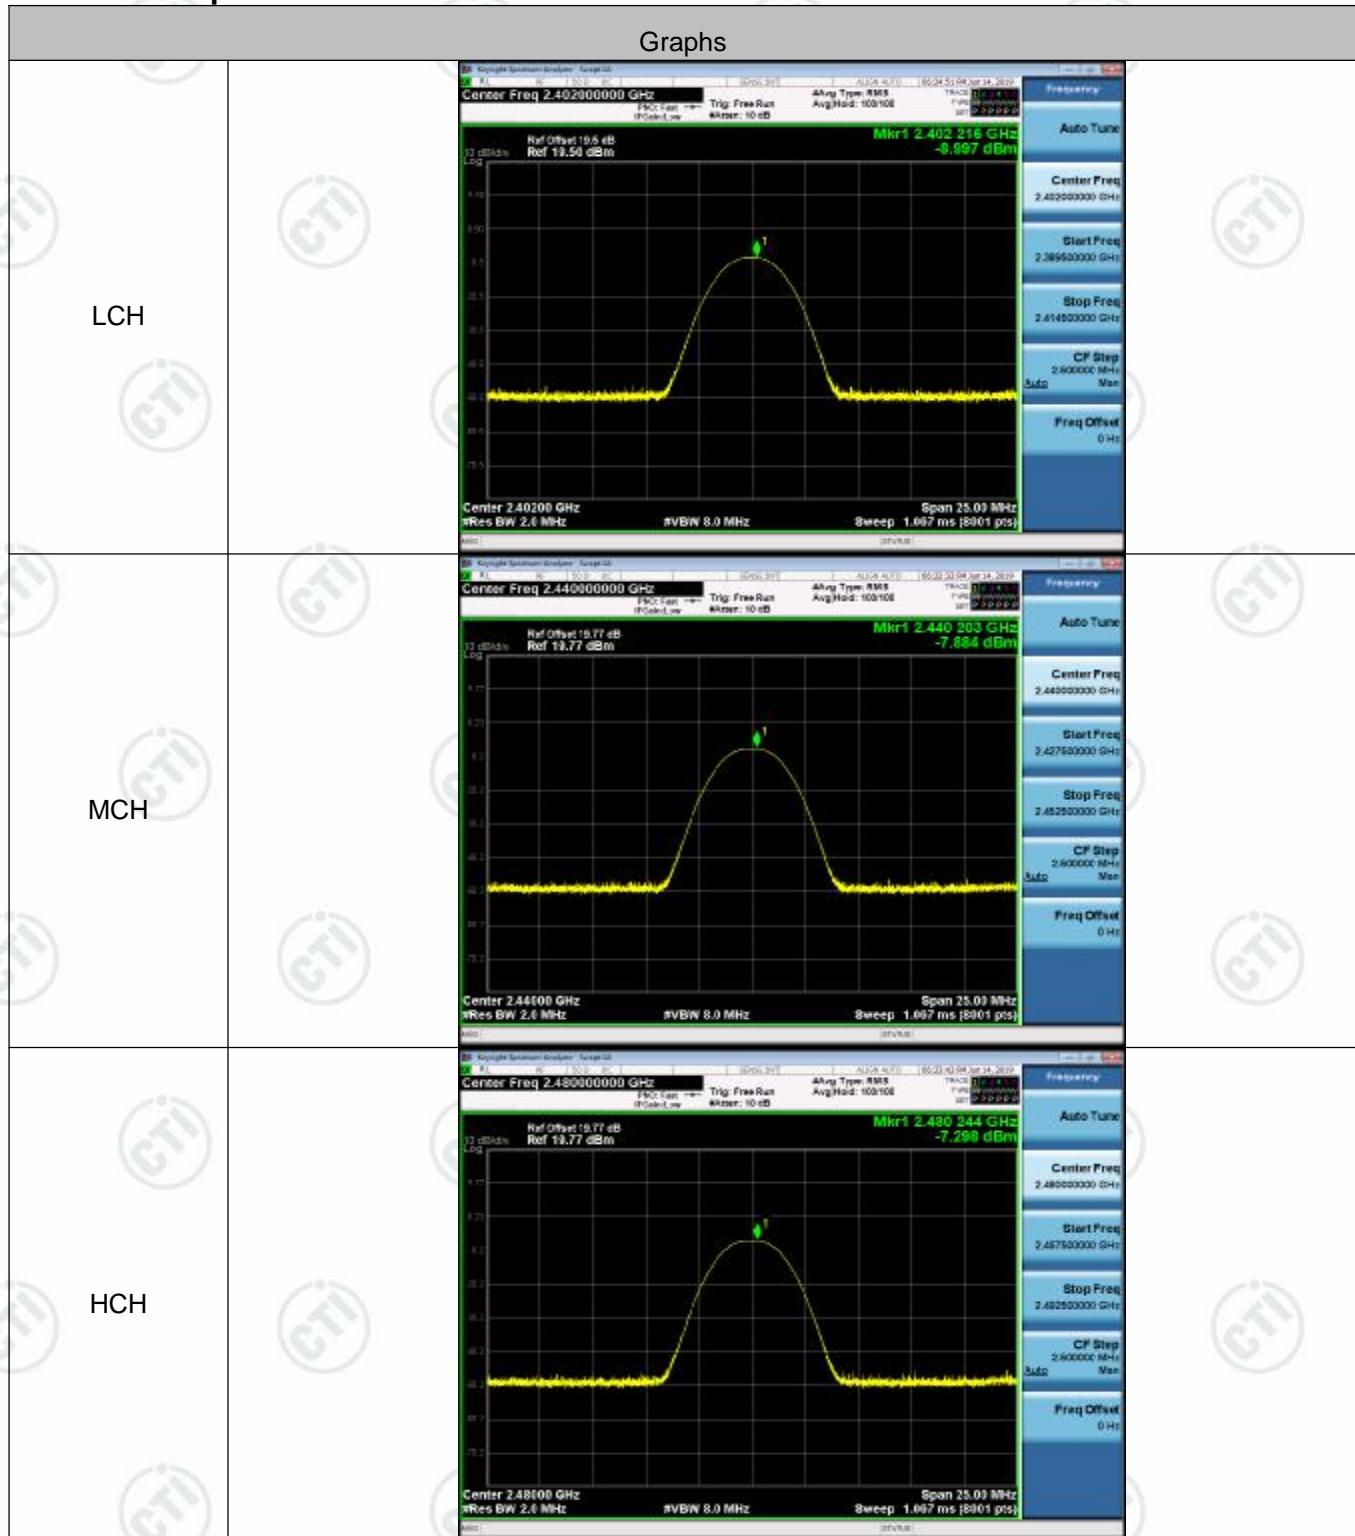

Appendix C): Band-edge for RF Conducted Emissions

Result Table

| Mode | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|------|---------|--------------------|--------------------------|-------------|---------|
| BLE | LCH | -9.263 | -59.424 | -29.26 | PASS |
| BLE | HCH | -7.789 | -58.938 | -27.79 | PASS |

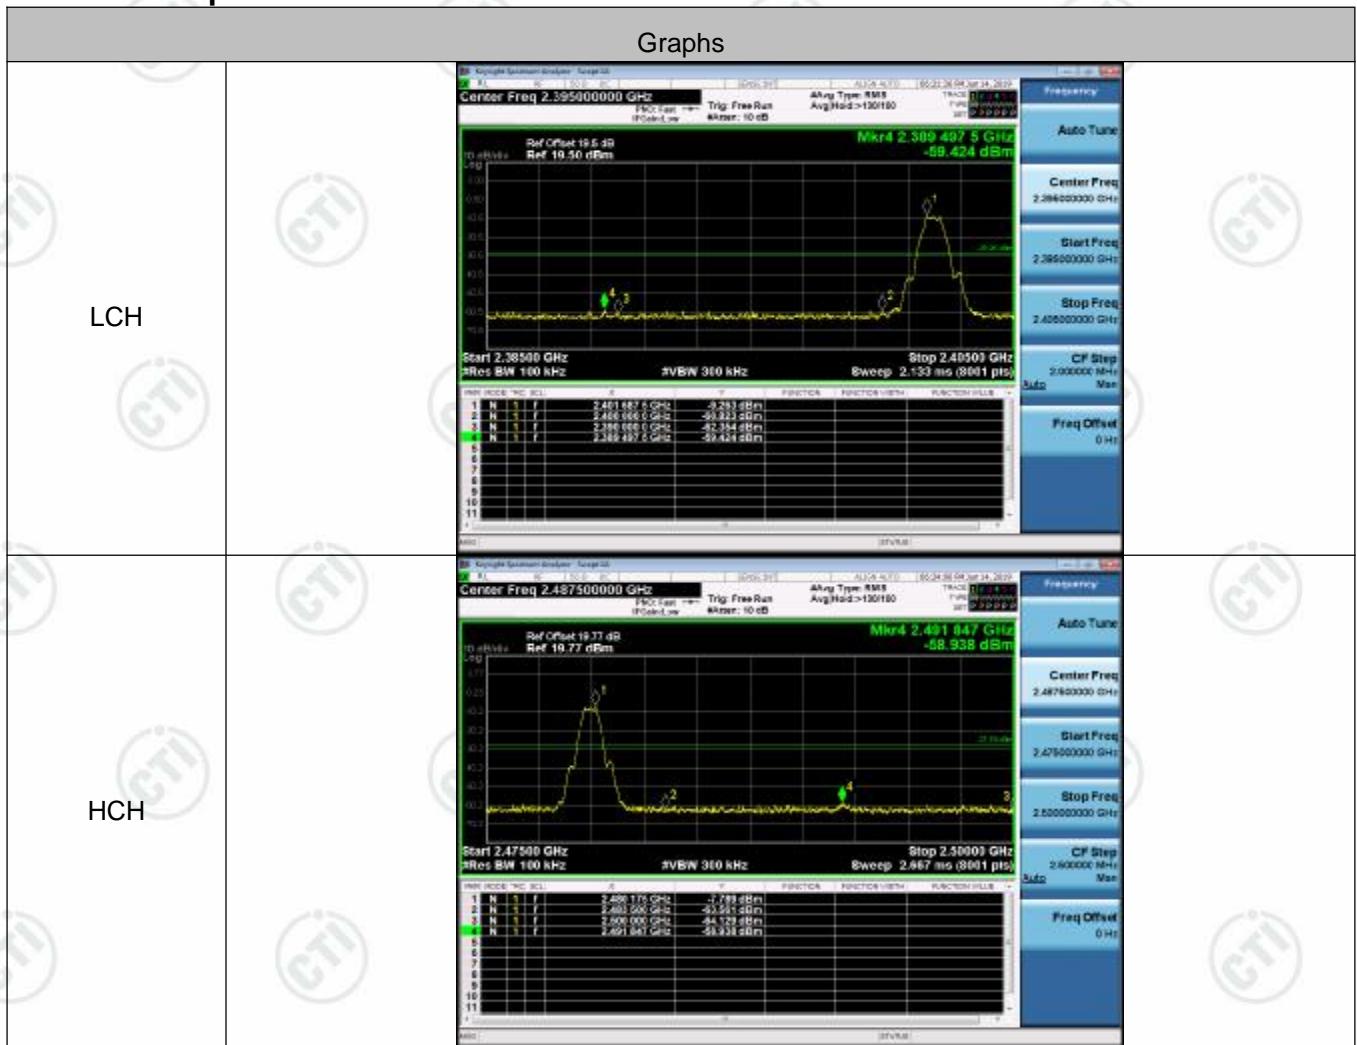
Test Graphs


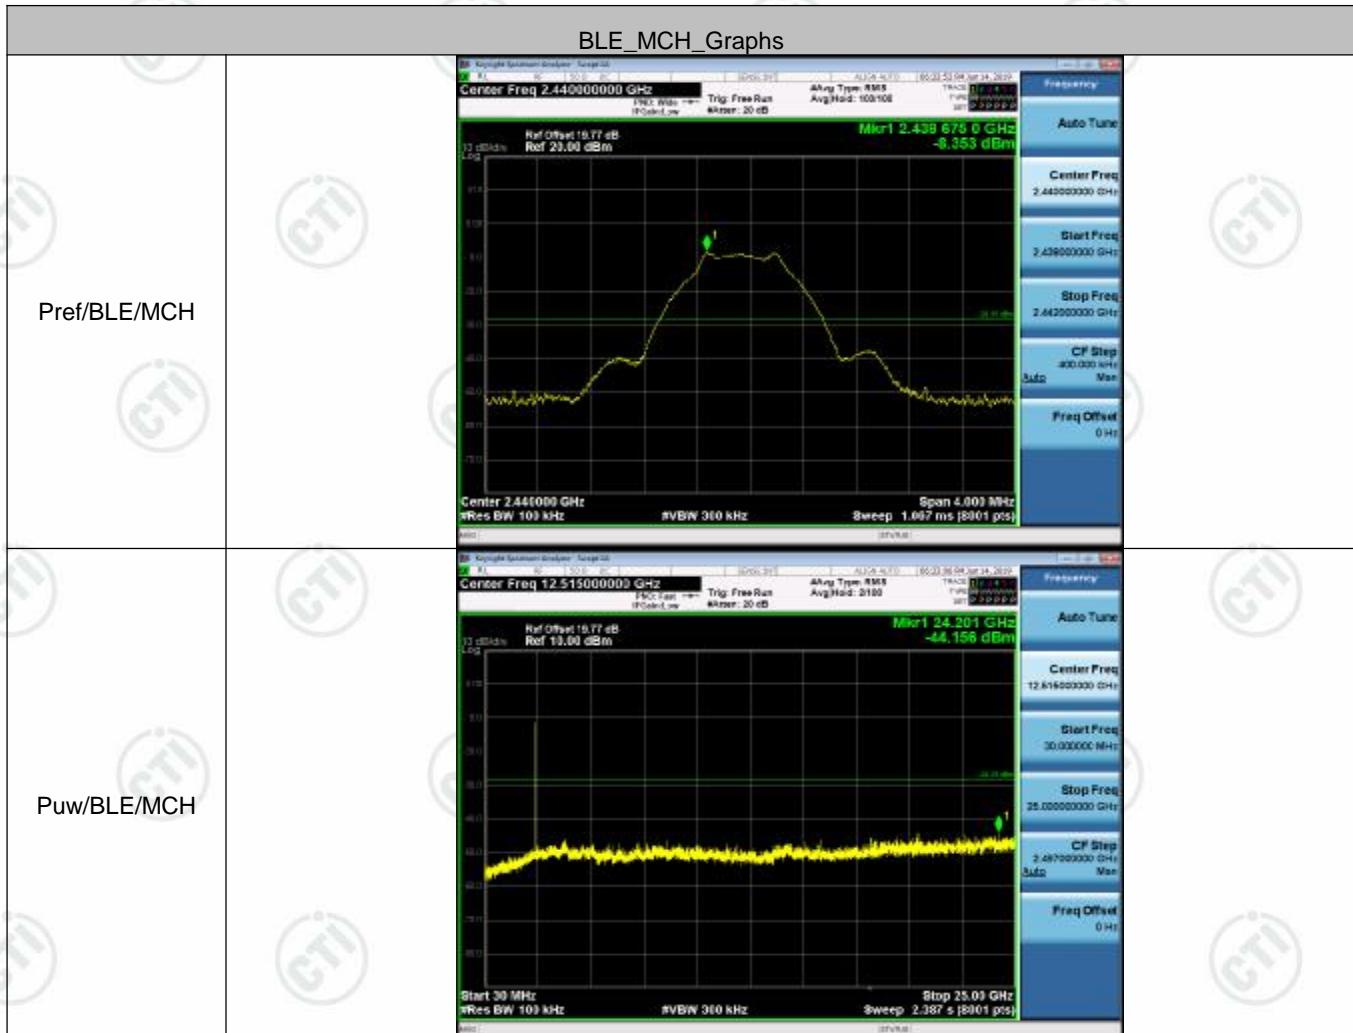
Appendix D): RF Conducted Spurious Emissions

Result Table

| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|------|---------|------------|----------|---------|
| BLE | LCH | -9.297 | <Limit | PASS |
| BLE | MCH | -8.353 | <Limit | PASS |
| BLE | HCH | -7.843 | <Limit | PASS |

Test Graphs

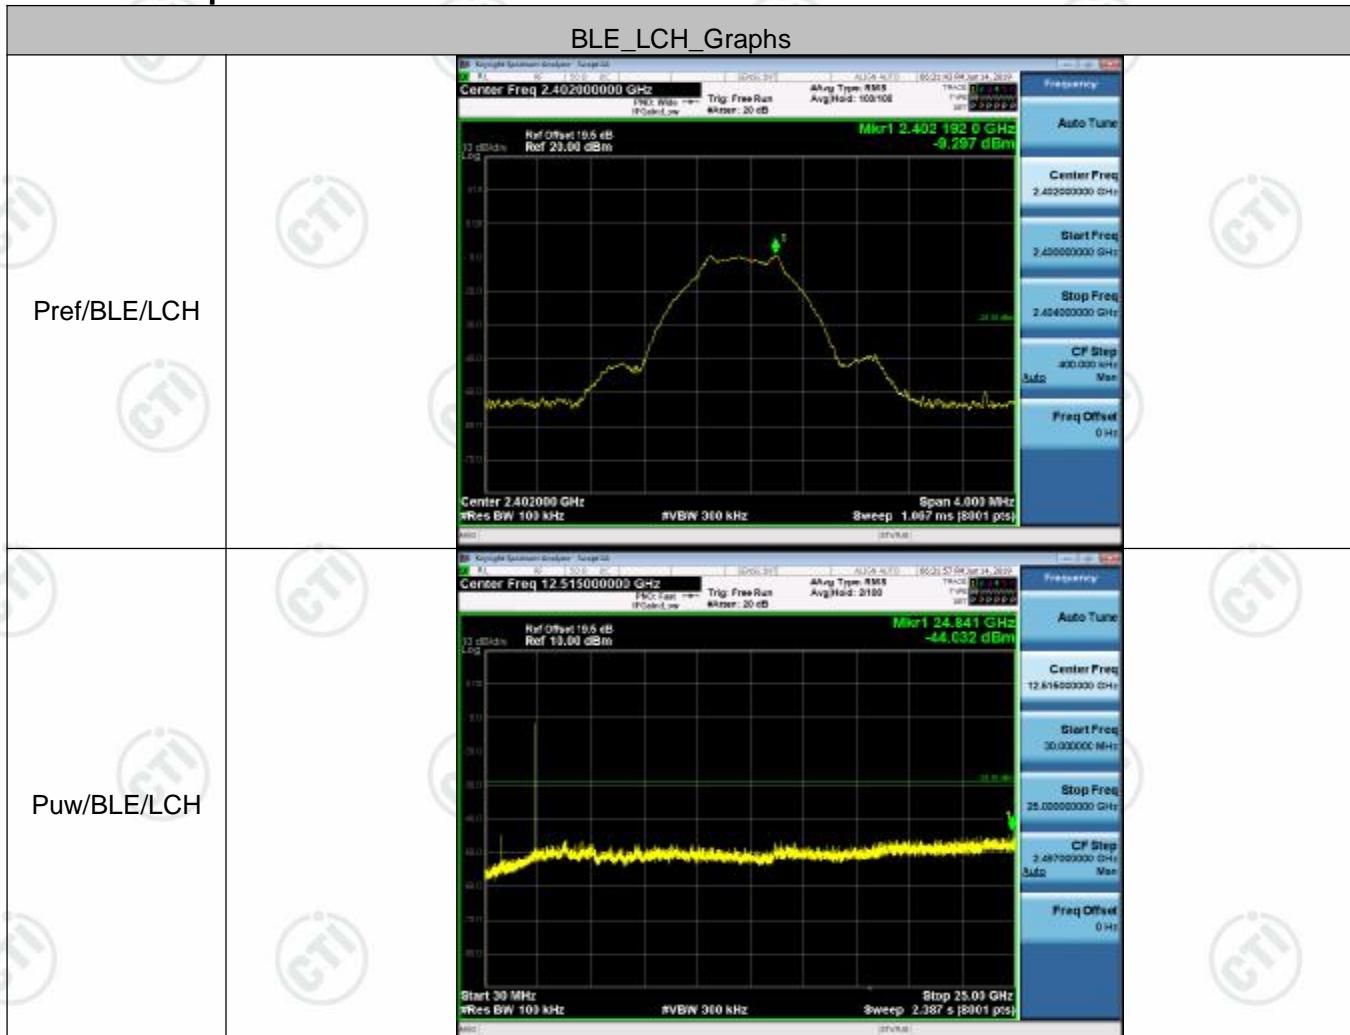





Appendix E): Power Spectral Density**Result Table**

| Mode | Channel | PSD [dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|------|---------|----------------|-----------------|---------|
| BLE | LCH | -21.202 | 8 | PASS |
| BLE | MCH | -19.610 | 8 | PASS |
| BLE | HCH | -19.391 | 8 | PASS |

Test Graphs



Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.



Appendix G): AC Power Line Conducted Emission


| Test Procedure: | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment were at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. | | | | | | | | | | | | | | |
|------------------------|--|-----------------------|--------------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Limit: | <table border="1" data-bbox="557 1185 1425 1410"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p> | Frequency range (MHz) | Limit (dB μ V) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dB μ V) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Charging mode: | Charging the EUT through charger. | | | | | | | | | | | | | | |
| Test Ambient: | Temp.: 23°C Humid.: 59% Press.: 101kPa | | | | | | | | | | | | | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

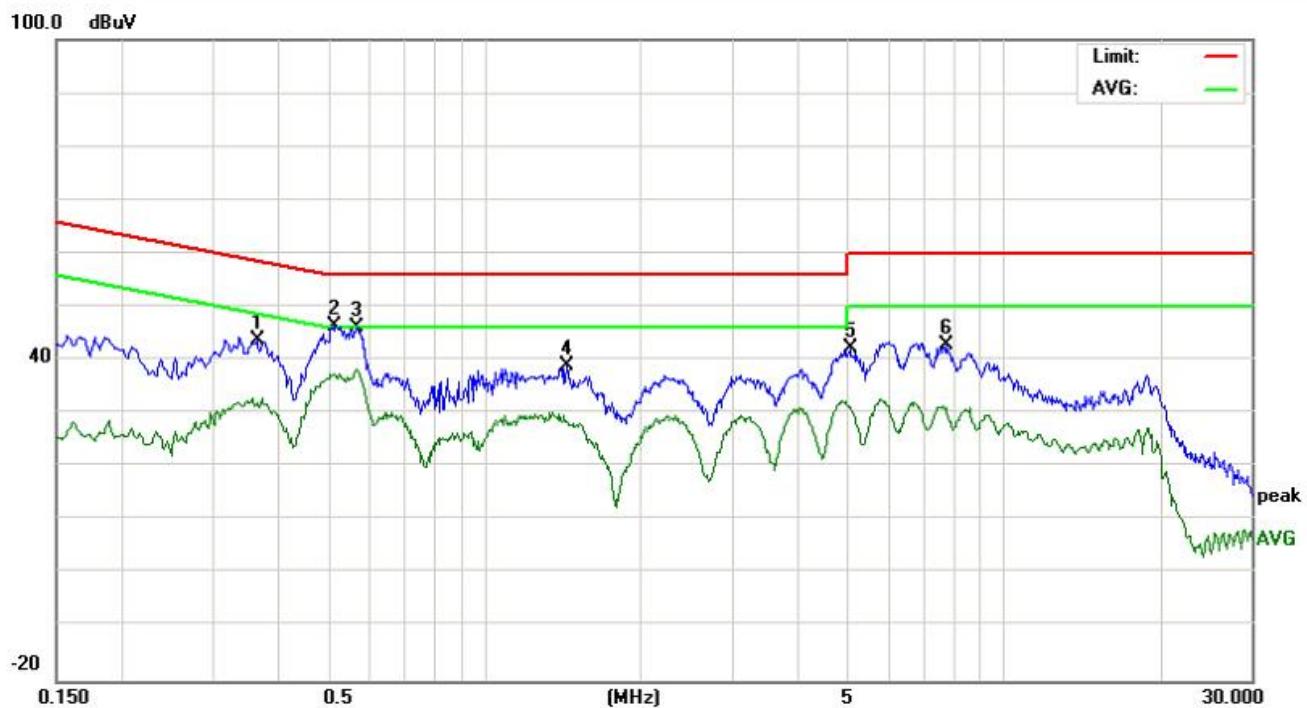

| No. | Freq. | Reading_Level (dBuV) | | | Correct Factor | | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | |
|-----|--------|-------------------------|-------|-------|-------------------|-------|-----------------------|-------|-------|-----------------|--------|----------------|-----|-----|
| | | MHz | Peak | QP | AVG | dB | peak | QP | AVG | QP | AVG | QP | AVG | P/F |
| 1 | 0.3660 | 33.72 | 27.01 | 20.80 | 9.93 | 43.65 | 36.94 | 30.73 | 58.59 | 48.59 | -21.65 | -17.86 | P | |
| 2 | 0.5181 | 33.18 | 18.23 | 15.75 | 9.92 | 43.10 | 28.15 | 25.67 | 56.00 | 46.00 | -27.85 | -20.33 | P | |
| 3 | 0.5700 | 33.10 | 31.29 | 27.76 | 10.00 | 43.10 | 41.29 | 37.76 | 56.00 | 46.00 | -14.71 | -8.24 | P | |
| 4 | 1.4420 | 29.08 | 20.23 | 17.10 | 9.77 | 38.85 | 30.00 | 26.87 | 56.00 | 46.00 | -26.00 | -19.13 | P | |
| 5 | 5.0700 | 32.38 | 20.27 | 21.08 | 9.73 | 42.11 | 30.00 | 30.81 | 60.00 | 50.00 | -30.00 | -19.19 | P | |
| 6 | 7.7460 | 33.12 | 26.03 | 19.08 | 9.77 | 42.89 | 35.80 | 28.85 | 60.00 | 50.00 | -24.20 | -21.15 | P | |

Neutral line:

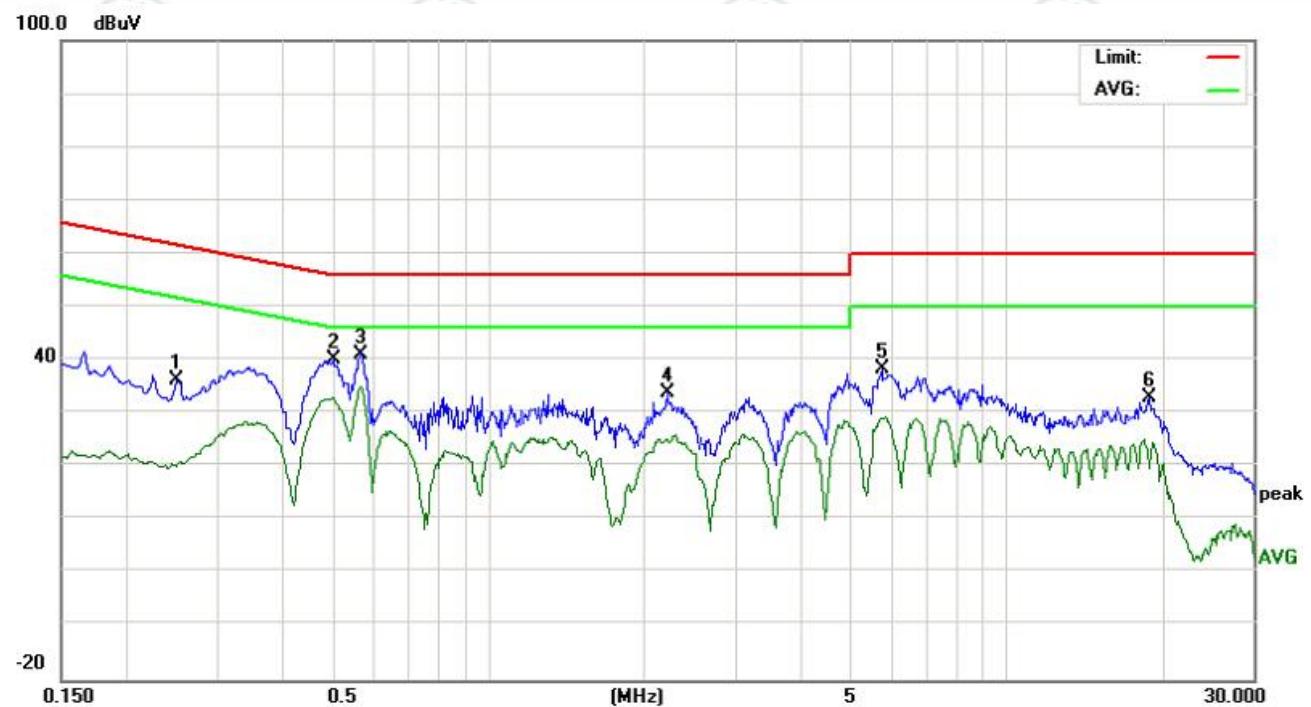

| No. | Freq. | Reading_Level (dBuV) | | | | Correct Factor | Measurement (dBuV) | | | | Limit (dBuV) | Margin (dB) | | | |
|-----|---------|-------------------------|-------|-------|-------|-------------------|-----------------------|-------|-------|-------|-----------------|----------------|-----|-----|---------|
| | | MHz | Peak | QP | Avg | | dB | peak | QP | Avg | | QP | Avg | P/F | Comment |
| 1 | 0.2500 | 26.24 | 19.61 | 9.85 | 9.96 | 36.20 | 29.57 | 19.81 | 61.75 | 51.75 | -32.18 | -31.94 | P | | |
| 2 | 0.5020 | 30.19 | 27.06 | 22.58 | 9.89 | 40.08 | 36.95 | 32.47 | 56.00 | 46.00 | -19.05 | -13.53 | P | | |
| 3 | 0.5700 | 31.16 | 28.72 | 24.52 | 10.00 | 41.16 | 38.72 | 34.52 | 56.00 | 46.00 | -17.28 | -11.48 | P | | |
| 4 | 2.2180 | 24.16 | 17.54 | 14.73 | 9.72 | 33.88 | 27.26 | 24.45 | 56.00 | 46.00 | -28.74 | -21.55 | P | | |
| 5 | 5.7740 | 28.69 | 23.70 | 18.85 | 9.73 | 38.42 | 33.43 | 28.58 | 60.00 | 50.00 | -26.57 | -21.42 | P | | |
| 6 | 18.9300 | 22.98 | 15.83 | 8.39 | 9.92 | 32.90 | 25.75 | 18.31 | 60.00 | 50.00 | -34.25 | -31.69 | P | | |

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
|--|--|---|--------|------------------|------------|
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Below 1GHz test procedure as below: | | | | | |
| Test Procedure: | a. | The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | |
| | b. | The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | |
| | c. | The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | |
| | d. | For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. | | | |
| | e. | The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | |
| | f. | Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel | | | |
| | Above 1GHz test procedure as below: | | | | |
| | g. | Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). | | | |
| | h. | . Test the EUT in the lowest channel , the Highest channel | | | |
| | i. | The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. | | | |
| Limit: | Frequency | Limit (dB μ V/m @3m) | | Remark | |
| | 30MHz-88MHz | 40.0 | | Quasi-peak Value | |
| | 88MHz-216MHz | 43.5 | | Quasi-peak Value | |
| | 216MHz-960MHz | 46.0 | | Quasi-peak Value | |
| | 960MHz-1GHz | 54.0 | | Quasi-peak Value | |
| | Above 1GHz | 54.0 | | Average Value | |
| | | 74.0 | | Peak Value | |
| Test Ambient: | Temp.: 24°C | Humid.: 53% | | Press.: 101kPa | |


Test plot as follows:

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | Peak | | |

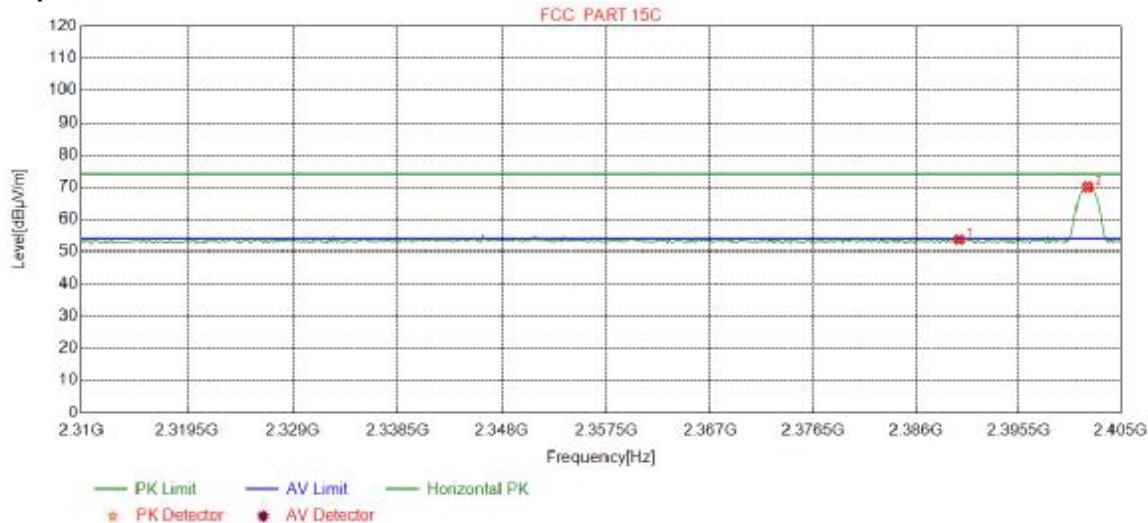Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|------------|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 50.48 | 53.66 | 74.00 | 20.34 | Pass | Horizontal |
| 2 | 2401.9086 | 32.26 | 13.31 | -42.43 | 66.86 | 70.00 | 74.00 | 4.00 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | Peak | | |

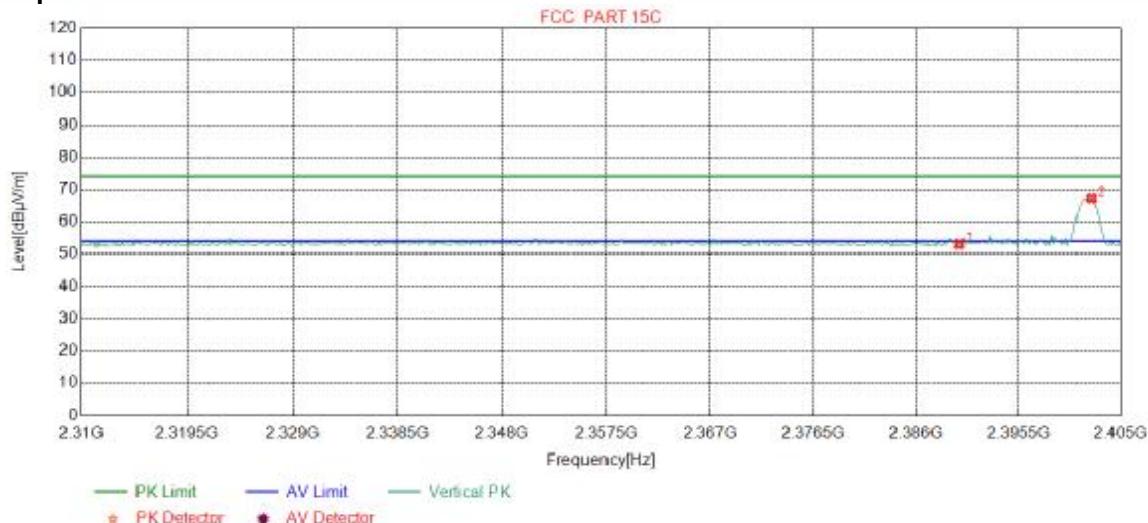Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|----------|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 49.86 | 53.04 | 74.00 | 20.96 | Pass | Vertical |
| 2 | 2402.2653 | 32.26 | 13.31 | -42.43 | 64.12 | 67.26 | 74.00 | 6.74 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV | | |

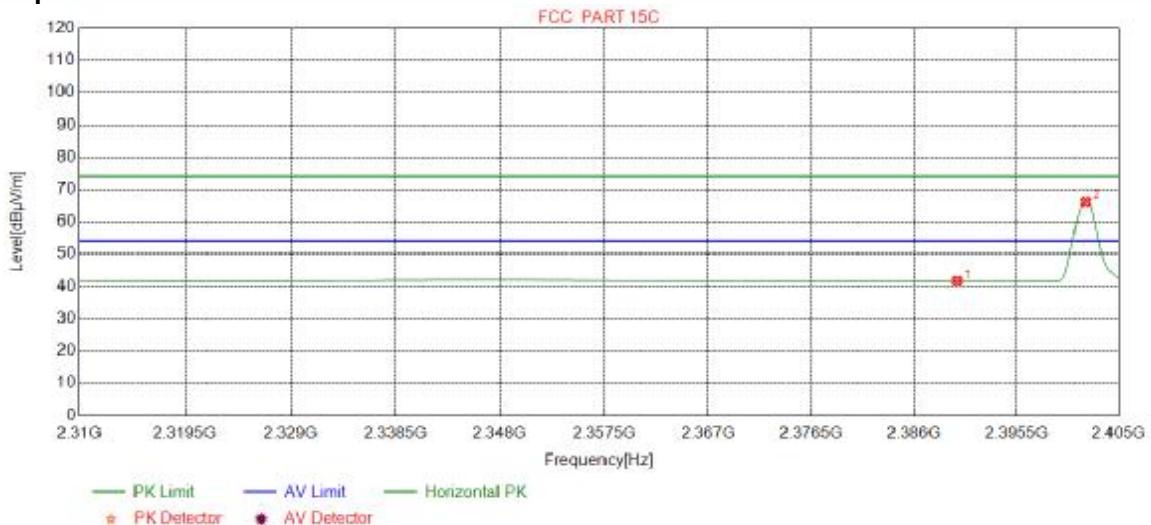Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 38.47 | 41.65 | 54.00 | 12.35 | Pass | Horizontal |
| 2 | 2401.9086 | 32.26 | 13.31 | -42.43 | 63.00 | 66.14 | 54.00 | -12.14 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV | | |

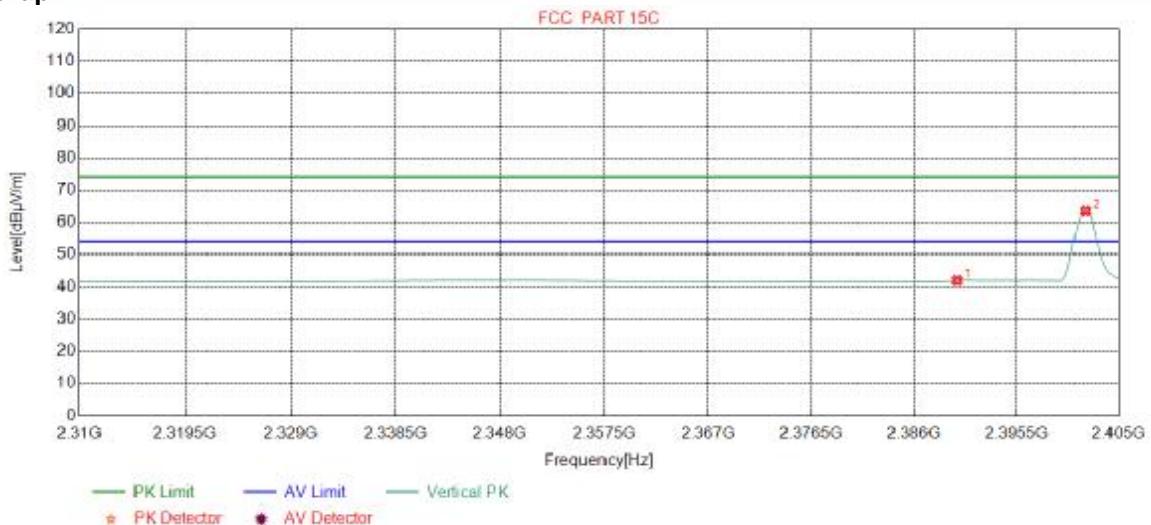Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 38.79 | 41.97 | 54.00 | 12.03 | Pass | Vertical |
| 2 | 2401.9086 | 32.26 | 13.31 | -42.43 | 60.36 | 63.50 | 54.00 | -9.50 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | Peak | | |

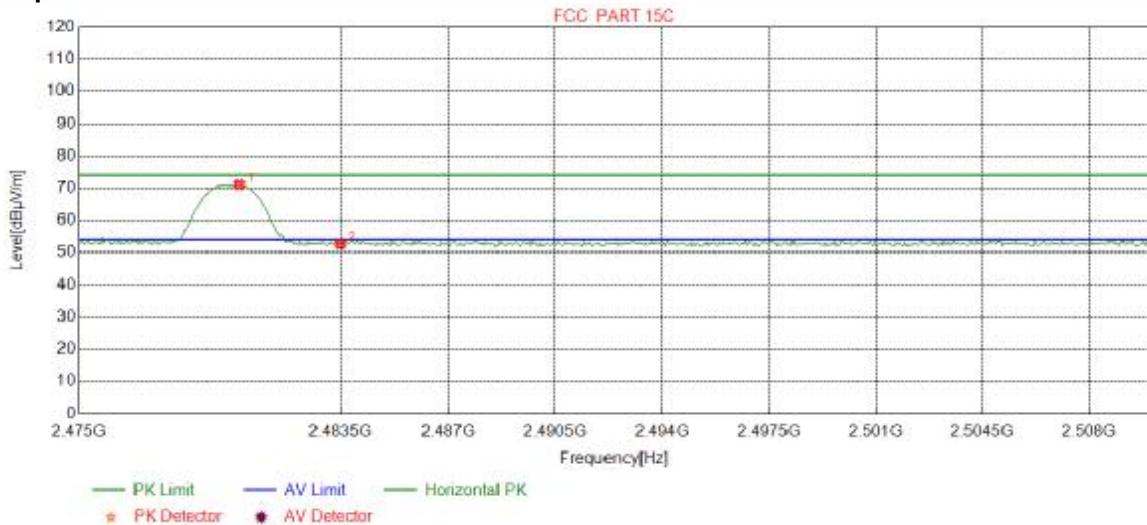Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2480.2128 | 32.37 | 13.39 | -42.40 | 67.69 | 71.05 | 74.00 | 2.95 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 49.31 | 52.67 | 74.00 | 21.33 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | Peak | | |

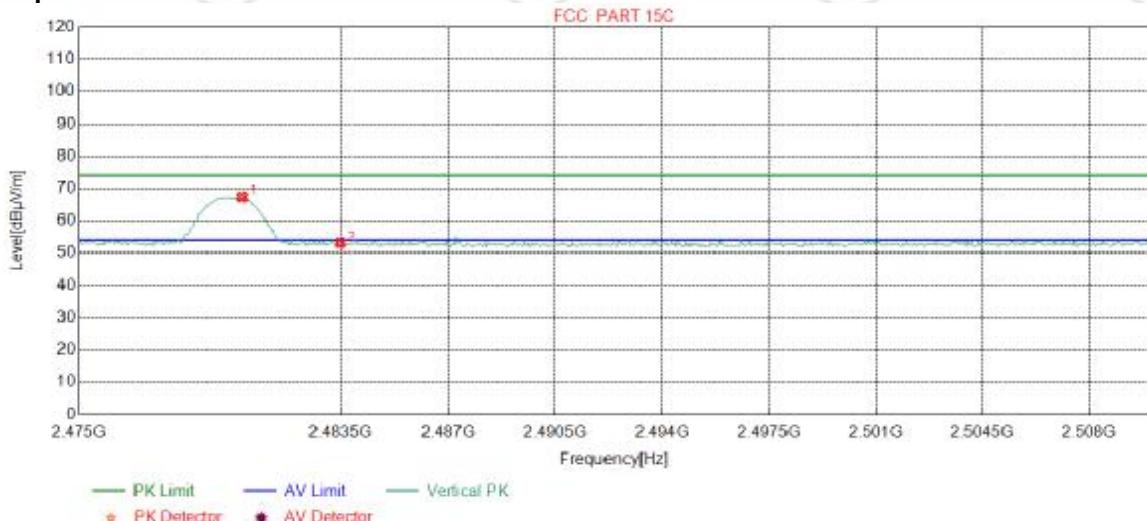Test Graph


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2480.3004 | 32.37 | 13.39 | -42.40 | 63.98 | 67.34 | 74.00 | 6.66 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 49.76 | 53.12 | 74.00 | 20.88 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV | | |

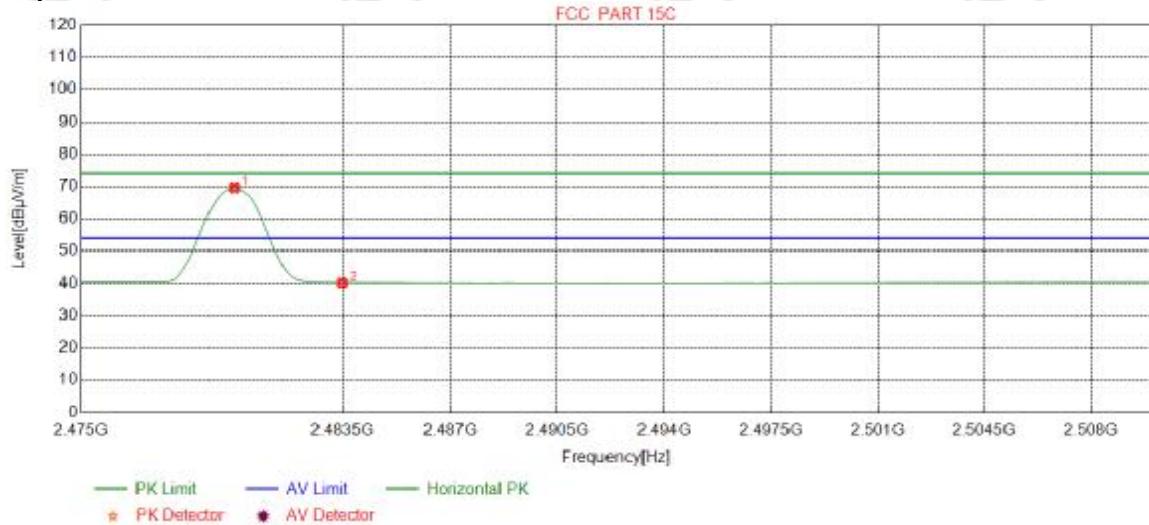Test Graph

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|------------|
| 1 | 2479.9937 | 32.37 | 13.39 | -42.39 | 66.14 | 69.51 | 54.00 | -15.51 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 36.79 | 40.15 | 54.00 | 13.85 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV | | |

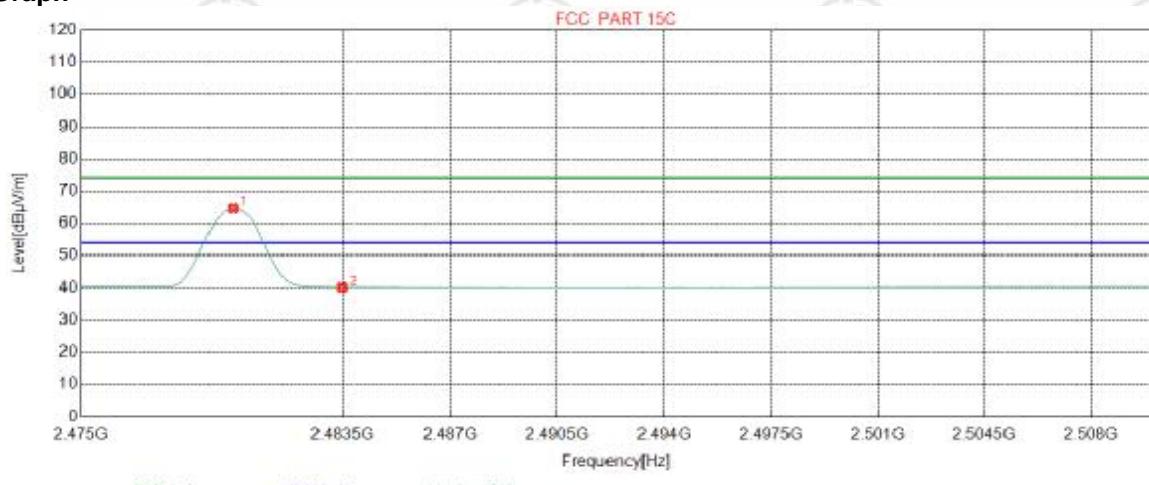Test Graph

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|----------|
| 1 | 2479.9499 | 32.37 | 13.39 | -42.39 | 61.29 | 64.66 | 54.00 | -10.66 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 36.77 | 40.13 | 54.00 | 13.87 | Pass | Vertical |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I): Radiated Spurious Emissions

| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
|-----------------|--|----------------------------------|----------------------|----------------|--------------------------|
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Test Procedure: | Below 1GHz test procedure as below: <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). Test the EUT in the lowest channel ,the middle channel ,the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. | | | | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |
| | | 5011.9 | 74.0 | peak | 3 |
| Test Ambient: | Temp.: 24°C | Humid.: 53% | | Press.: 101kPa | |

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

| Mode: GFSK Transmitting | | | | | | Channel: 2480 | | | | |
|-------------------------|----------------|-----------------------|-----------------------|-----------------------|-------------------------|-------------------------|-------------------------|---------------|--------|------------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Magin [dB] | Result | Polarity |
| 1 | 37.5668 | 11.52 | 0.69 | -32.12 | 34.37 | 14.46 | 40.00 | 25.54 | Pass | Horizontal |
| 2 | 77.5348 | 7.57 | 1.03 | -32.07 | 42.16 | 18.69 | 40.00 | 21.31 | Pass | Horizontal |
| 3 | 168.0448 | 8.34 | 1.52 | -31.96 | 42.74 | 20.64 | 43.50 | 22.86 | Pass | Horizontal |
| 4 | 256.0326 | 12.32 | 1.90 | -31.88 | 45.70 | 28.04 | 46.00 | 17.96 | Pass | Horizontal |
| 5 | 319.9620 | 13.64 | 2.12 | -31.83 | 42.53 | 26.46 | 46.00 | 19.54 | Pass | Horizontal |
| 6 | 600.0290 | 19.00 | 2.96 | -31.99 | 38.51 | 28.48 | 46.00 | 17.52 | Pass | Horizontal |

| Mode: GFSK Transmitting | | | | | | Channel: 2480 | | | | |
|-------------------------|----------------|-----------------------|-----------------------|-----------------------|-------------------------|-------------------------|-------------------------|---------------|--------|----------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Magin [dB] | Result | Polarity |
| 1 | 30.3880 | 10.52 | 0.63 | -32.12 | 39.39 | 18.42 | 40.00 | 21.58 | Pass | Vertical |
| 2 | 55.2225 | 12.36 | 0.84 | -32.07 | 39.28 | 20.41 | 40.00 | 19.59 | Pass | Vertical |
| 3 | 208.8859 | 11.13 | 1.71 | -31.94 | 45.99 | 26.89 | 43.50 | 16.61 | Pass | Vertical |
| 4 | 319.9620 | 13.64 | 2.12 | -31.83 | 39.01 | 22.94 | 46.00 | 23.06 | Pass | Vertical |
| 5 | 600.0290 | 19.00 | 2.96 | -31.99 | 37.57 | 27.54 | 46.00 | 18.46 | Pass | Vertical |
| 6 | 897.9458 | 22.08 | 3.60 | -31.60 | 37.25 | 31.33 | 46.00 | 14.67 | Pass | Vertical |

Remark : All the channels are tested, only the worst data were reported.

Transmitter Emission above 1GHz

| Mode: | | GFSK Transmitting | | | | | Channel: | | 2402 | | |
|-------|-------------|-------------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1399.0399 | 28.30 | 2.90 | -42.68 | 53.01 | 41.53 | 74.00 | 32.47 | Pass | H | PK |
| 2 | 1793.8794 | 30.34 | 3.31 | -42.71 | 61.17 | 52.11 | 74.00 | 21.89 | Pass | H | PK |
| 3 | 4803.1202 | 34.50 | 4.55 | -40.66 | 54.66 | 53.05 | 74.00 | 20.95 | Pass | H | PK |
| 4 | 4803.4226 | 34.50 | 4.55 | -40.66 | 48.81 | 47.20 | 54.00 | 6.80 | Pass | H | AV |
| 5 | 7206.0000 | 36.31 | 5.81 | -41.02 | 54.54 | 55.64 | 74.00 | 18.36 | Pass | H | PK |
| 6 | 7205.4987 | 36.31 | 5.82 | -41.02 | 49.05 | 50.16 | 54.00 | 3.84 | Pass | H | AV |
| 7 | 9608.0000 | 37.64 | 6.63 | -40.76 | 39.54 | 43.05 | 74.00 | 30.95 | Pass | H | PK |
| 8 | 12010.0000 | 39.31 | 7.60 | -41.21 | 38.91 | 44.61 | 74.00 | 29.39 | Pass | H | PK |
| 9 | 1598.4598 | 29.05 | 3.07 | -42.90 | 59.19 | 48.41 | 74.00 | 25.59 | Pass | V | PK |
| 10 | 3197.0131 | 33.28 | 4.65 | -42.01 | 53.98 | 49.90 | 74.00 | 24.10 | Pass | V | PK |
| 11 | 4804.0000 | 34.50 | 4.55 | -40.66 | 51.91 | 50.30 | 74.00 | 23.70 | Pass | V | PK |
| 12 | 7206.2804 | 36.31 | 5.81 | -41.02 | 50.17 | 51.27 | 74.00 | 22.73 | Pass | V | PK |
| 13 | 7205.4707 | 36.31 | 5.82 | -41.02 | 43.47 | 44.58 | 54.00 | 9.42 | Pass | V | AV |
| 14 | 9608.0000 | 37.64 | 6.63 | -40.76 | 38.98 | 42.49 | 74.00 | 31.51 | Pass | V | PK |
| 15 | 12010.0000 | 39.31 | 7.60 | -41.21 | 38.38 | 44.08 | 74.00 | 29.92 | Pass | V | PK |

| Mode: | | GFSK Transmitting | | | | | Channel: | | 2440 | | |
|-------|-------------|-------------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1895.4895 | 31.01 | 3.42 | -42.67 | 52.81 | 44.57 | 74.00 | 29.43 | Pass | H | PK |
| 2 | 3109.0073 | 33.24 | 4.69 | -42.05 | 50.55 | 46.43 | 74.00 | 27.57 | Pass | H | PK |
| 3 | 4879.1253 | 34.50 | 4.80 | -40.60 | 54.92 | 53.62 | 74.00 | 20.38 | Pass | H | PK |
| 4 | 4879.4023 | 34.50 | 4.80 | -40.60 | 48.38 | 47.08 | 54.00 | 6.92 | Pass | H | AV |
| 5 | 7320.2880 | 36.42 | 5.85 | -40.92 | 52.69 | 54.04 | 74.00 | 19.96 | Pass | H | PK |
| 6 | 7319.6203 | 36.42 | 5.85 | -40.92 | 48.23 | 49.58 | 54.00 | 4.42 | Pass | H | AV |
| 7 | 9608.0000 | 37.64 | 6.63 | -40.76 | 39.20 | 42.71 | 74.00 | 31.29 | Pass | H | PK |
| 8 | 12010.0000 | 39.31 | 7.60 | -41.21 | 36.63 | 42.33 | 74.00 | 31.67 | Pass | H | PK |
| 9 | 1293.8294 | 28.19 | 2.74 | -42.79 | 56.37 | 44.51 | 74.00 | 29.49 | Pass | V | PK |
| 10 | 1598.8599 | 29.05 | 3.07 | -42.90 | 59.12 | 48.34 | 74.00 | 25.66 | Pass | V | PK |
| 11 | 4880.0000 | 34.50 | 4.80 | -40.60 | 53.12 | 51.82 | 74.00 | 22.18 | Pass | V | PK |
| 12 | 4879.3589 | 34.50 | 4.80 | -40.60 | 44.37 | 43.07 | 54.00 | 10.93 | Pass | V | AV |
| 13 | 7320.0000 | 36.42 | 5.85 | -40.92 | 48.24 | 49.59 | 74.00 | 24.41 | Pass | V | PK |
| 14 | 9760.0000 | 37.70 | 6.73 | -40.62 | 38.37 | 42.18 | 74.00 | 31.82 | Pass | V | PK |
| 15 | 12200.0000 | 39.42 | 7.67 | -41.17 | 35.99 | 41.91 | 74.00 | 32.09 | Pass | V | PK |

| Mode: | | GFSK Transmitting | | | | | Channel: | | 2480 | | |
|-------|-------------|-------------------|-----------------|-----------------|----------------------|----------------------|----------------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dB μ V] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1599.8600 | 29.06 | 3.07 | -42.90 | 52.63 | 41.86 | 74.00 | 32.14 | Pass | H | PK |
| 2 | 2004.9005 | 31.71 | 3.48 | -42.61 | 51.07 | 43.65 | 74.00 | 30.35 | Pass | H | PK |
| 3 | 4960.0000 | 34.50 | 4.82 | -40.53 | 54.06 | 52.85 | 74.00 | 21.15 | Pass | H | PK |
| 4 | 4959.4183 | 34.50 | 4.82 | -40.53 | 47.90 | 46.69 | 54.00 | 7.31 | Pass | H | AV |
| 5 | 7440.0000 | 36.54 | 5.85 | -40.82 | 52.09 | 53.66 | 74.00 | 20.34 | Pass | H | PK |
| 6 | 7439.5096 | 36.54 | 5.85 | -40.82 | 46.76 | 48.33 | 54.00 | 5.67 | Pass | H | AV |
| 7 | 9920.0000 | 37.77 | 6.79 | -40.48 | 38.67 | 42.75 | 74.00 | 31.25 | Pass | H | PK |
| 8 | 12400.0000 | 39.54 | 7.86 | -41.12 | 38.74 | 45.02 | 74.00 | 28.98 | Pass | H | PK |
| 9 | 1596.8597 | 29.04 | 3.07 | -42.90 | 58.92 | 48.13 | 74.00 | 25.87 | Pass | V | PK |
| 10 | 3191.0127 | 33.28 | 4.64 | -42.01 | 51.70 | 47.61 | 74.00 | 26.39 | Pass | V | PK |
| 11 | 4959.1306 | 34.50 | 4.82 | -40.53 | 51.81 | 50.60 | 74.00 | 23.40 | Pass | V | PK |
| 12 | 7440.0000 | 36.54 | 5.85 | -40.82 | 49.32 | 50.89 | 74.00 | 23.11 | Pass | V | PK |
| 13 | 9920.0000 | 37.77 | 6.79 | -40.48 | 37.86 | 41.94 | 74.00 | 32.06 | Pass | V | PK |
| 14 | 12400.0000 | 39.54 | 7.86 | -41.12 | 37.66 | 43.94 | 74.00 | 30.06 | Pass | V | PK |

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: SA00528




Radiated spurious emission Test Setup-1(Below 30MHz)



Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

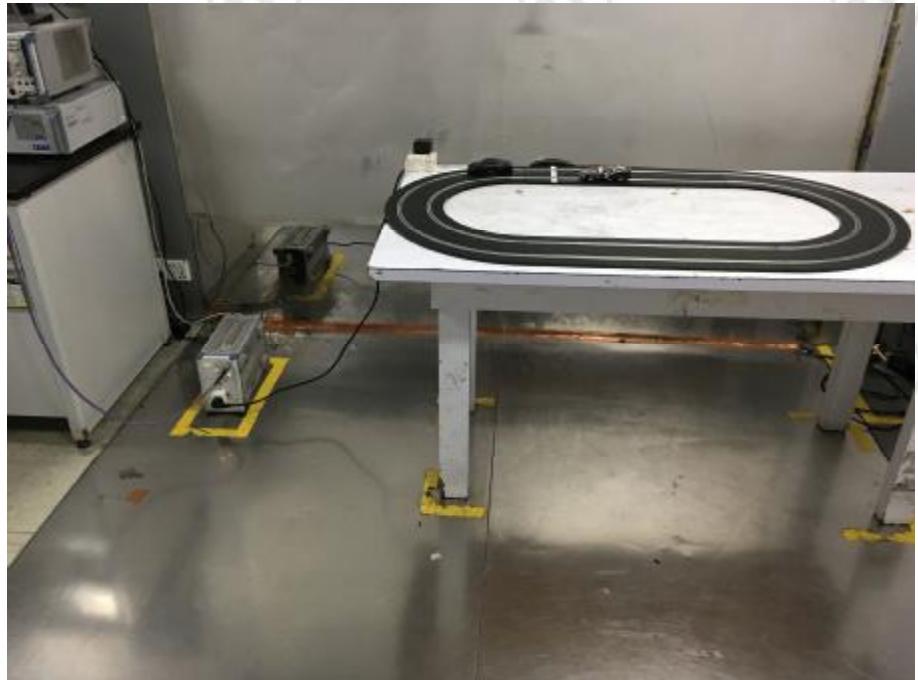


Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Test model No.: SA00528



View of Product-1

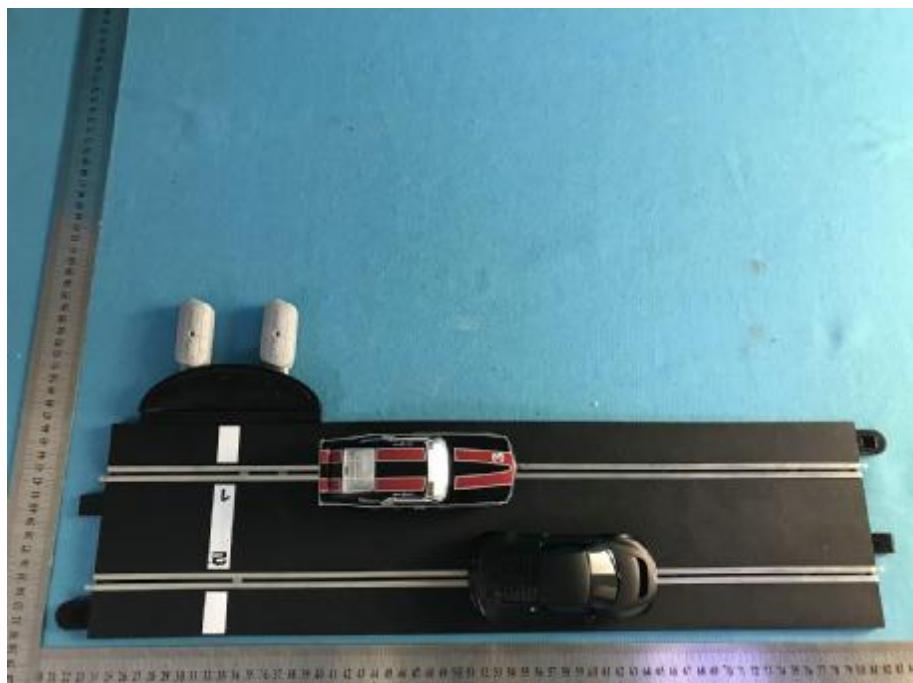

View of Product-2



View of Product-3



View of Product-4



View of Product-5



View of Product-6




View of Product-7




View of Product-8



View of Product-9

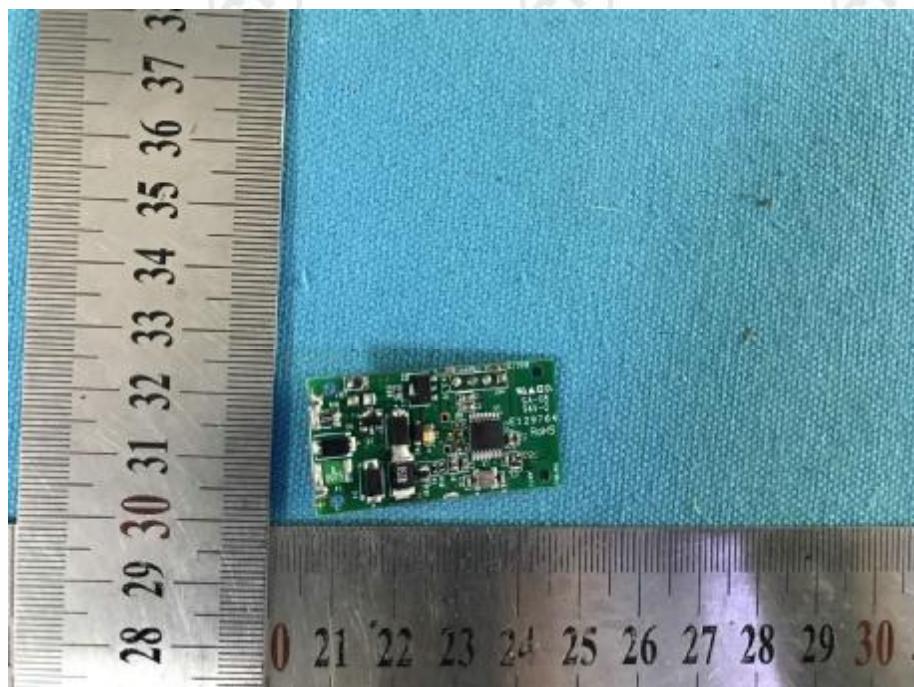

View of Product-10

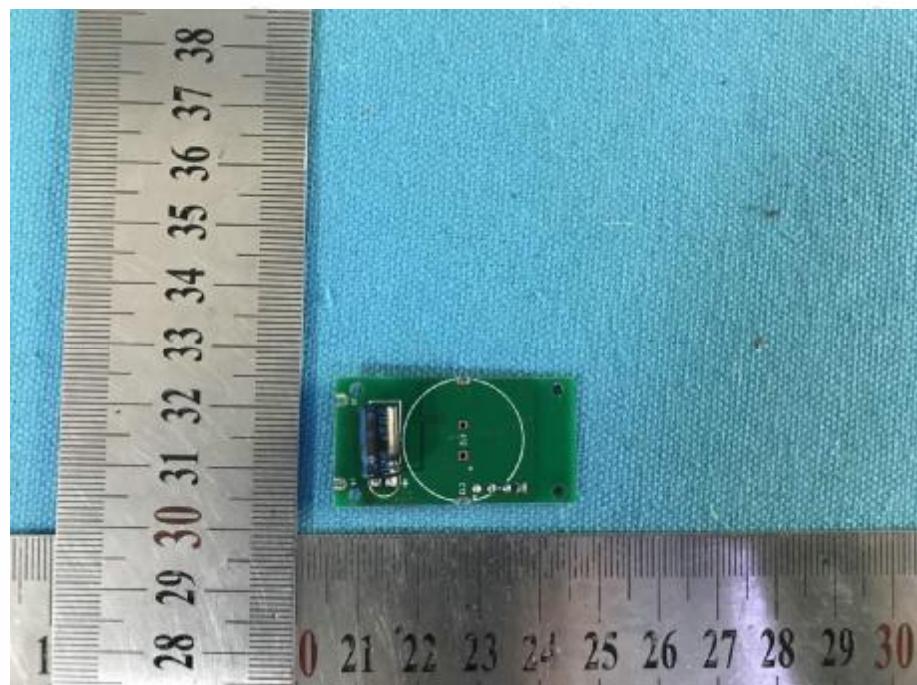

View of Product-11



View of Product-12



View of Product-13



View of Product-14

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.