

**APPLICATION CERTIFICATION
On Behalf of
Tatco Products, Inc.**

**PIR CHIME WITH WIRELESS RECEIVER
Model No.: 57930-T**

FCC ID: 2ACVQ57930T

Prepared for : Tatco Products, Inc.
Address : 6750-B Jones MIII Court Norcross, GEORGIA 30092,
USA
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20141451
Date of Test : July 26 – Aug 19, 2014
Date of Report : Aug 19, 2014

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	8
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	9
4.6. The Field Strength of Radiation Emission Measurement Results	10
5. 20DB OCCUPIED BANDWIDTH	12
5.1. Block Diagram of Test Setup.....	12
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c)	12
5.3. EUT Configuration on Measurement	12
5.4. Operating Condition of EUT	12
5.5. Test Procedure	12
5.6. Measurement Result	13
6. RELEASE TIME MEASUREMENT.....	14
6.1. Block Diagram of Test Setup.....	14
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e)	14
6.3. EUT Configuration on Measurement	14
6.4. Operating Condition of EUT	14
6.5. Test Procedure	14
6.6. Measurement Result	15
7. AVERAGE FACTOR MEASUREMENT	16
7.1. Block Diagram of Test Setup.....	16
7.2. Average factor Measurement according to ANSI C63.4-2009.....	16
7.3. EUT Configuration on Measurement	16
7.4. Operating Condition of EUT	16
7.5. Test Procedure	16
7.6. Measurement Result	17
8. ANTENNA REQUIREMENT.....	18
8.1. The Requirement	18
8.2. Antenna Construction	18

Test Report Certification

Applicant& : Tatco Products, Inc.
address : 6750-B Jones Mill Court Norcross, GEORGIA 30092, USA
Manufacturer& : Zhongshan J-Xing Electrical Co., Ltd
address : Block K, Yong An Industrial Park, Yong An Road, Dongfeng
Town, Zhongshan City, Guangdong, China 528425
Product : PIR CHIME WITH WIRELESS RECEIVER
Model No. : 57930-T
Trade name : 

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231(e)
ANSI C63.4-2009**

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231(e). The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : July 26 – Aug 19, 2014

Prepared by : Tim Zhang
(Tim.zhang, Engineer)

Approved & Authorized Signer : Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : PIR CHIME WITH WIRELESS RECEIVER
Model Number : 57930-T
Power Supply : DC 9.0V (battery)
Modulation: : OOK
Operation Frequency : 315MHz
Applicant : Tatco Products, Inc.
Address : 6750-B Jones MIII Court Norcross, GEORGIA 30092,
USA
Manufacturer : Zhongshan J-Xing Electrical Co., Ltd
Address : Block K, Yong An Industrial Park, Yong An Road,
Dongfeng Town, Zhongshan City, Guangdong, China
528425
Date of sample received : July 26, 2014
Date of Test : July 26 – Aug 19, 2014

1.2.Description of Test Facility

EMC Lab

: Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories

The Certificate Registration Number is L3193

Name of Firm

: ACCURATE TECHNOLOGY CO., LTD

Site Location

: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a automatic operated PIR CHIME WITH WIRELESS RECEIVER.

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

4. THE FIELD STRENGTH OF RADIATION EMISSION


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: PIR CHIME WITH WIRELESS RECEIVER)

4.1.2. Semi-Anechoic Chamber Test Setup Diagram

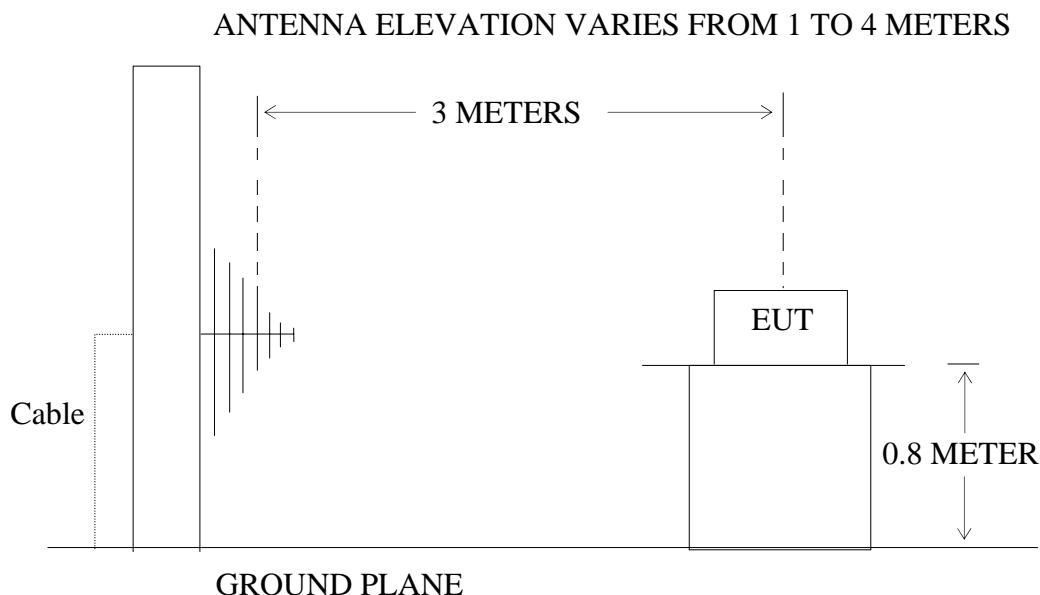

4.2. The Field Strength of Radiation Emission Measurement Limits

4.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(e)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66–40.70.	1,000	100
70–130	500	50
130–174	500 to 1,500 ¹	50 to 150 ¹
174–260	1,500	150
260–470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹ Linear interpolations.

4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

4.3. Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.4 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-4000 MHz.

The frequency range from 30 MHz to 4000 MHz is checked.

4.6.The Field Strength of Radiation Emission Measurement Results
PASS.

The frequency range 30MHz to 4000MHz is investigated.

Date of Test:	Aug 14, 2014	Temperature:	25°C
EUT:	PIR CHIME WITH WIRELESS RECEIVER	Humidity:	50%
Model No.:	57930-T	Power Supply:	DC 9.0V
Test Mode:	TX	Test Engineer:	Alen

Frequency (MHz)	Reading (dB μ V/m)	Factor	Average	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	PEAK	Corr.	Factor	AV	PEAK	AV	PEAK	AV	PEAK	
315	92.38	-17.52	-8.30	66.56	74.86	67.70	87.70	1.14	12.84	Horizontal
631.69	47.32	-11.02	-8.30	28.00	36.30	47.70	67.70	19.70	31.40	
945.44	46.70	-5.45	-8.30	32.95	41.25	47.70	67.70	14.75	26.45	
1575.7	60.37	-9.39	-8.30	42.68	50.98	47.70	67.70	5.02	16.72	
1258.8	62.94	-10.50	-8.30	44.14	52.44	47.70	67.70	3.56	15.26	
1889.5	59.20	-7.92	-8.30	42.98	51.28	47.70	67.70	4.72	16.42	
315	87.59	-17.52	-8.30	61.77	70.07	67.70	87.70	5.93	17.63	Vertical
631.69	45.10	-11.02	-8.30	25.78	34.08	47.70	67.70	21.92	33.62	
945.44	44.01	-5.45	-8.30	30.26	38.56	47.70	67.70	17.44	29.14	
1575.7	61.48	-9.39	-8.30	43.79	52.09	47.70	67.70	3.91	15.61	
1258.8	63.28	-10.50	-8.30	44.48	52.78	47.70	67.70	3.22	14.92	
1889.5	59.84	-7.92	-8.30	43.62	51.92	47.70	67.70	4.08	15.78	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

4. The spectral diagrams in appendix I display the measurement of peak values.
5. Average value= PK value + Average Factor (duty factor)

6. The EUT is tested radiation emission in different orientation(X, Y, Z). The worst emissions are reported in the report. Test photo document reflected the worst orientation's radiation photo.

7. Pulse Desensitization Correction Factor

Pulse Width (PW) = 17.77ms

$1/PW = 1/17.77\text{ms} = 0.056\text{kHz}$

RBW (100 kHz) > 1/PW (0.056 kHz)

Therefore PDCF is not needed

5. 20DB OCCUPIED BANDWIDTH

5.1. Block Diagram of Test Setup



(EUT: PIR CHIME WITH WIRELESS RECEIVER)

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $315 \text{ MHz} \times 0.25\% = 787.5 \text{ kHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

5.3. EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX mode measure it.

5.5. Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 0.5MHz.

5.5.2. Set SPA Max hold, Mark peak, -20 dB.

5.6.Measurement Result


The EUT does meet the FCC requirement.

-20 dB bandwidth = 60.0 kHz < 315MHz * 0.25% = 787.5KHz.

The spectral diagrams in appendix I.

6. RELEASE TIME MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: PIR CHIME WITH WIRELESS RECEIVER)

6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e)

Section 15.231(e) devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.3. EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

- 6.4.1. Setup the EUT and simulator as shown as Section 6.1.
- 6.4.2. Turn on the power of all equipment.
- 6.4.3. Let the EUT work in TX mode measure it.

6.5. Test Procedure

- 6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 1000 kHz, VBW = 3000 kHz, Span = 0 Hz.
- 6.5.2. Set EUT as normal operation.
- 6.5.3. Set SPA View. Delta Mark time.

6.6. Measurement Result

Test result: pass

Period Time = 39.2s

Duration time = 0.84s

Silent time = $39.2 - 0.84s = 38.36s > 10s$

Silent time = $39.2 - 0.84s = 38.36s > 30 * 0.84s = 25.2s$

The spectral diagrams in appendix I.

7. AVERAGE FACTOR MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: PIR CHIME WITH WIRELESS RECEIVER)

7.2. Average factor Measurement according to ANSI C63.4-2009

ANSI C63.4-2009 Section 13.4.2 Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum.

Average factor in dB = 20 log (duty cycle)

7.3. EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX mode measure it.

7.5. Test Procedure

7.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 1000 kHz,

VBW = 3000 kHz, Span = 0 Hz.

7.5.3. Set EUT as normal operation.

7.5.4. Set SPA View. Delta Mark time.

7.6. Measurement Result

The duty cycle is simply the on time divided by the period:

Effective period of the cycle = $(0.37 \times 13) + (1.08 \times 12)$ ms = 17.77 ms

DC = 17.77 ms / 46.2 ms = 38.46%

Therefore, the average factor is found by $20 \log 0.3846 = -8.30$ dB

The spectral diagrams in appendix I.


8. ANTENNA REQUIREMENT

8.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

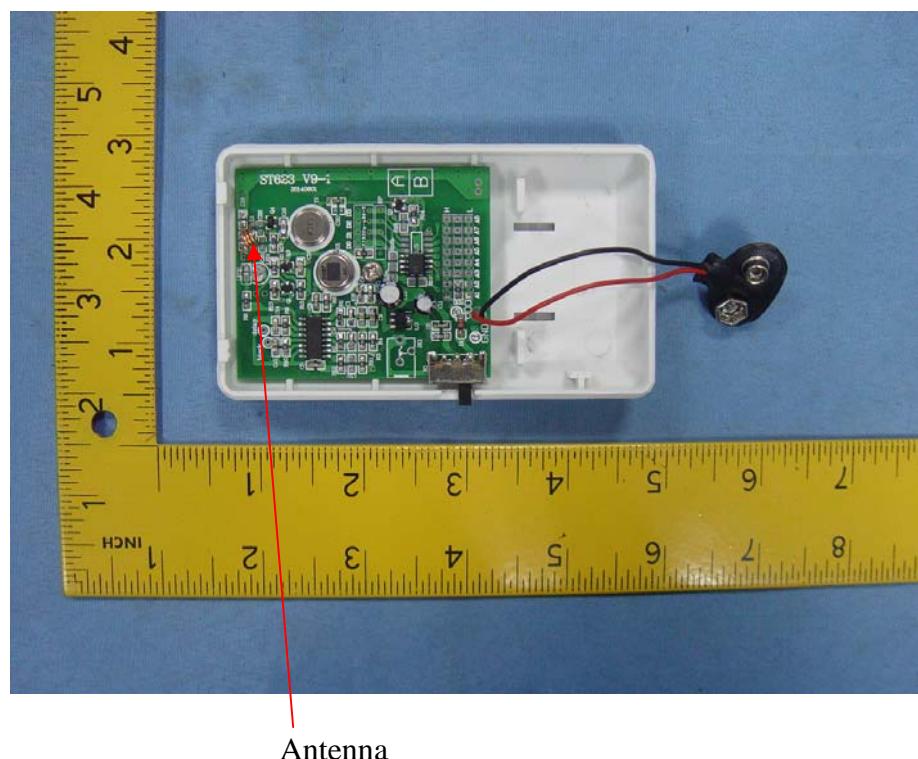

APPENDIX I

(Test Curves)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #4844

Standard: FCC 15.231(e) 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: PIR CHIME WITH WIRELESS RECEIVER

Mode: TX 315MHz

Model: 57930-T

Manufacturer: J-Xing

Polarization: Horizontal

Power Source: DC 9V


Date: 14/08/14/

Time: 9/03/42

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141451

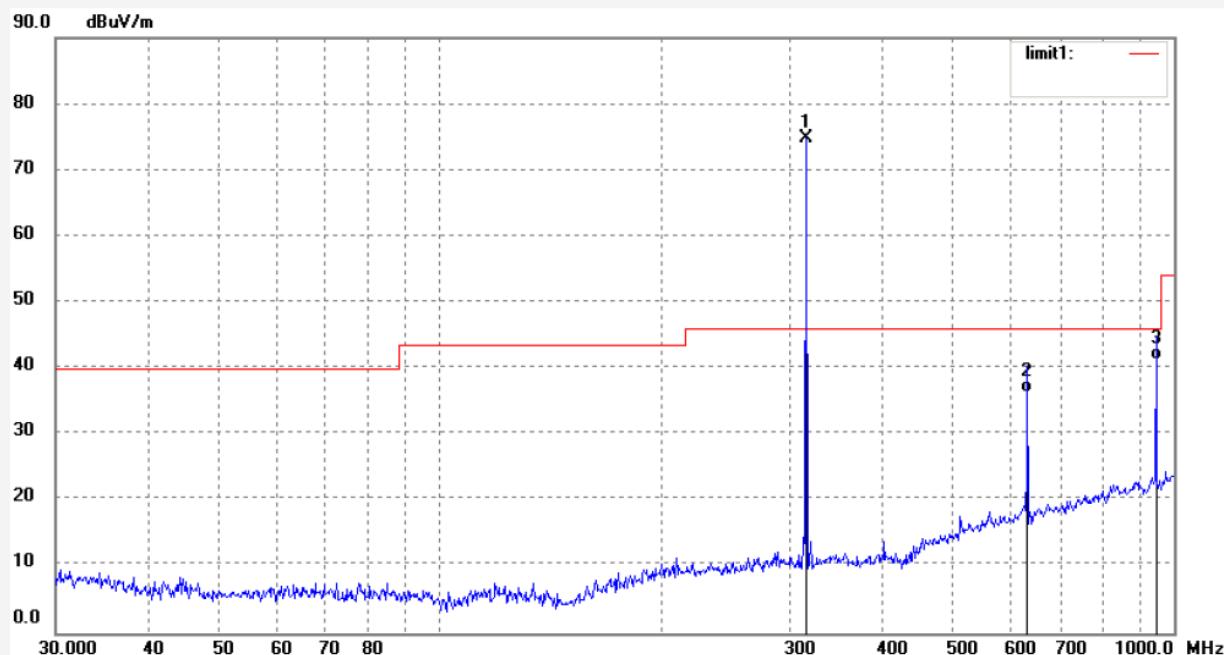

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	315.4806	92.38	-17.52	74.86			peak			
2	631.6884	47.32	-11.02	36.30			peak			
3	945.4398	46.70	-5.45	41.25			peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #4845

Polarization: Vertical

Standard: FCC 15.231(e) 3M Radiated

Power Source: DC 9V

Test item: Radiation Test

Date: 14/08/14/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/05/13

EUT: PIR CHIME WITH WIRELESS RECEIVER

Engineer Signature:


Mode: TX 315MHz

Distance: 3m

Model: 57930-T

Manufacturer: J-Xing

Note: Report No:ATE20141451

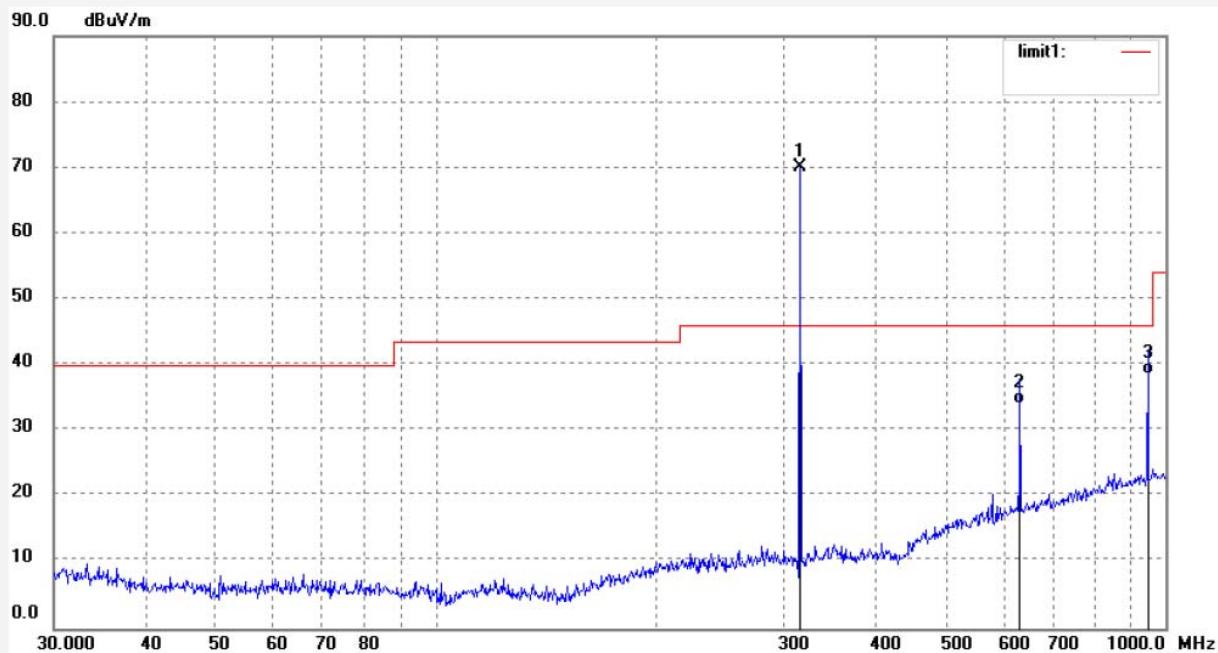

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	315.4806	87.59	-17.52	70.07			peak			
2	631.6884	45.10	-11.02	34.08			peak			
3	945.4398	44.01	-5.45	38.56			peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #4847

Polarization: Horizontal

Standard: FCC 15.231(e) 3M Radiated

Power Source: DC 9V

Test item: Radiation Test

Date: 14/08/14/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/09/20

EUT: PIR CHIME WITH WIRELESS RECEIVER

Engineer Signature:


Mode: TX 315MHz

Distance: 3m

Model: 57930-T

Manufacturer: J-Xing

Note: Report No:ATE20141451

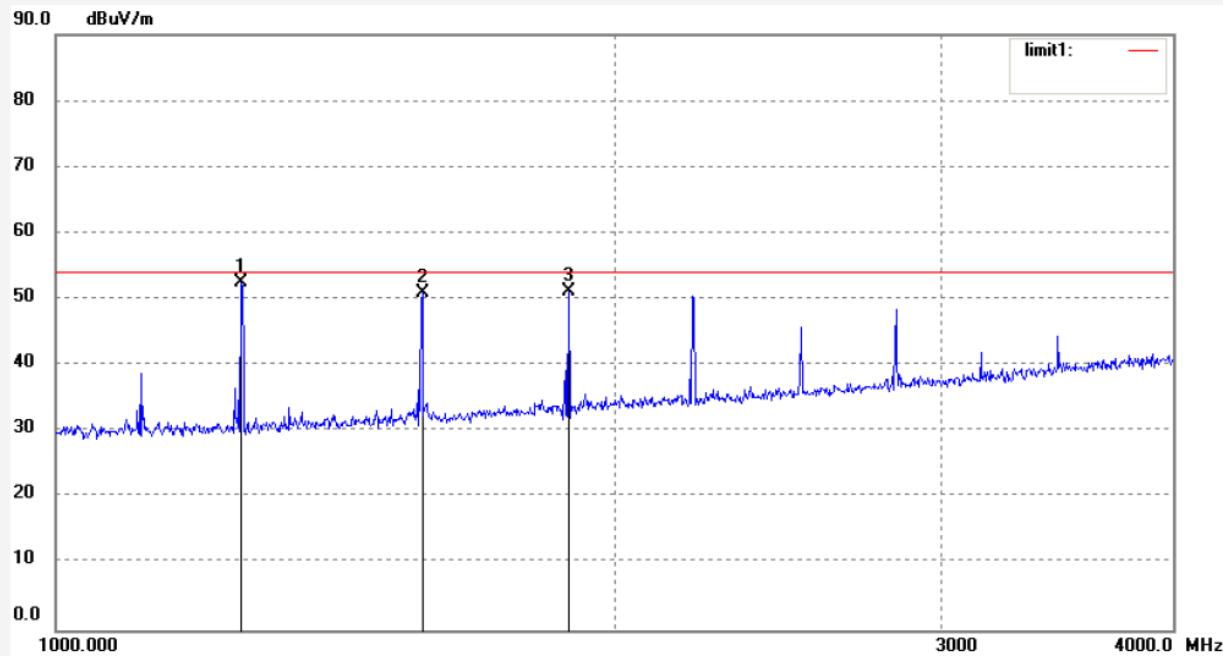

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1258.757	62.94	-10.50	52.44			peak			
2	1575.708	60.37	-9.39	50.98			peak			
3	1889.494	59.20	-7.92	51.28			peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #4846

Polarization: Vertical

Standard: FCC 15.231(e) 3M Radiated

Power Source: DC 9V

Test item: Radiation Test

Date: 14/08/14/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/08/26

EUT: PIR CHIME WITH WIRELESS RECEIVER

Engineer Signature:


Mode: TX 315MHz

Distance: 3m


Model: 57930-T

Manufacturer: J-Xing


Note: Report No:ATE20141451

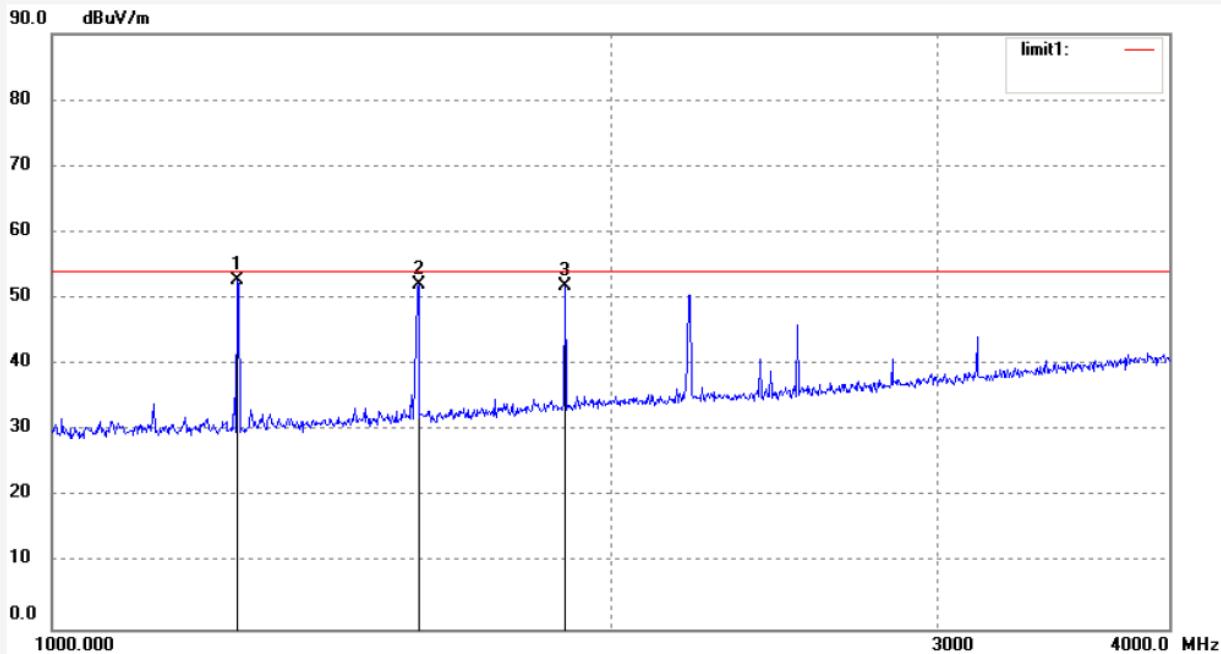


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1258.757	63.28	-10.50	52.78			peak			
2	1575.708	61.48	-9.39	52.09			peak			
3	1889.494	59.84	-7.92	51.92			peak			

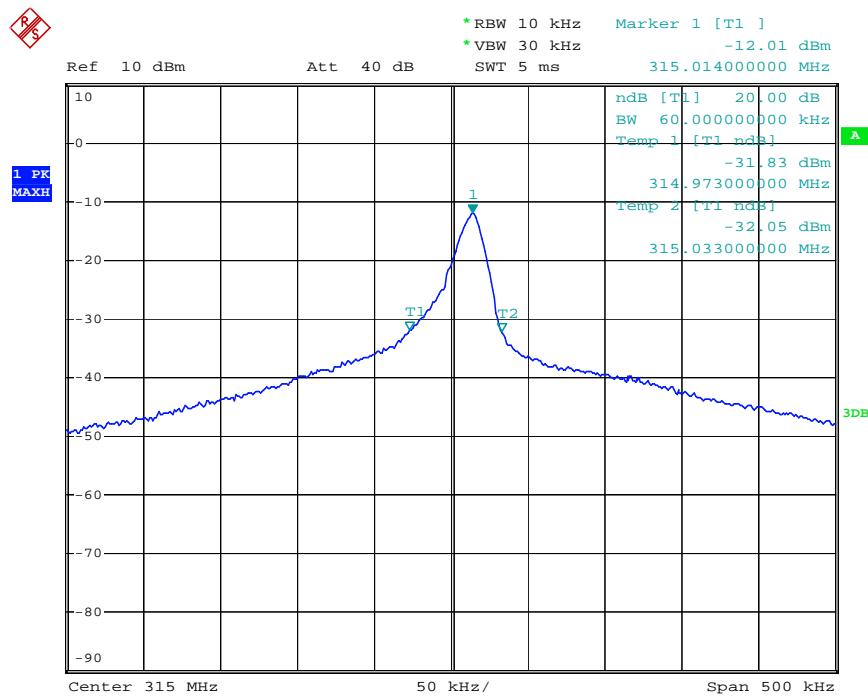

Date: 15.AUG.2014 16:05:20

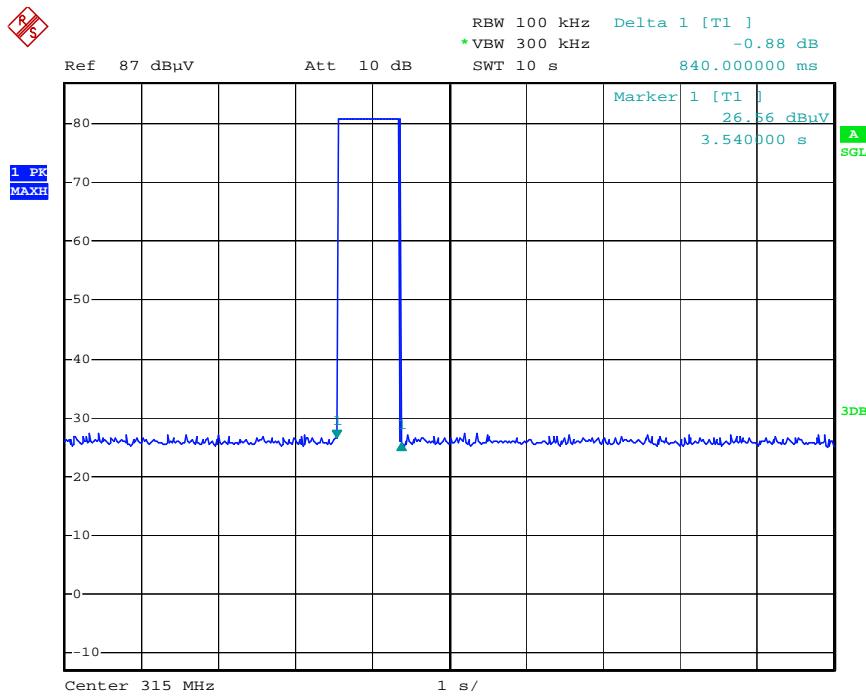


Date: 15.AUG.2014 10:19:37

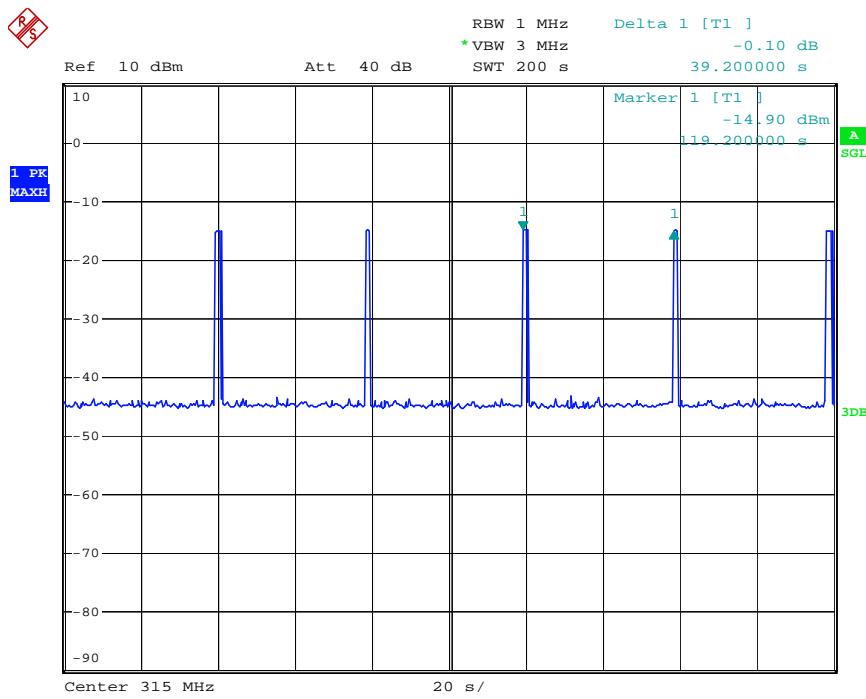

Date: 15.AUG.2014 15:22:12


the duration of a transmission Time = 0.84s

the silent period between transmissions =(39.2-0.84)s=38.36s

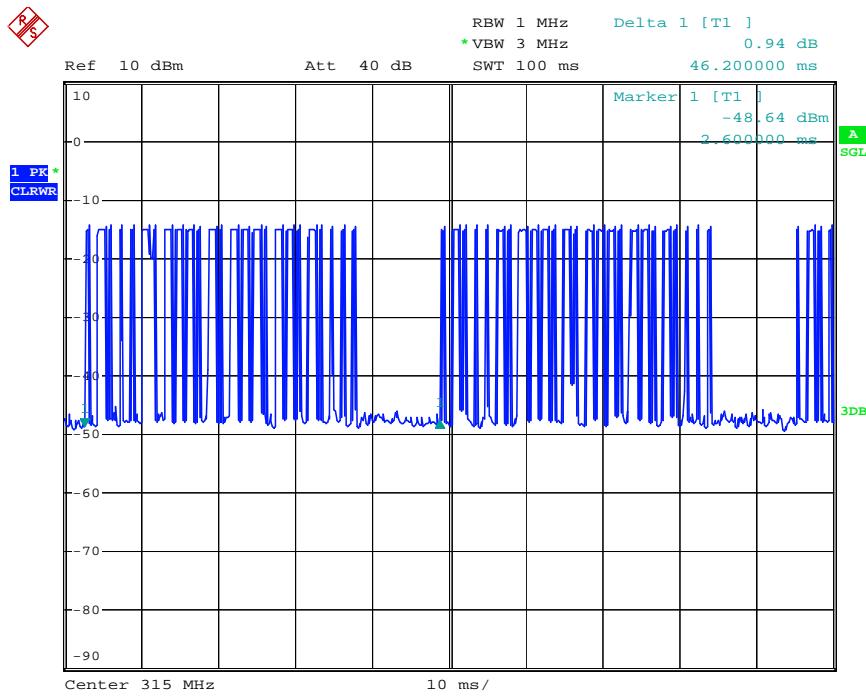


Date: 15.AUG.2014 14:48:36

The graph shows the pattern of coding during the signal transmission.
 The duration of one cycle = 46.2 ms.

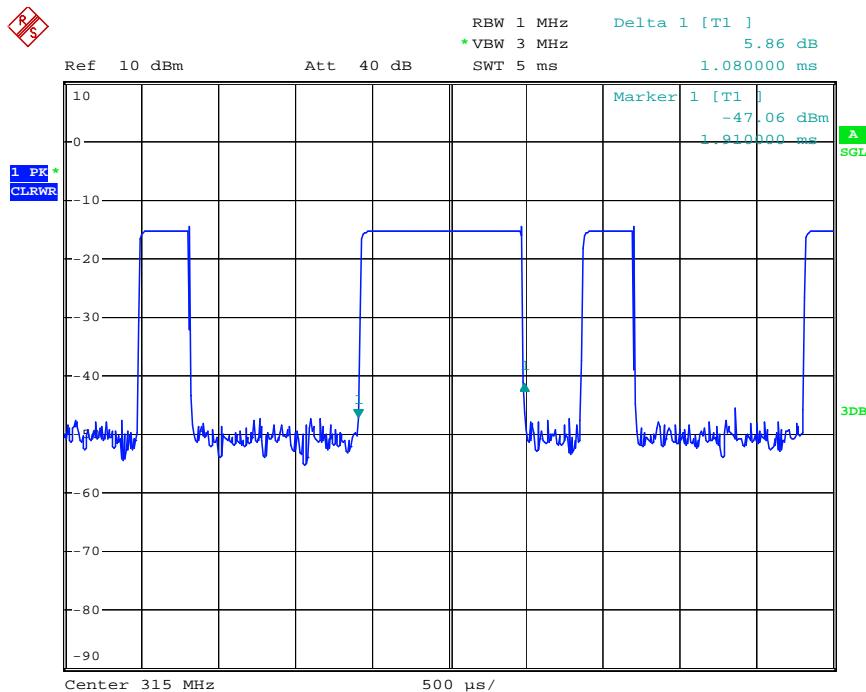


Date: 15.AUG.2014 14:50:05

The graph shows the duration of 'on' signal. From marker 1 to Delta 1, duration is 1.08ms.

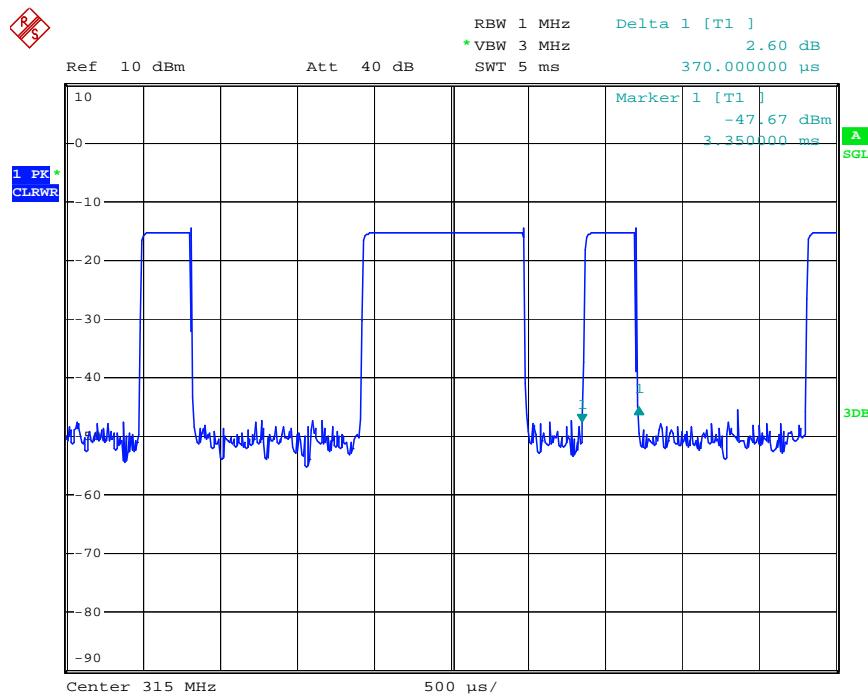

Date: 15.AUG.2014 14:50:26

The graph shows the duration of 'on' signal. From marker 1 to Delta 1, duration is 0.37 ms.

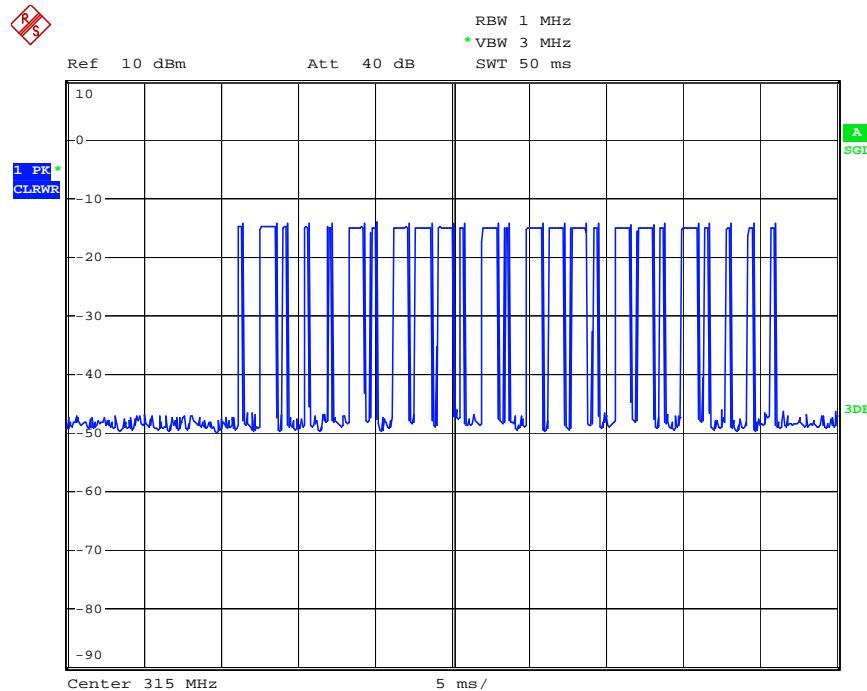

Date: 15.AUG.2014 14:51:19