



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

## FCC PART 15 SUBPART C TEST REPORT

### FCC Part 15.247

Report Reference No.....: CTL1407021496-WF

Compiled by

( position+printed name+signature) .: File administrators Jacky Chen

*Jacky Chen*

Name of the organization performing the tests

Test Engineer Tracy Qi

*Tracy Qi*

( position+printed name+signature) .:

Approved by

( position+printed name+signature) .: Manager Tracy Qi

*Tracy Qi*

Date of issue.....: Aug. 13, 2014

Test Laboratory Name .....: Shenzhen CTL Testing Technology Co., Ltd.

Address .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: Super Safe International Co.,Ltd.

Address .....: 1Floor, NO.27, 164 Alley, SongJiang Road, ZhongShan District, TaiPei City, Taiwan

### Test specification:

Standard .....: FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

### Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: 2.5inch HD WIFI Raid enclosure box

FCC ID.....: 2ACW5-SSW2B

Trade Mark .....: N/A

Model/Type reference .....: SSW2B

Work frequency .....: 802.11b/g/n(20MHz): 2412~2462MHz

Type of modulation.....: 802.11b DSSS, 802.11g/n: OFDM

Data Rate .....: 802.11b: 1/2/5.5/11 Mbps

802.11g: 6/9/12/18/24/36/48/54 Mbps

802.11n: up to 65 Mbps

Antenna Gain .....: -1.0dBi

Antenna type .....: Internal

Result .....: Positive

**TEST REPORT**

|                          |                         |               |
|--------------------------|-------------------------|---------------|
| <b>Test Report No. :</b> | <b>CTL1407021496-WF</b> | Aug. 13, 2014 |
|                          |                         | Date of issue |

**Equipment under Test** : 2.5inch HD WIFI Raid enclosure box

**Model /Type** : SSW2B

**Applicant** : Super Safe International Co.,Ltd.

**Address** : 1Floor, NO.27, 164 Alley, SongJiang Road, ZhongShan District, TaiPei City, Taiwan

**Manufacturer** : Super Safe International Co.,Ltd.

**Address** : 1Floor, NO.27, 164 Alley, SongJiang Road, ZhongShan District, TaiPei City, Taiwan

|                                                          |                 |
|----------------------------------------------------------|-----------------|
| <b>Test Result</b> according to the standards on page 4: | <b>Positive</b> |
|----------------------------------------------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                  |                                                             |                  |
|------------------|-------------------------------------------------------------|------------------|
| <b><u>1.</u></b> | <b><u>TEST STANDARDS.....</u></b>                           | <b><u>4</u></b>  |
| <b><u>2.</u></b> | <b><u>SUMMARY .....</u></b>                                 | <b><u>5</u></b>  |
| 2.1.             | General Remarks                                             | 5                |
| 2.2.             | Equipment Under Test                                        | 5                |
| 2.3.             | Short description of the Equipment under Test (EUT)         | 5                |
| 2.4.             | EUT operation mode                                          | 5                |
| 2.5.             | EUT configuration                                           | 6                |
| 2.6.             | NOTE                                                        | 6                |
| 2.7.             | Related Submittal(s) / Grant (s)                            | 6                |
| 2.8.             | Modifications                                               | 6                |
| <b><u>3.</u></b> | <b><u>TEST ENVIRONMENT .....</u></b>                        | <b><u>7</u></b>  |
| 3.1.             | Address of the test laboratory                              | 7                |
| 3.2.             | Test Facility                                               | 7                |
| 3.3.             | Environmental conditions                                    | 7                |
| 3.4.             | Configuration of Tested System                              | 7                |
| 3.5.             | Duty Cycle                                                  | 8                |
| 3.6.             | Statement of the measurement uncertainty                    | 8                |
| 3.7.             | Equipments Used during the Test                             | 9                |
| 3.8.             | Summary of Test Result                                      | 10               |
| <b><u>4.</u></b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>              | <b><u>11</u></b> |
| 4.1.             | Conducted Emissions Test                                    | 11               |
| 4.2.             | Radiated Emission Test                                      | 14               |
| 4.3.             | 6dB Bandwidth Measurement                                   | 19               |
| 4.4.             | Maximum Peak Output Power                                   | 26               |
| 4.5.             | Band Edge Measurement                                       | 28               |
| 4.6.             | Power Spectral Density Measurement                          | 53               |
| 4.7.             | Spurious RF Conducted Emission                              | 60               |
| 4.8.             | Antenna Requirement                                         | 70               |
| <b><u>5.</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>            | <b><u>71</u></b> |
| <b><u>6.</u></b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b> | <b><u>73</u></b> |

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2009](#): American National Standard for Testing Unlicensed Wireless Devices.

[ANSI C63.4-2009](#)

[KDB Publication No. 558074 D01 v03r01 Guidance on Measurements for Digital Transmission Systems](#)



## 2. SUMMARY

### 2.1. General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | July 30, 2014 |
|                                |   |               |
| Testing commenced on           | : | July 30, 2014 |
|                                |   |               |
| Testing concluded on           | : | Aug. 13, 2014 |

### 2.2. Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input checked="" type="radio"/> 120V / 60 Hz                     | <input type="radio"/> 115V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 5V from adapter or USB port

#### Description of the test mode

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT, but only eleventh channels used for USA.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

For 20MHz bandwidth systems, use channel 1~11.

### 2.3. Short description of the Equipment under Test (EUT)

2.5inch HD WIFI Raid enclosure box.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

### 2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.

2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with highest data rate are chosen for full testing.

3. Test Mode:

| Test Mode(TM) | Description  | Remark                                     |
|---------------|--------------|--------------------------------------------|
| 1             | Transmitting | 802.11 b<br>2412MHz, 2437MHz, 2462MHz      |
| 2             | Transmitting | 802.11 g<br>2412MHz, 2437MHz, 2462MHz      |
| 3             | Transmitting | 802.11 n HT20<br>2412MHz, 2437MHz, 2462MHz |

## 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - supplied by the lab

● Notebook PC

Manufacturer : DELL

Model No. : PP18L FCC DOC APPROVAL

○ Hard Disk

Manufacturer : Seagate

Model No. : 160GB

## 2.6. NOTE

1. The EUT is an 802.11b/g/n 2.5inch HD WIFI Raid enclosure box, The functions of the EUT listed as below:

|                         | Test Standards                           | Reference Report |
|-------------------------|------------------------------------------|------------------|
| WLAN 802.11b/g, 802.11n | FCC Part 15 Subpart C<br>(Section15.247) | CTL1407021496-WF |

2. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|-------------|-----------|-----------|-----------|
| 802.11b             | ✓           | —         | —         | —         |
| 802.11g             | ✓           | —         | —         | —         |
| 802.11n(20MHz)      | ✓           | —         | —         | —         |

3. The EUT incorporates a SISO function, Physically, the EUT provides two completed transmitter and two completed receivers.

| Modulation Mode | TX Function |
|-----------------|-------------|
| 802.11b         | 1TX         |
| 802.11g         | 1TX         |
| 802.11n (20MHz) | 1TX         |

## 2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ACW5-SSW2B filing to comply with of the FCC Part 15.247 Rules.

## 2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.  
Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:


|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

3.4. Configuration of Tested System

AC power line conduction emission tes configuration

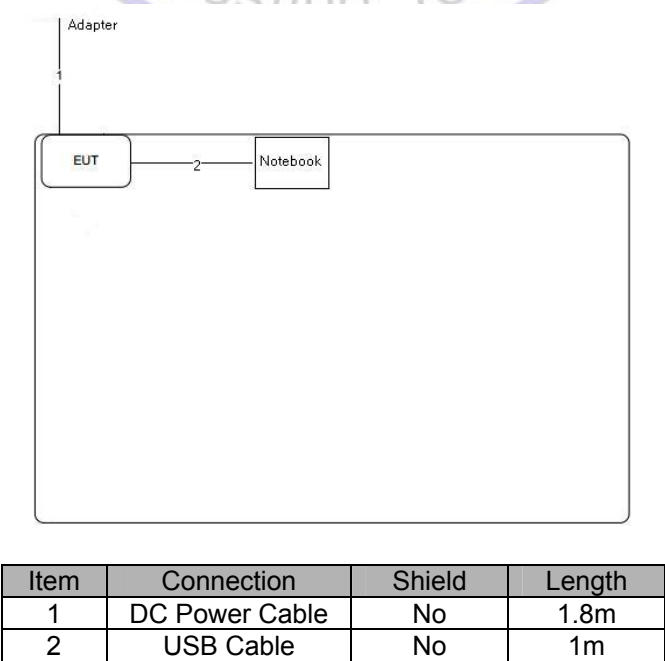

## Radiation emission test configuration

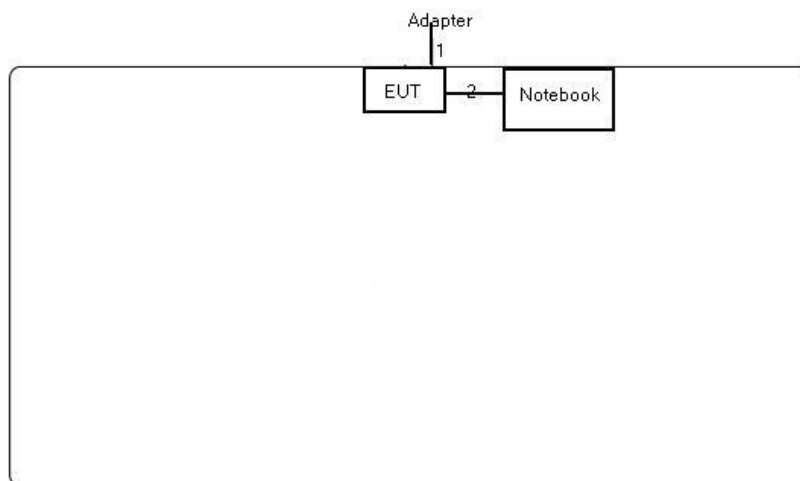

| Item | Connection     | Shield | Length |
|------|----------------|--------|--------|
| 1    | DC Power Cable | No     | 1.8m   |
| 2    | USB Cable      | No     | 1m     |

## 3.5. Duty Cycle

| Operated Mode for Worst Duty Cycle  |                                             |                  |  |
|-------------------------------------|---------------------------------------------|------------------|--|
| <input type="checkbox"/>            | Operated normally mode for worst duty cycle |                  |  |
| <input checked="" type="checkbox"/> | Operated test mode for worst duty cycle     |                  |  |
| Mode                                | Duty Cycle (%)                              | Duty Factor (dB) |  |
| 11b                                 | 100                                         | 0                |  |
| 11g                                 | 100                                         | 0                |  |
| 11n HT20                            | 100                                         | 0                |  |

## 3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10dB                  | (1)   |
| Radiated Emission     | Above 1GHz | 4.32dB                  | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.20dB                  | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.7. Equipments Used during the Test

| Test Equipment             | Manufacturer         | Model No.              | Serial No. | Calibration Date | Calibration Due Date |
|----------------------------|----------------------|------------------------|------------|------------------|----------------------|
| Bilog Antenna              | Sunol Sciences Corp. | JB1                    | A061713    | 2014/07/12       | 2015/07/11           |
| EMI Test Receiver          | R&S                  | ESCI                   | 103710     | 2014/07/10       | 2015/07/09           |
| Spectrum Analyzer          | Agilent              | E4407B                 | MY45108355 | 2014/07/06       | 2015/07/05           |
| Controller                 | EM Electronics       | Controller EM 1000     | N/A        | 2014/07/06       | 2015/07/05           |
| Horn Antenna               | Sunol Sciences Corp. | DRH-118                | A062013    | 2014/07/12       | 2015/07/11           |
| Horn Antenna               | SCHWARZBECK          | BBHA9170               | 1562       | 2014/07/12       | 2015/07/11           |
| Active Loop Antenna        | SCHWARZBECK          | FMZB1519               | 1519-037   | 2014/07/12       | 2015/07/11           |
| LISN                       | R&S                  | ENV216                 | 101316     | 2014/07/10       | 2015/07/09           |
| LISN                       | SCHWARZBECK          | NSLK8127               | 8127687    | 2014/07/10       | 2015/07/09           |
| Microwave Preamplifier     | HP                   | 8349B                  | 3155A00882 | 2014/07/10       | 2015/07/09           |
| Amplifier                  | HP                   | 8447D                  | 3113A07663 | 2014/07/10       | 2015/07/09           |
| Transient Limiter          | Com-Power            | LIT-153                | 532226     | 2014/07/10       | 2015/07/09           |
| Radio Communication Tester | R&S                  | CMU200                 | 3655A03522 | 2014/07/06       | 2015/07/05           |
| Temperature/Humidity Meter | zhicheng             | ZC1-2                  | 22522      | 2014/07/10       | 2015/07/09           |
| SIGNAL GENERATOR           | HP                   | 8647A                  | 3200A00852 | 2014/07/10       | 2015/07/09           |
| Peak Power Meter +Sensor   | Anritsu              | ML2495A +MA2491A       | 220.23.35  | 2014/07/06       | 2015/07/05           |
| Climate Chamber            | ESPEC                | EL-10KA                | A20120523  | 2014/07/06       | 2015/07/05           |
| High-Pass Filter           | K&L                  | 9SH10-2700/X12750 -O/O | /          | 2014/07/06       | 2015/07/05           |
| High-Pass Filter           | K&L                  | 41H10-1375/U12750 -O/O | /          | 2014/07/06       | 2015/07/05           |
| RF Cable                   | HUBER+SUHNER         | RG214                  | /          | 2014/07/09       | 2015/07/08           |

### 3.8. Summary of Test Result

| FCC PART 15                     |                                     |      |
|---------------------------------|-------------------------------------|------|
| FCC Part 15.207                 | AC Power Conducted Emission         | PASS |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                       | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission      | PASS |
| FCC Part 15.247(b)              | Maximum Peak Output Power           | PASS |
| FCC Part 15.247(e)              | Power Spectral Density              | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions                  | PASS |
| FCC Part 15.247(d)              | Band Edge Compliance of RF Emission | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement                 | PASS |

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


| Test Items                                                                                                       | Mode            | Data Rate | Channel |
|------------------------------------------------------------------------------------------------------------------|-----------------|-----------|---------|
| AC Power Conducted Emission                                                                                      | Normal Link     | 11 Mbps   | 1       |
| Maximum Peak Conducted Output Power<br>Power Spectral Density<br>6dB Bandwidth<br>Spurious RF conducted emission | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | /         | 3/6/9   |
| Radiated Emission 30MHz~1GHz                                                                                     | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | /         | 3/6/9   |
| Radiated Emission 1GHz~10th Harmonic                                                                             | 11b/DSSS        | 11 Mbps   | 1/6/11  |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/6/11  |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/6/11  |
|                                                                                                                  | 11n(40MHz)/OFDM | /         | 3/6/9   |
| Band Edge Compliance of RF Emission                                                                              | 11b/DSSS        | 11 Mbps   | 1/11    |
|                                                                                                                  | 11g/OFDM        | 54 Mbps   | 1/11    |
|                                                                                                                  | 11n(20MHz)/OFDM | 65Mbps    | 1/11    |
|                                                                                                                  | 11n(40MHz)/OFDM | /         | 3/9     |

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

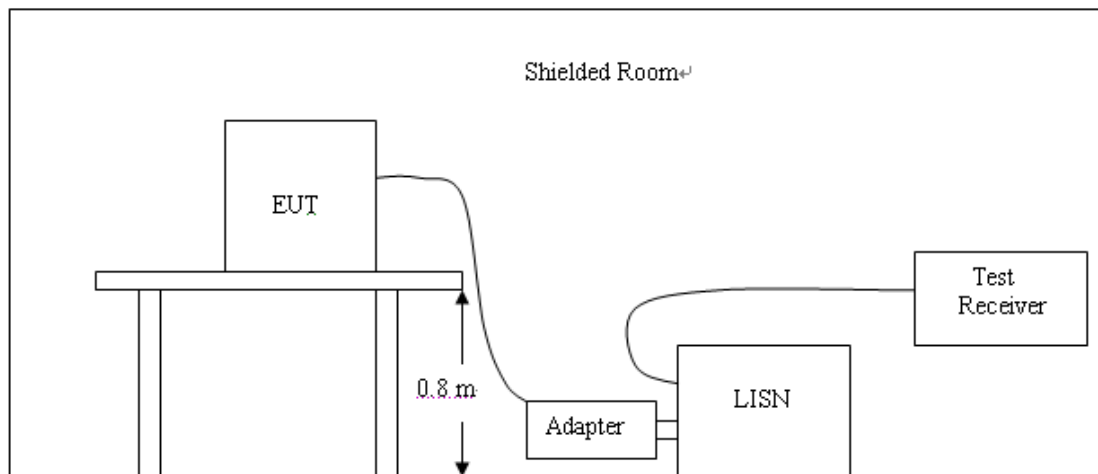

#### TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

| Frequency<br>(MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|--------------------|--------------------------------|------|---------|--------|
|                    | CLASS A                        |      | CLASS B |        |
|                    | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50        | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00        | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0        | 73                             | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

**The RBW/VBW for 150KHz to 30MHz: 9KHz**

**TEST RESULTS****SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

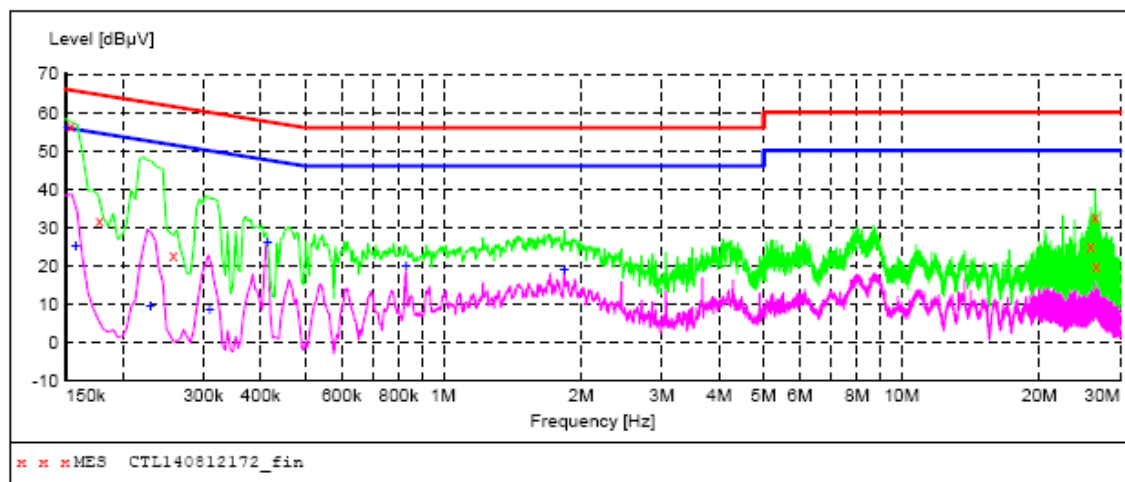**MEASUREMENT RESULT: "CTL140812172\_fin"**

8/12/2014 4:33PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154000         | 56.40         | 10.2         | 66            | 9.4          | QP       | L1   | GND |
| 0.178000         | 31.80         | 10.2         | 65            | 32.8         | QP       | L1   | GND |
| 0.258000         | 22.80         | 10.2         | 62            | 38.7         | QP       | L1   | GND |
| 25.868000        | 25.00         | 11.1         | 60            | 35.0         | QP       | L1   | GND |
| 26.414000        | 32.80         | 11.2         | 60            | 27.2         | QP       | L1   | GND |
| 26.540000        | 20.10         | 11.2         | 60            | 39.9         | QP       | L1   | GND |


**MEASUREMENT RESULT: "CTL140812172\_fin2"**

8/12/2014 4:33PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.158000         | 25.00         | 10.2         | 56            | 30.6         | AV       | L1   | GND |
| 0.230000         | 9.20          | 10.2         | 52            | 43.2         | AV       | L1   | GND |
| 0.310000         | 8.50          | 10.2         | 50            | 41.5         | AV       | L1   | GND |
| 0.414000         | 26.10         | 10.2         | 48            | 21.5         | AV       | L1   | GND |
| 0.830000         | 19.80         | 10.2         | 46            | 26.2         | AV       | L1   | GND |
| 1.838000         | 18.80         | 10.3         | 46            | 27.2         | AV       | L1   | GND |

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

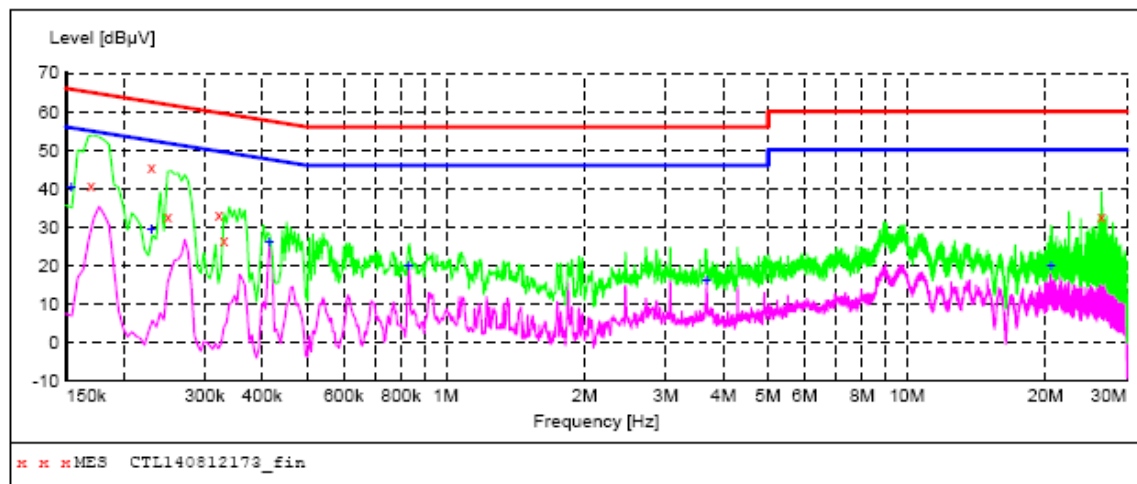**MEASUREMENT RESULT: "CTL140812173\_fin"**

8/12/2014 4:36PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.170000         | 40.70         | 10.2         | 65            | 24.3         | QP       | N    | GND |
| 0.230000         | 45.60         | 10.2         | 62            | 16.8         | QP       | N    | GND |
| 0.250000         | 32.70         | 10.2         | 62            | 29.1         | QP       | N    | GND |
| 0.322000         | 33.20         | 10.2         | 60            | 26.5         | QP       | N    | GND |
| 0.330000         | 26.40         | 10.2         | 60            | 33.1         | QP       | N    | GND |
| 26.414000        | 32.90         | 11.2         | 60            | 27.1         | QP       | N    | GND |

**MEASUREMENT RESULT: "CTL140812173\_fin2"**


8/12/2014 4:36PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154000         | 40.30         | 10.2         | 56            | 15.5         | AV       | N    | GND |
| 0.230000         | 29.50         | 10.2         | 52            | 22.9         | AV       | N    | GND |
| 0.414000         | 26.00         | 10.2         | 48            | 21.6         | AV       | N    | GND |
| 0.830000         | 19.80         | 10.2         | 46            | 26.2         | AV       | N    | GND |
| 3.680000         | 16.20         | 10.4         | 46            | 29.8         | AV       | N    | GND |
| 20.516000        | 20.00         | 11.0         | 50            | 30.0         | AV       | N    | GND |


4.2. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

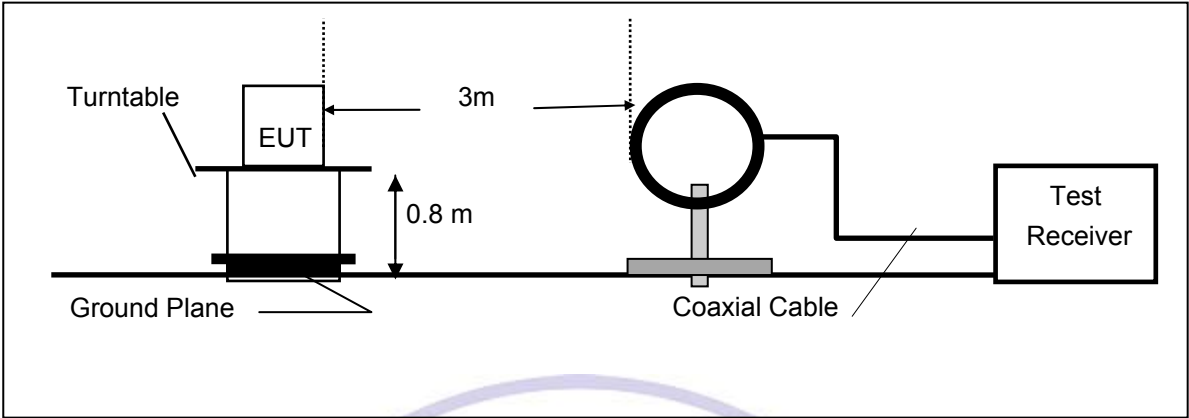

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

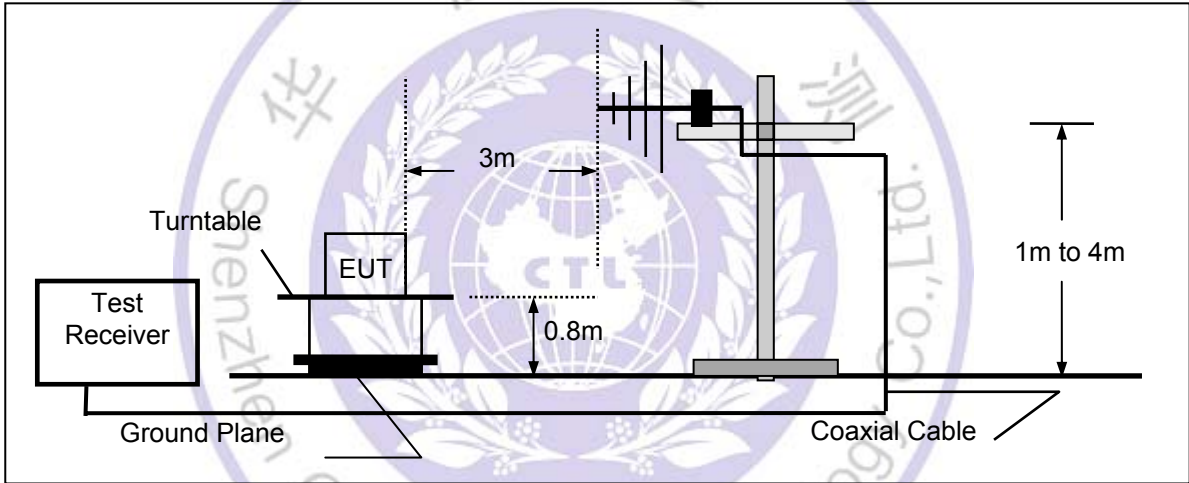

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

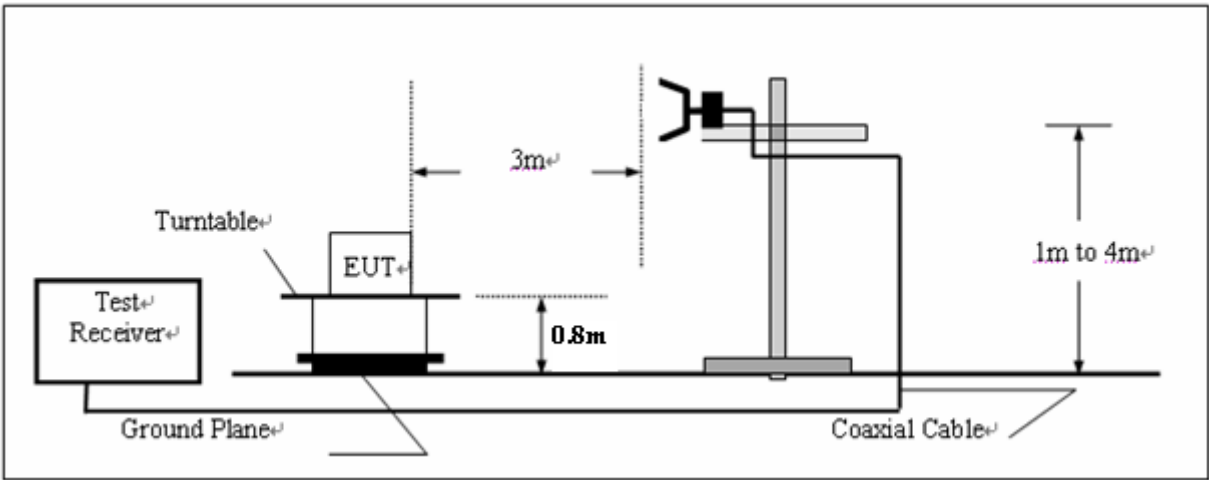

## **FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

## **TEST PROCEDURE**

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS), the EUT was setup according to ANSI C63.4: and tested according to ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f > 1$  GHz, 120 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for PK value  
Detector function = AV for AV value; Trace = max hold. Repeat above procedures until all frequency measurements have been completed.

Note:

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

## **LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

**TEST RESULTS**

802.11b

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2412.0          | 71.5                   | 30.8        | 102.3                  | Fundamental    | /           | PK       |
|    | V       | 316.4           | 10.8                   | 14.8        | 25.6                   | 46             | 20.4        | QP       |
|    | V       | 500.0           | 16.5                   | 19.7        | 36.2                   | 46             | 9.8         | QP       |
|    | V       | 3200.0          | 46.7                   | -0.6        | 46.1                   | 54(note3)      | 7.9         | PK       |
|    | V       | 4825.0          | 47.5                   | 2.6         | 50.1                   | 54(note3)      | 3.9         | PK       |
|    | V       | 7239.0          | 53.6                   | 8.1         | 61.7                   | 74             | 12.3        | PK       |
|    | V       | 7239.0          | 40.1                   | 8.9         | 49.0                   | 54             | 5           | AV       |
|    | H       | 24000.0         | 60.1                   | -8.9        | 51.2                   | 54(note3)      | 2.8         | PK       |
| 6  | V       | 2437.0          | 71.4                   | 31.2        | 102.6                  | Fundamental    | /           | PK       |
|    | V       | 302.1           | 13.5                   | 15.2        | 28.7                   | 46             | 17.3        | QP       |
|    | V       | 548.6           | 14.2                   | 21.2        | 35.4                   | 46             | 10.6        | QP       |
|    | V       | 3200.0          | 41.9                   | -0.6        | 41.3                   | 54(note3)      | 12.7        | PK       |
|    | V       | 4876.0          | 48.3                   | 2.8         | 51.1                   | 54(note3)      | 2.9         | PK       |
|    | V       | 7315.5          | 55.1                   | 8.8         | 63.9                   | 74             | -9.9        | PK       |
|    | V       | 7315.5          | 40.3                   | 8.1         | 48.4                   | 54             | 25.6        | AV       |
|    | H       | 24000.0         | 59.2                   | -8.9        | 50.3                   | 54(note3)      | 3.7         | PK       |
| 11 | V       | 2462.0          | 71                     | 30.9        | 101.9                  | Fundamental    | /           | PK       |
|    | V       | 289.3           | 12.9                   | 14.9        | 27.8                   | 46             | 18.2        | QP       |
|    | H       | 564.0           | 14.2                   | 21.2        | 35.4                   | 46             | 10.6        | QP       |
|    | V       | 3200.0          | 43.4                   | -0.6        | 42.8                   | 54(note3)      | 11.2        | PK       |
|    | V       | 4927.0          | 47.4                   | 3.0         | 50.4                   | 54(note3)      | 3.6         | PK       |
|    | V       | 7383.5          | 55.7                   | 8.9         | 64.6                   | 74             | 9.4         | PK       |
|    | V       | 7383.5          | 42.3                   | 8.9         | 51.2                   | 54             | 2.8         | AV       |
|    | H       | 24000.0         | 59.2                   | -8.9        | 50.3                   | 54(note3)      | 3.7         | PK       |

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

## 802.11g

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2411.9          | 68.5                   | 31.9        | 100.4                  | Fundamental    | /           | PK       |
|    | H       | 245.8           | 14.7                   | 15.7        | 30.4                   | 46             | 15.6        | QP       |
|    | H       | 541.4           | 15.0                   | 21.3        | 36.3                   | 46             | 9.7         | QP       |
|    | V       | 3200.0          | 37.2                   | -0.6        | 36.6                   | 54(note3)      | 17.4        | PK       |
|    | V       | 4824.0          | 46.6                   | 2.6         | 49.2                   | 54(note3)      | 4.8         | PK       |
|    | V       | 7239.0          | 39.3                   | 8.9         | 48.2                   | 54             | 5.8         | AV       |
|    | V       | 7239.0          | 48.4                   | 8.9         | 57.3                   | 74             | 16.7        | PK       |
|    | H       | 24000.0         | 59.9                   | -8.9        | 51.0                   | 54(note3)      | 3.0         | PK       |
| 6  | V       | 2437.0          | 68.3                   | 31.2        | 99.5                   | Fundamental    | /           | PK       |
|    | V       | 359.6           | 15.3                   | 14.8        | 30.1                   | 46             | 15.9        | QP       |
|    | V       | 638.9           | 16.5                   | 21.2        | 37.7                   | 46             | 8.3         | QP       |
|    | V       | 3200.0          | 43.2                   | -0.6        | 42.6                   | 54(note3)      | 11.4        | PK       |
|    | V       | 4876.0          | 46.3                   | 2.8         | 49.1                   | 54(note3)      | 4.9         | PK       |
|    | V       | 7298.5          | 40.1                   | 8.8         | 48.9                   | 54(note3)      | 5.1         | PK       |
|    | H       | 24000.0         | 59.7                   | -8.9        | 50.8                   | 54(note3)      | 3.2         | PK       |
| 11 | V       | 2462.3          | 70.0                   | 30.9        | 100.9                  | Fundamental    | /           | PK       |
|    | H       | 698.7           | 15.2                   | 21.2        | 36.4                   | 46             | 9.6         | QP       |
|    | V       | 282.6           | 13.6                   | 14.7        | 28.3                   | 46             | 17.7        | QP       |
|    | V       | 3200.0          | 42.7                   | -0.6        | 42.1                   | 54(note3)      | 11.9        | PK       |
|    | V       | 4927.0          | 45.9                   | 3.0         | 48.9                   | 54(note3)      | 5.1         | PK       |
|    | V       | 7392.0          | 38.6                   | 8.9         | 47.5                   | 54             | 6.5         | AV       |
|    | V       | 7392.0          | 52.3                   | 8.9         | 61.2                   | 74             | 12.8        | PK       |
|    | H       | 24000.0         | 59.9                   | -8.9        | 51.0                   | 54(note3)      | 3.0         | PK       |

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

## 802.11n(20MHz)

| CH | Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| 1  | V       | 2412.1          | 68.6                   | 30.7        | 99.3                   | Fundamental    | /           | PK       |
|    | H       | 542.9           | 9.8                    | 21.2        | 31.0                   | 46             | 15.0        | QP       |
|    | H       | 362.8           | 20.0                   | 15.1        | 35.1                   | 46             | 10.9        | QP       |
|    | V       | 3200.0          | 44.2                   | -0.6        | 43.6                   | 54(note3)      | 10.4        | PK       |
|    | V       | 4824.0          | 47.3                   | 2.6         | 49.9                   | 54(note3)      | 4.1         | PK       |
|    | V       | 7236.0          | 54.9                   | 8.9         | 63.8                   | 74             | 10.2        | PK       |
|    | V       | 7236.0          | 42.2                   | 8.9         | 51.1                   | 54             | 2.9         | AV       |
|    | H       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54(note3)      | 3.8         | PK       |
| 6  | V       | 2437.0          | 67.8                   | 31.2        | 99.0                   | Fundamental    | /           | PK       |
|    | H       | 597.6           | 9.6                    | 21.2        | 30.8                   | 46             | 15.2        | QP       |
|    | H       | 320.3           | 16.2                   | 16.0        | 32.2                   | 46             | 13.8        | QP       |
|    | V       | 3200.0          | 42.9                   | -0.6        | 42.3                   | 54(note3)      | 11.7        | PK       |
|    | V       | 4876.0          | 47.2                   | 2.8         | 50.0                   | 54(note3)      | 4.0         | PK       |
|    | V       | 7307.0          | 53.3                   | 8.8         | 62.1                   | 74             | -8.1        | PK       |
|    | V       | 7307.0          | 41.0                   | 8.8         | 49.8                   | 54             | 24.2        | AV       |
|    | H       | 24000.0         | 59.1                   | -8.9        | 50.2                   | 54(note3)      | 3.8         | PK       |
| 11 | V       | 2462.0          | 67.8                   | 30.9        | 98.7                   | Fundamental    | /           | PK       |
|    | H       | 364.3           | 17.4                   | 14.7        | 32.1                   | 46             | 13.9        | QP       |
|    | H       | 541.9           | 16.0                   | 21.2        | 37.2                   | 46             | 8.8         | QP       |
|    | V       | 3200.0          | 44.5                   | -0.6        | 43.9                   | 54(note3)      | 10.1        | PK       |
|    | V       | 4924.0          | 47.7                   | 3.0         | 50.7                   | 54(note3)      | 3.3         | PK       |
|    | V       | 7375.0          | 53.5                   | 9.0         | 62.5                   | 74             | 11.5        | PK       |
|    | V       | 7375.0          | 35.8                   | 9.0         | 44.8                   | 54             | 9.2         | AV       |
|    | H       | 24000.0         | 59.0                   | -8.9        | 50.1                   | 54(note3)      | 3.9         | PK       |


Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

### 4.3. 6dB Bandwidth Measurement

#### TEST CONFIGURATION



#### TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

#### LIMIT


For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST RESULTS


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | 6dB Occupied Bandwidth             |
| Test Mode | : | Mode 1: Transmit by 802.11b        |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 9140                     | 500         | Pass   |
| 06          | 2437            | 9685                     | 500         | Pass   |
| 11          | 2462            | 9126                     | 500         | Pass   |


Channel 01 (2412MHz)

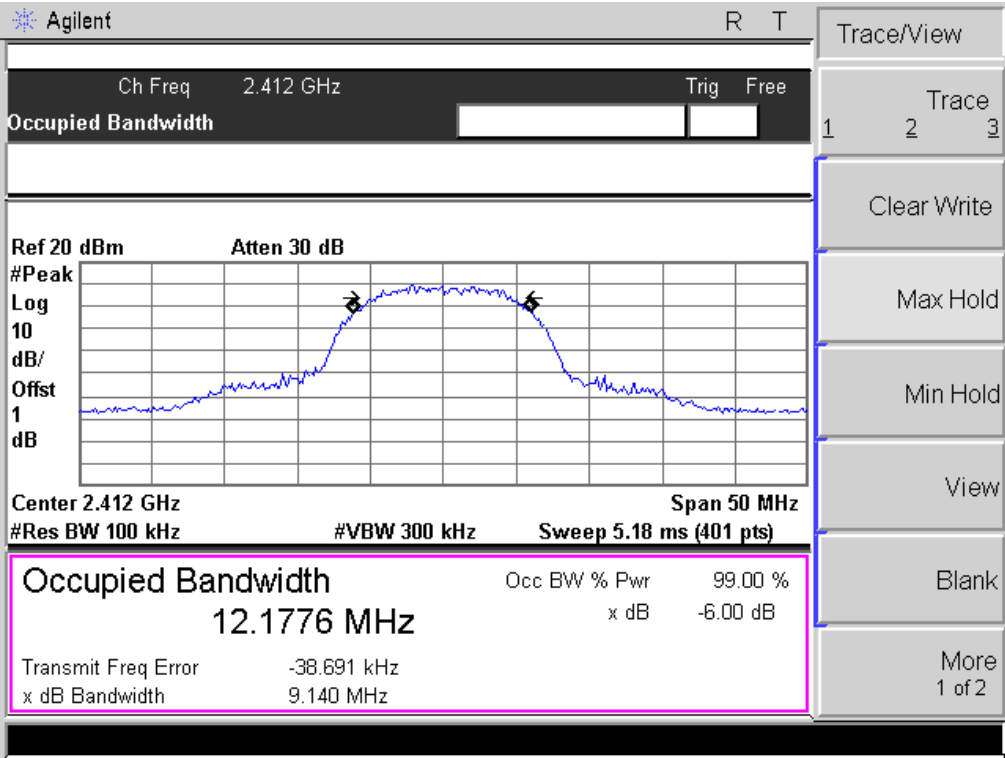

Channel 06 (2437MHz)

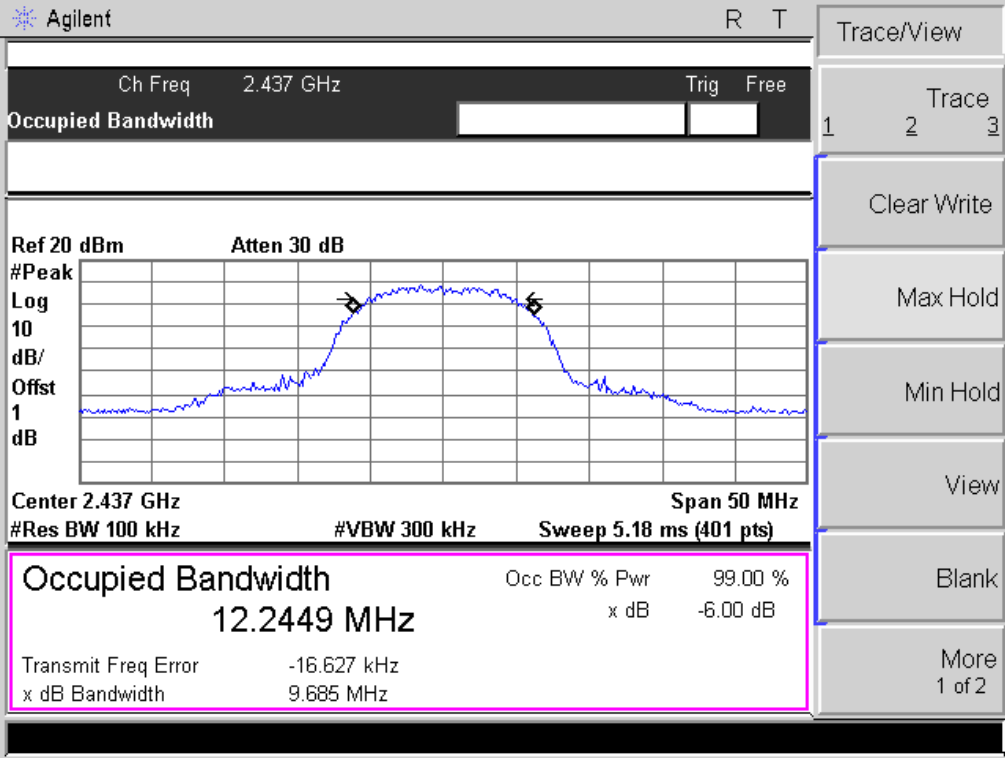


Channel 11 (2462MHz)

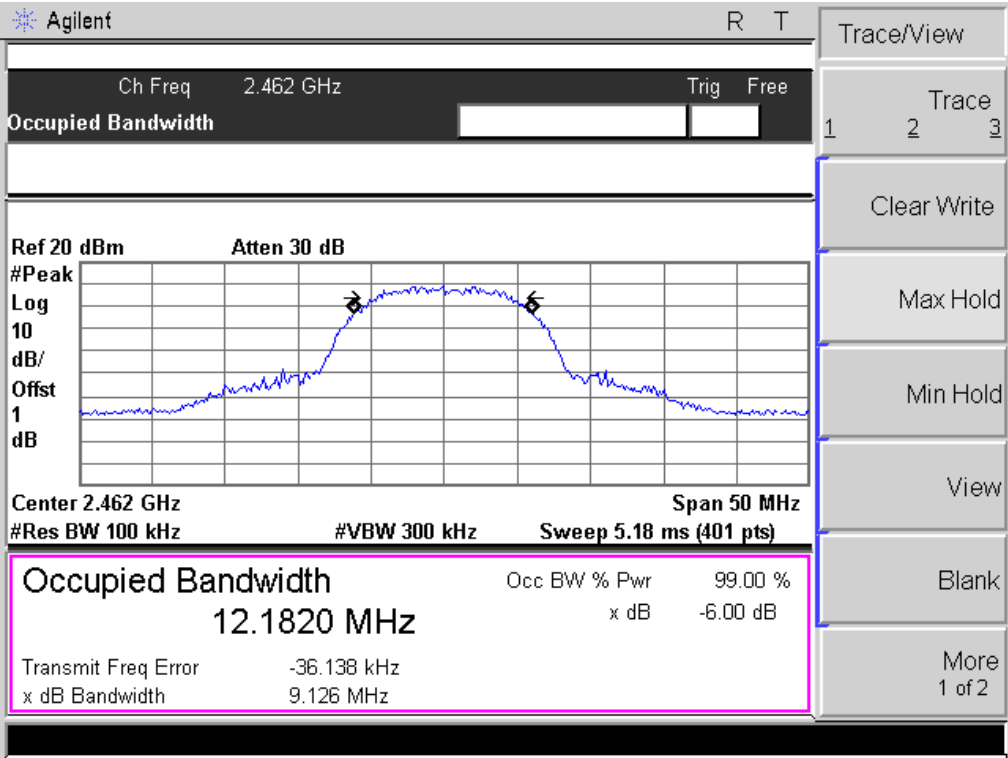


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | 6dB Occupied Bandwidth             |
| Test Mode | : | Mode 2: Transmit by 802.11g        |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 16467                    | 500         | Pass   |
| 06          | 2437            | 16539                    | 500         | Pass   |
| 11          | 2462            | 16483                    | 500         | Pass   |


Channel 01 (2412MHz)

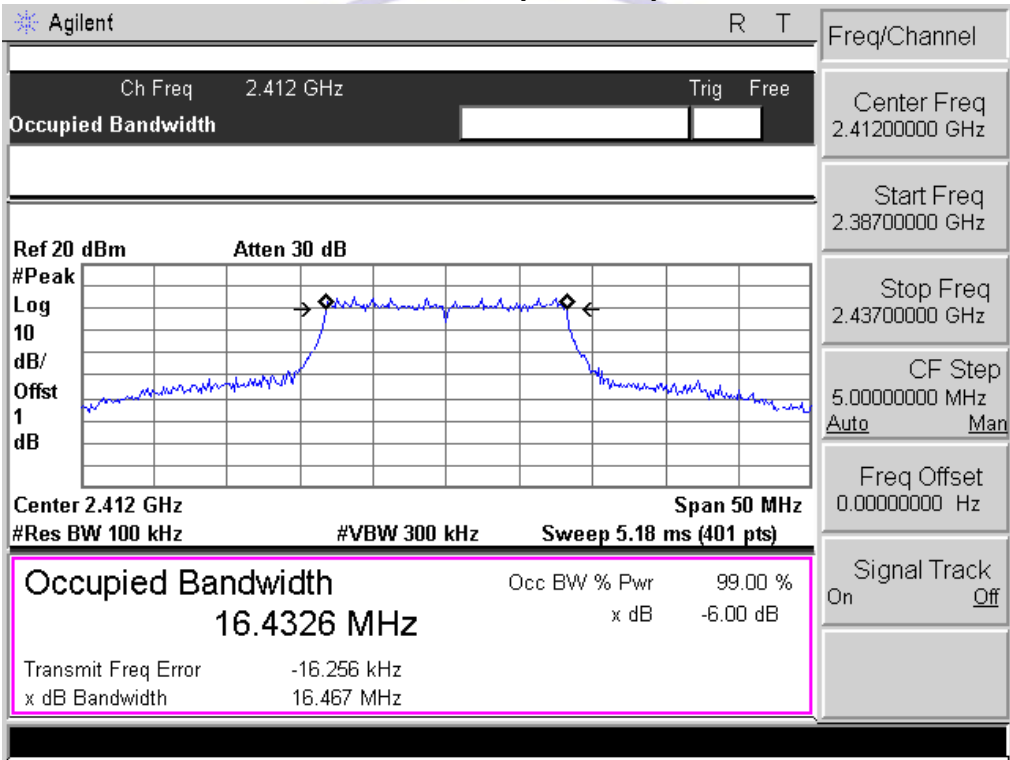

Channel 06 (2437MHz)

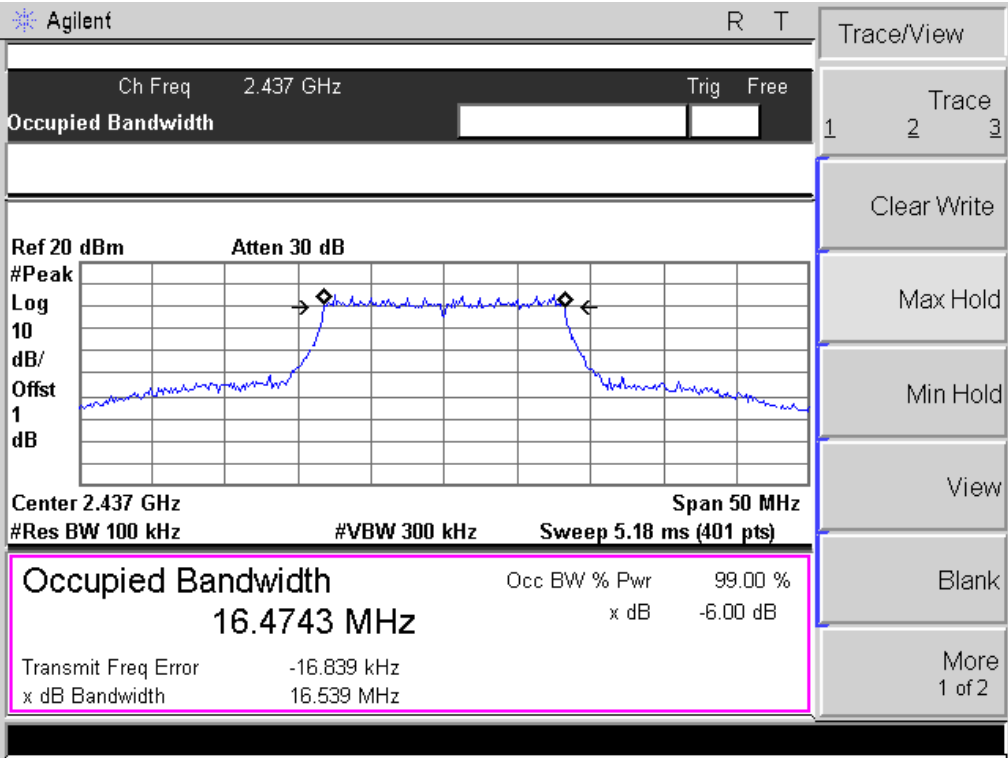


Channel 11 (2462MHz)

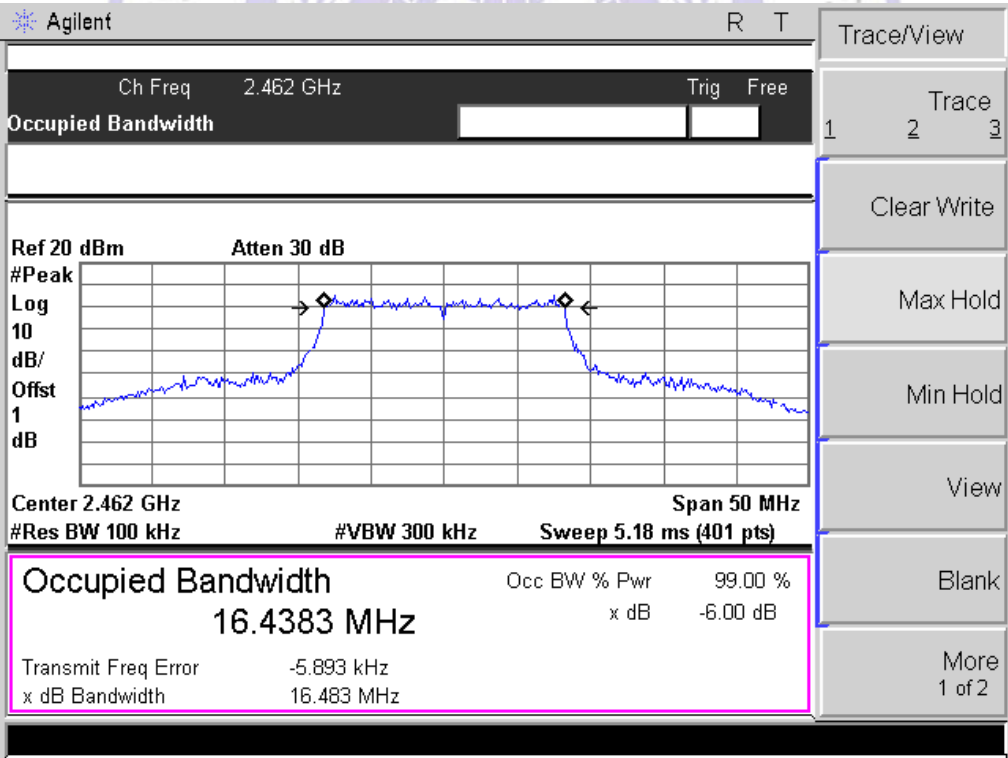


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box  |
| Test Item | : | 6dB Occupied Bandwidth              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|-------------|-----------------|--------------------------|-------------|--------|
| 01          | 2412            | 17338                    | 500         | Pass   |
| 06          | 2437            | 17235                    | 500         | Pass   |
| 11          | 2462            | 17472                    | 500         | Pass   |


Channel 01 (2412MHz)

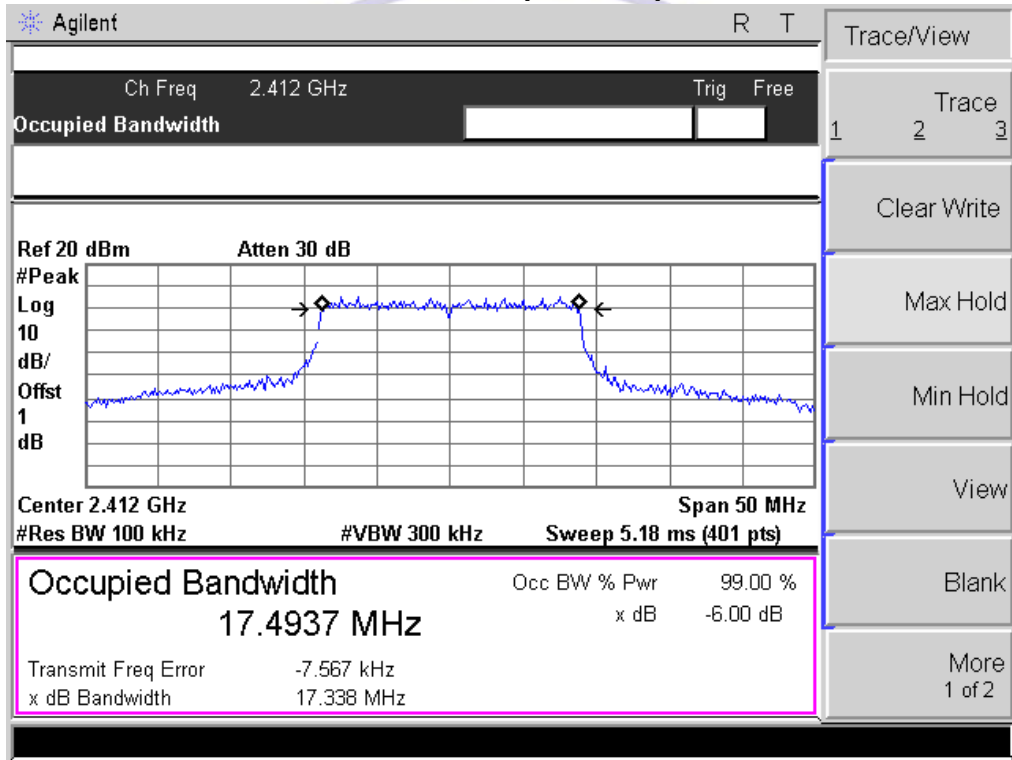

Channel 06 (2437MHz)

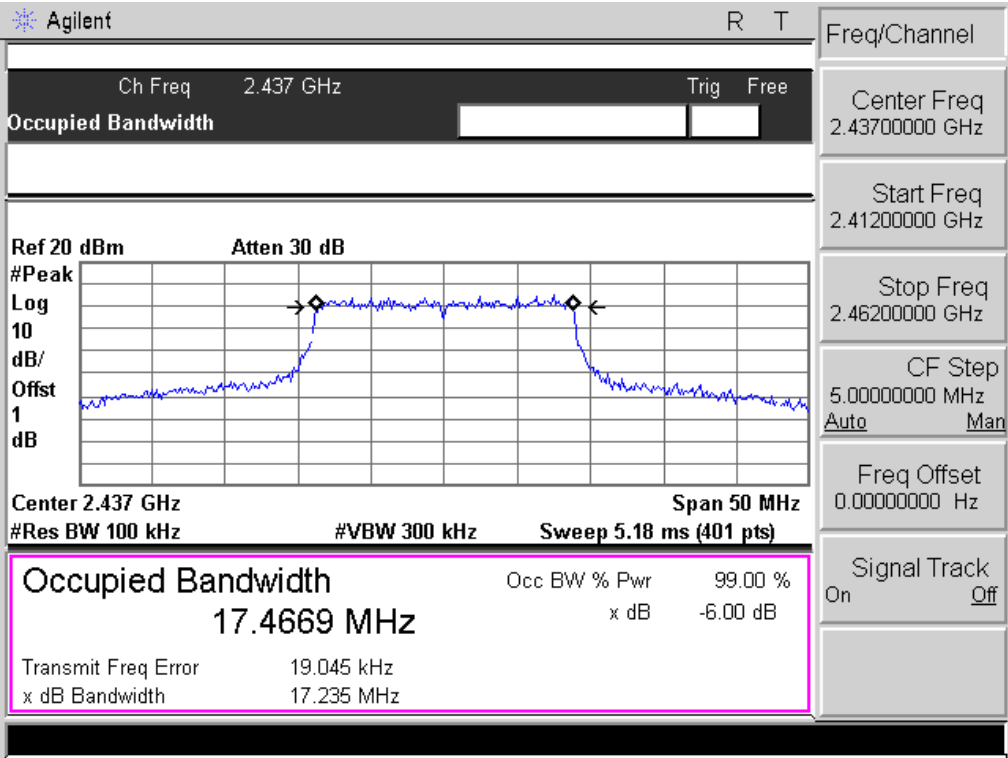


Channel 11 (2462MHz)

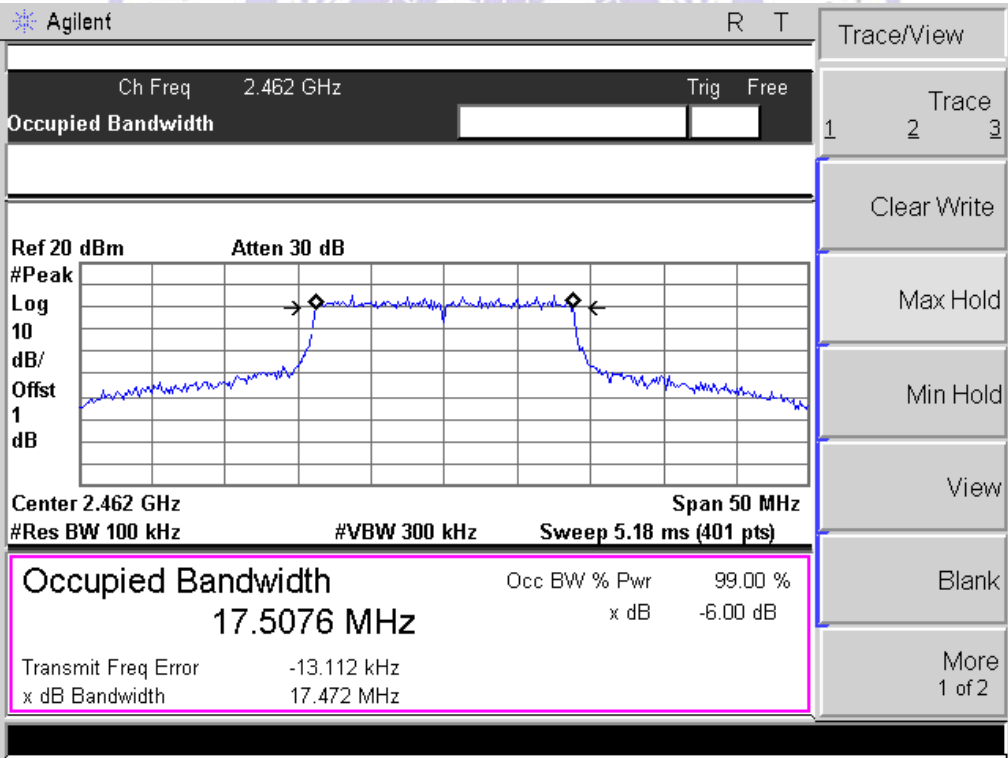

#### 4.4. Maximum Peak Output Power

##### TEST CONFIGURATION



##### TEST PROCEDURE

According to C63.10 -2009 and KDB558074, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

##### LIMIT

The Peak Output Power Measurement limits are 30dBm.

##### TEST RESULTS

|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | Power Output                       |
| Test Mode | : | Mode 1: Transmit by 802.11b        |

| Channel No. | Frequency (MHz) | Measurement Power Output (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------------------|-------------|--------|
| 1           | 2412            | 9.96                           | 30.00       | Pass   |
| 6           | 2437            | 9.89                           | 30.00       | Pass   |
| 11          | 2462            | 9.92                           | 30.00       | Pass   |

|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | Power Output                       |
| Test Mode | : | Mode 2: Transmit by 802.11g        |

| Channel No. | Frequency (MHz) | Measurement Power Output (dBm) | Limit (dBm) | Result |
|-------------|-----------------|--------------------------------|-------------|--------|
| 1           | 2412            | 8.87                           | 30.00       | Pass   |
| 6           | 2437            | 8.93                           | 30.00       | Pass   |
| 11          | 2462            | 8.75                           | 30.00       | Pass   |


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | Power Output                       |
| Test Mode | : | Mode 3: Transmit by 802.11n(20MHz) |

| Channel No. | Frequency<br>(MHz) | Measurement Power Output<br>(dBm) | Limit<br>(dBm) | Result |
|-------------|--------------------|-----------------------------------|----------------|--------|
| 1           | 2412               | 8.52                              | 30.00          | Pass   |
| 6           | 2437               | 8.68                              | 30.00          | Pass   |
| 11          | 2462               | 8.49                              | 30.00          | Pass   |



## 4.5. Band Edge Measurement

### TEST CONFIGURATION



### TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS) with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW  $\geq$  3 VBW to 100 kHz, to measure the conducted peak band edge.

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: Set Span for minimum 50 MHz - Reference Level: 110 dB  $\mu$  V (corrected for gains and losses of test antenna factor, preamp gain and cable loss) - Attenuation: 10 dB
- Sweep Time: Coupled - Resolution Bandwidth: Up to and including 1 GHz =  $\geq$  100 kHz
- Resolution Bandwidth: Above 1 GHz = 1 MHz - Video Bandwidth: Below 1 GHz = 300 kHz
- Video Bandwidth: Up to and including 1 GHz =  $\geq$  3 MHz for peak and 10 Hz for average
- Detector: Peak

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.


### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209(see Section 15.205(c)).

| Frequency (MHz)            | Limit Average (dB $\mu$ V/m) | Limit Peak (dB $\mu$ V/m) |
|----------------------------|------------------------------|---------------------------|
| Below 2390 or Above 2483.5 | 54                           | 74                        |

**TEST RESULTS**

|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC Part15.209 RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D 499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode1:Transmit at channel 2412MHz by 802.11b |                      |

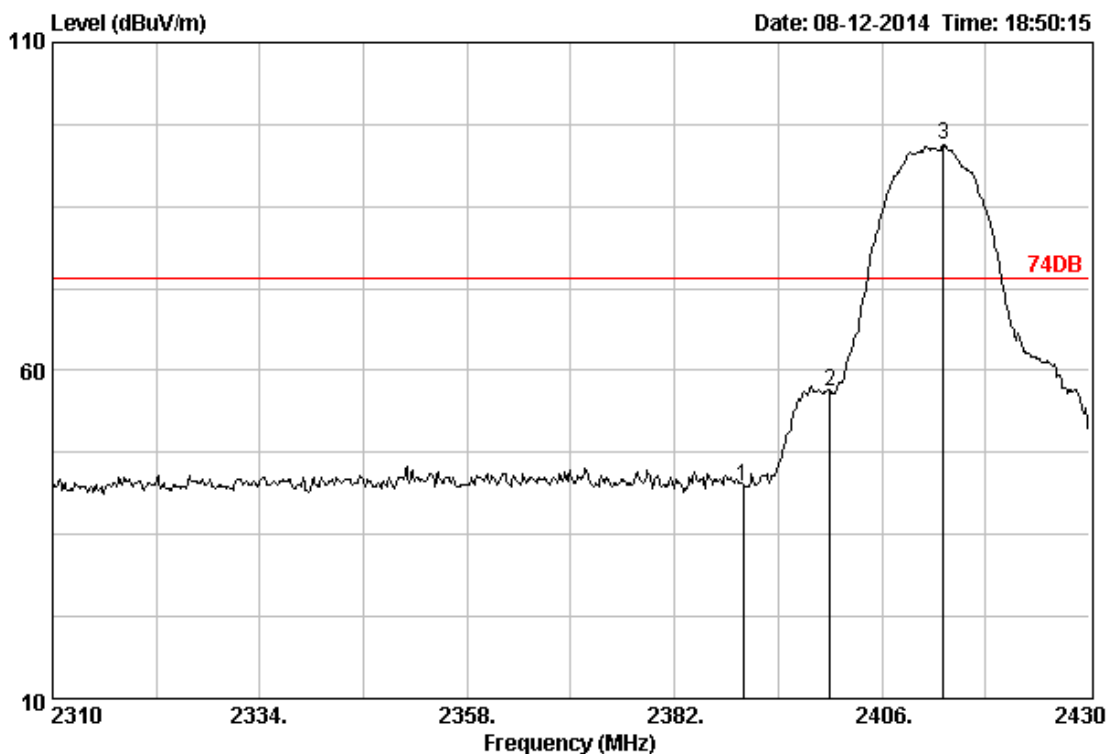


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 375  
 Ant. pol. : HORIZONTAL

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|--------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |        |
| 1 | 2390.00        | 28.78                  | 4.61                  | 44.38             | 42.41             | 74.00              | 31.59          | Peak   |
| 2 | 2400.00        | 28.78                  | 4.61                  | 58.85             | 56.88             | 74.00              | 17.12          | Peak   |
| 3 | 2413.08        | 28.81                  | 4.63                  | 96.30             | 94.38             | 74.00              | -20.38         | Peak   |

|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode1:Transmit at channel 2412MHz by 802.11b |                      |


Data: 376 File: C:\Documents and Settings\Administrator\My Documents\33.EMI (414) Date: 08-12-2014 Time: 18:55:52

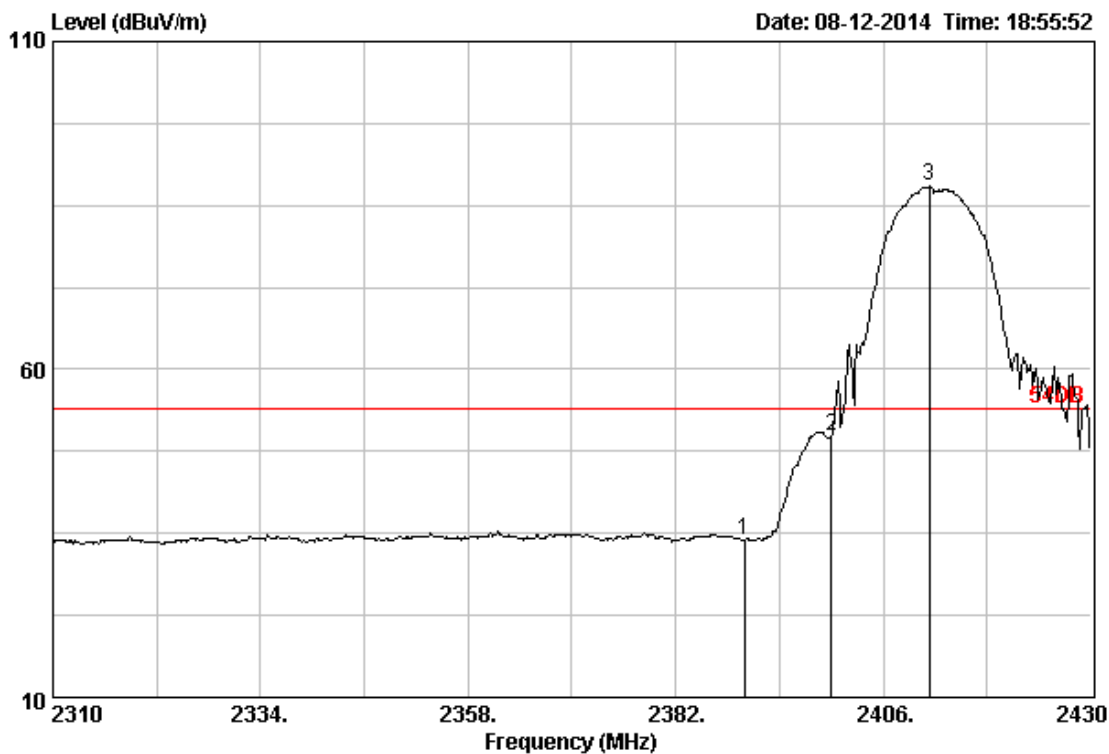

|             |              |             |            |
|-------------|--------------|-------------|------------|
| Site no.    | : 3m Chamber | Data no. :  | 376        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. : | HORIZONTAL |
| Limit       | : 54DB       |             |            |
| Env. / Ins. | : 23°C/54%   |             |            |
| Engineer    | :            |             |            |
| EUT         | :            |             |            |
| Power       | :            |             |            |
| M/N         | :            |             |            |
| Test Mode   | :            |             |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2390.00        | 28.78                  | 4.61                  | 36.05             | 34.08                         | 54.00              | 19.92          | Average |
| 2 | 2400.00        | 28.78                  | 4.61                  | 51.80             | 49.83                         | 54.00              | 4.17           | Average |
| 3 | 2411.28        | 28.81                  | 4.63                  | 89.83             | 87.91                         | 54.00              | -33.91         | Average |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode1:Transmit at channel 2412MHz by 802.11b |                     |

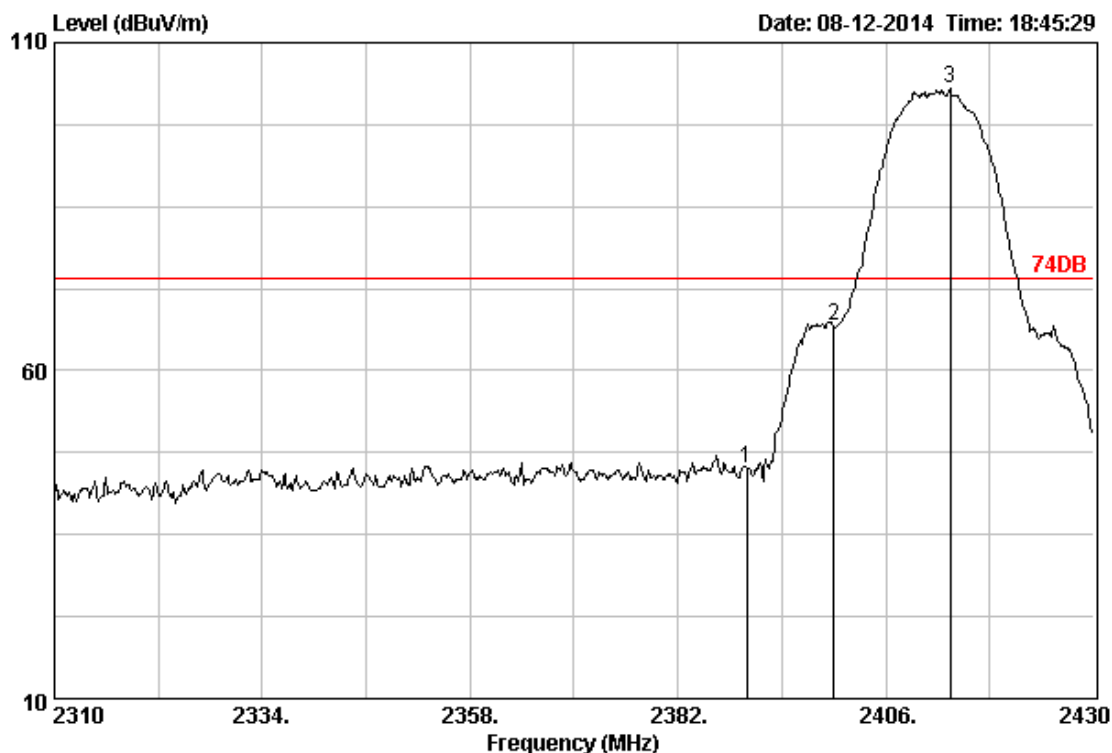

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 373      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 74DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|--------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |        |
| 1 | 2390.00        | 28.78                  | 4.61                  | 47.10             | 45.13             | 74.00              | 28.87          | Peak   |
| 2 | 2400.00        | 28.78                  | 4.61                  | 68.66             | 66.69             | 74.00              | 7.31           | Peak   |
| 3 | 2413.44        | 28.81                  | 4.63                  | 104.91            | 102.99            | 74.00              | -28.99         | Peak   |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode1:Transmit at channel 2412MHz by 802.11b |                     |

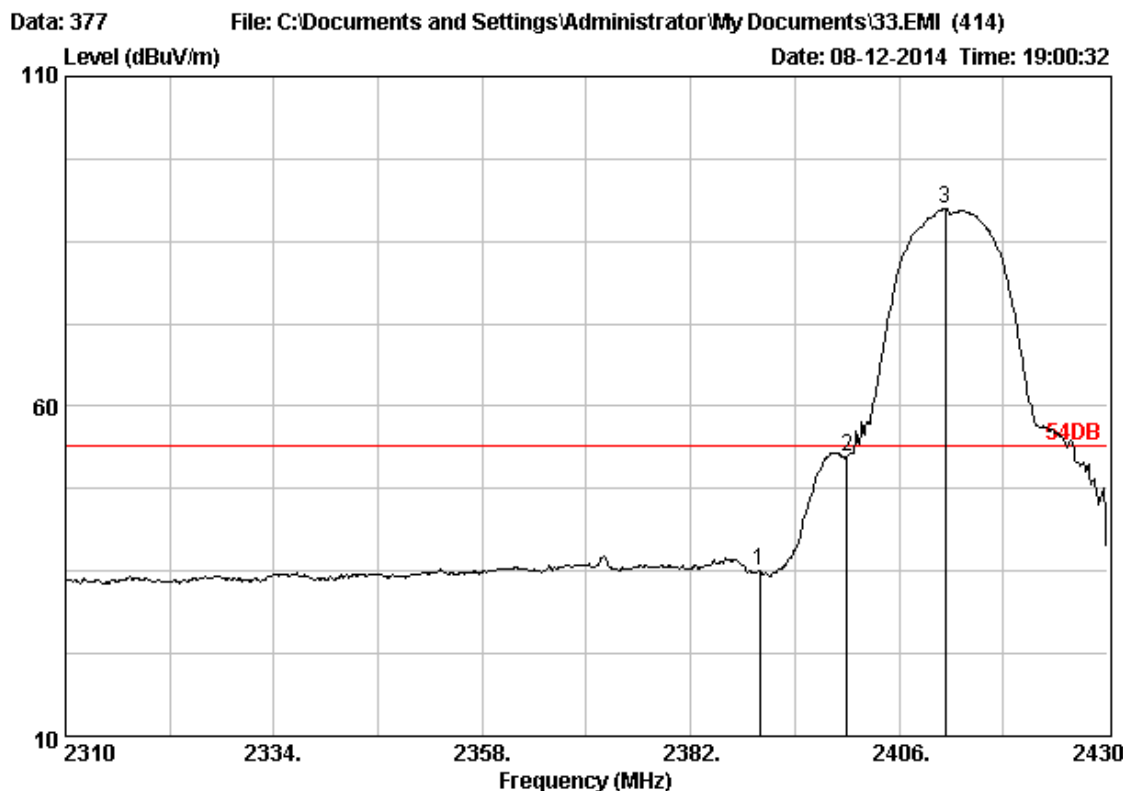

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 377      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2390.00        | 28.78                  | 4.61                  | 37.00             | 35.03                         | 54.00              | 18.97          | Average |
| 2 | 2400.00        | 28.78                  | 4.61                  | 54.41             | 52.44                         | 54.00              | 1.56           | Average |
| 3 | 2411.28        | 28.81                  | 4.63                  | 91.91             | 89.99                         | 54.00              | -35.99         | Average |


|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode1:Transmit at channel 2462MHz by 802.11b |                      |

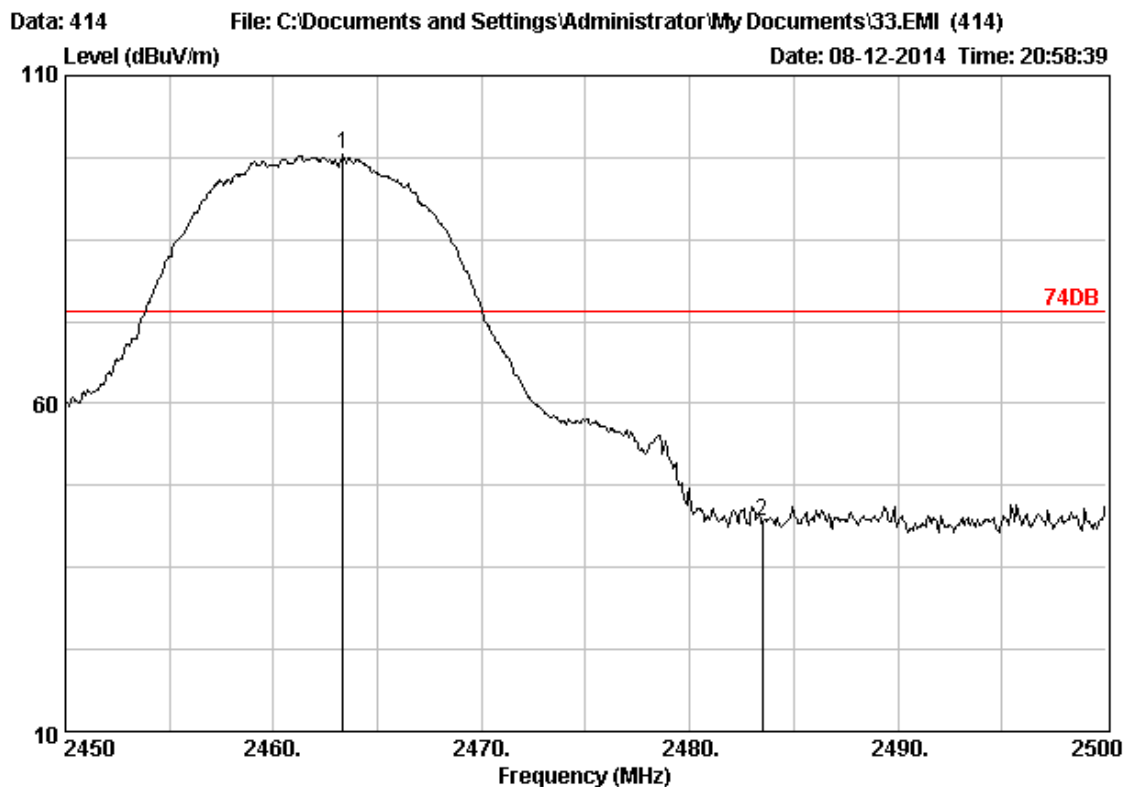

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 414        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 74DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2463.35 | 28.90  | 4.68  | 99.76   | 97.97    | 74.00    | -23.97 | Peak   |
| 2 | 2483.50 | 28.93  | 4.70  | 43.65   | 41.90    | 74.00    | 32.10  | Peak   |


|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode1:Transmit at channel 2462MHz by 802.11b |                      |

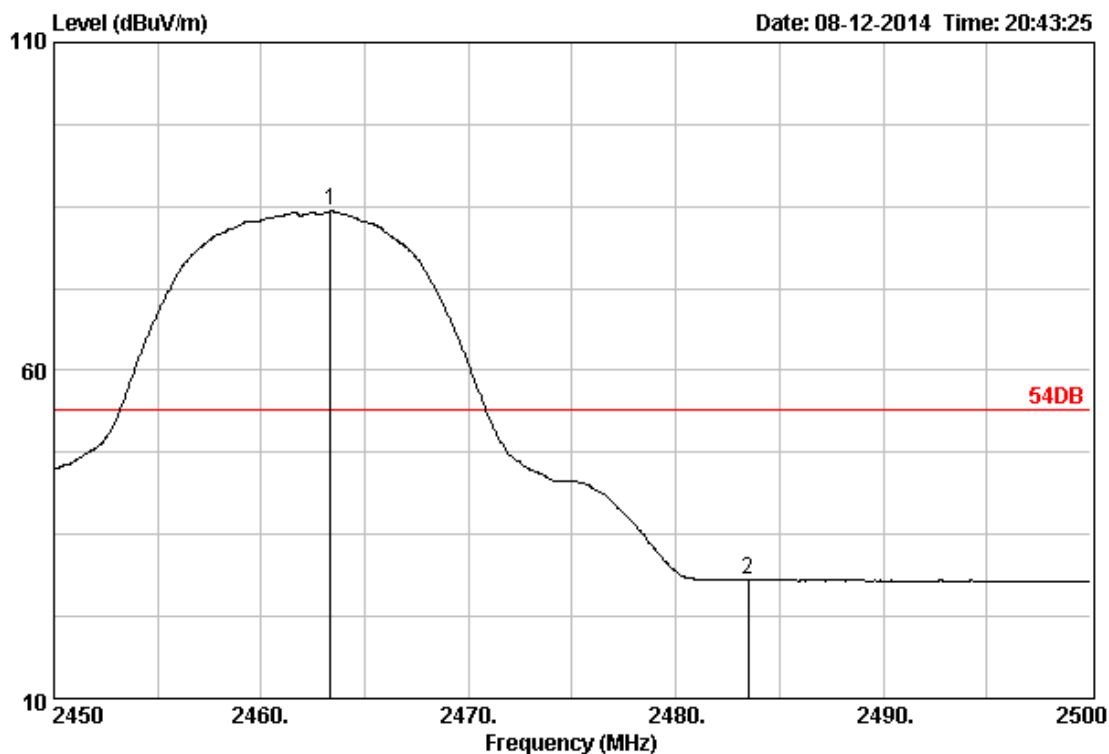

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 410        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 54DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable | Emission |          |          |        |         |
|---|---------|--------|-------|----------|----------|----------|--------|---------|
|   | (MHz)   | Factor | Loss  | Reading  | Level    | Limits   | Margin | Remark  |
|   |         | (dB)   | (dB)  | (dBuV)   | (dBuV/m) | (dBuV/m) | (dB)   |         |
| 1 | 2463.35 | 28.90  | 4.68  | 86.07    | 84.28    | 54.00    | -30.28 | Average |
| 2 | 2483.50 | 28.93  | 4.70  | 29.89    | 28.14    | 54.00    | 25.86  | Average |

|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode1:Transmit at channel 2462MHz by 802.11b |                     |

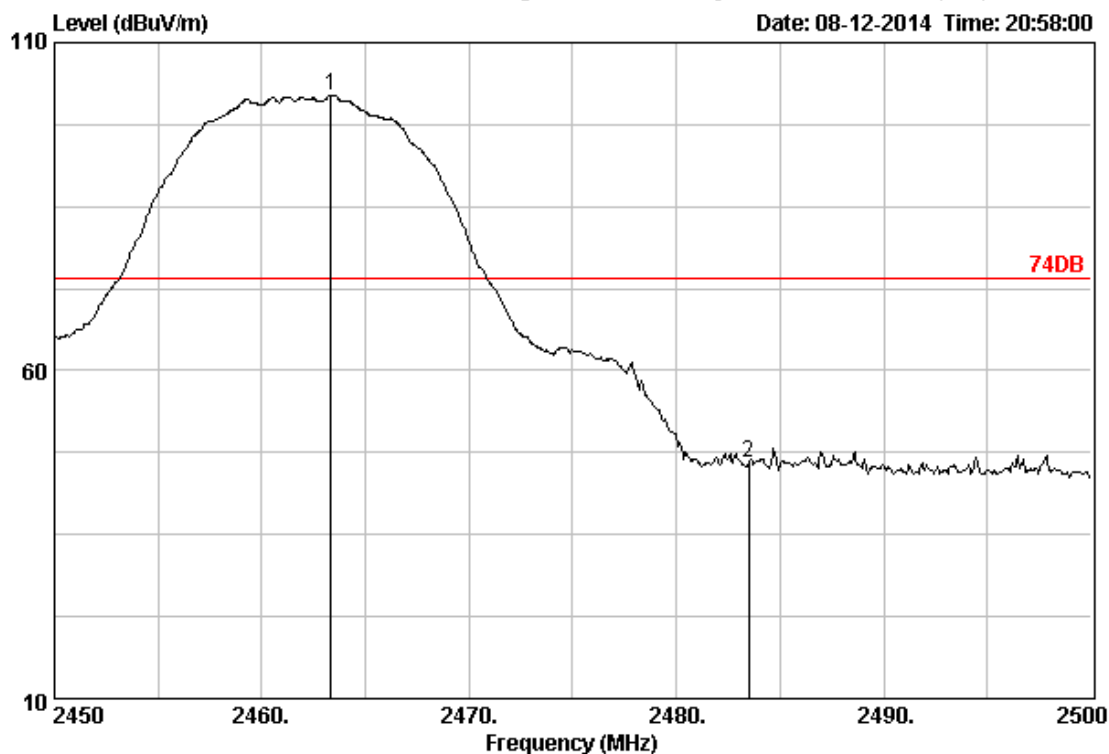


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 413  
 Ant. pol. : VERTICAL

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2463.35 | 28.90  | 4.68  | 103.80  | 102.01   | 74.00    | -28.01 | Peak   |
| 2 | 2483.50 | 28.93  | 4.70  | 47.65   | 45.90    | 74.00    | 28.10  | Peak   |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode1:Transmit at channel 2462MHz by 802.11b |                     |

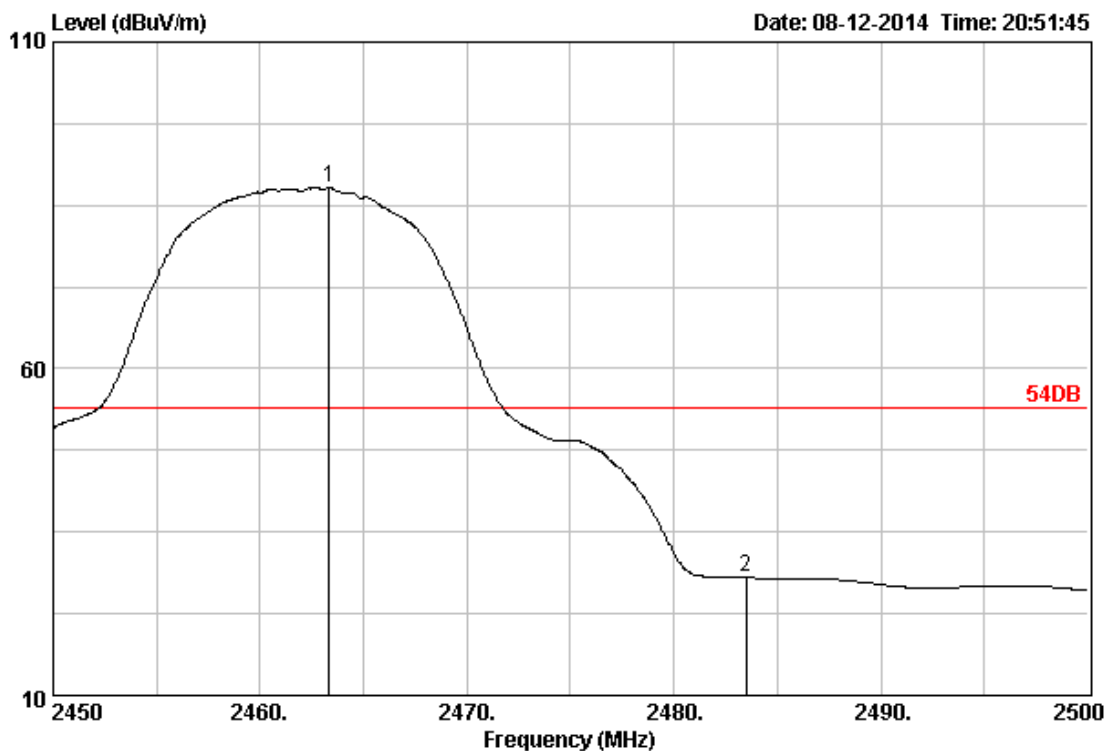

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 411      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |         |
|---|---------|--------|-------|---------|----------|----------|--------|---------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark  |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |         |
| 1 | 2463.35 | 28.90  | 4.68  | 89.52   | 87.73    | 54.00    | -33.73 | Average |
| 2 | 2483.50 | 28.93  | 4.70  | 29.82   | 28.07    | 54.00    | 25.93  | Average |


|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode2:Transmit at channel 2412MHz by 802.11g |                      |

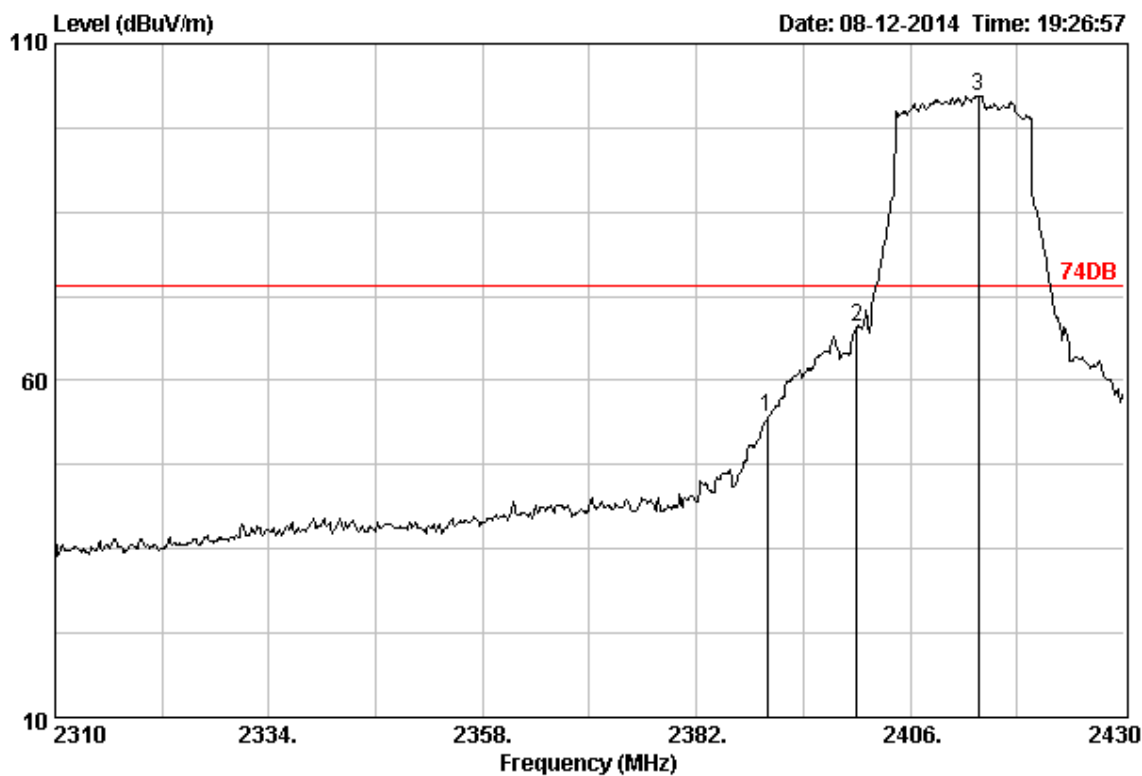

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 381        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 74DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable | Emission |          |          |        |        |
|---|---------|--------|-------|----------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading  | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)   | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2390.00 | 28.78  | 4.61  | 56.64    | 54.67    | 74.00    | 19.33  | Peak   |
| 2 | 2400.00 | 28.78  | 4.61  | 69.77    | 67.80    | 74.00    | 6.20   | Peak   |
| 3 | 2413.68 | 28.81  | 4.63  | 104.25   | 102.33   | 74.00    | -28.33 | Peak   |

|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode2:Transmit at channel 2412MHz by 802.11g |                      |

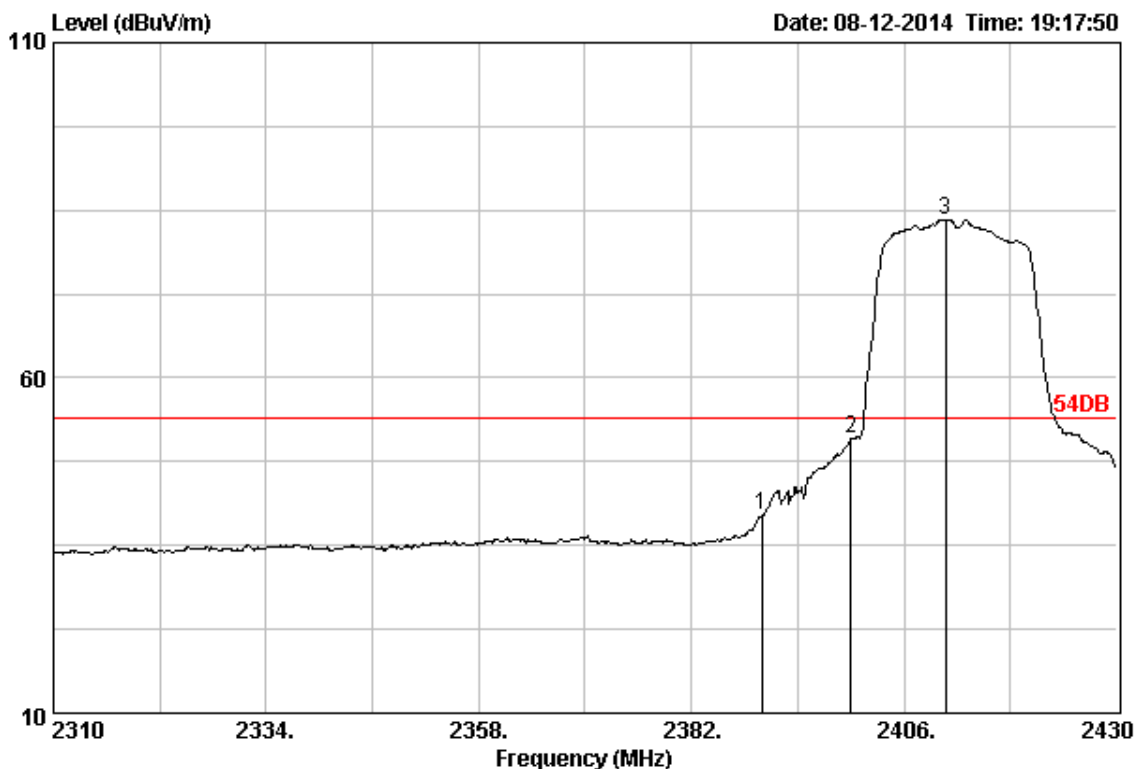


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 379  
 Ant. pol. : HORIZONTAL

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2390.00        | 28.78                  | 4.61                  | 41.47             | 39.50                         | 54.00              | 14.50          | Average |
| 2 | 2400.00        | 28.78                  | 4.61                  | 52.81             | 50.84                         | 54.00              | 3.16           | Average |
| 3 | 2410.68        | 28.81                  | 4.63                  | 85.47             | 83.55                         | 54.00              | -29.55         | Average |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode2:Transmit at channel 2412MHz by 802.11g |                     |

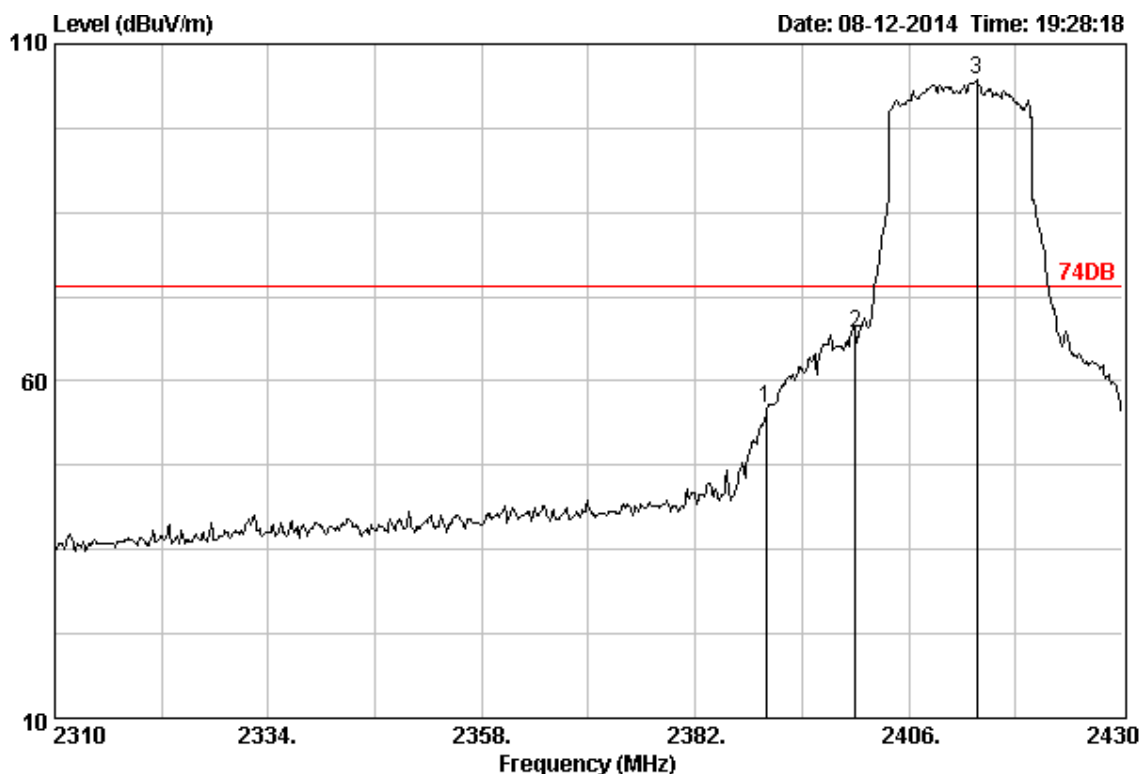

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 382      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 74DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|--------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |        |
| 1 | 2390.00        | 28.78                  | 4.61                  | 57.97             | 56.00             | 74.00              | 18.00          | Peak   |
| 2 | 2400.00        | 28.78                  | 4.61                  | 69.15             | 67.18             | 74.00              | 6.82           | Peak   |
| 3 | 2413.68        | 28.81                  | 4.63                  | 106.74            | 104.82            | 74.00              | -30.82         | Peak   |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode2:Transmit at channel 2412MHz by 802.11g |                     |

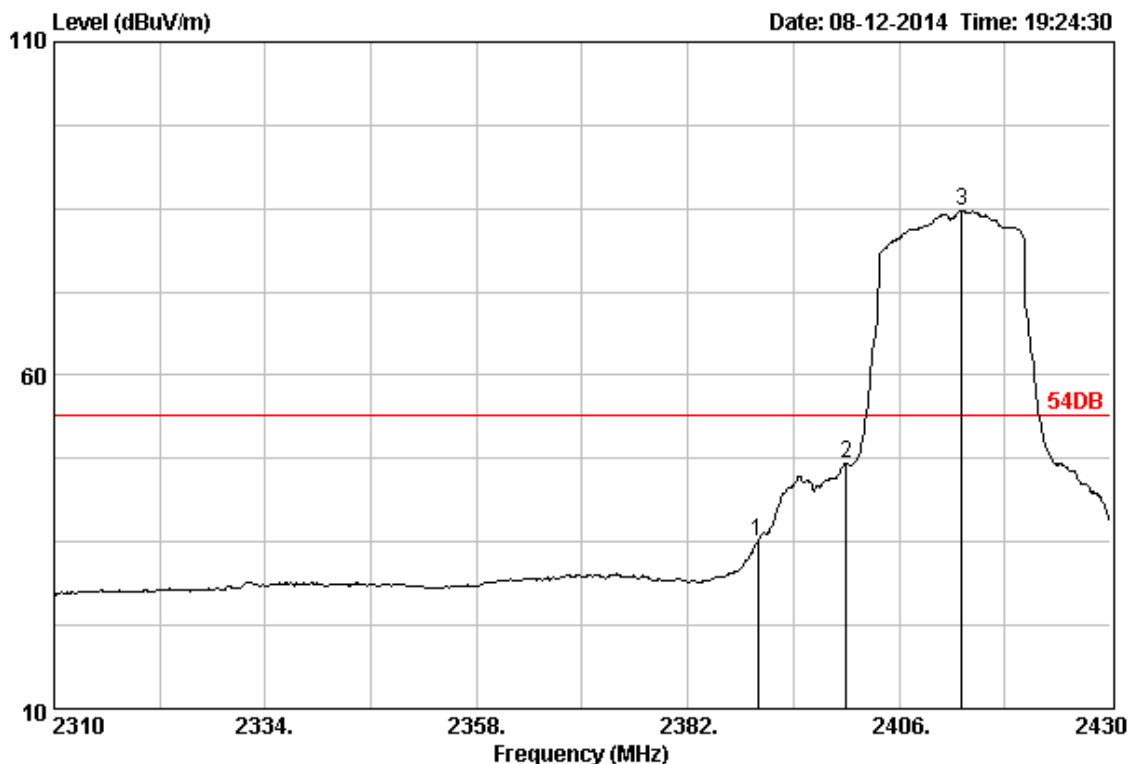

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 380      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|---------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) |                |         |
| 1 | 2390.00        | 28.78                  | 4.61                  | 36.98             | 35.01             | 54.00              | 18.99          | Average |
| 2 | 2400.00        | 28.78                  | 4.61                  | 48.77             | 46.80             | 54.00              | 7.20           | Average |
| 3 | 2413.08        | 28.81                  | 4.63                  | 86.66             | 84.74             | 54.00              | -30.74         | Average |


|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode2:Transmit at channel 2462MHz by 802.11g |                      |

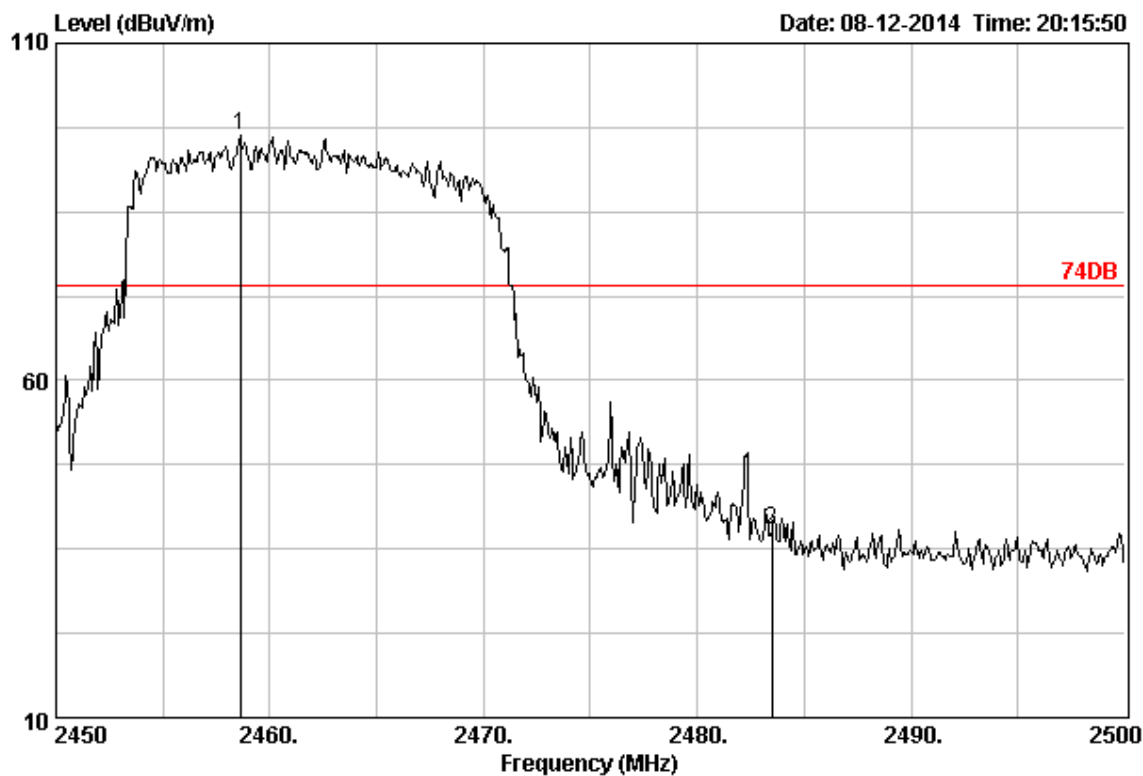

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 405        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 74DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2458.60 | 28.90  | 4.68  | 98.01   | 96.22    | 74.00    | -22.22 | Peak   |
| 2 | 2483.50 | 28.93  | 4.70  | 39.62   | 37.87    | 74.00    | 36.13  | Peak   |

|                                                    |                      |
|----------------------------------------------------|----------------------|
| Engineer: Happy                                    |                      |
| Site: AC5                                          | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz  |
| Note: Mode2:Transmit at channel 2462MHz by 802.11g |                      |

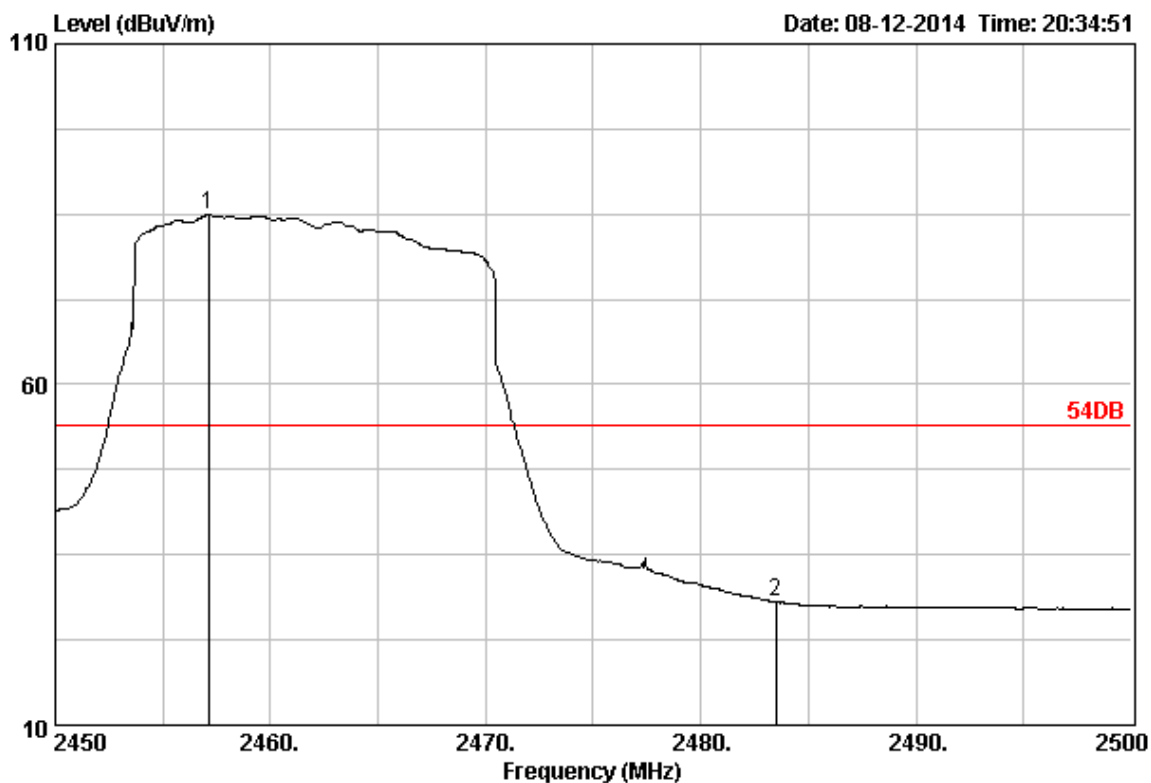


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 408  
 Ant. pol. : HORIZONTAL

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2457.10        | 28.90                  | 4.68                  | 86.70             | 84.91                         | 54.00              | -30.91         | Average |
| 2 | 2483.50        | 28.93                  | 4.70                  | 29.79             | 28.04                         | 54.00              | 25.96          | Average |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode2:Transmit at channel 2462MHz by 802.11g |                     |

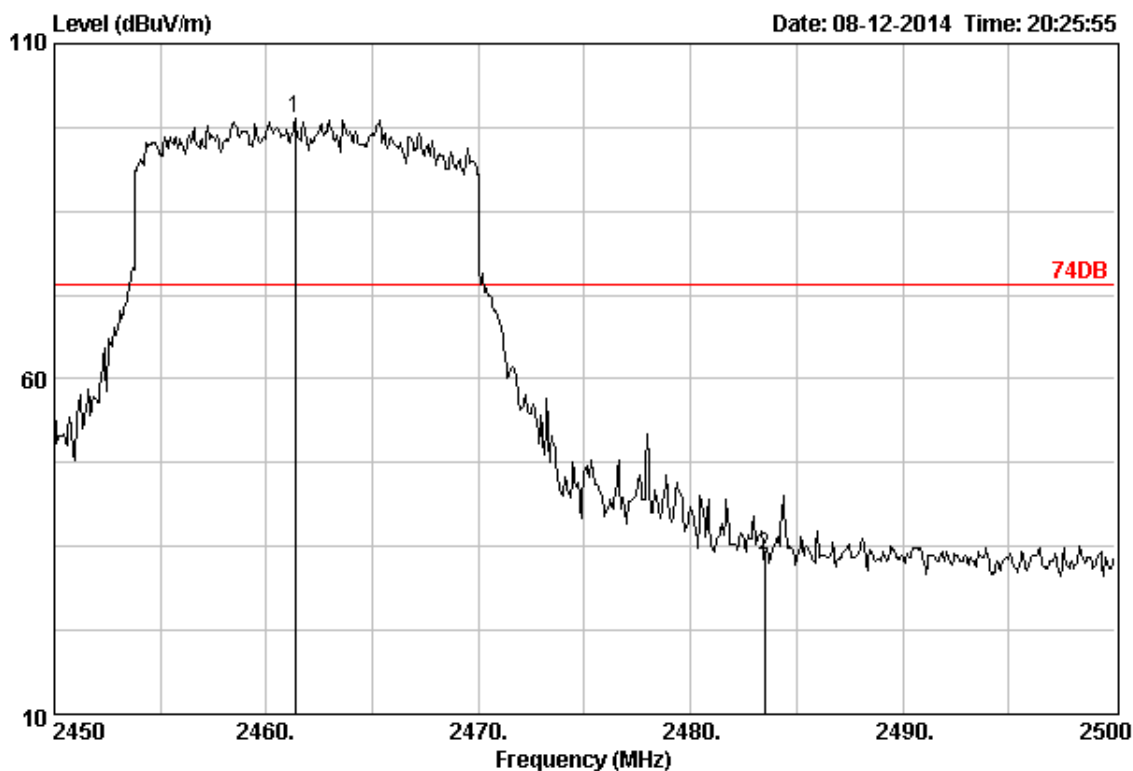

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 407      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 74DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2461.35        | 28.90                  | 4.68                  | 100.72            | 98.93                         | 74.00              | -24.93         | Peak   |
| 2 | 2483.50        | 28.93                  | 4.70                  | 35.34             | 33.59                         | 74.00              | 40.41          | Peak   |


|                                                    |                     |
|----------------------------------------------------|---------------------|
| Engineer: Happy                                    |                     |
| Site: AC5                                          | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                       | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                     | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box            | Power: AC 120V/60Hz |
| Note: Mode2:Transmit at channel 2462MHz by 802.11g |                     |

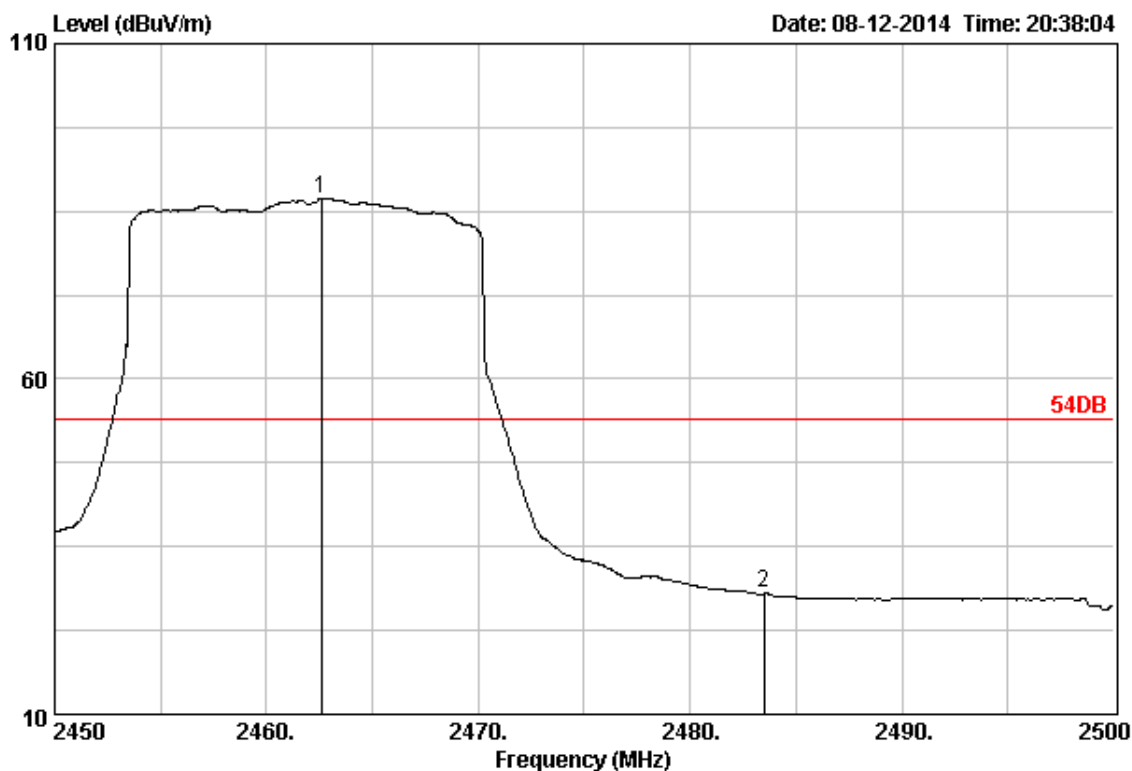

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 409      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|---------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |         |
| 1 | 2462.60        | 28.90                  | 4.68                  | 88.68             | 86.89             | 54.00              | -32.89         | Average |
| 2 | 2483.50        | 28.93                  | 4.70                  | 29.76             | 28.01             | 54.00              | 25.99          | Average |


|                                                         |                      |
|---------------------------------------------------------|----------------------|
| Engineer: Happy                                         |                      |
| Site: AC5                                               | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz  |
| Note: Mode3:Transmit at channel 2412MHz by 802.11n20MHz |                      |

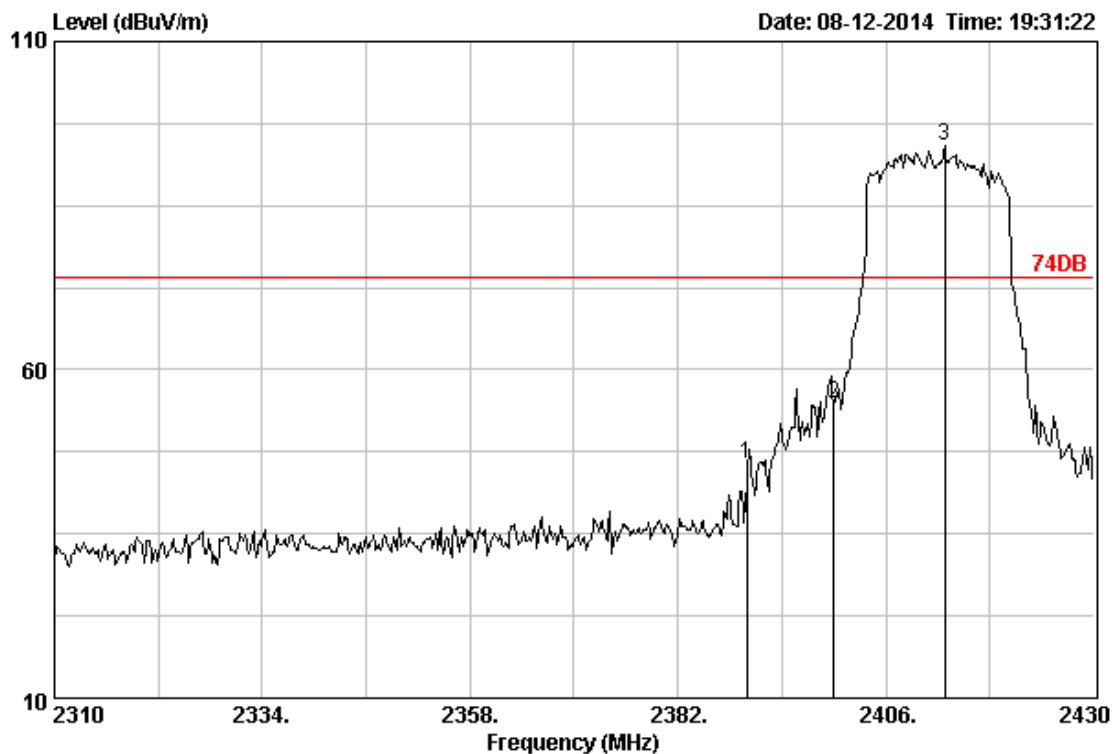

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 385        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 74DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2390.00 | 28.78  | 4.61  | 47.63   | 45.66    | 74.00    | 28.34  | Peak   |
| 2 | 2400.00 | 28.78  | 4.61  | 56.75   | 54.78    | 74.00    | 19.22  | Peak   |
| 3 | 2412.84 | 28.81  | 4.63  | 95.92   | 94.00    | 74.00    | -20.00 | Peak   |


|                                                         |                      |
|---------------------------------------------------------|----------------------|
| Engineer: Happy                                         |                      |
| Site: AC5                                               | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz  |
| Note: Mode3:Transmit at channel 2412MHz by 802.11n20MHz |                      |

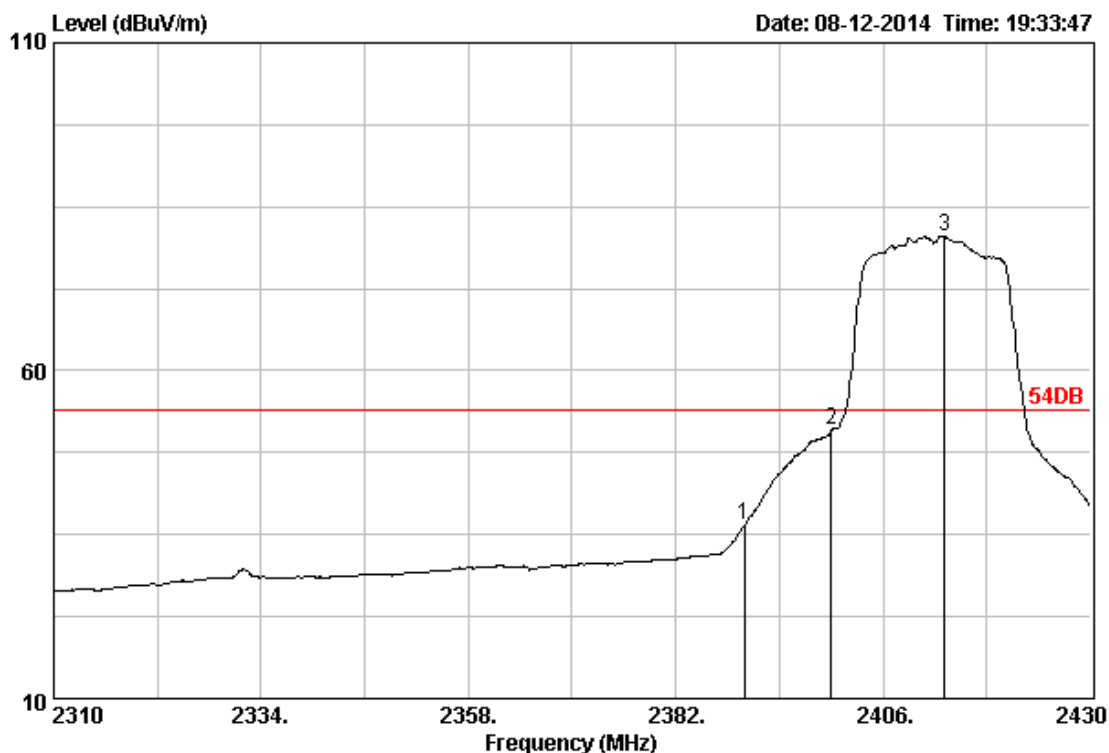

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 386        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 54DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission          |                    |                | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------|--------------------|----------------|---------|
|   |                |                        |                       |                   | Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) |         |
| 1 | 2390.00        | 28.78                  | 4.61                  | 38.49             | 36.52             | 54.00              | 17.48          | Average |
| 2 | 2400.00        | 28.78                  | 4.61                  | 52.87             | 50.90             | 54.00              | 3.10           | Average |
| 3 | 2413.08        | 28.81                  | 4.63                  | 82.40             | 80.48             | 54.00              | -26.48         | Average |


|                                                         |                     |
|---------------------------------------------------------|---------------------|
| Engineer: Happy                                         |                     |
| Site: AC5                                               | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz |
| Note: Mode3:Transmit at channel 2412MHz by 802.11n20MHz |                     |

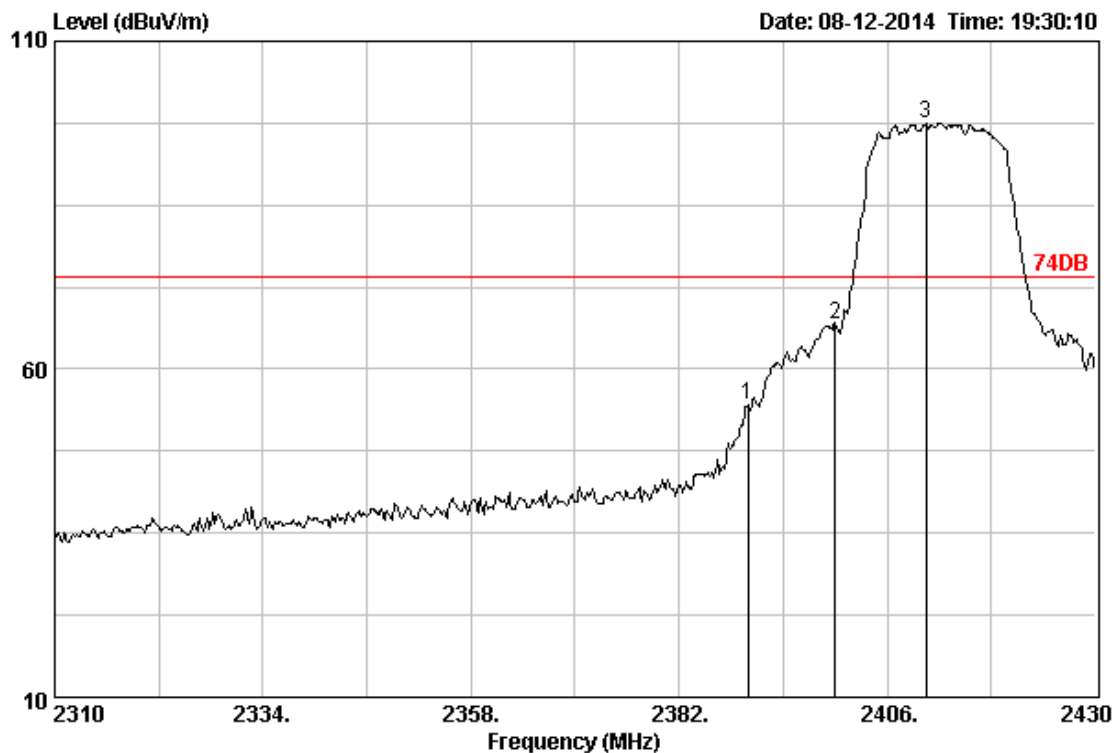

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 384      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 74DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2390.00 | 28.78  | 4.61  | 56.40   | 54.43    | 74.00    | 19.57  | Peak   |
| 2 | 2400.00 | 28.78  | 4.61  | 68.81   | 66.84    | 74.00    | 7.16   | Peak   |
| 3 | 2410.44 | 28.81  | 4.63  | 99.34   | 97.42    | 74.00    | -23.42 | Peak   |


|                                                         |                     |
|---------------------------------------------------------|---------------------|
| Engineer: Happy                                         |                     |
| Site: AC5                                               | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz |
| Note: Mode3:Transmit at channel 2412MHz by 802.11n20MHz |                     |

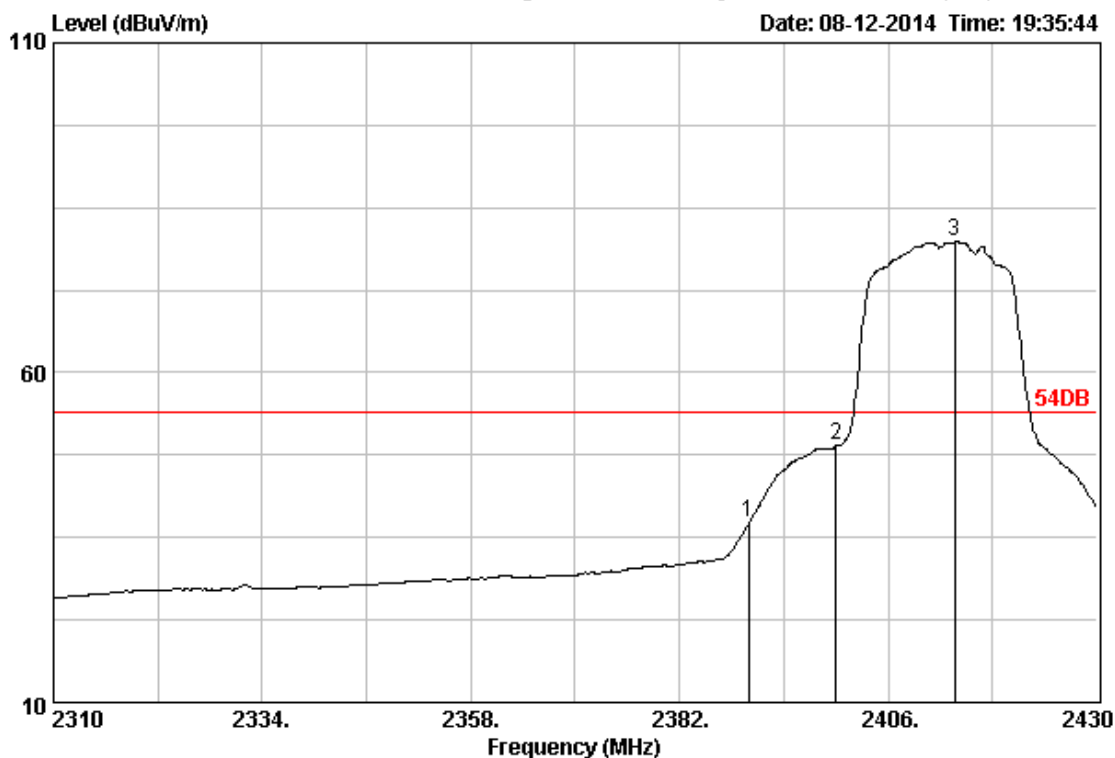

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 387      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |         |
|---|---------|--------|-------|---------|----------|----------|--------|---------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark  |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |         |
| 1 | 2390.00 | 28.78  | 4.61  | 39.25   | 37.28    | 54.00    | 16.72  | Average |
| 2 | 2400.00 | 28.78  | 4.61  | 50.84   | 48.87    | 54.00    | 5.13   | Average |
| 3 | 2413.68 | 28.81  | 4.63  | 81.82   | 79.90    | 54.00    | -25.90 | Average |


|                                                         |                      |
|---------------------------------------------------------|----------------------|
| Engineer: Happy                                         |                      |
| Site: AC5                                               | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz  |
| Note: Mode3:Transmit at channel 2462MHz by 802.11n20MHz |                      |

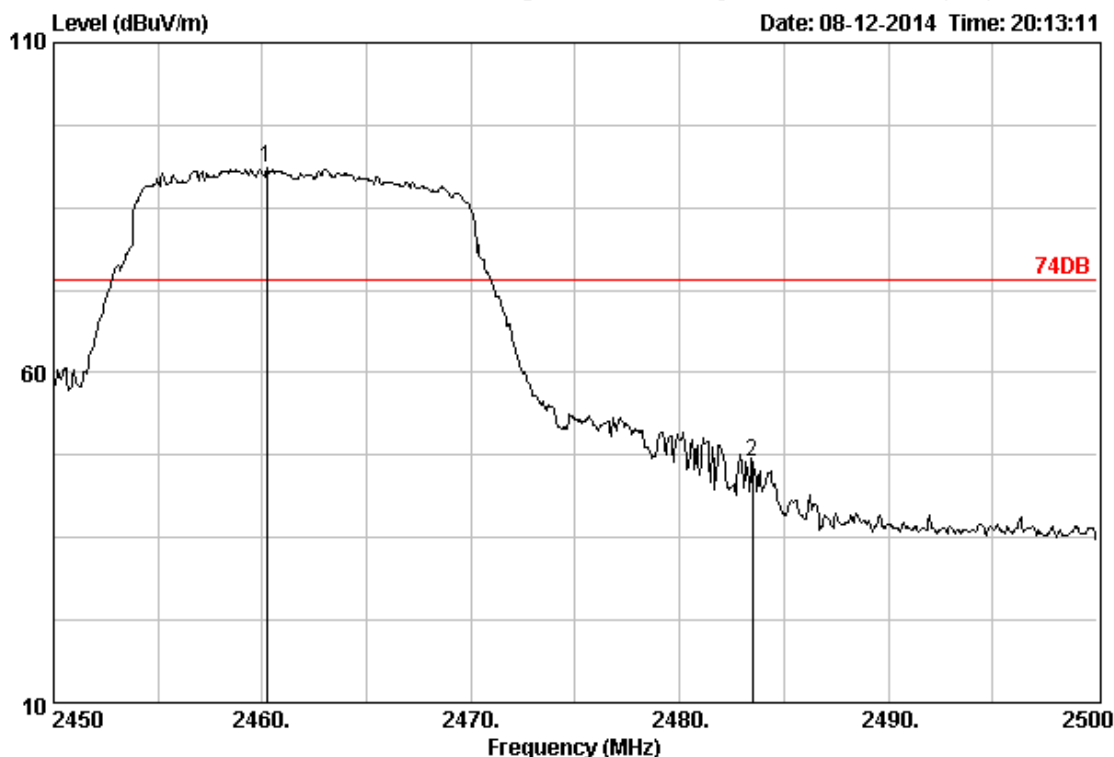

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 404        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 74DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |        |
|---|---------|--------|-------|---------|----------|----------|--------|--------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 | 2460.20 | 28.90  | 4.68  | 92.72   | 90.93    | 74.00    | -16.93 | Peak   |
| 2 | 2483.50 | 28.93  | 4.70  | 48.17   | 46.42    | 74.00    | 27.58  | Peak   |


|                                                         |                      |
|---------------------------------------------------------|----------------------|
| Engineer: Happy                                         |                      |
| Site: AC5                                               | Time: 2014/08/12     |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0            |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Horizontal |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz  |
| Note: Mode3:Transmit at channel 2462MHz by 802.11n20MHz |                      |

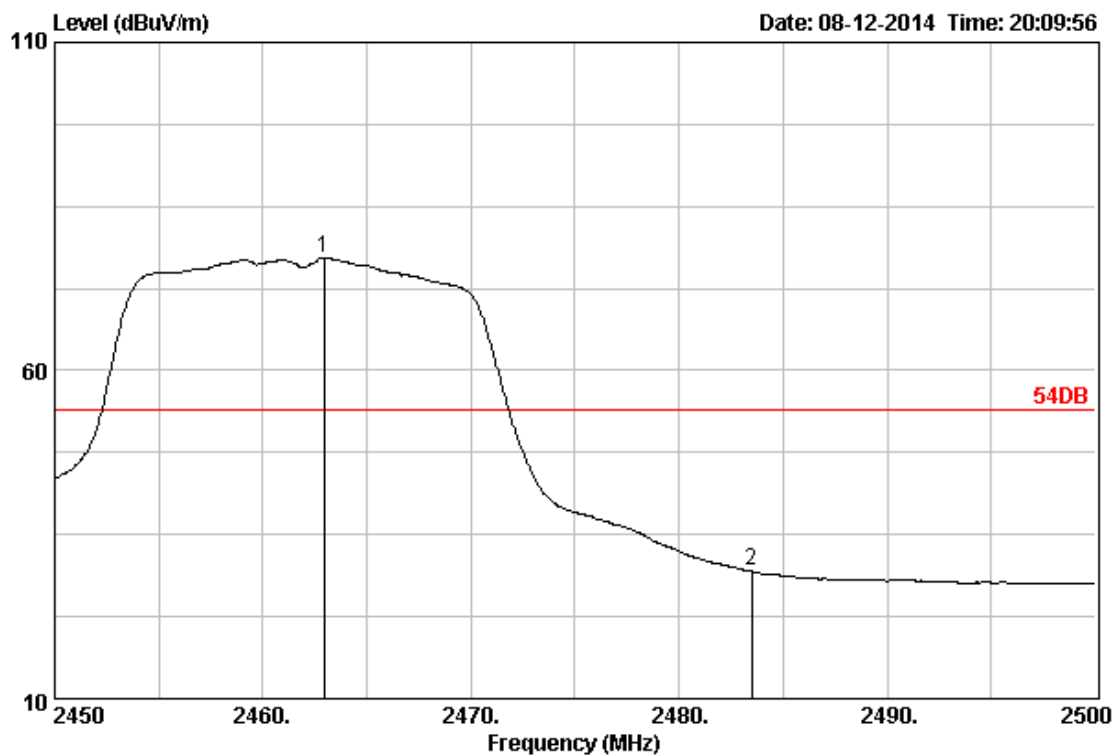

|             |              |           |              |
|-------------|--------------|-----------|--------------|
| Site no.    | : 3m Chamber | Data no.  | : 400        |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : HORIZONTAL |
| Limit       | : 54DB       |           |              |
| Env. / Ins. | : 23°C/54%   |           |              |
| Engineer    | :            |           |              |
| EUT         | :            |           |              |
| Power       | :            |           |              |
| M/N         | :            |           |              |
| Test Mode   | :            |           |              |

|   | Freq.   | Ant.   | Cable |         | Emission |          |        |         |
|---|---------|--------|-------|---------|----------|----------|--------|---------|
|   | (MHz)   | Factor | Loss  | Reading | Level    | Limits   | Margin | Remark  |
|   |         | (dB)   | (dB)  | (dBuV)  | (dBuV/m) | (dBuV/m) | (dB)   |         |
| 1 | 2462.95 | 28.90  | 4.68  | 78.96   | 77.17    | 54.00    | -23.17 | Average |
| 2 | 2483.50 | 28.93  | 4.70  | 31.13   | 29.38    | 54.00    | 24.62  | Average |


|                                                         |                     |
|---------------------------------------------------------|---------------------|
| Engineer: Happy                                         |                     |
| Site: AC5                                               | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz |
| Note: Mode3:Transmit at channel 2462MHz by 802.11n20MHz |                     |

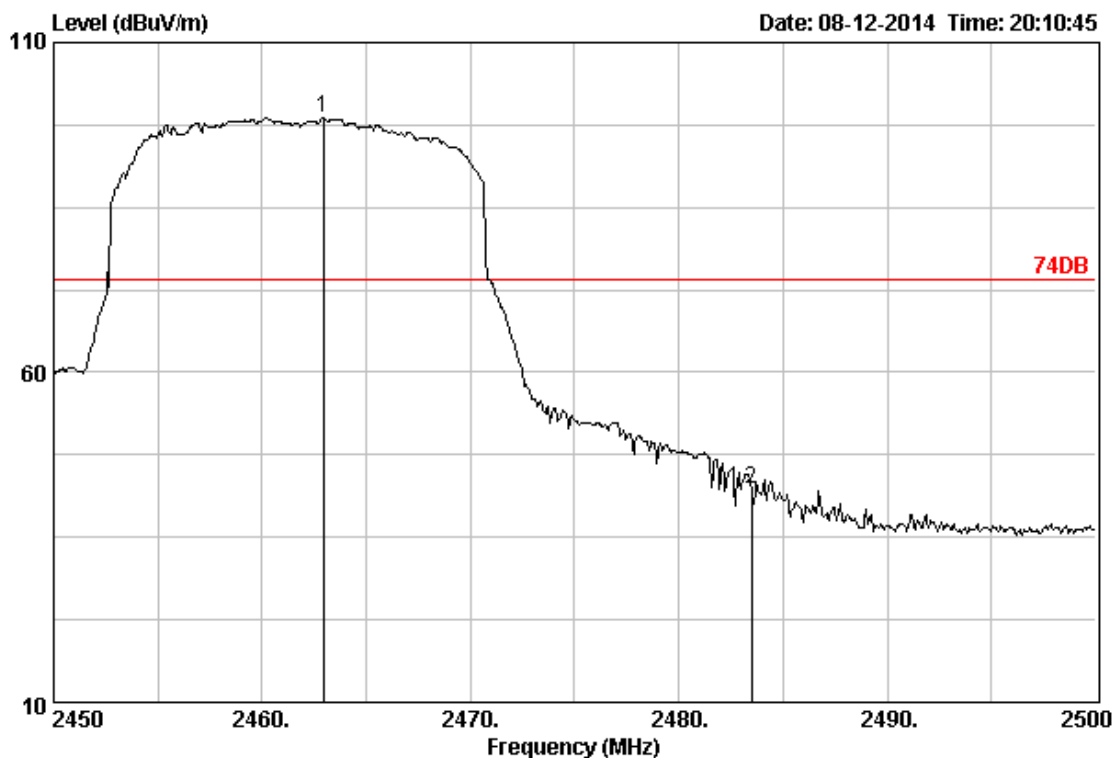

|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 402      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 74DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2462.95        | 28.90                  | 4.68                  | 100.50            | 98.71                         | 74.00              | -24.71         | Peak   |
| 2 | 2483.50        | 28.93                  | 4.70                  | 44.07             | 42.32                         | 74.00              | 31.68          | Peak   |

|                                                         |                     |
|---------------------------------------------------------|---------------------|
| Engineer: Happy                                         |                     |
| Site: AC5                                               | Time: 2014/08/12    |
| Limit: FCC_Part15.209_RE(3m)                            | Margin: 0           |
| Probe: BBHA 9120D_499(1-18GHz)                          | Polarity: Vertical  |
| EUT: 2.5inch HD WIFI Raid enclosure box                 | Power: AC 120V/60Hz |
| Note: Mode3:Transmit at channel 2462MHz by 802.11n20MHz |                     |

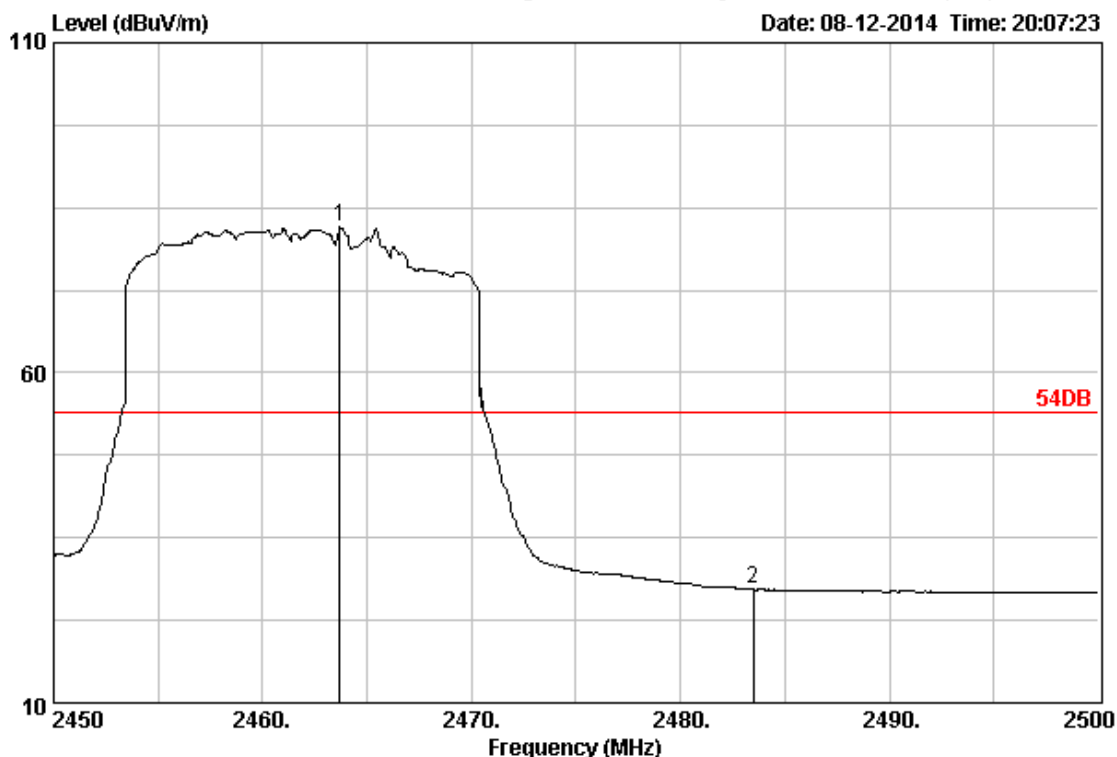


|             |              |           |            |
|-------------|--------------|-----------|------------|
| Site no.    | : 3m Chamber | Data no.  | : 399      |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit       | : 54DB       |           |            |
| Env. / Ins. | : 23°C/54%   |           |            |
| Engineer    | :            |           |            |
| EUT         | :            |           |            |
| Power       | :            |           |            |
| M/N         | :            |           |            |
| Test Mode   | :            |           |            |

|   | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|---|----------------|------------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2463.70        | 28.90                  | 4.68                  | 83.83             | 82.04                         | 54.00              | -28.04         | Average |
| 2 | 2483.50        | 28.93                  | 4.70                  | 28.93             | 27.18                         | 54.00              | 26.82          | Average |

#### 4.6. Power Spectral Density Measurement

##### TEST CONFIGURATION



##### TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r01 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, VBW $\geq$ 10KHz, SPAN to 1.5 times greater than the EBW,.

##### LIMIT


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

##### TEST RESULTS


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | Power Spectral Density             |
| Test Mode | : | Mode 1: Transmit by 802.11b        |

| Channel No. | Frequency (MHz) | Measurement PPSD (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------|------------------|--------|
| 01          | 2412            | -5.002                      | 8                | Pass   |
| 06          | 2437            | -5.893                      | 8                | Pass   |
| 11          | 2462            | -5.358                      | 8                | Pass   |


Channel 01 (2412MHz)

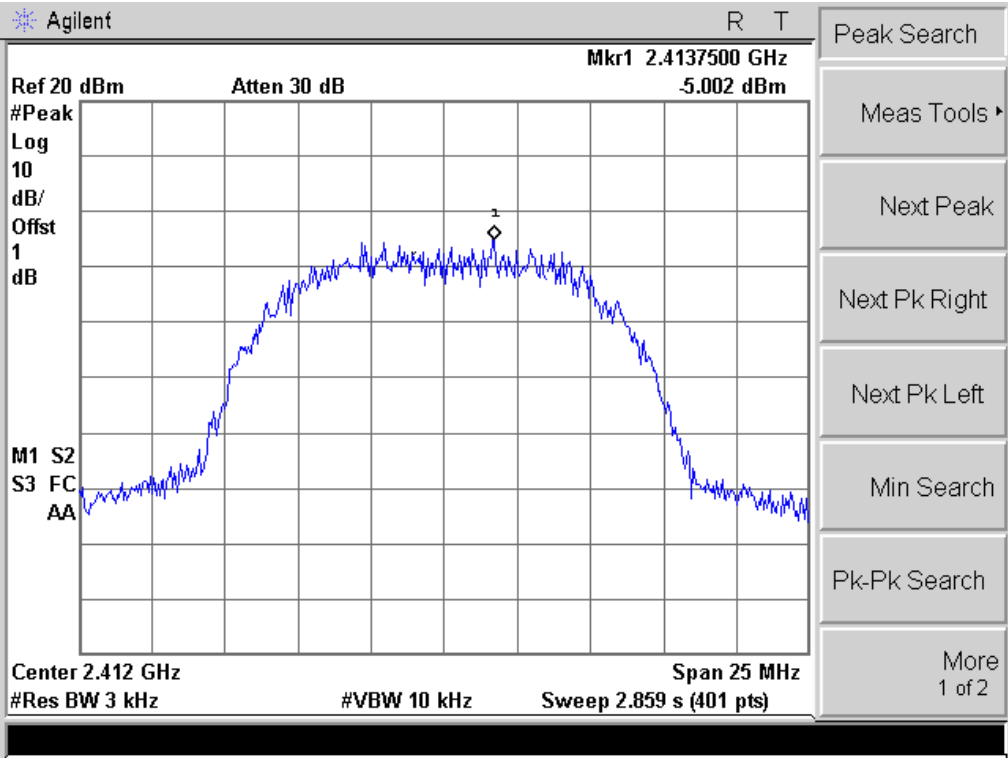

Channel 06 (2437MHz)

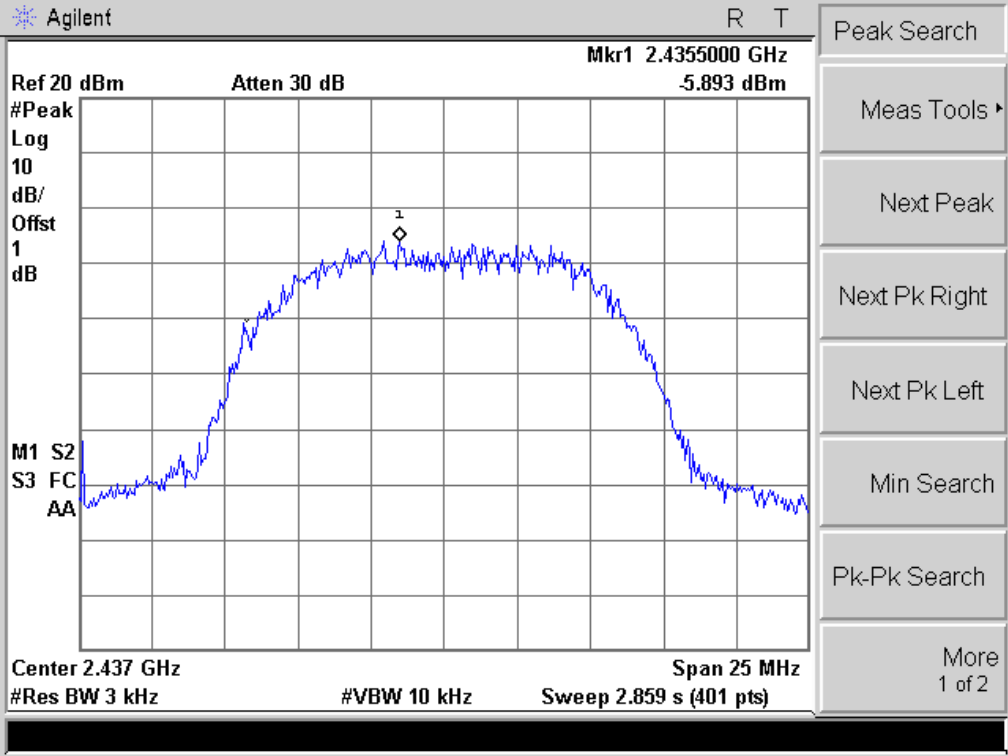


Channel 11 (2462MHz)

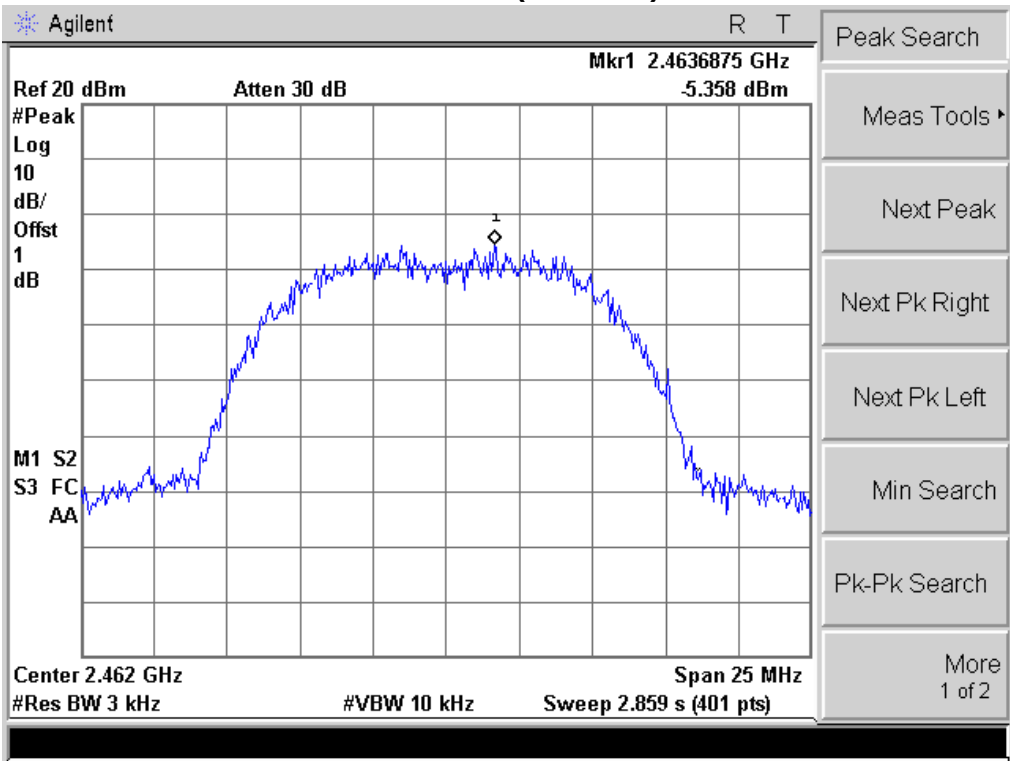


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | Power Spectral Density             |
| Test Mode | : | Mode 2: Transmit by 802.11g        |

| Channel No. | Frequency (MHz) | Measurement<br>PPSD<br>(dBm/3KHz) | Limit<br>(dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------------|---------------------|--------|
| 01          | 2412            | -9.761                            | 8                   | Pass   |
| 06          | 2437            | -11.10                            | 8                   | Pass   |
| 11          | 2462            | -10.72                            | 8                   | Pass   |


Channel 01 (2412MHz)

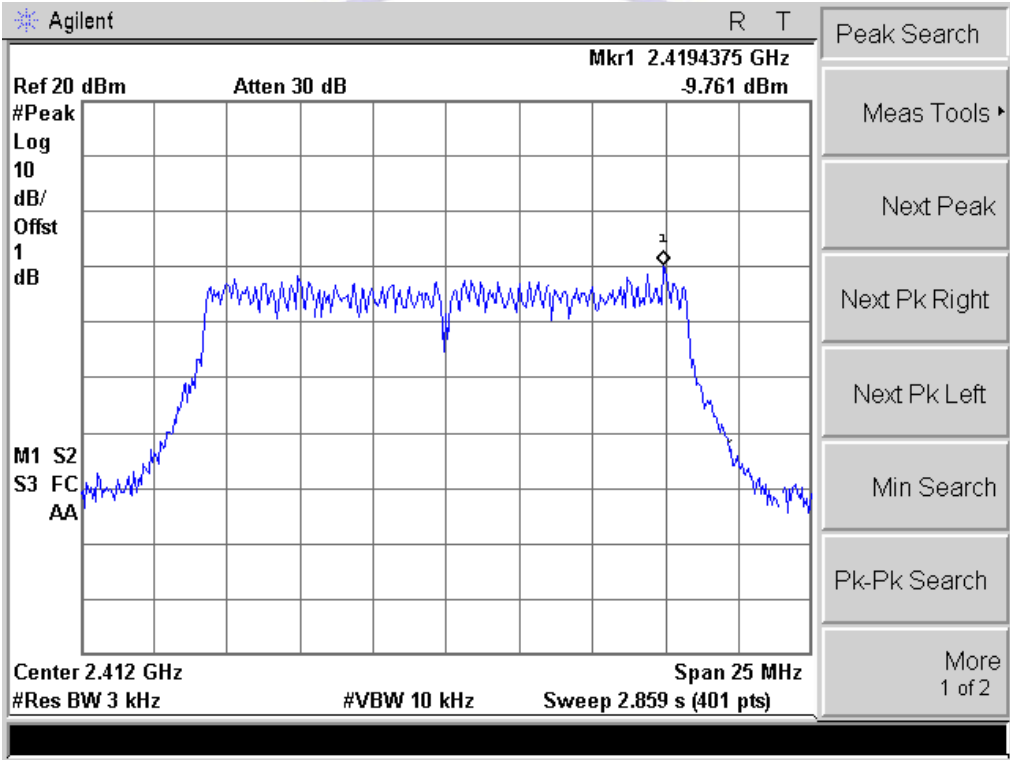

Channel 06 (2437MHz)

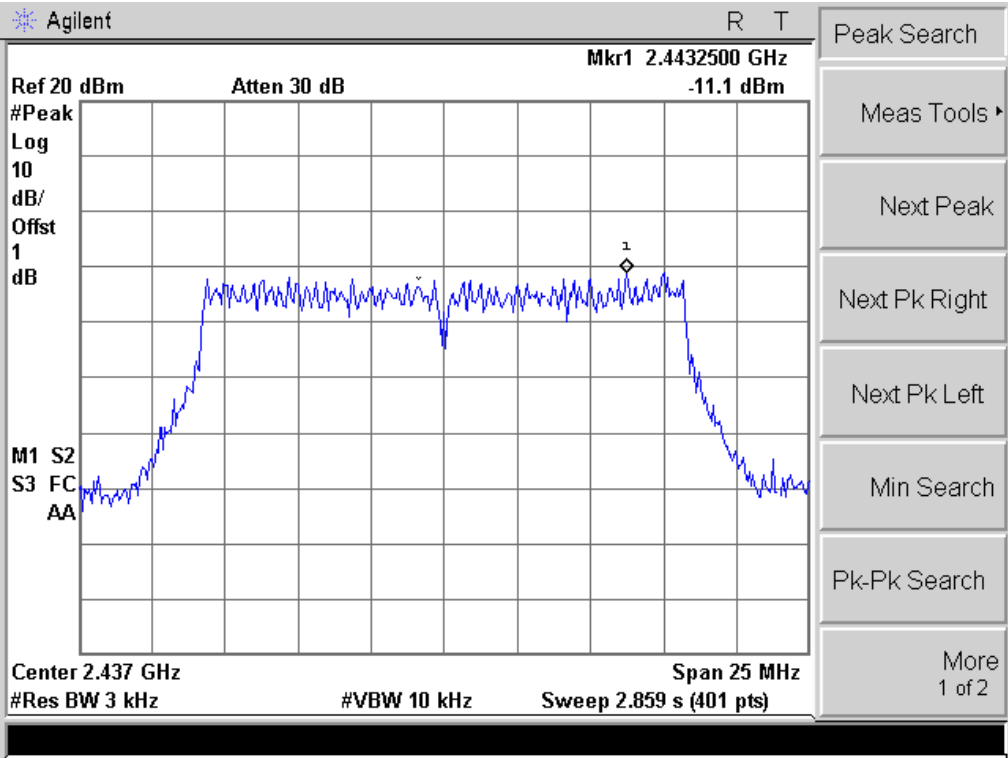


Channel 11 (2462MHz)

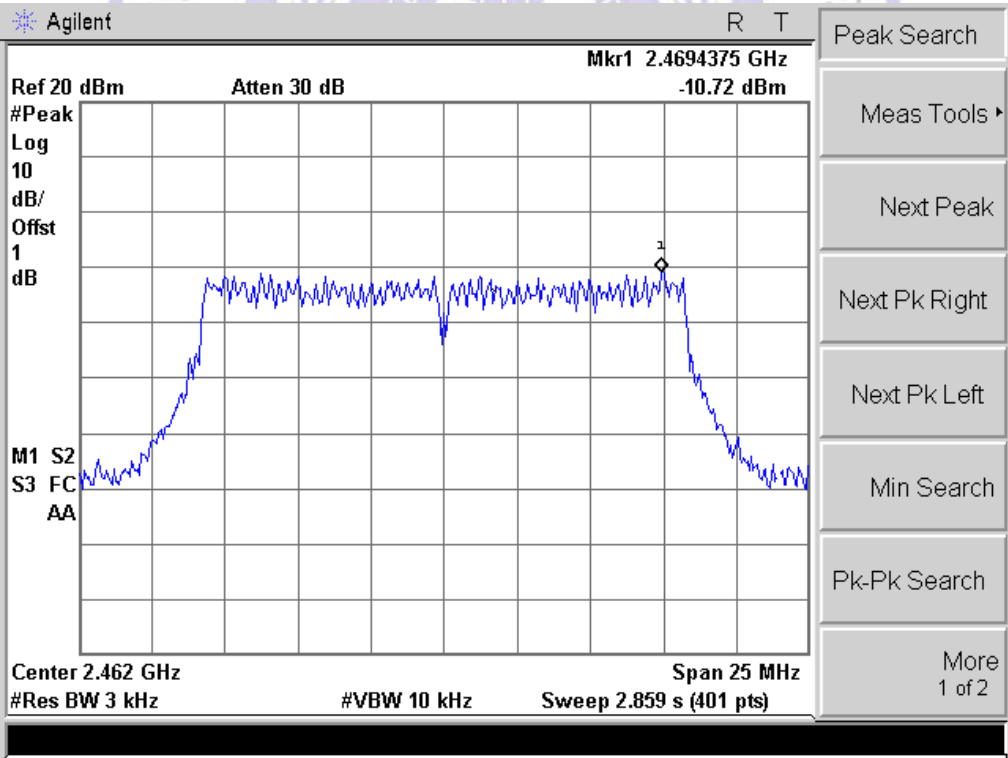


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box  |
| Test Item | : | Power Spectral Density              |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |

| Channel No. | Frequency (MHz) | Measurement<br>PPSD<br>(dBm/3KHz) | Limit<br>(dBm/3KHz) | Result |
|-------------|-----------------|-----------------------------------|---------------------|--------|
| 01          | 2412            | -10.71                            | 8                   | Pass   |
| 06          | 2437            | -11.01                            | 8                   | Pass   |
| 11          | 2462            | -11.25                            | 8                   | Pass   |


Channel 01 (2412MHz)

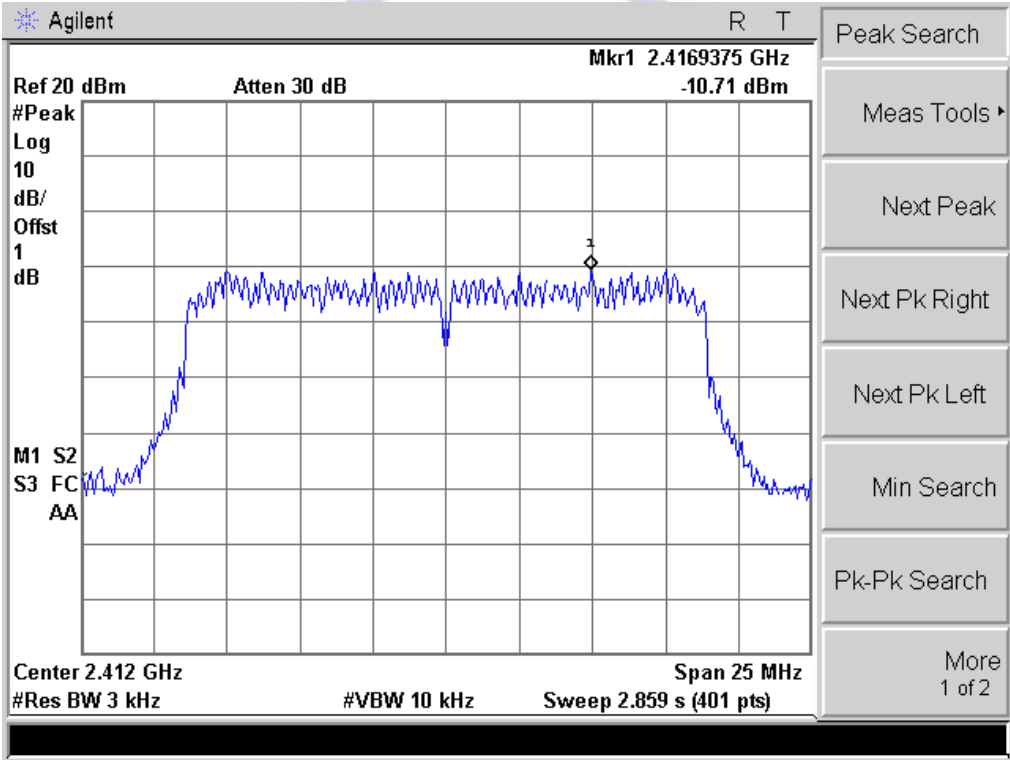

Channel 06 (2437MHz)

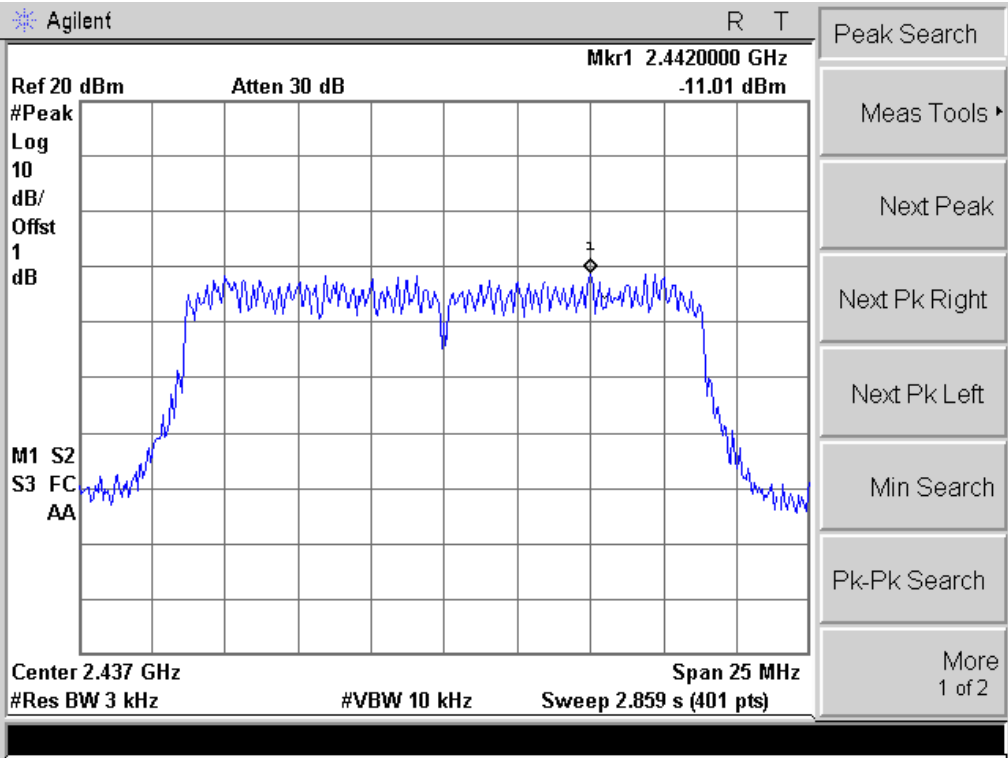


Channel 11 (2462MHz)

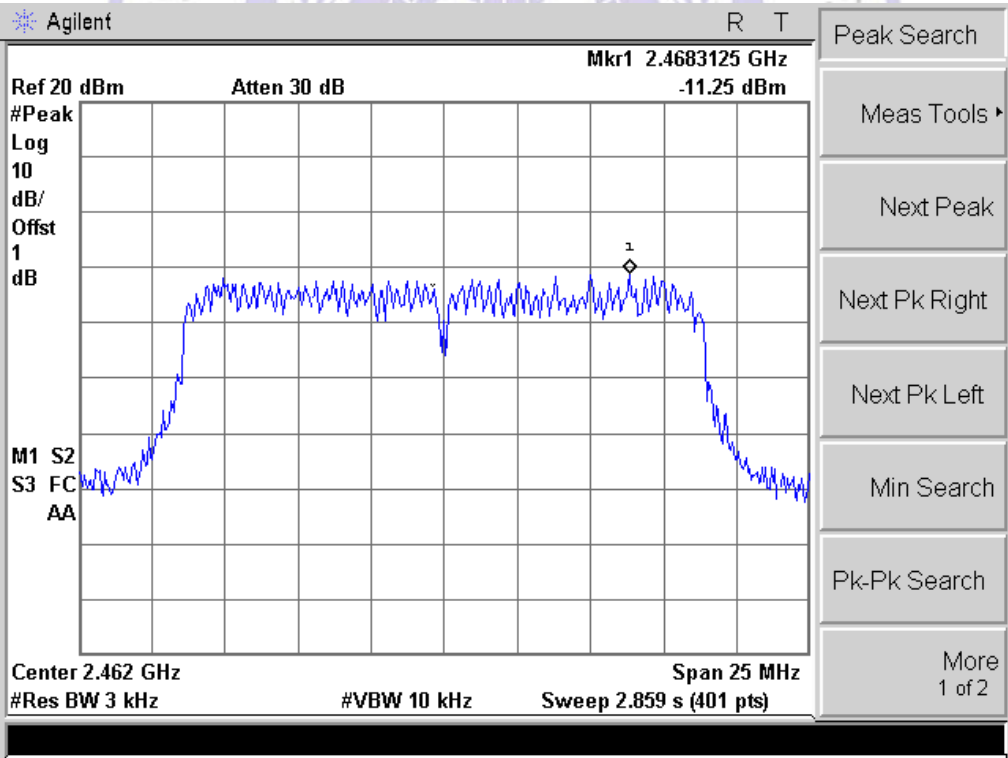

## 4.7. Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r01 for compliance to FCC 47CFR 15.247 requirements.


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300kHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


### LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.



### TEST RESULTS

|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | RF Antenna Conducted Spurious      |
| Test Mode | : | Mode 1: Transmit by 802.11b        |


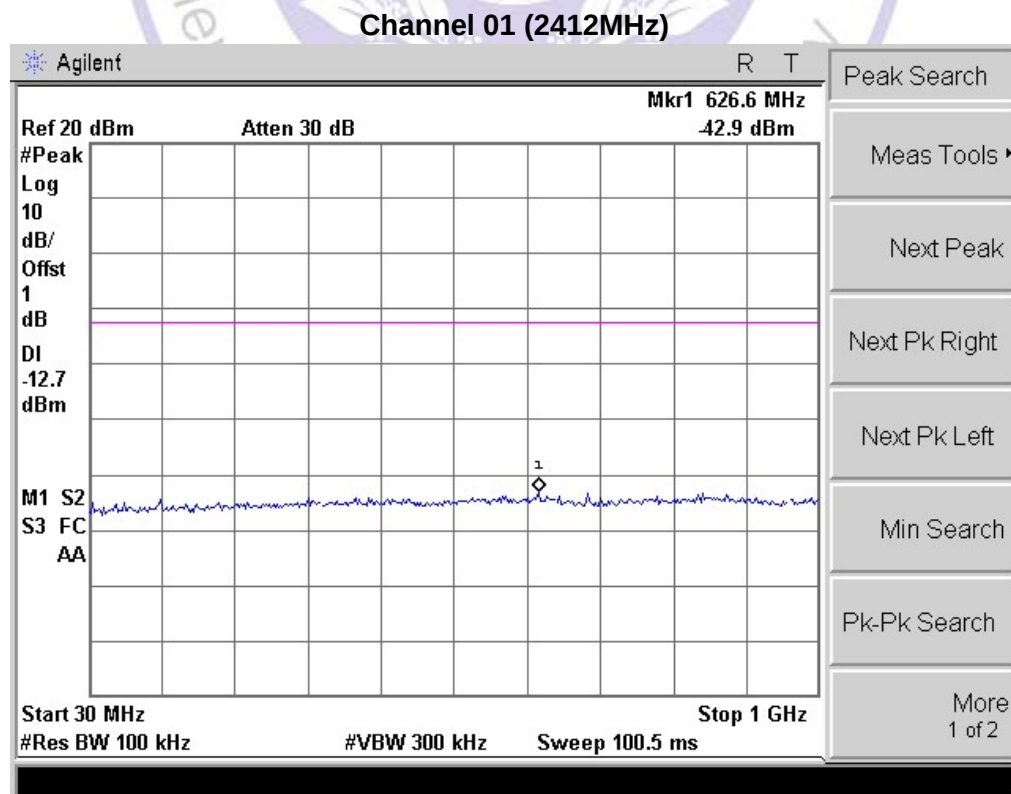


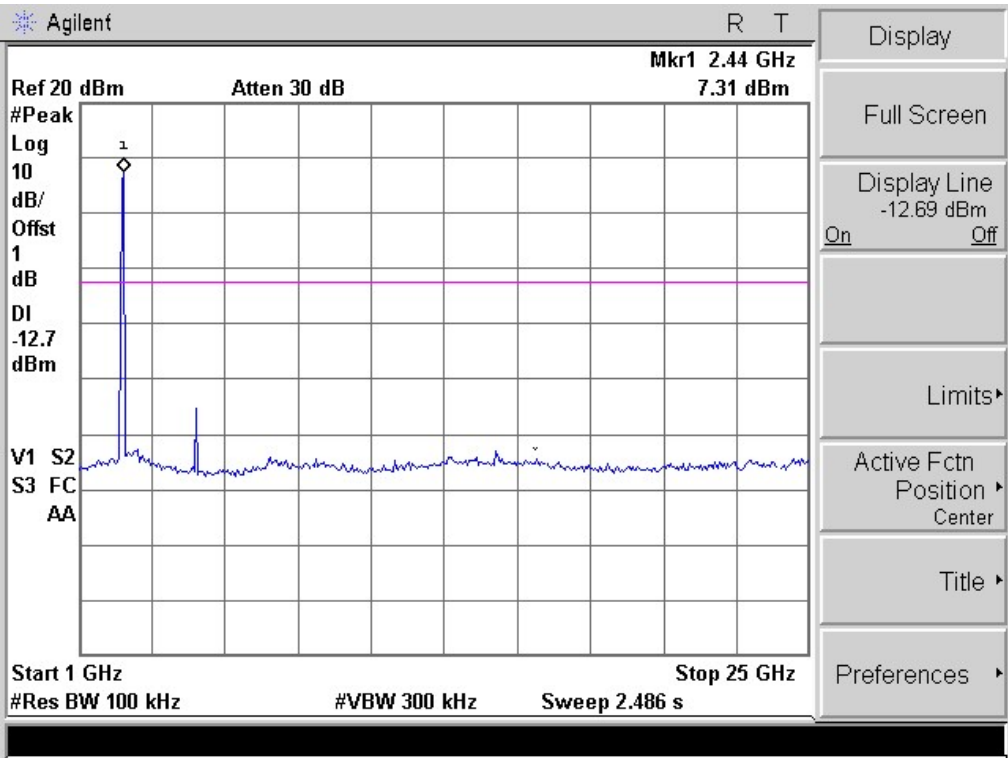

Channel 06 (2437MHz)

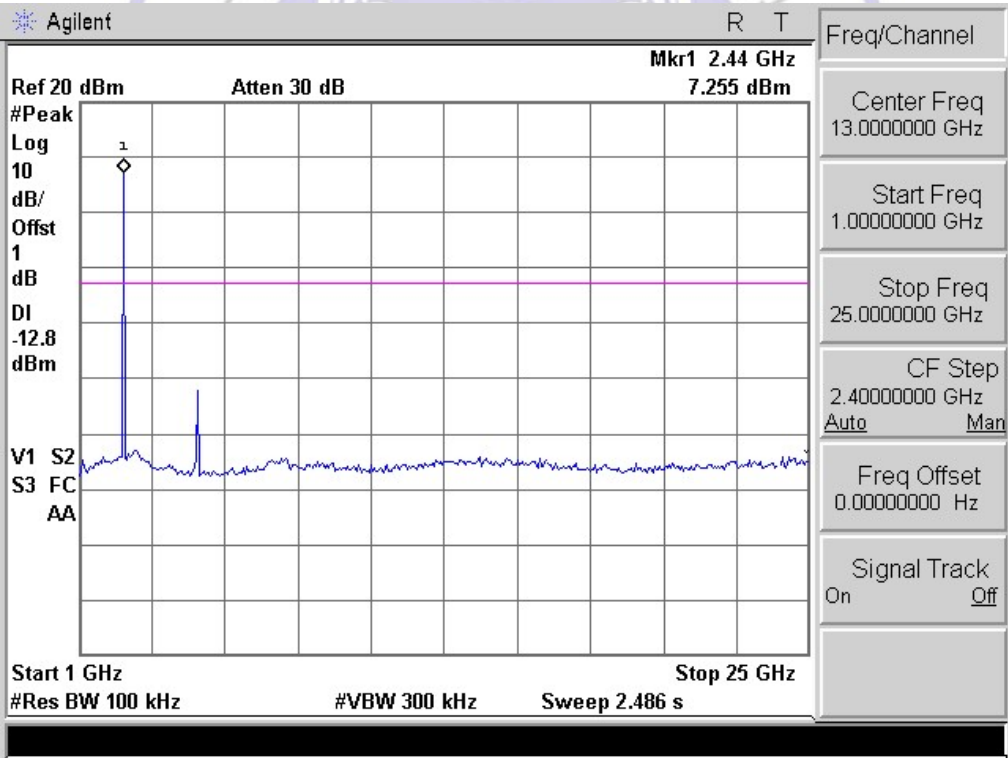
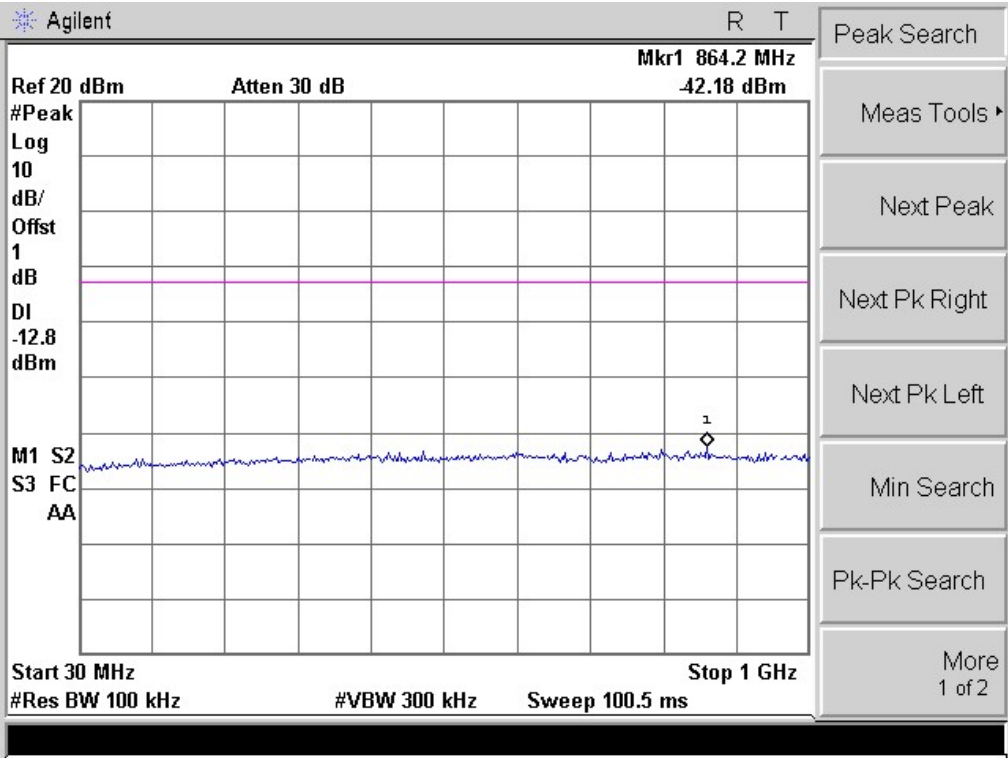


Channel 11 (2462MHz)

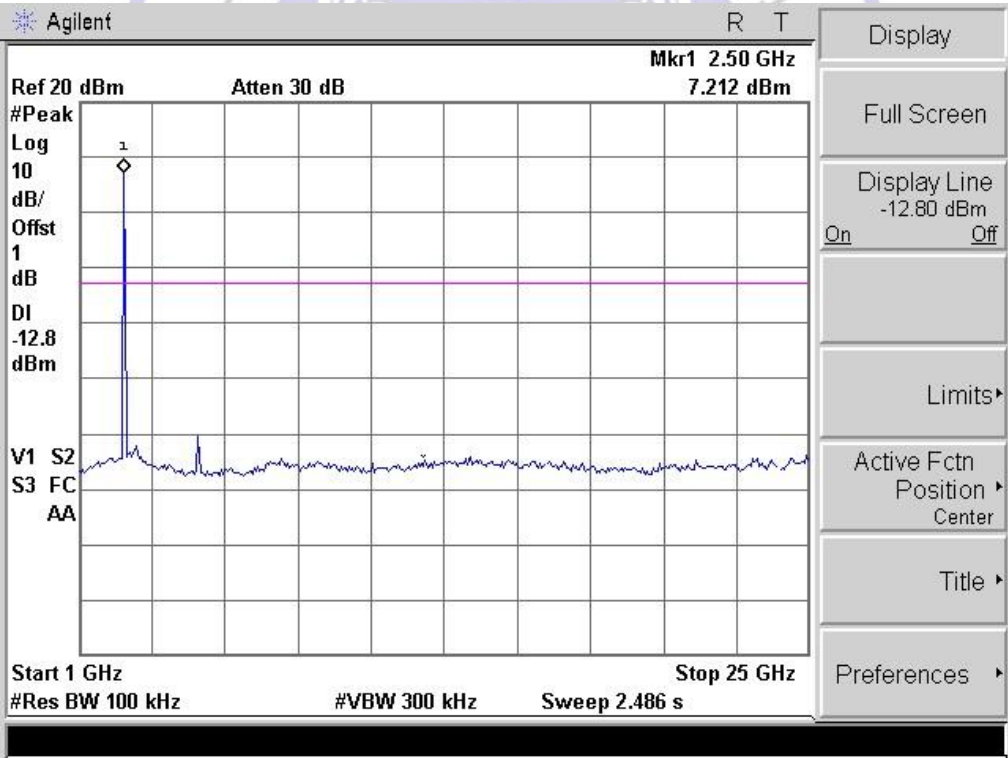
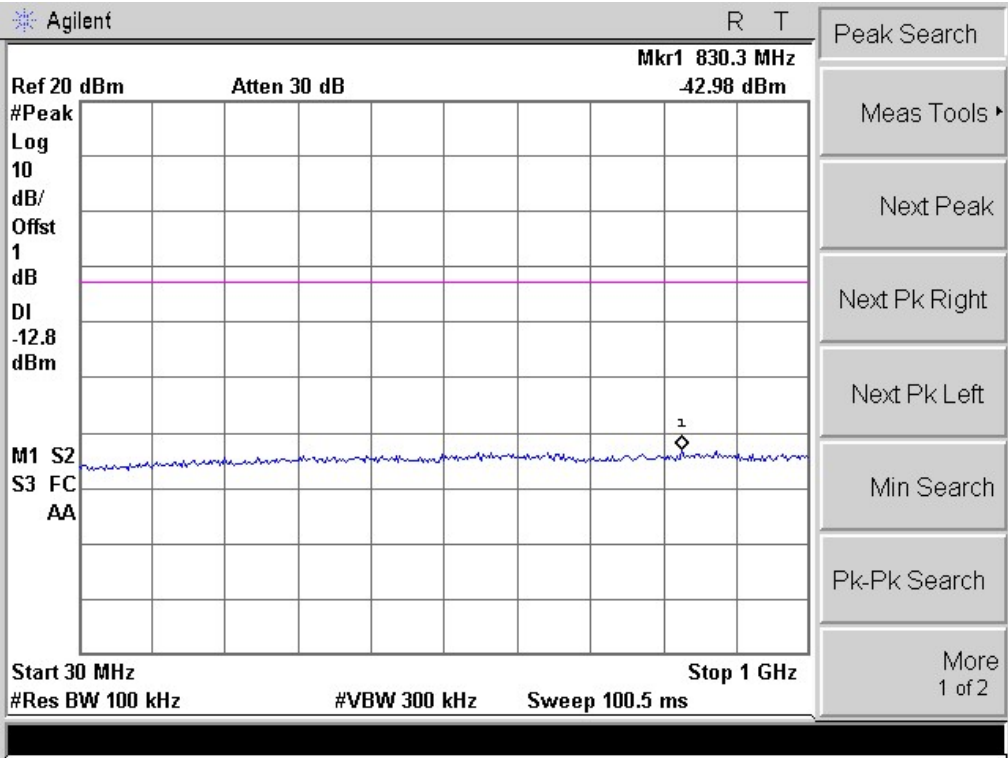


|           |   |                                    |
|-----------|---|------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box |
| Test Item | : | RF Antenna Conducted Spurious      |
| Test Mode | : | Mode 2: Transmit by 802.11g        |



Channel 01 (2412MHz)

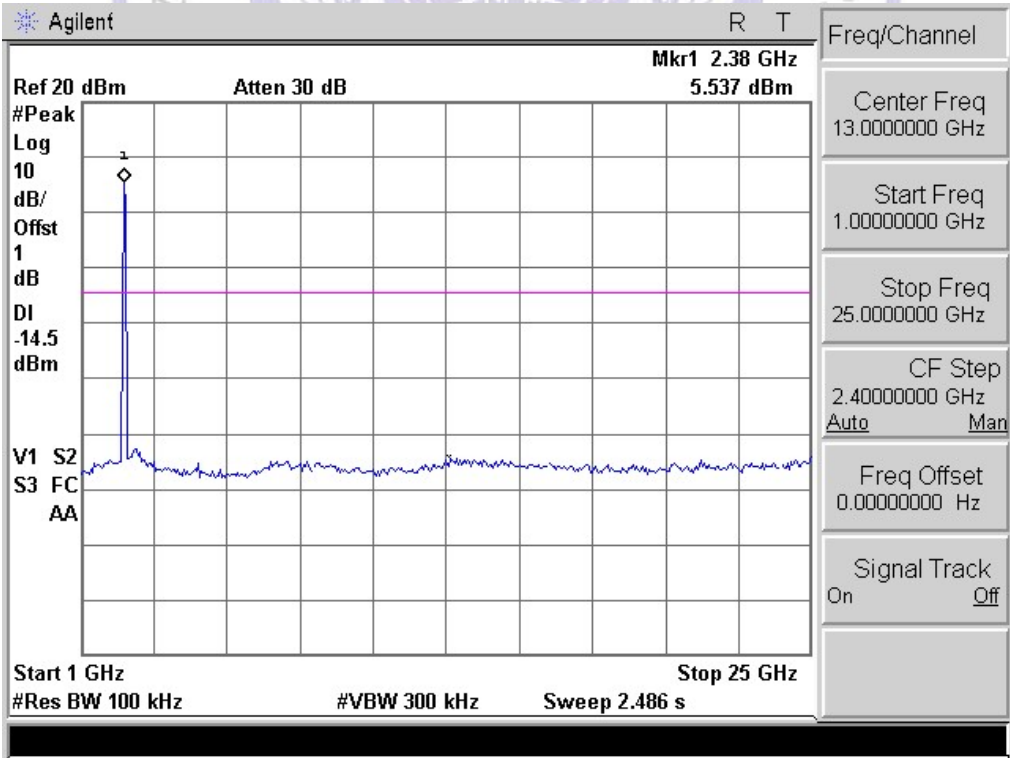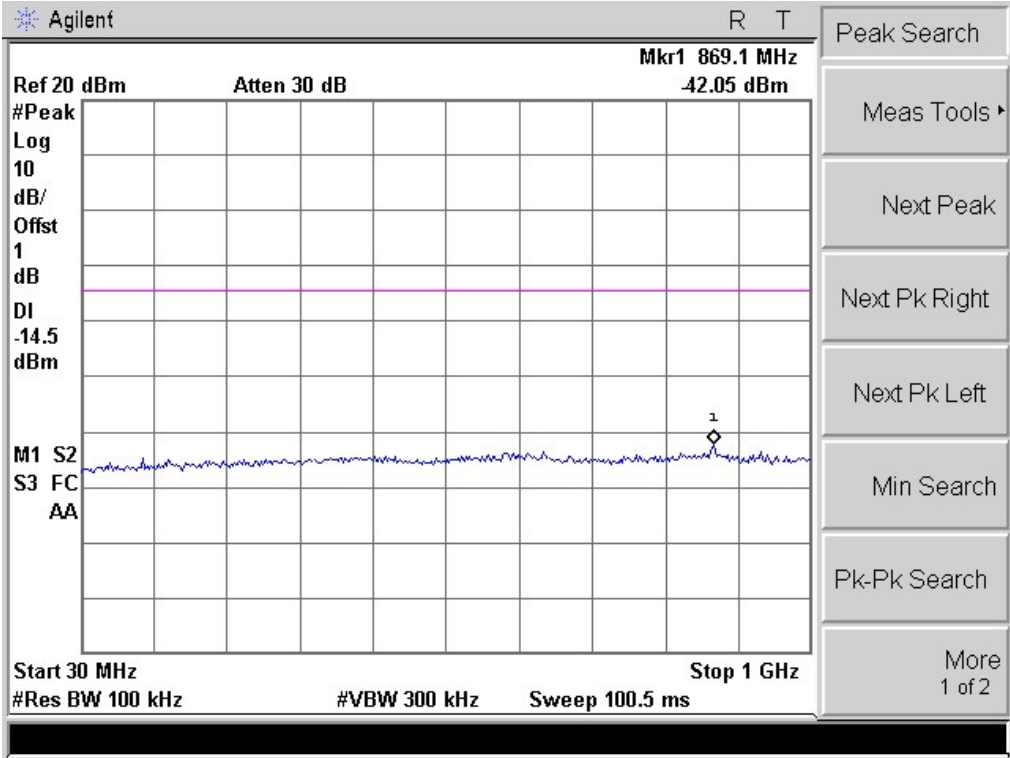

Channel 06 (2437MHz)

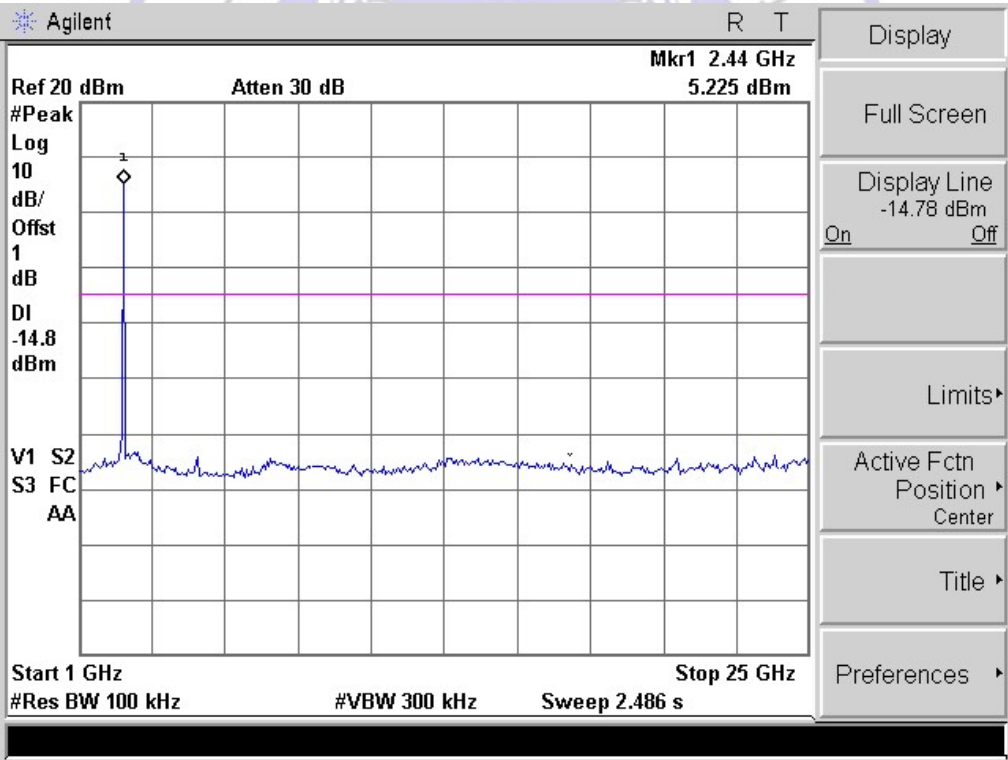
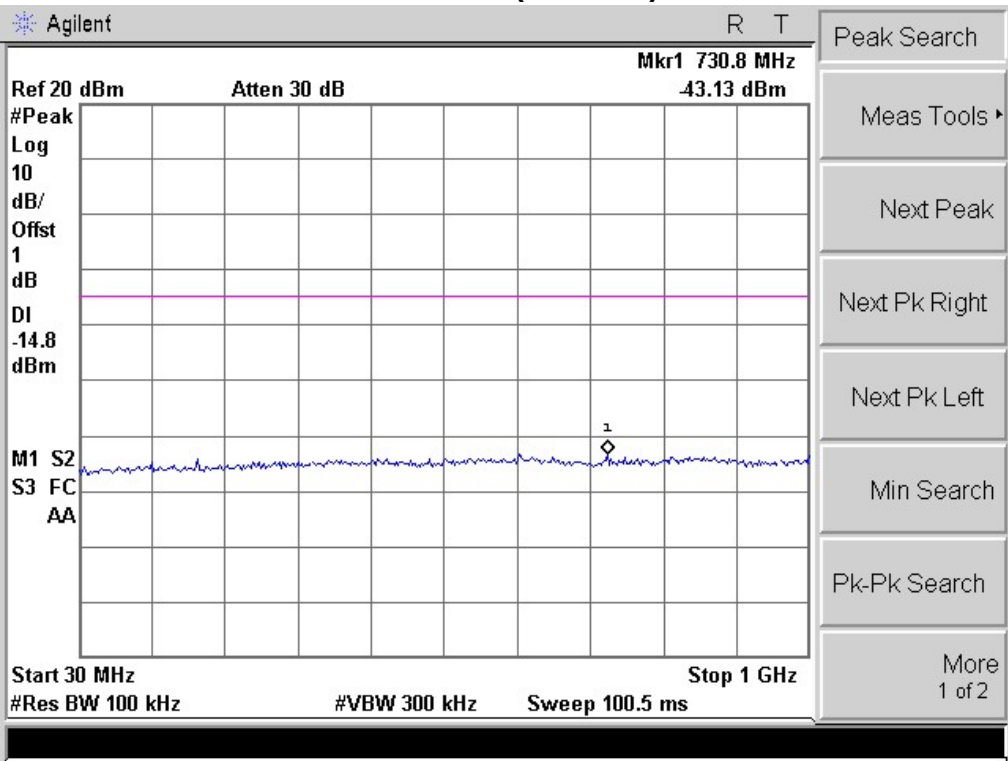


Channel 11 (2462MHz)

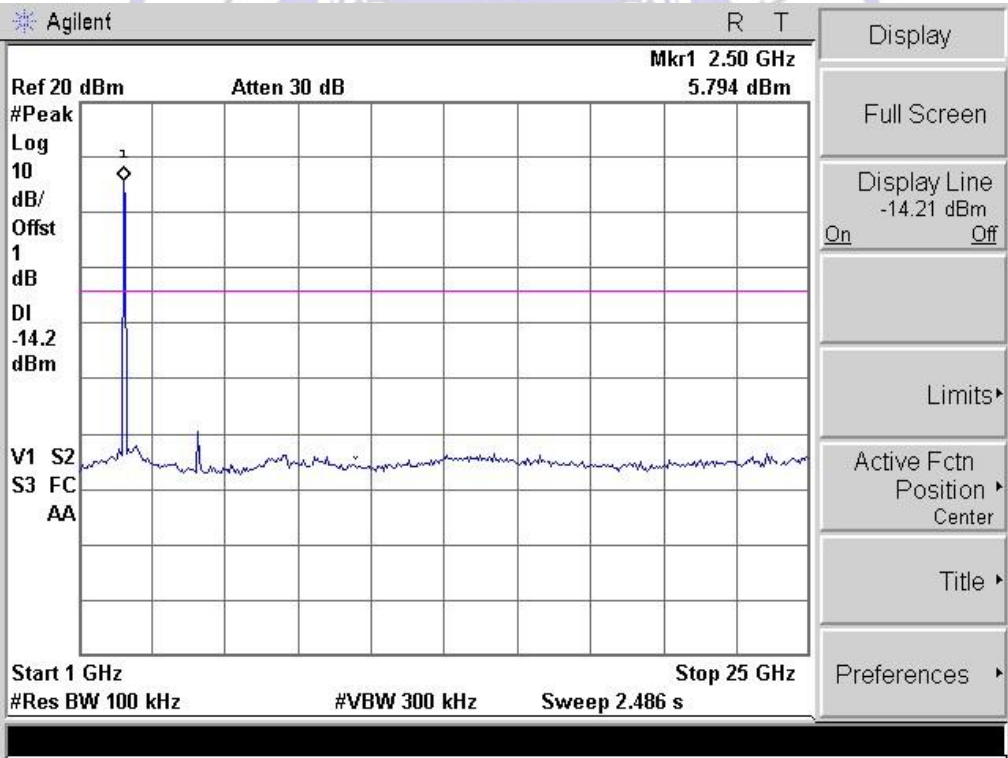
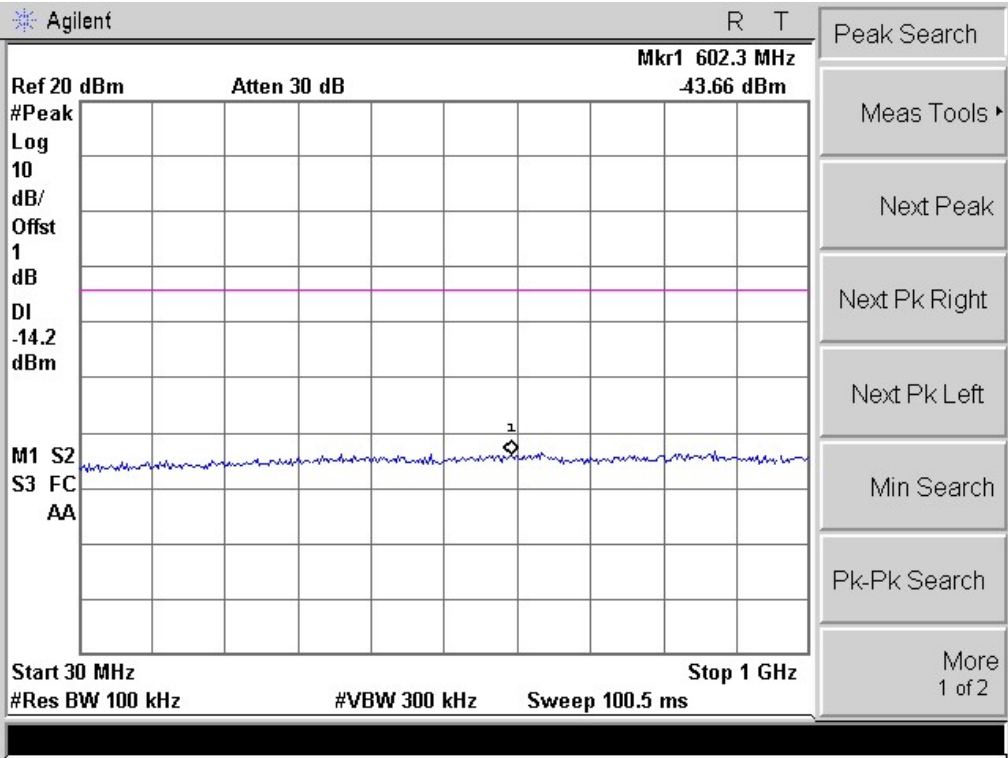


|           |   |                                     |
|-----------|---|-------------------------------------|
| Product   | : | 2.5inch HD WIFI Raid enclosure box  |
| Test Item | : | RF Antenna Conducted Spurious       |
| Test Mode | : | Mode 3: Transmit by 802.11n (20MHz) |



Channel 01 (2412MHz)

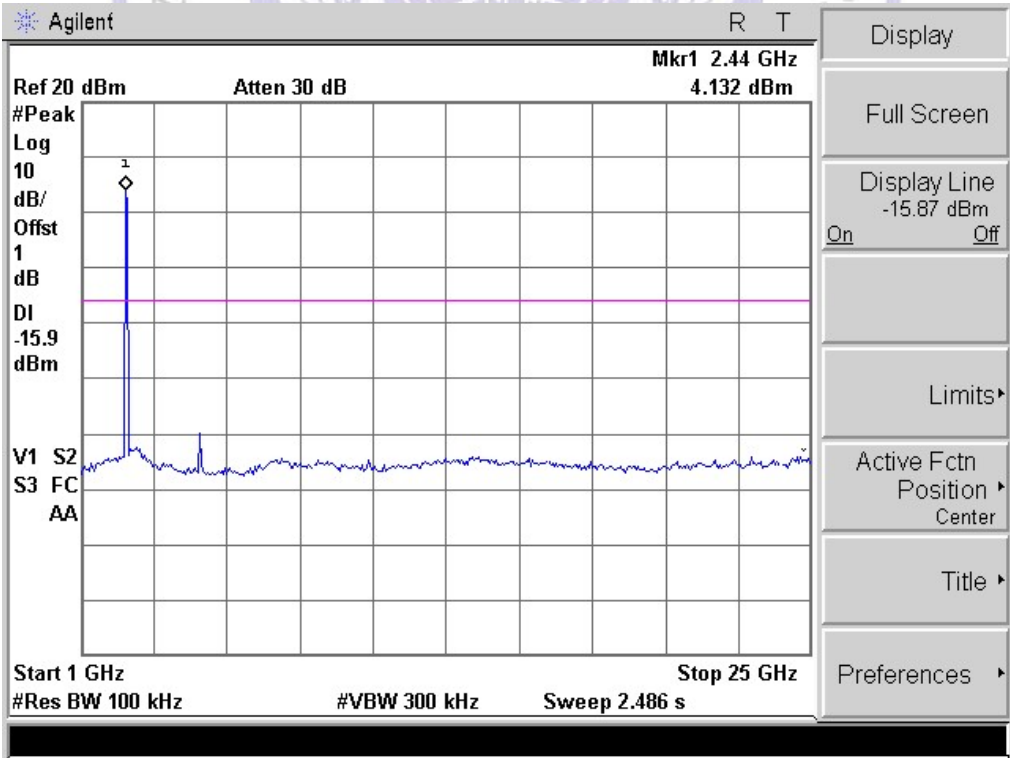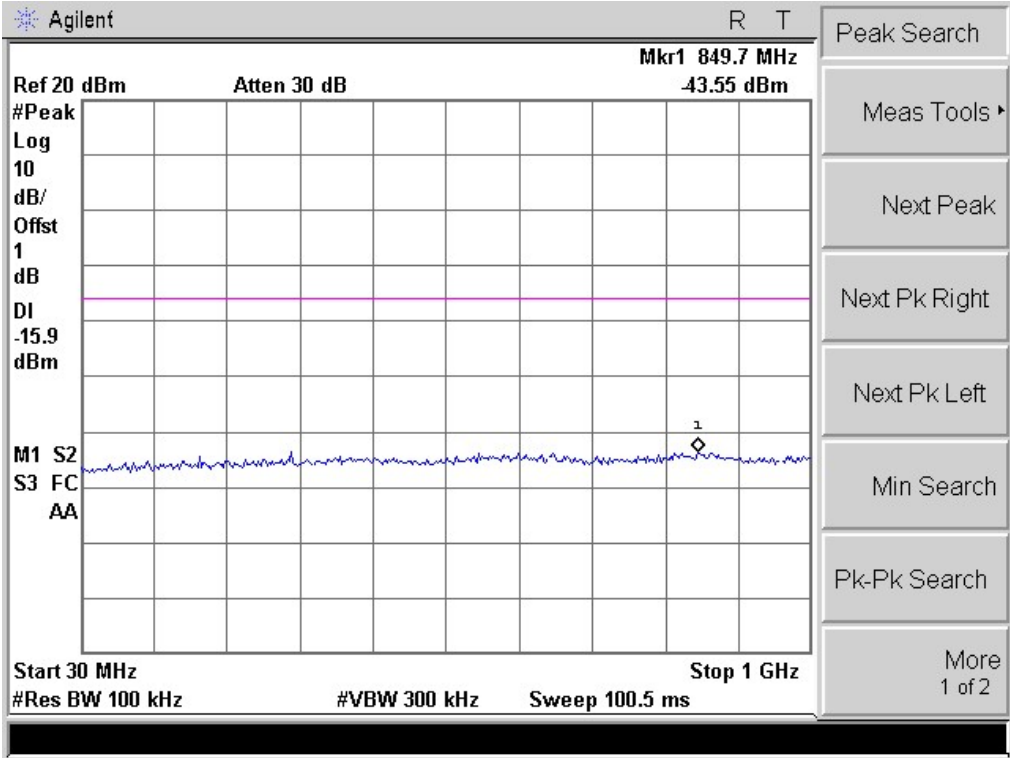

Channel 06 (2437MHz)

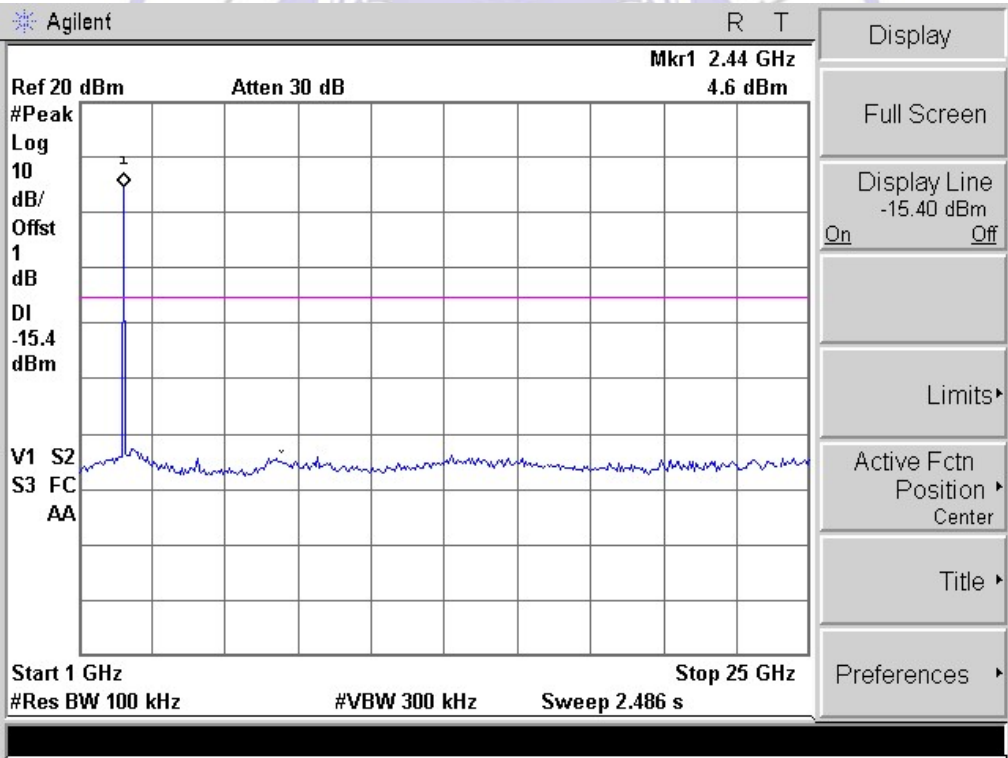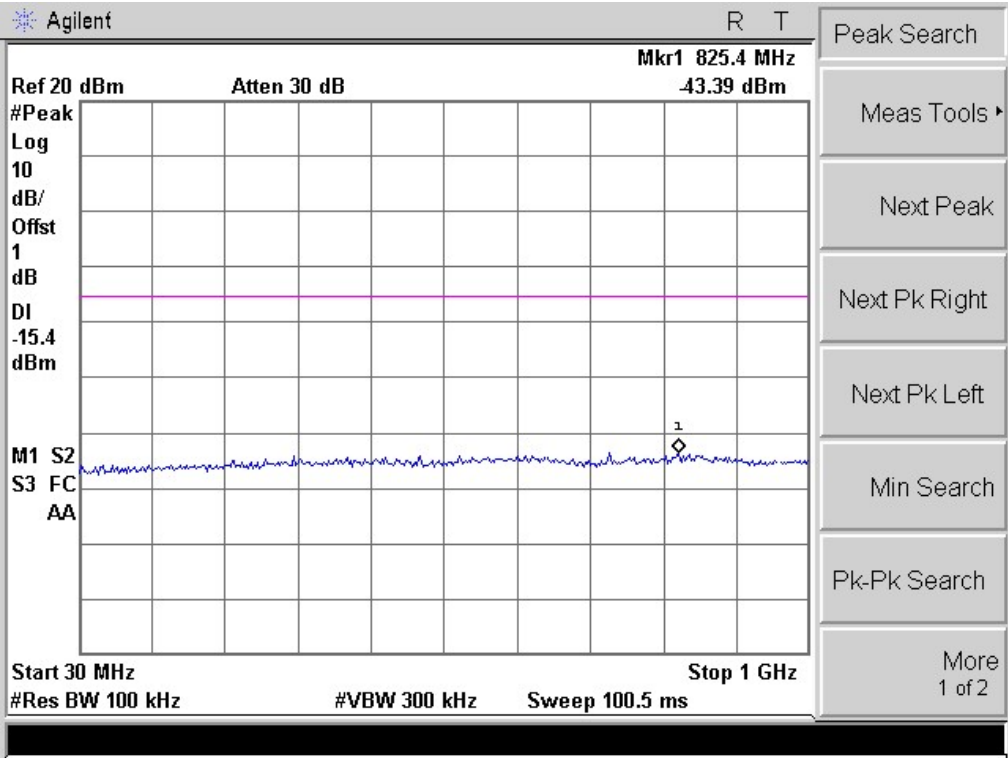

Channel 11 (2462MHz)

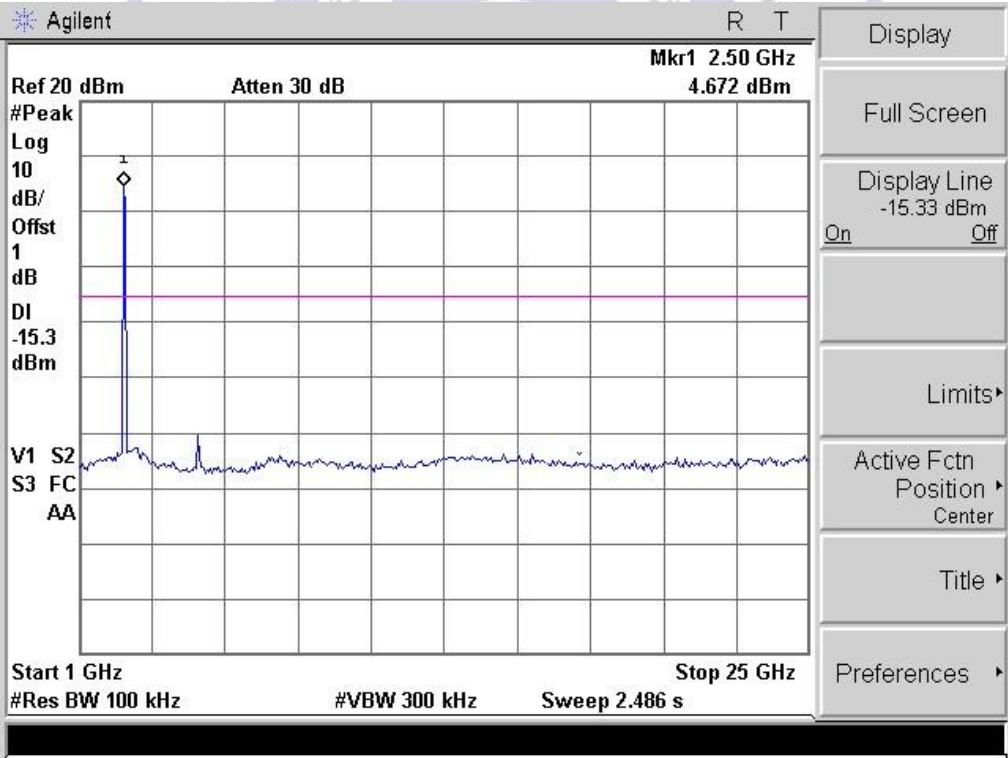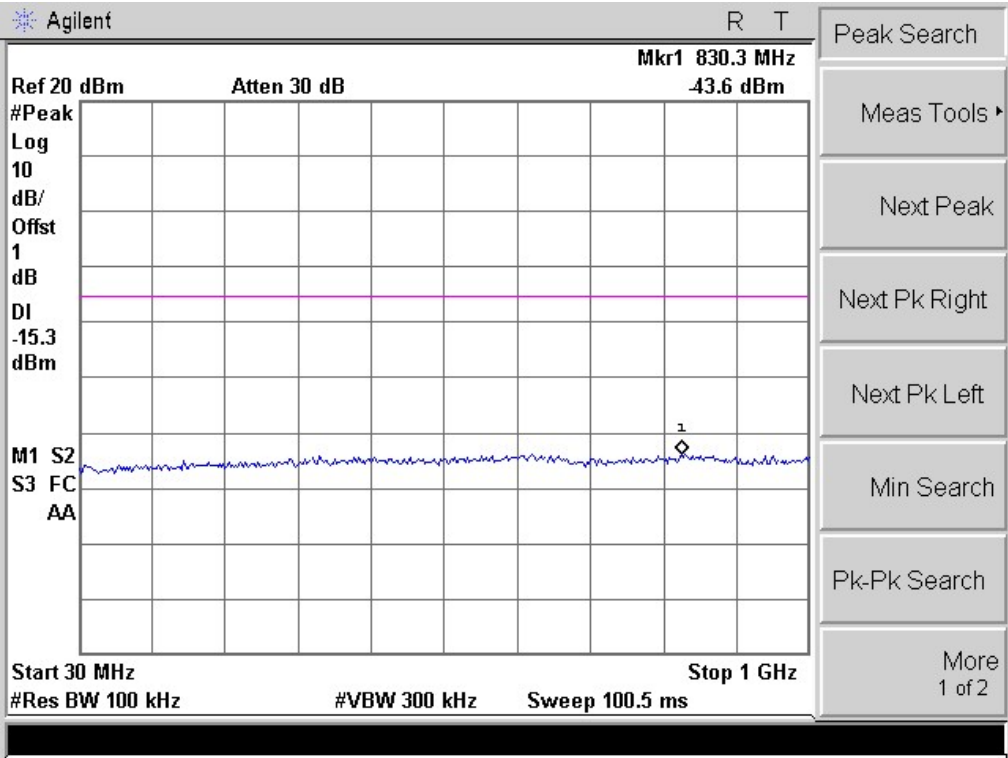

## 4.8. Antenna Requirement

### **STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

**Refer to statement below for compliance.**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **ANTENNA CONNECTED CONSTRUCTION**

The directional gains of antenna used for transmitting is -1.0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

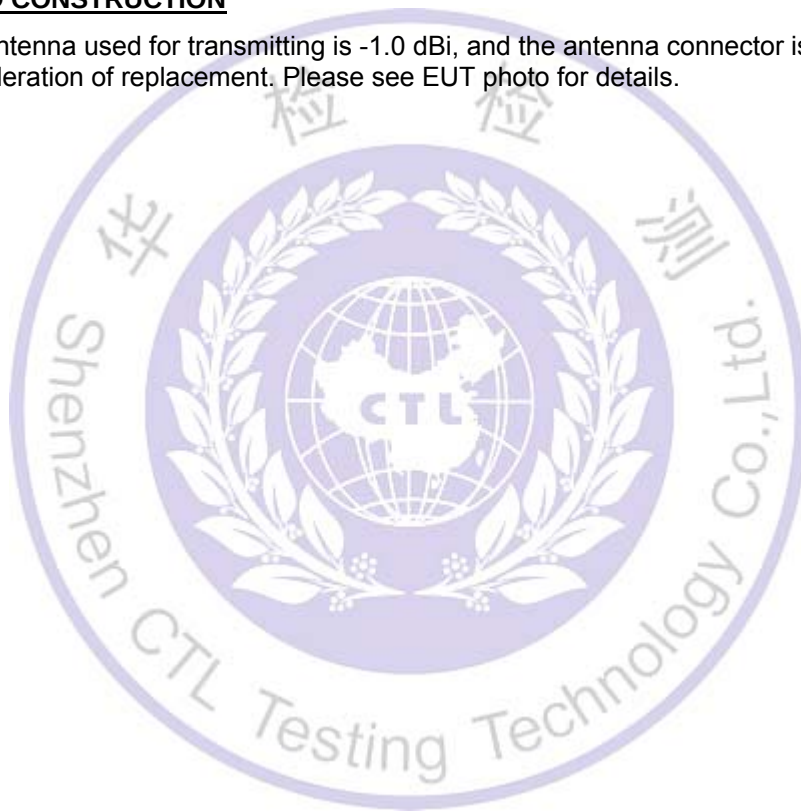



## 5. Test Setup Photos of the EUT

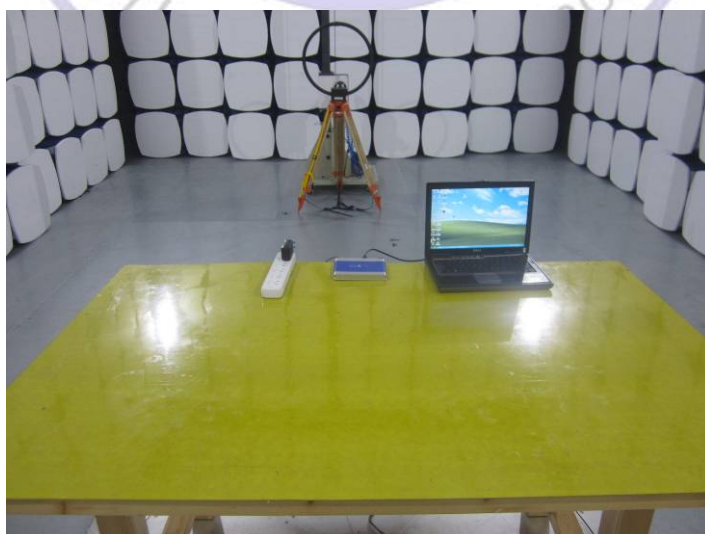






## 6. External and Internal Photos of the EUT




### External Photos of EUT

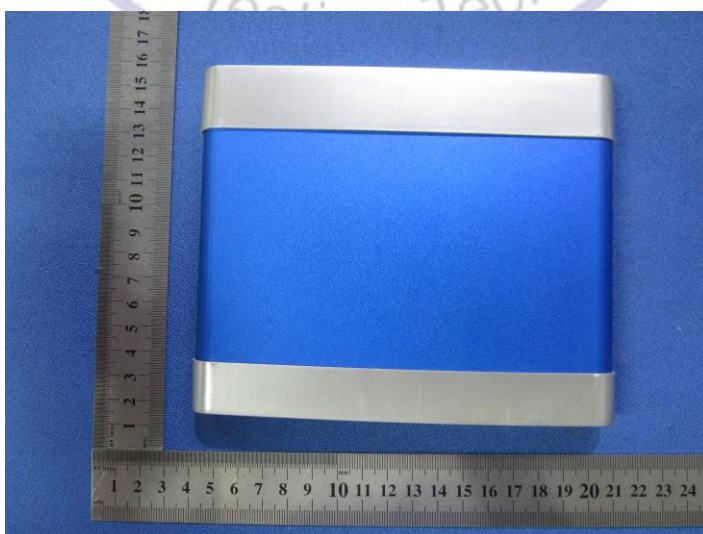
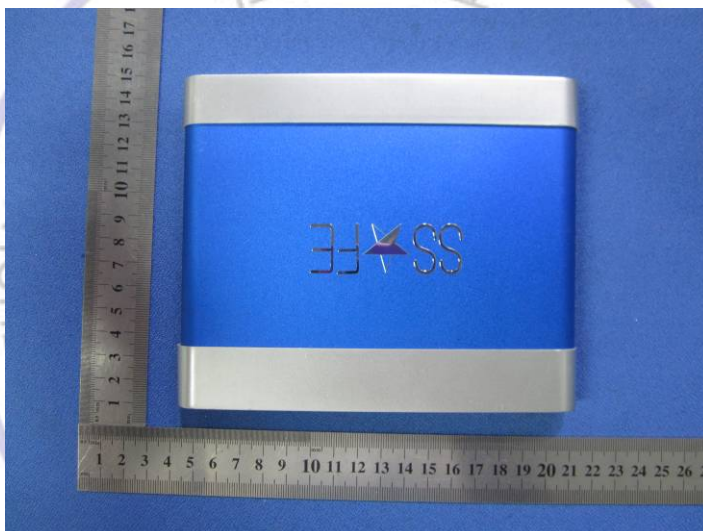


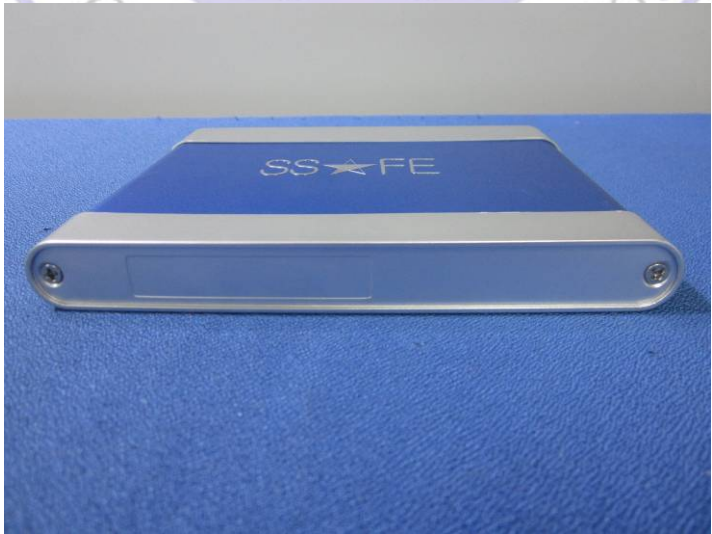

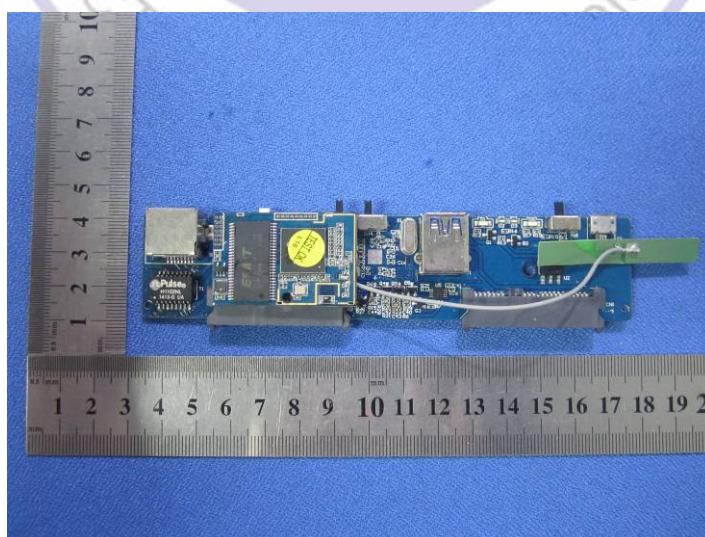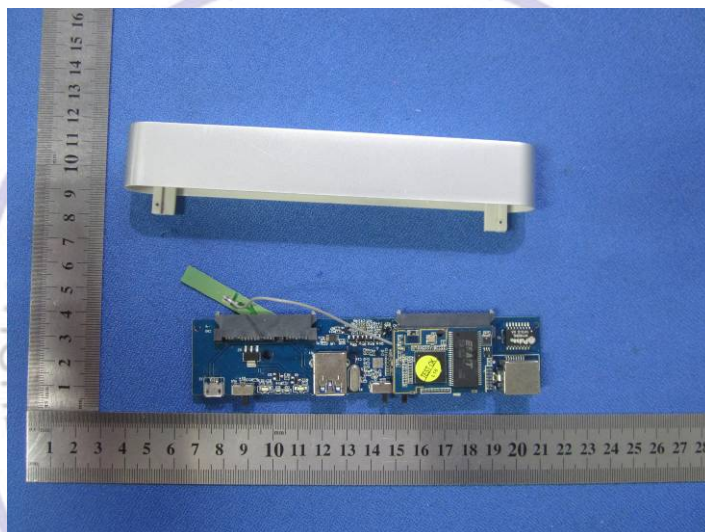

Internal Photos of EUT

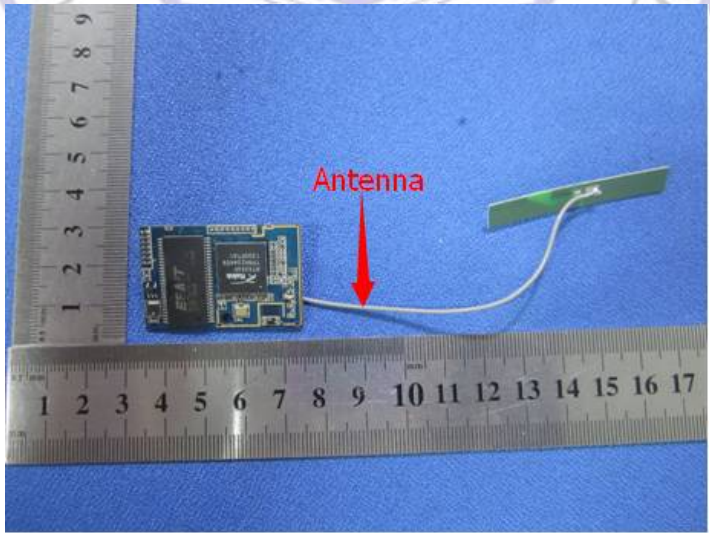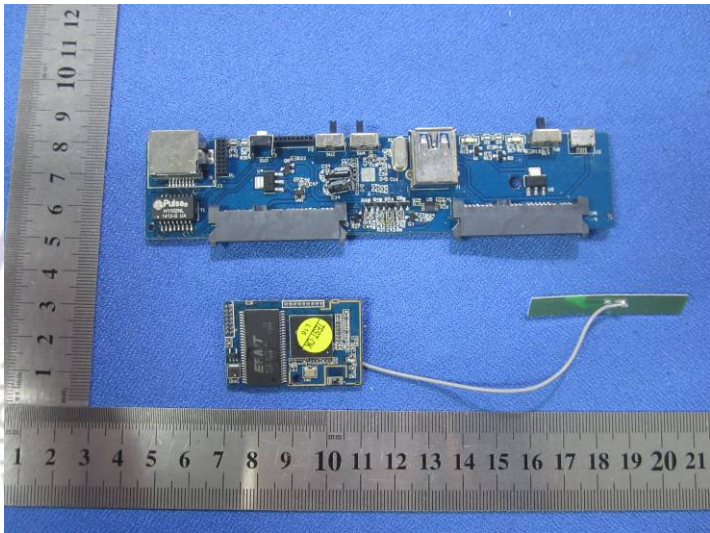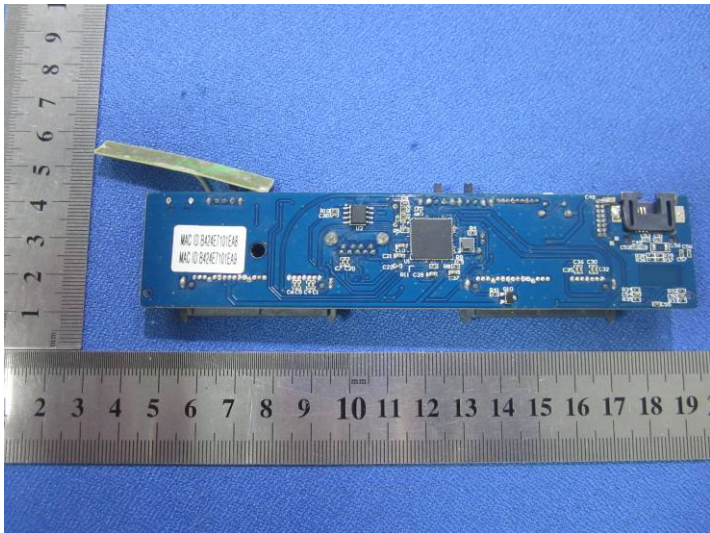

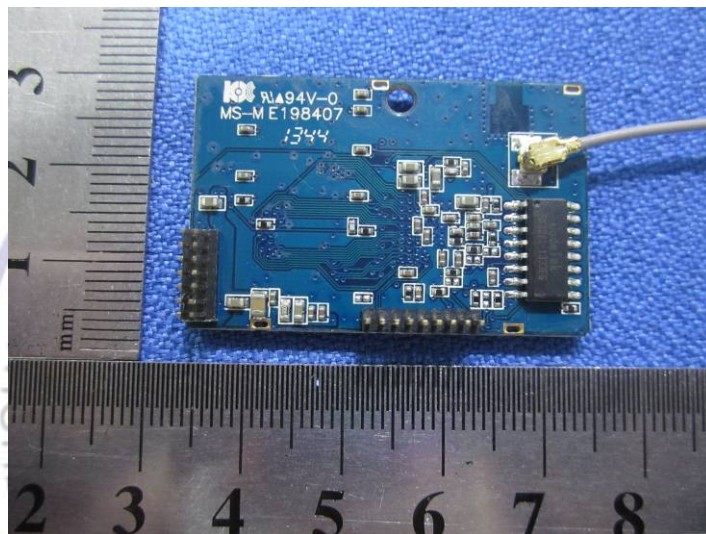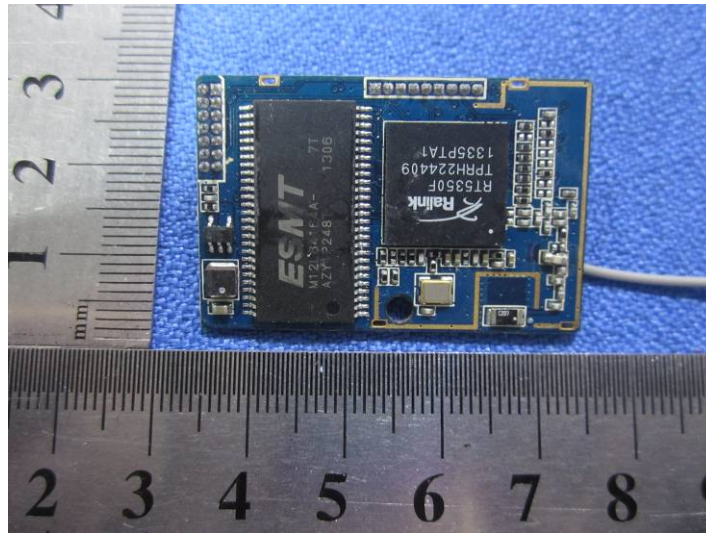

.....End of Report.....

