# RF TEST REPORT



Report No.: 18070198-FCC-R Supersede Report No.: N/A

Applicant	Palette Operations Pty. Ltd.		
Product Name	Pico		
Model No.	S003		
Serial No.	N/A		
Test Standard	FCC Part 1	5.247, ANSI C63.10: 2013	
Test Date	May 16 to 2	28, 2018	
Issue Date	May 29, 2018		
Test Result	Pass Fail		
Equipment complied with the specification			
Equipment did no	Equipment did not comply with the specification		
Janon Lia	Agron Lional David Huang		
Aaron Liang Test Engineer		David Huang Checked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

#### Issued by:

#### SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report No.	18070198-FCC-R
Page	2 of 37

## **Laboratories Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### **Accreditations for Conformity Assessment**

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report No.	18070198-FCC-R
Page	3 of 37

This page has been le	eft blank intentionally.
-----------------------	--------------------------



Test Report No.	18070198-FCC-R
Page	4 of 37

# **CONTENTS**

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	6
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	7
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1	ANTENNA REQUIREMENT	9
6.2	DTS (6 DB) CHANNEL BANDWIDTH	10
6.3	MAXIMUM OUTPUT POWER	12
<b>6.4</b> ]	POWER SPECTRAL DENSITY	14
6.5	BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS	16
6.6	AC POWER LINE CONDUCTED EMISSIONS	19
6.7	RADIATED EMISSIONS & RESTRICTED BAND	25
INA	NEX A. TEST INSTRUMENT	32
INA	NEX B. TEST SETUP AND SUPPORTING EQUIPMENT	33
	NEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF	25



Test Report No.	18070198-FCC-R
Page	5 of 37

# 1. Report Revision History

Report No.	Report Version	Description	Issue Date
18070198-FCC-R	NONE	Original	May 29, 2018

# 2. Customer information

Applicant Name	Palette Operations Pty. Ltd.
Applicant Add	Level 1, 393 Smith Street, Fitzroy, VIC 3065, Australia
Manufacturer	Suga Technology Hong Kong Limited
Manufacturer Add	8 Fu Long Road, Qing Xi Town, Dongguan, Guangdong, China



Test Report No.	18070198-FCC-R
Page	6 of 37

# 3. Test site information

#### Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES	
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China	
	518108	
FCC Test Site No.	535293	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	

#### Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and
	Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMC(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.



Test Report No.	18070198-FCC-R
Page	7 of 37

# 4. Equipment under Test (EUT) Information

Description of EUT:	Pico
Main Model:	S003
Serial Model:	N/A
Date EUT received:	May 15, 2018
Test Date(s):	May 16 to 28, 2018
Equipment Category :	DTS
Antenna Gain:	BLE: 0dBi
Antenna Type:	PCB antenna
Type of Modulation:	BLE: GFSK
RF Operating Frequency (ies):	BLE: 2402-2480 MHz
Max. Output Power:	-10.83dBm
Number of Channels:	BLE: 40CH
Port:	Please refer to the user's manual
Trade Name :	Palette

Battery:

Spec: 3.7V, 150mAh

FCC ID: 2ACYDS003

Input Power:



Test Report No.	18070198-FCC-R
Page	8 of 37

# 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result	
§15.203	Antenna Requirement	Compliance	
§15.247 (a)(2)	DTS (6 dB) CHANNEL BANDWIDTH	Compliance	
§15.247(b)(3)	Conducted Maximum Output Power	Compliance	
§15.247(e)	Power Spectral Density	Compliance	
§15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency Bands	Compliance	
§15.207 (a),	AC Power Line Conducted Emissions	Compliance	
§15.205, §15.209,	Radiated Emissions & Unwanted Emissions	Compliance	
§15.247(d)	into Restricted Frequency Bands		

#### **Measurement Uncertainty**

Emissions		
Test Item	Description	Uncertainty
Band-Edge & Unwanted		
Emissions into Restricted		
Frequency Bands and	Confidence level of approximately 95% (in the case	
Radiated Emissions &	where distributions are normal), with a coverage	+5.6dB/-4.5dB
Unwanted Emissions	factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	
into Restricted Frequency		
Bands		
-	- -	-



Test Report No.	18070198-FCC-R
Page	9 of 37

## 6. Measurements, Examination And Derived Results

#### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 1 antenna:

A permanently attached PCB antenna for BLE, the gain is 0dBi for BLE.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



Test Report No.	18070198-FCC-R
Page	10 of 37

# 6.2 DTS (6 dB) Channel Bandwidth

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 17, 2018
Tested By :	Aaron Liang

Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW≥ 500kHz;	~
RSS Gen(4.6.1)	b)	99% BW: For FCC reference only; required by IC.	<b>V</b>
Test Setup	Spectrum Analyzer EUT		
Test Procedure	Spectrum Analyzer  558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth  6dB Emission bandwidth measurement procedure  - Set RBW = 100 kHz.  - Set the video bandwidth (VBW) ≥ 3 RBW.  - Detector = Peak.  - Trace mode = max hold.  - Sweep = auto couple.  - Allow the trace to stabilize.  Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.		
Remark			
Result	Pas	ss Fail	

Test Data	Yes	□ <sub>N/A</sub>
Test Plot	Yes (See below)	□ <sub>N/A</sub>




Test Report No.	18070198-FCC-R
Page	11 of 37

#### 6dB Bandwidth measurement result

#### **Test Data**

СН	Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (MHz)
Low	2402	881.476	1.8302
Mid	2440	833.650	1.8544
High	2480	877.860	1.8877

#### **Test Plots**

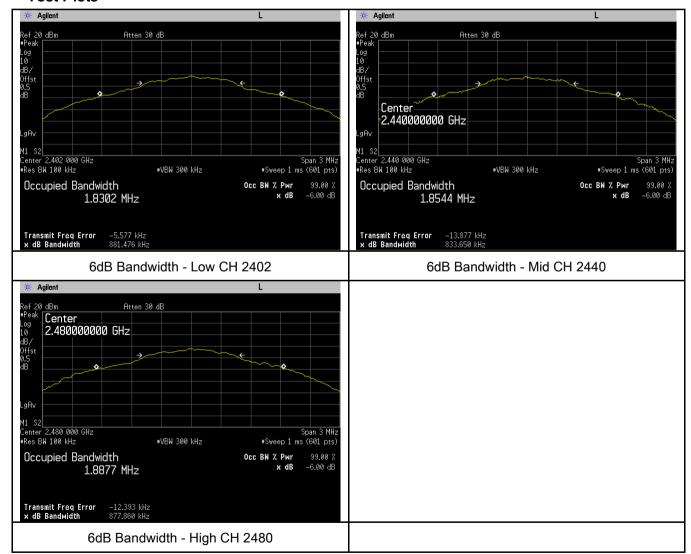



Test Report No.	18070198-FCC-R
Page	12 of 37

# 6.3 Maximum Output Power

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 17, 2018
Tested By:	Aaron Liang

## Requirement(s):

Spec	Item	Requirement	Applicable
	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	
	b)	b) FHSS in 5725-5850MHz: ≤ 1 Watt	
§15.247(b)	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125	
(3),RSS210		Watt.	
(A8.4)	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	
(* 101 1)	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25	1
		Watt	
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	Y
Test Setup			
		Spectrum Analyzer EUT	
	558074	D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power meth	od
	Maximum output power measurement procedure		
	a) Set the RBW ≥ DTS bandwidth.		
	b) Set VBW ≥ 3 × RBW.		
Test	c) Set span ≥ 3 x RBW		
Procedure	d) Sweep time = auto couple.		
	e) Detector = peak.		
	f) Trace mode = max hold.		
	g) Allow trace to fully stabilize.		
	h) Use peak marker function to determine the peak amplitude level.		
Remark			
Result	Pas	s Fail	



Test Report No.	18070198-FCC-R
Page	13 of 37


Test Data	Yes	□ <sub>N/A</sub>
Test Plot	Yes (See below)	□ <sub>N/A</sub>

#### Output Power measurement result

#### **Test Data**

Туре	СН	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output	Low	2402	-10.83	30	Pass
Output	Mid	2440	-11.20	30	Pass
power	High	2480	-11.54	30	Pass

#### **Test Plots**

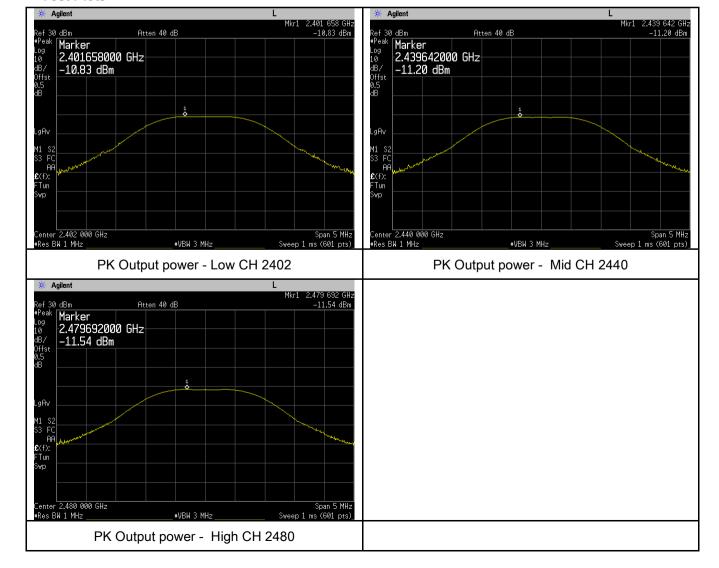



Test Report No.	18070198-FCC-R
Page	14 of 37

# 6.4 Power Spectral Density

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 17, 2018
Tested By :	Aaron Liang

Spec	Item	Requirement	Applicable	
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	>	
Test Setup		Spectrum Analyzer EUT		
Test Procedure	Spectrum Analyzer  558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure  - a) Set analyzer center frequency to DTS channel center frequency.  - b) Set the span to 1.5 times the DTS bandwidth.  - c) Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.  - d) Set the VBW ≥ 3 × RBW.  - e) Detector = peak.  - f) Sweep time = auto couple.  - g) Trace mode = max hold.  - h) Allow trace to fully stabilize.  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.  - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.			
Remark				
Result	Pas	ss Fail		

Test Data	Yes	□ <sub>N/A</sub>
Test Plot	Yes (See below)	□ <sub>N/A</sub>



Test Report No.	18070198-FCC-R
Page	15 of 37


#### Power Spectral Density measurement result

#### **Test Data**

Туре	СН	Freq (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Result
	Low	2402	-20.54	-5.23	-25.77	8	Pass
PSD	Mid	2440	-19.73	-5.23	-24.96	8	Pass
	High	2480	-19.39	-5.23	-24.62	8	Pass

Note: factor=10log(3/10)=-5.23

#### **Test Plots**

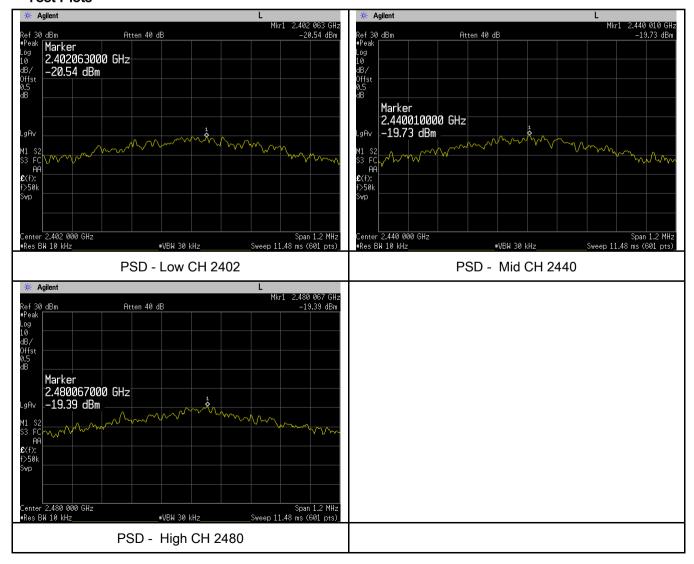



Test Report No.	18070198-FCC-R
Page	16 of 37

# 6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1016mbar
Test date :	May 23, 2018
Tested By :	Aaron Liang

#### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<b>\</b>
Test Setup	Ant. Tower Support Units  Ground Plane Test Receiver		
Test Procedure	<ul> <li>Radiated Method Only</li> <li>1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> </ul>		



Test Plot Yes (See below)


Test Report No.	18070198-FCC-R
Page	17 of 37

	- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a
	convenient frequency span including 100kHz bandwidth from band edge, check
	the emission of EUT, if pass then set Spectrum Analyzer as below:
	a. The resolution bandwidth and video bandwidth of test receiver/spectrum
	analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video
	bandwidth is 3MHz with Peak detection for Peak measurement at frequency above
	1GHz.
	c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the
	video bandwidth is 10Hz with Peak detection for Average Measurement as below
	at frequency above 1GHz.
	- 4. Measure the highest amplitude appearing on spectral display and set it as a
	reference level. Plot the graph with marking the highest point and edge frequency.
	- 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	Pass Fail
	<u> </u>
Test Data	res N/A



Test Report No.	18070198-FCC-R
Page	18 of 37

# Test Plots Band Edge measurement result

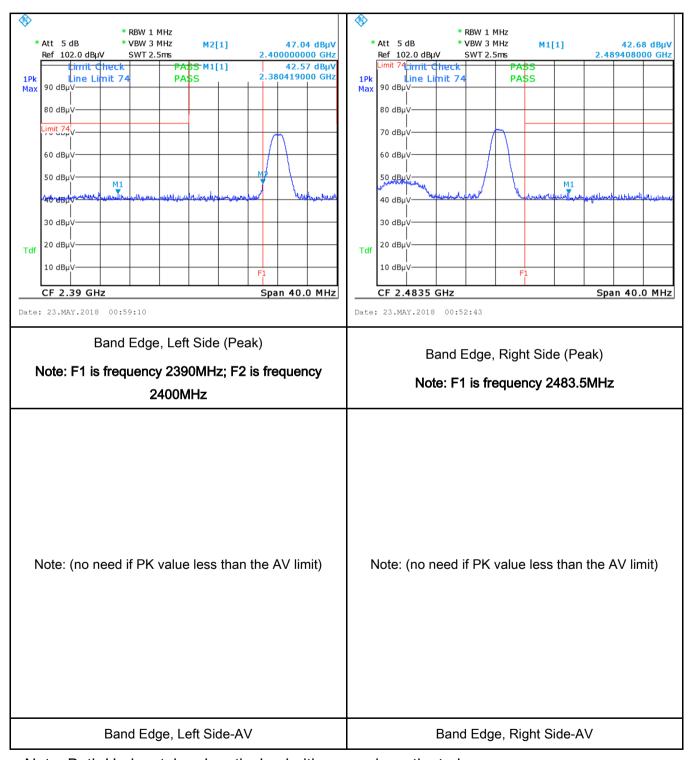

Note: Both Horizontal and vertical polarities were investigated.



Test Report No.	18070198-FCC-R
Page	19 of 37

# 6.6 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1016mbar
Test date :	May 23, 2018
Tested By :	Aaron Liang

## Requirement(s):

Spec	Item	Requirement			Applicable
47CFR§15. 207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequencity voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz not exceed the limits in the following table, as measured using [mu] H/50 ohms line impedance stabilization network (LISN). lower limit applies at the boundary between the frequencies rate of the public stability of the public stabil		the radio frequency ower line on any kHz to 30 MHz, shall measured using a 50 network (LISN). The re frequencies ranges.	<b>&gt;</b>
		(MHz) 0.15 ~ 0.5	QP 66 – 56	Average 56 - 46	
		0.5 ~ 5	56	46	
		5 ~ 30	60	50	
Test Setup	Horizontal Ground Reference Plane  Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm				
Procedure	<ol> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>				




Test Report No.	18070198-FCC-R
Page	20 of 37

_	
	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidt
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail
	a.
Test Data	Yes N/A
Test Plot	Yes (See below)



Test Report No.	18070198-FCC-R
Page	21 of 37

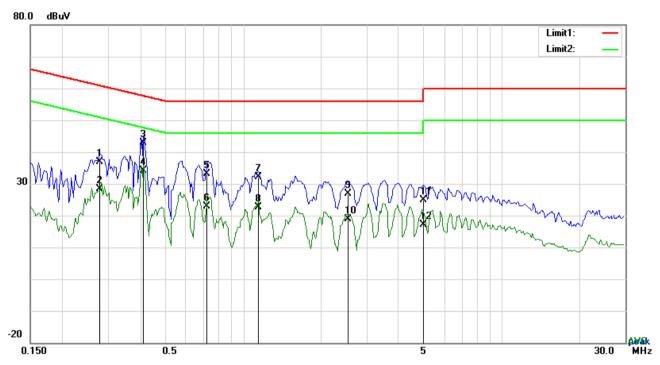


## Test Data

## Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	L1	0.2787	26.90	QP	10.03	36.93	60.85	-23.92
2	L1	0.2787	18.25	AVG	10.03	28.28	50.85	-22.57
3	L1	0.4113	32.90	QP	10.03	42.93	57.62	-14.69
4	L1	0.4113	24.16	AVG	10.03	34.19	47.62	-13.43
5	L1	0.7272	22.99	QP	10.03	33.02	56.00	-22.98
6	L1	0.7272	12.80	AVG	10.03	22.83	46.00	-23.17
7	L1	1.1445	22.13	QP	10.03	32.16	56.00	-23.84
8	L1	1.1445	12.70	AVG	10.03	22.73	46.00	-23.27
9	L1	2.5446	16.95	QP	10.05	27.00	56.00	-29.00
10	L1	2.5446	8.71	AVG	10.05	18.76	46.00	-27.24
11	L1	4.9782	14.76	QP	10.08	24.84	56.00	-31.16
12	L1	4.9782	6.99	AVG	10.08	17.07	46.00	-28.93



Test Report No.	18070198-FCC-R
Page	22 of 37

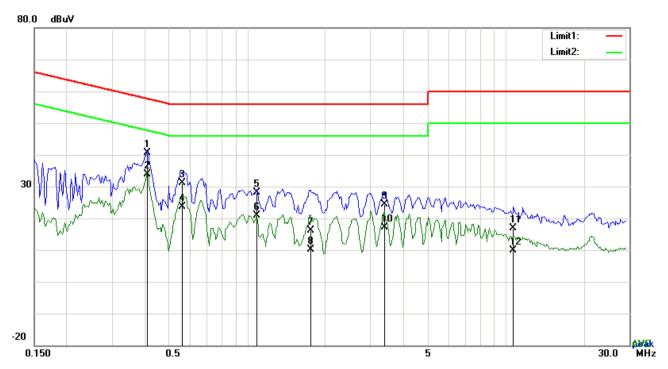


## Test Data

## Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	N	0.4113	30.55	QP	10.02	40.57	57.62	-17.05
2	N	0.4113	23.95	AVG	10.02	33.97	47.62	-13.65
3	Ν	0.5634	21.02	QP	10.02	31.04	56.00	-24.96
4	Ν	0.5634	13.59	AVG	10.02	23.61	46.00	-22.39
5	N	1.0899	18.07	QP	10.03	28.10	56.00	-27.90
6	N	1.0899	10.78	AVG	10.03	20.81	46.00	-25.19
7	N	1.7529	5.97	QP	10.04	16.01	56.00	-39.99
8	N	1.7529	-0.02	AVG	10.04	10.02	46.00	-35.98
9	Ν	3.3978	14.27	QP	10.05	24.32	56.00	-31.68
10	N	3.3978	7.02	AVG	10.05	17.07	46.00	-28.93
11	N	10.6986	6.72	QP	10.15	16.87	60.00	-43.13
12	N	10.6986	-0.17	AVG	10.15	9.98	50.00	-40.02



Test Report No.	18070198-FCC-R
Page	23 of 37

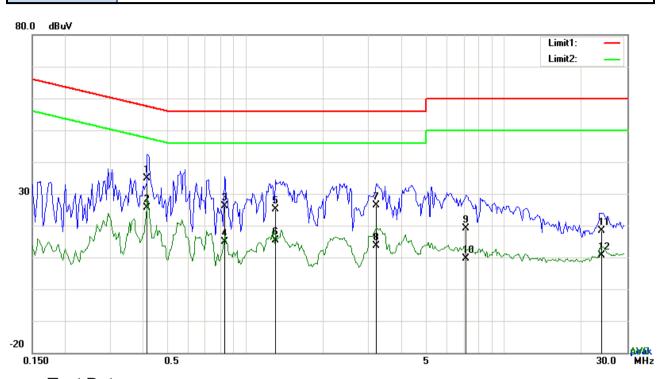


Test Data

## Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	L1	0.4191	24.80	QP	10.03	34.83	57.47	-22.64
2	L1	0.4191	15.59	AVG	10.03	25.62	47.47	-21.85
3	L1	0.8325	16.01	QP	10.03	26.04	56.00	-29.96
4	L1	0.8325	4.95	AVG	10.03	14.98	46.00	-31.02
5	L1	1.3083	15.13	QP	10.03	25.16	56.00	-30.84
6	L1	1.3083	5.40	AVG	10.03	15.43	46.00	-30.57
7	L1	3.2223	16.27	QP	10.06	26.33	56.00	-29.67
8	L1	3.2223	3.54	AVG	10.06	13.60	46.00	-32.40
9	L1	7.1457	9.09	QP	10.11	19.20	60.00	-40.80
10	L1	7.1457	-0.48	AVG	10.11	9.63	50.00	-40.37
11	L1	23.9235	8.08	QP	10.37	18.45	60.00	-41.55
12	L1	23.9235	0.23	AVG	10.37	10.60	50.00	-39.40



Test Report No.	18070198-FCC-R
Page	24 of 37

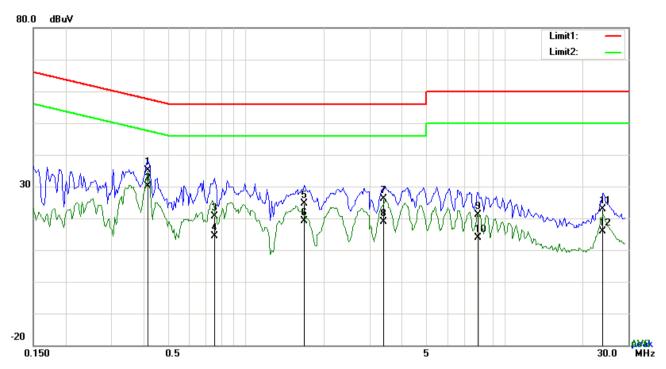

#### Test Data

## Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	N	0.4152	25.21	QP	10.02	35.23	57.54	-22.31
2	N	0.4152	20.15	AVG	10.02	30.17	47.54	-17.37
3	Ν	0.7545	10.49	QP	10.03	20.52	56.00	-35.48
4	N	0.7545	4.31	AVG	10.03	14.34	46.00	-31.66
5	N	1.6788	14.67	QP	10.04	24.71	56.00	-31.29
6	N	1.6788	8.97	AVG	10.04	19.01	46.00	-26.99
7	N	3.3900	16.07	QP	10.05	26.12	56.00	-29.88
8	N	3.3900	8.94	AVG	10.05	18.99	46.00	-27.01
9	Ν	7.8750	10.91	QP	10.11	21.02	60.00	-38.98
10	N	7.8750	3.72	AVG	10.11	13.83	50.00	-36.17
11	N	24.0132	12.47	QP	10.32	22.79	60.00	-37.21
12	N	24.0132	5.53	AVG	10.32	15.85	50.00	-34.15



Test Report No.	18070198-FCC-R
Page	25 of 37

## 6.7 Radiated Emissions & Restricted Band

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1016mbar
Test date :	May 23, 2018
Tested By :	Aaron Liang


## Requirement(s):

Spec	Item	Requirement		Applicable	
		Except higher limit as specified else emissions from the low-power radio exceed the field strength levels specified the level of any unwanted emission the fundamental emission. The tight edges			
	->	Frequency range (MHz)	Field Strength (μV/m)		
	a)	0.009~0.490	2400/F(KHz)	<b>V</b>	
		0.490~1.705	24000/F(KHz)		
		1.705~30.0	30		
		30 – 88	100		
47CFR§15.		88 – 216	150	1	
247(d),		216 960	200		
RSS210		Above 960	500		
(A8.5)	b)	For non-restricted band, In any 100 frequency band in which the spread modulated intentional radiator is oppower that is produced by the inter 20 dB or 30dB below that in the 10 band that contains the highest level determined by the measurement mused. Attenuation below the general is not required  20 dB down  30	d spectrum or digitally perating, the radio frequency ational radiator shall be at least 0 kHz bandwidth within the desired power, sethod on output power to be		
	c)	or restricted band, emission must a emission limits specified in 15.209		V	



Procedure

Test Report No.	18070198-FCC-R
Page	26 of 37

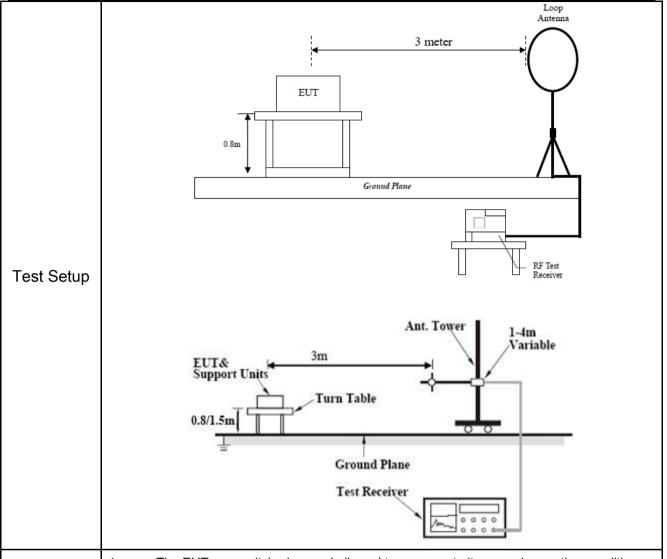

- 1. The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is
   120 kHz for Quasiy Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.



Test Report No.	18070198-FCC-R
Page	27 of 37

	The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
	bandwidth is 10Hz with Peak detection for Average Measurement as below at
	frequency above 1GHz.
	5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency
	points were measured.
Remark	
Result	Pass Fail
Test Data	Yes N/A
Test Plot	Yes (See below) N/A

#### **Test Result:**

Test Mode:	Transmitting Mode
------------	-------------------

Frequency range: 9KHz - 30MHz

Freq.	Detection	etection Factor Reading		Result	Limit@3m	Margin
(MHz)	value	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
						>20
				1		>20

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Test Report No.	18070198-FCC-R
Page	28 of 37

#### 30MHz -1GHz

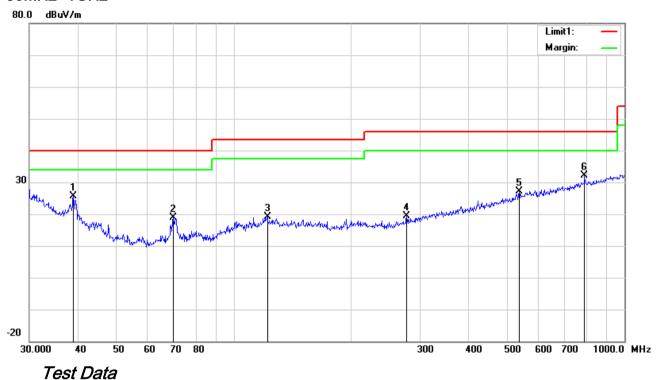


## Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr
		(MHz)	(dBuV/m)	or	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	ee ( ')
		(1111 12)	(abaviii)		(dD/III)	(42)	(45)	(aba v/iii)	(abaviii)	(GD)	(OIII)	( )
1	Н	38.8879	32.48	peak	14.71	22.27	0.78	25.70	40.00	-14.30	100	280
2	Н	70.0903	32.55	peak	7.80	22.38	0.98	18.95	40.00	-21.05	200	50
3	Н	121.9755	26.46	peak	13.77	22.36	1.17	19.04	43.50	-24.46	100	344
4	Н	277.0935	27.33	peak	12.59	22.29	1.75	19.38	46.00	-26.62	100	332
5	Н	537.5891	28.18	peak	18.23	21.72	2.47	27.16	46.00	-18.84	100	259
6	Н	790.6188	28.97	peak	21.29	21.17	2.94	32.03	46.00	-13.97	100	163



Test Report No.	18070198-FCC-R
Page	29 of 37

#### 30MHz -1GHz

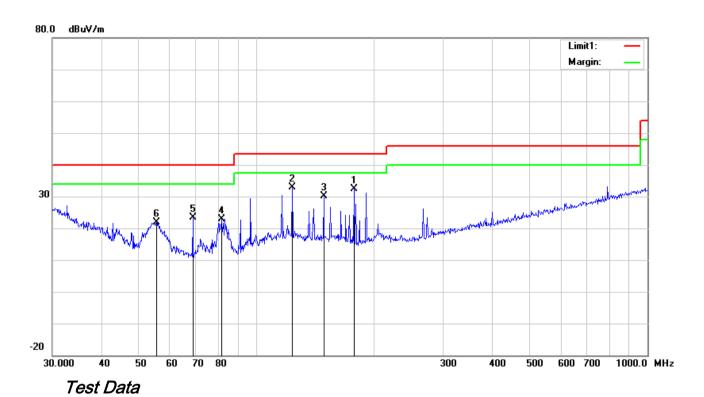

## Horizontal Polarity Plot @3m

N	P/	Frequency	Reading	Detect	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr
О.	L			or								ее
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	٧	177.5092	42.03	peak	11.20	22.25	1.36	32.34	43.50	-11.16	100	222
2	٧	123.2655	40.36	peak	13.69	22.37	1.17	32.85	43.50	-10.65	100	189
3	٧	148.4410	38.43	peak	12.60	22.35	1.33	30.01	43.50	-13.49	100	62
4	<	81.2117	36.69	peak	7.65	22.41	1.05	22.98	40.00	-17.02	200	37
5	V	68.6310	37.12	peak	7.73	22.38	0.95	23.42	40.00	-16.58	100	37
6	٧	55.4147	35.80	peak	7.80	22.40	0.78	21.98	40.00	-18.02	100	335



Test Report No.	18070198-FCC-R						
Page	30 of 37						

## Above 1GHz

|--|

#### Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	46.27	AV	V	33.39	7.22	48.46	38.42	54	-15.58
4804	43.27	AV	Н	33.39	7.22	48.46	35.42	54	-18.58
4804	65.06	PK	V	33.39	7.22	48.46	57.21	74	-16.79
4804	64.16	PK	Н	33.39	7.22	48.46	56.31	74	-17.69
7046	37.8	AV	V	37.68	7.69	48.84	34.33	54	-19.67
7046	37.64	AV	Н	37.68	7.69	48.84	34.17	54	-19.83
7046	56.93	PK	V	37.68	7.69	48.84	53.46	74	-20.54
7046	57.21	PK	Н	37.68	7.69	48.84	53.74	74	-20.26

#### Middle Channel (2440 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4880	49.64	AV	V	33.62	7.53	48.36	42.43	54	-11.57
4880	43.19	AV	Н	33.62	7.53	48.36	35.98	54	-18.02
4880	65.31	PK	V	33.62	7.53	48.36	58.1	74	-15.9
4880	64.5	PK	Н	33.62	7.53	48.36	57.29	74	-16.71
7774	39.43	AV	V	36.61	6.71	49.16	33.59	54	-20.41
7774	35.96	AV	Н	36.61	6.71	49.16	30.12	54	-23.88
7774	56.72	PK	V	36.61	6.71	49.16	50.88	74	-23.12
7774	58.95	PK	Н	36.61	6.71	49.16	53.11	74	-20.89



Test Report No.	18070198-FCC-R
Page	31 of 37

#### High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4960	45.34	AV	V	33.89	7.86	48.31	38.78	54	-15.22
4960	46.5	AV	Н	33.89	7.86	48.31	39.94	54	-14.06
4960	71.45	PK	V	33.89	7.86	48.31	64.89	74	-9.11
4960	69.7	PK	Н	33.89	7.86	48.31	63.14	74	-10.86
17803	23.34	AV	V	42.21	19.74	45.21	40.08	54	-13.92
17803	20.24	AV	Н	42.21	19.74	45.21	36.98	54	-17.02
17803	42.47	PK	V	42.21	19.74	45.21	59.21	74	-14.79
17803	42.18	PK	Н	42.21	19.74	45.21	58.92	74	-15.08

#### Note:

- 1, The testing has been conformed to 10\*2480MHz=24,800MHz
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.



Test Report No.	18070198-FCC-R
Page	32 of 37

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	~
Line Impedance	LI-125A	191106	09/23/2017	09/22/2018	~
Line Impedance	LI-125A	191107	09/23/2017	09/22/2018	~
ISN	ISN T800	34373	09/23/2017	09/22/2018	
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/15/2017	09/14/2018	~
Power Splitter	1#	1#	08/30/2017	08/29/2018	~
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	~
Positioning Controller	UC3000	MF780208282	11/17/2017	11/16/2018	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/22/2018	03/21/2019	<u>&lt;</u>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<u>&lt;</u>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/12/2017	10/11/2018	<u>\</u>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<b>&gt;</b>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	K
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	Y




Test Report No.	18070198-FCC-R
Page	33 of 37

## Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

#### Annex B.i. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

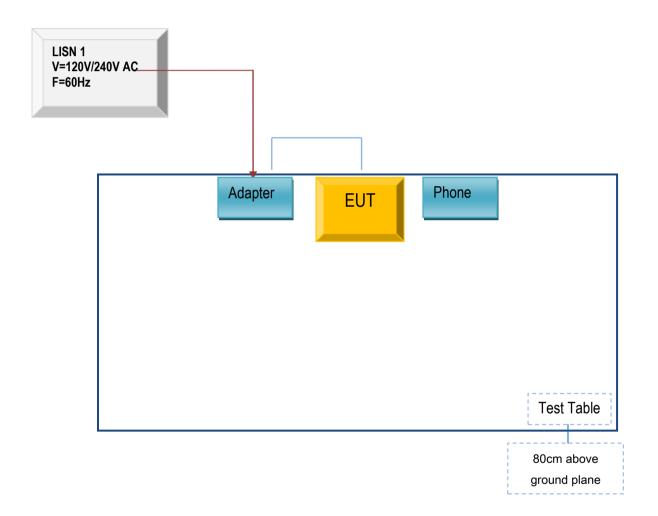



Test Report No.	18070198-FCC-R
Page	34 of 37


## Block Configuration Diagram for Radiated Emissions (Below 1GHz).

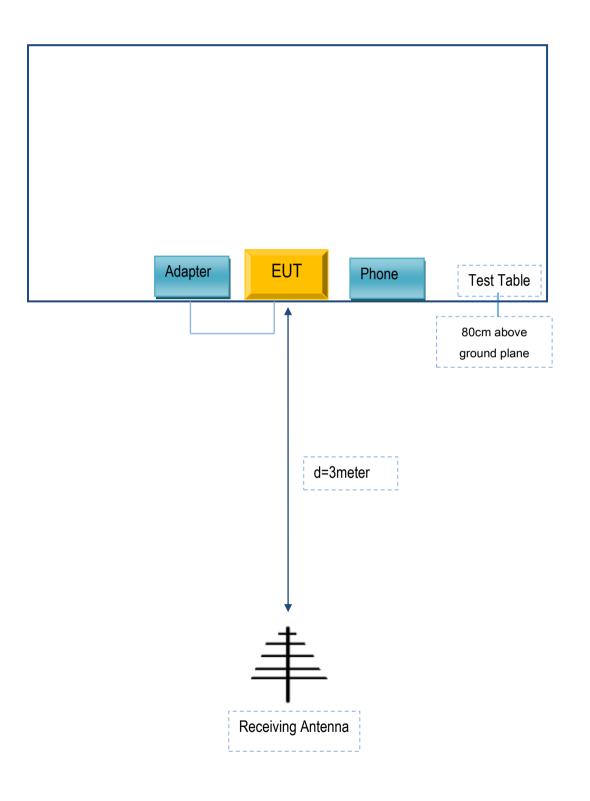



Test Report No.	18070198-FCC-R
Page	35 of 37

## Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

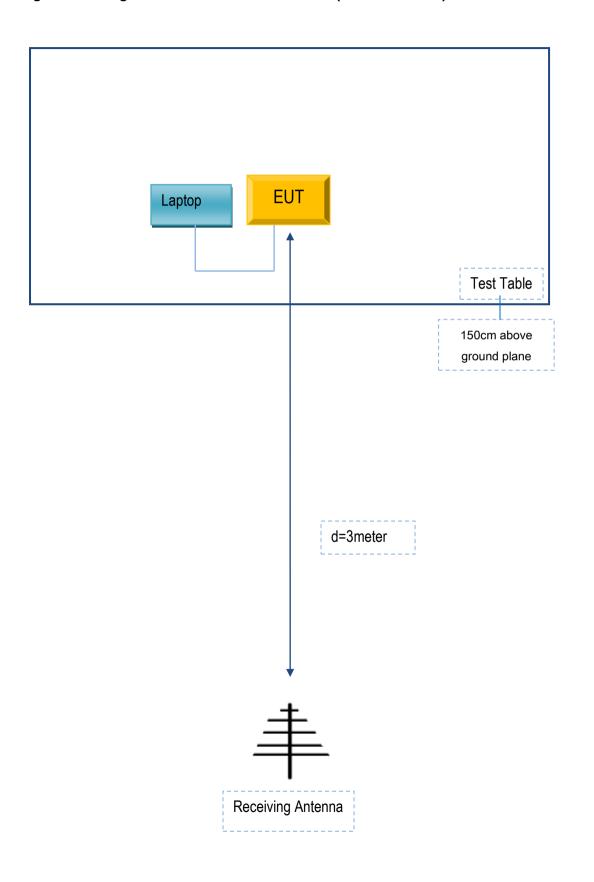



Test Report No.	18070198-FCC-R
Page	36 of 37

## Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

## Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
DCA	Adaptor	E2164A	N/A
Lenovo	Laptop	E40	N/A
Huawei	Phone	Honor 9	N/A

#### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A



Test Report No.	18070198-FCC-R
Page	37 of 37

# Annex C. User Manual / Block Diagram / Schematics / Partlist/ DECLARATION OF SIMILARITY

Please see the attachment