

TEST REPORT

ACCORDING TO: FCC 47 CFR part 15 section 15.255

FOR:

Siklu Communication Ltd.
Point-to-point wireless Ethernet link
operating in 57-64 GHz
Models: EH-600T-ODU-PoE
EH-600TX-ODU-PoE
EH-600TL-ODU-PoE
FCC ID:2ACYESK-60GTDD-B1

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

| | | |
|-----|--|-----|
| 1 | Applicant information..... | 3 |
| 2 | Equipment under test attributes | 3 |
| 3 | Manufacturer information | 3 |
| 4 | Test details | 3 |
| 5 | Tests summary..... | 4 |
| 6 | EUT description..... | 5 |
| 6.1 | General information..... | 5 |
| 6.2 | Ports and lines | 5 |
| 6.3 | Support and test equipment..... | 5 |
| 6.4 | Changes made in the EUT | 5 |
| 6.5 | Test configuration..... | 6 |
| 6.6 | Transmitter characteristics | 7 |
| 7 | Transmitter tests | 8 |
| 7.1 | Transmitter power test..... | 8 |
| 7.2 | Occupied bandwidth test | 18 |
| 7.3 | Spurious emissions at RF antenna connector test | 26 |
| 7.4 | Out of band radiated emissions below 40 GHz | 45 |
| 7.5 | Out of band radiated emissions above 40 GHz up to 220 GHz..... | 61 |
| 7.6 | Frequency stability test..... | 91 |
| 8 | APPENDIX A Test equipment and ancillaries used for tests..... | 93 |
| 8.1 | Test equipment and ancillaries used for tests | 94 |
| 9 | APPENDIX B Measurement uncertainties..... | 95 |
| 10 | APPENDIX C Test laboratory description | 96 |
| 11 | APPENDIX D Specification references | 96 |
| 12 | APPENDIX E Test equipment correction factors..... | 97 |
| 13 | APPENDIX F Abbreviations and acronyms..... | 106 |



1 Applicant information

Client name: Siklu Communication Ltd.
Address: 43 Hasivim street, Petach-Tikva 49517, Israel
Telephone: +972 3921 4015
Fax: +972 3921 4162
E-mail: baruch@siklu.com
Contact name: Mr. Baruch Schwarz

2 Equipment under test attributes

Product name: Point-to-point wireless Ethernet link operating at 57-64 GHz
Product type: Transceiver
Model(s): EH-600T-ODU-PoE
Serial number: S538000151
Hardware version: D0
Software release: 6.6
Receipt date 8/19/2015

3 Manufacturer information

Manufacturer name: Siklu Communication Ltd.
Address: 43 Hasivim street, Petach-Tikva 49517, Israel
Telephone: +972 3921 4015
Fax: +972 3921 4162
E-Mail: baruch@siklu.com
Contact name: Mr. Baruch Schwarz

4 Test details

Project ID: 25826
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 8/19/2015
Test completed: 8/30/2015
Test specification(s): FCC 47 CFR part 15 section 15.255:2014



5 Tests summary

| Test | Status |
|---|---|
| FCC Section 15.255(b)(ii), Transmitter power and power spectral density | Pass |
| FCC Section 15.215(c), Occupied bandwidth | Pass |
| FCC Section 15.255(c), Conducted spurious emissions | Pass |
| FCC Section 15.255(c)(2), Radiated spurious emissions below 40 GHz | Pass |
| FCC Section 15.255(c)(3), Radiated emissions outside assigned band and above 40 GHz up to 220 GHz | Pass |
| FCC Section 15.255(f), Frequency tolerance | Tested without limit |
| FCC Section 15.255(g), RF exposure | Pass, exhibit included in Application for certification |

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:SIKRAD_FCC_IC.27344.

| | Name and Title | Date | Signature |
|--------------|---|--------------------------------------|-----------|
| Tested by: | Mrs. E. Pitt, test engineer Mr. S. Shkolnik, test engineer | August 30, 2015 February 28, 2016 | |
| Reviewed by: | Mrs. M. Cherniavsky, certification engineer | February 29, 2016 | |
| Approved by: | Mr. M. Nikishin, EMC and Radio group manager | February 29, 2016 | |



6 EUT description

6.1 General information

The EUT is an outdoor unit of point-to-point high BW system, the first TDD member of Siklu's EtherHaul family of wireless products, featuring carrier grade, high capacity Ethernet with flexible support of the 57-64 GHz regulated V-Band. The EUT radio supports up to 1 Gbps.

Siklu's EtherHaul EH-600T Rev D0 wireless backhaul radio link operates in the new E-band spectrum, which has clear technological and economical advantages over the existing lower frequency bands.

The EtherHaul EH-600T Rev D0 system comprises:

- the EtherHaul EH-600T-ODU-POE outdoor unit (radio link unit and antenna);
- the EtherHaul system host software and command line interface for complete and flexible system configuration, administration and management.

During the testing the EUT system was powered by 48 VDC.

6.2 Ports and lines

| Port type | Port description | Connected from | Connected to | Qty. | Cable type | Cable length, m |
|-----------|------------------|----------------|--------------|------|------------|-----------------|
| Telecom | Ethernet-POE | EUT ETH1 | POE/POH | 1 | Shielded | 2 |
| Telecom | Ethernet-PSE | EUT ETH2 | Open circuit | 1 | Shielded | 2 |
| Telecom | Ethernet-PSE | EUT ETH3 | Open circuit | 1 | Shielded | 2 |

6.3 Support and test equipment

| Description | Manufacturer | Model number | Serial number |
|-------------|--------------|--------------|---------------|
| Laptop | Lenovo | ThinkPad T61 | L3-E0080 |
| POE/POH | Microsemi | PD-9601G/AC | NA |


6.4 Changes made in the EUT

No changes were performed in the EUT during testing.



6.5 Test configuration

6.5.1 EUT test configuration

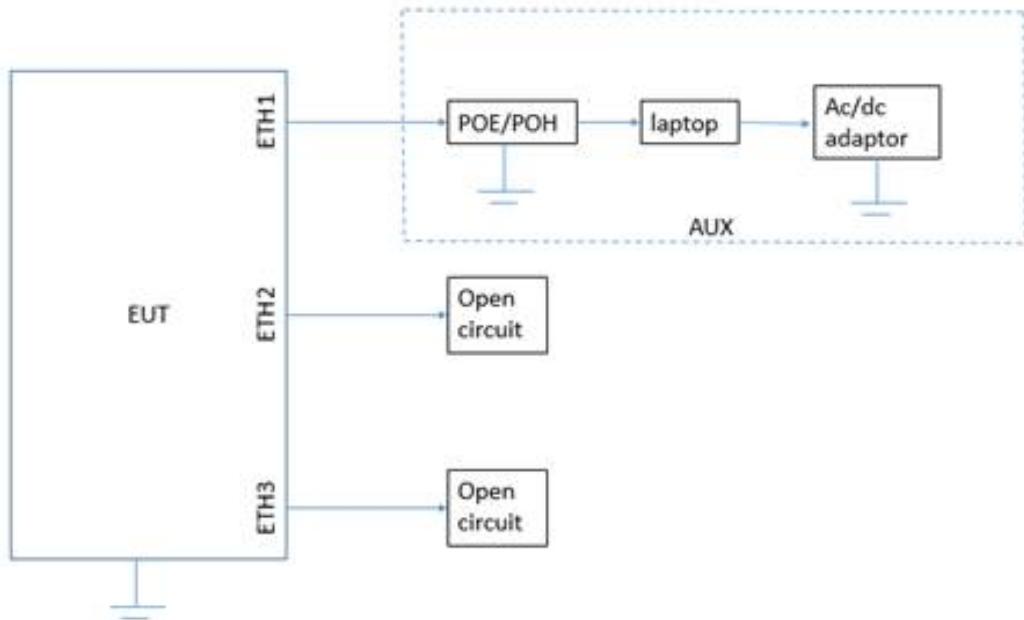



6.6 Transmitter characteristics

| Type of equipment | | | | |
|--|--|--------------------------------|--------------------------------|--|
| V | Stand-alone (Equipment with or without its own control provisions) | | | |
| | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) | | | |
| | Plug-in card (Equipment intended for a variety of host systems) | | | |
| Intended use | Condition of use | | | |
| V fixed | Always at a distance more than 2 m from all people | | | |
| mobile | Always at a distance more than 20 cm from all people | | | |
| portable | May operate at a distance closer than 20 cm to human body | | | |
| Assigned frequency range | 57.0 GHz – 64.0 GHz | | | |
| Operating frequencies (tested) | 57375, 60375, 63375 MHz for all BW | | | |
| Maximum rated output power | At transmitter 50 Ω RF output connector | | | |
| Is transmitter output power variable? | V | No | | |
| | Yes | continuous variable | | |
| | | stepped variable with stepsize | dB | |
| | | minimum RF power | dBm | |
| maximum RF power | | | | |
| Antenna connection | | | | |
| unique coupling | V | standard connector | Integral | |
| | | | with temporary RF connector | |
| | | | without temporary RF connector | |
| Antenna/s technical characteristics | | | | |
| Type | Manufacturer | Model number | Gain | |
| Integrated (cassegrain reflector) | Siklu Ltd. | GENT006 | 37 dBi | |
| Transmitter 99% power bandwidth, MHz | Transmitter aggregate data rate/s, Mbps | | Type of modulation | |
| 250 | 80 | | QPSK | |
| 500 | 160 | | QPSK | |
| 500 | 852 | | 16QAM | |
| 500 | 1280 | | 64QAM | |
| Type of multiplexing | TDD | | | |
| Transmitter power source | | | | |
| | Nominal rated voltage | | Battery type | |
| V DC | Nominal rated voltage | 48 V | | |
| | Voltage range | POE 42-57 V | | |
| AC mains | Nominal rated voltage | | Frequency | |
| Common power source for transmitter and receiver | | V yes | no | |



HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

7 Transmitter tests

7.1 Transmitter power test

7.1.1 General

This test was performed to measure the peak output power at RF antenna connector. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Conducted output power limits

| Assigned frequency range, MHz | Maximum output power | | | |
|----------------------------------|----------------------|------|------------|---------|
| | Peak output power | | EIRP, dBm* | |
| | mW | dBm | Peak | Average |
| 57000 – 64000 | 500 | 27.0 | 57 | 54 |

*EIRP limit was calculated as follows:

Average power: 82 dBm – 2 dB x (51-37) = 54 dBm

Peak power: 85 dBm – 2 dB x (51-37) = 57 dBm.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was adjusted to produce maximum available for end user RF output power.
- 7.1.2.3 The average and peak voltage was measured at the low, mid and high frequencies with oscilloscope and provided in the associated plots.
- 7.1.2.4 The step 7.1.2.3 was repeated for all modulations and emissions bandwidth.
- 7.1.2.5 The unmodulated signal was applied to Zero-Biased Detector via variable attenuator as shown in Figure 7.1.2.
- 7.1.2.6 The variable attenuator was adjusted such that the oscilloscope indicated a voltage equal to the peak voltage recorded in the step 7.1.2.3.
- 7.1.2.7 The variable attenuator was disconnected from the Zero-Biased Detector.
- 7.1.2.8 Without changing any settings, the variable attenuator was connected to a power meter as shown in Figure 7.1.3.
- 7.1.2.9 The power was measured and result was recorded in Table 7.1.2 and Table 7.1.3.
- 7.1.2.10 The steps 7.1.2.5 through 7.1.2.10 were repeated for the average voltage recorded in the step 7.1.2.3 and 7.1.2.4.



HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Figure 7.1.1 Peak output power test setup

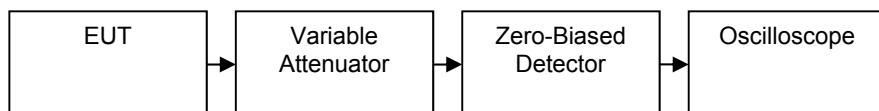


Figure 7.1.2 Peak output power test setup


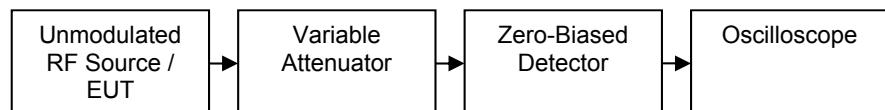


Figure 7.1.3 Peak output power test setup



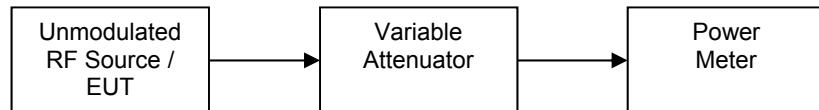

HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.1.2 Peak output power test results

OPERATING FREQUENCY RANGE:

57.0 – 64.0 GHz

DETECTOR USED:

Peak

VIDEO BANDWIDTH:

>10 MHz

TRANSMITTER OUTPUT POWER SETTINGS:

Maximum

| Frequency, MHz | Modulation | Bit rate, Mbps | Duty Cycle, % | Peak output power, dBm | EIRP, dBm* | Limit, dBm | Margin, dB** | Verdict |
|-----------------------------------|------------|----------------|---------------|------------------------|------------|------------|--------------|---------|
| Emission Bandwidth 250 MHz | | | | | | | | |
| 57375 | QPSK | 80 | 100 | 10.49 | 47.49 | 57 | -9.51 | Pass |
| 60375 | QPSK | 80 | 100 | 10.23 | 47.23 | 57 | -9.77 | Pass |
| 63375 | QPSK | 80 | 100 | 9.80 | 46.80 | 57 | -10.20 | Pass |
| Emission Bandwidth 500 MHz | | | | | | | | |
| 57375 | QPSK | 160 | 100 | 10.37 | 47.37 | 57 | -9.63 | Pass |
| | 16QAM | 852 | 100 | 10.27 | 47.27 | 57 | -9.73 | Pass |
| | 64QAM | 1280 | 100 | 10.15 | 47.15 | 57 | -9.85 | Pass |
| 60375 | QPSK | 160 | 100 | 9.85 | 46.85 | 57 | -10.15 | Pass |
| | 16QAM | 852 | 100 | 9.91 | 46.91 | 57 | -10.09 | Pass |
| | 64QAM | 1280 | 100 | 9.75 | 46.75 | 57 | -10.25 | Pass |
| 63375 | QPSK | 160 | 100 | 10.12 | 47.12 | 57 | -9.88 | Pass |
| | 16QAM | 852 | 100 | 9.98 | 46.98 | 57 | -10.02 | Pass |
| | 64QAM | 1280 | 100 | 9.77 | 46.77 | 57 | -10.23 | Pass |

* - EIRP, dBm = Power output power, dBm + Antenna Gain(dBi), where Antenna Gain = 37.0 dBi

** - Margin, dB = EIRP, dBm – Limit, dBm



HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.1.3 Average output power test results

OPERATING FREQUENCY RANGE:

57.0 – 64.0 GHz

DETECTOR USED:

Average

VIDEO BANDWIDTH:

>10 MHz

TRANSMITTER OUTPUT POWER SETTINGS:

Maximum

| Frequency, MHz | Modulation | Bit rate, Mbps | Duty Cycle, % | Average output power, dBm | EIRP, dBm * | Limit, dBm | Margin, dB** | Verdict |
|-----------------------------------|------------|----------------|---------------|---------------------------|-------------|------------|--------------|---------|
| Emission Bandwidth 250 MHz | | | | | | | | |
| 57375 | QPSK | 80 | 100 | 4.78 | 41.78 | 54 | -12.22 | Pass |
| 60375 | QPSK | 80 | 100 | 5.11 | 42.11 | 54 | -11.89 | Pass |
| 63375 | QPSK | 80 | 100 | 4.55 | 41.55 | 54 | -12.45 | Pass |
| Emission Bandwidth 500 MHz | | | | | | | | |
| 57375 | QPSK | 160 | 100 | 5.33 | 42.33 | 54 | -11.67 | Pass |
| | 16QAM | 852 | 100 | 4.47 | 41.47 | 54 | -12.53 | Pass |
| | 64QAM | 1280 | 100 | 4.84 | 41.84 | 54 | -12.16 | Pass |
| 60375 | QPSK | 160 | 100 | 4.88 | 41.88 | 54 | -12.12 | Pass |
| | 16QAM | 852 | 100 | 4.91 | 41.91 | 54 | -12.09 | Pass |
| | 64QAM | 1280 | 100 | 5.05 | 42.05 | 54 | -11.95 | Pass |
| 63375 | QPSK | 160 | 100 | 5.18 | 42.18 | 54 | -11.82 | Pass |
| | 16QAM | 852 | 100 | 5.21 | 42.21 | 54 | -11.79 | Pass |
| | 64QAM | 1280 | 100 | 4.66 | 41.66 | 54 | -12.34 | Pass |

* - EIRP, dBm = Average output power, dBm + Antenna Gain(dBi), where Antenna Gain = 37.0 dBi

** - Margin, dB = EIRP, dBm – Limit, dBm

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 1299 | HL 1300 | HL 1301 | HL 3290 | HL 3291 | HL 3295 | HL 3333 | HL 4273 |
|---------|---------|---------|---------|---------|---------|---------|---------|


Full description is given in Appendix A.




HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.1 Output power test result at the low frequency

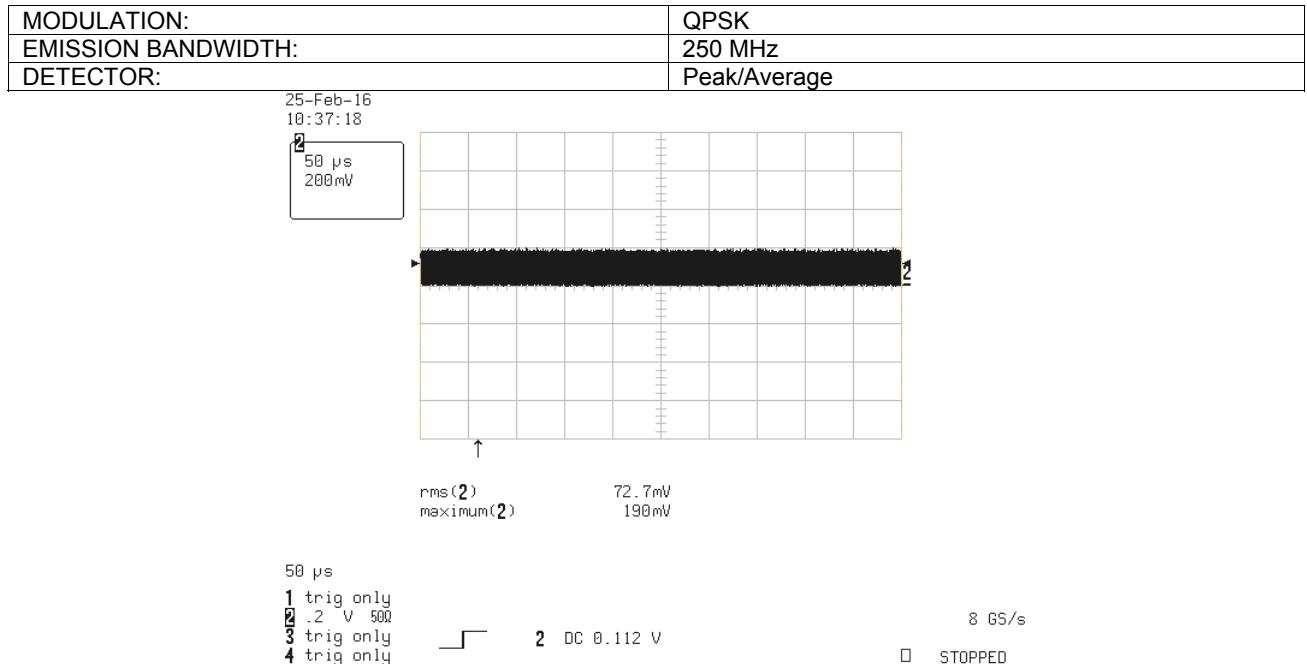

Plot 7.1.2 Output power test result at the mid frequency

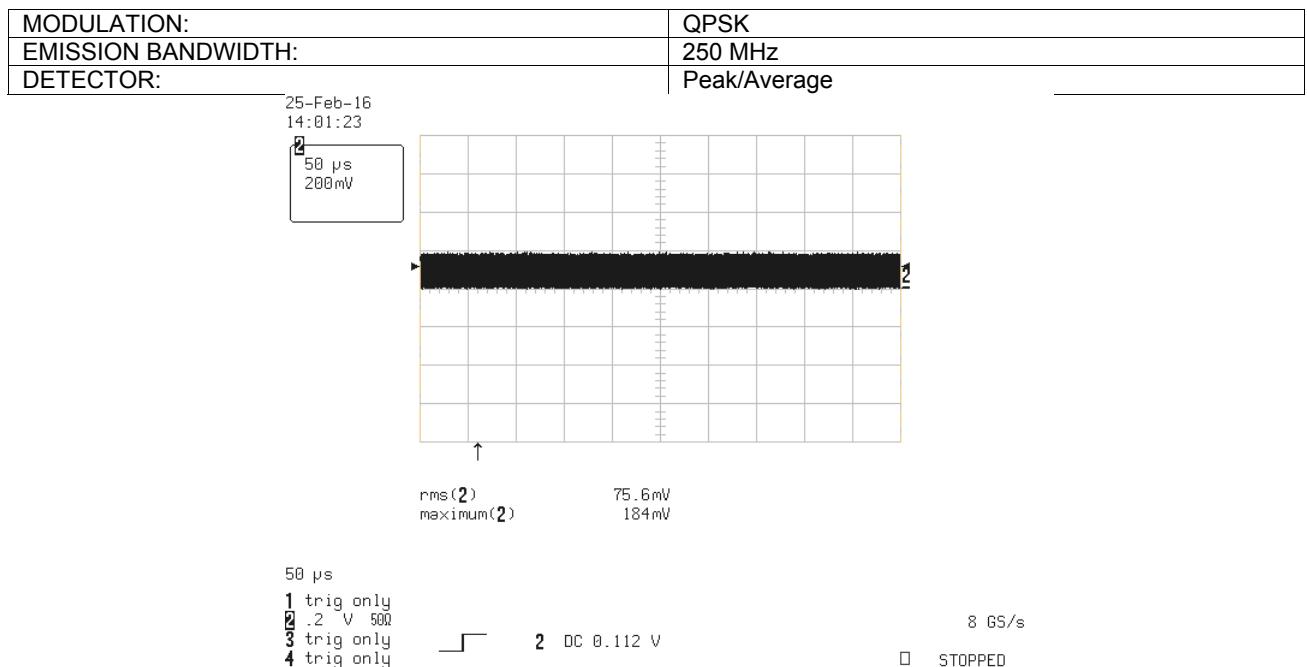





HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.3 Output power test result at the high frequency

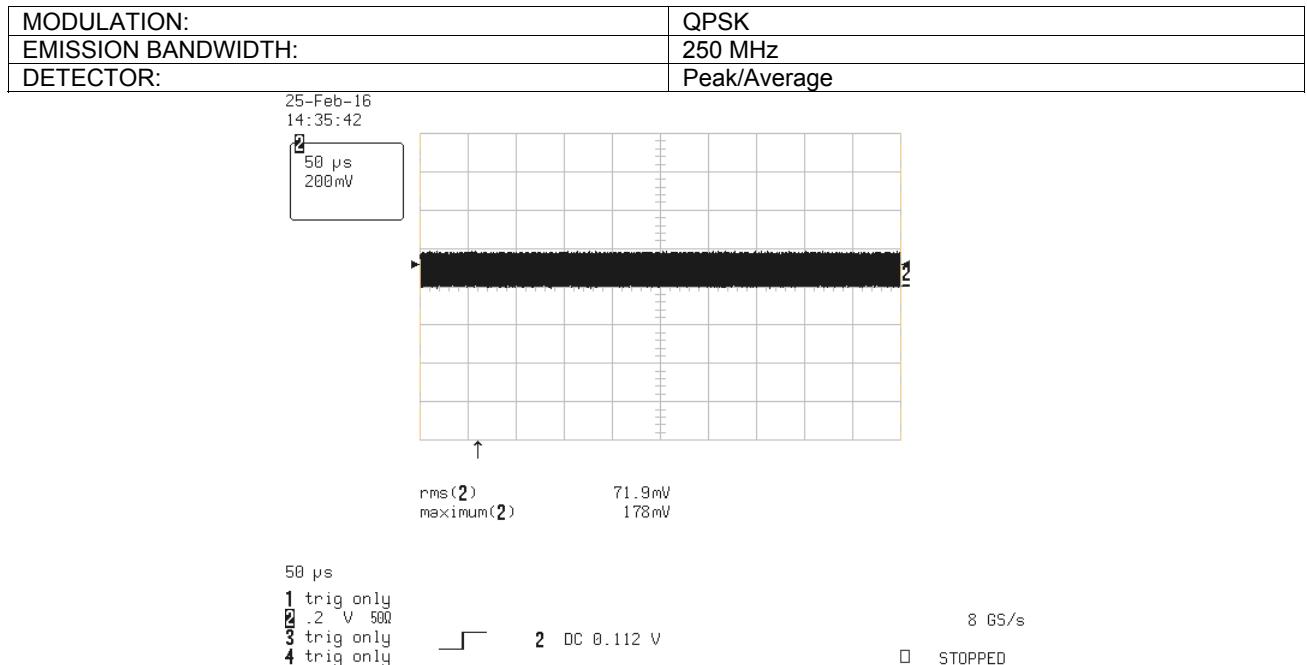

Plot 7.1.4 Output power test result at the low frequency

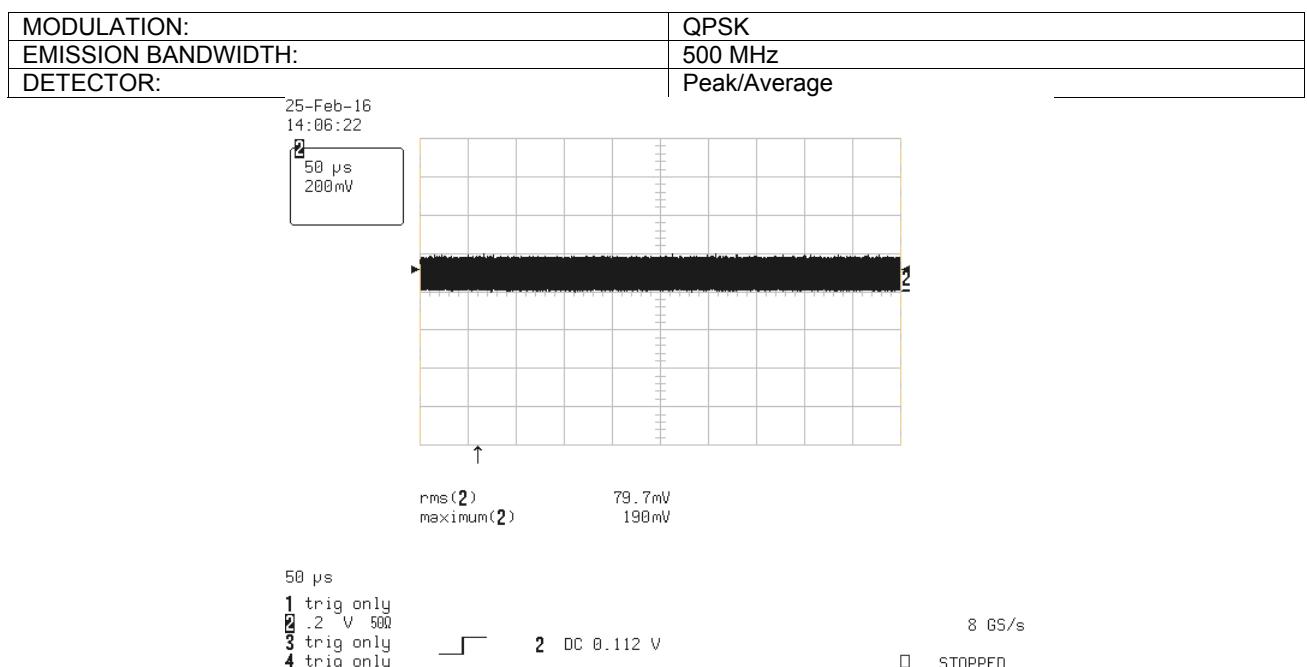





HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.5 Output power test result at the mid frequency

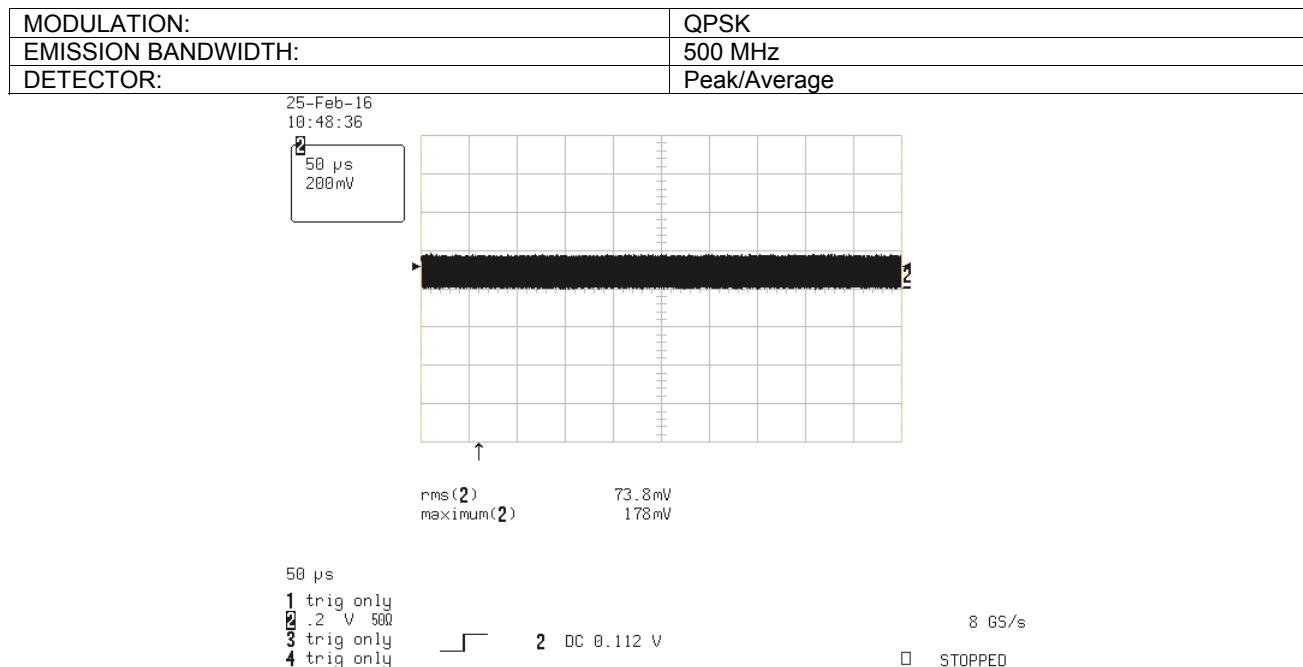

Plot 7.1.6 Output power test result at the high frequency

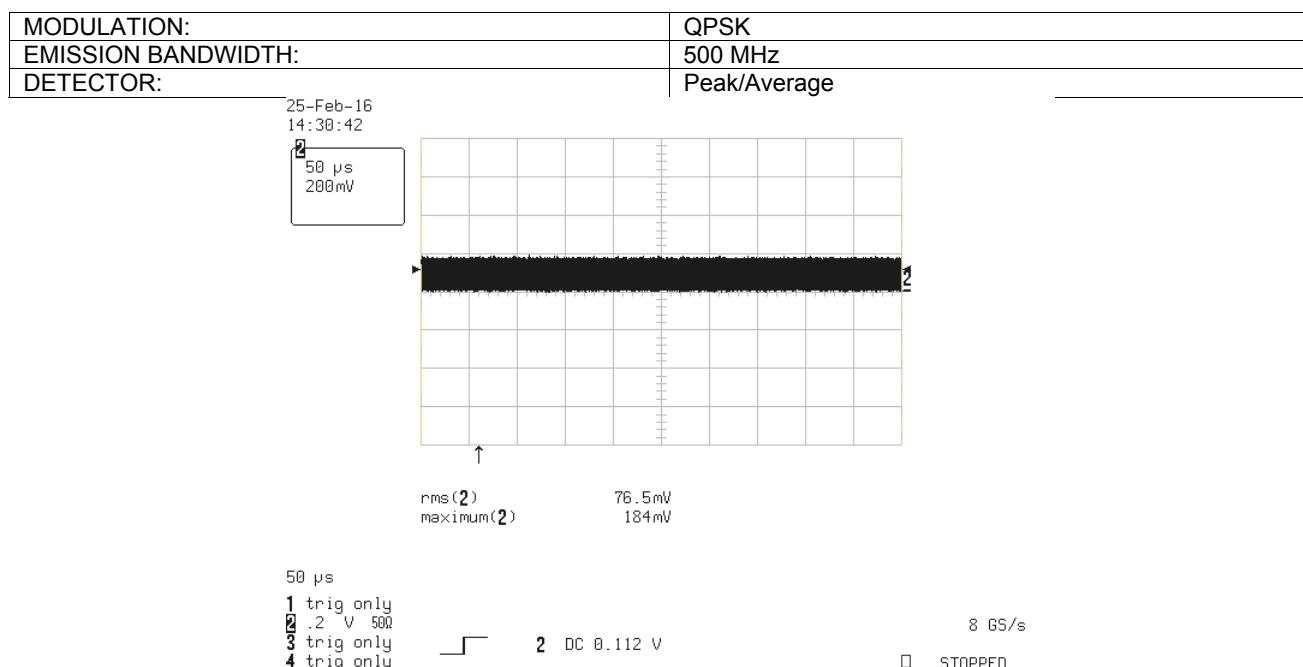




HERMON LABORATORIES

Report ID: SIKRAD_FCC.27344_rev1.docx


Date of Issue: 29-Feb-16

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.7 Output power test result at the low frequency

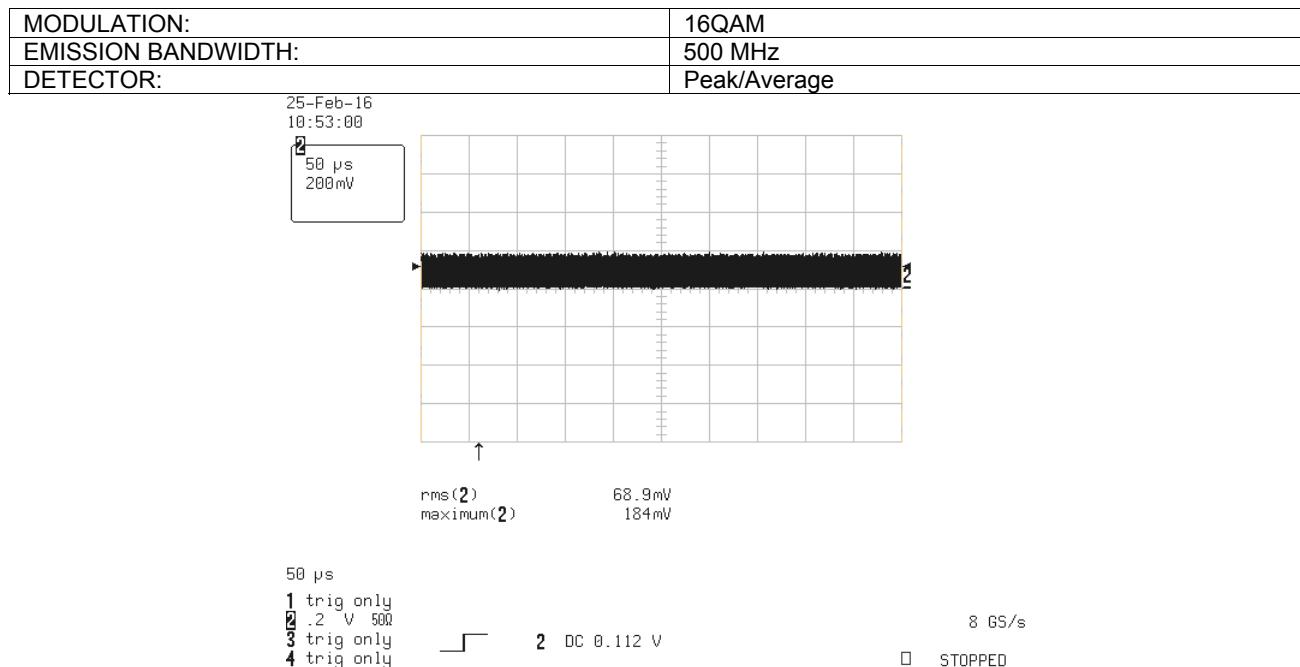

Plot 7.1.8 Output power test result at the mid frequency

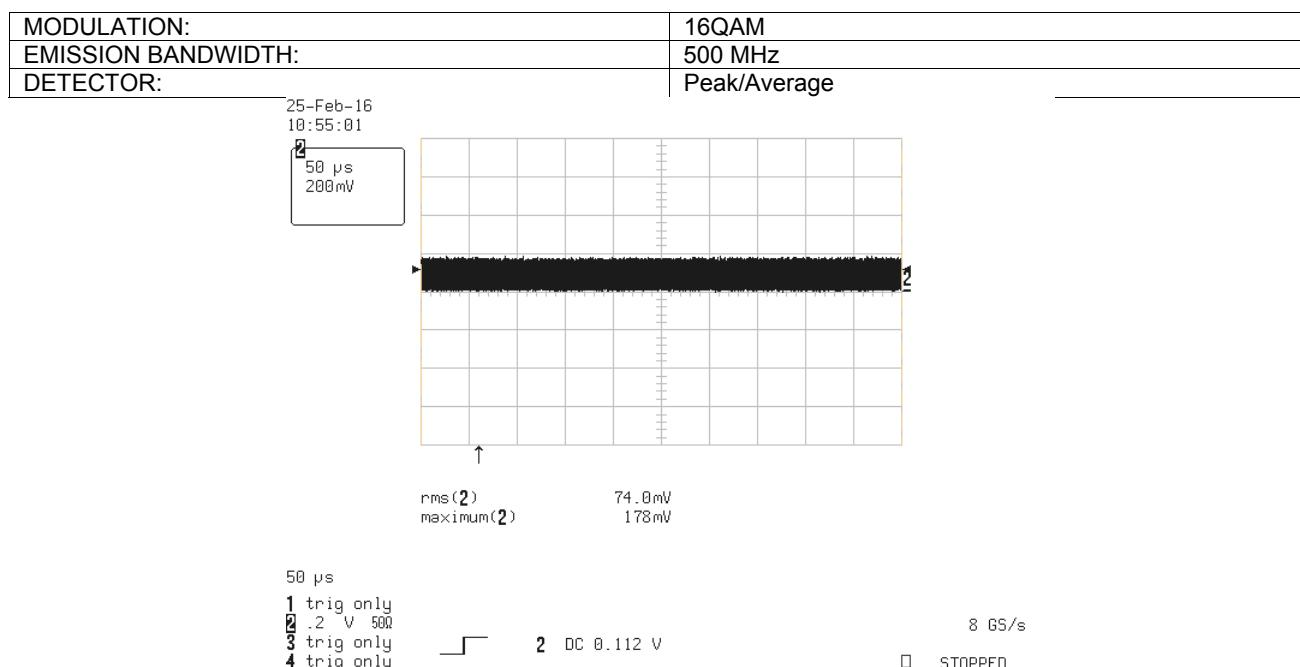




HERMON LABORATORIES

Report ID: SIKRAD_FCC.27344_rev1.docx


Date of Issue: 29-Feb-16

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.9 Output power test result at the high frequency

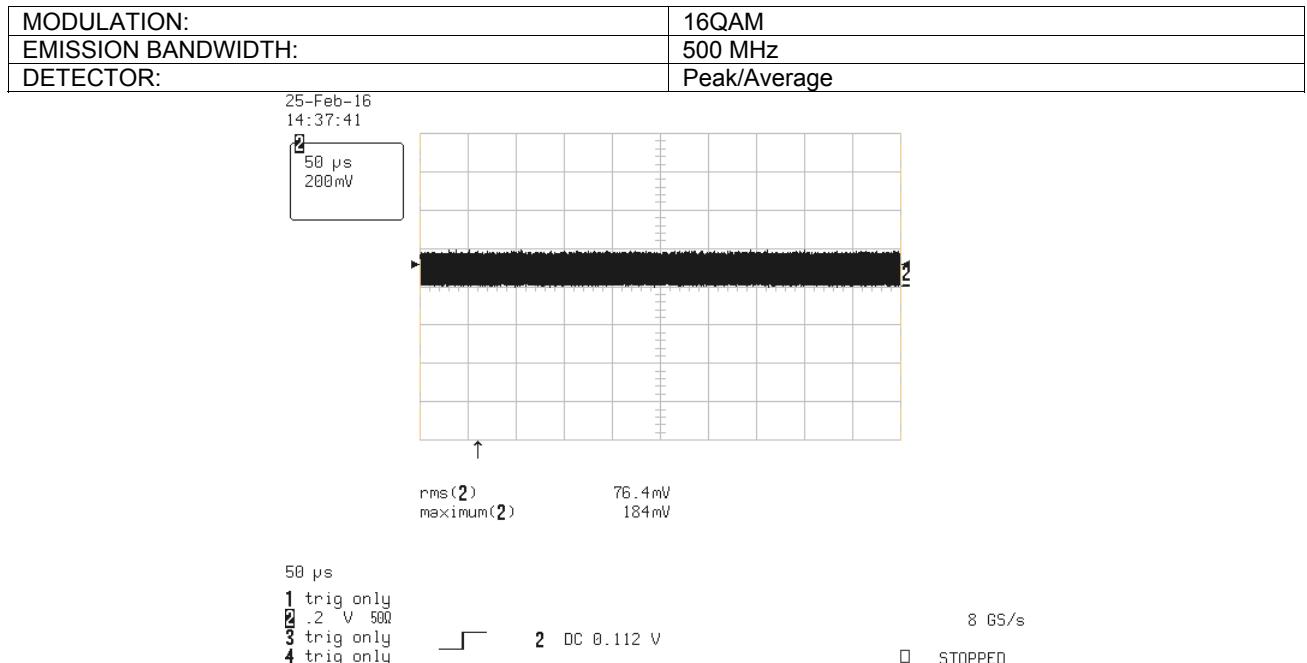

Plot 7.1.10 Output power test result at the low frequency

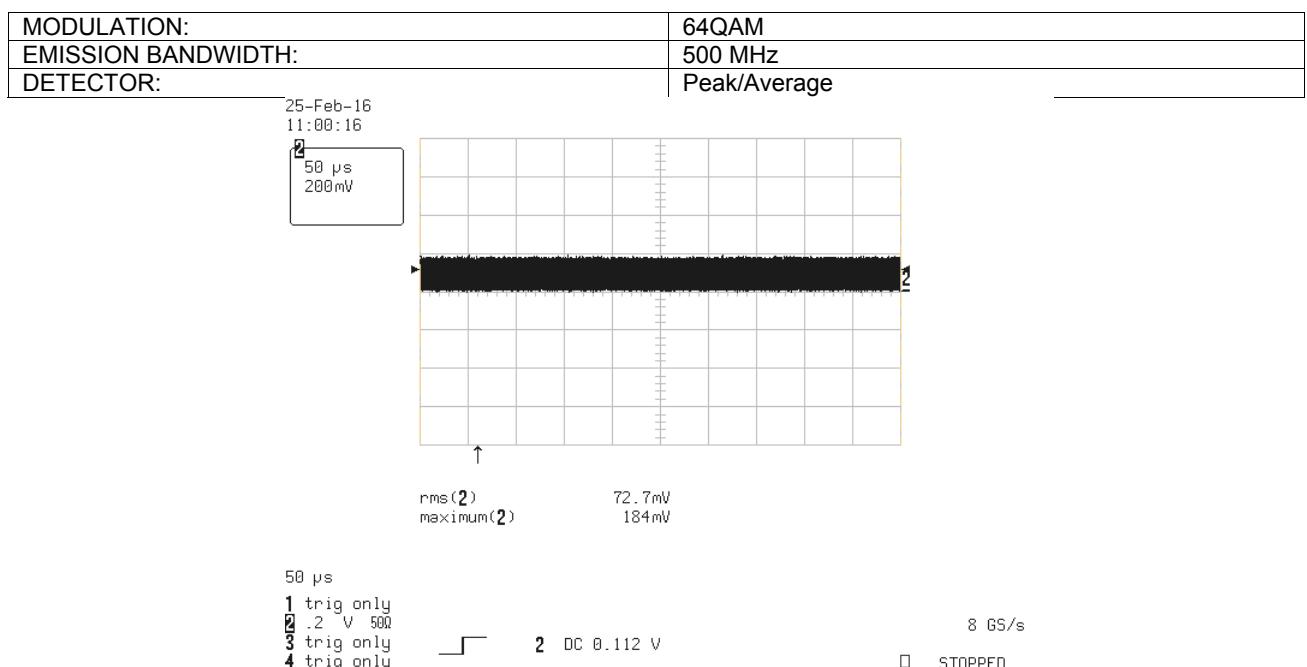





HERMON LABORATORIES

| | | | |
|-----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(b)(ii), Transmitter power and power spectral density | | |
| Test procedure: | 47 CFR, Section 2.1046; Section 15.255(b); ANSI C63.10, Section 9.11 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 24.3 °C | Air Pressure: 1007 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.1.11 Output power test result at the mid frequency

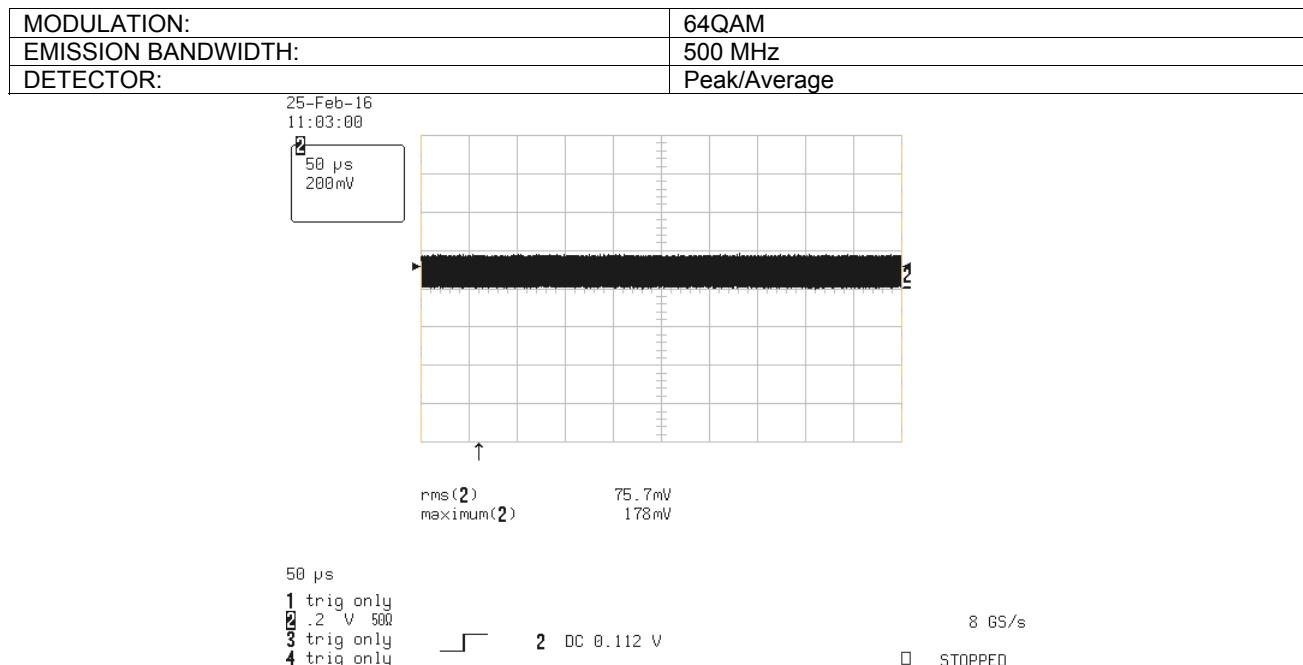

Plot 7.1.12 Output power test result at the high frequency

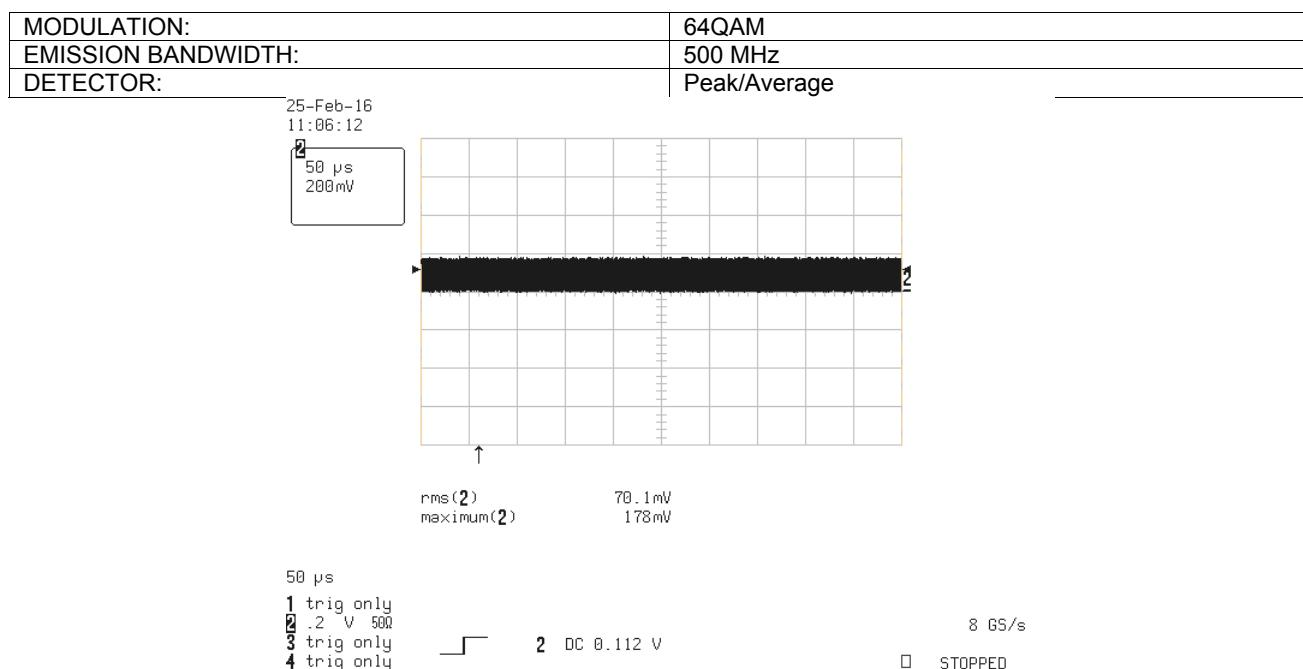



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

7.2 Occupied bandwidth test

7.2.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits


| Assigned frequency range, MHz | Modulation envelope reference points | Max bandwidth, MHz |
|-------------------------------|--------------------------------------|--------------------|
| 57000 - 64000 | 20 dBc | 250 / 500 |
| 57000 - 64000 | 99% | 250 / 500 |

NOTE: Modulation envelope reference points provided in terms of attenuation below unmodulated carrier.

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.
- 7.2.2.2 The EUT was set to transmit modulated carrier as provided in Table 7.2.2.
- 7.2.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope. The test results are provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Occupied bandwidth test setup





HERMON LABORATORIES

| Test specification: | | Section 15.215(c), Occupied bandwidth | | |
|----------------------------|------------|--|-------------------------------|-----------------------------|
| Test procedure: | | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | | | Verdict: PASS |
| Date: | 8/19/2015 | | | |
| Temperature: 23 °C | | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | | |

Table 7.2.2 Occupied bandwidth test results

OPERATING FREQUENCY RANGE: 57000 –64000 MHz

DETECTOR USED: Peak

RESOLUTION BANDWIDTH: 1% OBW

| Frequency, MHz | Modulation | Occupied bandwidth 99%, MHz | Occupied bandwidth 20 dBc MHz | Verdict |
|----------------------|------------|-----------------------------|-------------------------------|---------|
| EBW = 250 MHz | | | | |
| 57375 | QPSK | 238.64 | 244.80 | Pass |
| 60375 | | 239.07 | 244.00 | Pass |
| 63375 | | 236.80 | 243.70 | Pass |
| EBW = 500 MHz | | | | |
| 57375 | QPSK | 465.87 | 480.40 | Pass |
| 60375 | | 469.07 | 480.70 | Pass |
| 63375 | | 465.27 | 480.20 | Pass |
| 57375 | 16QAM | 465.24 | 477.70 | Pass |
| 60375 | | 467.94 | 478.20 | Pass |
| 63375 | | 464.44 | 477.00 | Pass |
| 57375 | 64QAM | 467.11 | 483.50 | Pass |
| 60375 | | 470.35 | 483.00 | Pass |
| 63375 | | 466.31 | 482.60 | Pass |

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 1303 | HL 2358 | HL 2909 | HL 3291 | HL 3295 | HL 3305 | HL 3433 | HL 3434 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Full description is given in Appendix A.




HERMON LABORATORIES


| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.2.1 Occupied bandwidth at low frequency

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 250 MHz |

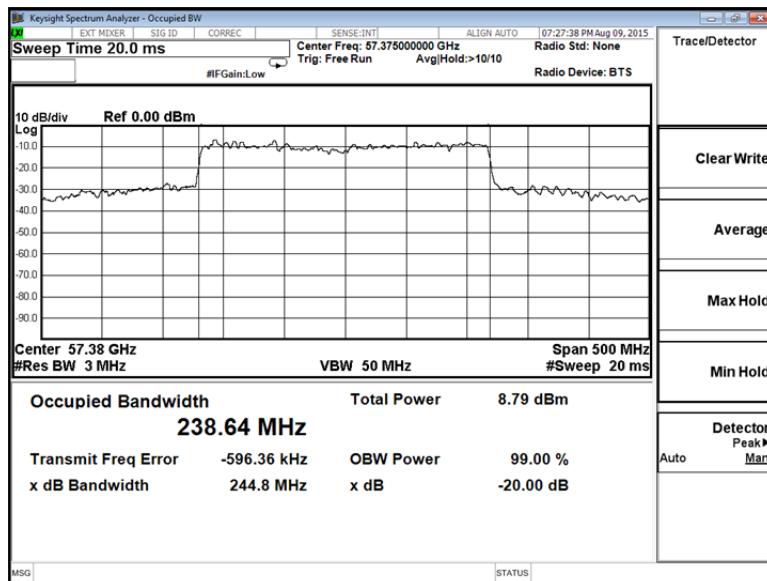**Plot 7.2.2 Occupied bandwidth at the mid frequency**

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 250 MHz |

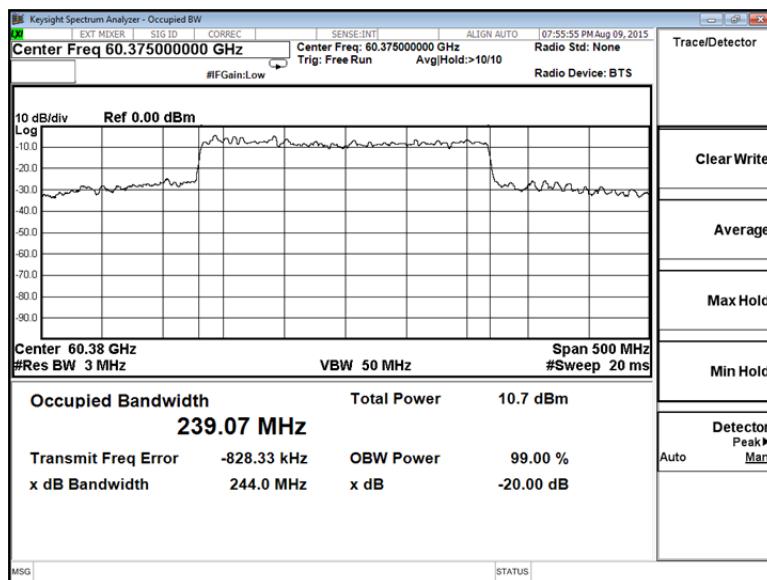




HERMON LABORATORIES

| Test specification: | Section 15.215(c), Occupied bandwidth | | |
|---------------------|--|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.2.3 Occupied bandwidth at the high frequency

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 250 MHz |

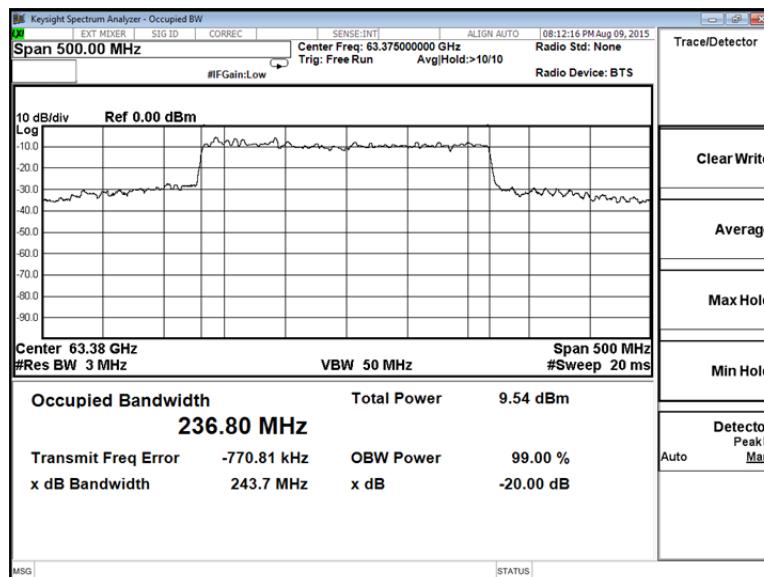

Plot 7.2.4 Occupied bandwidth at the low frequency

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 500 MHz |

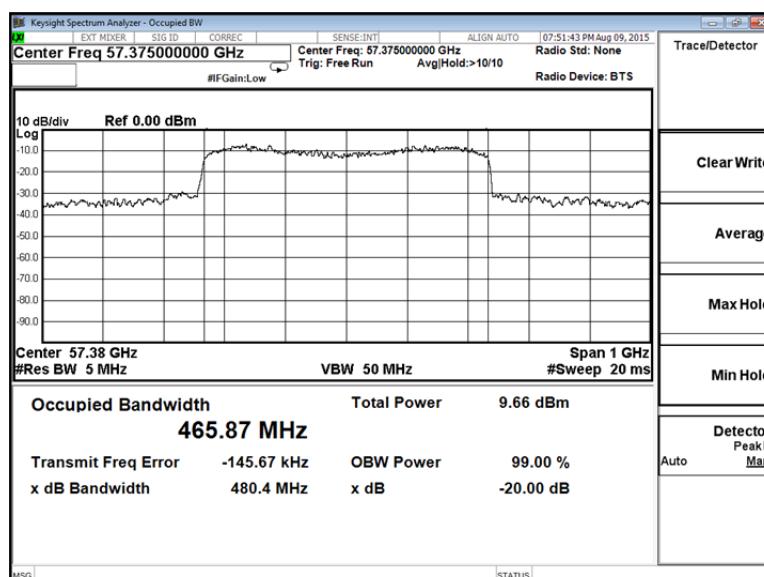




HERMON LABORATORIES


| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.2.5 Occupied bandwidth at the mid frequency

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 500 MHz |

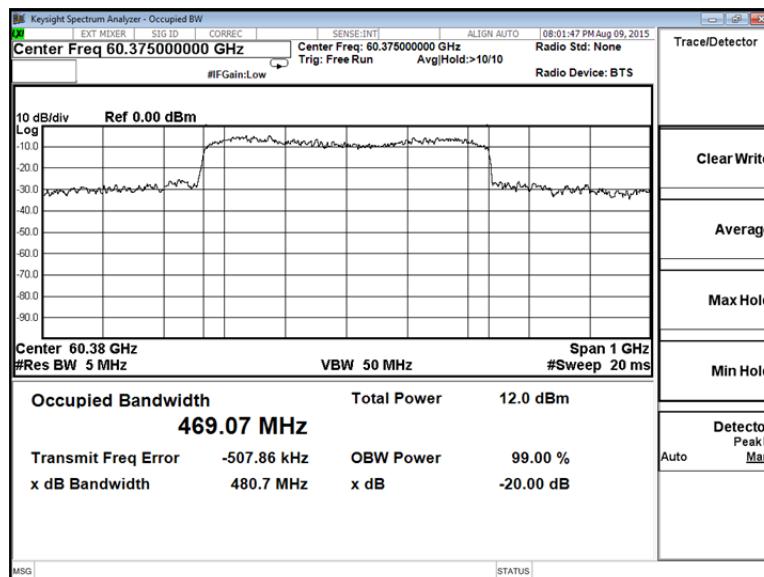**Plot 7.2.6 Occupied bandwidth at the high frequency**

| | |
|---------------------|---------|
| MODULATION: | QPSK |
| EMISSION BANDWIDTH: | 500 MHz |

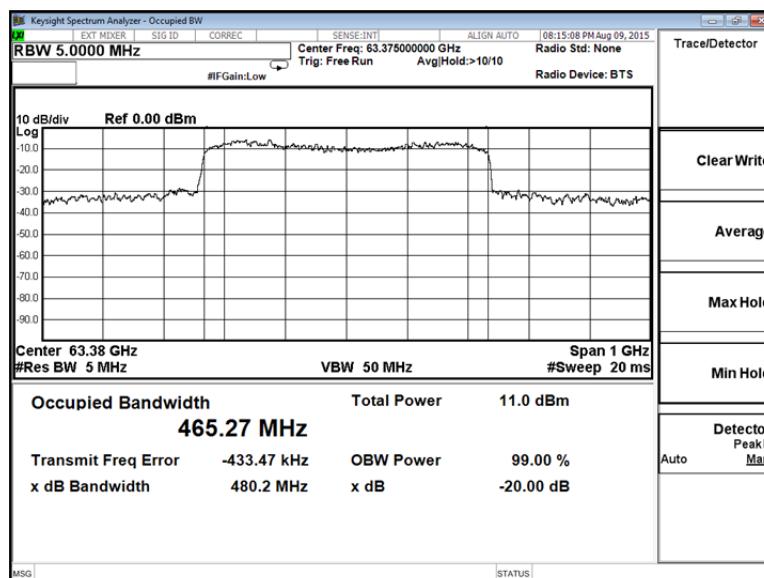




HERMON LABORATORIES


| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.2.7 Occupied bandwidth at the low frequency

| | |
|---------------------|---------|
| MODULATION: | 16QAM |
| EMISSION BANDWIDTH: | 500 MHz |

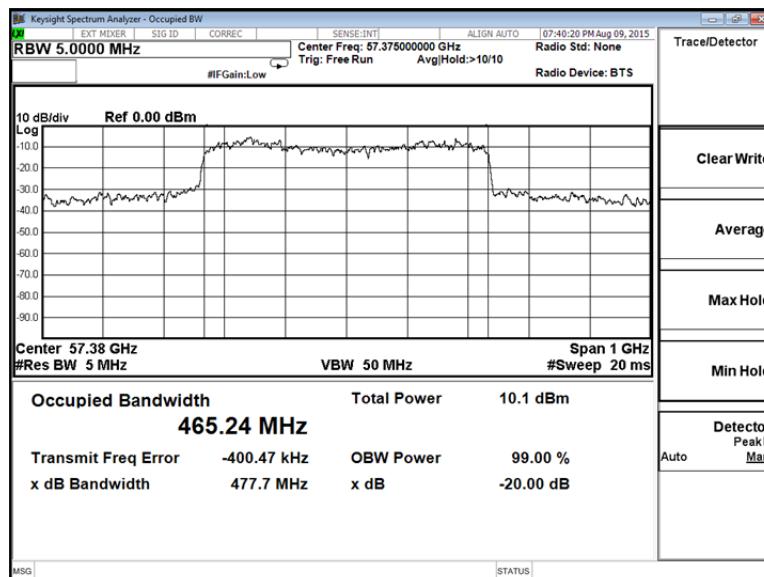**Plot 7.2.8 Occupied bandwidth at the mid frequency**

| | |
|---------------------|---------|
| MODULATION: | 16QAM |
| EMISSION BANDWIDTH: | 500 MHz |

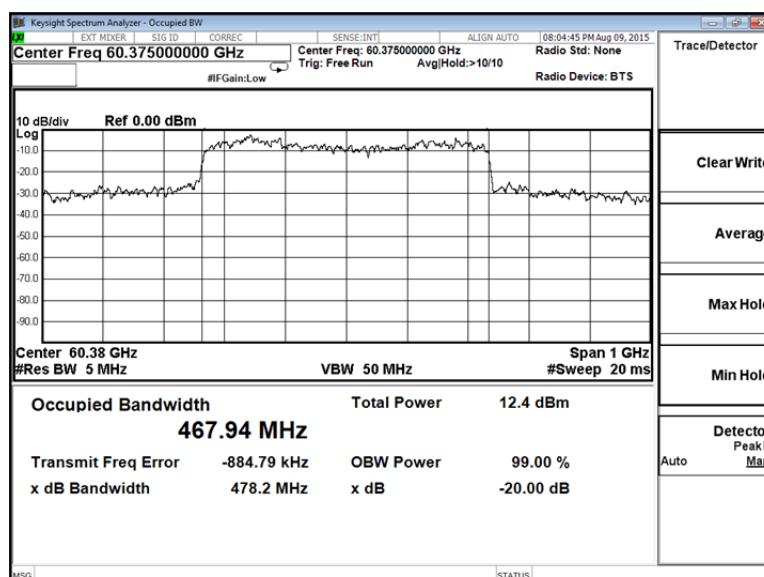




HERMON LABORATORIES


| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.2.9 Occupied bandwidth at the high frequency

| | |
|---------------------|---------|
| MODULATION: | 16QAM |
| EMISSION BANDWIDTH: | 500 MHz |

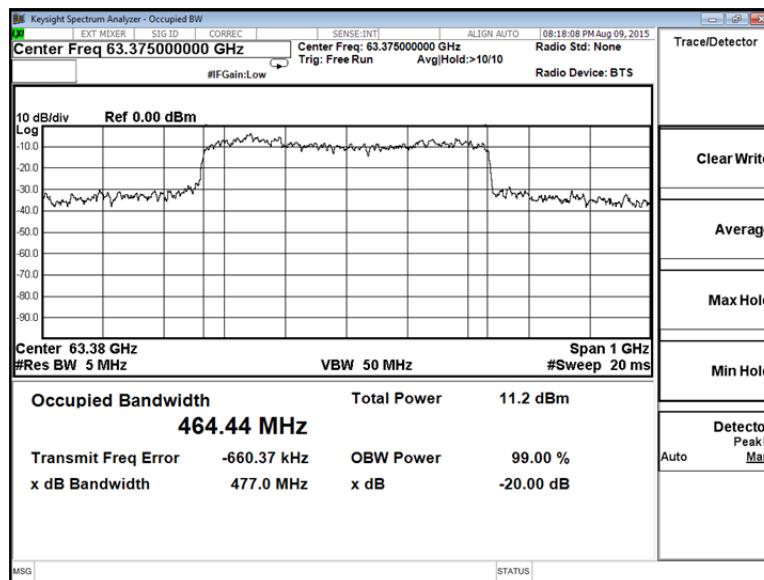**Plot 7.2.10 Occupied bandwidth at the low frequency**

| | |
|---------------------|---------|
| MODULATION: | 64QAM |
| EMISSION BANDWIDTH: | 500 MHz |

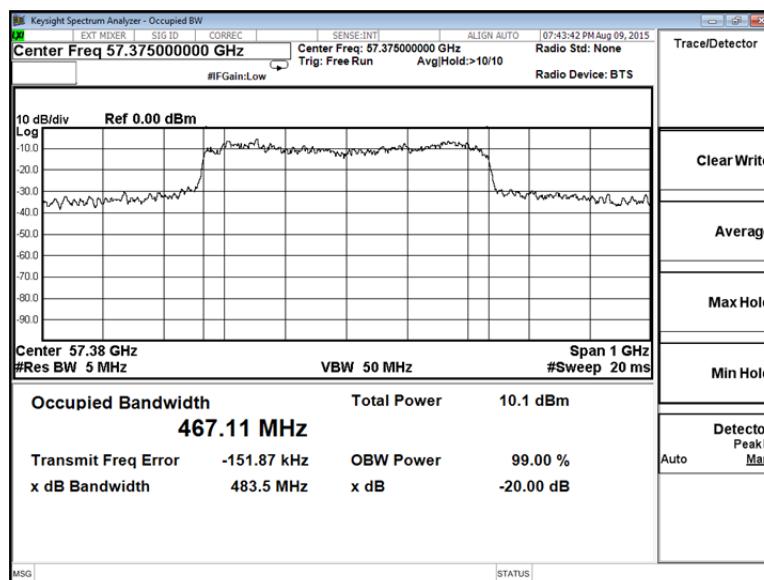



HERMON LABORATORIES


Report ID: SIKRAD_FCC.27344_rev1.docx

Date of Issue: 29-Feb-16

| Test specification: | Section 15.215(c), Occupied bandwidth | | |
|---------------------|--|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1049, ANSI C63.10, Section 9.3 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015 | | |
| Temperature: 23 °C | Air Pressure: 1008 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.2.11 Occupied bandwidth at the mid frequency

| | |
|---------------------|---------|
| MODULATION: | 64QAM |
| EMISSION BANDWIDTH: | 500 MHz |

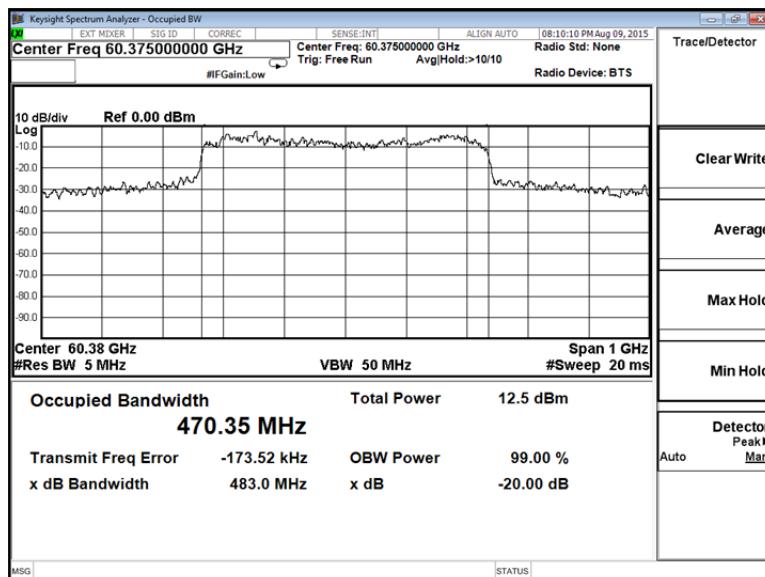

Plot 7.2.12 Occupied bandwidth at the high frequency

| | |
|---------------------|---------|
| MODULATION: | 64QAM |
| EMISSION BANDWIDTH: | 500 MHz |

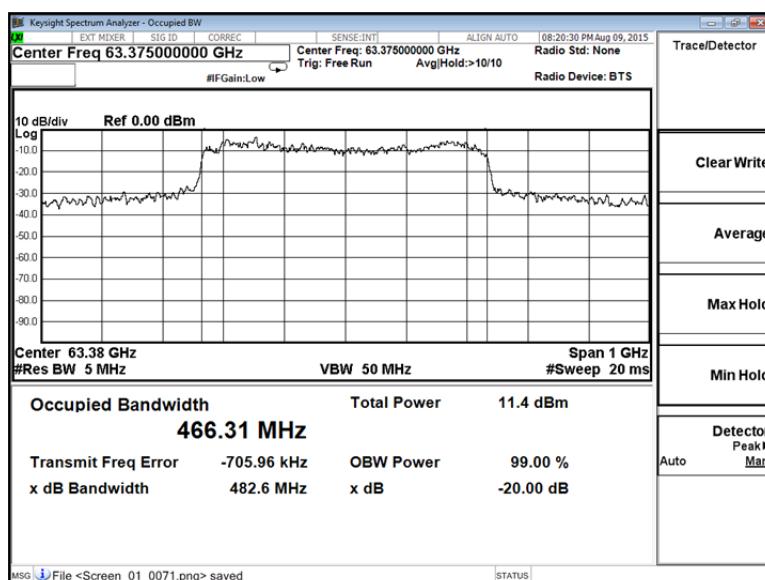



HERMON LABORATORIES

| | | | |
|----------------------------|---|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

7.3 Spurious emissions at RF antenna connector test

7.3.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Spurious emission limits


| Frequency | Spurious emission level | |
|------------------|---------------------------------|------------------------|
| | pW/cm ² | Power of spurious, dBm |
| 40 GHz – 200 GHz | 90 | -9.92 |
| 9 kHz – 40 GHz | According to FCC section 15.209 | |

NOTE 1: Spurious emission limits do not apply to in band emission within $\pm 250\%$ of the authorized bandwidth from the carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was adjusted to produce maximum available for end user RF output power.
- 7.3.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Spurious emission test setup





HERMON LABORATORIES

| | | | |
|----------------------------|---|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.3.2 Spurious emission test results

OPERATING FREQUENCY RANGE: 57000 – 64000 MHz
 INVESTIGATED FREQUENCY RANGE: 30000* - 200000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: QPSK
 EMISSION BANDWIDTH: 250 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

| Carrier frequency, MHz | Spurious frequency, MHz | Spurious emission, dBm | Spurious attenuation, dBc | Spurious emission limit, dBm | Spurious attenuation limit, dBc | Margin, dB | Verdict |
|---------------------------------|-------------------------|------------------------|---------------------------|------------------------------|---------------------------------|------------|---------|
| Low frequency 57375 MHz | | | | | | | |
| No emissions were found | | | | | | | Pass |
| Mid frequency 60375 MHz | | | | | | | |
| No emissions were found | | | | | | | Pass |
| High frequency 63375 MHz | | | | | | | |
| No emissions were found | | | | | | | Pass |

* - The EUT uses a waveguide antenna connector of WR15 type.

Reference numbers of test equipment used

| | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|
| HL 0747 | HL 0748 | HL 1295 | HL 1299 | HL 1300 | HL 1303 | HL 1304 |
| HL 1306 | HL 1312 | HL 1424 | HL 2909 | HL 3235 | HL 3290 | HL 3291 |
| HL 3294 | HL 3297 | HL 3305 | HL 3433 | HL 3434 | HL 3455 | HL 3901 |
| HL 4023 | | | | | | |

Full description is given in Appendix A.






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.1 Spurious emission test results frequency from 30 to 40 GHz

DETECTOR:
LIMIT:

Peak
Average*

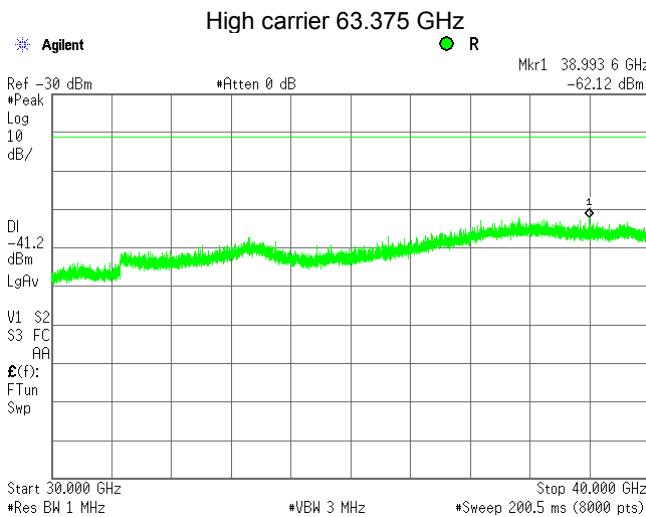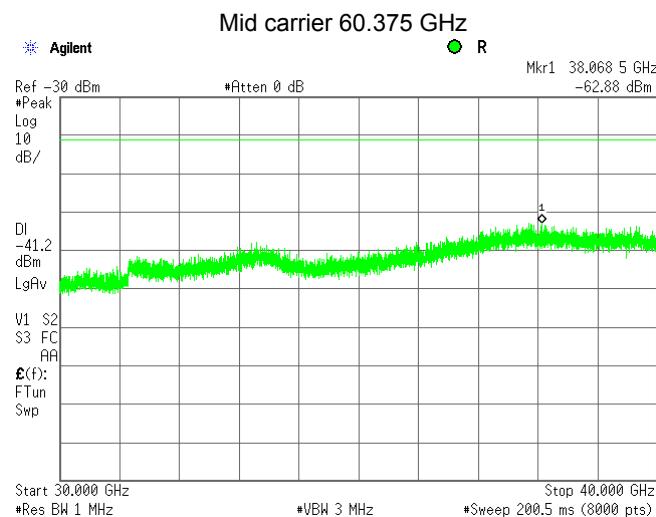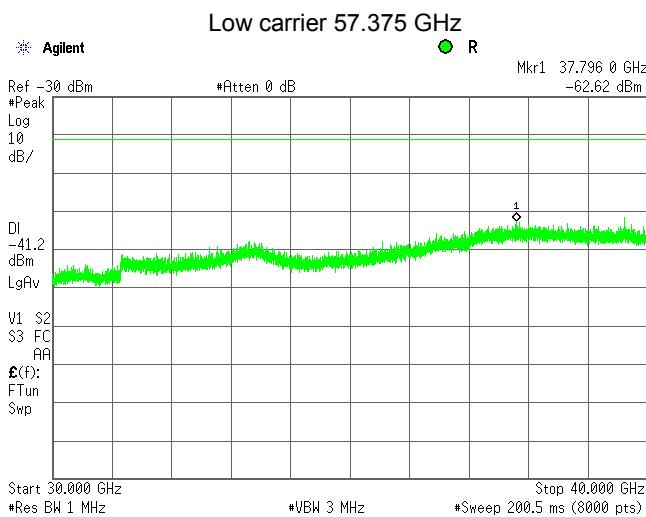

* Limit calculated as follows: $54 \text{ dB}\mu\text{V/m} - 95.2 \text{ dB} = -41.2 \text{ dBm}$






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.2 Spurious emission measurements in 40 – 50 GHz range

DETECTOR:

Peak

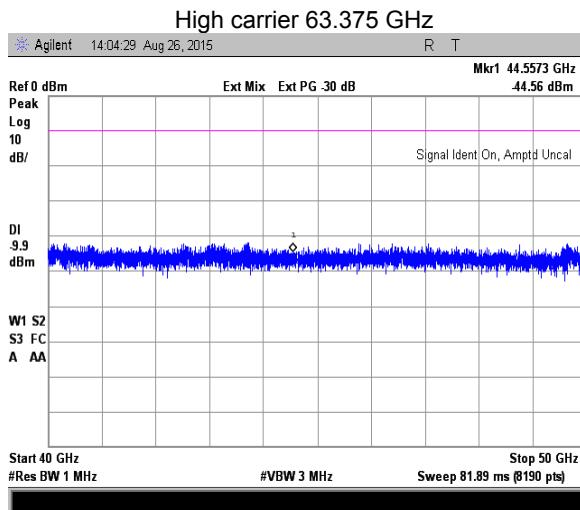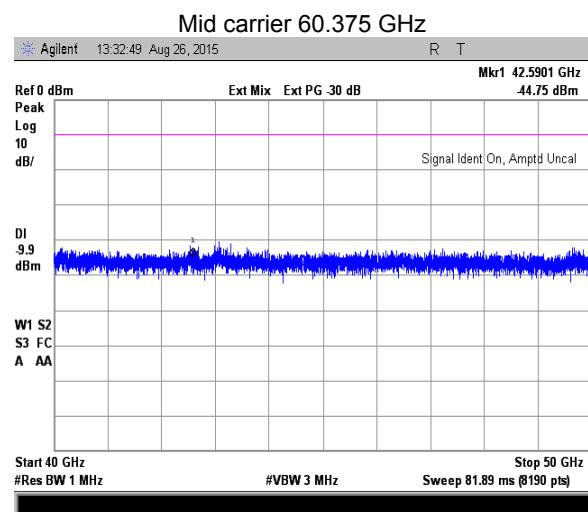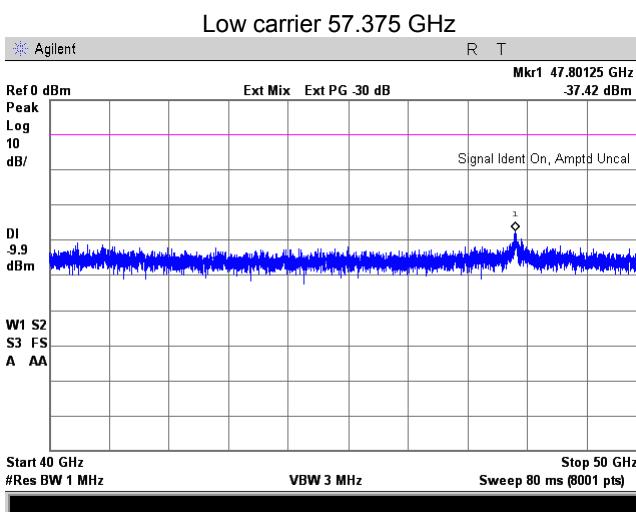






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.3 Spurious emission measurements in 50 – 57 GHz range

DETECTOR:

Peak

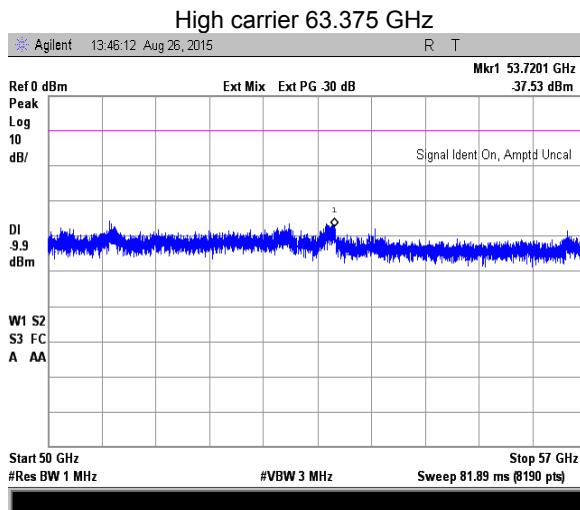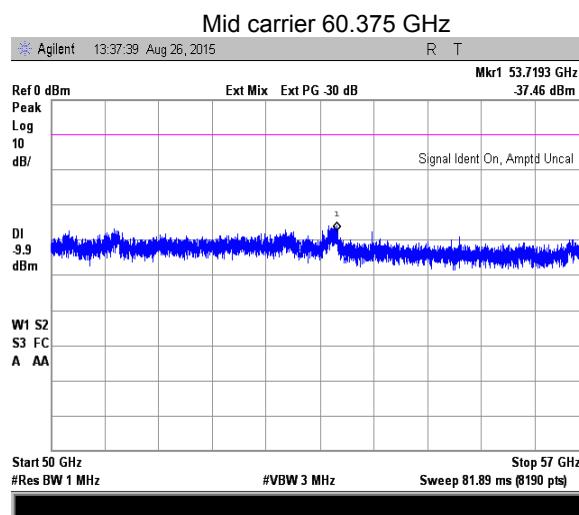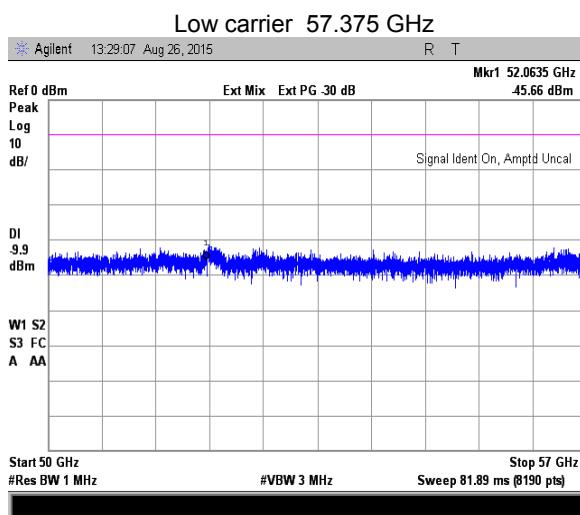






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.4 Spurious emission measurements in 64 – 75 GHz range

DETECTOR:

Peak

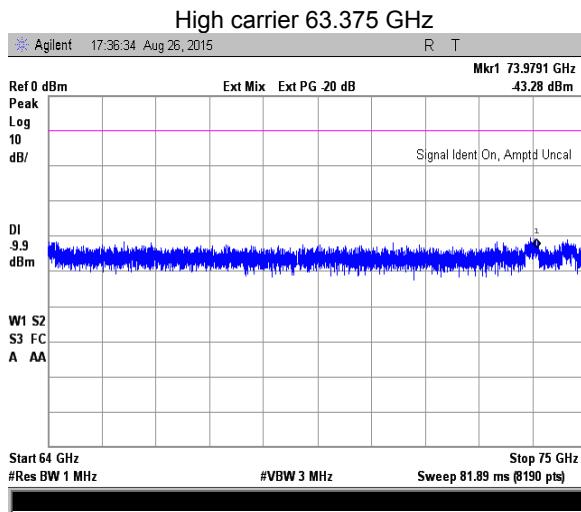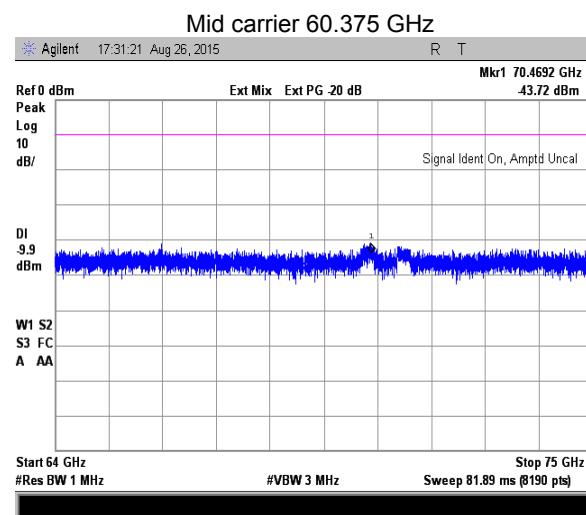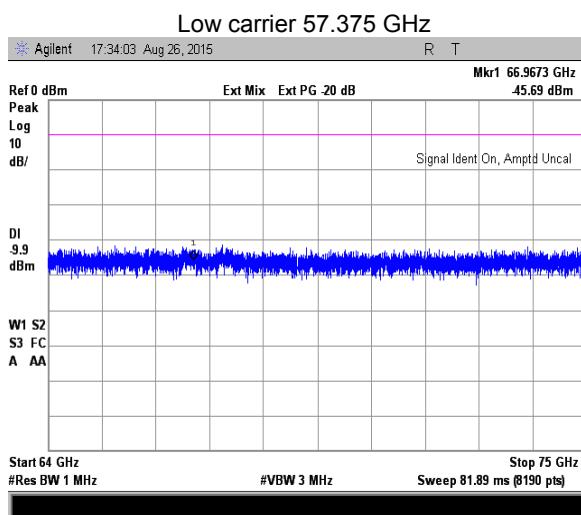






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.5 Spurious emission test results at low carrier frequency from 75 to 83 GHz

DETECTOR:

Peak

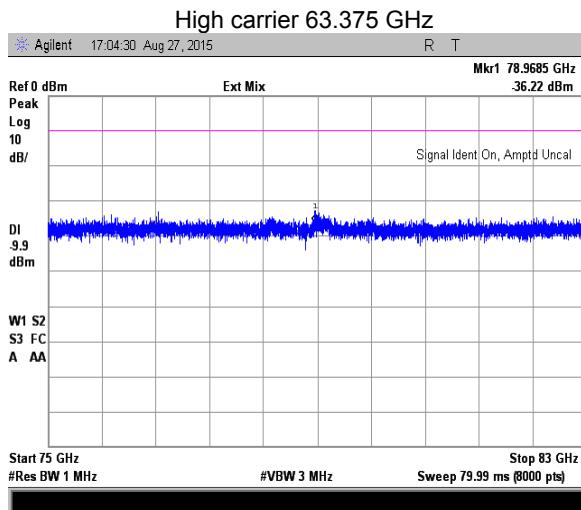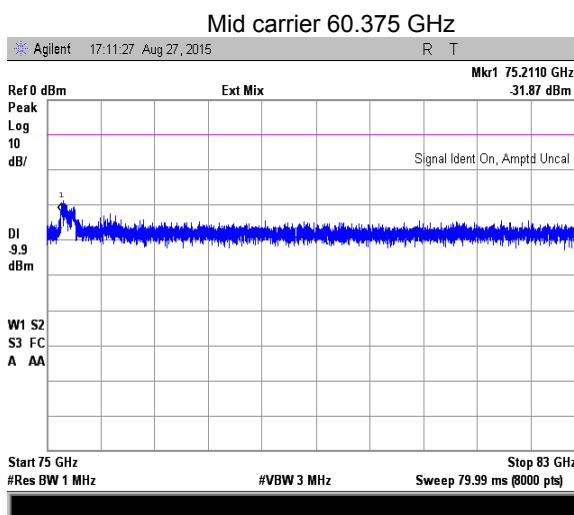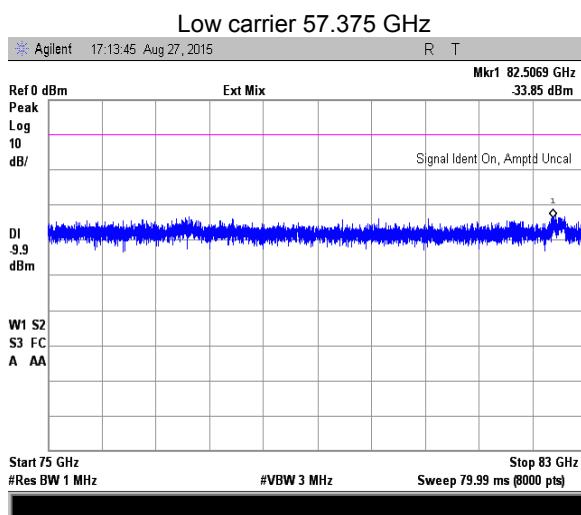






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.6 Spurious emission test results at low carrier frequency from 83 to 90 GHz

DETECTOR:

Peak

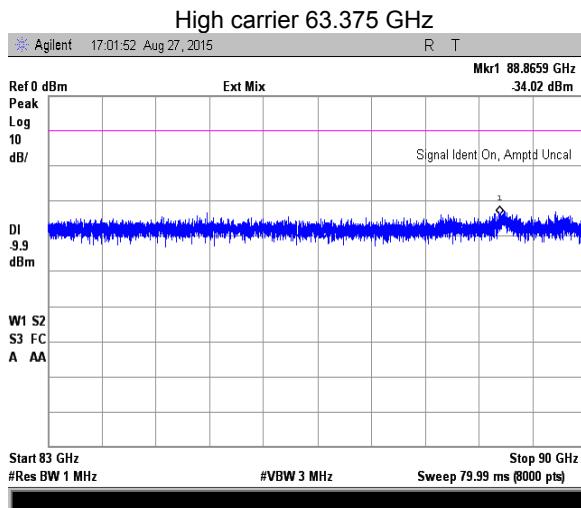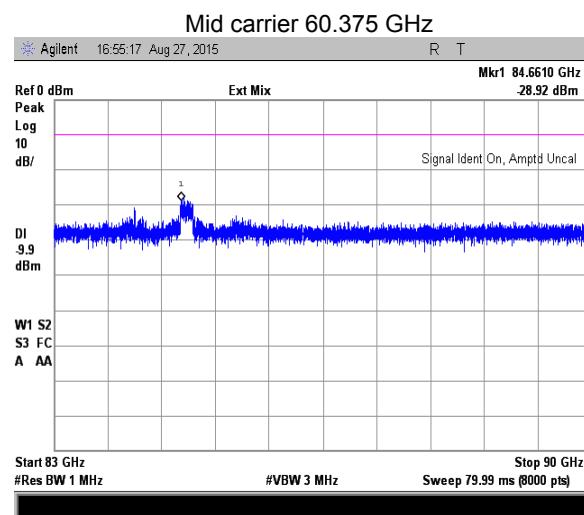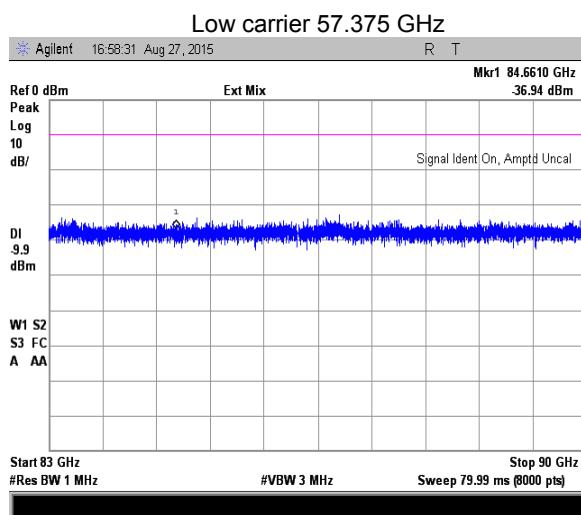




HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.7 Spurious emission test results at low carrier frequency from 90 to 100 GHz


DETECTOR:

Low carrier 57.375 GHz

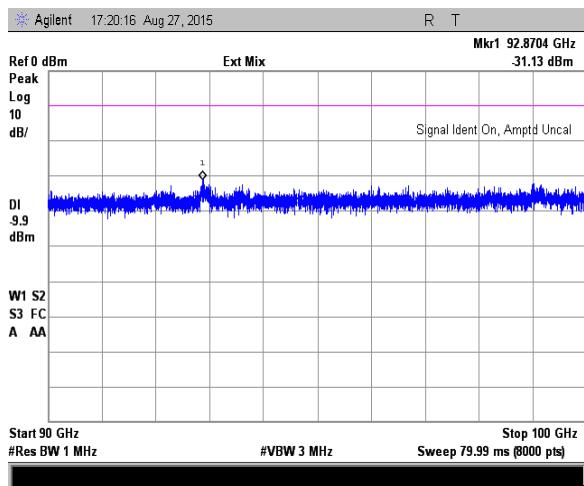


Peak

Mid carrier 60.375 GHz

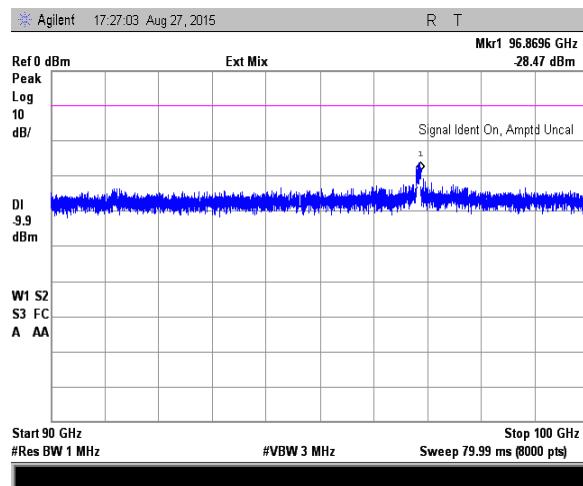

High carrier 63.375 GHz

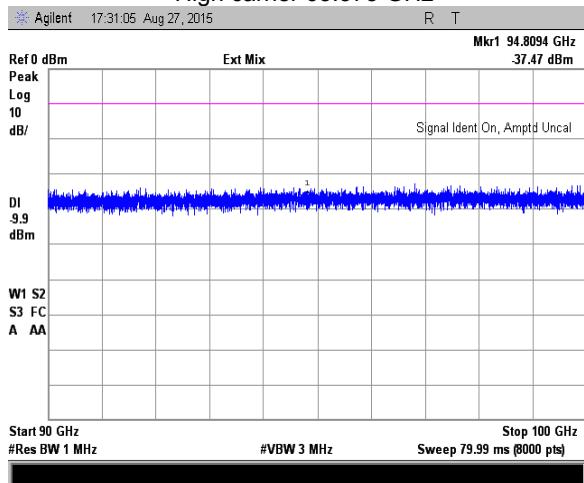






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.8 Spurious emission test results at low carrier frequency from 100 to 110 GHz

DETECTOR:

Peak

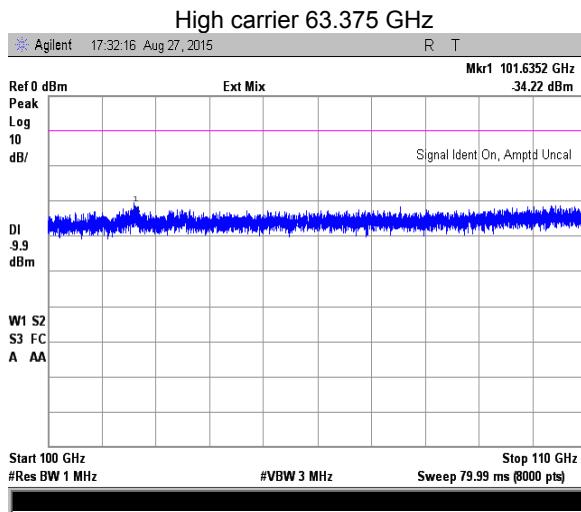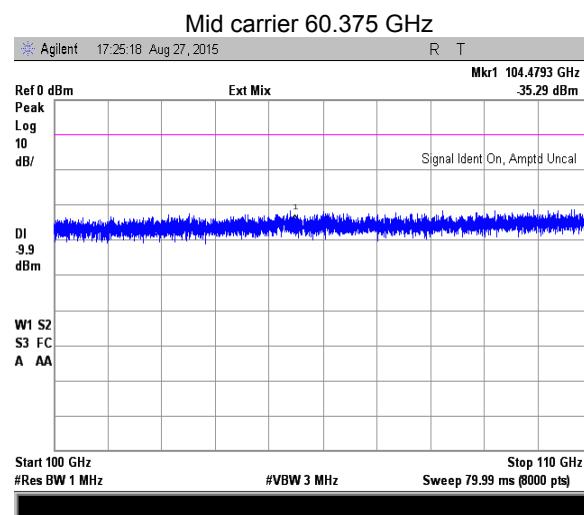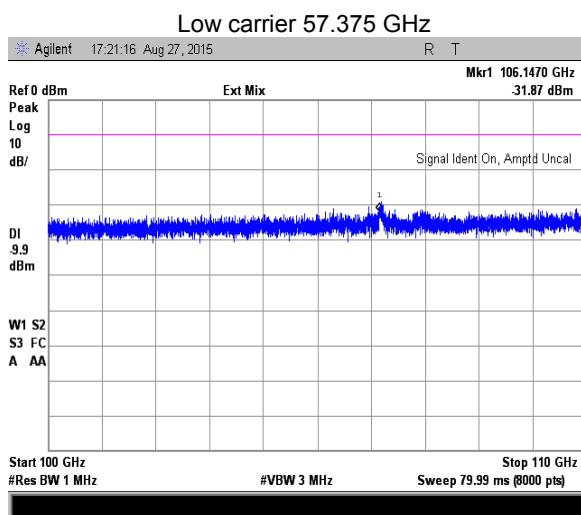






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.9 Spurious emission test results at low carrier frequency from 110 to 120 GHz

DETECTOR:

Peak

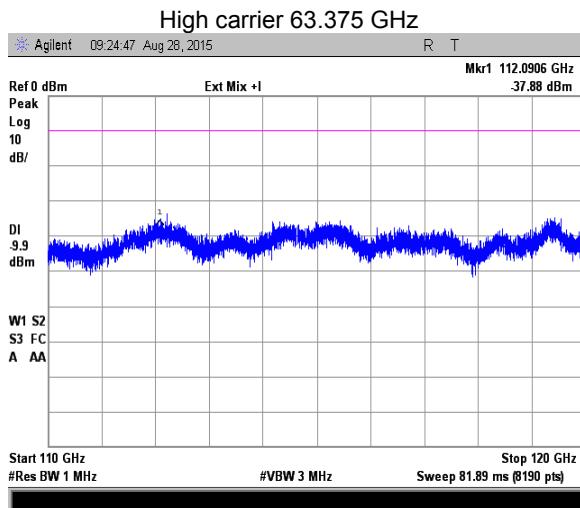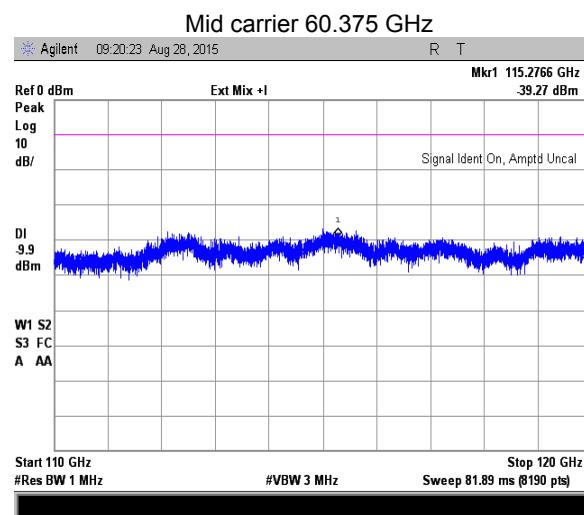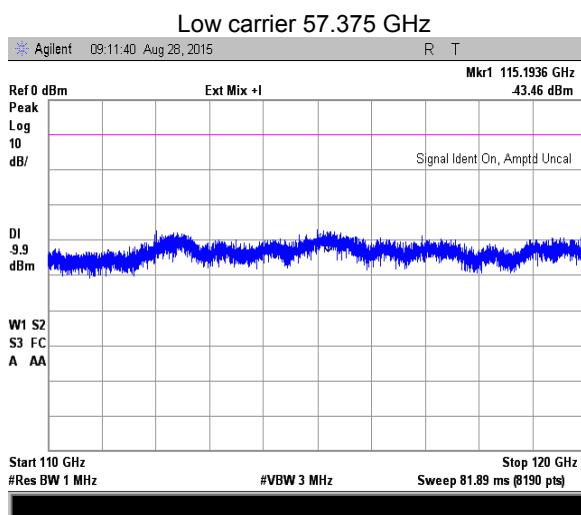






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.10 Spurious emission test results at low carrier frequency from 120 to 130 GHz

DETECTOR:

Peak

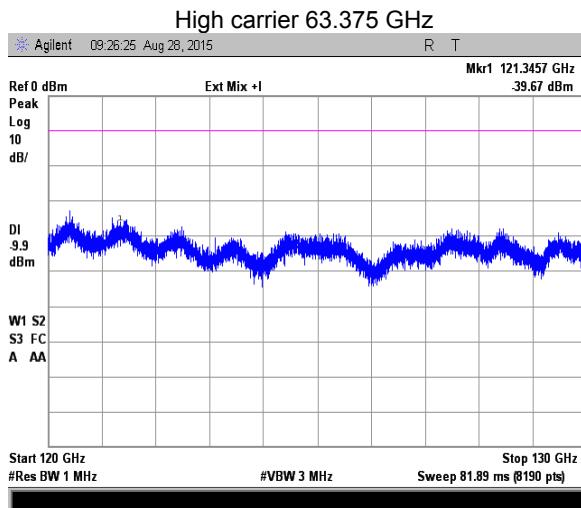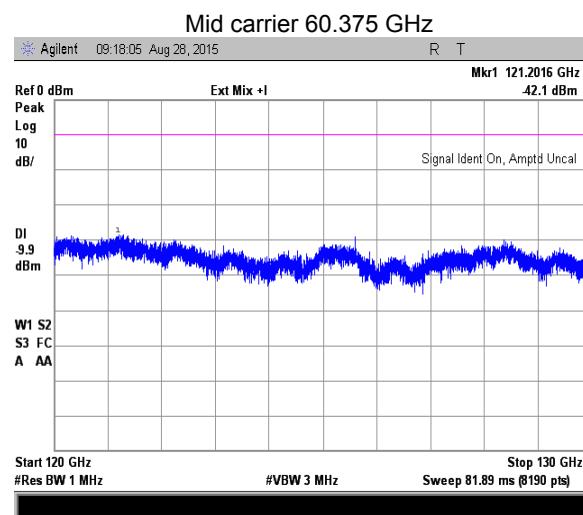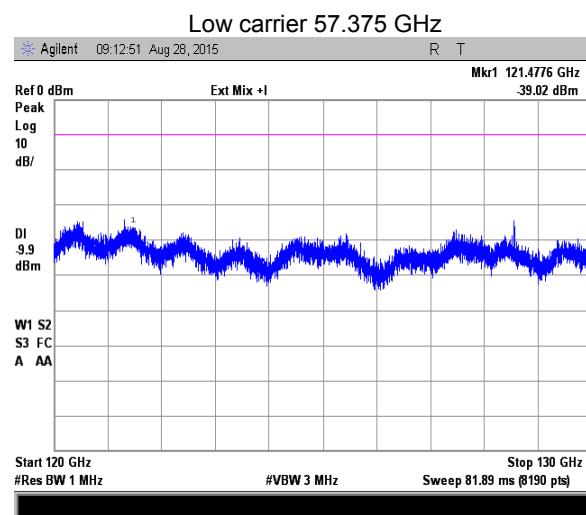






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.11 Spurious emission test results at low carrier frequency from 130 to 140 GHz

DETECTOR:

Peak

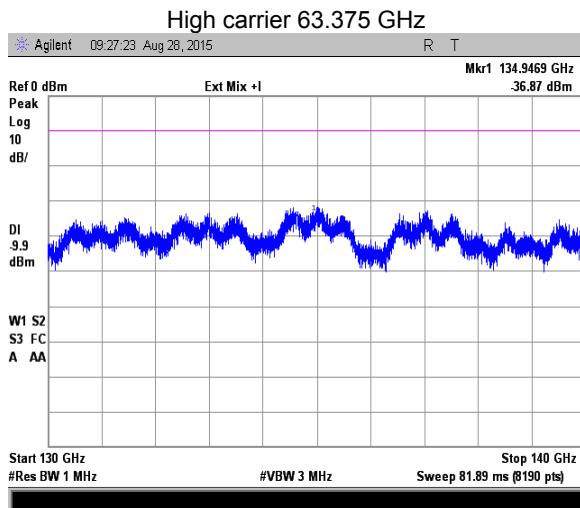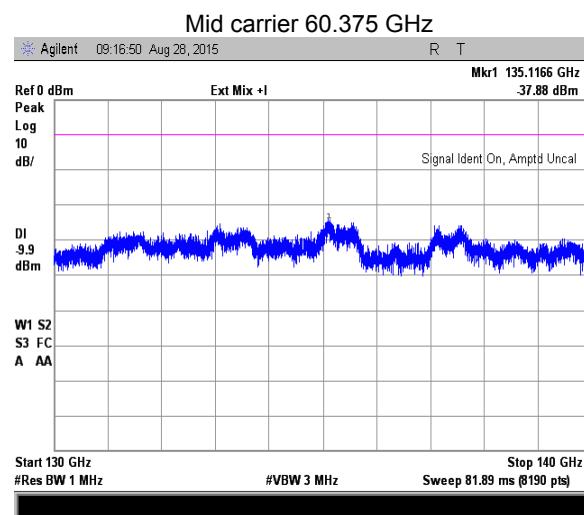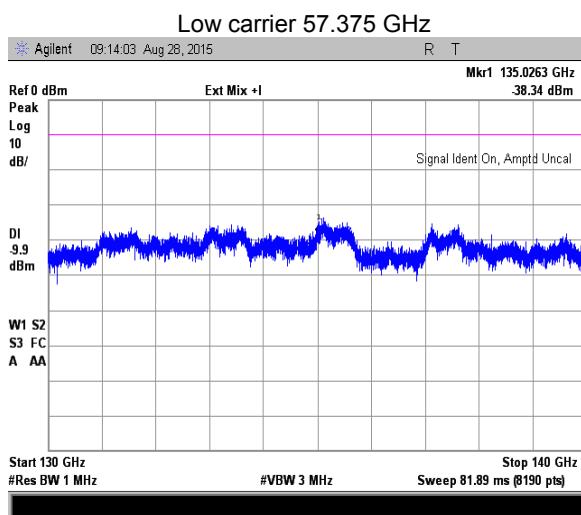






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.12 Spurious emission test results at low carrier frequency from 140 to 150 GHz

DETECTOR:

Peak

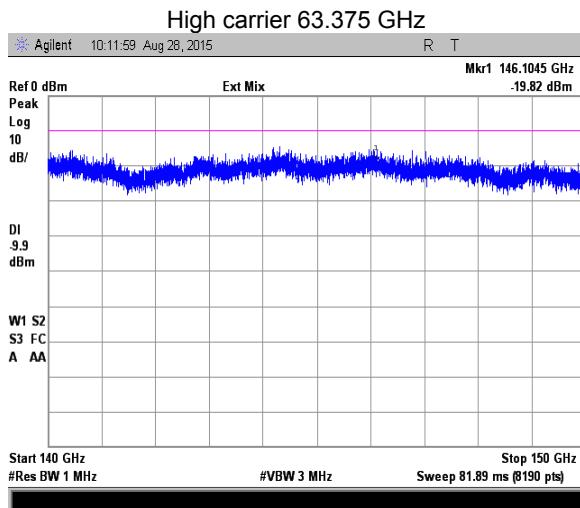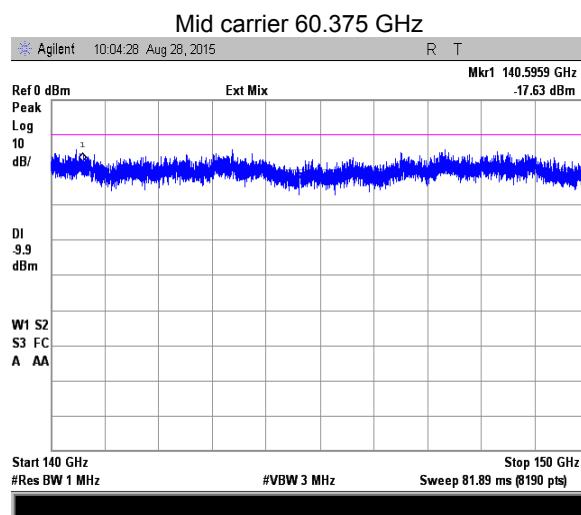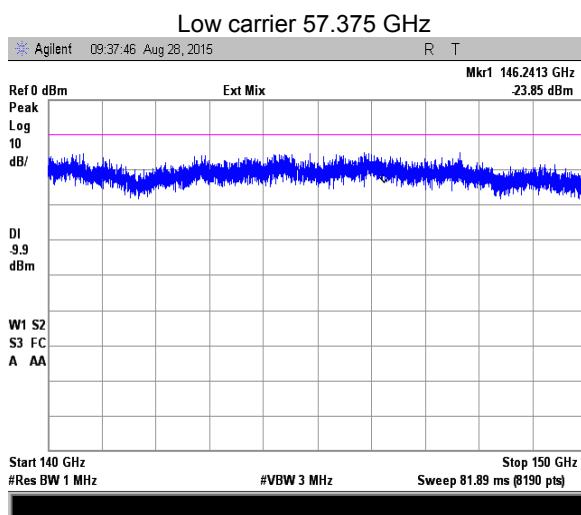






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.13 Spurious emission test results at low carrier frequency from 150 to 160 GHz

DETECTOR:

Peak

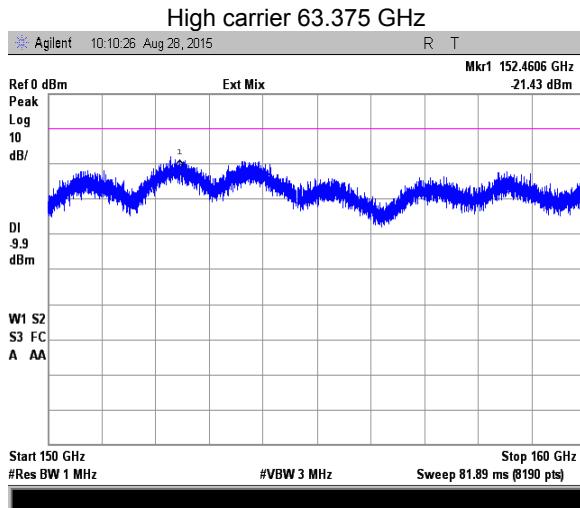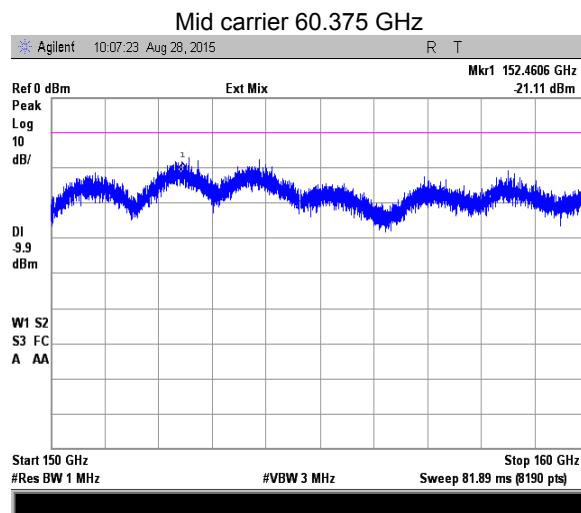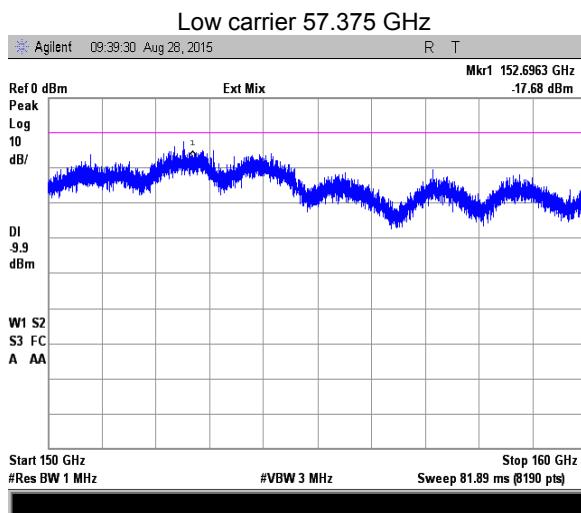






HERMON LABORATORIES

| | | | |
|----------------------------|---|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.14 Spurious emission test results at low carrier frequency from 160 to 170 GHz

DETECTOR:

Peak

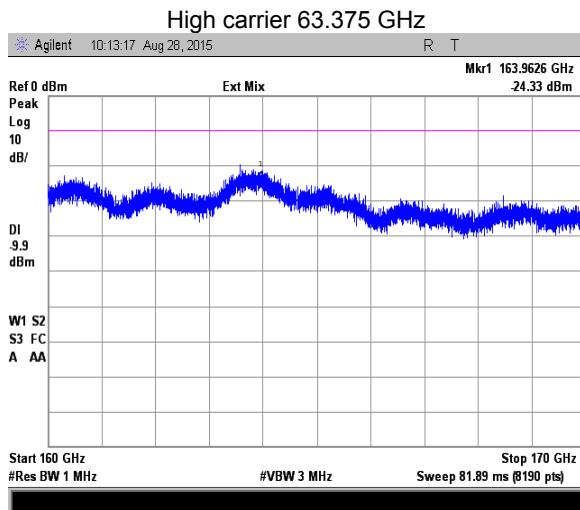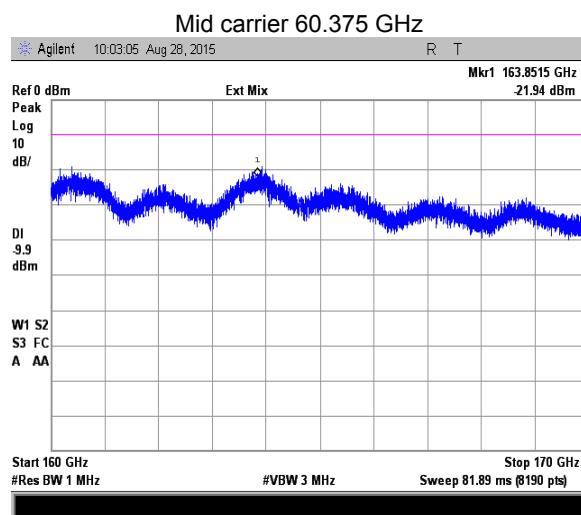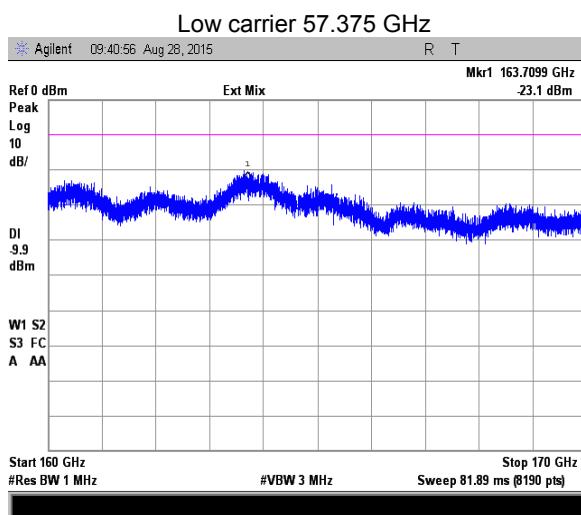






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.15 Spurious emission test results at low carrier frequency from 170 to 180 GHz

DETECTOR:

Peak

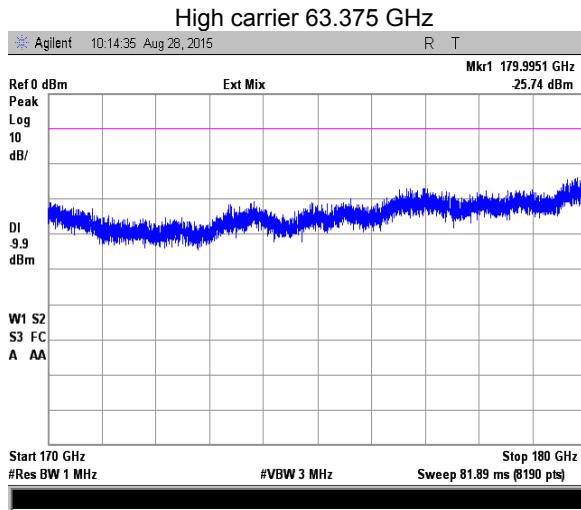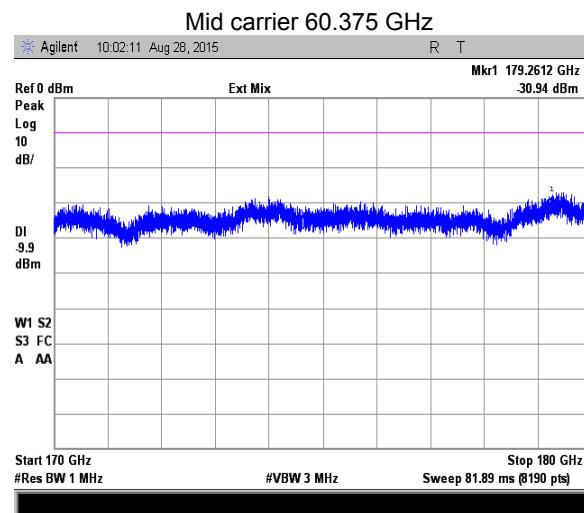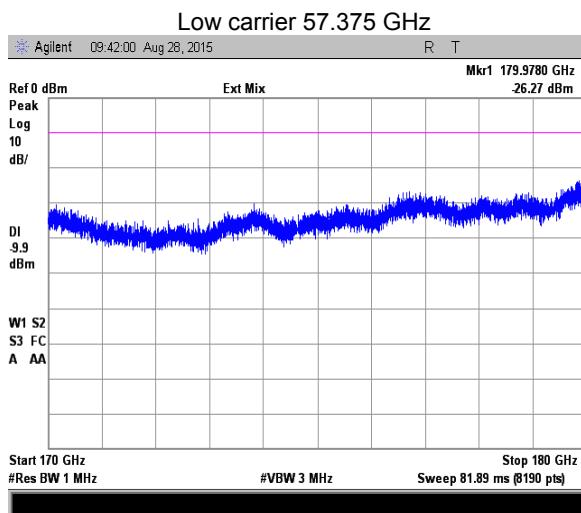






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.16 Spurious emission test results at low carrier frequency from 180 to 190 GHz

DETECTOR:

Peak

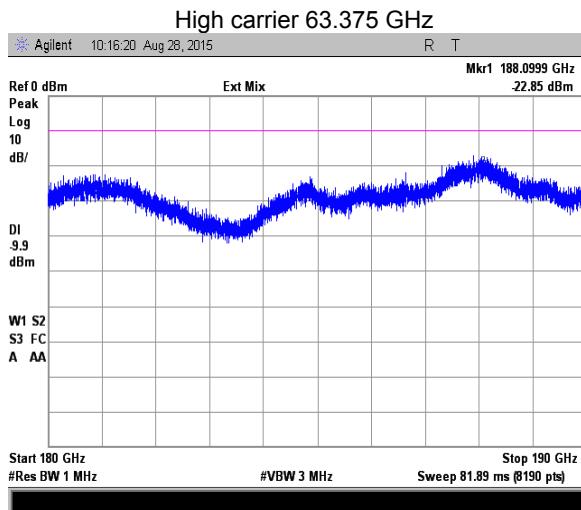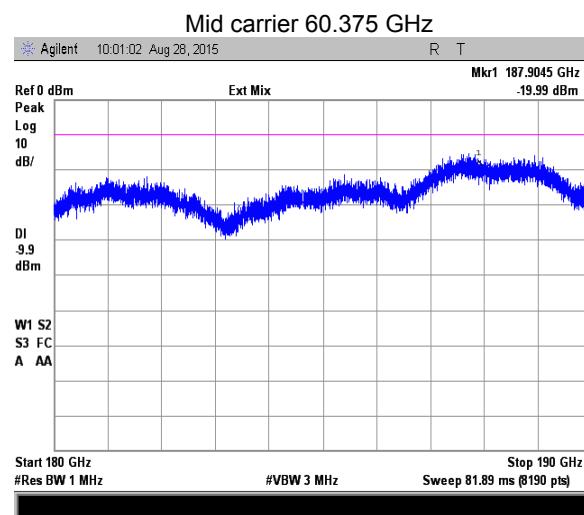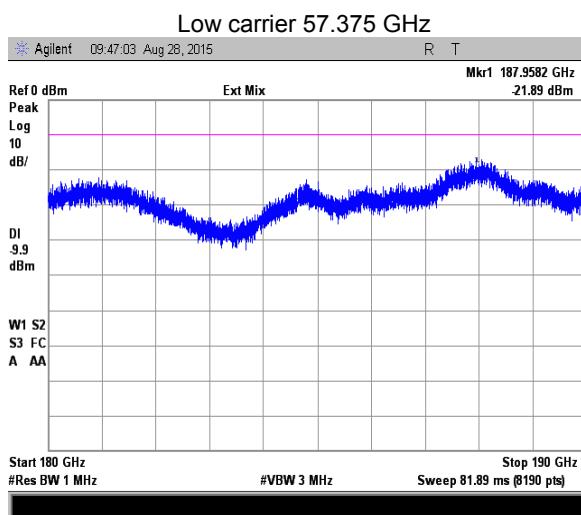






HERMON LABORATORIES

| Test specification: | Section 15.255(c), Conducted spurious emissions | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1051; ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24°C | Air Pressure: 1008 hPa | Relative Humidity: 46% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.3.17 Spurious emission test results at low carrier frequency from 190 to 200 GHz

DETECTOR:

Peak

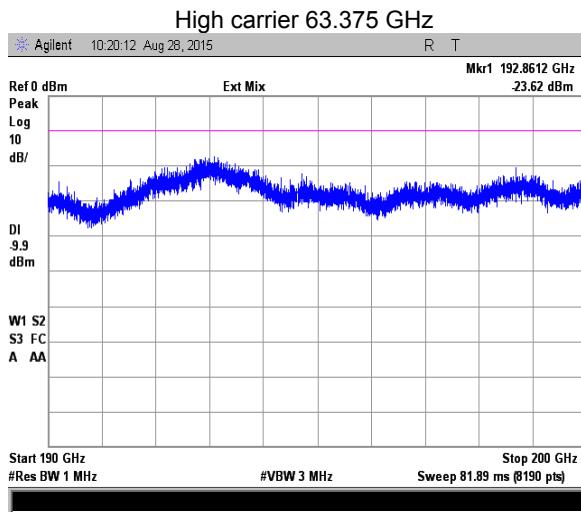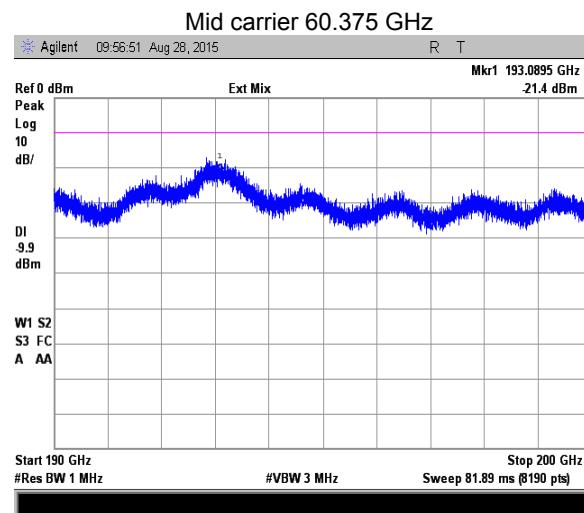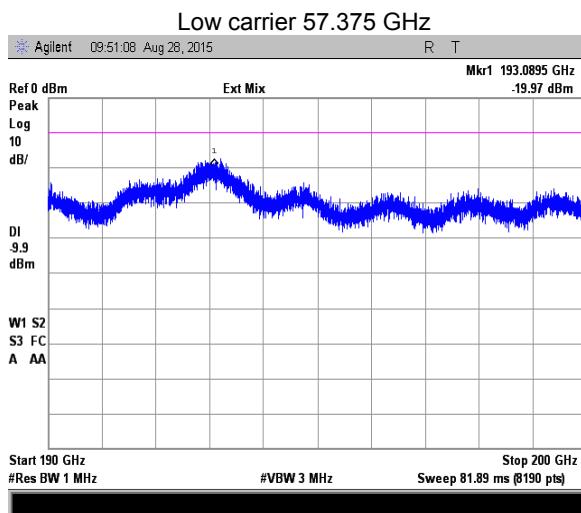



HERMON LABORATORIES

| | | | |
|----------------------------|--|---------------------------|--------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: | 48 VDC |
| Remarks: | | | |

7.4 Out of band radiated emissions below 40 GHz

7.4.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated emission limits

| Frequency, MHz | Field strength at 3 m within restricted bands, dB(µV/m)*** | | |
|----------------|--|-----------------|-----------------|
| | Peak | Quasi Peak | Average |
| 0.009 – 0.090 | 148.5 – 128.5 | NA | 128.5 – 108.5** |
| 0.090 – 0.110 | NA | 108.5 – 106.8** | NA |
| 0.110 – 0.490 | 126.8 – 113.8 | NA | 106.8 – 93.8** |
| 0.490 – 1.705 | NA | 73.8 – 63.0** | NA |
| 1.705 – 30.0* | | 69.5** | |
| 30 – 88 | | 40.0 | |
| 88 – 216 | | 43.5 | |
| 216 – 960 | | 46.0 | |
| 960 – 40000 | 74.0 | NA | 54.0 |

*- The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

**- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

***- The limit decreases linearly with the logarithm of frequency.

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.4.2.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.5.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.4.3.3 The worst test results (the lowest margins) were recorded in Table 7.4.2, Table 7.4.3 and shown in the associated plots.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-----------------------------|------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: 48 VDC | |
| Remarks: | | | |

Figure 7.4.1 Radiated emissions below 30 MHz test set up


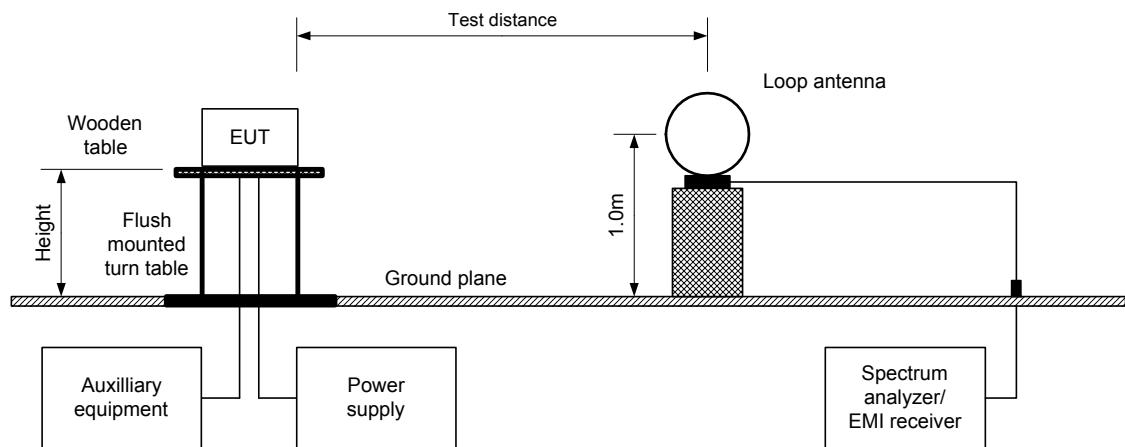


Figure 7.4.2 Radiated emissions above 30 MHz test set up



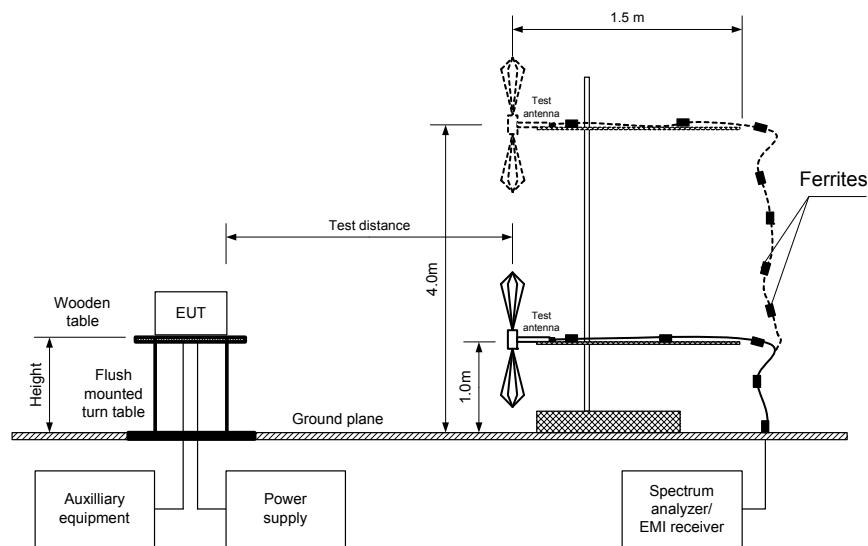

HERMON LABORATORIES

Report ID: SIKRAD_FCC.27344_rev1.docx

Date of Issue: 29-Feb-16

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.4.2 Radiated emissions test results below 1000 MHz

TEST SITE: Semi Anechoic Chamber
 TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: QPSK
 EMISSION BANDWIDTH: 250 MHz
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 40000 MHz
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 ≥ Resolution bandwidth
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

| Frequency, MHz | Peak emission, dB(µV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|---------------------------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
| | | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| Low frequency 53375 MHz | | | | | | | | |
| 30.63 | 40.98 | 39.70 | 40.0 | -0.30 | Vert | 1.0 | 0 | Pass |
| 32.41 | 40.10 | 29.47 | 40.0 | -10.53 | Vert | 1.0 | 50 | Pass |
| 94.36 | 39.41 | 37.90 | 43.5 | -5.60 | Vert | 1.2 | 0 | Pass |
| 143.21 | 33.43 | 31.36 | 43.5 | -12.14 | Vert | 1.0 | 80 | Pass |
| 250.00 | 44.14 | 42.64 | 46.0 | -3.36 | Vert | 1.1 | 270 | Pass |
| 999.99 | 47.68 | 47.31 | 54.0 | -6.69 | Vert | 1.2 | 0 | Pass |
| Mid frequency 60375 MHz | | | | | | | | |
| 32.58 | 31.18 | 28.11 | 40.0 | -11.89 | Vert | 1.0 | 350 | Pass |
| 96.31 | 37.16 | 34.39 | 40.0 | -5.61 | Vert | 1.0 | 330 | Pass |
| 125.00 | 29.43 | 30.41 | 43.5 | -13.09 | Vert | 1.0 | 190 | Pass |
| 250.00 | 41.64 | 37.58 | 46.0 | -8.42 | Vert | 1.4 | 270 | Pass |
| 500.00 | 42.31 | 40.00 | 46.0 | -6.00 | Horiz | 1.0 | 320 | Pass |
| 625.00 | 36.22 | 34.41 | 46.0 | -11.59 | Vert | 1.0 | 340 | Pass |
| 999.99 | 46.79 | 44.83 | 54.0 | -9.17 | Vert | 1.0 | 330 | Pass |
| High frequency 63375 MHz | | | | | | | | |
| 30.61 | 38.73 | 37.10 | 40.0 | -2.9 | Vert | 1.0 | 0 | Pass |
| 94.35 | 41.88 | 39.31 | 43.5 | -4.19 | Vert | 1.0 | 120 | Pass |
| 143.28 | 35.23 | 34.34 | 43.5 | -9.16 | Verti | 1.0 | 0 | Pass |
| 250.00 | 44.72 | 42.56 | 46.0 | -3.44 | Vert | 1.0 | 0 | Pass |
| 500.00 | 38.58 | 37.22 | 46.0 | -8.78 | Horiz | 1.0 | 340 | Pass |
| 550.00 | 39.98 | 38.84 | 46.0 | -7.16 | Horiz | 1.0 | 100 | Pass |
| 999.99 | 46.71 | 46.46 | 54.0 | -7.54 | Horiz | 1.0 | 300 | Pass |

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.4.3 Radiated emissions test results in 1000 – 40000 MHz range

TEST SITE: OATS
 TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: QPSK
 EMISSION BANDWIDTH: 125 MHz
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 1000 – 40000 MHz
 RESOLUTION BANDWIDTH: 1000 kHz
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Double-Ridged Waveguide Horn

| Frequency, MHz | Antenna | | Azimuth, degrees* | Peak field strength (VBW=3 MHz) | | | Average field strength (VBW=30 Hz) | | | Verdict |
|---------------------------------|----------|-----------|-------------------|---------------------------------|-----------------|--------------|------------------------------------|-----------------|---------------|---------|
| | Polariz. | Height, m | | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB** | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB*** | |
| Low frequency 57375 MHz | | | | | | | | | | |
| 1067.500 | Vertical | 1.1 | 330 | 46.28 | 74.0 | -27.72 | 45.98 | 54.0 | -8.02 | Pass |
| 5000.000 | Vertical | 1.0 | 0 | 49.64 | 74.0 | -24.36 | 49.02 | 54.0 | -4.98 | |
| Mid frequency 60375 MHz | | | | | | | | | | |
| 1067.500 | Vertical | 1.1 | 20 | 47.44 | 74.0 | -26.56 | 47.20 | 54.0 | -6.80 | Pass |
| 5000.000 | Vertical | 1.0 | 350 | 46.20 | 74.0 | -27.8 | 45.98 | 54.0 | -8.02 | |
| High frequency 63375 MHz | | | | | | | | | | |
| 1067.500 | Vertical | 1.1 | 340 | 53.58 | 74.0 | -20.42 | 53.01 | 54.0 | -0.99 | Pass |
| 5000.000 | Vertical | 1.0 | 350 | 48.39 | 74.0 | -25.61 | 48.04 | 54.0 | -5.96 | |

*EUT front panel refer to 0 degrees position of turntable

**- Margin = Measured emission - specification limit.

***- Margin = Calculated emission - specification limit.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0446 | HL 0521 | HL 0604 | HL 0768 | HL 0769 | HL 2909 | HL 3535 | HL 3901 |
| HL 3903 | HL 4114 | HL 4353 | HL 4722 | HL 4856 | HL 4932 | | |

Full description is given in Appendix A.




HERMON LABORATORIES

| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.1 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

High frequency: 63375 MHz
Mid frequency: 60375 MHz
Low frequency: 57375 MHz

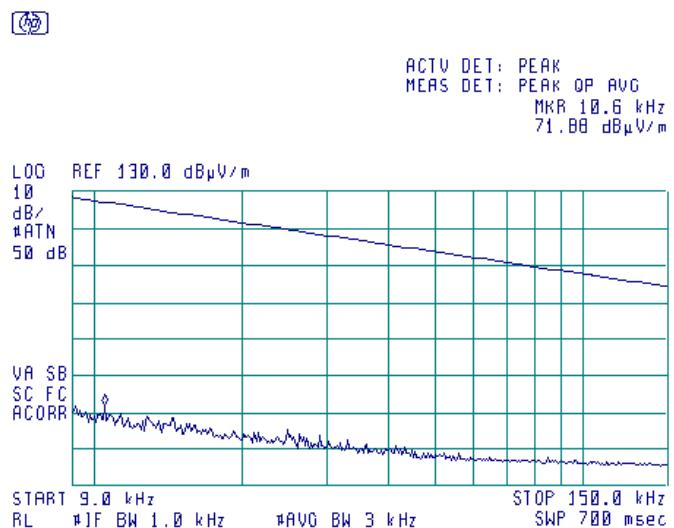




HERMON LABORATORIES

| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.2 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

High frequency: 63375 MHz
Mid frequency: 60375 MHz
Low frequency: 57375 MHz

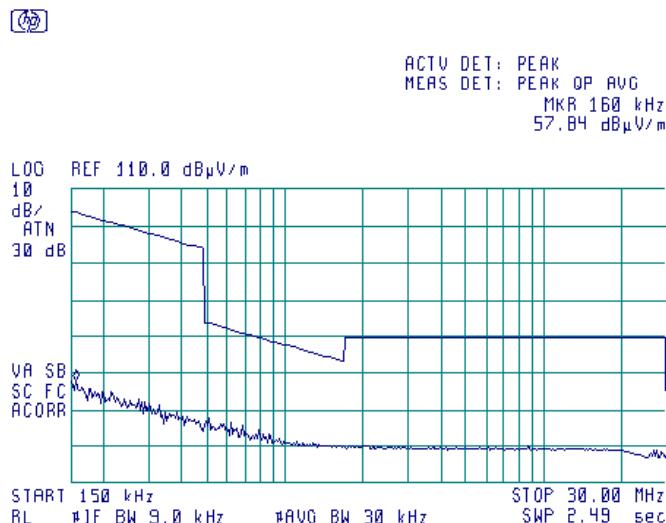




HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.4.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
Low frequency: 57375 MHz

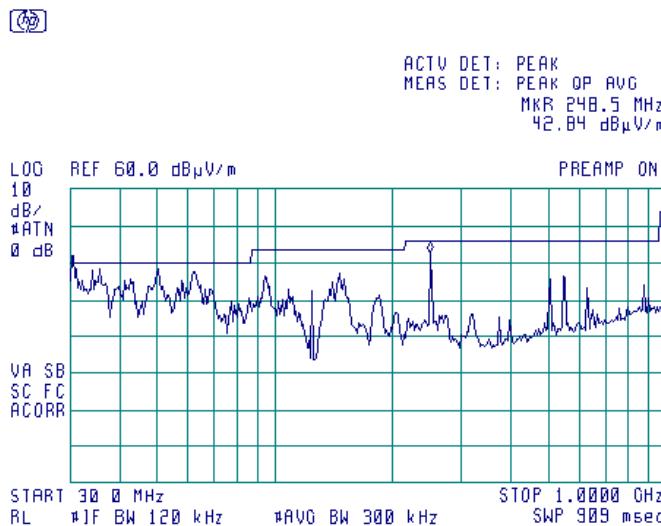

Plot 7.4.4 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
Low frequency: 57375 MHz

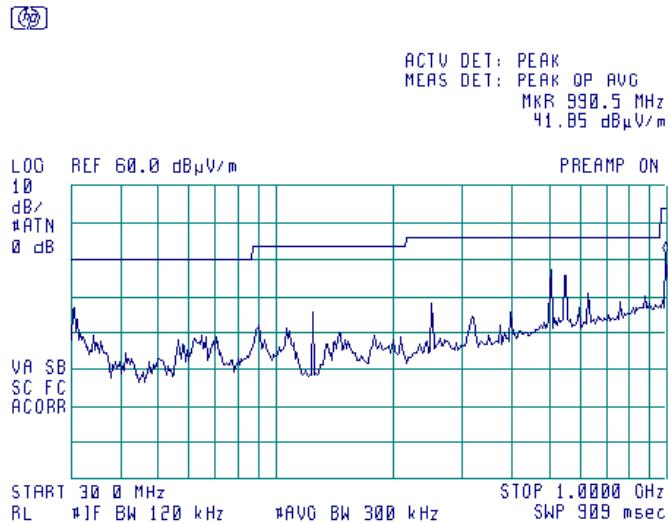




HERMON LABORATORIES


| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 Mid frequency: 60375 MHz

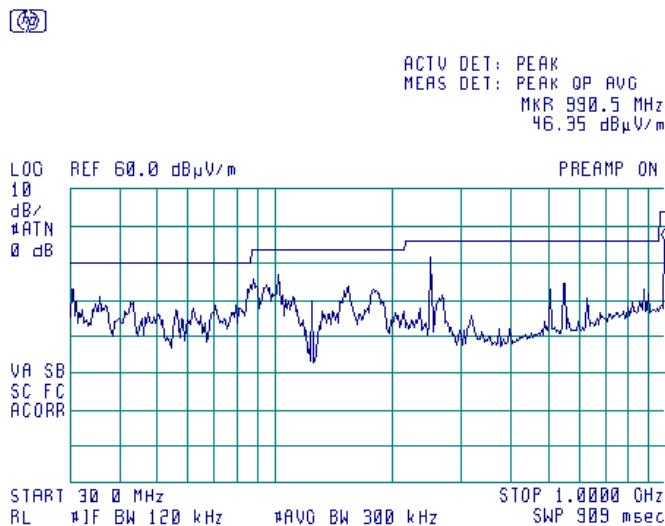**Plot 7.4.6 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 Mid frequency: 60375 MHz

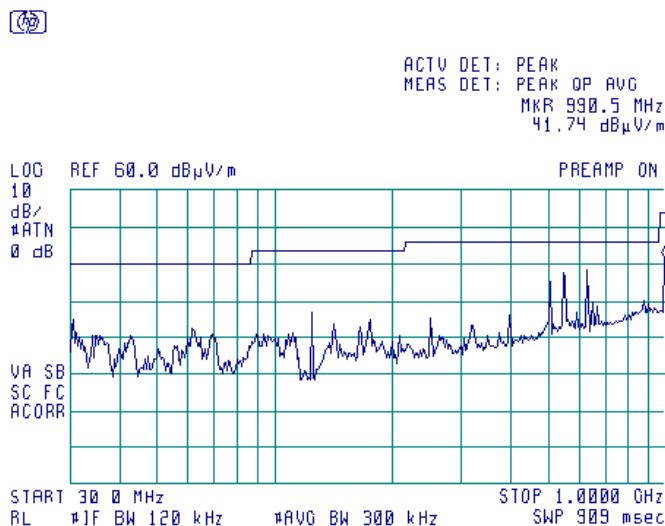



HERMON LABORATORIES


Report ID: SIKRAD_FCC.27344_rev1.docx

Date of Issue: 29-Feb-16

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.4.7 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
High frequency: 63375 MHz

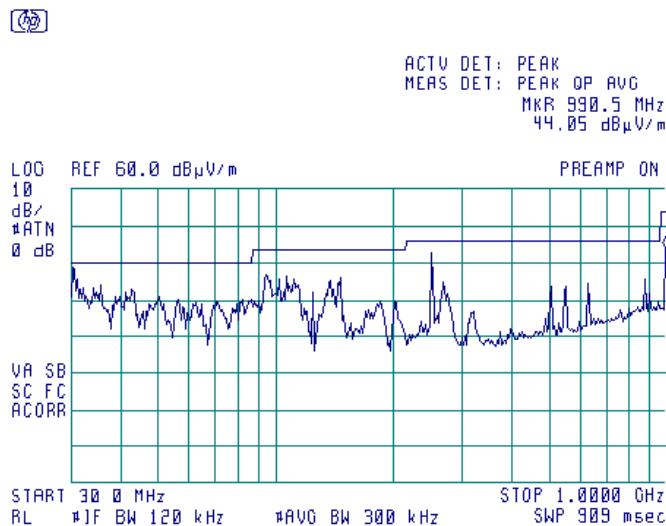

Plot 7.4.8 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
High frequency: 63375 MHz

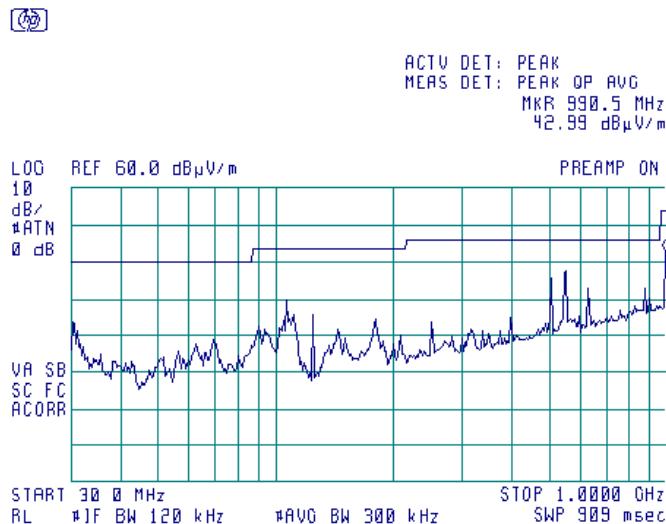



HERMON LABORATORIES

| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.9 Radiated emission measurements from 1000 to 6000 MHz

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak


Anechoic chamber

3 m


Vertical and Horizontal

DETECTOR: Average


Low frequency:

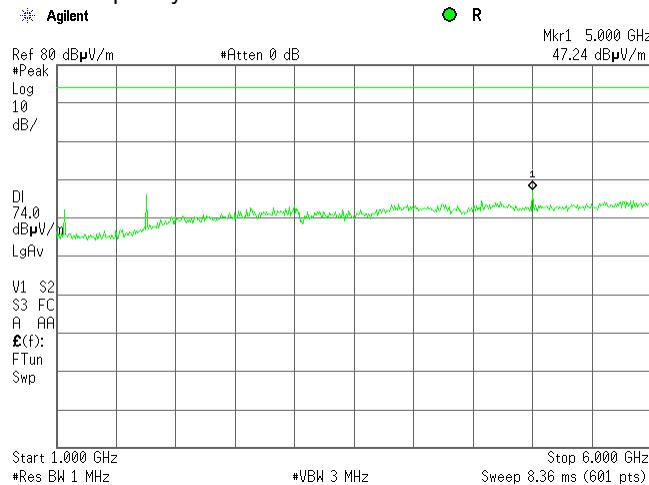


57375 MHz

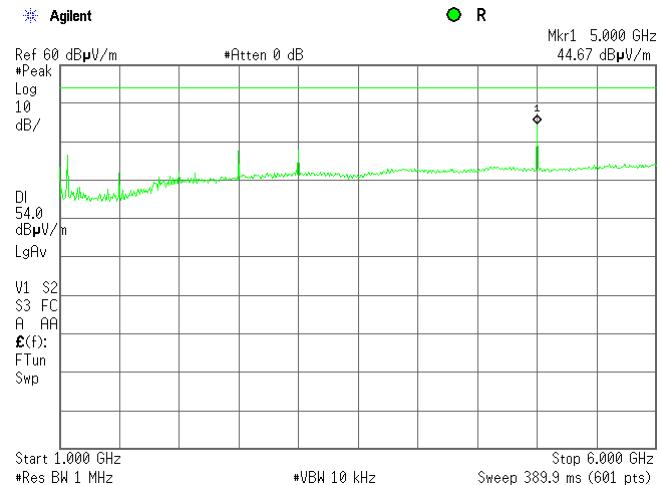

Mid frequency:

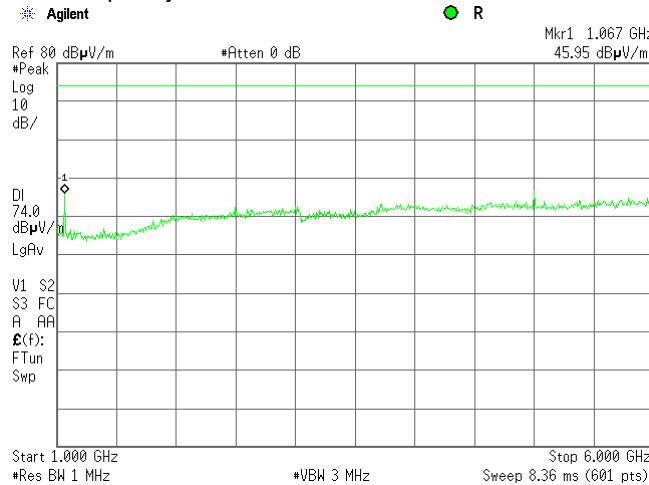

60375 MHz

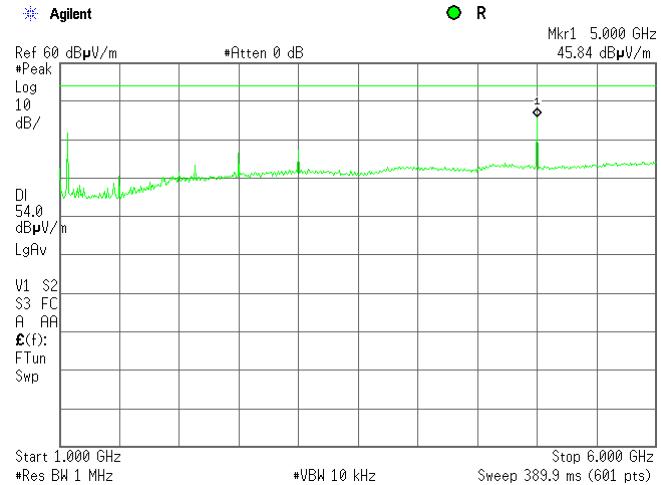



HERMON LABORATORIES

| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.10 Radiated emission measurements from 1000 to 6000 MHz

TEST SITE:

Anechoic chamber

TEST DISTANCE:

3 m


ANTENNA POLARIZATION:

Vertical and Horizontal


DETECTOR: Peak

DETECTOR: Average

High frequency :

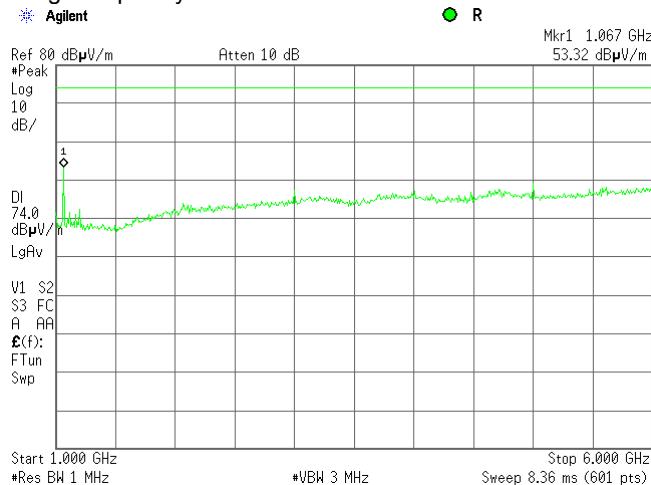

63375 MHz

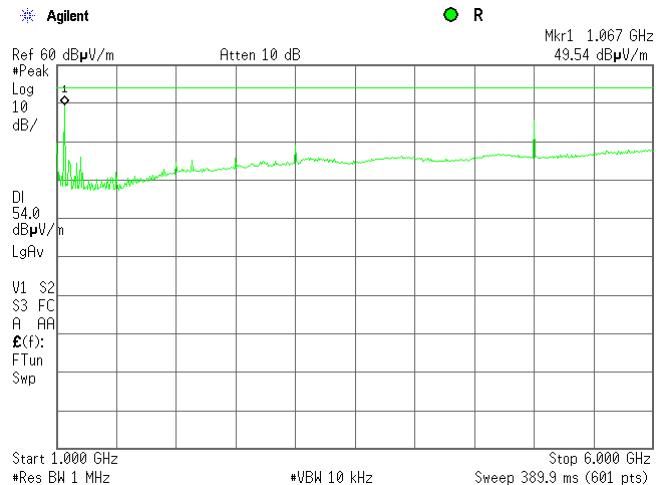



HERMON LABORATORIES

Report ID: SIKRAD_FCC.27344_rev1.docx

Date of Issue: 29-Feb-16

| | | | |
|----------------------------|--|---------------------------|--------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: | 48 VDC |
| Remarks: | | | |

Plot 7.4.11 Radiated emission measurements from 6000 – 18000 MHz

TEST SITE:

Anechoic chamber

TEST DISTANCE:

3 m


ANTENNA POLARIZATION:

Vertical and Horizontal


DETECTOR:

Peak


Low frequency :

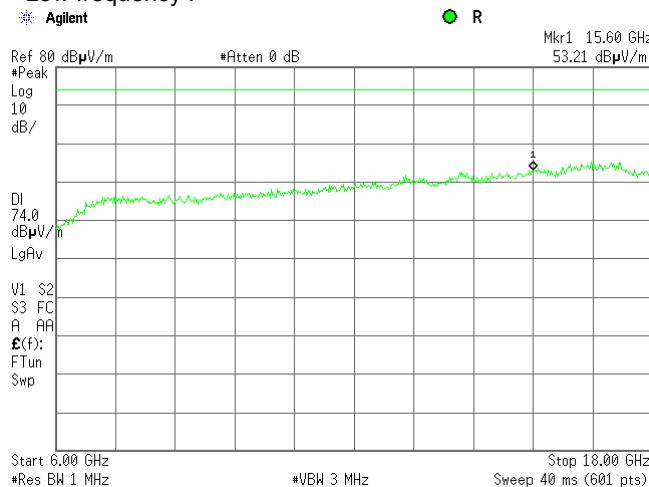


57375 MHz

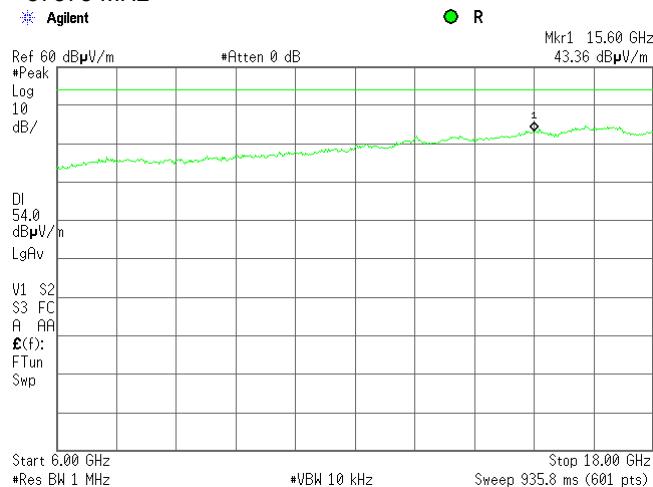

Mid frequency:

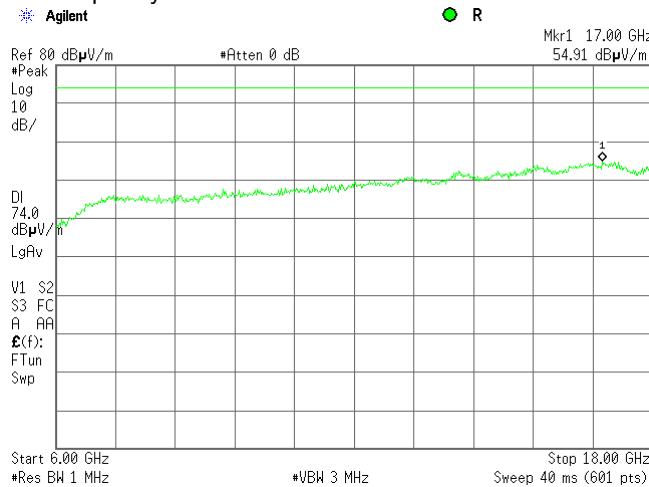

60375 MHz

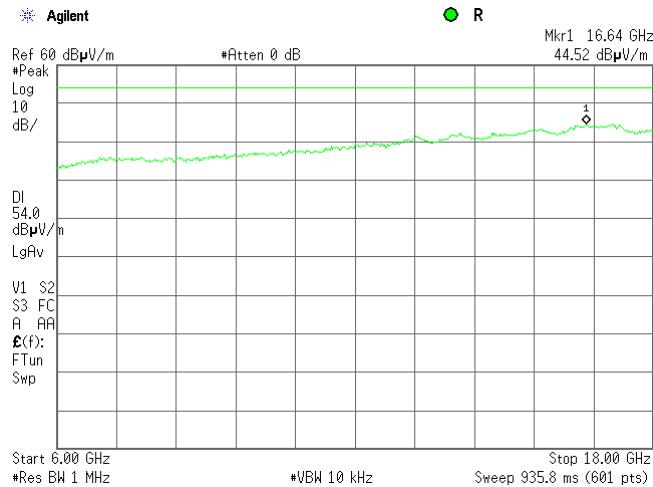



HERMON LABORATORIES

| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
|---------------------|---|--------------------|--------|
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: | 48 VDC |
| Remarks: | | | |

Plot 7.4.12 Radiated emission measurements from 6000 – 18000 MHz

TEST SITE:

Anechoic chamber

TEST DISTANCE:

3 m


ANTENNA POLARIZATION:

Vertical and Horizontal


DETECTOR:

Peak

High frequency :

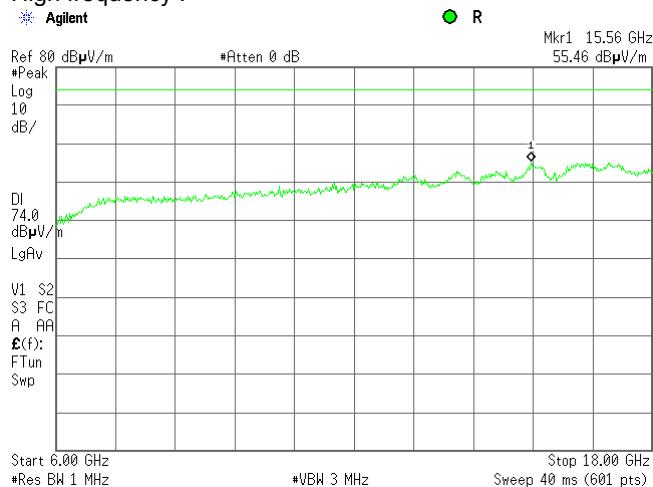

63375 MHz

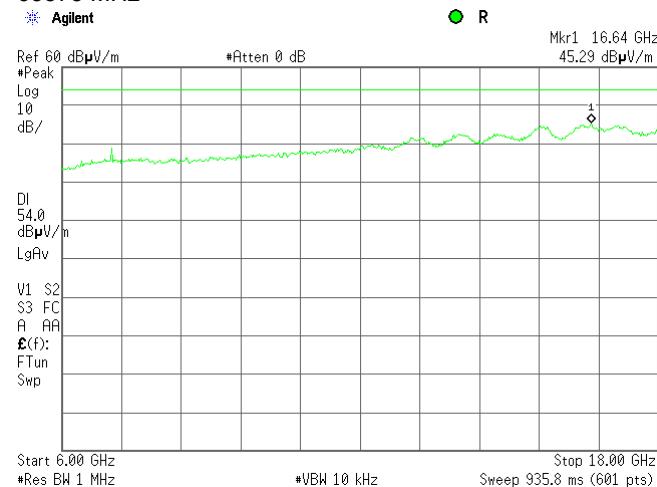



HERMON LABORATORIES

| | | | |
|----------------------------|--|---------------------------|--------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: | 48 VDC |
| Remarks: | | | |

Plot 7.4.13 Radiated emission measurements from 18000 to 26500 MHz

TEST SITE:

Semi Anechoic Chamber

TEST DISTANCE:

3 m


ANTENNA POLARIZATION:

Vertical and Horizontal


DETECTOR:

Peak


Low frequency:

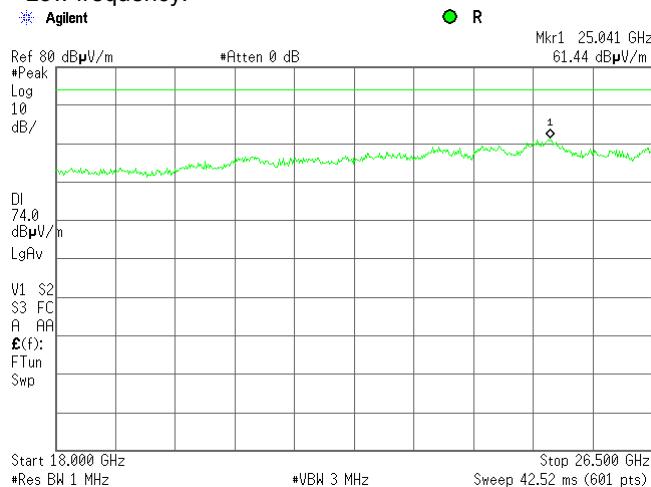


57375 MHz

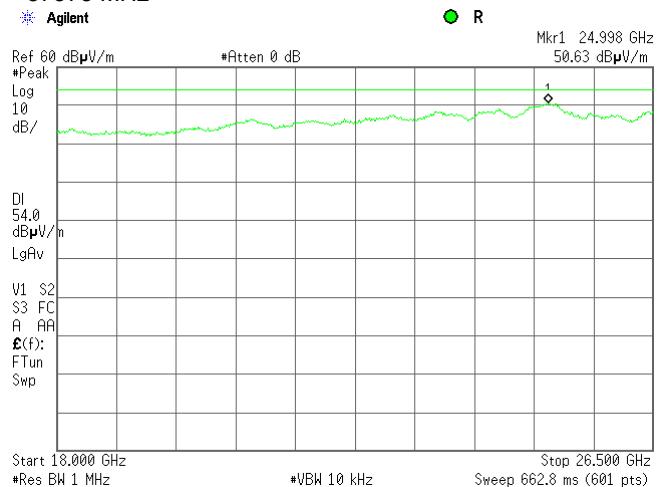

Mid frequency:

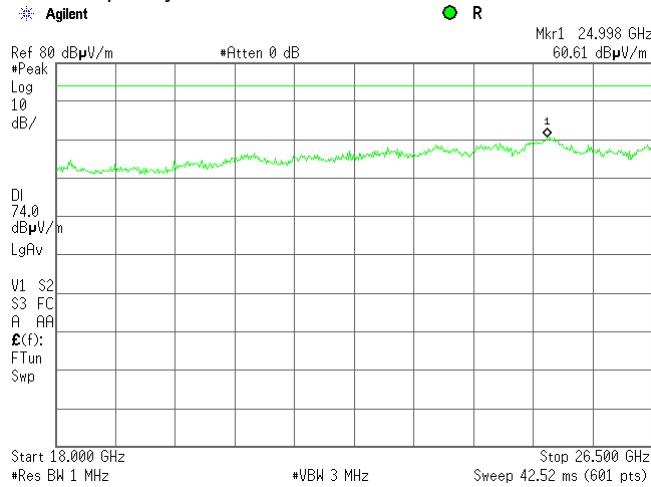

60375 MHz

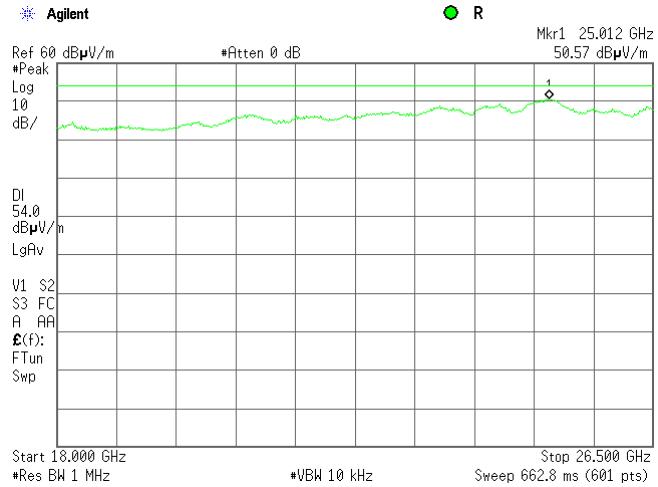



HERMON LABORATORIES


| | | | |
|----------------------------|--|---------------------------|--------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | Relative Humidity: | 51% |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Power Supply: | 48 VDC |
| Remarks: | | | |

Plot 7.4.14 Radiated emission measurements from 18000 to 26500 MHz


TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
DETECTOR:

Semi Anechoic Chamber
3 m
Vertical and Horizontal
Peak

High frequency:


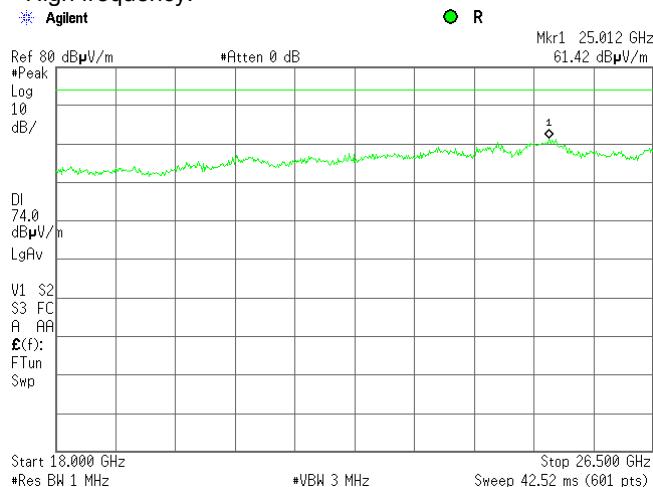


63375 MHz

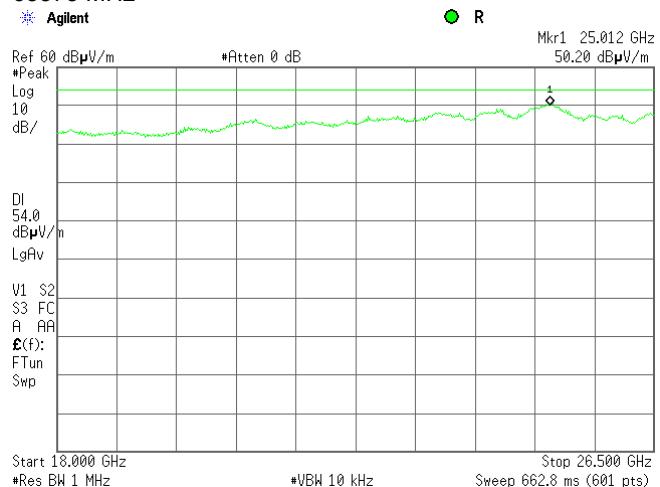**Plot 7.4.15 Radiated emission measurements from 26500 to 40000 MHz**

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
DETECTOR:
LOW FREQUENCY:

Semi Anechoic Chamber
3 m
Vertical and Horizontal
Peak
57375 MHz

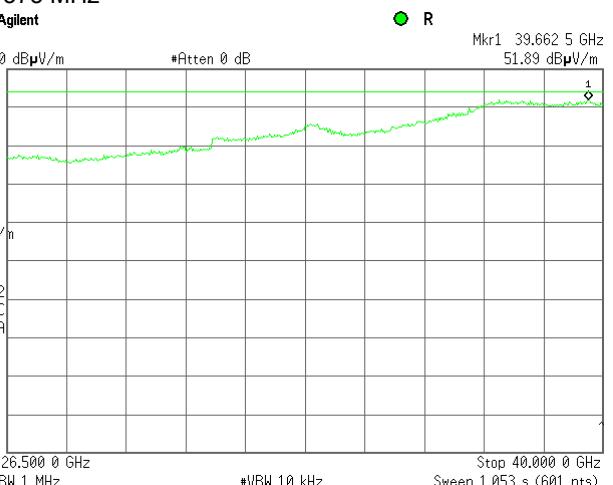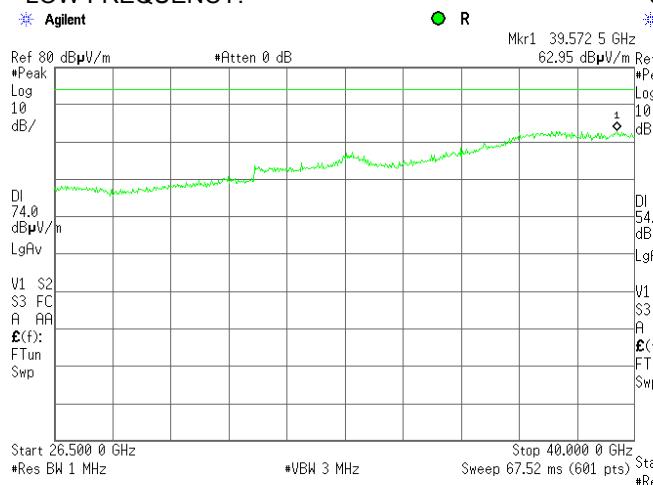



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(2), Out of band radiated emissions below 40 GHz | | |
| Test procedure: | 47 CFR, Section 2.1053; ANSI C63.10, Section 9.13 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 24.8°C | Air Pressure: 1012 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.4.16 Radiated emission measurements from 26500 to 40000 MHz

TEST SITE:

Semi Anechoic Chamber

TEST DISTANCE:

3 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR:

Peak

MID FREQUENCY:

60375 MHz

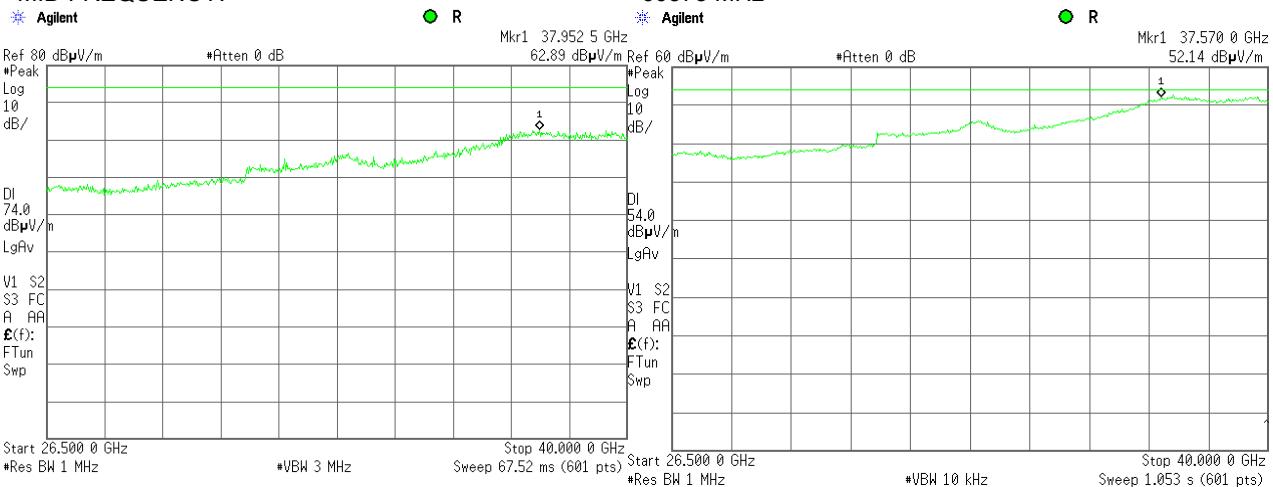**Plot 7.4.17 Radiated emission measurements from 26500 to 40000 MHz**

TEST SITE:

OATS

TEST DISTANCE:

3 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR:

Peak

HIGH FREQUENCY:

63375 MHz

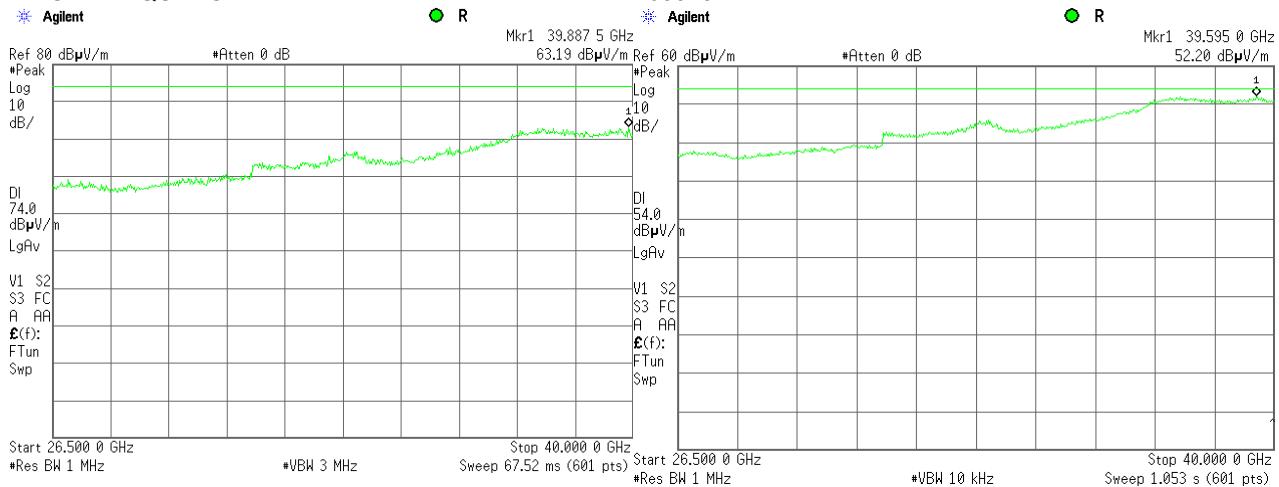



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

7.5 Out of band radiated emissions above 40 GHz up to 220 GHz

7.5.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.5.1, Table 7.5.2.

Table 7.5.1 Radiated spurious emission test limits

| Frequency, GHz | Equivalent field strength limit @ 3m, dB(μ V/m)*** |
|-------------------|---|
| 40– 200 | 85.3 |

* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows: $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

Table 7.5.2 Radiated spurious emission test limits

| Frequency, GHz | Power density at 3 m distance pW/cm ² | Distance, m | Field strength dB(μ V/m)*, peak | Field strength dB(μ V/m)*, average |
|-------------------|---|----------------|--|---|
| 40 – 220 | 90.0 | 3.0 | 105.3 | 85.3 |
| 75 - 90 | 90.0 | 0.7 | 118.1* | 98.1* |
| 90 - 110 | 90.0 | 0.15 | 131.3* | 111.3* |
| 110 - 140 | 90.0 | 0.05 | 140.9* | 120.9* |
| 140 - 200 | 90.0 | 0.01 | 154.8* | 134.8* |

*- The limit for other test distance was calculated using the inverse distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 20 \log (S_1/S_2)$$

7.5.2 Test procedure for spurious emission field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.

7.5.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.5.2.3 The test results are given in Table 7.5.3 and shown in the associated plots.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Figure 7.5.1 Radiated emissions above 40 GHz test set up

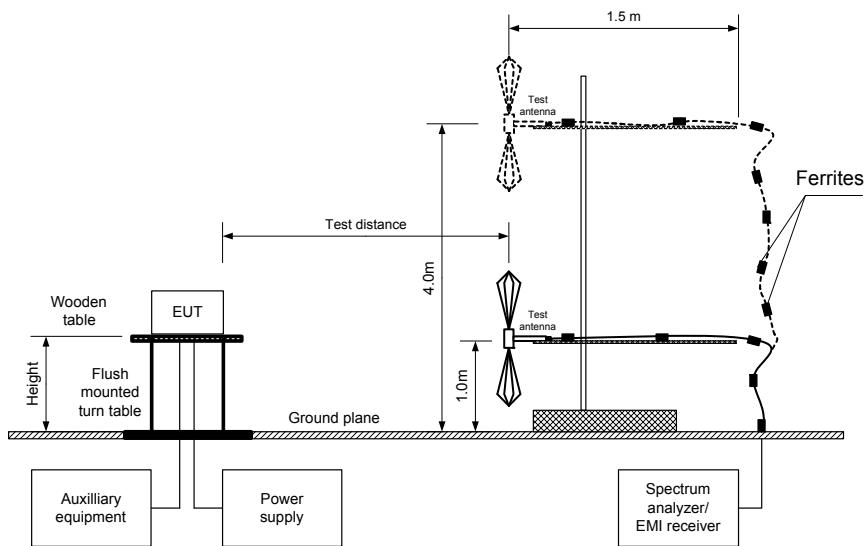



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.5.3 Out of band radiated emissions test results

| | |
|-------------------------------|---|
| TEST DISTANCE: | 0.05 - 3 m |
| EUT POSITION: | Typical (Vertical) |
| MODULATION: | QPSK |
| CHANNEL BANDWIDTH: | 250 MHz |
| TRANSMITTER OUTPUT POWER: | Maximum |
| INVESTIGATED FREQUENCY RANGE: | 40 – 220 GHz |
| RESOLUTION BANDWIDTH: | 1000 kHz |
| VIDEO BANDWIDTH: | ≥ Resolution bandwidth |
| TEST ANTENNA TYPE: | Standard Gain Horn 25dB (40-60 GHz) Standard Gain Horn 25dB (50-75 GHz) Standard Gain Horn 25dB (75-110 GHz) Standard Gain Horn 24dB (90-140 GHz) Standard Gain Horn 25dB (140-220 GHz) |

| Frequency, MHz | Antenna | | Azimuth, degrees* | Peak field strength(VBW=3 MHz) | | | Average field strength(VBW=1 kHz) | | | Verdict |
|---|----------|-----------|-------------------|--------------------------------|-----------------|--------------|-----------------------------------|-----------------|--------------|---------|
| | Polariz. | Height, m | | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB** | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB** | |
| Low carrier frequency 57375 MHz | | | | | | | | | | |
| | | | | No emissions were found | | | | | | Pass |
| Mid carrier frequency 60375 MHz | | | | | | | | | | |
| | | | | No emissions were found | | | | | | Pass |
| High carrier frequency 63375 MHz | | | | | | | | | | |
| | | | | No emissions were found | | | | | | Pass |

*- EUT front panel refer to 0 degrees position of turntable.

**- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0747 | HL 0748 | HL 0770 | HL 0771 | HL 0772 | HL 1295 | HL 1299 | HL 1303 |
| HL 1304 | HL 1306 | HL 1312 | HL 2909 | HL 3235 | HL 3290 | HL 3291 | HL 3294 |
| HL 3297 | HL 3305 | HL 3329 | HL 3433 | HL 3434 | HL 3536 | HL 3901 | HL 4023 |

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.1 Radiated emission measurements from 40 to 50 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:





3 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

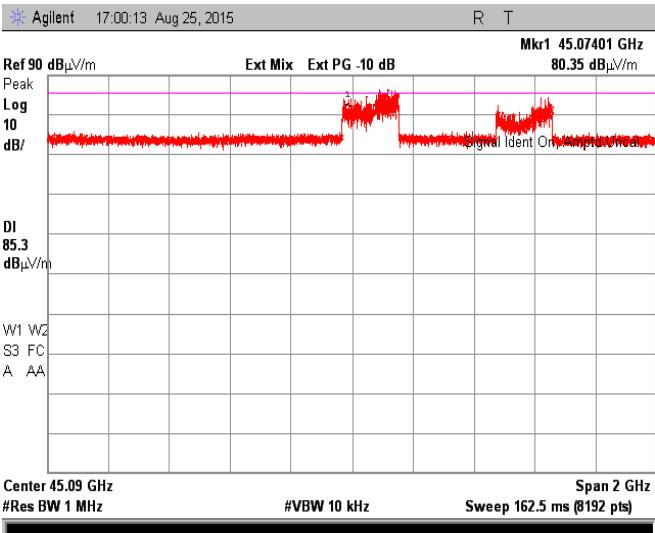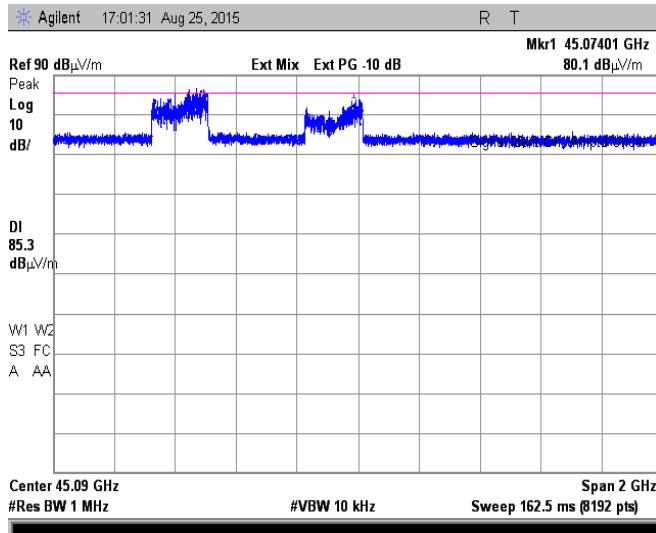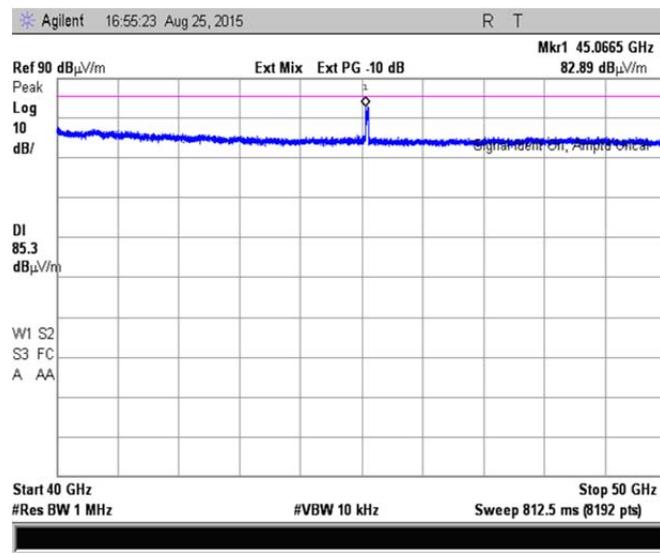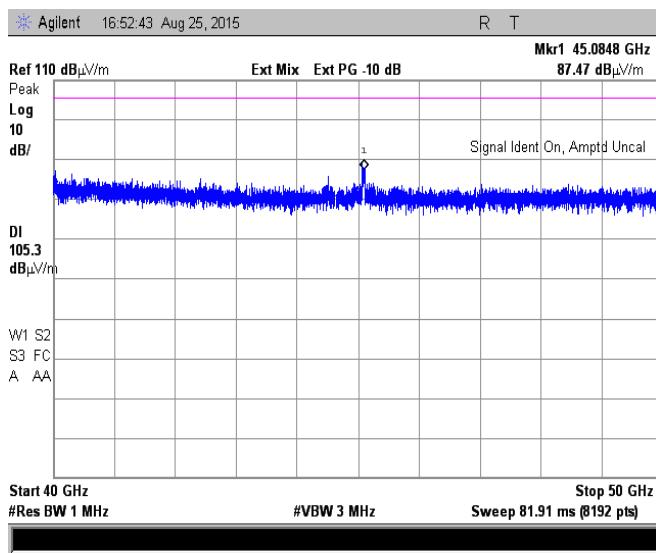



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.2 Radiated emission measurements from 50 to 57 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:



3 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

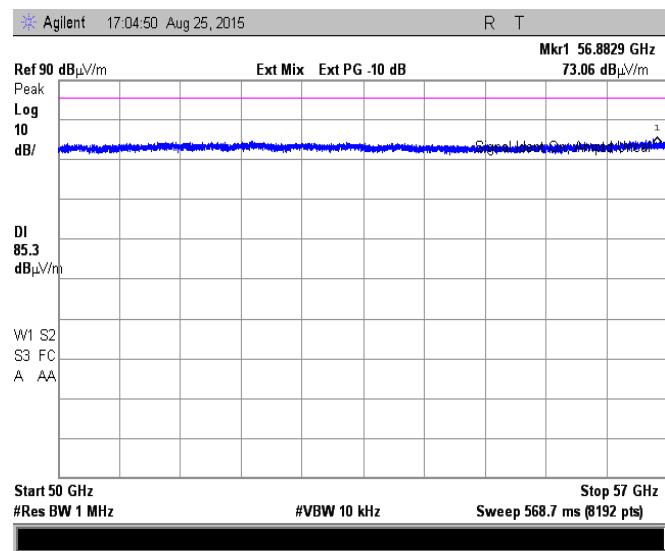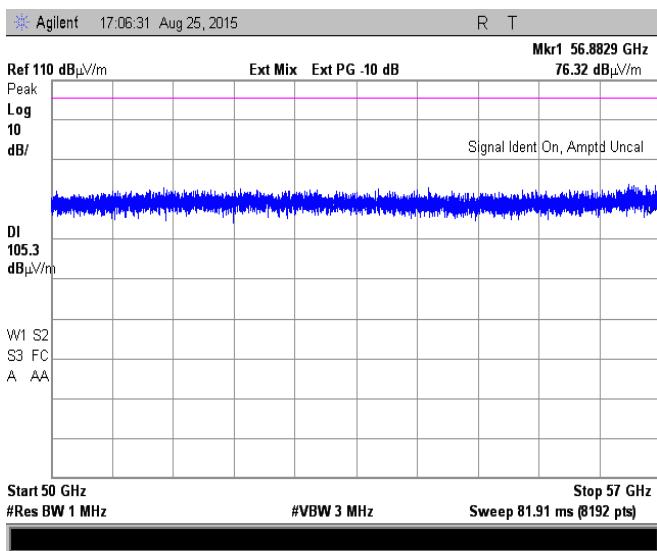



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.3 Radiated emission measurements from 40 to 57 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:


3 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

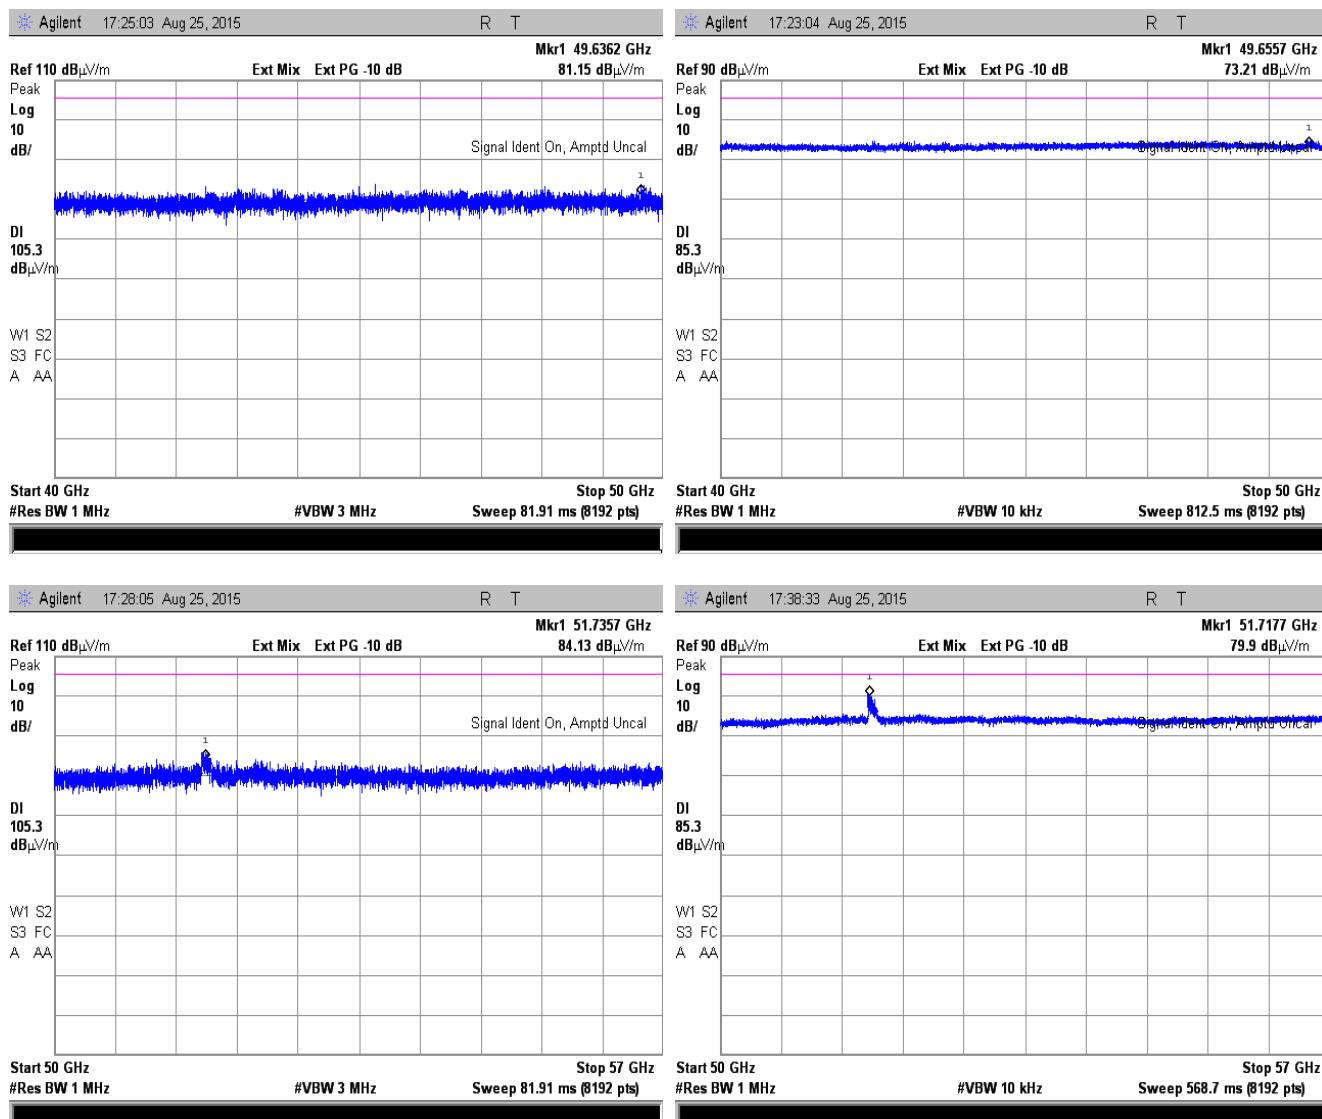



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.4 Radiated emission measurements from 40 to 57 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:





3 m

ANTENNA POLARIZATION:

Vertical & Horizontal

DETECTOR: Peak

DETECTOR: Average

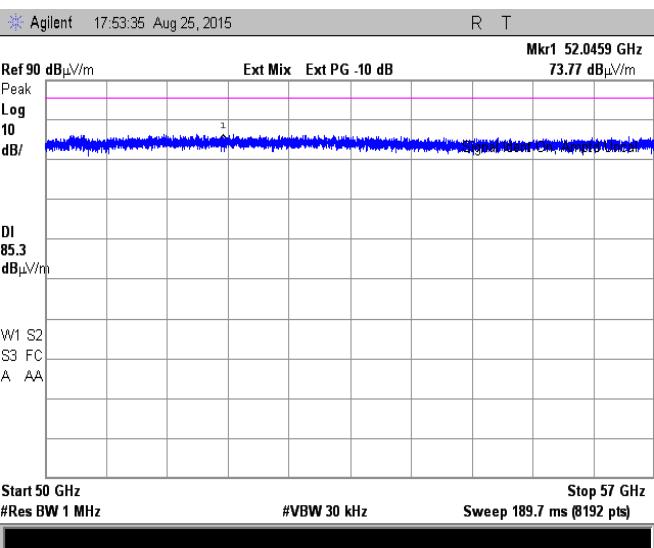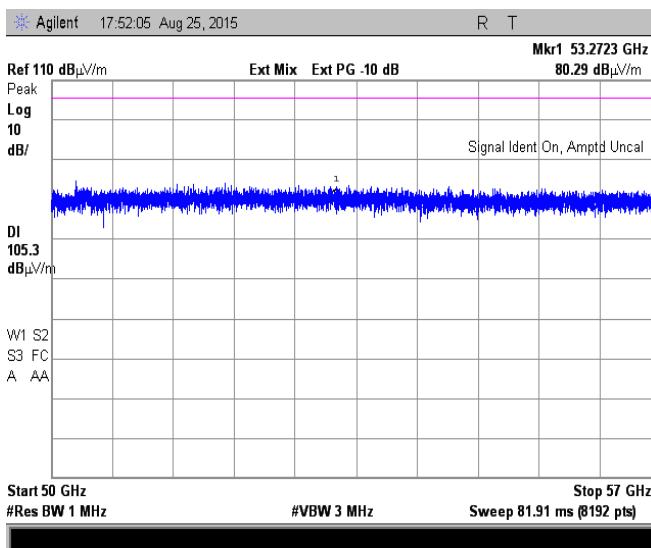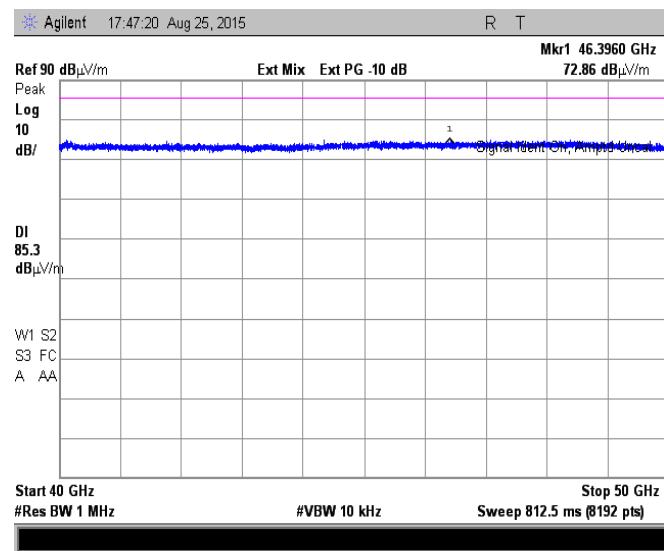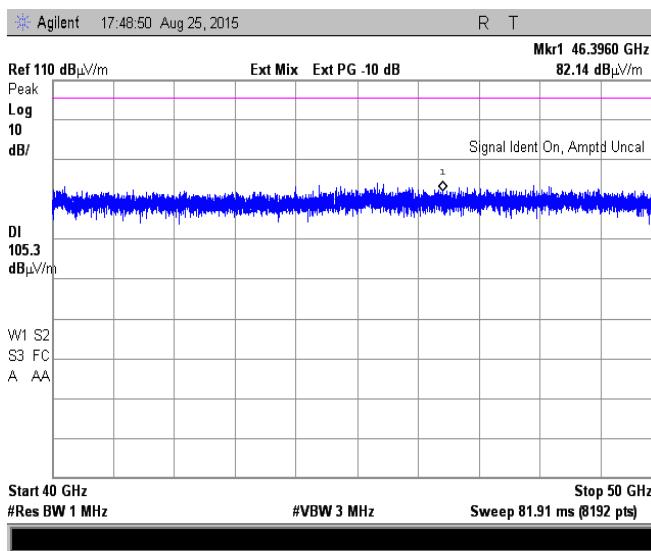



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.5 Radiated emission measurements from 64 to 75 GHz at the low frequency

TEST SITE:

Semi Anechoic Chamber

TEST DISTANCE:



3 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

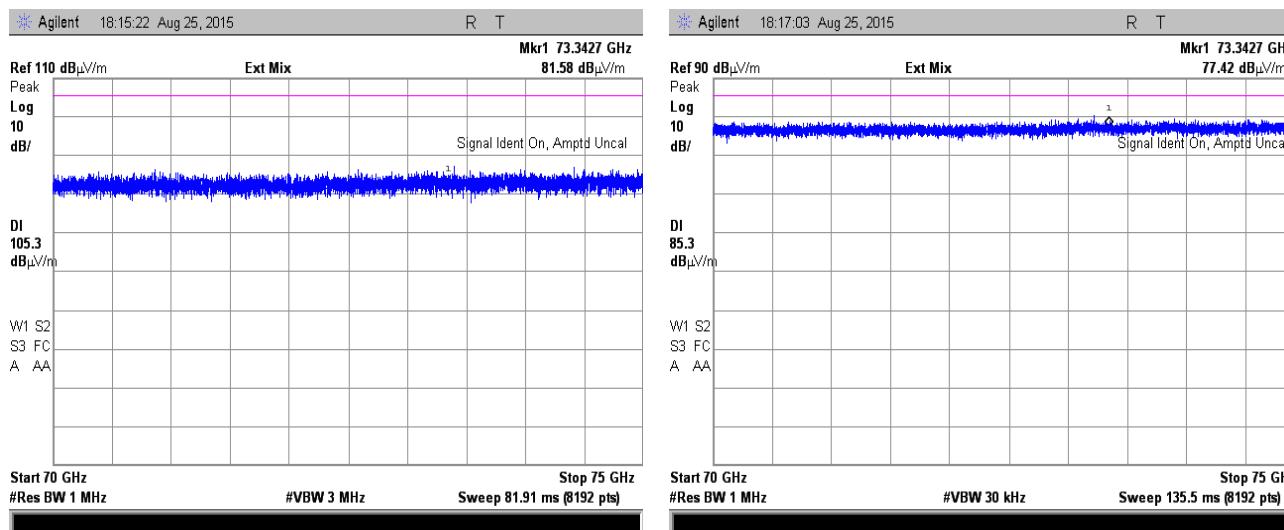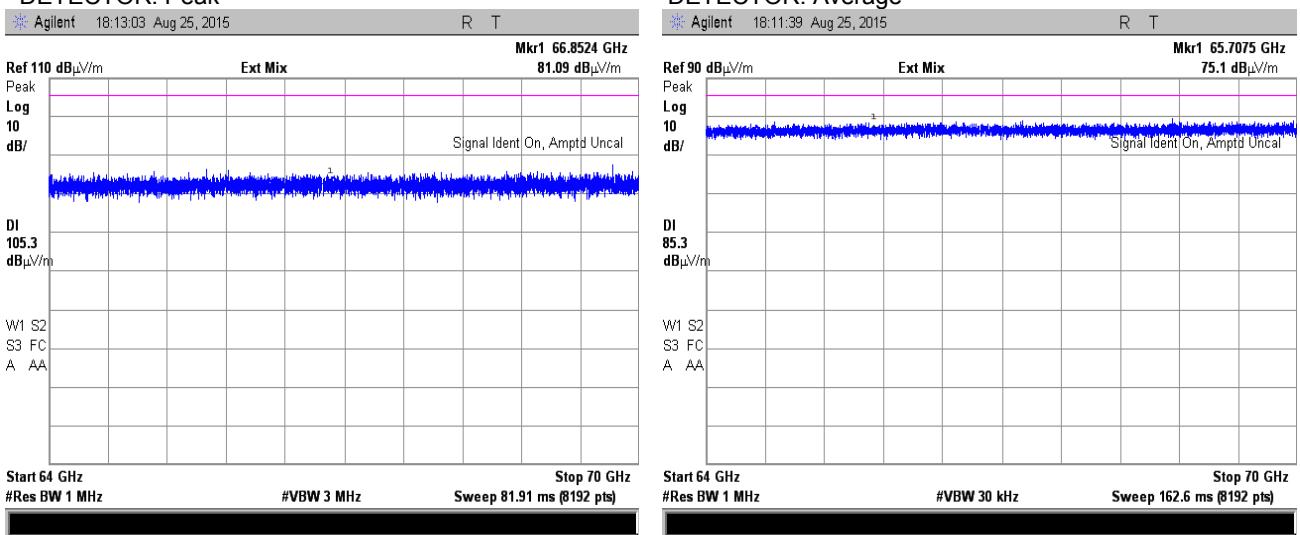



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.6 Radiated emission measurements from 64 to 75 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:





3m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

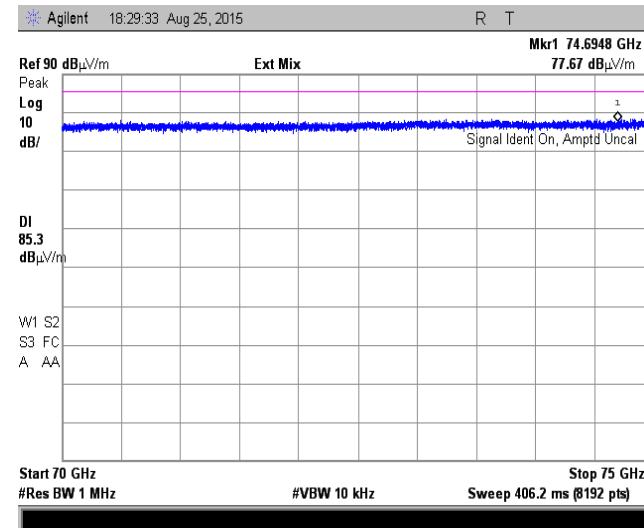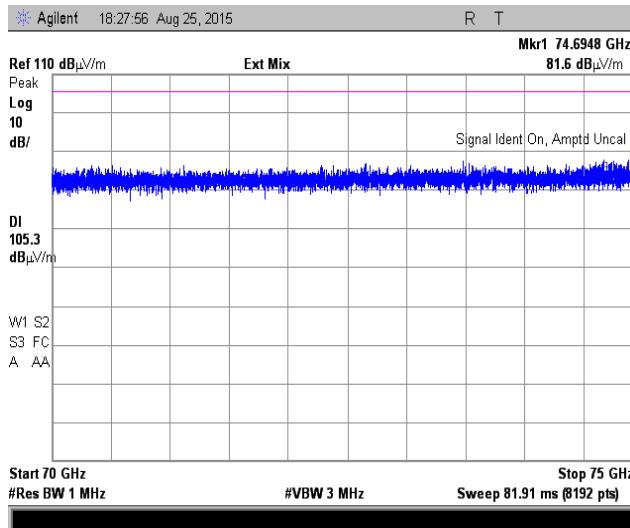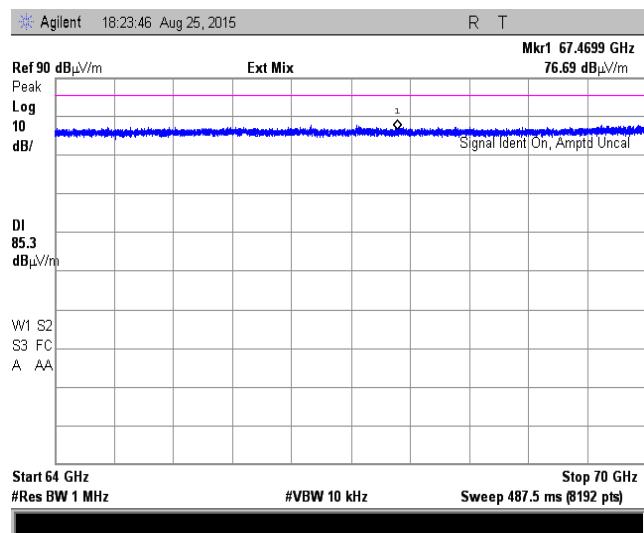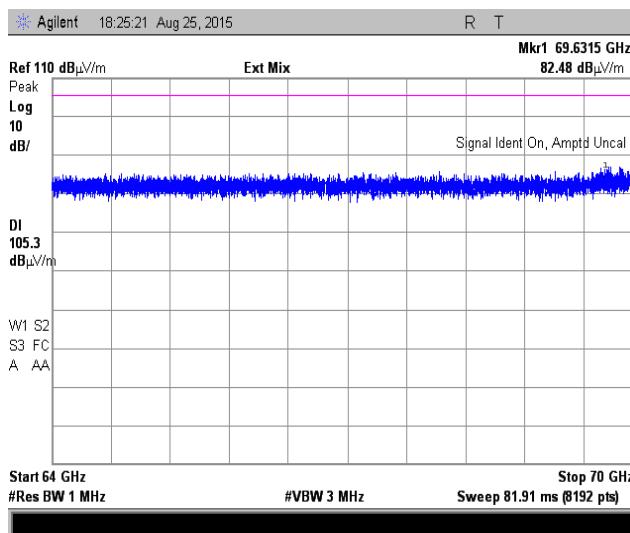



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.7 Radiated emission measurements from 64 to 75 GHz at the high frequency

TEST SITE:

TEST DISTANCE:

TEST DISTANCE: ANTENNA POLARIZATION:




ANTENNA GEAR DETECTOR: Peak

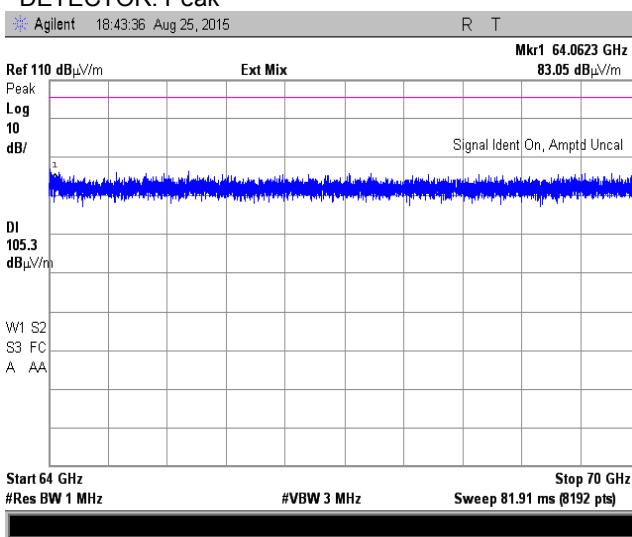

3 m

Vertical and Horizontal

Vertical and Horizontal DETECTOR: Average

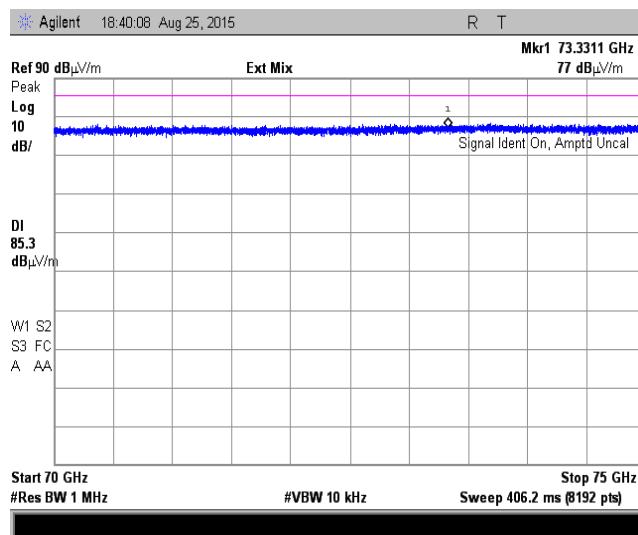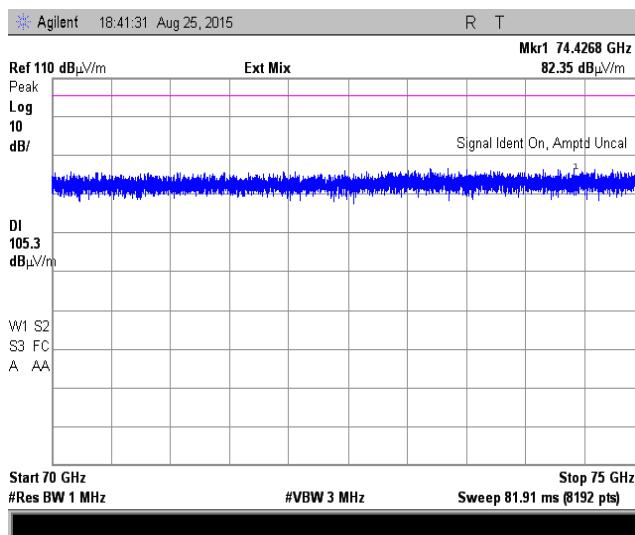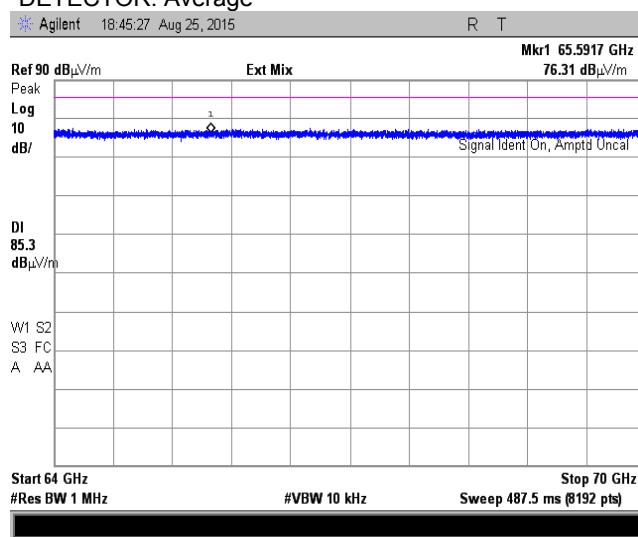



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.8 Radiated emission measurements from 75 to 82 GHz at the low frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

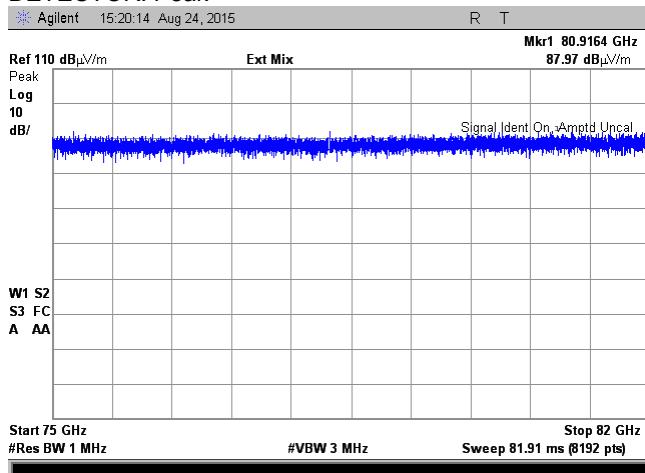


OATS

0.7 m

Vertical and Horizontal

DETECTOR: Average

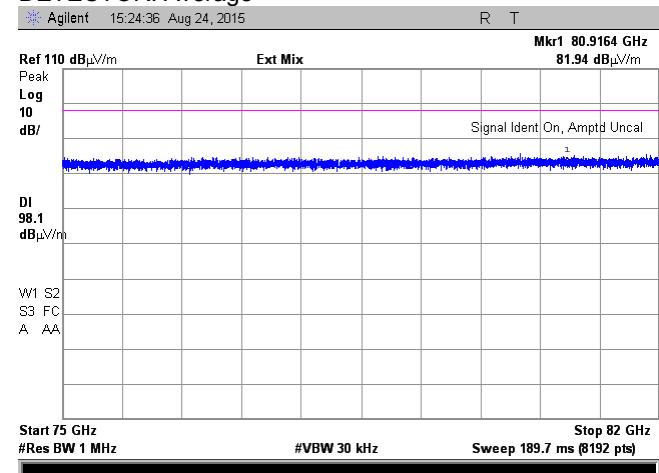

Peak 118.1 dB μ V/m, average 98.1 dB μ V/m limits applied.
No spurious were found.


Plot 7.5.9 Radiated emission measurements from 82 to 90 GHz at the low frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

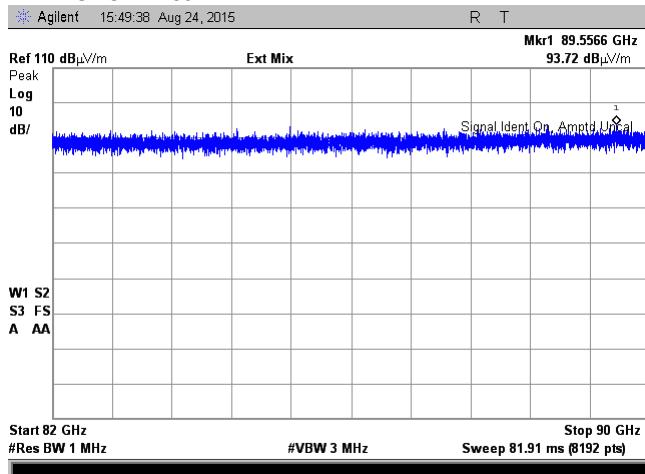


OATS

0.7 m

Vertical and Horizontal

DETECTOR: Average

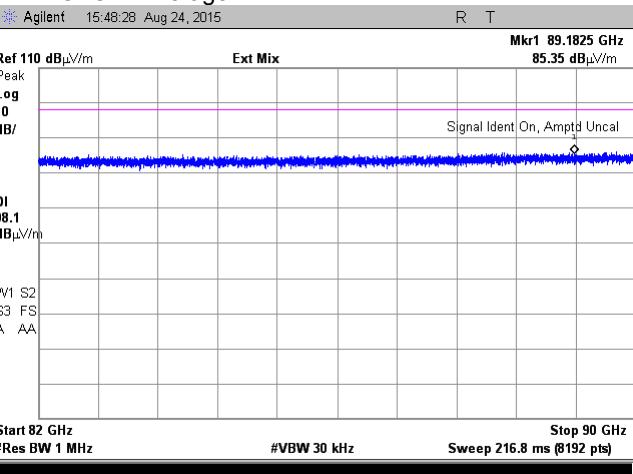Peak 118.1 dB μ V/m, average 98.1 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.10 Radiated emission measurements from 90 to 100 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:


0.15 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

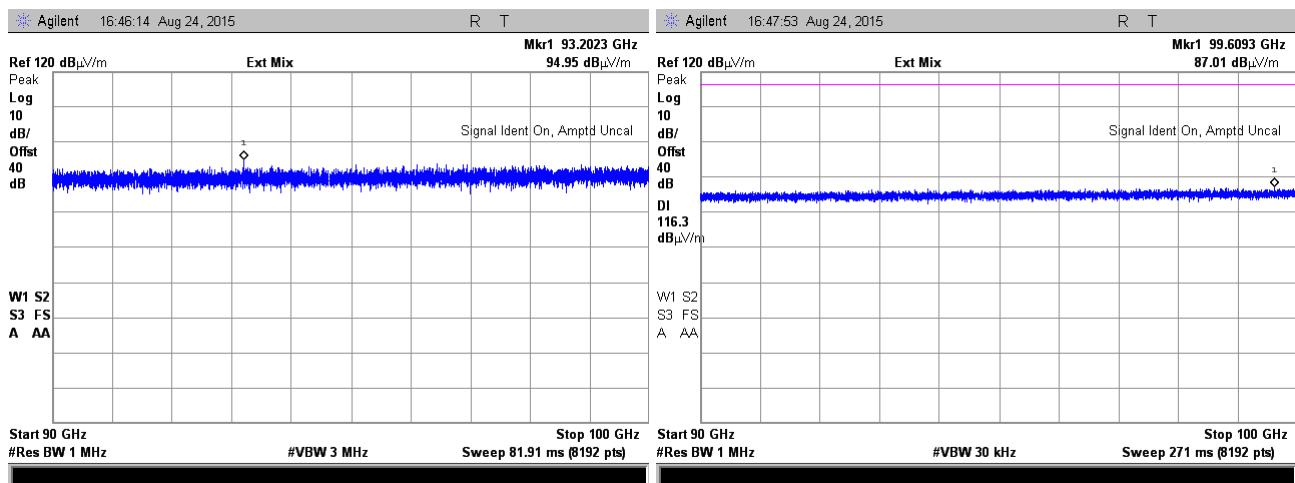

Peak 131.3 dBuV/m, average 111.3 dBuV/m limits applied



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.11 Radiated emission measurements from 100 to 110 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:

0.15 m

ANTENNA POLARIZATION:



Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 17:14:19 Aug 24, 2015

R T

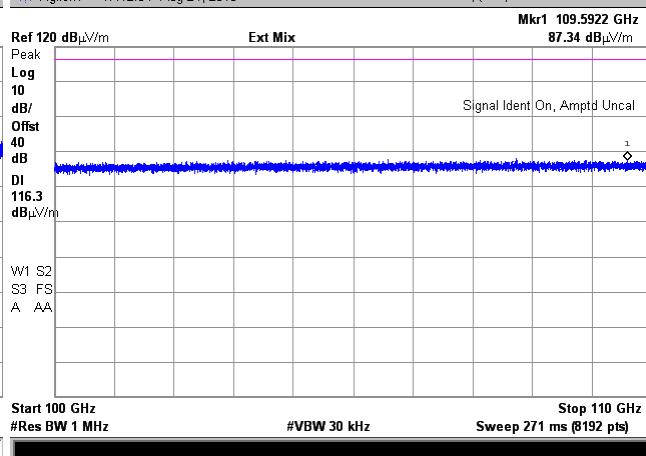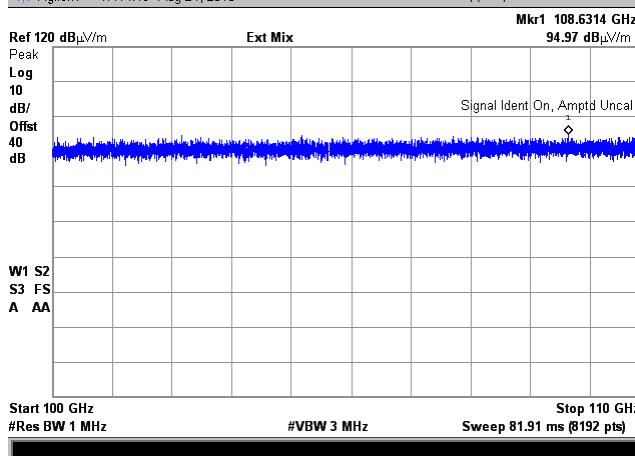Peak 131.3 dB μ V/m, average 111.3 dB μ V/m limits applied**Plot 7.5.12 Radiated emission measurements from 75 to 82 GHz at the mid frequency**

TEST SITE:

OATS

TEST DISTANCE:

0.7 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average


Agilent 15:30:01 Aug 24, 2015

R T

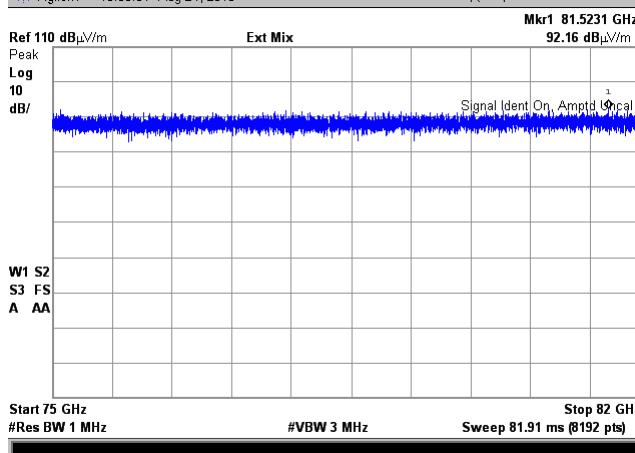

Agilent 15:28:31 Aug 24, 2015

R T

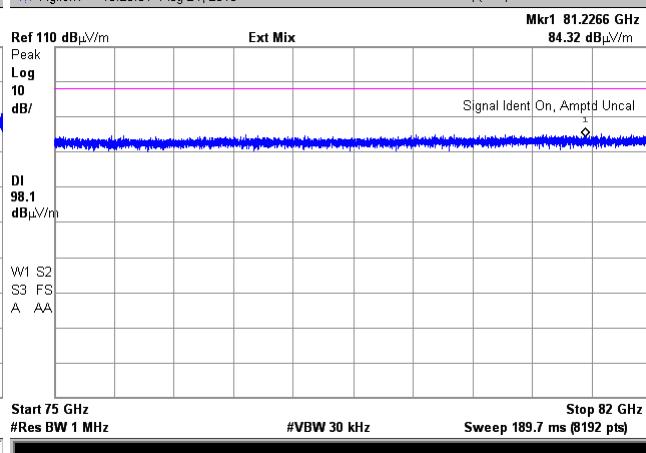Peak 118.1 dB μ V/m, average 98.1 dB μ V/m limits applied



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.13 Radiated emission measurements from 82 to 90 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:

0.7 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 15:44:37 Aug 24, 2015

R T

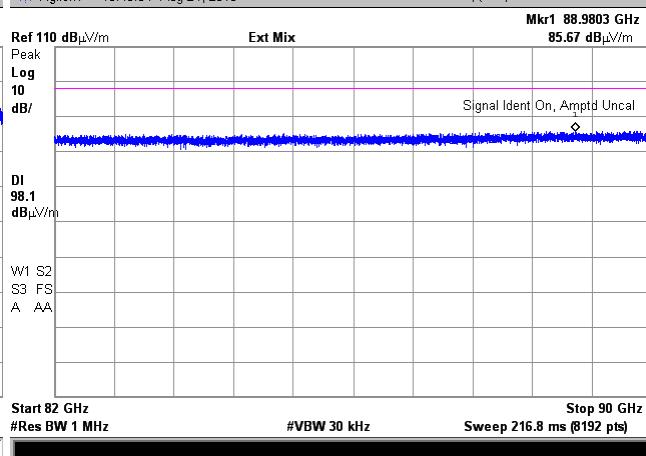Peak 118.1 dB μ V/m, average 98.1 dB μ V/m limits applied**Plot 7.5.14 Radiated emission measurements from 90 to 100 GHz at the mid frequency**

TEST SITE:

OATS

TEST DISTANCE:

0.15 m

ANTENNA POLARIZATION:



Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 16:52:00 Aug 24, 2015

R T

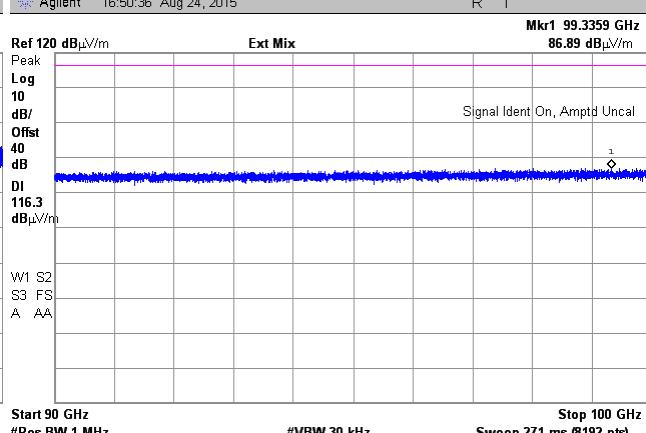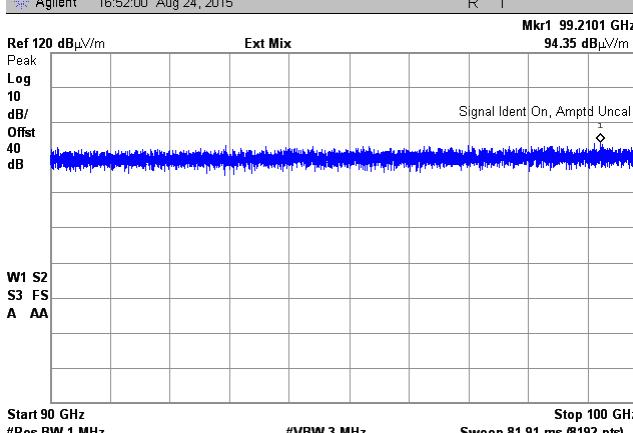Peak 131.3 dB μ V/m, average 111.3 dB μ V/m limits applied





HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.15 Radiated emission measurements from 100 to 110 GHz at the mid frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
DETECTOR: Peak

OATS
0.15 m
Vertical and Horizontal
DETECTOR: Average

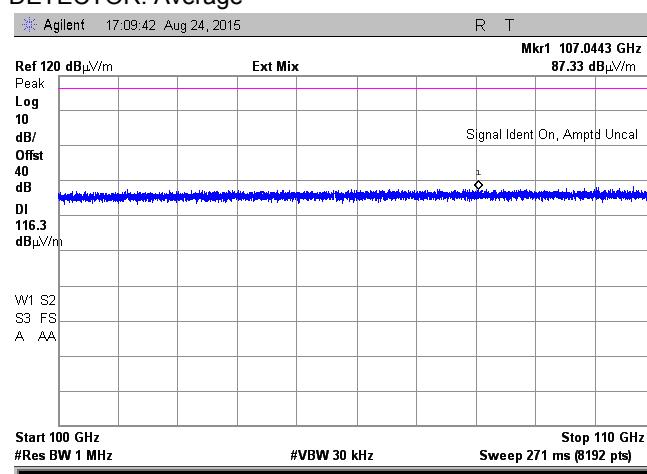
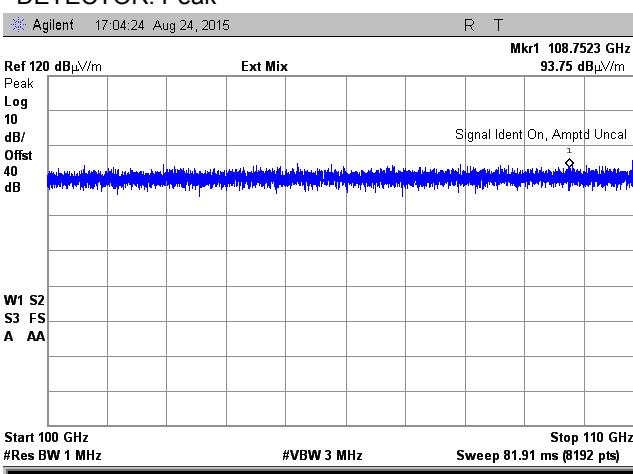


Peak 131.3 dBuV/m, average 111.3 dBuV/m limits applied.

Plot 7.5.16 Radiated emission measurements from 75 to 82 GHz at the high frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
DETECTOR: Peak

OATS
0.7 m
Vertical and Horizontal
DETECTOR: Average

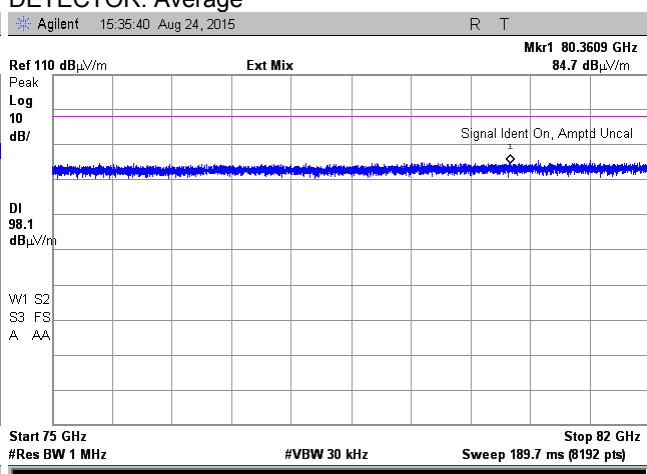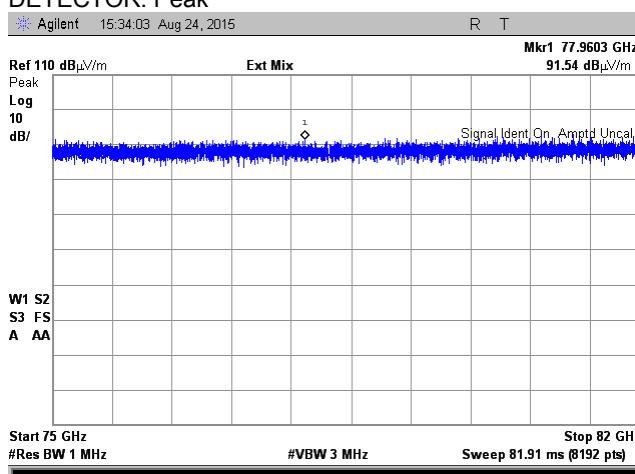

Peak limit 118.1 dBuV/m. average 98.1 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.17 Radiated emission measurements from 82 to 90 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.7 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 15:39:35 Aug 24, 2015

R T

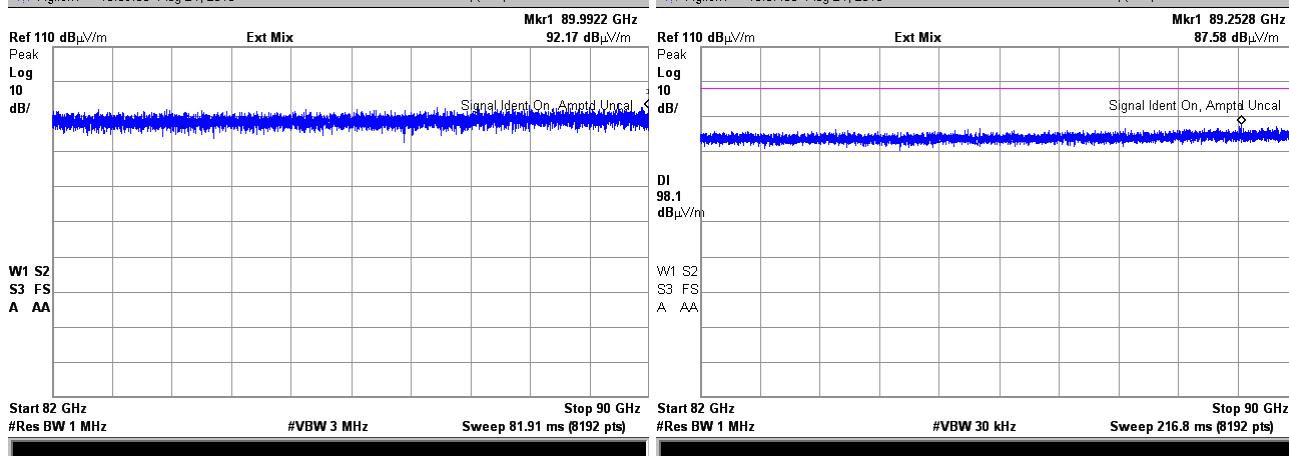

Peak 118.1 dBuV/m, average 98.1 dBuV/m limits applied

Plot 7.5.18 Radiated emission measurements from 90 to 100 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.15 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 16:55:12 Aug 24, 2015

R T

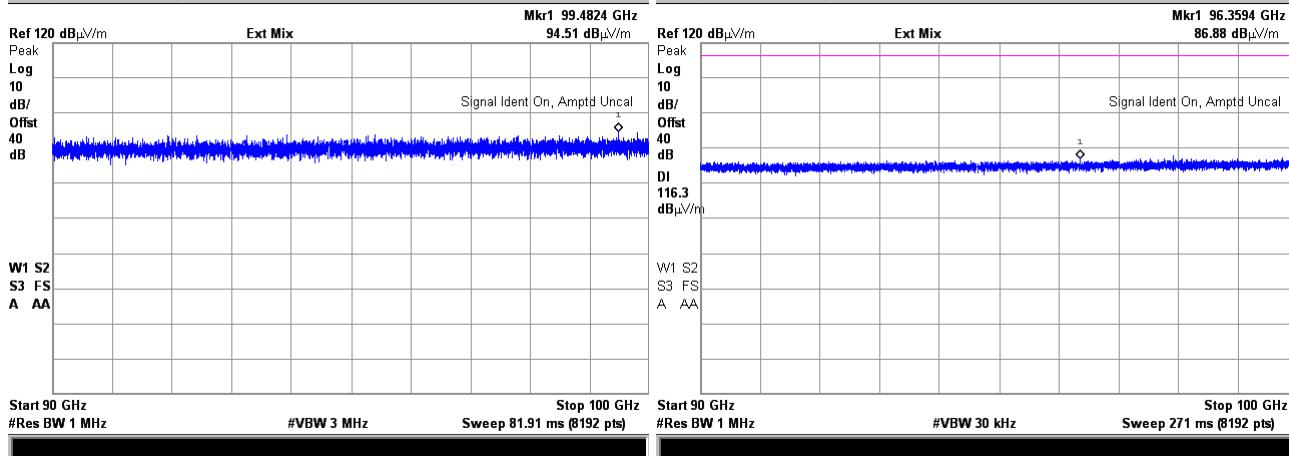

Peak 131.3 dBuV/m, average 111.3 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.19 Radiated emission measurements from 100 to 110 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.15 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 17:02:00 Aug 24, 2015

R T

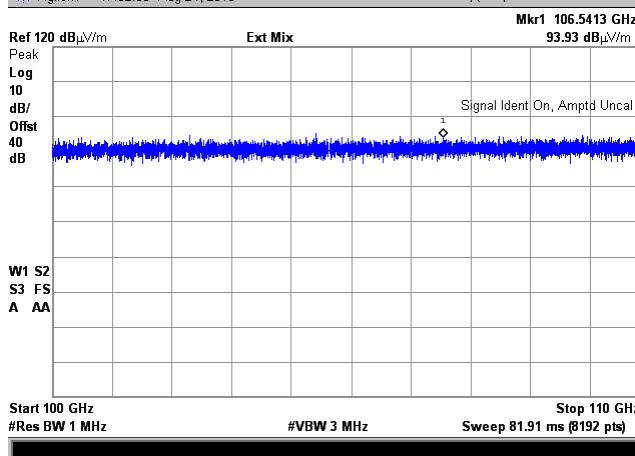

Peak 131.3 dBuV/m, average 111.3 dBuV/m limits applied.

Plot 7.5.20 Radiated emission measurements from 110 to 120 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:

0.05 m

ANTENNA POLARIZATION:



Vertical and horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 10:29:04 Aug 25, 2015

R T

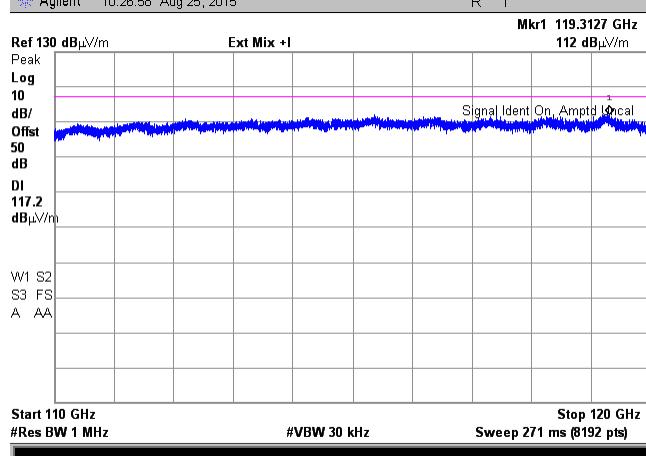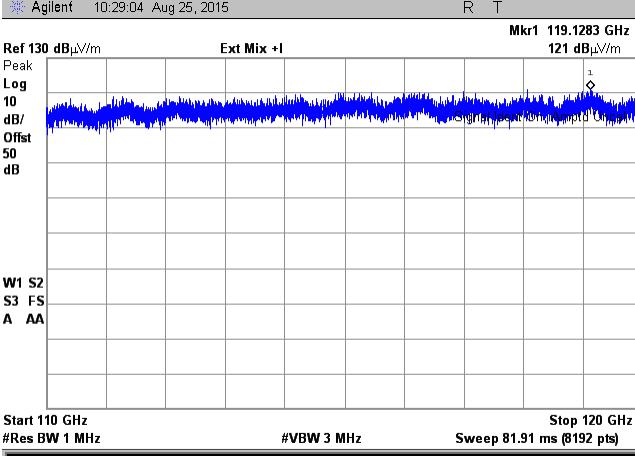

Peak 140.9 dBuV/m, average 120.9 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.21 Radiated emission measurements from 120 to 130 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:


0.05 m

ANTENNA POLARIZATION:

Vertical and horizontal

DETECTOR: Peak

DETECTOR: Average

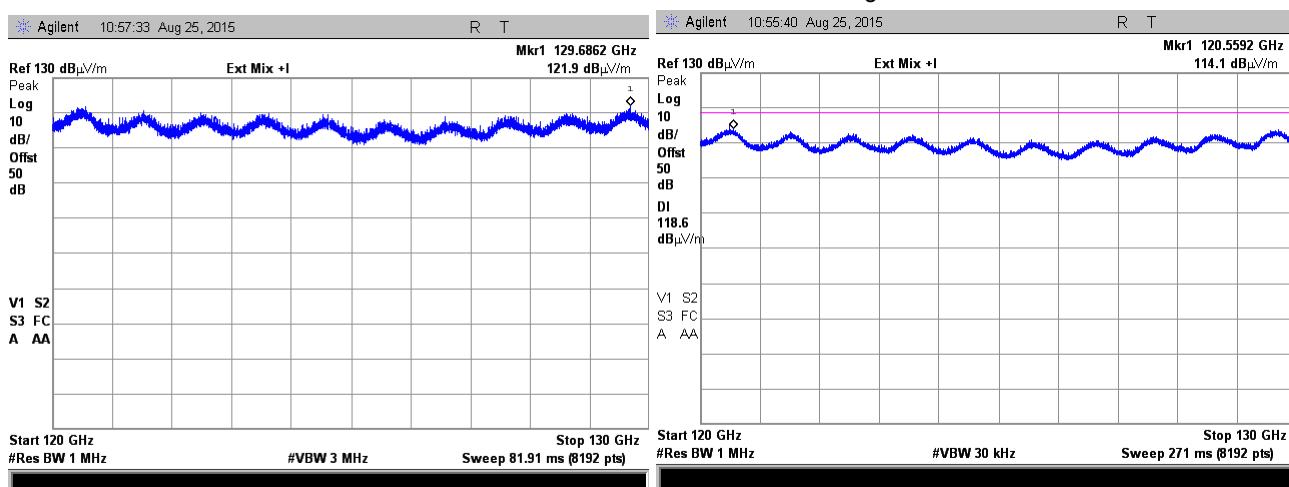Peak 140.9 dB μ V/m, average 120.9 dB μ V/m limits applied.**Plot 7.5.22 Radiated emission measurements from 130 to 140 GHz at the low frequency**

TEST SITE:

OATS

TEST DISTANCE:


0.05 m

ANTENNA POLARIZATION:

Vertical and horizontal

DETECTOR: Peak

DETECTOR: Average

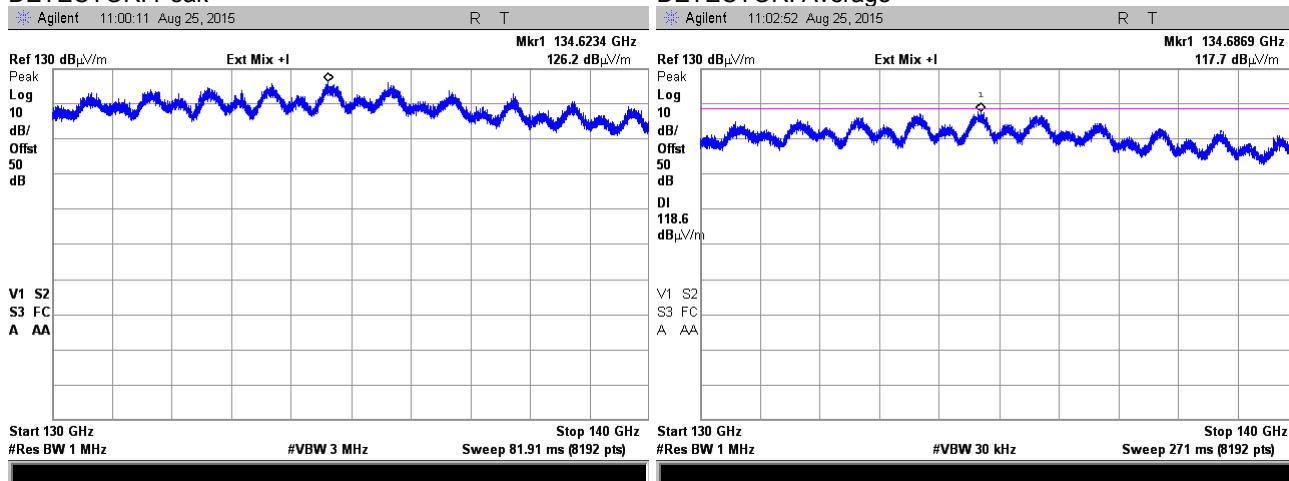Peak 140.9 dB μ V/m, average 120.9 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.23 Radiated emission measurements from 110 to 120 GHz at the mid frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

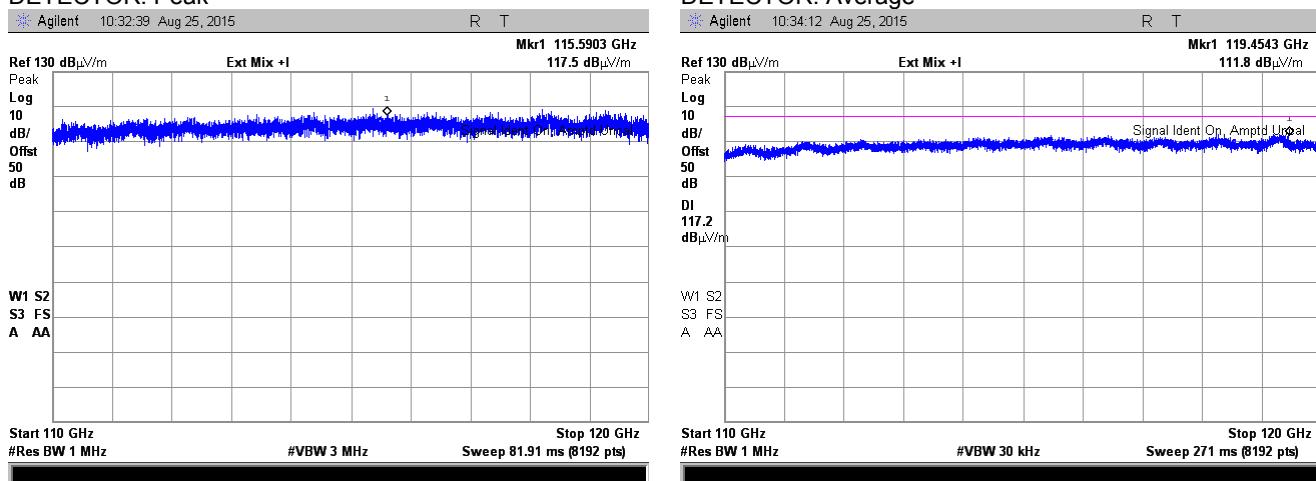
Peak 140.9 dB μ V/m, average 120.9 dB μ V/m limits applied.**Plot 7.5.24 Radiated emission measurements from 120 to 130 GHz at the mid frequency**

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

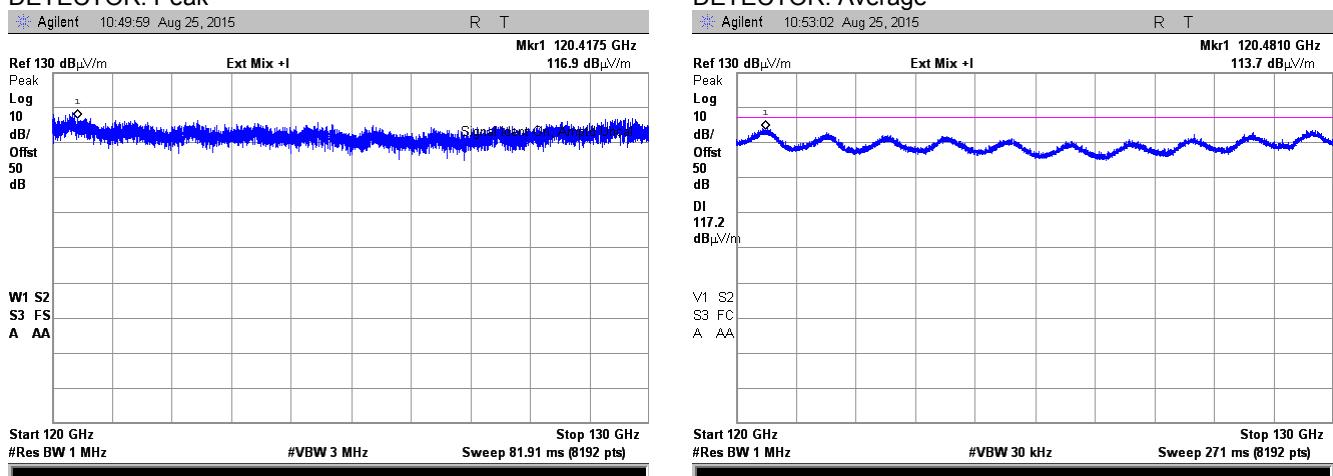Peak 140.9 dB μ V/m, average 120.9 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.25 Radiated emission measurements from 130 to 140 GHz at the mid frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

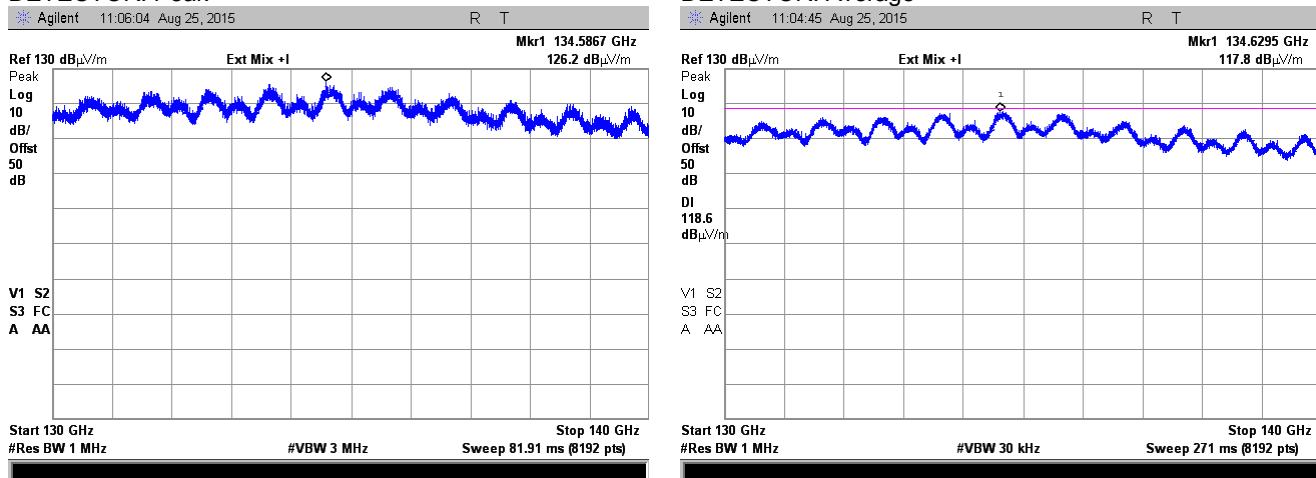

Peak 140.9 dBuV/m, average 120.9 dBuV/m limits applied.


Plot 7.5.26 Radiated emission measurements from 110 to 120 GHz at the high frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

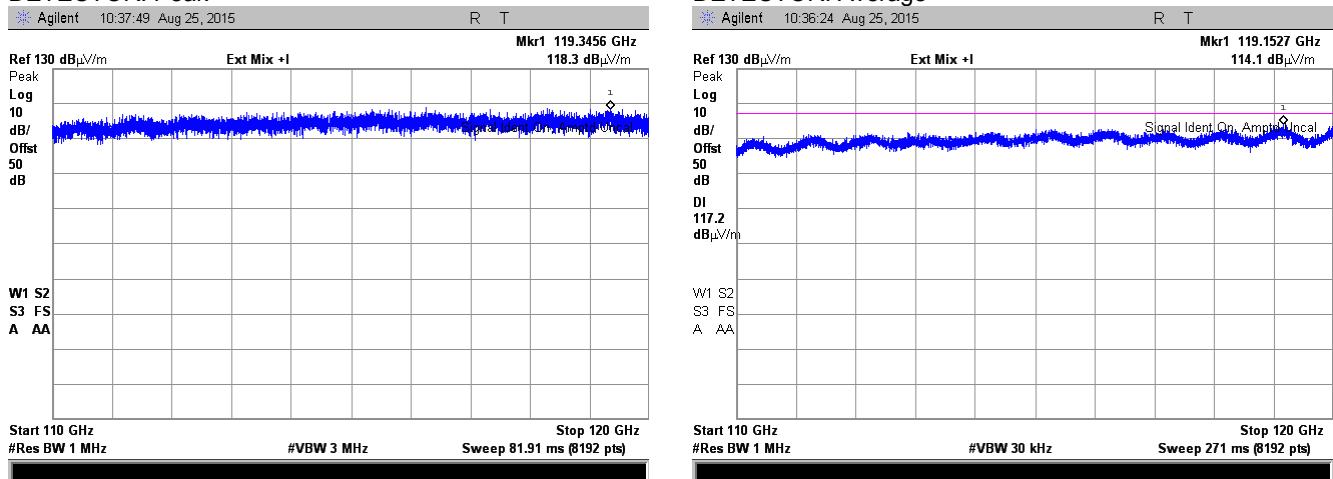

Peak 140.9 dBuV/m, average 120.9 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.27 Radiated emission measurements from 120 to 130 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.05 m

ANTENNA POLARIZATION:


Vertical and horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 10:48:02 Aug 25, 2015

R T

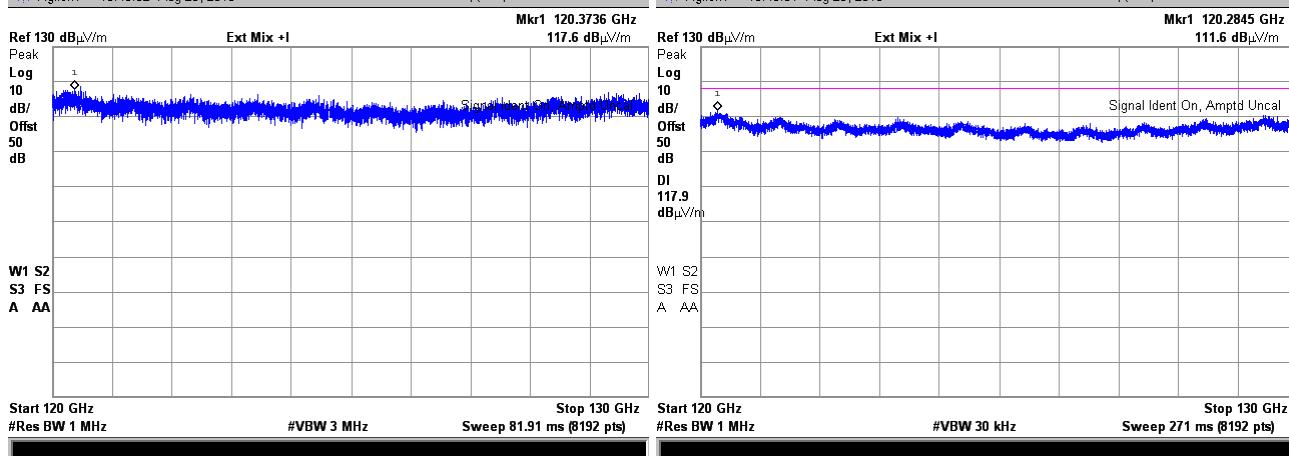

Peak 140.9 dBuV/m, average 120.9 dBuV/m limits applied.

Plot 7.5.28 Radiated emission measurements from 130 to 140 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.05 m

ANTENNA POLARIZATION:


Vertical and horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 11:08:24 Aug 25, 2015

R T

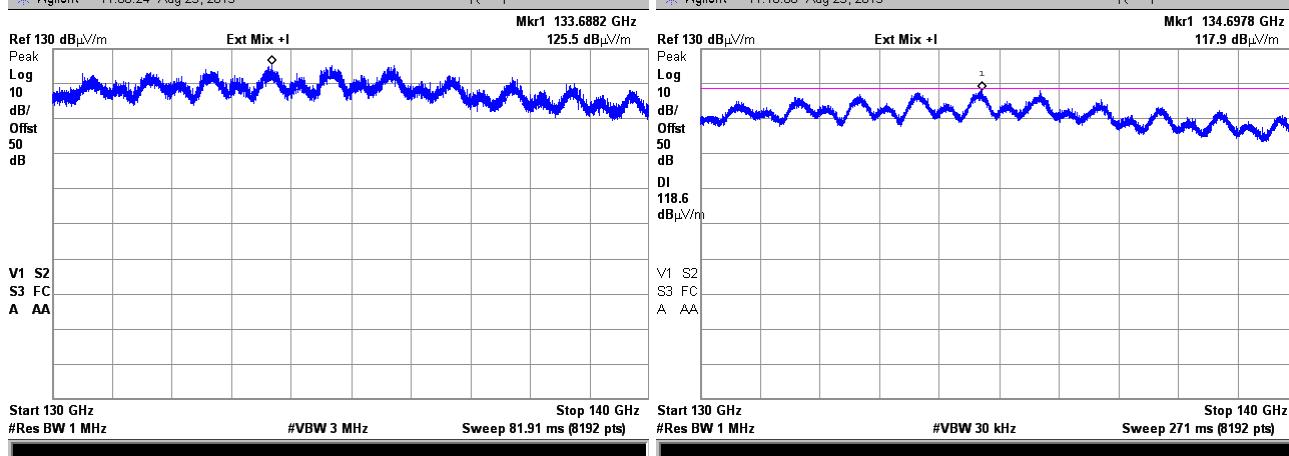

Peak 140.9 dBuV/m, average 120.9 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.29 Radiated emission measurements from 140 to 150 GHz at the low frequency

TEST SITE:

TEST DISTANCE:


ANTENNA POLARIZATION:

DETECTOR: Peak

Agilent 11:57:41 Aug 25, 2015

R T

Mkr1 142.3636 GHz

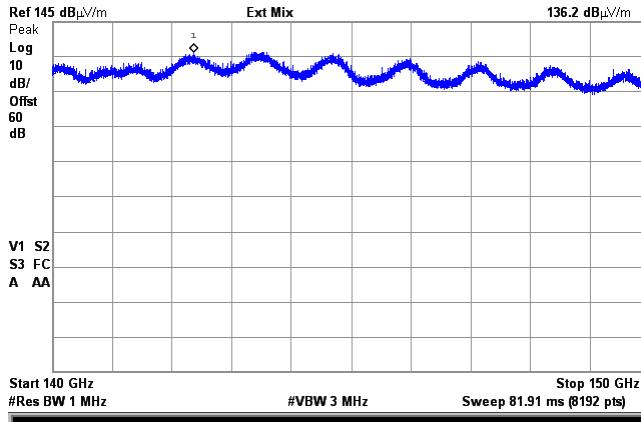

OATS

0.01 m


Vertical and Horizontal

DETECTOR: Average

Agilent 11:52:22 Aug 25, 2015

R T

Mkr1 143.4452 GHz

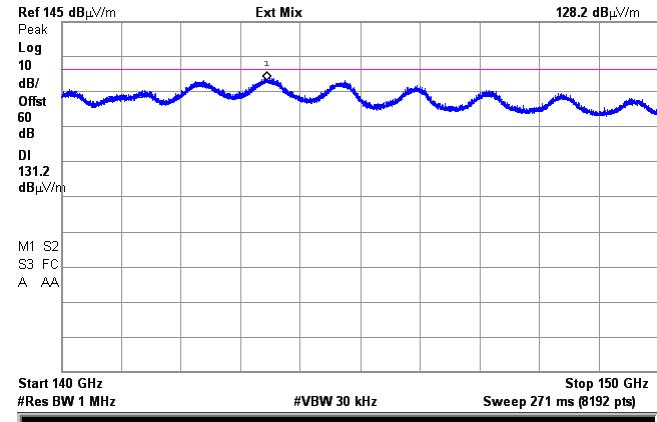Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.**Plot 7.5.30 Radiated emission measurements from 150 to 160 GHz at the low frequency**

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

OATS

0.01 m


Vertical and Horizontal

DETECTOR: Average

Agilent 13:27:49 Aug 25, 2015

R T


Mkr1 159.3127 GHz

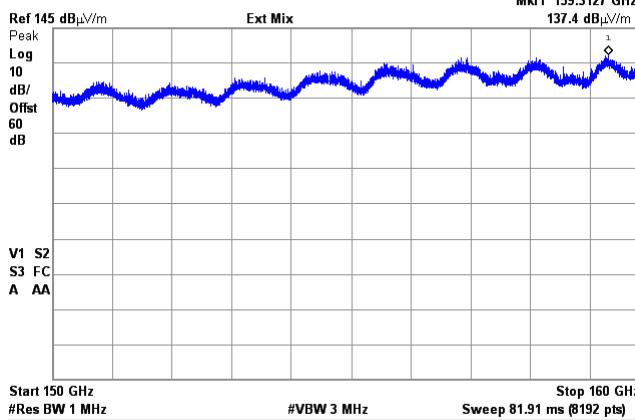

Agilent 13:30:57 Aug 25, 2015

R T

Mkr1 159.2663 GHz

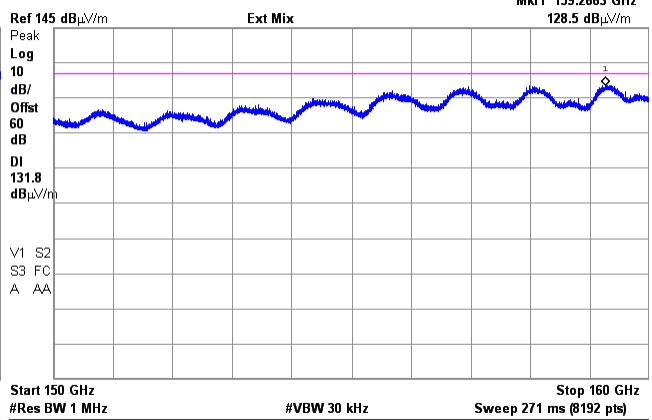Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.31 Radiated emission measurements from 160 to 170 GHz at the low frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

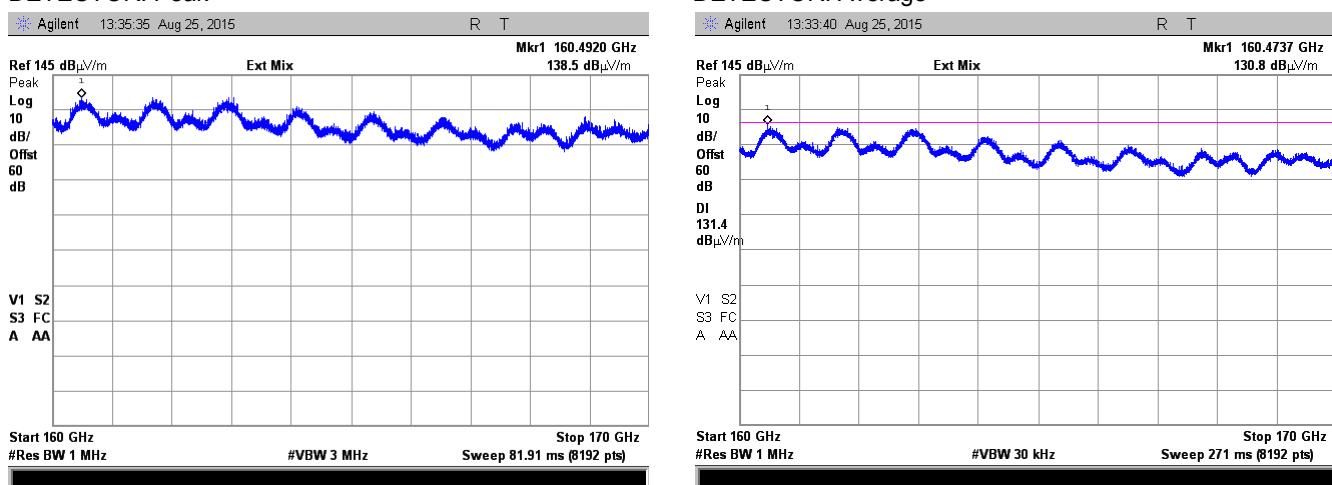

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.


Plot 7.5.32 Radiated emission measurements from 140 to 150 GHz at the mid frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

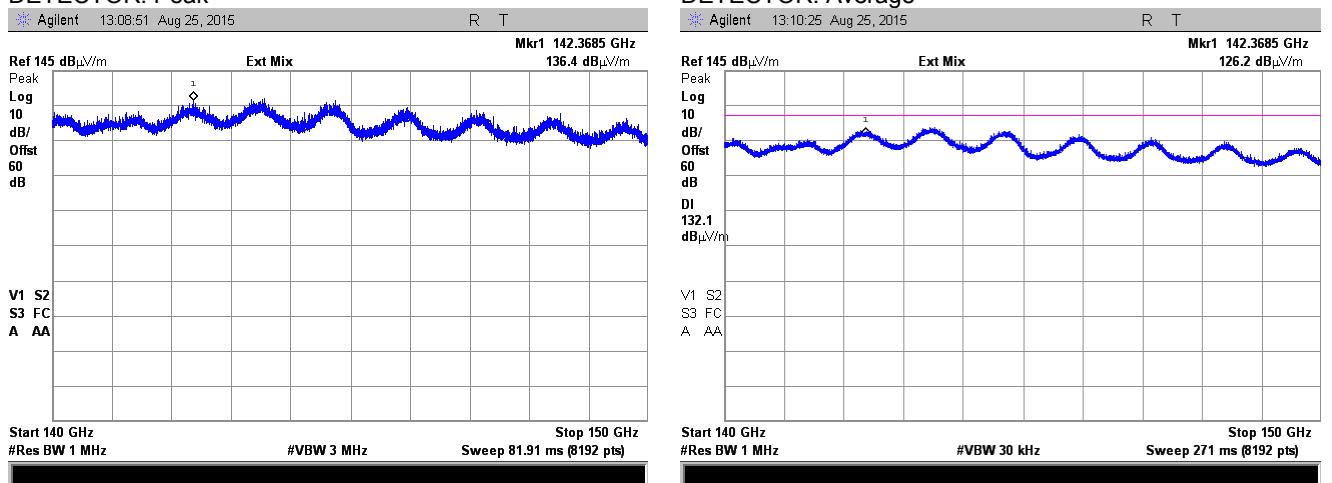

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.33 Radiated emission measurements from 150 to 160 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:

0.01 m

ANTENNA POLARIZATION:



Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 13:25:46 Aug 25, 2015

R T

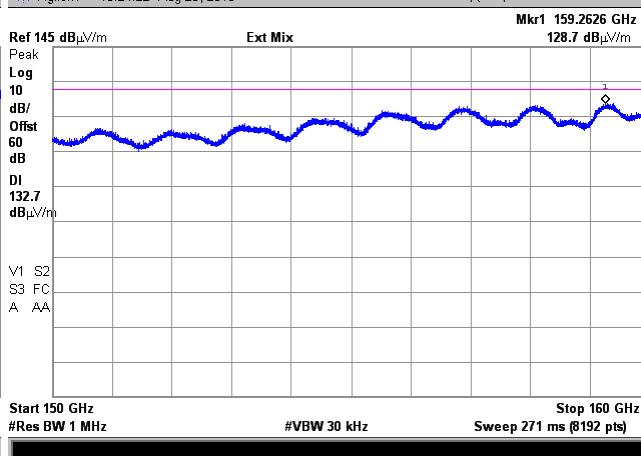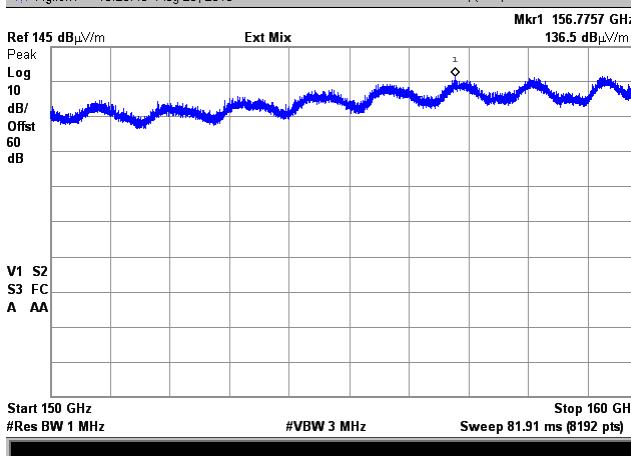Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.**Plot 7.5.34 Radiated emission measurements from 160 to 170 GHz at the mid frequency**

TEST SITE:

OATS

TEST DISTANCE:

0.01 m

ANTENNA POLARIZATION:



Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 13:35:35 Aug 25, 2015

R T

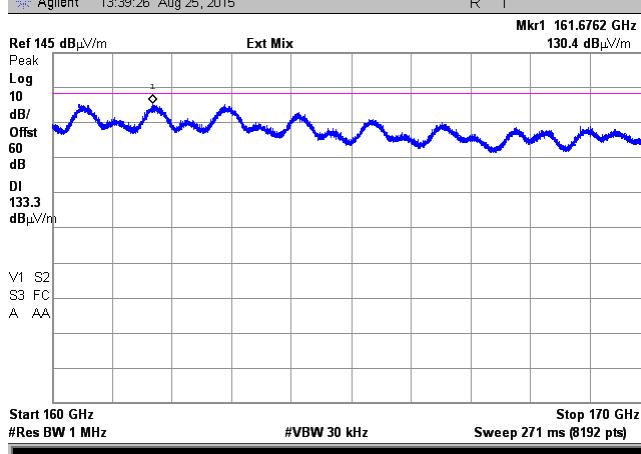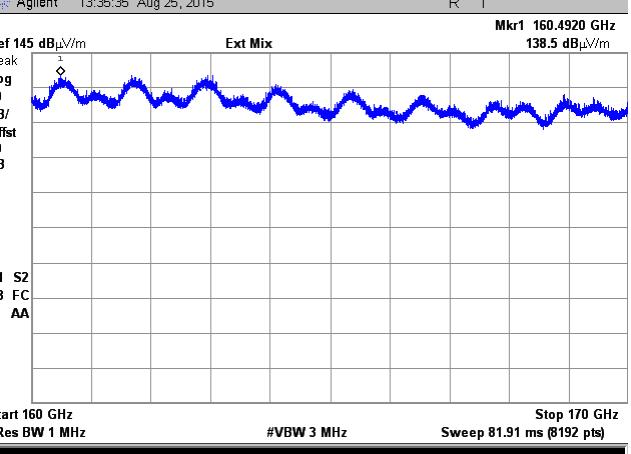Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |


Plot 7.5.35 Radiated emission measurements from 140 to 150 GHz at the high frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

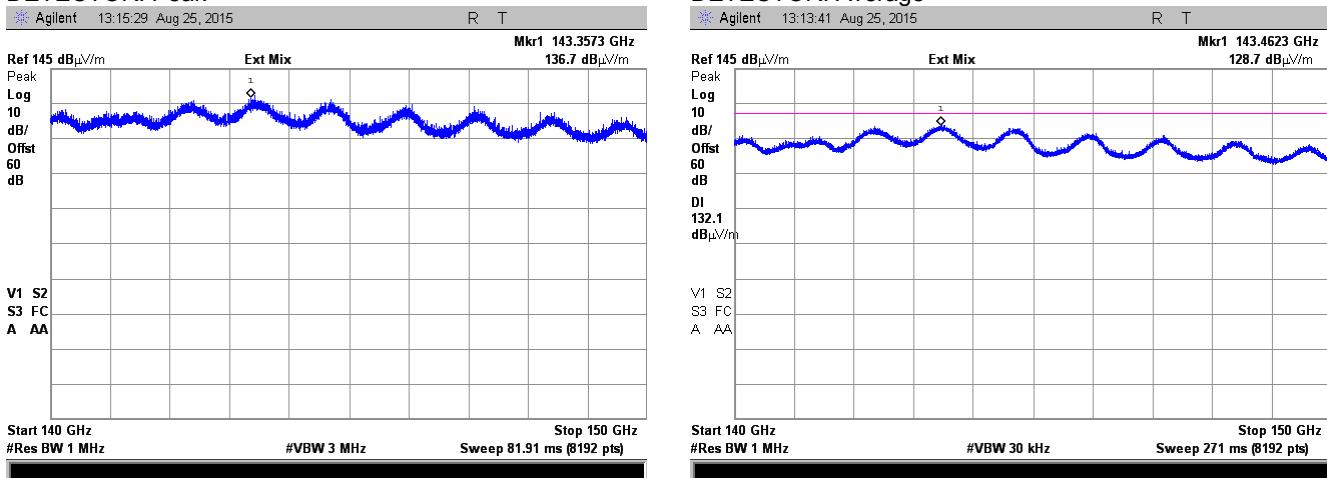

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.


Plot 7.5.36 Radiated emission measurements from 150 to 160 GHz at the high frequency

TEST SITE:

TEST DISTANCE:

ANTENNA POLARIZATION:

DETECTOR: Peak

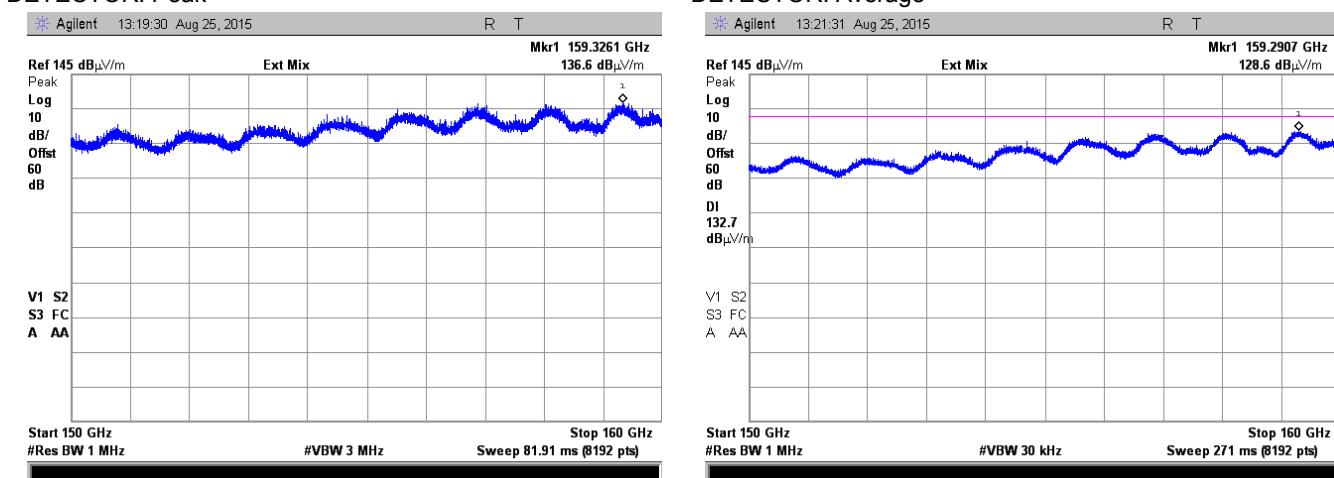

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.37 Radiated emission measurements from 160 to 170 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:

0.01 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 13:45:51 Aug 25, 2015

R T

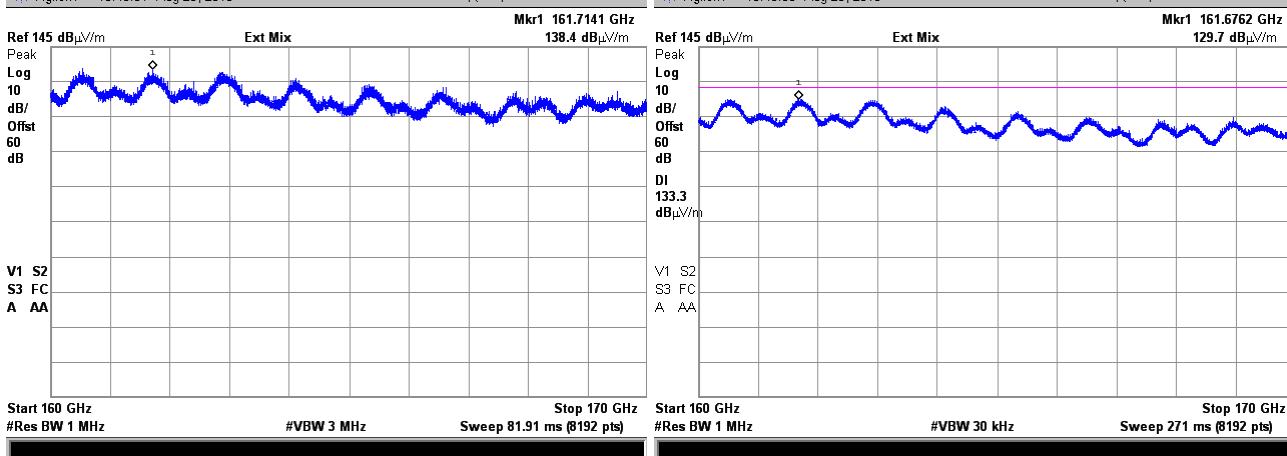

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.

Plot 7.5.38 Radiated emission measurements from 170 to 180 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:

0.01 m

ANTENNA POLARIZATION:


Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

Agilent 13:49:33 Aug 25, 2015

R T

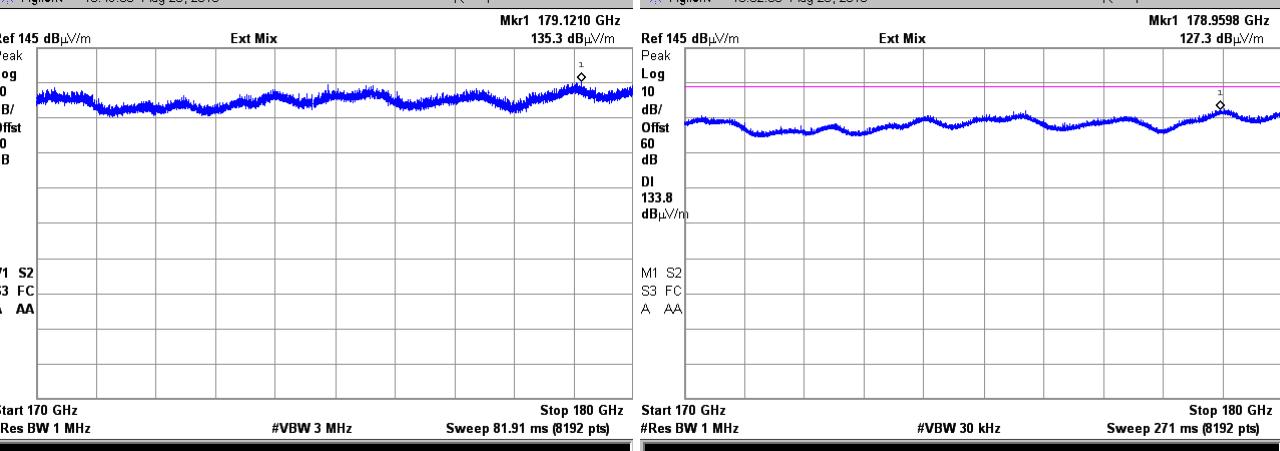

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.39 Radiated emission measurements from 180 to 190 GHz at the low frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

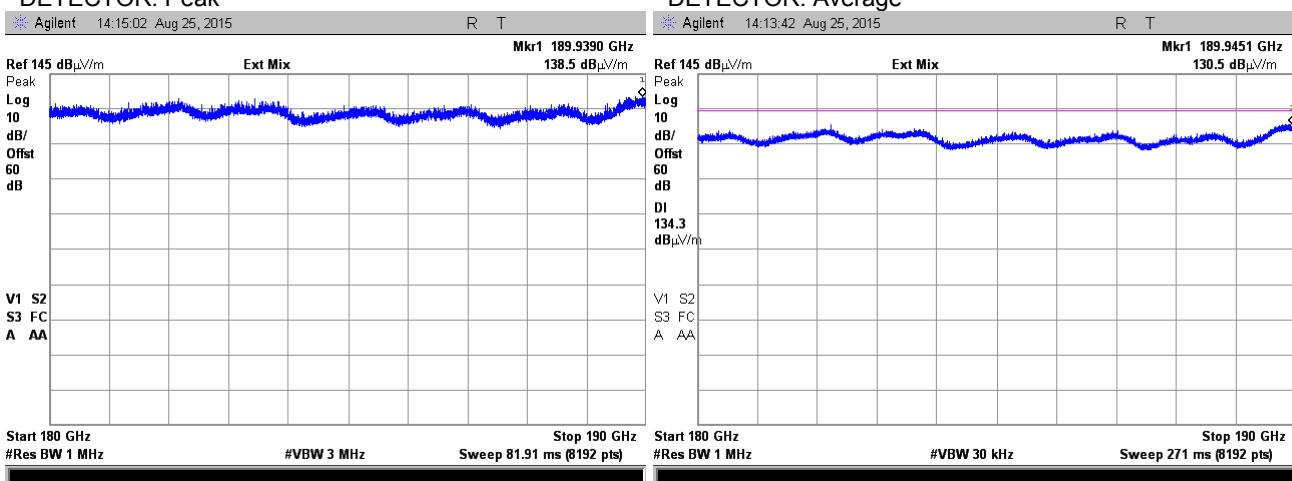Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.**Plot 7.5.40 Radiated emission measurements from 190 to 200 GHz at the low frequency**

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

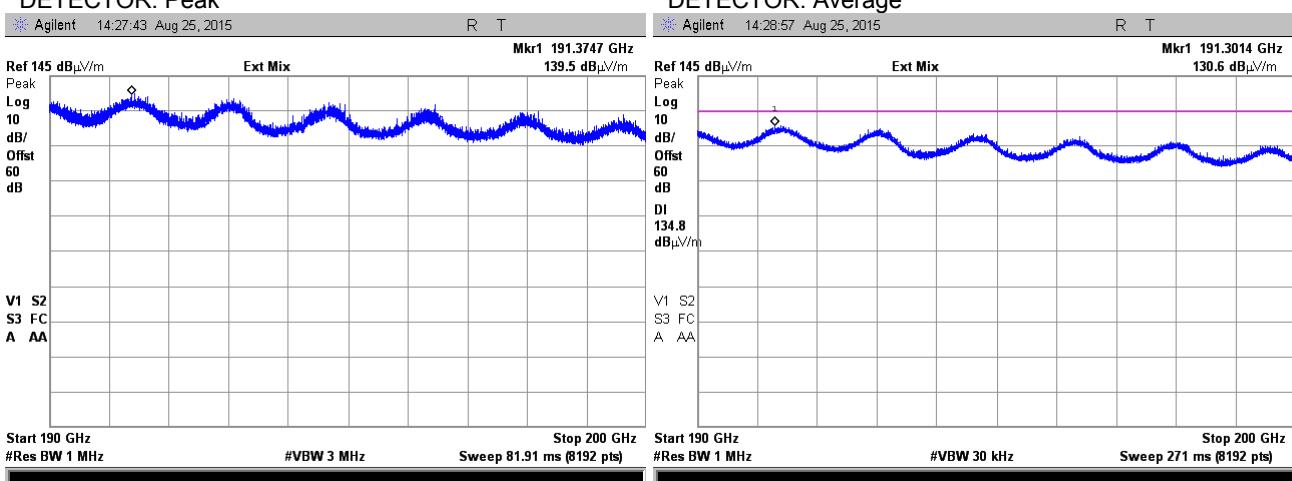Peak 154.8 dB μ V/m, average 134.8 dB μ V/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.41 Radiated emission measurements from 170 to 180 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

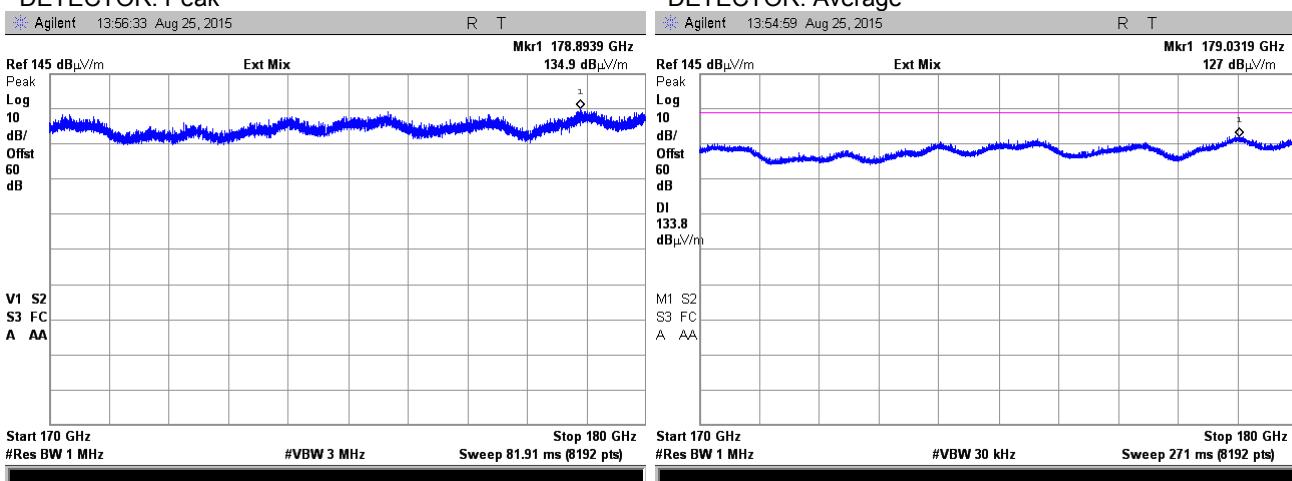

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.

Plot 7.5.42 Radiated emission measurements from 180 to 190 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

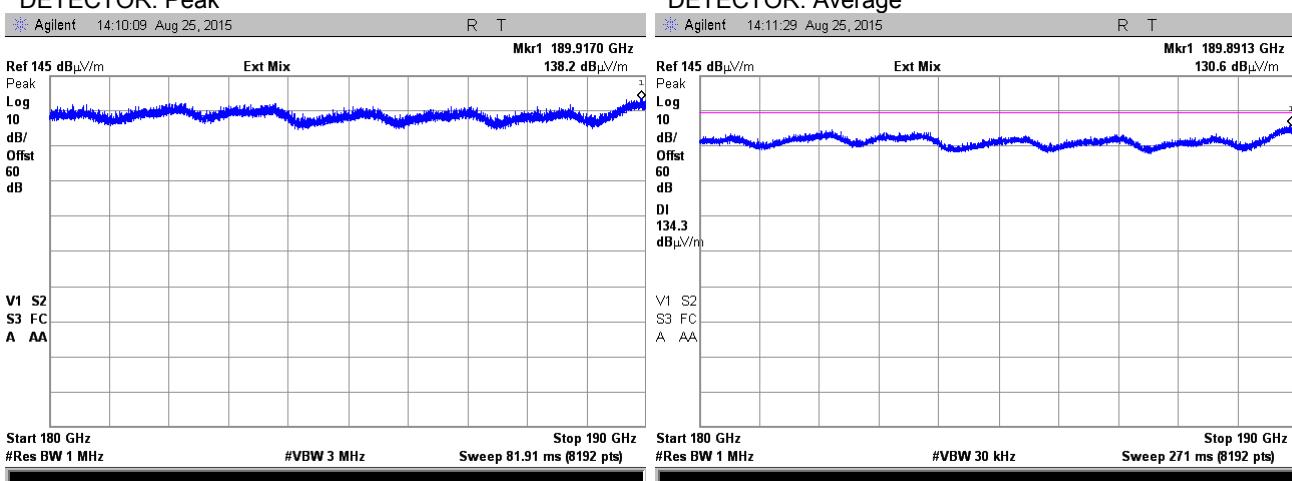

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.43 Radiated emission measurements from 190 to 200 GHz at the mid frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

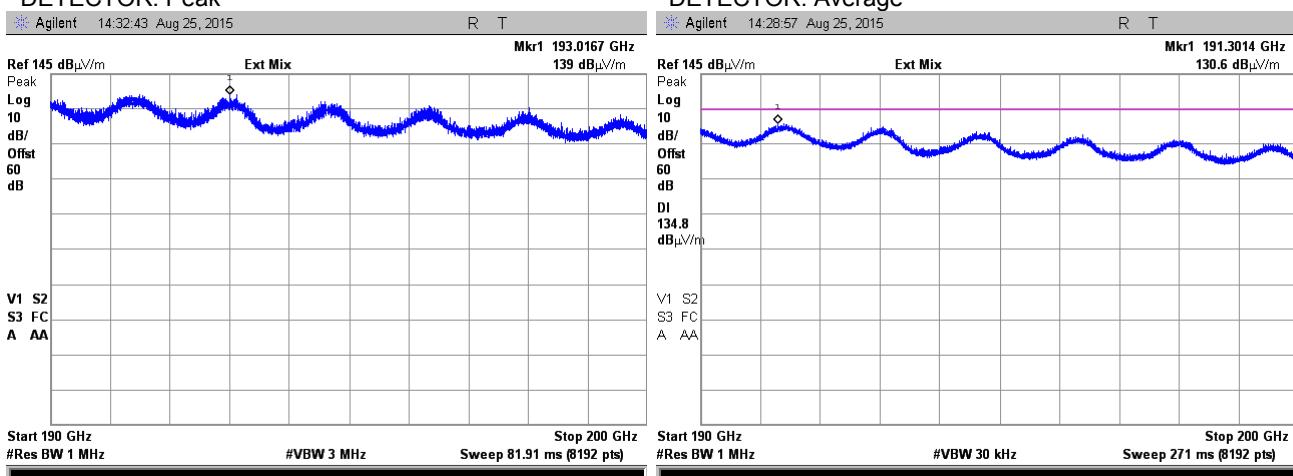Peak 154.8 dB_{UV}/m, average 134.8 dB_{UV}/m limits applied.**Plot 7.5.44 Radiated emission measurements from 170 to 180 GHz at the high frequency**

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

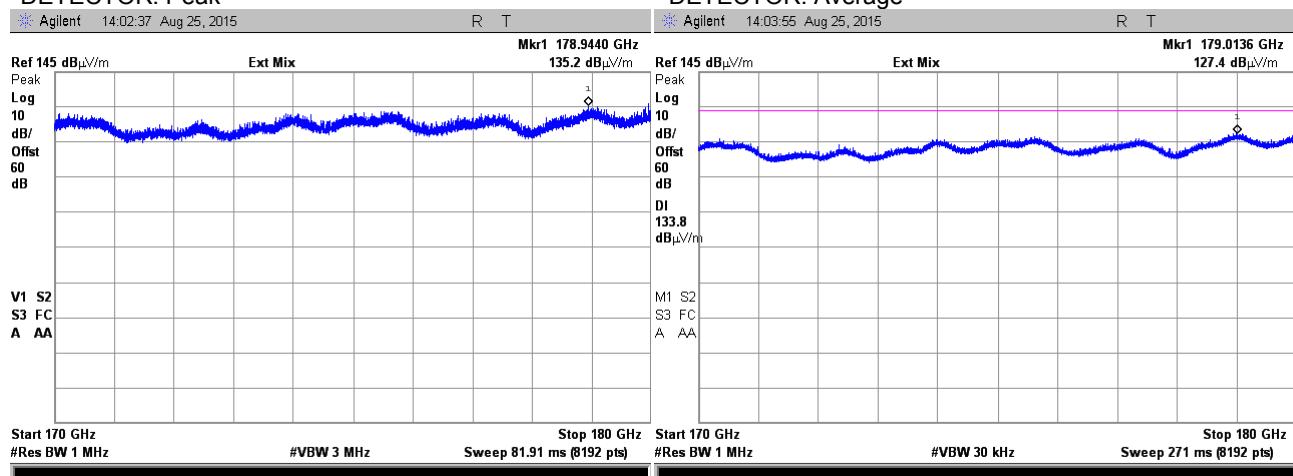Peak 154.8 dB_{UV}/m, average 134.8 dB_{UV}/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|--|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(c)(3), Out of band radiated emissions above 40 GHz | | |
| Test procedure: | ANSI C63.10, Sections 9.9, 9.12 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/19/2015-8/30/2015 | | |
| Temperature: 28.9°C | Air Pressure: 1011 hPa | Relative Humidity: 51% | Power Supply: 48 VDC |
| Remarks: | | | |

Plot 7.5.45 Radiated emission measurements from 180 to 190 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

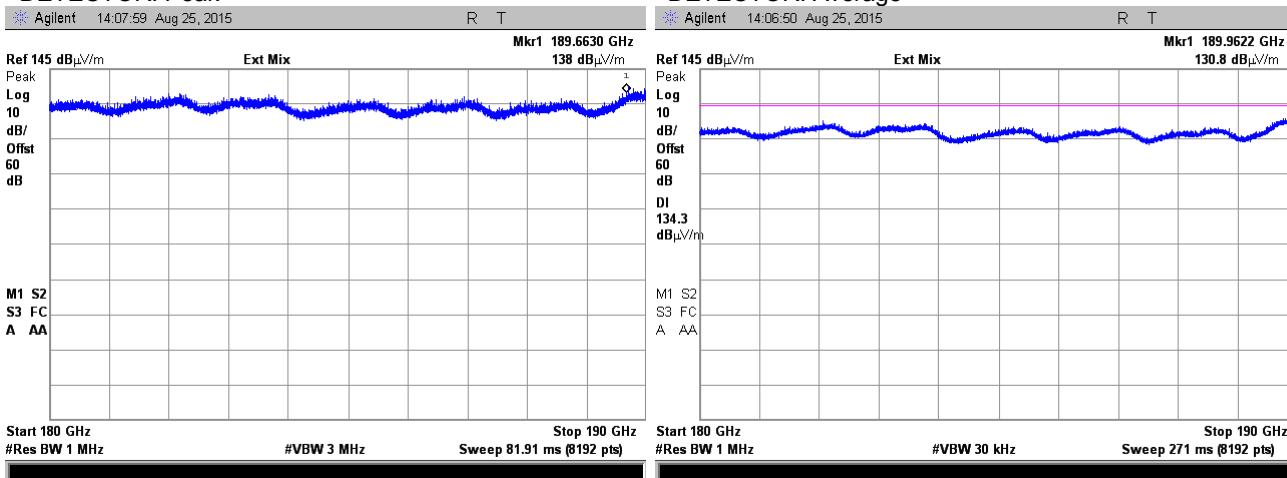

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.

Plot 7.5.46 Radiated emission measurements from 190 to 200 GHz at the high frequency

TEST SITE:

OATS

TEST DISTANCE:


0.01 m

ANTENNA POLARIZATION:

Vertical and Horizontal

DETECTOR: Peak

DETECTOR: Average

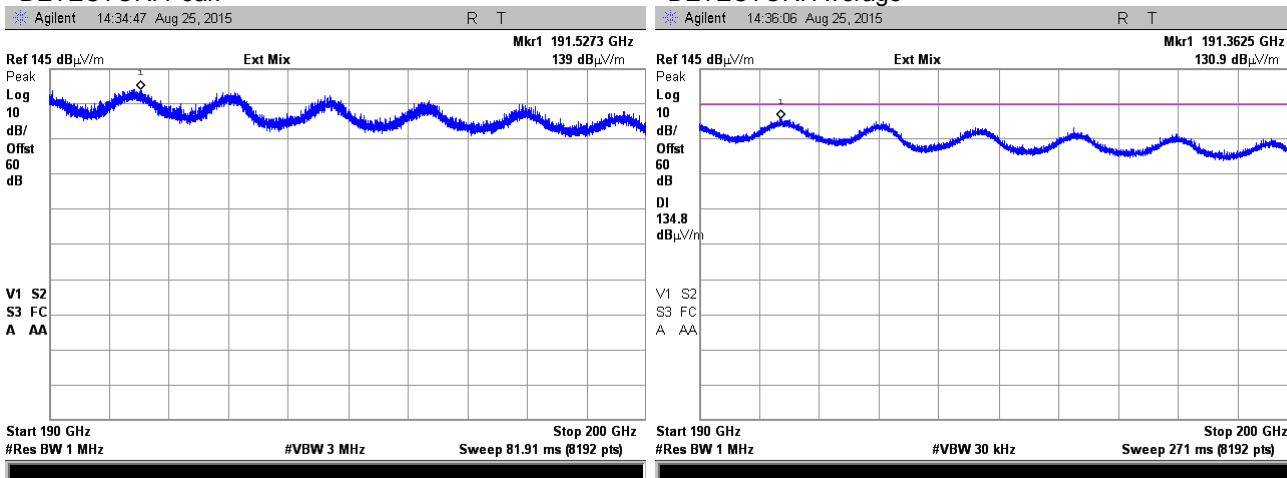

Peak 154.8 dBuV/m, average 134.8 dBuV/m limits applied.



HERMON LABORATORIES

| | | | |
|----------------------------|---|-------------------------------|-----------------------------|
| Test specification: | Section 15.255(f), Frequency tolerance | | |
| Test procedure: | 47 CFR, Section 2.1055; ANSI C63.10, Section 9.14 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/30/2015 | | |
| Temperature: 24.3°C | Air Pressure: 1012 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

7.6 Frequency stability test

7.6.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.6.1.


Table 7.6.1 Frequency stability limits

| Assigned frequency, MHz | Maximum allowed frequency displacement |
|-------------------------|--|
| 57375 | |
| 60375 | |
| 63375 | NA |

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.
- 7.6.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.6.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.6.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.6.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.6.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.6.2.

Figure 7.6.1 Frequency stability test setup

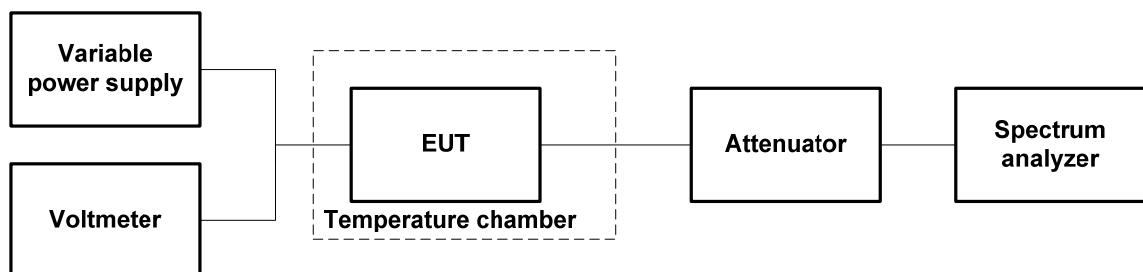



HERMON LABORATORIES

| Test specification: | Section 15.255(f), Frequency tolerance | | |
|---------------------|---|------------------------|----------------------|
| Test procedure: | 47 CFR, Section 2.1055; ANSI C63.10, Section 9.14 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date: | 8/30/2015 | | |
| Temperature: 24.3°C | Air Pressure: 1012 hPa | Relative Humidity: 42% | Power Supply: 48 VDC |
| Remarks: | | | |

Table 7.6.2 Frequency stability test results

OPERATING FREQUENCY: 57000 – 64000 MHz

NOMINAL POWER VOLTAGE: 48 V

TEMPERATURE STABILIZATION PERIOD: 20 min

POWER DURING TEMPERATURE TRANSITION: Off

SPECTRUM ANALYZER MODE: Counter

RESOLUTION BANDWIDTH: 3 kHz

VIDEO BANDWIDTH: 10 kHz

MODULATION: Unmodulated

| T, °C | Voltage, V | Frequency, MHz | | | | | | | Max frequency drift, kHz | |
|---------------------------------|------------|----------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|--------------------------|----------|
| | | Start up | 1 st min | 2 nd min | 3 rd min | 4 th min | 5 th min | 10 th min | Positive | Negative |
| Low frequency 57375 MHz | | | | | | | | | | |
| -20 | nominal | 57375.5958 | 57375.5951 | 57375.5943 | 57375.5937 | 57375.5929 | 57375.5920 | 57375.5909 | 741.9 | NA |
| -10 | nominal | 57375.4887 | NA | NA | NA | NA | NA | 57375.4887 | 639.7 | NA |
| 0 | nominal | 57375.3368 | 57375.3348 | 57375.3302 | 57375.3276 | 57375.3258 | 57375.3118 | 57375.3108 | 461.8 | NA |
| 10 | nominal | 57375.0942 | NA | NA | NA | NA | NA | 57375.0830 | 234.0 | NA |
| 20 | +15% | 57374.9085 | NA | NA | NA | NA | NA | 57374.8550 | 6.0 | NA |
| 20 | nominal | 57374.9073 | NA | NA | NA | NA | NA | 57374.8490 | 0.0 | NA |
| 20 | -15% | 57374.9071 | NA | NA | NA | NA | NA | 57374.8500 | 1.0 | NA |
| 30 | nominal | 57374.6038 | 57374.6024 | 57374.6004 | 57374.5967 | 57374.5913 | 57374.5894 | 57374.5866 | NA | 262.4 |
| 40 | nominal | 57374.4496 | NA | NA | NA | NA | NA | 57374.4110 | NA | 438.0 |
| 50 | nominal | 57374.3350 | NA | NA | NA | NA | NA | 57374.3172 | NA | 531.8 |
| Mid frequency 60375 MHz | | | | | | | | | | |
| -20 | nominal | 60375.6176 | 60375.6162 | 60375.6150 | 60375.6144 | 60375.6139 | 60375.6133 | 60375.6130 | 801.0 | NA |
| -10 | nominal | 60375.5310 | NA | NA | NA | NA | NA | 60375.4820 | 670.0 | NA |
| 0 | nominal | 60375.3260 | 60375.3251 | 60375.3242 | 60375.3172 | 60375.3155 | 60375.3162 | 60375.3164 | 504.4 | NA |
| 10 | nominal | 60375.1271 | NA | NA | NA | NA | NA | 60375.1025 | 290.5 | NA |
| 20 | +15% | 60374.8410 | NA | NA | NA | NA | NA | 60374.8135 | 1.5 | NA |
| 20 | nominal | 60374.8395 | NA | NA | NA | NA | NA | 60374.8120 | 0.0 | NA |
| 20 | -15% | 60374.8387 | NA | NA | NA | NA | NA | 60374.8109 | NA | 1.1 |
| 30 | nominal | 60374.5614 | 60374.5620 | 60374.5598 | 60374.5587 | 60374.5576 | 60374.5576 | 60374.5581 | NA | 253.9 |
| 40 | nominal | 60374.3773 | NA | NA | NA | NA | NA | 60374.3696 | NA | 442.4 |
| 50 | nominal | 60374.2931 | NA | NA | NA | NA | NA | 60374.2718 | NA | 540.2 |
| High frequency 63375 MHz | | | | | | | | | | |
| -20 | nominal | 63375.6421 | 63375.6424 | 63375.6431 | 63375.6438 | 63375.6442 | 63375.6447 | 63375.6450 | 848.0 | NA |
| -10 | nominal | 63375.5874 | NA | NA | NA | NA | NA | 63375.5616 | 764.6 | NA |
| 0 | nominal | 63375.3300 | 63375.3306 | 63375.3304 | 63375.3266 | 63375.3260 | 63375.3257 | 63375.3259 | 528.9 | NA |
| 10 | nominal | 63375.2154 | NA | NA | NA | NA | NA | 63375.1538 | 356.8 | NA |
| 20 | +15% | 63374.7985 | NA | NA | NA | NA | NA | 63374.7990 | 2.0 | NA |
| 20 | nominal | 63374.7971 | NA | NA | NA | NA | NA | 63374.7970 | 0.0 | NA |
| 20 | -15% | 63374.7963 | NA | NA | NA | NA | NA | 63374.7951 | NA | 1.9 |
| 30 | nominal | 63374.5331 | 63374.5302 | 63374.5309 | 63374.5317 | 63374.5302 | 63374.5295 | 63374.5289 | NA | 268.1 |
| 40 | nominal | 63374.3360 | NA | NA | NA | NA | NA | 63374.3335 | NA | 463.5 |
| 50 | nominal | 63374.2360 | NA | NA | NA | NA | NA | 63374.2350 | NA | 562.0 |

* - Reference frequency

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 1303 | HL 2358 | HL 2909 | HL 3291 | HL 3295 | HL 3305 | HL 3433 | HL 3434 |
|---------|---------|---------|---------|---------|---------|---------|---------|

Full description is given in Appendix A.

8 APPENDIX A Test equipment and ancillaries used for tests

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal./Check* | Due Cal./Check* |
|-------|---|-----------------------|-------------|--------------------------|------------------|-----------------|
| 0446 | Antenna, Loop, Active, 10 kHz - 30 MHz | EMCO | 6502 | 2857 | 18-Jan-16 | 18-Jan-17 |
| 0521 | EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz | Hewlett Packard | 8546A | 3617A 00319, 3448A002 53 | 27-Oct-15 | 27-Oct-16 |
| 0604 | Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz | EMCO | 3141 | 9611-1011 | 15-May-15 | 15-May-16 |
| 0747 | Mixer, Millimeter Wave Harmonic 90 - 140 GHZ | Oleson Microwave Labs | M08HW | F80429-1 | 08-Nov-13 | 08-Nov-16 |
| 0748 | Mixer Millimeter Wave Harmonic 60 - 90 GHz | Oleson Microwave Labs | M12 HW | E 804 29-1 | 08-Nov-13 | 08-Nov-16 |
| 0768 | Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain | Quinstar Technology | QWH-4200-BA | 110 | 09-Nov-15 | 09-Nov-16 |
| 0769 | Antenna Standard Gain Horn, 26.5-40 GHz, WR28, 25 dB gain | Quinstar Technology | QWH-2800-BA | 112 | 09-Nov-15 | 09-Nov-16 |
| 0770 | Antenna Standard Gain Horn, 40-60 GHz WR-19, U-band Gain - 25 dB | Quinstar Technology | QWH-1900-AA | 118 | 16-Jul-15 | 16-Jul-16 |
| 0771 | Antenna Standard Gain Horn, 60-90 GHz, WR-12, Gain - 25 dB | Quinstar Technology | QWH-1200-AA | 111 | 12-Jul-15 | 12-Jul-16 |
| 0772 | Antenna Standard Gain Horn, 75-110 GHz, WR-10, Gain - 25 dB | Quinstar Technology | QWH-0800-AA | 110 | 12-Jul-15 | 12-Jul-16 |
| 1295 | Adapter 35WR28Kf, 26.5-40 GHz | Wiltron | 35WR28K F | 1295 | 17-Sep-15 | 17-Sep-17 |
| 1299 | Transition waveguide ET28S -19R | Custom Microwave | ET28S - 19R | 1299 | 30-Jul-15 | 30-Jul-18 |
| 1300 | Transition waveguide ET28S -19R | Custom Microwave | ET28S - 19R | 1300 | 30-Jul-15 | 30-Jul-18 |
| 1301 | Transition waveguide ET28S -12R | Custom Microwave | ET28S - 12R | 1301 | 30-Jul-15 | 30-Jul-18 |
| 1303 | Transition waveguide ET28S -12R | Custom Microwave | ET28S - 12R | S0951 | 30-Jul-15 | 30-Jul-18 |
| 1304 | Transition waveguide ET28S - 8R | Custom Microwave | ET28S - 8R | 1304 | 30-Jul-15 | 30-Jul-18 |
| 1306 | Transition waveguide ET28S - 5R | Custom Microwave | ET28S - 5R | 1306 | 30-Jul-15 | 30-Jul-18 |
| 1312 | Mixer Millimeter Wave Harmonic 140-220 GHz | Oleson Microwave Labs | M05HWD | G91112-1 | 08-Nov-13 | 08-Nov-16 |
| 1424 | Spectrum Analyzer, 30 Hz- 40 GHz | Agilent Technologies | 8564EC | 3946A002 19 | 12-Apr-15 | 12-Apr-16 |
| 2358 | Power Supply, 2 X 0-36VDC / 5A, 5VDC / 5A | Horizon Electronics | DHR3655 D | 767469 | 02-Jun-15 | 02-Jun-16 |
| 2909 | Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz | Agilent Technologies | E4407B | MY414447 62 | 21-Feb-16 | 21-Feb-17 |
| 3235 | Harmonic mixer 40 to 60 GHz | Agilent Technologies | 11970U | MY300301 82 | 23-Jul-13 | 23-Jul-16 |
| 3290 | Attenuator, direct reading, 40 to 60 GHz, 0.4 W | Quinstar Technology | QAD-U00000 | 10381008 | 14-May-15 | 14-May-16 |
| 3291 | Attenuator, direct reading, 60 to 90 GHz, 0.2 W | Quinstar Technology | QAD-E00000 | 10381009 | 14-May-15 | 14-May-16 |

*The calibration was valid at the testing time.



HERMON LABORATORIES

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal./Check* | Due Cal./Check* |
|-------|---|-----------------------|-----------------|--------------|------------------|-----------------|
| 3294 | Tapered transition, WR-28, UG-599 to WR-15, UG-385 (26.5-40 GHz to 50-75 GHz) | Quinstar Technology | QWP-AV0000 | 10381004 | 30-Jul-15 | 30-Jul-18 |
| 3295 | Tapered transition, WR-28, UG-599 to WR-15, UG-385 (26.5-40 GHz to 50-75 GHz) | Quinstar Technology | QWP-AV0000 | 10381005 | 30-Jul-15 | 30-Jul-18 |
| 3297 | Tapered , WR-28, UG-599 to WR-10, UG-387 (26.5-40 GHz to 75-100 GHz) | Quinstar Technology | QWP-AW0000 | 10381007 | 30-Jul-15 | 30-Jul-18 |
| 3305 | Harmonic mixer 50 to 75 GHz | Agilent Technologies | 11970V | MY300301 49 | 23-Jul-13 | 23-Jul-16 |
| 3329 | Antenna Standard Gain Horn, 140-220 GHz, WR-5, Gain - 25 dB | Quinstar Technology | NA | NA | 20-Jul-15 | 20-Jul-16 |
| 3333 | Oscilloscope, 1 GHz, 4 channels | LeCroy Corporation | LC584AL | 10239 | 25-Nov-15 | 25-Nov-16 |
| 3433 | Test Cable , DC-18 GHz, 1.5 m, SMA - SMA | Mini-Circuits | CBL-5FT-SMSM+ | 25679 | 11-Mar-15 | 11-Mar-16 |
| 3434 | Test Cable , DC-18 GHz, 1.5 m, SMA - SMA | Mini-Circuits | CBL-5FT-SMSM+ | 25683 | 11-Mar-15 | 11-Mar-16 |
| 3455 | Medium Power Fixed Coaxial Attenuator DC to 40 GHz, 20 dB, 5 W | Aeroflex / Weinschel | 75A-20-12 | 1182 | 11-Mar-15 | 11-Mar-16 |
| 3535 | Amplifier, low noise, 18 to 40 GHz | Quinstar Technology | QLJ-18404537-J0 | 111590030 01 | 01-Jan-15 | 01-Jan-16 |
| 3536 | Antenna Standard Gain Horn, 90-140 GHz, WR-8, Midband Gain - 24 dB | Quinstar Technology | QWH-FPRR00 | 111590040 01 | 14-Jun-15 | 14-Jun-16 |
| 3901 | Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA | Huber-Suhner | SUCOFLE X 102A | 1225/2A | 15-Feb-16 | 15-Feb-17 |
| 3903 | Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA | Huber-Suhner | SUCOFLE X 102A | 1226/2A | 15-Feb-16 | 15-Feb-17 |
| 4023 | Diplexer for use OML mixers with Agilent spectrum analyzer | Oleson Microwave Labs | DPL.26 | NA | 14-May-15 | 14-May-16 |
| 4114 | Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz | ETS Lindgren | 3117 | 00123515 | 24-Dec-15 | 24-Dec-16 |
| 4273 | Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M | Mini-Circuits | CBL-6FT-SMNM+ | 70045 | 28-May-15 | 28-May-16 |
| 4353 | Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M | MegaPhase | NC29-N1N1-244 | 12025101 003 | 15-Mar-15 | 15-Mar-16 |
| 4722 | Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M | MegaPhase | NC29-N1N1-244 | 51228701 001 | 01-Jan-15 | 01-Jan-16 |
| 4856 | Amplifier, solid state, 18 GHz to 40 GHz, 20 dBm output power | Quinstar Technology | QGW-18402023-JO | 167790010 01 | 03-Apr-15 | 03-Apr-16 |
| 4932 | Microwave preamplifier, 500 MHz to 18 GHz, 40 dB Gain | Com-Power Corporation | PAM-118A | 551029 | 19-Nov-15 | 19-Nov-16 |

*The calibration was valid at the testing time.

8.1 Test equipment and ancillaries used for tests

| HL No. | Description | Manufacturer | Model | Ser. No. | Last Cal./Check | Due Cal./Check |
|--------|----------------------|--------------|--------|------------|-----------------|----------------|
| NA | Power meter | Agilent | N1913A | MY50001619 | 8-Sep-14 | 8-Sep-16 |
| NA | Power Sensor 201 | Agilent | E8486A | MY55050012 | 10-Feb-15 | 8-Mar-16 |
| NA | Zero-Biased Detector | ELVA-1 | ZBD-12 | 1675-p | NA | NA |

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description | Expanded uncertainty |
|---|---|
| Frequency error | ± 0.56 ppm |
| Carrier power conducted | ± 1.7 dB |
| Spurious emissions conducted at RF antenna connector | 30 MHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 12.75 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB |
| Radiated emissions at 3 m measuring distance Horizontal polarization | Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB |
| Vertical polarization | Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

| | |
|------------------------|--|
| 47CFR part 15: 2014 | Radio Frequency Devices. |
| FCC 47CFR part 2: 2014 | Frequency allocations and radio treaty matters; general rules and regulations |
| ANSI C63.2: 1996 | American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications. |
| ANSI C63.4: 2009 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |
| ANSI C63.10: 2013 | American National Standard of Procedures for Compliance Testing of Unlicenced Wireless Devices |
| RSS-210 Issue 8: 2010 | Low Power Licence- Exempt Radiocommunication Devices |
| RSS-Gen Issue 4: 2014 | General Requirements for Compliance of Radio Apparatus |

12 APPENDIX E Test equipment correction factors

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, S/N 2857, HL 0446

| Frequency, MHz | Magnetic Antenna Factor, dB(S/m) | Electric Antenna Factor, dB(1/m) |
|----------------|----------------------------------|----------------------------------|
| 0.009 | -32.8 | 18.7 |
| 0.010 | -33.8 | 17.7 |
| 0.020 | -38.3 | 13.2 |
| 0.050 | -41.1 | 10.4 |
| 0.075 | -41.3 | 10.2 |
| 0.100 | -41.6 | 9.9 |
| 0.150 | -41.7 | 9.8 |
| 0.250 | -41.6 | 9.9 |
| 0.500 | -41.8 | 9.7 |
| 0.750 | -41.9 | 9.6 |
| 1.000 | -41.4 | 10.1 |
| 2.000 | -41.5 | 10.0 |
| 3.000 | -41.4 | 10.1 |
| 4.000 | -41.4 | 10.1 |
| 5.000 | -41.5 | 10.0 |
| 10.000 | -41.9 | 9.6 |
| 15.000 | -41.9 | 9.6 |
| 20.000 | -42.2 | 9.3 |
| 25.000 | -42.8 | 8.7 |
| 30.000 | -44.0 | 7.5 |

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.112, HL 0768, 0769, 0770, 0771, 0772

| Frequency min, GHz | Frequency max, GHz | Antenna factor, dB(1/m) |
|--------------------|--------------------|-------------------------|
| 18.000 | 26.500 | 32.01 |
| 26.500 | 40.000 | 35.48 |
| 40.000 | 60.000 | 39.03 |
| 60.000 | 90.000 | 42.55 |
| 90.000 | 140.000 | 46.23 |
| 140.000 | 220.000 | 50.11 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

| Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) |
|----------------|-------------------------|----------------|-------------------------|----------------|-------------------------|
| 26 | 7.8 | 580 | 20.6 | 1320 | 27.8 |
| 28 | 7.8 | 600 | 21.3 | 1340 | 28.3 |
| 30 | 7.8 | 620 | 21.5 | 1360 | 28.2 |
| 40 | 7.2 | 640 | 21.2 | 1380 | 27.9 |
| 60 | 7.1 | 660 | 21.4 | 1400 | 27.9 |
| 70 | 8.5 | 680 | 21.9 | 1420 | 27.9 |
| 80 | 9.4 | 700 | 22.2 | 1440 | 27.8 |
| 90 | 9.8 | 720 | 22.2 | 1460 | 27.8 |
| 100 | 9.7 | 740 | 22.1 | 1480 | 28.0 |
| 110 | 9.3 | 760 | 22.3 | 1500 | 28.5 |
| 120 | 8.8 | 780 | 22.6 | 1520 | 28.9 |
| 130 | 8.7 | 800 | 22.7 | 1540 | 29.6 |
| 140 | 9.2 | 820 | 22.9 | 1560 | 29.8 |
| 150 | 9.8 | 840 | 23.1 | 1580 | 29.6 |
| 160 | 10.2 | 860 | 23.4 | 1600 | 29.5 |
| 170 | 10.4 | 880 | 23.8 | 1620 | 29.3 |
| 180 | 10.4 | 900 | 24.1 | 1640 | 29.2 |
| 190 | 10.3 | 920 | 24.1 | 1660 | 29.4 |
| 200 | 10.6 | 940 | 24.0 | 1680 | 29.6 |
| 220 | 11.6 | 960 | 24.1 | 1700 | 29.8 |
| 240 | 12.4 | 980 | 24.5 | 1720 | 30.3 |
| 260 | 12.8 | 1000 | 24.9 | 1740 | 30.8 |
| 280 | 13.7 | 1020 | 25.0 | 1760 | 31.1 |
| 300 | 14.7 | 1040 | 25.2 | 1780 | 31.0 |
| 320 | 15.2 | 1060 | 25.4 | 1800 | 30.9 |
| 340 | 15.4 | 1080 | 25.6 | 1820 | 30.7 |
| 360 | 16.1 | 1100 | 25.7 | 1840 | 30.6 |
| 380 | 16.4 | 1120 | 26.0 | 1860 | 30.6 |
| 400 | 16.6 | 1140 | 26.4 | 1880 | 30.6 |
| 420 | 16.7 | 1160 | 27.0 | 1900 | 30.6 |
| 440 | 17.0 | 1180 | 27.0 | 1920 | 30.7 |
| 460 | 17.7 | 1200 | 26.7 | 1940 | 30.9 |
| 480 | 18.1 | 1220 | 26.5 | 1960 | 31.2 |
| 500 | 18.5 | 1240 | 26.5 | 1980 | 31.6 |
| 520 | 19.1 | 1260 | 26.5 | 2000 | 32.0 |
| 540 | 19.5 | 1280 | 26.6 | | |
| 560 | 19.8 | 1300 | 27.0 | | |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged waveguide horn antenna
ETS Lindgren, Model 3117, serial number: 00123515, HL 4114

| Frequency, MHz | Antenna factor, dB/m | | |
|----------------|----------------------|--------------|-----------|
| | Measured | Manufacturer | Deviation |
| 1000 | 28.0 | 28.4 | -0.4 |
| 1500 | 28.0 | 27.4 | 0.6 |
| 2000 | 31.2 | 30.9 | 0.3 |
| 2500 | 32.5 | 33.4 | -0.9 |
| 3000 | 32.9 | 32.6 | 0.3 |
| 3500 | 32.7 | 32.8 | -0.1 |
| 4000 | 33.1 | 33.4 | -0.3 |
| 4500 | 33.8 | 33.9 | -0.1 |
| 5000 | 33.8 | 34.1 | -0.3 |
| 5500 | 34.4 | 34.5 | -0.1 |
| 6000 | 35.0 | 35.2 | -0.2 |
| 6500 | 35.4 | 35.5 | -0.1 |
| 7000 | 35.7 | 35.7 | 0.0 |
| 7500 | 35.9 | 35.7 | 0.2 |
| 8000 | 35.8 | 35.8 | 0.0 |
| 8500 | 35.9 | 35.8 | 0.1 |
| 9000 | 36.3 | 36.2 | 0.1 |
| 9500 | 36.6 | 36.6 | 0.0 |
| 10000 | 37.1 | 37.1 | 0.0 |
| 10500 | 37.6 | 37.5 | 0.1 |
| 11000 | 37.9 | 37.7 | 0.2 |
| 11500 | 38.5 | 38.1 | 0.4 |
| 12000 | 39.2 | 38.7 | 0.5 |
| 12500 | 39.0 | 38.9 | 0.1 |
| 13000 | 39.1 | 39.1 | 0.0 |
| 13500 | 38.9 | 38.8 | 0.1 |
| 14000 | 39.0 | 38.8 | 0.2 |
| 14500 | 39.6 | 39.9 | -0.3 |
| 15000 | 39.9 | 39.7 | 0.2 |
| 15500 | 39.9 | 40.1 | -0.2 |
| 16000 | 40.7 | 40.8 | -0.1 |
| 16500 | 41.3 | 41.8 | -0.5 |
| 17000 | 42.5 | 42.1 | 0.4 |
| 17500 | 41.3 | 41.2 | 0.1 |
| 18000 | 41.4 | 40.9 | 0.5 |

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field strength in dB(μ V/meter)

Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m
Mini-Circuits, HL 3433

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 10.0 | 0.06 | 9000 | 2.01 |
| 100 | 0.17 | 9500 | 2.06 |
| 500 | 0.41 | 10000 | 2.05 |
| 1000 | 0.58 | 10500 | 2.18 |
| 1500 | 0.72 | 11000 | 2.26 |
| 2000 | 0.86 | 11500 | 2.28 |
| 2500 | 0.96 | 12000 | 2.43 |
| 3000 | 1.04 | 12500 | 2.53 |
| 3500 | 1.13 | 13000 | 2.52 |
| 4000 | 1.23 | 13500 | 2.56 |
| 4500 | 1.31 | 14000 | 2.60 |
| 5000 | 1.41 | 14500 | 2.59 |
| 5500 | 1.49 | 15000 | 2.67 |
| 6000 | 1.55 | 15500 | 2.76 |
| 6500 | 1.63 | 16000 | 2.86 |
| 7000 | 1.71 | 16500 | 2.91 |
| 7500 | 1.78 | 17000 | 2.95 |
| 8000 | 1.86 | 17500 | 3.02 |
| 8500 | 1.92 | 18000 | 3.07 |



HERMON LABORATORIES

Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25683
Mini-Circuits, HL 3434

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 10.0 | 0.06 | 9000 | 1.96 |
| 100 | 0.16 | 9500 | 2.01 |
| 500 | 0.40 | 10000 | 2.01 |
| 1000 | 0.57 | 10500 | 2.14 |
| 1500 | 0.72 | 11000 | 2.21 |
| 2000 | 0.85 | 11500 | 2.24 |
| 2500 | 0.95 | 12000 | 2.36 |
| 3000 | 1.03 | 12500 | 2.47 |
| 3500 | 1.11 | 13000 | 2.46 |
| 4000 | 1.21 | 13500 | 2.50 |
| 4500 | 1.29 | 14000 | 2.53 |
| 5000 | 1.39 | 14500 | 2.53 |
| 5500 | 1.46 | 15000 | 2.62 |
| 6000 | 1.52 | 15500 | 2.70 |
| 6500 | 1.60 | 16000 | 2.80 |
| 7000 | 1.68 | 16500 | 2.86 |
| 7500 | 1.75 | 17000 | 2.88 |
| 8000 | 1.83 | 17500 | 2.94 |
| 8500 | 1.88 | 18000 | 3.00 |

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.09 | 9500 | 4.29 | 21000 | 6.67 |
| 100 | 0.41 | 10000 | 4.40 | 22000 | 6.92 |
| 500 | 0.93 | 10500 | 4.52 | 23000 | 7.00 |
| 1000 | 1.33 | 11000 | 4.64 | 24000 | 7.18 |
| 1500 | 1.63 | 11500 | 4.76 | 25000 | 7.29 |
| 2000 | 1.90 | 12000 | 4.87 | 26000 | 7.55 |
| 2500 | 2.12 | 12500 | 4.99 | 27000 | 7.70 |
| 3000 | 2.33 | 13000 | 5.11 | 28000 | 7.88 |
| 3500 | 2.50 | 13500 | 5.20 | 29000 | 8.02 |
| 4000 | 2.67 | 14000 | 5.31 | 30000 | 8.15 |
| 4500 | 2.82 | 14500 | 5.42 | 31000 | 8.35 |
| 5000 | 2.99 | 15000 | 5.51 | 32000 | 8.40 |
| 5500 | 3.16 | 15500 | 5.58 | 33000 | 8.62 |
| 6000 | 3.32 | 16000 | 5.68 | 34000 | 8.73 |
| 6500 | 3.51 | 16500 | 5.78 | 35000 | 8.78 |
| 7000 | 3.65 | 17000 | 5.91 | 36000 | 8.94 |
| 7500 | 3.79 | 17500 | 5.99 | 37000 | 9.21 |
| 8000 | 3.92 | 18000 | 6.07 | 38000 | 9.37 |
| 8500 | 4.04 | 19000 | 6.36 | 39000 | 9.45 |
| 9000 | 4.18 | 20000 | 6.49 | 40000 | 9.52 |



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 10 | -0.02 | 9500 | 1.84 | 21000 | 2.98 |
| 100 | 0.15 | 10000 | 1.86 | 22000 | 3.07 |
| 500 | 0.38 | 10500 | 1.93 | 23000 | 3.13 |
| 1000 | 0.56 | 11000 | 1.99 | 24000 | 3.21 |
| 1500 | 0.69 | 11500 | 2.04 | 25000 | 3.26 |
| 2000 | 0.82 | 12000 | 2.10 | 26000 | 3.48 |
| 2500 | 0.90 | 12500 | 2.15 | 27000 | 3.44 |
| 3000 | 0.98 | 13000 | 2.21 | 28000 | 3.53 |
| 3500 | 1.06 | 13500 | 2.25 | 29000 | 3.59 |
| 4000 | 1.11 | 14000 | 2.29 | 30000 | 3.66 |
| 4500 | 1.17 | 14500 | 2.34 | 31000 | 3.70 |
| 5000 | 1.24 | 15000 | 2.36 | 32000 | 3.79 |
| 5500 | 1.32 | 15500 | 2.40 | 33000 | 3.88 |
| 6000 | 1.40 | 16000 | 2.45 | 34000 | 3.94 |
| 6500 | 1.50 | 16500 | 2.48 | 35000 | 3.91 |
| 7000 | 1.56 | 17000 | 2.56 | 36000 | 4.05 |
| 7500 | 1.62 | 17500 | 2.58 | 37000 | 4.22 |
| 8000 | 1.68 | 18000 | 2.60 | 38000 | 4.25 |
| 8500 | 1.74 | 19000 | 2.84 | 39000 | 4.27 |
| 9000 | 1.78 | 20000 | 2.88 | 40000 | 4.33 |



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 50 | 0.20 | 9000 | 2.71 |
| 100 | 0.27 | 9500 | 2.81 |
| 300 | 0.47 | 10000 | 2.90 |
| 500 | 0.61 | 10500 | 2.97 |
| 1000 | 0.87 | 11000 | 3.06 |
| 1500 | 1.07 | 11500 | 3.13 |
| 2000 | 1.24 | 12000 | 3.20 |
| 2500 | 1.39 | 12500 | 3.26 |
| 3000 | 1.53 | 13000 | 3.34 |
| 3500 | 1.65 | 13500 | 3.39 |
| 4000 | 1.77 | 14000 | 3.47 |
| 4500 | 1.89 | 14500 | 3.54 |
| 5000 | 1.99 | 15000 | 3.62 |
| 5500 | 2.07 | 15500 | 3.69 |
| 6000 | 2.20 | 16000 | 3.76 |
| 6500 | 2.30 | 16500 | 3.83 |
| 7000 | 2.39 | 17000 | 3.86 |
| 7500 | 2.51 | 17500 | 3.94 |
| 8000 | 2.58 | 18000 | 4.02 |
| 8500 | 2.65 | | |

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244, S/N 51228701001
HL 4722

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 50 | 0.22 | 9000 | 2.93 |
| 100 | 0.30 | 9500 | 3.06 |
| 300 | 0.52 | 10000 | 3.16 |
| 500 | 0.66 | 10500 | 3.20 |
| 1000 | 0.93 | 11000 | 3.34 |
| 1500 | 1.15 | 11500 | 3.39 |
| 2000 | 1.33 | 12000 | 3.48 |
| 2500 | 1.49 | 12500 | 3.55 |
| 3000 | 1.64 | 13000 | 3.66 |
| 3500 | 1.77 | 13500 | 3.75 |
| 4000 | 1.90 | 14000 | 3.76 |
| 4500 | 2.03 | 14500 | 3.87 |
| 5000 | 2.17 | 15000 | 3.98 |
| 5500 | 2.30 | 15500 | 4.01 |
| 6000 | 2.39 | 16000 | 4.14 |
| 6500 | 2.51 | 16500 | 4.15 |
| 7000 | 2.59 | 17000 | 4.32 |
| 7500 | 2.67 | 17500 | 4.36 |
| 8000 | 2.76 | 18000 | 4.38 |
| 8500 | 2.84 | | |

13 APPENDIX F Abbreviations and acronyms

| | |
|----------------|---|
| A | ampere |
| AC | alternating current |
| A/m | ampere per meter |
| AM | amplitude modulation |
| AVRG | average (detector) |
| CBW | channel bandwidth |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(μ V) | decibel referred to one microvolt |
| dB(μ V/m) | decibel referred to one microvolt per meter |
| dB(μ A) | decibel referred to one microampere |
| DC | direct current |
| EBW | emission bandwidth |
| EIRP | equivalent isotropically radiated power |
| ERP | effective radiated power |
| EUT | equipment under test |
| F | frequency |
| GHz | gigahertz |
| GND | ground |
| H | height |
| HL | Hermon laboratories |
| Hz | hertz |
| k | kilo |
| kHz | kilohertz |
| LO | local oscillator |
| m | meter |
| MHz | megahertz |
| min | minute |
| mm | millimeter |
| ms | millisecond |
| μ s | microsecond |
| NA | not applicable |
| NB | narrow band |
| OATS | open area test site |
| Ω | Ohm |
| QP | quasi-peak |
| PM | pulse modulation |
| PS | power supply |
| RE | radiated emission |
| RF | radio frequency |
| rms | root mean square |
| Rx | receive |
| s | second |
| T | temperature |
| Tx | transmit |
| V | volt |
| VA | volt-ampere |

END OF DOCUMENT