




FCC RADIO TEST REPORT

Applicant : SHENZHEN Hitevision Technology Co., Ltd.
Address : Honghe Mansion No. 1 Building A, 1 Danzi North Road,
Shatian, Kengzi Street, Pingshan District, Shenzhen
Equipment : Wi-Fi Module
Model No. : AX1802-GT
Trade Name : N/A
FCC ID. : 2ACYT-AX1802
Standard : FCC part 15 Subpart E §15.407

I HEREBY CERTIFY THAT :

The sample was received on Dec. 28, 2021 and the testing was completed on Jan. 18, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:


Leevin Li / Supervisor

**CONTENTS**

1.	Summary of Test Procedure and Test Results	5
1.1.	Applicable Standards	5
2.	Test Configuration of Equipment under Test	6
2.1.	Feature of Equipment and Model Description	6
2.2.	Carrier Frequency of Channels	7
2.3.	Test Mode and Test Software	8
2.5.	Description of Test System	11
2.6.	General Information of Test	12
2.7.	Measurement Uncertainty	12
3.	Test Equipment and Ancillaries Used for Tests	13
4.	Antenna Requirements	14
4.1.	Standard Applicable	14
4.2.	Antenna Construction and Directional Gain	14
5.	Test of AC Power Line Conducted Emission	15
5.1.	Test Limit	15
5.2.	Test Procedures	15
5.3.	Typical Test Setup	15
5.4.	Test Result and Data	16
6.	Test of Spurious Emission (Radiated)	18
6.1.	Test Limit	18
6.2.	Test Procedures	18
6.3.	Typical Test Setup	19
6.4.	Test Result and Data (9kHz ~ 30MHz)	20
6.5.	Test Result and Data (30MHz ~ 1GHz)	20
6.6.	Test Result and Data (1GHz ~ 40GHz)	22
6.7.	Restricted Bands of Operation	106
7.	On Time, Duty Cycle and Measurement methods	107
7.1.	Test Limit	107
7.2.	Test Procedure	107
7.3.	Test Setup Layout	107
7.4.	Test Result and Data	107
7.5.	Measurement Methods	108
8.	6dB Bandwidth & 99% Occupied Bandwidth	112
8.1.	Test Limit	112
8.2.	Test Procedure	112
8.3.	Test Setup Layout	112
8.4.	Test Result and Data (6dB Bandwidth)	112
8.5.	Test Result and Data (99% Occupied Bandwidth)	114
9.	26dB Bandwidth & 99% Occupied Bandwidth	135
9.1.	Test Limit	135
9.2.	Test Procedure	135
9.3.	Test Setup Layout	135
9.4.	Test Result and Data (26dB Bandwidth)	136
9.5.	Test Result and Data (99% Occupied Bandwidth)	137
10.	Average Power	148



10.1. Test Limit	148
10.2. Test Procedure	149
10.3. Test Setup Layout	149
10.4. Test Result and Data	150
11. Maximum Power Spectral Density	152
11.1. Test Limit	152
11.2. Test Procedure	152
11.3. Test Setup Layout	152
11.4. Test Result and Data	153
12. Frequency Stability	175
12.1. Test Procedure	175
12.2. Test Setup Layout	175
12.3. Test Result and Data	176



History of this test report

☒ Original.

☐ Additional attachment as following record:

Report No.	Issue Date	Description
DEDG2112089	Jan. 19, 2022	Initial Issue



1. Summary of Test Procedure and Test Results

1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart E §15.407

KDB 789033

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207(a)	AC Power Line Conducted Emission	PASS
15.407(b) 15.209	Radiated Spurious Emission	PASS
15.407(a)	26 dB & Occupied Bandwidth	PASS
15.407 (a) & (a)(3)	Average Power	PASS
15.407(a)	Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
Note: Deviations Yes ☐ No ☒ *The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.		



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment and Model Description

Equipment	Wi-Fi Module
Model Name	AX1802-GT
Model Discrepancy	N/A
TPC Function	No TPC function
Frequency Range	WIFI 2.4G: 2402MHz-2483.5MHz WIFI 5G: 5150MHz-5250MHz, 5725MHz -5850MHz
Modulation Type	802.11b: CCK, DQPSK, DBPSK 802.11a/g: 64-QAM, 16-QAM, QPSK, BPSK 802.11n: 64-QAM, 16-QAM, QPSK, BPSK 802.11ac: 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK 802.11ax: 1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
Antenna Type	Dipole Antenna
Operating Voltage	DC 12V

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2. Carrier Frequency of Channels

Band : 5150MHz-5250MHz

802.11a, 802.11n HT 20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*36	5180	*44	5220
40	5200	*48	5240

802.11n HT 40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*38	5190	*46	5230

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)
*42	5210

Band : 5725MHz -5850MHz

802.11a, 802.11n HT 20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*149	5745	161	5805
153	5765	*165	5825
*157	5785		

802.11n HT 40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*151	5755	*159	5795

802.11ac VHT80, 802.11ax HE80

Channel	Frequency(MHz)
*155	5775

Note: Channels remarked * are selected to perform test.



2.3. Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included Notebook ,adapter and EUT for RF test.
- An executive program, "QATool_Dbg.exe 0.0.2.15" under Windows 7 system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted	Emissions from the AC mains power ports
Test Mode	Operating Description
1	802.11a for 120V
2	802.11n HT20 for 120V
3	802.11n HT40 for 120V
4	802.11ac VHT20 for 120V
5	802.11ac VHT40 for 120V
6	802.11ac VHT80 for 120V
7	802.11ax HE20 for 120V
8	802.11ax HE40 for 120V
9	802.11ax HE80 for 120V
10	802.11a for 240V
caused "Test Mode 1 at CH36:5180MHz" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11a
2	802.11n HT20
3	802.11n HT40
4	802.11ac VHT20
5	802.11ac VHT40
6	802.11ac VHT80
7	802.11ax HE20
8	802.11ax HE40
9	802.11ax HE80
caused "Test Mode 1 at CH36:5180MHz" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 40GHz) for 1TX	
Test Mode	Operating Description
1	802.11a (6Mbps)
2	802.11n HT20 (6.5Mbps)
3	802.11n HT20 (13.5Mbps)
4	802.11ac VHT20 (6.5Mbps)
5	802.11ac VHT40 (13.5Mbps)
6	802.11ac VHT80 (29.3Mbps)
7	802.11ax HE20 (7.3Mbps)
8	802.11ax HE40 (14.6Mbps)
9	802.11ax HE80 (30.6Mbps)
caused "Test Mode 1,4~9" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 40GHz) for 2TX	
Test Mode	Operating Description
1	802.11n HT20 (13Mbps)
2	802.11n HT20 (27Mbps)
3	802.11ac VHT20 (13Mbps)
4	802.11ac VHT40 (27Mbps)
5	802.11ac VHT80 (29.3Mbps)
6	802.11ax HE20 (7.3Mbps)
7	802.11ax HE40 (14.6Mbps)
8	802.11ax HE80 (30.6Mbps)
caused "Test Mode 3~8" generated the worst case, it was reported as the final data.	



Modulation Type	TX CONFIGURATION
802.11a	1TX
802.11n HT20	1TX,2TX
802.11n HT40	1TX,2TX
802.11ac VHT20	1TX,2TX
802.11ac VHT40	1TX,2TX
802.11ac VHT80	1TX,2TX
802.11ax HE20	1TX,2TX
802.11ax HE40	1TX,2TX
802.11ax HE80	1TX, 2TX
* VHT20/VHT40 covers HT20/HT40, due to same modulation. 802.11ac mode is the worst case for final tests except RF output power test after pretesting all modulation type.	

2.4. Power Parameter Value of the test software

Band: 5150MHz-5250MHz					
Mode	Frequency (MHz)	Setting level			
		Ant 1	Ant 2	Ant 1+2	
				Ant 1	Ant 2
802.11a	5180	13	13	N/A	N/A
	5220	13	13	N/A	N/A
	5240	13	13	N/A	N/A
802.11n HT20	5180	13	13	13	13
	5220	13	13	13	13
	5240	13	13	13	13
802.11n HT40	5190	13	13	13	13
	5230	13	13	13	13
802.11ac VHT20	5180	13	13	13	13
	5220	13	13	13	13
	5240	13	13	13	13
802.11ac VHT40	5190	13	13	13	13
	5230	13	13	13	13
802.11ac VHT80	5210	15	15	15	15
802.11ax HE20	5180	13	13	13	13
	5220	13	13	13	13
	5240	13	13	13	13
802.11ax HE40	5190	13	13	13	13
	5230	13	13	13	13
802.11ax HE80	5210	15	15	15	15




Band: 5725MHz -5850MHz					
Mode	Frequency (MHz)	Setting level			
		Ant 1	Ant 2	Ant 1+2	
				Ant 1	Ant 2
802.11a	5745	13	13	N/A	N/A
	5785	13	13	N/A	N/A
	5825	13	13	N/A	N/A
802.11n HT20	5745	13	13	13	13
	5785	13	13	13	13
	5825	13	13	13	13
802.11n HT40	5755	13	13	13	13
	5795	13	13	13	13
802.11ac VHT20	5745	13	13	13	13
	5785	13	13	13	13
	5825	13	13	13	13
802.11ac VHT40	5755	13	13	13	13
	5795	13	13	13	13
802.11ac VHT80	5775	15	15	15	15
802.11ax HE20	5745	13	13	13	13
	5785	13	13	13	13
	5825	13	13	13	13
802.11ax HE40	5755	13	13	13	13
	5795	13	13	13	13
802.11ax HE80	5775	15	15	15	15



2.5. Description of Test System

Product	Manufacturer	Model No.	Power Cord
1 Notebook	SONY	PCG-71811P	Non-Shielded, 1.8m
2 Adapter	Asian	WA-36WFU	N/A

Connection Diagram

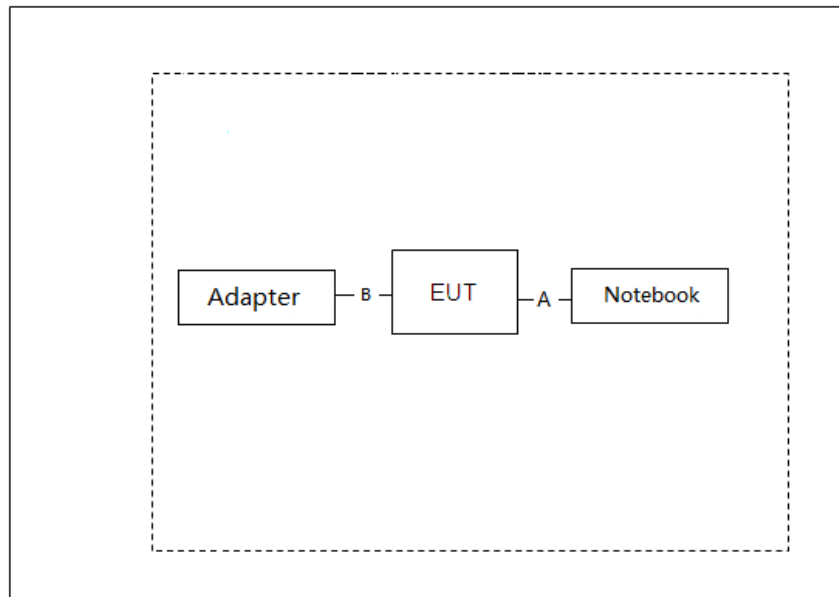

Signal Cable Type	Quantity	Signal cable Description
A RJ45 Cable	1	5.0m NonShielding
B DC Cable	1	1.5m NonShielding



2.6. General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-DG	2021/12/28~2022/01/18	22~25℃ / 50~60%	Amos Zhang
Radiated Emissions	3M02-DG	2021/12/28~2022/01/18	22~25℃ / 50~60%	Amos Zhang
AC Power Line Conducted Emission	CON01-DG	2021/12/28~2022/01/18	22~25℃ / 50~60%	Amos Zhang

2.7. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±2.88dB
Radiated Spurious Emission(9KHz~30MHz)	±2.15dB
Radiated Spurious Emission(30MHz~1GHz)	±4.95dB
Radiated Spurious Emission(1GHz~18GHz)	±3.24dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&26dB Bandwidth	±4.422%
Occupied Bandwidth	±4.244%
Peak Output Power(Conducted Power Meter)	±1.4 dB
Power Spectral Density	±1.387 dB
Frequency Stability	±0.6338Hz



3. Test Equipment and Ancillaries Used for Tests

AC Power Line Conducted Emission					
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100564	2022.01.08	2023.01.07
LISN	SCHWARZBECK	NSLK 8127	8127748	2022.01.08	2023.01.07
LISN	SCHWARZBECK	NSLK 8127	8127749	2022.01.08	2023.01.07
ISN	TESEQ	ISN T800	42809	2021.05.10	2022.05.09
Pulse Limiter with 10dB Attenuation	SCHWARZBECK	VTSD 9561-F	9561-F106	2022.01.08	2023.01.07
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2021.08.17	2022.08.16

Radiated Emissions					
Test Site	3M02-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100563	2021.05.14	2022.05.13
H64 Preamplifier	HP	8447F	3113A05582	2022.01.08	2023.01.07
Loop Antenna	R&S	HFH2-Z2	100150	2020.06.08	2022.06.07
Bilog Antenna	Sunol Science	JB1	A072414-1	2020.11.25	2022.11.24
Preamplifier	EMEC	EM01G18G	060739	2021.06.29	2022.06.28
Preamplifier	COM-POWER	PA-840	711885	2021.05.14	2022.05.13
Horn Antenna	Sunol	DRH-118	A072913	2021.08.22	2023.08.21
Standard Gain Horn Antenna	TRC	HA-2640	18050	2020.06.08	2022.06.07
Standard Gain Horn Antenna	TRC	HA-1726	18051	2020.06.08	2022.06.07
FSQ Signal Analyzer	R&S	FSQ40	200012	2021.05.14	2022.05.13
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2021.08.17	2022.08.16

Test Item	RF Conducted				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2021.05.14	2022.05.13
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2021.05.14	2022.05.13
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2021.05.14	2022.05.13
USB Wideband Power Sensor	Boonton	55006	9778	2022.01.08	2023.01.07
Temperature/ Humidity Meter	mingle	ETH529	N/A	2022.01.08	2023.01.07



4. Antenna Requirements

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2. Antenna Construction and Directional Gain

WIFI 5G:

Antenna Type	Dipole Antenna
Antenna Gain	5150MHz - 5250MHz: ANT A:3.46dBi; ANT B: 4.16dBi 5725MHz - 5850MHz: ANT A:3.41dBi; ANT B: 4.2dBi

(Non-Beamforming)

For 1TX

5150MHz - 5250MHz
For Power directional gain= Gant= 4.16 dBi For PSD directional gain = $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 4.16 (dBi)
5725MHz - 5850MHz
For Power directional gain= Gant=4.20 dBi For PSD directional gain = $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 4.20 (dBi)

For 2TX

5150MHz - 5250MHz
For Power directional gain= $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 6.83 (dBi) For PSD directional gain = $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 6.83 (dBi)
5725MHz - 5850MHz
For Power directional gain= $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 6.82 (dBi) For PSD directional gain = $10 \log[(10G1 / 20 + 10G2 / 20 + \dots + 10GN / 20)^2 / NANT]$ = 6.82 (dBi)

5. Test of AC Power Line Conducted Emission

5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

5.2. Test Procedures


- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3. Typical Test Setup

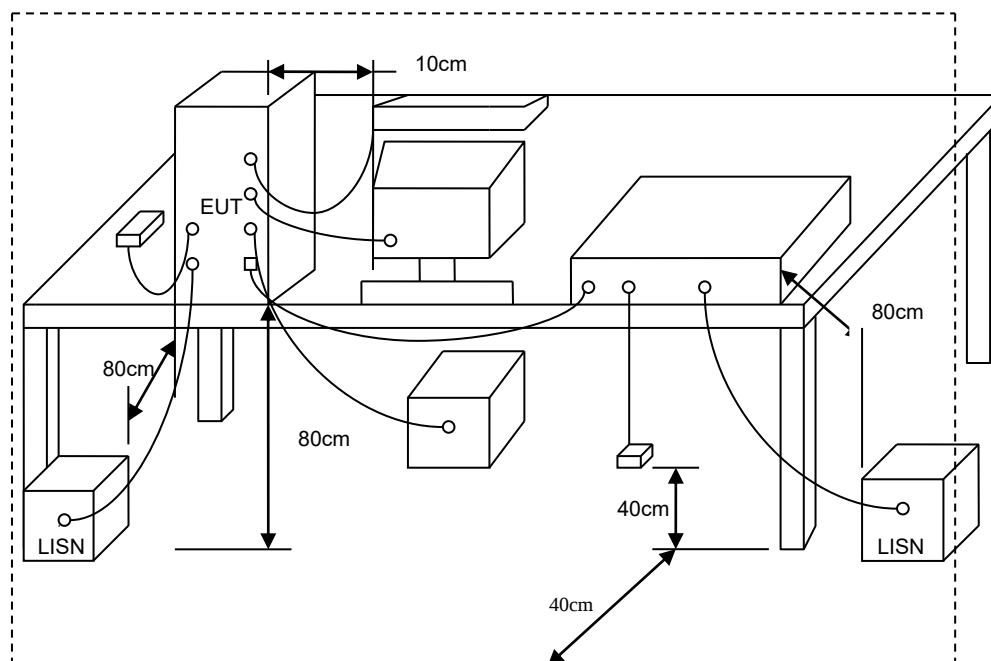




5.4. Test Result and Data

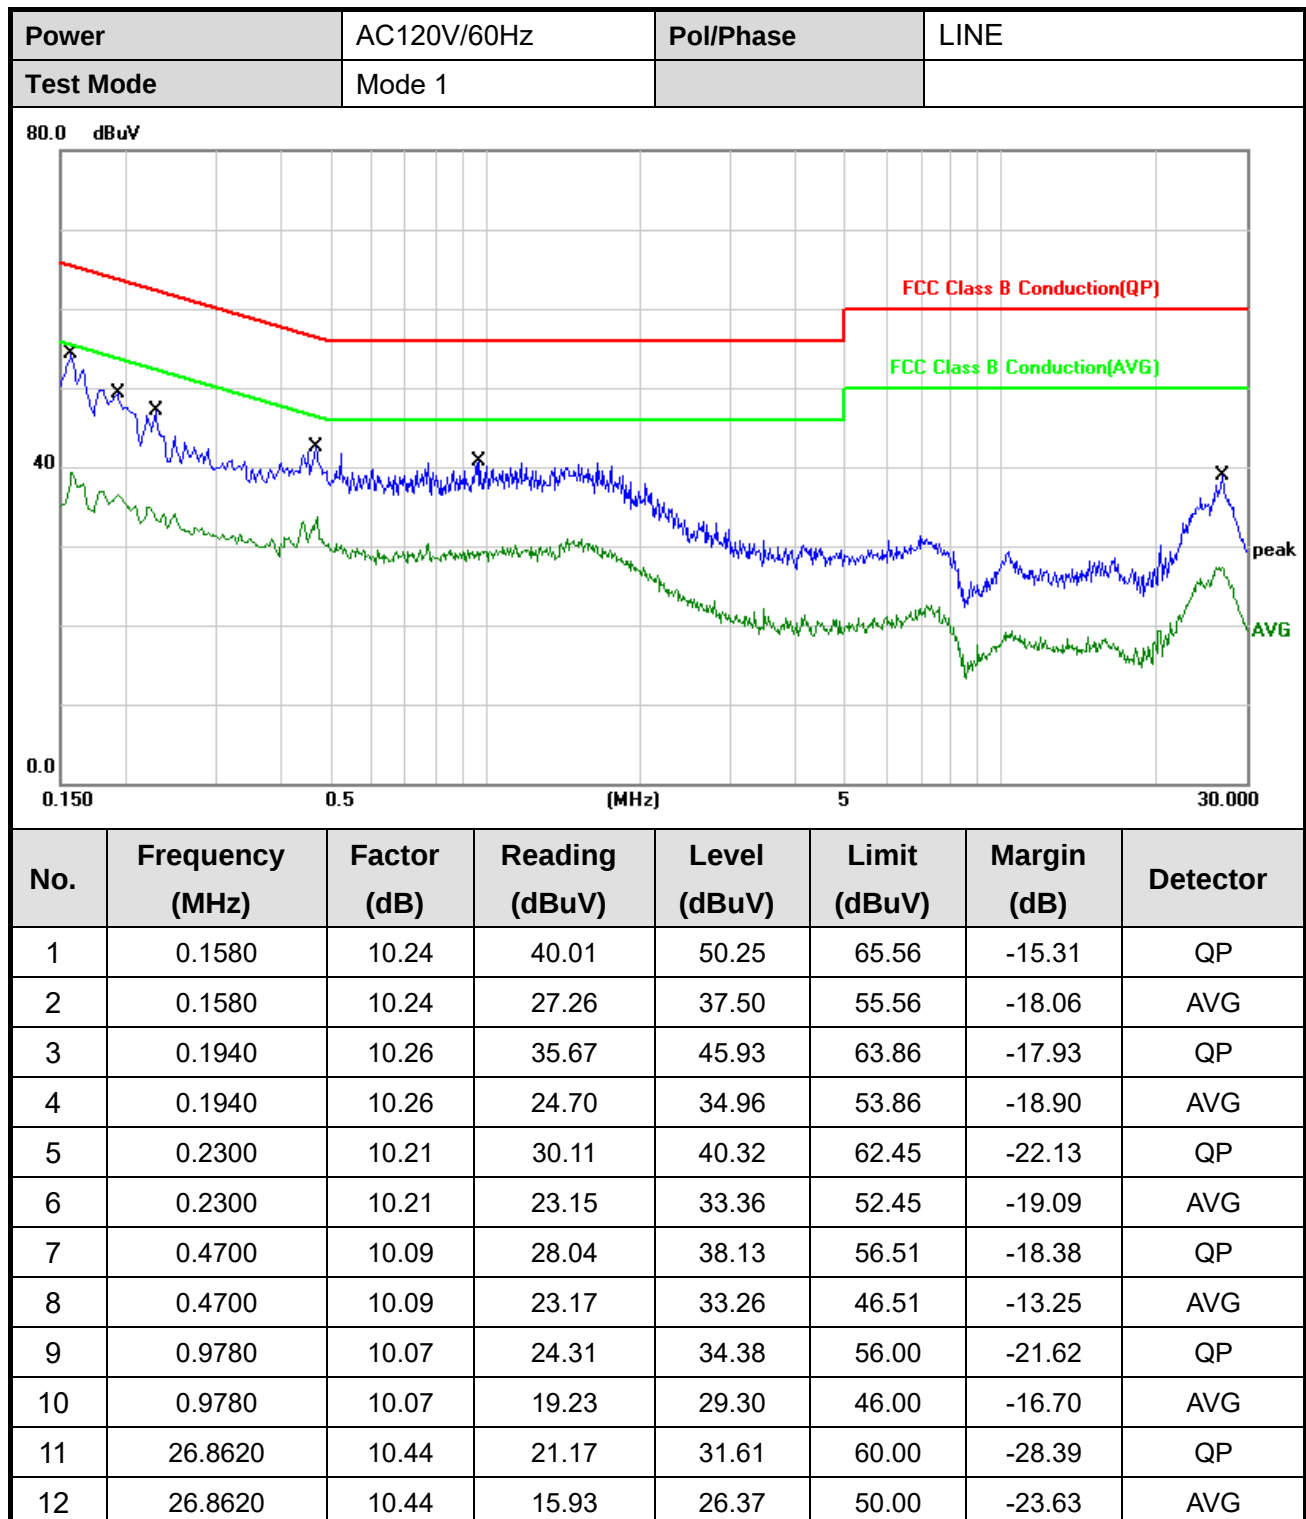

Note: Measurement Level = Reading Level + Correct Factor

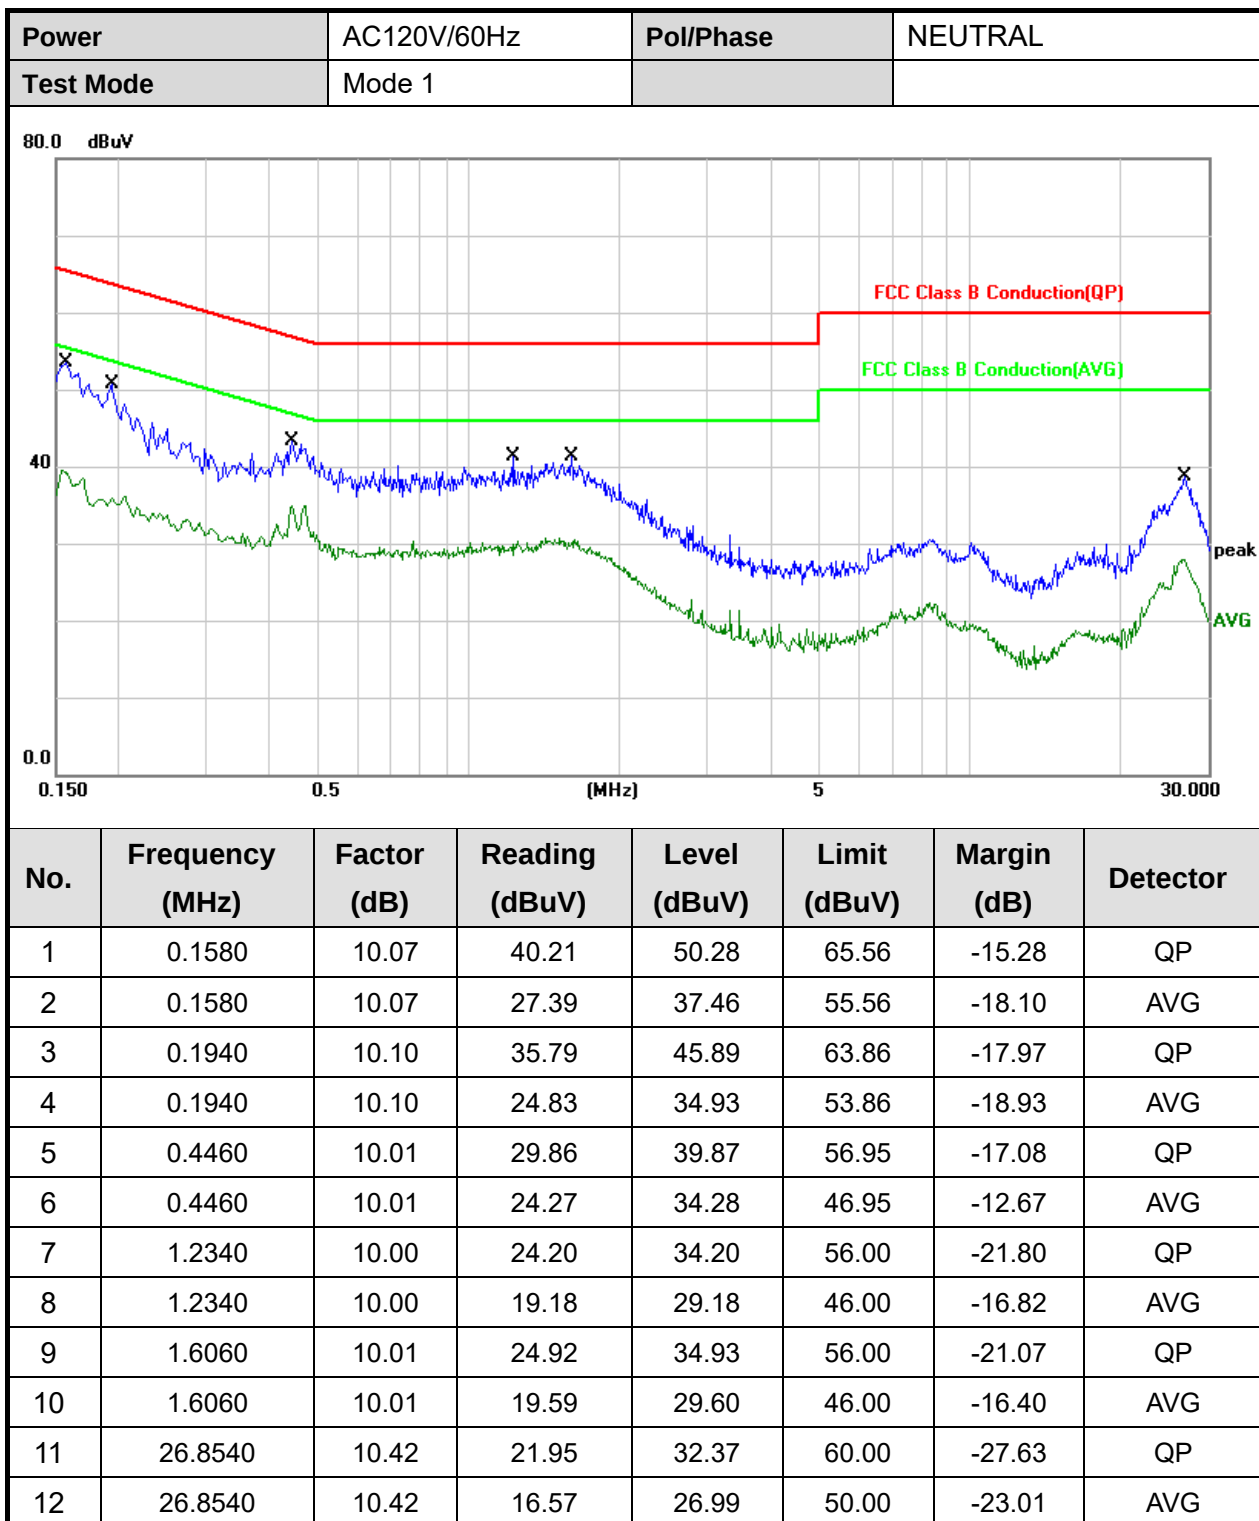

Note: Measurement Level = Reading Level + Correct Factor



6. Test of Spurious Emission (Radiated)

6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph 15.407(b)(9)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.
Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions sch that emissions from the EUT are maximized.(X-AXIS is the worst.)




6.3. Typical Test Setup


Below 30MHz test setup

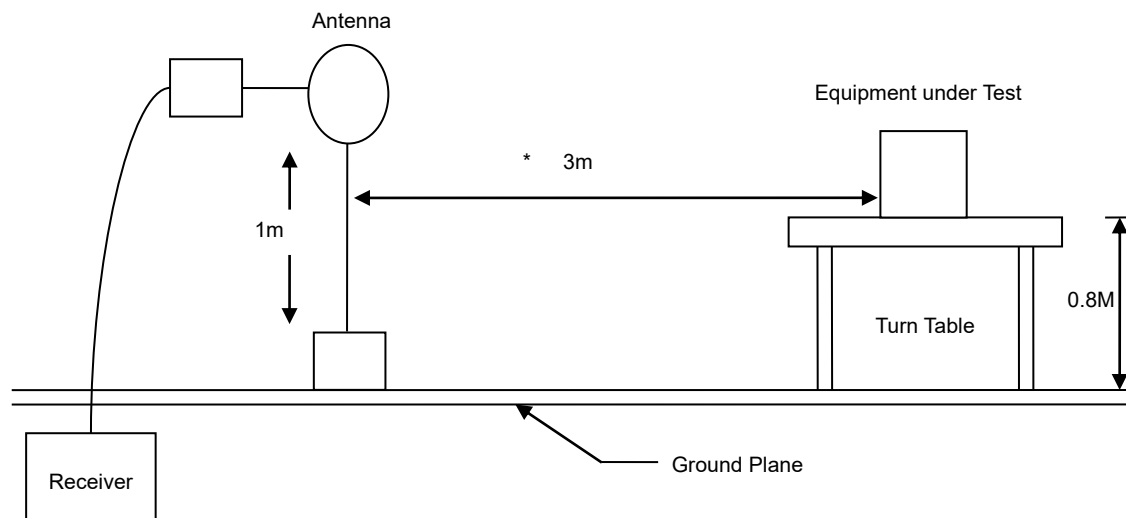

30MHz- 1GHz Test Setup

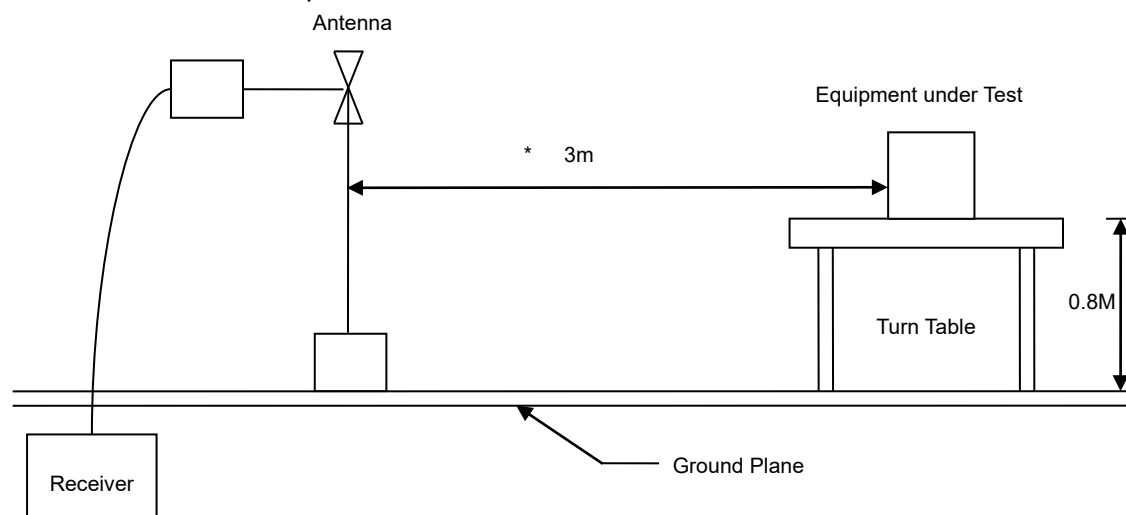

Above 1GHz Test Setup

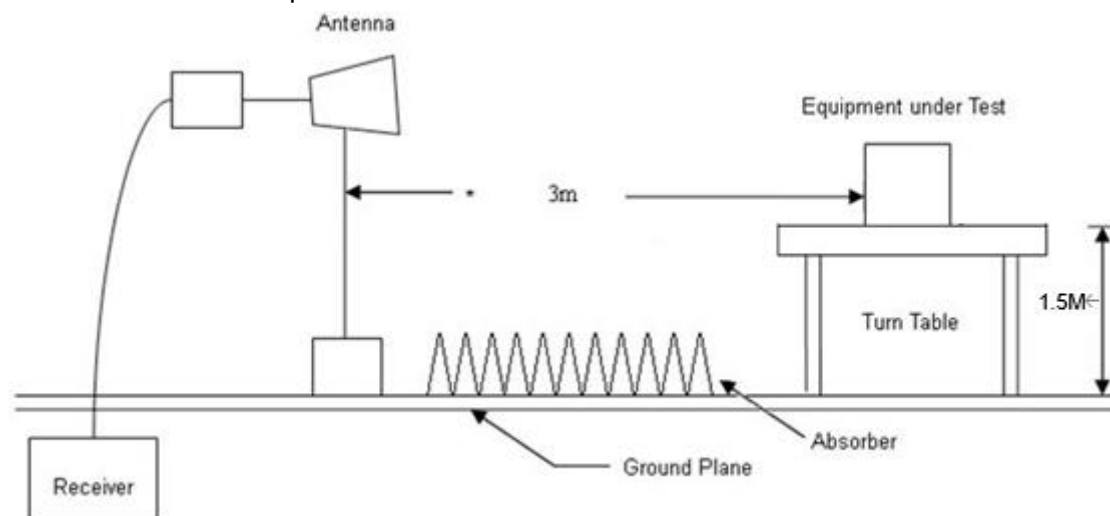




6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5. Test Result and Data (30MHz ~ 1GHz)

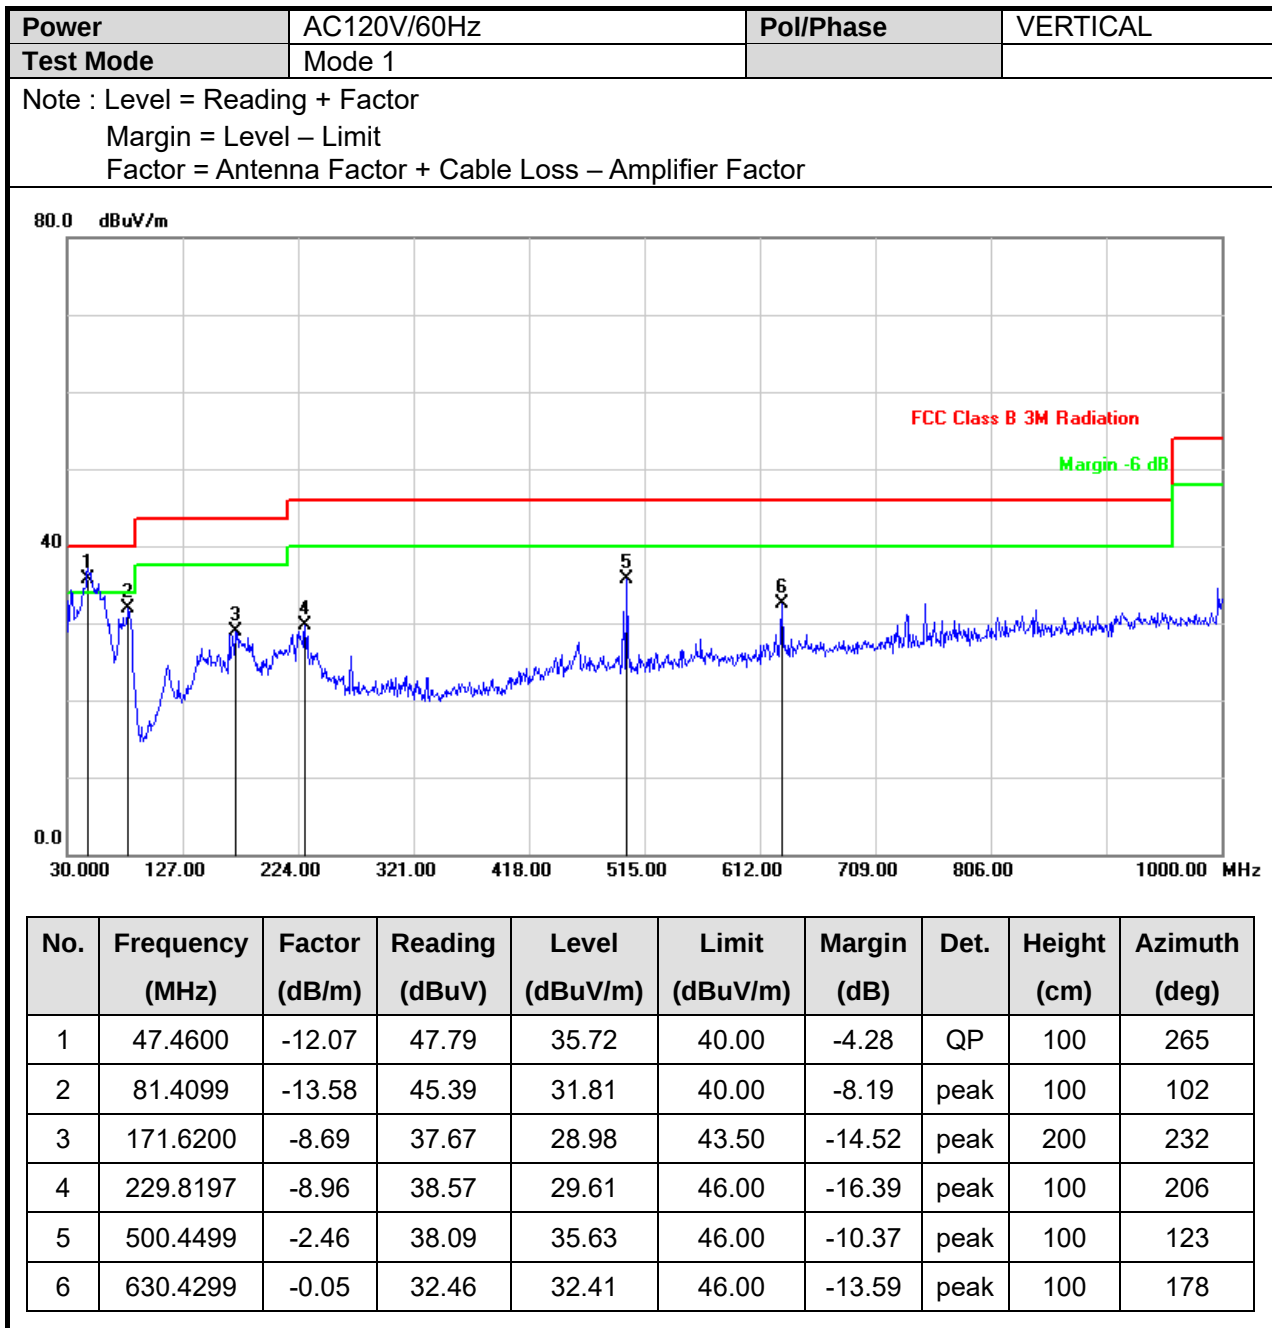




Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1		

Note : Level = Reading + Factor

Margin = Level – Limit

Factor = Antenna Factor + Cable Loss – Amplifier Factor

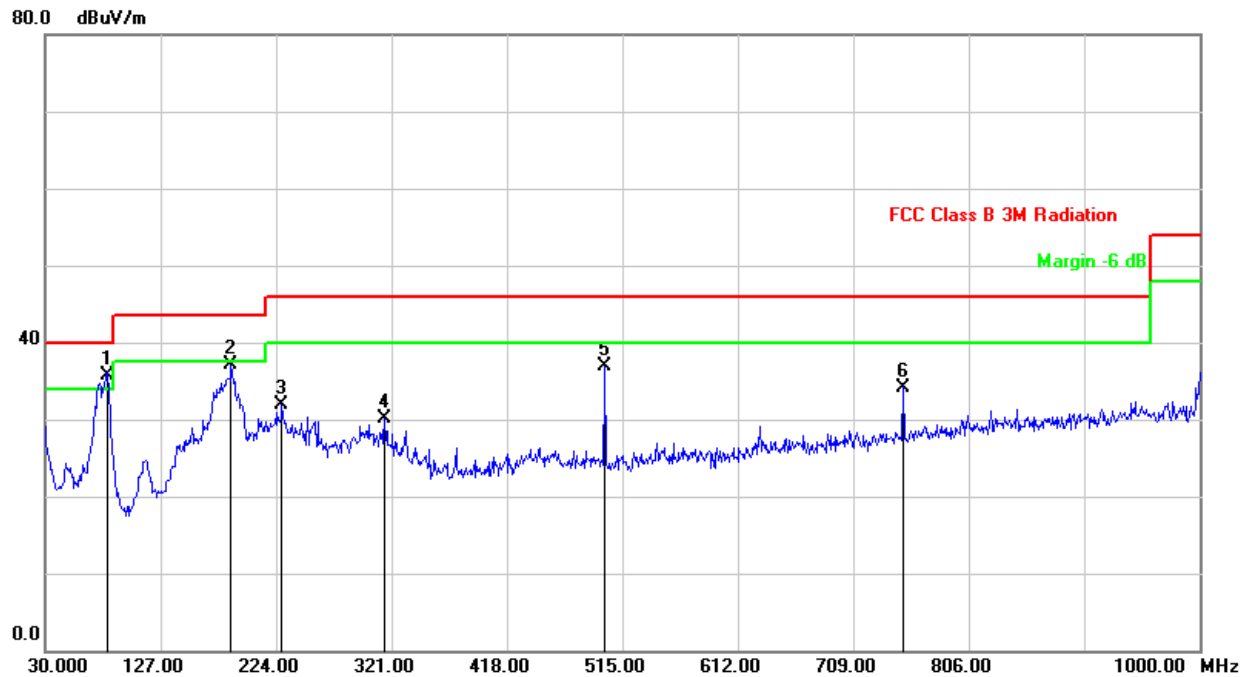

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	82.3799	-13.56	49.23	35.67	40.00	-4.33	QP	100	202
2	186.1699	-9.09	46.10	37.01	43.50	-6.49	peak	100	65
3	228.8498	-9.00	40.81	31.81	46.00	-14.19	peak	100	206
4	315.1800	-5.65	35.70	30.05	46.00	-15.95	peak	100	233
5	500.4499	-2.46	39.33	36.87	46.00	-9.13	peak	100	127
6	750.7100	1.57	32.63	34.20	46.00	-11.80	peak	200	130



6.6. Test Result and Data (1GHz ~ 40GHz)

SISO (ANT A)

Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.85	49.58	74.00	-24.42	peak	H
2	5150.000	1.73	34.48	36.21	54.00	-17.79	AVG	H
3	10360.000	12.85	38.44	51.29	68.20	-16.91	peak	H
4	15540.000	25.25	26.82	52.07	74.00	-21.93	peak	H
5	15540.000	25.25	13.89	39.14	54.00	-14.86	AVG	H
1	5150.000	1.73	49.43	51.16	74.00	-22.84	peak	V
2	5150.000	1.73	35.52	37.25	54.00	-16.75	AVG	V
3	10360.000	12.85	38.68	51.53	68.20	-16.67	peak	V
4	15540.000	25.25	27.52	52.77	74.00	-21.23	peak	V
5	15540.000	25.25	14.27	39.52	54.00	-14.48	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.33	49.06	74.00	-24.94	peak	H
2	5150.000	1.73	35.57	37.30	54.00	-16.70	AVG	H
3	5350.000	1.89	48.14	50.03	74.00	-23.97	peak	H
4	5350.000	1.89	35.97	37.86	54.00	-16.14	AVG	H
5	10440.000	13.03	38.84	51.87	68.20	-16.33	peak	H
6	15660.000	25.30	27.12	52.42	74.00	-21.58	peak	H
7	15660.000	25.30	13.38	38.68	54.00	-15.32	AVG	H
1	5150.000	1.73	48.74	50.47	74.00	-23.53	peak	V
2	5150.000	1.73	34.69	36.42	54.00	-17.58	AVG	V
3	5350.000	1.89	48.39	50.28	74.00	-23.72	peak	V
4	5350.000	1.89	34.29	36.18	54.00	-17.82	AVG	V
5	10440.000	13.03	39.61	52.64	68.20	-15.56	peak	V
6	15660.000	25.30	27.73	53.03	74.00	-20.97	peak	V
7	15660.000	25.30	14.46	39.76	54.00	-14.24	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	48.06	49.95	74.00	-24.05	peak	H
2	5350.000	1.89	34.15	36.04	54.00	-17.96	AVG	H
3	10480.000	13.12	38.99	52.11	68.20	-16.09	peak	H
4	15720.000	25.33	28.23	53.56	74.00	-20.44	peak	H
5	15720.000	25.33	14.51	39.84	54.00	-14.16	AVG	H
1	5350.000	1.89	48.87	50.76	74.00	-23.24	peak	V
2	5350.000	1.89	34.66	36.55	54.00	-17.45	AVG	V
3	10480.000	13.12	39.31	52.43	68.20	-15.77	peak	V
4	15720.000	25.33	29.85	55.18	74.00	-18.82	peak	V
5	15720.000	25.33	16.72	42.05	54.00	-11.95	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	49.52	51.25	74.00	-22.75	peak	H
2	5150.000	1.73	36.11	37.84	54.00	-16.16	AVG	H
3	10360.000	12.85	38.71	51.56	68.20	-16.64	peak	H
4	15540.000	25.25	28.39	53.64	74.00	-20.36	peak	H
5	15540.000	25.25	14.83	40.08	54.00	-13.92	AVG	H
1	5150.000	1.73	49.68	51.41	74.00	-22.59	peak	V
2	5150.000	1.73	35.93	37.66	54.00	-16.34	AVG	V
3	10360.000	12.85	39.49	52.34	68.20	-15.86	peak	V
4	15540.000	25.25	28.93	54.18	74.00	-19.82	peak	V
5	15540.000	25.25	15.18	40.43	54.00	-13.57	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.95	49.68	74.00	-24.32	peak	H
2	5150.000	1.73	34.42	36.15	54.00	-17.85	AVG	H
3	5350.000	1.89	47.77	49.66	74.00	-24.34	peak	H
4	5350.000	1.89	34.20	36.09	54.00	-17.91	AVG	H
5	10440.000	13.03	38.60	51.63	68.20	-16.57	peak	H
6	15660.000	25.30	28.58	53.88	74.00	-20.12	peak	H
7	15660.000	25.30	14.02	39.32	54.00	-14.68	AVG	H
1	5150.000	1.73	48.59	50.32	74.00	-23.68	peak	V
2	5150.000	1.73	35.68	37.41	54.00	-16.59	AVG	V
3	5350.000	1.89	48.80	50.69	74.00	-23.31	peak	V
4	5350.000	1.89	35.66	37.55	54.00	-16.45	AVG	V
5	10440.000	13.03	38.44	51.47	68.20	-16.73	peak	V
6	15660.000	25.30	29.04	54.34	74.00	-19.66	peak	V
7	15660.000	25.30	15.56	40.86	54.00	-13.14	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	47.88	49.77	74.00	-24.23	peak	H
2	5350.000	1.89	34.23	36.12	54.00	-17.88	AVG	H
3	10480.000	13.12	38.94	52.06	68.20	-16.14	peak	H
4	15720.000	25.33	29.12	54.45	74.00	-19.55	peak	H
5	15720.000	25.33	14.84	40.17	54.00	-13.83	AVG	H
1	5350.000	1.89	48.88	50.77	74.00	-23.23	peak	V
2	5350.000	1.89	34.71	36.60	54.00	-17.40	AVG	V
3	10480.000	13.12	40.34	53.46	68.20	-14.74	peak	V
4	15720.000	25.33	30.81	56.14	74.00	-17.86	peak	V
5	15720.000	25.33	16.50	41.83	54.00	-12.17	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.34	50.07	74.00	-23.93	peak	H
2	5150.000	1.73	35.53	37.26	54.00	-16.74	AVG	H
3	10380.000	12.89	39.75	52.64	68.20	-15.56	peak	H
4	15570.000	25.26	29.05	54.31	74.00	-19.69	peak	H
5	15570.000	25.26	15.60	40.86	54.00	-13.14	AVG	H
1	5150.000	1.73	51.57	53.30	74.00	-20.70	peak	V
2	5150.000	1.73	38.53	40.26	54.00	-13.74	AVG	V
3	10380.000	12.89	40.63	53.52	68.20	-14.68	peak	V
4	15570.000	25.26	30.02	55.28	74.00	-18.72	peak	V
5	15570.000	25.26	17.16	42.42	54.00	-11.58	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.01	49.74	74.00	-24.26	peak	H
2	5150.000	1.73	34.48	36.21	54.00	-17.79	AVG	H
3	5350.000	1.89	47.74	49.63	74.00	-24.37	peak	H
4	5350.000	1.89	34.29	36.18	54.00	-17.82	AVG	H
5	10460.000	13.07	39.57	52.64	68.20	-15.56	peak	H
6	15690.000	25.32	29.86	55.18	74.00	-18.82	peak	H
7	15690.000	25.32	16.83	42.15	54.00	-11.85	AVG	H
1	5150.000	1.73	49.46	51.19	74.00	-22.81	peak	V
2	5150.000	1.73	36.12	37.85	54.00	-16.15	AVG	V
3	5350.000	1.89	48.94	50.83	74.00	-23.17	peak	V
4	5350.000	1.89	34.62	36.51	54.00	-17.49	AVG	V
5	10460.000	13.07	40.66	53.73	68.20	-14.47	peak	V
6	15690.000	25.32	30.02	55.34	74.00	-18.66	peak	V
7	15690.000	25.32	16.77	42.09	54.00	-11.91	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ac VHT80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	55.06	56.79	74.00	-17.21	peak	H
2	5150.000	1.73	40.90	42.63	54.00	-11.37	AVG	H
3	5350.000	1.89	48.60	50.49	74.00	-23.51	peak	H
4	5350.000	1.89	34.72	36.61	54.00	-17.39	AVG	H
5	10420.000	12.98	40.44	53.42	68.20	-14.78	peak	H
6	15630.000	25.29	29.75	55.04	74.00	-18.96	peak	H
7	15630.000	25.29	16.39	41.68	54.00	-12.32	AVG	H
1	5150.000	1.73	49.36	51.09	74.00	-22.91	peak	V
2	5150.000	1.73	35.62	37.35	54.00	-16.65	AVG	V
3	5350.000	1.89	48.19	50.08	74.00	-23.92	peak	V
4	5350.000	1.89	34.45	36.34	54.00	-17.66	AVG	V
5	10420.000	12.98	39.47	52.45	68.20	-15.75	peak	V
6	15630.000	25.29	29.44	54.73	74.00	-19.27	peak	V
7	15630.000	25.29	15.09	40.38	54.00	-13.62	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.58	49.31	74.00	-24.69	peak	H
2	5150.000	1.73	34.79	36.52	54.00	-17.48	AVG	H
3	10360.000	12.85	39.76	52.61	68.20	-15.59	peak	H
4	15540.000	25.25	28.20	53.45	74.00	-20.55	peak	H
5	15540.000	25.25	13.76	39.01	54.00	-14.99	AVG	H
1	5150.000	1.73	50.31	52.04	74.00	-21.96	peak	V
2	5150.000	1.73	36.96	38.69	54.00	-15.31	AVG	V
3	10360.000	12.85	40.49	53.34	68.20	-14.86	peak	V
4	15540.000	25.25	29.92	55.17	74.00	-18.83	peak	V
5	15540.000	25.25	16.28	41.53	54.00	-12.47	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.06	49.79	74.00	-24.21	peak	H
2	5150.000	1.73	34.78	36.51	54.00	-17.49	AVG	H
3	5350.000	1.89	48.15	50.04	74.00	-23.96	peak	H
4	5350.000	1.89	35.03	36.92	54.00	-17.08	AVG	H
5	10440.000	13.03	39.07	52.10	68.20	-16.10	peak	H
6	15660.000	25.30	28.12	53.42	74.00	-20.58	peak	H
7	15660.000	25.30	15.02	40.32	54.00	-13.68	AVG	H
1	5150.000	1.73	47.89	49.62	74.00	-24.38	peak	V
2	5150.000	1.73	34.65	36.38	54.00	-17.62	AVG	V
3	5350.000	1.89	49.08	50.97	74.00	-23.03	peak	V
4	5350.000	1.89	34.53	36.42	54.00	-17.58	AVG	V
5	10440.000	13.03	40.22	53.25	68.20	-14.95	peak	V
6	15660.000	25.30	30.16	55.46	74.00	-18.54	peak	V
7	15660.000	25.30	17.03	42.33	54.00	-11.67	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	48.60	50.49	74.00	-23.51	peak	H
2	5350.000	1.89	35.33	37.22	54.00	-16.78	AVG	H
3	10480.000	13.12	39.36	52.48	68.20	-15.72	peak	H
4	15720.000	25.33	28.30	53.63	74.00	-20.37	peak	H
5	15720.000	25.33	14.01	39.34	54.00	-14.66	AVG	H
1	5350.000	1.89	50.68	52.57	74.00	-21.43	peak	V
2	5350.000	1.89	36.87	38.76	54.00	-15.24	AVG	V
3	10480.000	13.12	40.53	53.65	68.20	-14.55	peak	V
4	15720.000	25.33	30.15	55.48	74.00	-18.52	peak	V
5	15720.000	25.33	16.21	41.54	54.00	-12.46	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.34	50.07	74.00	-23.93	peak	H
2	5150.000	1.73	34.79	36.52	54.00	-17.48	AVG	H
3	10380.000	12.89	39.45	52.34	68.20	-15.86	peak	H
4	15570.000	25.26	28.35	53.61	74.00	-20.39	peak	H
5	15570.000	25.26	14.46	39.72	54.00	-14.28	AVG	H
1	5150.000	1.73	51.57	53.30	74.00	-20.70	peak	V
2	5150.000	1.73	37.72	39.45	54.00	-14.55	AVG	V
3	10380.000	12.89	40.94	53.83	68.20	-14.37	peak	V
4	15570.000	25.26	30.51	55.77	74.00	-18.23	peak	V
5	15570.000	25.26	16.32	41.58	54.00	-12.42	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.01	49.74	74.00	-24.26	peak	H
2	5150.000	1.73	34.42	36.15	54.00	-17.85	AVG	H
3	5350.000	1.89	47.74	49.63	74.00	-24.37	peak	H
4	5350.000	1.89	34.15	36.04	54.00	-17.96	AVG	H
5	10460.000	13.07	40.15	53.22	68.20	-14.98	peak	H
6	15690.000	25.32	29.35	54.67	74.00	-19.33	peak	H
7	15690.000	25.32	15.22	40.54	54.00	-13.46	AVG	H
1	5150.000	1.73	49.46	51.19	74.00	-22.81	peak	V
2	5150.000	1.73	35.11	36.84	54.00	-17.16	AVG	V
3	5350.000	1.89	48.94	50.83	74.00	-23.17	peak	V
4	5350.000	1.89	34.69	36.58	54.00	-17.42	AVG	V
5	10460.000	13.07	41.55	54.62	68.20	-13.58	peak	V
6	15690.000	25.32	31.15	56.47	74.00	-17.53	peak	V
7	15690.000	25.32	17.22	42.54	54.00	-11.46	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 9, 802.11ax HE80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.90	50.63	74.00	-23.37	peak	H
2	5150.000	1.73	34.75	36.48	54.00	-17.52	AVG	H
3	5350.000	1.89	47.95	49.84	74.00	-24.16	peak	H
4	5350.000	1.89	34.46	36.35	54.00	-17.65	AVG	H
5	10420.000	12.98	40.84	53.82	68.20	-14.38	peak	H
6	15630.000	25.29	30.19	55.48	74.00	-18.52	peak	H
7	15630.000	25.29	16.77	42.06	54.00	-11.94	AVG	H
1	5150.000	1.73	55.89	57.62	74.00	-16.38	peak	V
2	5150.000	1.73	41.74	43.47	54.00	-10.53	AVG	V
3	5350.000	1.89	48.45	50.34	74.00	-23.66	peak	V
4	5350.000	1.89	35.22	37.11	54.00	-16.89	AVG	V
5	10420.000	12.98	39.47	52.45	68.20	-15.75	peak	V
6	15630.000	25.29	27.89	53.18	74.00	-20.82	peak	V
7	15630.000	25.29	14.16	39.45	54.00	-14.55	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.33	50.72	68.20	-17.48	peak	H
2	5700.000	2.52	48.74	51.26	105.20	-53.94	peak	H
3	5720.000	2.57	48.51	51.08	110.80	-59.72	peak	H
4	5725.000	2.58	48.83	51.41	122.20	-70.79	peak	H
5	11490.000	15.84	37.31	53.15	74.00	-20.85	peak	H
6	11490.000	15.84	24.00	39.84	54.00	-14.16	AVG	H
7	17235.000	30.26	24.20	54.46	68.20	-13.74	peak	H
1	5650.000	2.39	49.08	51.47	68.20	-16.73	peak	V
2	5700.000	2.52	50.17	52.69	105.20	-52.51	peak	V
3	5720.000	2.57	49.91	52.48	110.80	-58.32	peak	V
4	5725.000	2.58	50.78	53.36	122.20	-68.84	peak	V
5	11490.000	15.84	37.81	53.65	74.00	-20.35	peak	V
6	11490.000	15.84	23.58	39.42	54.00	-14.58	AVG	V
7	17235.000	30.26	25.46	55.72	68.20	-12.48	peak	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.00	51.39	68.20	-16.81	peak	H
2	5700.000	2.52	48.38	50.90	105.20	-54.30	peak	H
3	5720.000	2.57	48.73	51.30	110.80	-59.50	peak	H
4	5725.000	2.58	48.87	51.45	122.20	-70.75	peak	H
5	5850.000	2.89	49.13	52.02	122.20	-70.18	peak	H
6	5855.000	2.90	48.95	51.85	110.80	-58.95	peak	H
7	5875.000	2.95	49.36	52.31	105.20	-52.89	peak	H
8	5925.000	3.07	48.58	51.65	68.20	-16.55	peak	H
9	11570.000	16.00	37.69	53.69	74.00	-20.31	peak	H
10	11570.000	16.00	24.04	40.04	54.00	-13.96	AVG	H
11	17355.000	30.74	23.98	54.72	68.20	-13.48	peak	H
1	5650.000	2.39	49.23	51.62	68.20	-16.58	peak	V
2	5700.000	2.52	49.46	51.98	105.20	-53.22	peak	V
3	5720.000	2.57	49.38	51.95	110.80	-58.85	peak	V
4	5725.000	2.58	49.46	52.04	122.20	-70.16	peak	V
5	5850.000	2.89	49.89	52.78	122.20	-69.42	peak	V
6	5855.000	2.90	48.99	51.89	110.80	-58.91	peak	V
7	5875.000	2.95	49.54	52.49	105.20	-52.71	peak	V
8	5925.000	3.07	48.99	52.06	68.20	-16.14	peak	V
9	11570.000	16.00	39.35	55.35	74.00	-18.65	peak	V
10	11570.000	16.00	25.29	41.29	54.00	-12.71	AVG	V
11	17355.000	30.74	25.44	56.18	68.20	-12.02	peak	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.27	51.16	122.20	-71.04	peak	H
2	5855.000	2.90	48.94	51.84	110.80	-58.96	peak	H
3	5875.000	2.95	48.02	50.97	105.20	-54.23	peak	H
4	5925.000	3.07	48.52	51.59	68.20	-16.61	peak	H
5	11650.000	16.16	37.11	53.27	74.00	-20.73	peak	H
6	11650.000	16.16	23.57	39.73	54.00	-14.27	AVG	H
7	17475.000	31.21	22.98	54.19	68.20	-14.01	peak	H
1	5850.000	2.89	51.40	54.29	122.20	-67.91	peak	V
2	5855.000	2.90	50.63	53.53	110.80	-57.27	peak	V
3	5875.000	2.95	50.33	53.28	105.20	-51.92	peak	V
4	5925.000	3.07	49.59	52.66	68.20	-15.54	peak	V
5	11650.000	16.16	37.31	53.47	74.00	-20.53	peak	V
6	11650.000	16.16	23.67	39.83	54.00	-14.17	AVG	V
7	17475.000	31.21	23.22	54.43	68.20	-13.77	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.54	50.93	68.20	-17.27	peak	H
2	5700.000	2.52	49.04	51.56	105.20	-53.64	AVG	H
3	5720.000	2.57	48.98	51.55	110.80	-59.25	peak	H
4	5725.000	2.58	48.97	51.55	122.20	-70.65	AVG	H
5	11490.000	15.84	37.33	53.17	74.00	-20.83	peak	H
6	11490.000	15.84	23.30	39.14	54.00	-14.86	peak	H
7	17235.000	30.26	23.80	54.06	68.20	-14.14	AVG	H
1	5650.000	2.39	49.19	51.58	68.20	-16.62	peak	V
2	5700.000	2.52	49.97	52.49	105.20	-52.71	AVG	V
3	5720.000	2.57	50.63	53.20	110.80	-57.60	peak	V
4	5725.000	2.58	54.70	57.28	122.20	-64.92	AVG	V
5	11490.000	15.84	38.98	54.82	74.00	-19.18	peak	V
6	11490.000	15.84	24.57	40.41	54.00	-13.59	peak	V
7	17235.000	30.26	24.82	55.08	68.20	-13.12	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.36	51.75	68.20	-16.45	peak	H
2	5700.000	2.52	49.50	52.02	105.20	-53.18	peak	H
3	5720.000	2.57	48.53	51.10	110.80	-59.70	peak	H
4	5725.000	2.58	48.69	51.27	122.20	-70.93	peak	H
5	5850.000	2.89	49.55	52.44	122.20	-69.76	peak	H
6	5855.000	2.90	48.87	51.77	110.80	-59.03	peak	H
7	5875.000	2.95	48.70	51.65	105.20	-53.55	peak	H
8	5925.000	3.07	49.78	52.85	68.20	-15.35	peak	H
9	11570.000	16.00	37.14	53.14	74.00	-20.86	peak	H
10	11570.000	16.00	23.82	39.82	54.00	-14.18	AVG	H
11	17355.000	30.74	23.57	54.31	68.20	-13.89	peak	H
1	5650.000	2.39	49.43	51.82	68.20	-16.38	peak	V
2	5700.000	2.52	49.38	51.90	105.20	-53.30	peak	V
3	5720.000	2.57	49.33	51.90	110.80	-58.90	peak	V
4	5725.000	2.58	49.50	52.08	122.20	-70.12	peak	V
5	5850.000	2.89	49.97	52.86	122.20	-69.34	peak	V
6	5855.000	2.90	49.15	52.05	110.80	-58.75	peak	V
7	5875.000	2.95	49.80	52.75	105.20	-52.45	peak	V
8	5925.000	3.07	49.15	52.22	68.20	-15.98	peak	V
9	11570.000	16.00	38.42	54.42	74.00	-19.58	peak	V
10	11570.000	16.00	25.30	41.30	54.00	-12.70	AVG	V
11	17355.000	30.74	25.24	55.98	68.20	-12.22	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.82	51.71	122.20	-70.49	peak	H
2	5855.000	2.90	48.83	51.73	110.80	-59.07	peak	H
3	5875.000	2.95	50.24	53.19	105.20	-52.01	peak	H
4	5925.000	3.07	50.20	53.27	68.20	-14.93	peak	H
5	11650.000	16.16	37.30	53.46	74.00	-20.54	peak	H
6	11650.000	16.16	23.89	40.05	54.00	-13.95	peak	H
7	17475.000	31.21	23.56	54.77	68.20	-13.43	peak	H
1	5850.000	2.89	50.37	53.26	122.20	-68.94	peak	V
2	5855.000	2.90	51.22	54.12	110.80	-56.68	peak	V
3	5875.000	2.95	49.68	52.63	105.20	-52.57	peak	V
4	5925.000	3.07	50.32	53.39	68.20	-14.81	peak	V
5	11650.000	16.16	38.49	54.65	74.00	-19.35	peak	V
6	11650.000	16.16	24.46	40.62	54.00	-13.38	AVG	V
7	17475.000	31.21	24.05	55.26	68.20	-12.94	peak	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH151 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.82	52.21	68.20	-15.99	peak	H
2	5700.000	2.52	48.67	51.19	105.20	-54.01	peak	H
3	5720.000	2.57	49.09	51.66	110.80	-59.14	peak	H
4	5725.000	2.58	49.86	52.44	122.20	-69.76	peak	H
5	11510.000	15.88	37.58	53.46	74.00	-20.54	peak	H
6	11510.000	15.88	23.65	39.53	54.00	-14.47	AVG	H
7	17265.000	30.38	24.30	54.68	68.20	-13.52	peak	H
1	5650.000	2.39	49.69	52.08	68.20	-16.12	peak	V
2	5700.000	2.52	50.21	52.73	105.20	-52.47	peak	V
3	5720.000	2.57	54.53	57.10	110.80	-53.70	peak	V
4	5725.000	2.58	57.27	59.85	122.20	-62.35	peak	V
5	11510.000	15.88	38.84	54.72	74.00	-19.28	peak	V
6	11510.000	15.88	24.50	40.38	54.00	-13.62	AVG	V
7	17265.000	30.38	25.38	55.76	68.20	-12.44	peak	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH159 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.85	51.74	122.20	-70.46	peak	H
2	5855.000	2.90	48.32	51.22	110.80	-59.58	peak	H
3	5875.000	2.95	48.50	51.45	105.20	-53.75	peak	H
4	5925.000	3.07	48.46	51.53	68.20	-16.67	peak	H
5	11590.000	16.04	37.24	53.28	74.00	-20.72	peak	H
6	11590.000	16.04	23.70	39.74	54.00	-14.26	AVG	H
7	17385.000	30.85	24.07	54.92	68.20	-13.28	peak	H
1	5850.000	2.89	49.54	52.43	122.20	-69.77	peak	V
2	5855.000	2.90	49.47	52.37	110.80	-58.43	peak	V
3	5875.000	2.95	49.78	52.73	105.20	-52.47	peak	V
4	5925.000	3.07	50.13	53.20	68.20	-15.00	peak	V
5	11590.000	16.04	38.78	54.82	74.00	-19.18	peak	V
6	11590.000	16.04	24.11	40.15	54.00	-13.85	AVG	V
7	17385.000	30.85	25.63	56.48	68.20	-11.72	peak	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ac VHT80 CH155 UNII-3
Note : Level = Reading + Factor	
Margin = Level – Limit	
Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.07	51.46	68.20	-16.74	peak	H
2	5700.000	2.52	49.36	51.88	105.20	-53.32	peak	H
3	5720.000	2.57	49.43	52.00	110.80	-58.80	peak	H
4	5725.000	2.58	48.94	51.52	122.20	-70.68	peak	H
5	5850.000	2.89	49.71	52.60	122.20	-69.60	peak	H
6	5855.000	2.90	49.27	52.17	110.80	-58.63	peak	H
7	5875.000	2.95	48.84	51.79	105.20	-53.41	peak	H
8	5925.000	3.07	48.67	51.74	68.20	-16.46	peak	H
9	11550.000	15.96	38.10	54.06	74.00	-19.94	peak	H
10	11550.000	15.96	24.72	40.68	54.00	-13.32	AVG	H
11	17325.000	30.62	24.80	55.42	68.20	-12.78	peak	H
1	5650.000	2.39	49.14	51.53	68.20	-16.67	peak	V
2	5700.000	2.52	52.54	55.06	105.20	-50.14	peak	V
3	5720.000	2.57	56.33	58.90	110.80	-51.90	peak	V
4	5725.000	2.58	56.47	59.05	122.20	-63.15	peak	V
5	5850.000	2.89	52.01	54.90	122.20	-67.30	peak	V
6	5855.000	2.90	51.94	54.84	110.80	-55.96	peak	V
7	5875.000	2.95	50.35	53.30	105.20	-51.90	peak	V
8	5925.000	3.07	49.67	52.74	68.20	-15.46	peak	V
9	11550.000	15.96	39.22	55.18	74.00	-18.82	peak	V
10	11550.000	15.96	25.30	41.26	54.00	-12.74	AVG	V
11	17325.000	30.62	25.72	56.34	68.20	-11.86	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.89	51.28	68.20	-16.92	peak	H
2	5700.000	2.52	48.83	51.35	105.20	-53.85	peak	H
3	5720.000	2.57	48.37	50.94	110.80	-59.86	peak	H
4	5725.000	2.58	51.30	53.88	122.20	-68.32	peak	H
5	11490.000	15.84	36.52	52.36	74.00	-21.64	peak	H
6	11490.000	15.84	22.83	38.67	54.00	-15.33	AVG	H
7	17235.000	30.26	24.15	54.41	68.20	-13.79	peak	H
1	5650.000	2.39	49.70	52.09	68.20	-16.11	peak	V
2	5700.000	2.52	50.21	52.73	105.20	-52.47	peak	V
3	5720.000	2.57	51.22	53.79	110.80	-57.01	peak	V
4	5725.000	2.58	51.52	54.10	122.20	-68.10	peak	V
5	11490.000	15.84	37.58	53.42	74.00	-20.58	peak	V
6	11490.000	15.84	23.93	39.77	54.00	-14.23	AVG	V
7	17235.000	30.26	25.88	56.14	68.20	-12.06	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.46	51.85	68.20	-16.35	peak	H
2	5700.000	2.52	49.56	52.08	105.20	-53.12	peak	H
3	5720.000	2.57	49.34	51.91	110.80	-58.89	peak	H
4	5725.000	2.58	49.29	51.87	122.20	-70.33	peak	H
5	5850.000	2.89	49.73	52.62	122.20	-69.58	peak	H
6	5855.000	2.90	49.71	52.61	110.80	-58.19	peak	H
7	5875.000	2.95	49.01	51.96	105.20	-53.24	peak	H
8	5925.000	3.07	49.84	52.91	68.20	-15.29	peak	H
9	11570.000	16.00	36.47	52.47	74.00	-21.53	peak	H
10	11570.000	16.00	22.76	38.76	54.00	-15.24	AVG	H
11	17355.000	30.74	22.74	53.48	68.20	-14.72	peak	H
1	5650.000	2.39	49.11	51.50	68.20	-16.70	peak	V
2	5700.000	2.52	49.48	52.00	105.20	-53.20	peak	V
3	5720.000	2.57	49.45	52.02	110.80	-58.78	peak	V
4	5725.000	2.58	49.54	52.12	122.20	-70.08	peak	V
5	5850.000	2.89	49.46	52.35	122.20	-69.85	peak	V
6	5855.000	2.90	48.99	51.89	110.80	-58.91	peak	V
7	5875.000	2.95	49.78	52.73	105.20	-52.47	peak	V
8	5925.000	3.07	49.41	52.48	68.20	-15.72	peak	V
9	11570.000	16.00	37.64	53.64	74.00	-20.36	peak	V
10	11570.000	16.00	23.75	39.75	54.00	-14.25	AVG	V
11	17355.000	30.74	25.09	55.83	68.20	-12.37	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	49.15	52.04	122.20	-70.16	peak	H
2	5855.000	2.90	48.75	51.65	110.80	-59.15	peak	H
3	5875.000	2.95	49.43	52.38	105.20	-52.82	peak	H
4	5925.000	3.07	48.83	51.90	68.20	-16.30	peak	H
5	11650.000	16.16	37.58	53.74	74.00	-20.26	peak	H
6	11650.000	16.16	23.26	39.42	54.00	-14.58	AVG	H
7	17475.000	31.21	24.44	55.65	68.20	-12.55	peak	H
1	5850.000	2.89	51.30	54.19	122.20	-68.01	peak	V
2	5855.000	2.90	50.89	53.79	110.80	-57.01	peak	V
3	5875.000	2.95	50.22	53.17	105.20	-52.03	peak	V
4	5925.000	3.07	50.42	53.49	68.20	-14.71	peak	V
5	11650.000	16.16	37.49	53.65	74.00	-20.35	peak	V
6	11650.000	16.16	23.88	40.04	54.00	-13.96	AVG	V
7	17475.000	31.21	24.21	55.42	68.20	-12.78	peak	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH151 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.42	51.81	68.20	-16.39	peak	H
2	5700.000	2.52	48.85	51.37	105.20	-53.83	peak	H
3	5720.000	2.57	49.49	52.06	110.80	-58.74	peak	H
4	5725.000	2.58	49.56	52.14	122.20	-70.06	peak	H
5	11510.000	15.88	37.48	53.36	74.00	-20.64	peak	H
6	11510.000	15.88	23.87	39.75	54.00	-14.25	AVG	H
7	17265.000	30.38	24.30	54.68	68.20	-13.52	peak	H
1	5650.000	2.39	48.75	51.14	68.20	-17.06	peak	V
2	5700.000	2.52	50.21	52.73	105.20	-52.47	peak	V
3	5720.000	2.57	53.02	55.59	110.80	-55.21	peak	V
4	5725.000	2.58	56.03	58.61	122.20	-63.59	peak	V
5	11510.000	15.88	38.50	54.38	74.00	-19.62	peak	V
6	11510.000	15.88	24.65	40.53	54.00	-13.47	AVG	V
7	17265.000	30.38	24.80	55.18	68.20	-13.02	peak	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH159 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.35	51.24	122.20	-70.96	peak	H
2	5855.000	2.90	48.32	51.22	110.80	-59.58	peak	H
3	5875.000	2.95	49.27	52.22	105.20	-52.98	peak	H
4	5925.000	3.07	49.06	52.13	68.20	-16.07	peak	H
5	11590.000	16.04	37.44	53.48	74.00	-20.52	peak	H
6	11590.000	16.04	23.37	39.41	54.00	-14.59	AVG	H
7	17385.000	30.85	23.79	54.64	68.20	-13.56	peak	H
1	5850.000	2.89	49.74	52.63	122.20	-69.57	peak	V
2	5855.000	2.90	49.89	52.79	110.80	-58.01	peak	V
3	5875.000	2.95	49.94	52.89	105.20	-52.31	peak	V
4	5925.000	3.07	49.73	52.80	68.20	-15.40	peak	V
5	11590.000	16.04	38.69	54.73	74.00	-19.27	peak	V
6	11590.000	16.04	24.50	40.54	54.00	-13.46	AVG	V
7	17385.000	30.85	24.63	55.48	68.20	-12.72	peak	V



Power	AC120V/60Hz
Test Mode	Mode 9, 802.11ax HE80 CH155 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.55	50.94	68.20	-17.26	peak	H
2	5700.000	2.52	48.28	50.80	105.20	-54.40	peak	H
3	5720.000	2.57	48.64	51.21	110.80	-59.59	peak	H
4	5725.000	2.58	49.57	52.15	122.20	-70.05	peak	H
5	5850.000	2.89	48.84	51.73	122.20	-70.47	peak	H
6	5855.000	2.90	49.28	52.18	110.80	-58.62	peak	H
7	5875.000	2.95	48.66	51.61	105.20	-53.59	peak	H
8	5925.000	3.07	48.97	52.04	68.20	-16.16	peak	H
9	11550.000	15.96	37.62	53.58	74.00	-20.42	peak	H
10	11550.000	15.96	24.15	40.11	54.00	-13.89	AVG	H
11	17325.000	30.62	23.93	54.55	68.20	-13.65	peak	H
1	5650.000	2.39	49.03	51.42	68.20	-16.78	peak	V
2	5700.000	2.52	52.01	54.53	105.20	-50.67	peak	V
3	5720.000	2.57	52.32	54.89	110.80	-55.91	peak	V
4	5725.000	2.58	53.33	55.91	122.20	-66.29	peak	V
5	5850.000	2.89	50.23	53.12	122.20	-69.08	peak	V
6	5855.000	2.90	51.28	54.18	110.80	-56.62	peak	V
7	5875.000	2.95	49.13	52.08	105.20	-53.12	peak	V
8	5925.000	3.07	49.16	52.23	68.20	-15.97	peak	V
9	11550.000	15.96	38.66	54.62	74.00	-19.38	peak	V
10	11550.000	15.96	24.41	40.37	54.00	-13.63	AVG	V
11	17325.000	30.62	24.86	55.48	68.20	-12.72	peak	V



SISO (ANT B)

Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.62	49.35	74.00	-24.65	peak	H
2	5150.000	1.73	34.41	36.14	54.00	-17.86	AVG	H
3	10360.000	12.85	39.22	52.07	68.20	-16.13	peak	H
4	15540.000	25.25	28.14	53.39	74.00	-20.61	peak	H
5	15540.000	25.25	14.39	39.64	54.00	-14.36	AVG	H
1	5150.000	1.73	48.55	50.28	74.00	-23.72	peak	V
2	5150.000	1.73	35.42	37.15	54.00	-16.85	AVG	V
3	10360.000	12.85	39.54	52.39	68.20	-15.81	peak	V
4	15540.000	25.25	29.00	54.25	74.00	-19.75	peak	V
5	15540.000	25.25	15.48	40.73	54.00	-13.27	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.10	49.83	74.00	-24.17	peak	H
2	5150.000	1.73	34.31	36.04	54.00	-17.96	AVG	H
3	5350.000	1.89	48.37	50.26	74.00	-23.74	peak	H
4	5350.000	1.89	34.93	36.82	54.00	-17.18	AVG	H
5	10440.000	13.03	39.48	52.51	68.20	-15.69	peak	H
6	15660.000	25.30	27.88	53.18	74.00	-20.82	peak	H
7	15660.000	25.30	14.15	39.45	54.00	-14.55	AVG	H
1	5150.000	1.73	48.65	50.38	74.00	-23.62	peak	V
2	5150.000	1.73	35.40	37.13	54.00	-16.87	AVG	V
3	5350.000	1.89	50.36	52.25	74.00	-21.75	peak	V
4	5350.000	1.89	37.38	39.27	54.00	-14.73	AVG	V
5	10440.000	13.03	40.42	53.45	68.20	-14.75	peak	V
6	15660.000	25.30	28.79	54.09	74.00	-19.91	peak	V
7	15660.000	25.30	15.35	40.65	54.00	-13.35	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	49.22	51.11	74.00	-22.89	peak	H
2	5350.000	1.89	36.67	38.56	54.00	-15.44	AVG	H
3	10480.000	13.12	38.95	52.07	68.20	-16.13	peak	H
4	15720.000	25.33	28.21	53.54	74.00	-20.46	peak	H
5	15720.000	25.33	14.98	40.31	54.00	-13.69	AVG	H
1	5350.000	1.89	49.54	51.43	74.00	-22.57	peak	V
2	5350.000	1.89	36.25	38.14	54.00	-15.86	AVG	V
3	10480.000	13.12	40.36	53.48	68.20	-14.72	peak	V
4	15720.000	25.33	29.72	55.05	74.00	-18.95	peak	V
5	15720.000	25.33	16.43	41.76	54.00	-12.24	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.35	50.08	74.00	-23.92	peak	H
2	5150.000	1.73	35.11	36.84	54.00	-17.16	AVG	H
3	10360.000	12.85	39.22	52.07	68.20	-16.13	peak	H
4	15540.000	25.25	28.26	53.51	74.00	-20.49	peak	H
5	15540.000	25.25	14.60	39.85	54.00	-14.15	AVG	H
1	5150.000	1.73	50.74	52.47	74.00	-21.53	peak	V
2	5150.000	1.73	37.45	39.18	54.00	-14.82	AVG	V
3	10360.000	12.85	40.57	53.42	68.20	-14.78	peak	V
4	15540.000	25.25	29.99	55.24	74.00	-18.76	peak	V
5	15540.000	25.25	16.14	41.39	54.00	-12.61	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.66	50.39	74.00	-23.61	peak	H
2	5150.000	1.73	35.33	37.06	54.00	-16.94	AVG	H
3	5350.000	1.89	48.76	50.65	74.00	-23.35	peak	H
4	5350.000	1.89	35.29	37.18	54.00	-16.82	AVG	H
5	10440.000	13.03	39.49	52.52	68.20	-15.68	peak	H
6	15660.000	25.30	29.26	54.56	74.00	-19.44	peak	H
7	15660.000	25.30	15.49	40.79	54.00	-13.21	AVG	H
1	5150.000	1.73	49.04	50.77	74.00	-23.23	peak	V
2	5150.000	1.73	35.43	37.16	54.00	-16.84	AVG	V
3	5350.000	1.89	49.20	51.09	74.00	-22.91	peak	V
4	5350.000	1.89	35.99	37.88	54.00	-16.12	AVG	V
5	10440.000	13.03	40.12	53.15	68.20	-15.05	peak	V
6	15660.000	25.30	30.07	55.37	74.00	-18.63	peak	V
7	15660.000	25.30	16.54	41.84	54.00	-12.16	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	48.33	50.22	74.00	-23.78	peak	H
2	5350.000	1.89	34.96	36.85	54.00	-17.15	AVG	H
3	10480.000	13.12	39.34	52.46	68.20	-15.74	peak	H
4	15720.000	25.33	28.32	53.65	74.00	-20.35	peak	H
5	15720.000	25.33	14.39	39.72	54.00	-14.28	AVG	H
1	5350.000	1.89	49.25	51.14	74.00	-22.86	peak	V
2	5350.000	1.89	35.68	37.57	54.00	-16.43	AVG	V
3	10480.000	13.12	41.10	54.22	68.20	-13.98	peak	V
4	15720.000	25.33	31.04	56.37	74.00	-17.63	peak	V
5	15720.000	25.33	17.31	42.64	54.00	-11.36	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	50.02	51.75	74.00	-22.25	peak	H
2	5150.000	1.73	35.75	37.48	54.00	-16.52	AVG	H
3	10380.000	12.89	40.05	52.94	68.20	-15.26	peak	H
4	15570.000	25.26	28.35	53.61	74.00	-20.39	peak	H
5	15570.000	25.26	14.29	39.55	54.00	-14.45	AVG	H
1	5150.000	1.73	50.74	52.47	74.00	-21.53	peak	V
2	5150.000	1.73	36.96	38.69	54.00	-15.31	AVG	V
3	10380.000	12.89	41.37	54.26	68.20	-13.94	peak	V
4	15570.000	25.26	29.91	55.17	74.00	-18.83	peak	V
5	15570.000	25.26	17.08	42.34	54.00	-11.66	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.29	50.02	74.00	-23.98	peak	H
2	5150.000	1.73	35.42	37.15	54.00	-16.85	AVG	H
3	5350.000	1.89	49.03	50.92	74.00	-23.08	peak	H
4	5350.000	1.89	35.64	37.53	54.00	-16.47	AVG	H
5	10460.000	13.07	39.41	52.48	68.20	-15.72	peak	H
6	15690.000	25.32	29.05	54.37	74.00	-19.63	peak	H
7	15690.000	25.32	15.11	40.43	54.00	-13.57	AVG	H
1	5150.000	1.73	48.94	50.67	74.00	-23.33	peak	V
2	5150.000	1.73	35.13	36.86	54.00	-17.14	AVG	V
3	5350.000	1.89	49.60	51.49	74.00	-22.51	peak	V
4	5350.000	1.89	35.59	37.48	54.00	-16.52	AVG	V
5	10460.000	13.07	40.38	53.45	68.20	-14.75	peak	V
6	15690.000	25.32	29.72	55.04	74.00	-18.96	peak	V
7	15690.000	25.32	16.22	41.54	54.00	-12.46	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ac VHT80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	55.42	57.15	74.00	-16.85	peak	H
2	5150.000	1.73	42.34	44.07	54.00	-9.93	AVG	H
3	5350.000	1.89	48.64	50.53	74.00	-23.47	peak	H
4	5350.000	1.89	35.35	37.24	54.00	-16.76	AVG	H
5	10420.000	12.98	39.56	52.54	68.20	-15.66	peak	H
6	15630.000	25.29	28.47	53.76	74.00	-20.24	peak	H
7	15630.000	25.29	14.33	39.62	54.00	-14.38	AVG	H
1	5150.000	1.73	48.56	50.29	74.00	-23.71	peak	V
2	5150.000	1.73	35.34	37.07	54.00	-16.93	AVG	V
3	5350.000	1.89	48.24	50.13	74.00	-23.87	peak	V
4	5350.000	1.89	35.13	37.02	54.00	-16.98	AVG	V
5	10420.000	12.98	38.81	51.79	68.20	-16.41	peak	V
6	15630.000	25.29	27.99	53.28	74.00	-20.72	peak	V
7	15630.000	25.29	14.76	40.05	54.00	-13.95	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.70	49.43	74.00	-24.57	peak	H
2	5150.000	1.73	35.02	36.75	54.00	-17.25	AVG	H
3	10360.000	12.85	39.31	52.16	68.20	-16.04	peak	H
4	15540.000	25.25	28.44	53.69	74.00	-20.31	peak	H
5	15540.000	25.25	14.20	39.45	54.00	-14.55	AVG	H
1	5150.000	1.73	49.89	51.62	74.00	-22.38	peak	V
2	5150.000	1.73	35.82	37.55	54.00	-16.45	AVG	V
3	10360.000	12.85	40.41	53.26	68.20	-14.94	peak	V
4	15540.000	25.25	29.93	55.18	74.00	-18.82	peak	V
5	15540.000	25.25	16.41	41.66	54.00	-12.34	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.77	50.50	74.00	-23.50	peak	H
2	5150.000	1.73	35.31	37.04	54.00	-16.96	AVG	H
3	5350.000	1.89	48.38	50.27	74.00	-23.73	peak	H
4	5350.000	1.89	35.03	36.92	54.00	-17.08	AVG	H
5	10440.000	13.03	39.02	52.05	68.20	-16.15	peak	H
6	15660.000	25.30	28.40	53.70	74.00	-20.30	peak	H
7	15660.000	25.30	14.16	39.46	54.00	-14.54	AVG	H
1	5150.000	1.73	48.74	50.47	74.00	-23.53	peak	V
2	5150.000	1.73	35.39	37.12	54.00	-16.88	AVG	V
3	5350.000	1.89	49.06	50.95	74.00	-23.05	peak	V
4	5350.000	1.89	35.69	37.58	54.00	-16.42	AVG	V
5	10440.000	13.03	40.92	53.95	68.20	-14.25	peak	V
6	15660.000	25.30	30.51	55.81	74.00	-18.19	peak	V
7	15660.000	25.30	17.08	42.38	54.00	-11.62	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	49.41	51.30	74.00	-22.70	peak	H
2	5350.000	1.89	35.35	37.24	54.00	-16.76	AVG	H
3	10480.000	13.12	39.56	52.68	68.20	-15.52	peak	H
4	15720.000	25.33	28.72	54.05	74.00	-19.95	peak	H
5	15720.000	25.33	14.96	40.29	54.00	-13.71	AVG	H
1	5350.000	1.89	48.83	50.72	74.00	-23.28	peak	V
2	5350.000	1.89	34.90	36.79	54.00	-17.21	AVG	V
3	10480.000	13.12	41.06	54.18	68.20	-14.02	peak	V
4	15720.000	25.33	30.64	55.97	74.00	-18.03	peak	V
5	15720.000	25.33	17.03	42.36	54.00	-11.64	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.26	49.99	74.00	-24.01	peak	H
2	5150.000	1.73	34.75	36.48	54.00	-17.52	AVG	H
3	10380.000	12.89	39.71	52.60	68.20	-15.60	peak	H
4	15570.000	25.26	28.21	53.47	74.00	-20.53	peak	H
5	15570.000	25.26	13.89	39.15	54.00	-14.85	AVG	H
1	5150.000	1.73	52.49	54.22	74.00	-19.78	peak	V
2	5150.000	1.73	38.91	40.64	54.00	-13.36	AVG	V
3	10380.000	12.89	40.82	53.71	68.20	-14.49	peak	V
4	15570.000	25.26	30.72	55.98	74.00	-18.02	peak	V
5	15570.000	25.26	17.05	42.31	54.00	-11.69	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.89	50.62	74.00	-23.38	peak	H
2	5150.000	1.73	34.41	36.14	54.00	-17.86	AVG	H
3	5350.000	1.89	48.44	50.33	74.00	-23.67	peak	H
4	5350.000	1.89	34.18	36.07	54.00	-17.93	AVG	H
5	10460.000	13.07	39.38	52.45	68.20	-15.75	peak	H
6	15690.000	25.32	29.00	54.32	74.00	-19.68	peak	H
7	15690.000	25.32	15.33	40.65	54.00	-13.35	AVG	H
1	5150.000	1.73	48.83	50.56	74.00	-23.44	peak	V
2	5150.000	1.73	34.75	36.48	54.00	-17.52	AVG	V
3	5350.000	1.89	48.64	50.53	74.00	-23.47	peak	V
4	5350.000	1.89	34.52	36.41	54.00	-17.59	AVG	V
5	10460.000	13.07	40.57	53.64	68.20	-14.56	peak	V
6	15690.000	25.32	30.44	55.76	74.00	-18.24	peak	V
7	15690.000	25.32	16.26	41.58	54.00	-12.42	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 9, 802.11ax HE80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	49.38	51.11	74.00	-22.89	peak	H
2	5150.000	1.73	36.30	38.03	54.00	-15.97	AVG	H
3	5350.000	1.89	49.20	51.09	74.00	-22.91	peak	H
4	5350.000	1.89	36.03	37.92	54.00	-16.08	AVG	H
5	10420.000	12.98	39.34	52.32	68.20	-15.88	peak	H
6	15630.000	25.29	29.30	54.59	74.00	-19.41	peak	H
7	15630.000	25.29	15.09	40.38	54.00	-13.62	AVG	H
1	5150.000	1.73	56.24	57.97	74.00	-16.03	peak	V
2	5150.000	1.73	41.56	43.29	54.00	-10.71	AVG	V
3	5350.000	1.89	48.95	50.84	74.00	-23.16	peak	V
4	5350.000	1.89	35.06	36.95	54.00	-17.05	AVG	V
5	10420.000	12.98	40.63	53.61	68.20	-14.59	peak	V
6	15630.000	25.29	29.79	55.08	74.00	-18.92	peak	V
7	15630.000	25.29	16.01	41.30	54.00	-12.70	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.66	51.05	68.20	-17.15	peak	H
2	5700.000	2.52	48.60	51.12	105.20	-54.08	peak	H
3	5720.000	2.57	49.05	51.62	110.80	-59.18	peak	H
4	5725.000	2.58	49.32	51.90	122.20	-70.30	peak	H
5	11490.000	15.84	37.94	53.78	74.00	-20.22	peak	H
6	11490.000	15.84	23.40	39.24	54.00	-14.76	AVG	H
7	17235.000	30.26	24.37	54.63	68.20	-13.57	peak	H
1	5650.000	2.39	48.67	51.06	68.20	-17.14	peak	V
2	5700.000	2.52	48.76	51.28	105.20	-53.92	peak	V
3	5720.000	2.57	50.97	53.54	110.80	-57.26	peak	V
4	5725.000	2.58	52.66	55.24	122.20	-66.96	peak	V
5	11490.000	15.84	37.64	53.48	74.00	-20.52	peak	V
6	11490.000	15.84	23.88	39.72	54.00	-14.28	AVG	V
7	17235.000	30.26	25.29	55.55	68.20	-12.65	peak	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.05	51.44	68.20	-16.76	peak	H
2	5700.000	2.52	48.57	51.09	105.20	-54.11	peak	H
3	5720.000	2.57	49.83	52.40	110.80	-58.40	peak	H
4	5725.000	2.58	48.09	50.67	122.20	-71.53	peak	H
5	5850.000	2.89	47.94	50.83	122.20	-71.37	peak	H
6	5855.000	2.90	48.49	51.39	110.80	-59.41	peak	H
7	5875.000	2.95	49.20	52.15	105.20	-53.05	peak	H
8	5925.000	3.07	47.81	50.88	68.20	-17.32	peak	H
9	11570.000	16.00	37.62	53.62	74.00	-20.38	peak	H
10	11570.000	16.00	24.08	40.08	54.00	-13.92	AVG	H
11	17355.000	30.74	23.99	54.73	68.20	-13.47	peak	H
1	5650.000	2.39	48.12	50.51	68.20	-17.69	peak	V
2	5700.000	2.52	49.41	51.93	105.20	-53.27	peak	V
3	5720.000	2.57	48.64	51.21	110.80	-59.59	peak	V
4	5725.000	2.58	49.61	52.19	122.20	-70.01	peak	V
5	5850.000	2.89	49.33	52.22	122.20	-69.98	peak	V
6	5855.000	2.90	49.66	52.56	110.80	-58.24	peak	V
7	5875.000	2.95	49.87	52.82	105.20	-52.38	peak	V
8	5925.000	3.07	48.97	52.04	68.20	-16.16	peak	V
9	11570.000	16.00	38.63	54.63	74.00	-19.37	peak	V
10	11570.000	16.00	25.18	41.18	54.00	-12.82	AVG	V
11	17355.000	30.74	24.63	55.37	68.20	-12.83	peak	V



Power	AC120V/60Hz
Test Mode	Mode 1, 802.11a CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	49.27	52.16	122.20	-70.04	peak	H
2	5855.000	2.90	48.66	51.56	110.80	-59.24	peak	H
3	5875.000	2.95	48.60	51.55	105.20	-53.65	peak	H
4	5925.000	3.07	49.46	52.53	68.20	-15.67	peak	H
5	11650.000	16.16	27.31	43.47	74.00	-30.53	peak	H
6	11650.000	16.16	23.12	39.28	54.00	-14.72	AVG	H
7	17475.000	31.21	23.84	55.05	68.20	-13.15	peak	H
1	5850.000	2.89	50.59	53.48	122.20	-68.72	peak	V
2	5855.000	2.90	49.42	52.32	110.80	-58.48	peak	V
3	5875.000	2.95	49.75	52.70	105.20	-52.50	peak	V
4	5925.000	3.07	49.73	52.80	68.20	-15.40	peak	V
5	11650.000	16.16	38.03	54.19	74.00	-19.81	peak	V
6	11650.000	16.16	24.37	40.53	54.00	-13.47	AVG	V
7	17475.000	31.21	24.07	55.28	68.20	-12.92	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.16	50.55	68.20	-17.65	peak	H
2	5700.000	2.52	48.77	51.29	105.20	-53.91	peak	H
3	5720.000	2.57	49.06	51.63	110.80	-59.17	peak	H
4	5725.000	2.58	49.01	51.59	122.20	-70.61	peak	H
5	11490.000	15.84	37.90	53.74	74.00	-20.26	peak	H
6	11490.000	15.84	24.28	40.12	54.00	-13.88	AVG	H
7	17235.000	30.26	24.02	54.28	68.20	-13.92	peak	H
1	5650.000	2.39	48.94	51.33	68.20	-16.87	peak	V
2	5700.000	2.52	49.41	51.93	105.20	-53.27	peak	V
3	5720.000	2.57	52.02	54.59	110.80	-56.21	peak	V
4	5725.000	2.58	56.08	58.66	122.20	-63.54	peak	V
5	11490.000	15.84	38.67	54.51	74.00	-19.49	peak	V
6	11490.000	15.84	24.55	40.39	54.00	-13.61	AVG	V
7	17235.000	30.26	25.19	55.45	68.20	-12.75	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.08	50.47	68.20	-17.73	peak	H
2	5700.000	2.52	48.35	50.87	105.20	-54.33	peak	H
3	5720.000	2.57	48.48	51.05	110.80	-59.75	peak	H
4	5725.000	2.58	49.09	51.67	122.20	-70.53	peak	H
5	5850.000	2.89	48.41	51.30	122.20	-70.90	peak	H
6	5855.000	2.90	48.46	51.36	110.80	-59.44	peak	H
7	5875.000	2.95	48.89	51.84	105.20	-53.36	peak	H
8	5925.000	3.07	48.91	51.98	68.20	-16.22	peak	H
9	11570.000	16.00	37.49	53.49	74.00	-20.51	peak	H
10	11570.000	16.00	24.24	40.24	54.00	-13.76	AVG	H
11	17355.000	30.74	23.87	54.61	68.20	-13.59	peak	H
1	5650.000	2.39	48.58	50.97	68.20	-17.23	peak	V
2	5700.000	2.52	49.60	52.12	105.20	-53.08	peak	V
3	5720.000	2.57	49.79	52.36	110.80	-58.44	peak	V
4	5725.000	2.58	49.62	52.20	122.20	-70.00	peak	V
5	5850.000	2.89	49.50	52.39	122.20	-69.81	peak	V
6	5855.000	2.90	49.10	52.00	110.80	-58.80	peak	V
7	5875.000	2.95	49.67	52.62	105.20	-52.58	peak	V
8	5925.000	3.07	49.32	52.39	68.20	-15.81	peak	V
9	11570.000	16.00	39.15	55.15	74.00	-18.85	peak	V
10	11570.000	16.00	27.32	43.32	54.00	-10.68	AVG	V
11	17355.000	30.74	26.07	56.81	68.20	-11.39	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT20 CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.55	51.44	122.20	-70.76	peak	H
2	5855.000	2.90	49.60	52.50	110.80	-58.30	peak	H
3	5875.000	2.95	48.98	51.93	105.20	-53.27	peak	H
4	5925.000	3.07	48.96	52.03	68.20	-16.17	peak	H
5	11650.000	16.16	37.32	53.48	74.00	-20.52	peak	H
6	11650.000	16.16	23.56	39.72	54.00	-14.28	AVG	H
7	17475.000	31.21	23.10	54.31	68.20	-13.89	peak	H
1	5850.000	2.89	51.80	54.69	122.20	-67.51	peak	V
2	5855.000	2.90	50.06	52.96	110.80	-57.84	peak	V
3	5875.000	2.95	49.78	52.73	105.20	-52.47	peak	V
4	5925.000	3.07	49.34	52.41	68.20	-15.79	peak	V
5	11650.000	16.16	38.68	54.84	74.00	-19.16	peak	V
6	11650.000	16.16	25.06	41.22	54.00	-12.78	AVG	V
7	17475.000	31.21	24.96	56.17	68.20	-12.03	peak	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH151 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.08	51.47	68.20	-16.73	peak	H
2	5700.000	2.52	49.32	51.84	105.20	-53.36	peak	H
3	5720.000	2.57	48.91	51.48	110.80	-59.32	peak	H
4	5725.000	2.58	49.47	52.05	122.20	-70.15	peak	H
5	11510.000	15.88	37.79	53.67	74.00	-20.33	peak	H
6	11510.000	15.88	23.57	39.45	54.00	-14.55	AVG	H
7	17265.000	30.38	24.36	54.74	68.20	-13.46	peak	H
1	5650.000	2.39	49.03	51.42	68.20	-16.78	peak	V
2	5700.000	2.52	51.53	54.05	105.20	-51.15	peak	V
3	5720.000	2.57	53.40	55.97	110.80	-54.83	peak	V
4	5725.000	2.58	56.39	58.97	122.20	-63.23	peak	V
5	11510.000	15.88	39.57	55.45	74.00	-18.55	peak	V
6	11510.000	15.88	25.64	41.52	54.00	-12.48	AVG	V
7	17265.000	30.38	25.76	56.14	68.20	-12.06	peak	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT40 CH159 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	50.05	52.94	122.20	-69.26	peak	H
2	5855.000	2.90	48.91	51.81	110.80	-58.99	peak	H
3	5875.000	2.95	49.62	52.57	105.20	-52.63	peak	H
4	5925.000	3.07	49.37	52.44	68.20	-15.76	peak	H
5	11590.000	16.04	37.58	53.62	74.00	-20.38	peak	H
6	11590.000	16.04	23.99	40.03	54.00	-13.97	AVG	H
7	17385.000	30.85	23.54	54.39	68.20	-13.81	peak	H
1	5850.000	2.89	50.00	52.89	122.20	-69.31	peak	V
2	5855.000	2.90	50.31	53.21	110.80	-57.59	peak	V
3	5875.000	2.95	49.62	52.57	105.20	-52.63	peak	V
4	5925.000	3.07	49.32	52.39	68.20	-15.81	peak	V
5	11590.000	16.04	39.04	55.08	74.00	-18.92	peak	V
6	11590.000	16.04	25.52	41.56	54.00	-12.44	AVG	V
7	17385.000	30.85	25.90	56.75	68.20	-11.45	peak	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ac VHT80 CH155 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.32	51.71	68.20	-16.49	peak	H
2	5700.000	2.52	48.69	51.21	105.20	-53.99	peak	H
3	5720.000	2.57	49.05	51.62	110.80	-59.18	peak	H
4	5725.000	2.58	48.52	51.10	122.20	-71.10	peak	H
5	5850.000	2.89	48.62	51.51	122.20	-70.69	peak	H
6	5855.000	2.90	48.50	51.40	110.80	-59.40	peak	H
7	5875.000	2.95	48.62	51.57	105.20	-53.63	peak	H
8	5925.000	3.07	49.26	52.33	68.20	-15.87	peak	H
9	11550.000	15.96	37.61	53.57	74.00	-20.43	peak	H
10	11550.000	15.96	23.89	39.85	54.00	-14.15	AVG	H
11	17325.000	30.62	24.04	54.66	68.20	-13.54	peak	H
1	5650.000	2.39	49.40	51.79	68.20	-16.41	peak	V
2	5700.000	2.52	50.64	53.16	105.20	-52.04	peak	V
3	5720.000	2.57	53.03	55.60	110.80	-55.20	peak	V
4	5725.000	2.58	54.82	57.40	122.20	-64.80	peak	V
5	5850.000	2.89	51.23	54.12	122.20	-68.08	peak	V
6	5855.000	2.90	51.65	54.55	110.80	-56.25	peak	V
7	5875.000	2.95	50.63	53.58	105.20	-51.62	peak	V
8	5925.000	3.07	50.05	53.12	68.20	-15.08	peak	V
9	11550.000	15.96	38.82	54.78	74.00	-19.22	peak	V
10	11550.000	15.96	24.93	40.89	54.00	-13.11	AVG	V
11	17325.000	30.62	24.44	55.06	68.20	-13.14	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.24	50.63	68.20	-17.57	peak	H
2	5700.000	2.52	48.10	50.62	105.20	-54.58	peak	H
3	5720.000	2.57	49.46	52.03	110.80	-58.77	peak	H
4	5725.000	2.58	49.51	52.09	122.20	-70.11	peak	H
5	11490.000	15.84	37.64	53.48	74.00	-20.52	peak	H
6	11490.000	15.84	23.68	39.52	54.00	-14.48	AVG	H
7	17235.000	30.26	25.21	55.47	68.20	-12.73	peak	H
1	5650.000	2.39	48.83	51.22	68.20	-16.98	peak	V
2	5700.000	2.52	50.20	52.72	105.20	-52.48	peak	V
3	5720.000	2.57	51.67	54.24	110.80	-56.56	peak	V
4	5725.000	2.58	52.16	54.74	122.20	-67.46	peak	V
5	11490.000	15.84	39.77	55.61	74.00	-18.39	peak	V
6	11490.000	15.84	25.68	41.52	54.00	-12.48	AVG	V
7	17235.000	30.26	26.37	56.63	68.20	-11.57	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.84	51.23	68.20	-16.97	peak	H
2	5700.000	2.52	48.36	50.88	105.20	-54.32	peak	H
3	5720.000	2.57	49.27	51.84	110.80	-58.96	peak	H
4	5725.000	2.58	49.81	52.39	122.20	-69.81	peak	H
5	5850.000	2.89	49.26	52.15	122.20	-70.05	peak	H
6	5855.000	2.90	49.28	52.18	110.80	-58.62	peak	H
7	5875.000	2.95	48.78	51.73	105.20	-53.47	peak	H
8	5925.000	3.07	48.84	51.91	68.20	-16.29	peak	H
9	11570.000	16.00	37.29	53.29	74.00	-20.71	peak	H
10	11570.000	16.00	23.54	39.54	54.00	-14.46	AVG	H
11	17355.000	30.74	23.44	54.18	68.20	-14.02	peak	H
1	5650.000	2.39	49.84	52.23	68.20	-15.97	peak	V
2	5700.000	2.52	50.32	52.84	105.20	-52.36	peak	V
3	5720.000	2.57	50.13	52.70	110.80	-58.10	peak	V
4	5725.000	2.58	50.08	52.66	122.20	-69.54	peak	V
5	5850.000	2.89	50.28	53.17	122.20	-69.03	peak	V
6	5855.000	2.90	49.83	52.73	110.80	-58.07	peak	V
7	5875.000	2.95	50.50	53.45	105.20	-51.75	peak	V
8	5925.000	3.07	50.57	53.64	68.20	-14.56	peak	V
9	11570.000	16.00	38.52	54.52	74.00	-19.48	peak	V
10	11570.000	16.00	24.61	40.61	54.00	-13.39	AVG	V
11	17355.000	30.74	24.73	55.47	68.20	-12.73	peak	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE20 CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.71	51.60	122.20	-70.60	peak	H
2	5855.000	2.90	49.01	51.91	110.80	-58.89	peak	H
3	5875.000	2.95	48.57	51.52	105.20	-53.68	peak	H
4	5925.000	3.07	48.95	52.02	68.20	-16.18	peak	H
5	11650.000	16.16	37.10	53.26	74.00	-20.74	peak	H
6	11650.000	16.16	23.27	39.43	54.00	-14.57	AVG	H
7	17475.000	31.21	22.90	54.11	68.20	-14.09	peak	H
1	5850.000	2.89	52.06	54.95	122.20	-67.25	peak	V
2	5855.000	2.90	50.92	53.82	110.80	-56.98	peak	V
3	5875.000	2.95	50.54	53.49	105.20	-51.71	peak	V
4	5925.000	3.07	49.28	52.35	68.20	-15.85	peak	V
5	11650.000	16.16	39.00	55.16	74.00	-18.84	peak	V
6	11650.000	16.16	25.71	41.87	54.00	-12.13	AVG	V
7	17475.000	31.21	25.37	56.58	68.20	-11.62	peak	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH151 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	47.99	50.38	68.20	-17.82	peak	H
2	5700.000	2.52	48.61	51.13	105.20	-54.07	peak	H
3	5720.000	2.57	48.82	51.39	110.80	-59.41	peak	H
4	5725.000	2.58	50.62	53.20	122.20	-69.00	peak	H
5	11510.000	15.88	37.87	53.75	74.00	-20.25	peak	H
6	11510.000	15.88	23.73	39.61	54.00	-14.39	AVG	H
7	17265.000	30.38	24.41	54.79	68.20	-13.41	peak	H
1	5650.000	2.39	50.04	52.43	68.20	-15.77	peak	V
2	5700.000	2.52	50.74	53.26	105.20	-51.94	peak	V
3	5720.000	2.57	54.06	56.63	110.80	-54.17	peak	V
4	5725.000	2.58	57.18	59.76	122.20	-62.44	peak	V
5	11510.000	15.88	38.69	54.57	74.00	-19.43	peak	V
6	11510.000	15.88	24.36	40.24	54.00	-13.76	AVG	V
7	17265.000	30.38	26.01	56.39	68.20	-11.81	peak	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE40 CH159 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	48.43	51.32	122.20	-70.88	peak	H
2	5855.000	2.90	48.90	51.80	110.80	-59.00	peak	H
3	5875.000	2.95	49.50	52.45	105.20	-52.75	peak	H
4	5925.000	3.07	50.09	53.16	68.20	-15.04	peak	H
5	11590.000	16.04	37.50	53.54	74.00	-20.46	peak	H
6	11590.000	16.04	23.24	39.28	54.00	-14.72	AVG	H
7	17385.000	30.85	23.54	54.39	68.20	-13.81	peak	H
1	5850.000	2.89	49.30	52.19	122.20	-70.01	peak	V
2	5855.000	2.90	49.22	52.12	110.80	-58.68	peak	V
3	5875.000	2.95	49.12	52.07	105.20	-53.13	peak	V
4	5925.000	3.07	49.89	52.96	68.20	-15.24	peak	V
5	11590.000	16.04	39.47	55.51	74.00	-18.49	peak	V
6	11590.000	16.04	25.69	41.73	54.00	-12.27	AVG	V
7	17385.000	30.85	25.43	56.28	68.20	-11.92	peak	V



Power	AC120V/60Hz
Test Mode	Mode 9, 802.11ax HE80 CH155 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.85	51.24	68.20	-16.96	peak	H
2	5700.000	2.52	49.42	51.94	105.20	-53.26	peak	H
3	5720.000	2.57	49.13	51.70	110.80	-59.10	peak	H
4	5725.000	2.58	48.81	51.39	122.20	-70.81	peak	H
5	5850.000	2.89	49.31	52.20	122.20	-70.00	peak	H
6	5855.000	2.90	48.31	51.21	110.80	-59.59	peak	H
7	5875.000	2.95	49.39	52.34	105.20	-52.86	peak	H
8	5925.000	3.07	49.33	52.40	68.20	-15.80	peak	H
9	11550.000	15.96	37.51	53.47	74.00	-20.53	peak	H
10	11550.000	15.96	23.80	39.76	54.00	-14.24	AVG	H
11	17325.000	30.62	23.56	54.18	68.20	-14.02	peak	H
1	5650.000	2.39	49.44	51.83	68.20	-16.37	peak	V
2	5700.000	2.52	51.62	54.14	105.20	-51.06	peak	V
3	5720.000	2.57	52.90	55.47	110.80	-55.33	peak	V
4	5725.000	2.58	54.76	57.34	122.20	-64.86	peak	V
5	5850.000	2.89	51.91	54.80	122.20	-67.40	peak	V
6	5855.000	2.90	51.16	54.06	110.80	-56.74	peak	V
7	5875.000	2.95	49.09	52.04	105.20	-53.16	peak	V
8	5925.000	3.07	49.92	52.99	68.20	-15.21	peak	V
9	11550.000	15.96	39.52	55.48	74.00	-18.52	peak	V
10	11550.000	15.96	25.56	41.52	54.00	-12.48	AVG	V
11	17325.000	30.62	25.30	55.92	68.20	-12.28	peak	V



MIMO (ANT A+B)

Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.51	50.24	74.00	-23.76	peak	H
2	5150.000	1.73	35.44	37.17	54.00	-16.83	AVG	H
3	10360.000	12.85	39.23	52.08	68.20	-16.12	peak	H
4	15540.000	25.25	29.37	54.62	74.00	-19.38	peak	H
5	15540.000	25.25	15.06	40.31	54.00	-13.69	AVG	H
1	5150.000	1.73	50.42	52.15	74.00	-21.85	peak	V
2	5150.000	1.73	36.95	38.68	54.00	-15.32	AVG	V
3	10360.000	12.85	40.39	53.24	68.20	-14.96	peak	V
4	15540.000	25.25	30.13	55.38	74.00	-18.62	peak	V
5	15540.000	25.25	16.27	41.52	54.00	-12.48	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.18	49.91	74.00	-24.09	peak	H
2	5150.000	1.73	34.71	36.44	54.00	-17.56	AVG	H
3	5350.000	1.89	49.00	50.89	74.00	-23.11	peak	H
4	5350.000	1.89	35.38	37.27	54.00	-16.73	AVG	H
5	10440.000	13.03	39.31	52.34	68.20	-15.86	peak	H
6	15660.000	25.30	28.38	53.68	74.00	-20.32	peak	H
7	15660.000	25.30	14.12	39.42	54.00	-14.58	AVG	H
1	5150.000	1.73	48.92	50.65	74.00	-23.35	peak	V
2	5150.000	1.73	35.35	37.08	54.00	-16.92	AVG	V
3	5350.000	1.89	49.34	51.23	74.00	-22.77	peak	V
4	5350.000	1.89	35.87	37.76	54.00	-16.24	AVG	V
5	10440.000	13.03	41.44	54.47	68.20	-13.73	peak	V
6	15660.000	25.30	31.28	56.58	74.00	-17.42	peak	V
7	15660.000	25.30	17.63	42.93	54.00	-11.07	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	48.59	50.48	74.00	-23.52	peak	H
2	5350.000	1.89	34.62	36.51	54.00	-17.49	AVG	H
3	10480.000	13.12	39.42	52.54	68.20	-15.66	peak	H
4	15720.000	25.33	28.35	53.68	74.00	-20.32	peak	H
5	15720.000	25.33	14.39	39.72	54.00	-14.28	AVG	H
1	5350.000	1.89	49.59	51.48	74.00	-22.52	peak	V
2	5350.000	1.89	36.17	38.06	54.00	-15.94	AVG	V
3	10480.000	13.12	40.49	53.61	68.20	-14.59	peak	V
4	15720.000	25.33	30.04	55.37	74.00	-18.63	peak	V
5	15720.000	25.33	16.19	41.52	54.00	-12.48	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.48	50.21	74.00	-23.79	peak	H
2	5150.000	1.73	35.09	36.82	54.00	-17.18	AVG	H
3	10380.000	12.89	39.53	52.42	68.20	-15.78	peak	H
4	15570.000	25.26	28.38	53.64	74.00	-20.36	peak	H
5	15570.000	25.26	14.22	39.48	54.00	-14.52	AVG	H
1	5150.000	1.73	52.17	53.90	74.00	-20.10	peak	V
2	5150.000	1.73	37.73	39.46	54.00	-14.54	AVG	V
3	10380.000	12.89	40.36	53.25	68.20	-14.95	peak	V
4	15570.000	25.26	30.17	55.43	74.00	-18.57	peak	V
5	15570.000	25.26	17.32	42.58	54.00	-11.42	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.23	49.96	74.00	-24.04	peak	H
2	5150.000	1.73	34.71	36.44	54.00	-17.56	AVG	H
3	5350.000	1.89	48.32	50.21	74.00	-23.79	peak	H
4	5350.000	1.89	34.90	36.79	54.00	-17.21	AVG	H
5	10460.000	13.07	39.49	52.56	68.20	-15.64	peak	H
6	15690.000	25.32	29.87	55.19	74.00	-18.81	peak	H
7	15690.000	25.32	17.33	42.65	54.00	-11.35	AVG	H
1	5150.000	1.73	49.83	51.56	74.00	-22.44	peak	V
2	5150.000	1.73	35.79	37.52	54.00	-16.48	AVG	V
3	5350.000	1.89	49.53	51.42	74.00	-22.58	peak	V
4	5350.000	1.89	35.47	37.36	54.00	-16.64	AVG	V
5	10460.000	13.07	40.11	53.18	68.20	-15.02	peak	V
6	15690.000	25.32	30.00	55.32	74.00	-18.68	peak	V
7	15690.000	25.32	15.97	41.29	54.00	-12.71	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	49.87	51.60	74.00	-22.40	peak	H
2	5150.000	1.73	35.81	37.54	54.00	-16.46	AVG	H
3	5350.000	1.89	48.47	50.36	74.00	-23.64	peak	H
4	5350.000	1.89	34.86	36.75	54.00	-17.25	AVG	H
5	10420.000	12.98	39.27	52.25	68.20	-15.95	peak	H
6	15630.000	25.29	28.35	53.64	74.00	-20.36	peak	H
7	15630.000	25.29	14.57	39.86	54.00	-14.14	AVG	H
1	5150.000	1.73	56.48	58.21	74.00	-15.79	peak	V
2	5150.000	1.73	42.66	44.39	54.00	-9.61	AVG	V
3	5350.000	1.89	49.36	51.25	74.00	-22.75	peak	V
4	5350.000	1.89	36.72	38.61	54.00	-15.39	AVG	V
5	10420.000	12.98	40.27	53.25	68.20	-14.95	peak	V
6	15630.000	25.29	30.22	55.51	74.00	-18.49	peak	V
7	15630.000	25.29	16.36	41.65	54.00	-12.35	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ax HE20 CH36 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.32	50.05	74.00	-23.95	peak	H
2	5150.000	1.73	35.03	36.76	54.00	-17.24	AVG	H
3	10360.000	12.85	39.59	52.44	68.20	-15.76	peak	H
4	15540.000	25.25	29.05	54.30	74.00	-19.70	peak	H
5	15540.000	25.25	15.20	40.45	54.00	-13.55	AVG	H
1	5150.000	1.73	50.87	52.60	74.00	-21.40	peak	V
2	5150.000	1.73	36.43	38.16	54.00	-15.84	AVG	V
3	10360.000	12.85	40.70	53.55	68.20	-14.65	peak	V
4	15540.000	25.25	29.92	55.17	74.00	-18.83	peak	V
5	15540.000	25.25	16.01	41.26	54.00	-12.74	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ax HE20 CH44 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.01	49.74	74.00	-24.26	peak	H
2	5150.000	1.73	34.51	36.24	54.00	-17.76	AVG	H
3	5350.000	1.89	47.91	49.80	74.00	-24.20	peak	H
4	5350.000	1.89	34.46	36.35	54.00	-17.65	AVG	H
5	10440.000	13.03	40.09	53.12	68.20	-15.08	peak	H
6	15660.000	25.30	29.16	54.46	74.00	-19.54	peak	H
7	15660.000	25.30	14.98	40.28	54.00	-13.72	AVG	H
1	5150.000	1.73	48.87	50.60	74.00	-23.40	peak	V
2	5150.000	1.73	34.72	36.45	54.00	-17.55	AVG	V
3	5350.000	1.89	48.79	50.68	74.00	-23.32	peak	V
4	5350.000	1.89	34.63	36.52	54.00	-17.48	AVG	V
5	10440.000	13.03	41.44	54.47	68.20	-13.73	peak	V
6	15660.000	25.30	30.33	55.63	74.00	-18.37	peak	V
7	15660.000	25.30	16.16	41.46	54.00	-12.54	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ax HE20 CH48 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5350.000	1.89	49.05	50.94	74.00	-23.06	peak	H
2	5350.000	1.89	34.56	36.45	54.00	-17.55	AVG	H
3	10480.000	13.12	39.44	52.56	68.20	-15.64	peak	H
4	15720.000	25.33	29.06	54.39	74.00	-19.61	peak	H
5	15720.000	25.33	14.95	40.28	54.00	-13.72	AVG	H
1	5350.000	1.89	49.33	51.22	74.00	-22.78	peak	V
2	5350.000	1.89	35.64	37.53	54.00	-16.47	AVG	V
3	10480.000	13.12	40.44	53.56	68.20	-14.64	peak	V
4	15720.000	25.33	29.78	55.11	74.00	-18.89	peak	V
5	15720.000	25.33	16.19	41.52	54.00	-12.48	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE40 CH38 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	48.92	50.65	74.00	-23.35	peak	H
2	5150.000	1.73	35.09	36.82	54.00	-17.18	AVG	H
3	10380.000	12.89	40.31	53.20	68.20	-15.00	peak	H
4	15570.000	25.26	29.03	54.29	74.00	-19.71	peak	H
5	15570.000	25.26	15.50	40.76	54.00	-13.24	AVG	H
1	5150.000	1.73	52.22	53.95	74.00	-20.05	peak	V
2	5150.000	1.73	37.89	39.62	54.00	-14.38	AVG	V
3	10380.000	12.89	40.69	53.58	68.20	-14.62	peak	V
4	15570.000	25.26	30.95	56.21	74.00	-17.79	peak	V
5	15570.000	25.26	17.09	42.35	54.00	-11.65	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 7, 802.11ax HE40 CH46 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	47.91	49.64	74.00	-24.36	peak	H
2	5150.000	1.73	34.74	36.47	54.00	-17.53	AVG	H
3	5350.000	1.89	48.36	50.25	74.00	-23.75	peak	H
4	5350.000	1.89	34.65	36.54	54.00	-17.46	AVG	H
5	10460.000	13.07	40.38	53.45	68.20	-14.75	peak	H
6	15690.000	25.32	29.27	54.59	74.00	-19.41	peak	H
7	15690.000	25.32	15.33	40.65	54.00	-13.35	AVG	H
1	5150.000	1.73	48.92	50.65	74.00	-23.35	peak	V
2	5150.000	1.73	34.59	36.32	54.00	-17.68	AVG	V
3	5350.000	1.89	48.72	50.61	74.00	-23.39	peak	V
4	5350.000	1.89	34.40	36.29	54.00	-17.71	AVG	V
5	10460.000	13.07	41.28	54.35	68.20	-13.85	peak	V
6	15690.000	25.32	30.92	56.24	74.00	-17.76	peak	V
7	15690.000	25.32	17.19	42.51	54.00	-11.49	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 8, 802.11ax HE80 CH42 UNII-1
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5150.000	1.73	49.44	51.17	74.00	-22.83	peak	H
2	5150.000	1.73	35.52	37.25	54.00	-16.75	AVG	H
3	5350.000	1.89	48.69	50.58	74.00	-23.42	peak	H
4	5350.000	1.89	34.90	36.79	54.00	-17.21	AVG	H
5	10420.000	12.98	40.67	53.65	68.20	-14.55	peak	H
6	15630.000	25.29	29.89	55.18	74.00	-18.82	peak	H
7	15630.000	25.29	16.28	41.57	54.00	-12.43	AVG	H
1	5150.000	1.73	56.73	58.46	74.00	-15.54	peak	V
2	5150.000	1.73	42.54	44.27	54.00	-9.73	AVG	V
3	5350.000	1.89	49.53	51.42	74.00	-22.58	peak	V
4	5350.000	1.89	35.69	37.58	54.00	-16.42	AVG	V
5	10420.000	12.98	41.64	54.62	68.20	-13.58	peak	V
6	15630.000	25.29	30.45	55.74	74.00	-18.26	peak	V
7	15630.000	25.29	16.46	41.75	54.00	-12.25	AVG	V



Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.35	50.74	68.20	-17.46	peak	H
2	5700.000	2.52	49.14	51.66	105.20	-53.54	peak	H
3	5720.000	2.57	48.73	51.30	110.80	-59.50	peak	H
4	5725.000	2.58	48.47	51.05	122.20	-71.15	peak	H
5	11490.000	15.84	37.80	53.64	74.00	-20.36	peak	H
6	11490.000	15.84	24.48	40.32	54.00	-13.68	AVG	H
7	17235.000	30.26	22.79	53.05	68.20	-15.15	peak	H
1	5650.000	2.39	49.52	51.91	68.20	-16.29	peak	V
2	5700.000	2.52	50.00	52.52	105.20	-52.68	peak	V
3	5720.000	2.57	52.15	54.72	110.80	-56.08	peak	V
4	5725.000	2.58	53.76	56.34	122.20	-65.86	peak	V
5	11490.000	15.84	39.34	55.18	74.00	-18.82	peak	V
6	11490.000	15.84	25.80	41.64	54.00	-12.36	AVG	V
7	17235.000	30.26	26.25	56.51	68.20	-11.69	peak	V



Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH157 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.74	51.13	68.20	-17.07	peak	H
2	5700.000	2.52	49.02	51.54	105.20	-53.66	peak	H
3	5720.000	2.57	49.10	51.67	110.80	-59.13	peak	H
4	5725.000	2.58	49.39	51.97	122.20	-70.23	peak	H
5	5850.000	2.89	49.39	52.28	122.20	-69.92	peak	H
6	5855.000	2.90	48.74	51.64	110.80	-59.16	peak	H
7	5875.000	2.95	49.18	52.13	105.20	-53.07	peak	H
8	5925.000	3.07	49.25	52.32	68.20	-15.88	peak	H
9	11570.000	16.00	37.57	53.57	74.00	-20.43	peak	H
10	11570.000	16.00	24.06	40.06	54.00	-13.94	AVG	H
11	17355.000	30.74	23.90	54.64	68.20	-13.56	peak	H
1	5650.000	2.39	49.08	51.47	68.20	-16.73	peak	V
2	5700.000	2.52	49.41	51.93	105.20	-53.27	peak	V
3	5720.000	2.57	49.71	52.28	110.80	-58.52	peak	V
4	5725.000	2.58	50.51	53.09	122.20	-69.11	peak	V
5	5850.000	2.89	49.37	52.26	122.20	-69.94	peak	V
6	5855.000	2.90	49.48	52.38	110.80	-58.42	peak	V
7	5875.000	2.95	49.79	52.74	105.20	-52.46	peak	V
8	5925.000	3.07	49.20	52.27	68.20	-15.93	peak	V
9	11570.000	16.00	39.14	55.14	74.00	-18.86	peak	V
10	11570.000	16.00	25.58	41.58	54.00	-12.42	AVG	V
11	17355.000	30.74	26.01	56.75	68.20	-11.45	peak	V



Power	AC120V/60Hz
Test Mode	Mode 3, 802.11ac VHT20 CH165 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	49.18	52.07	122.20	-70.13	peak	H
2	5855.000	2.90	49.07	51.97	110.80	-58.83	peak	H
3	5875.000	2.95	49.08	52.03	105.20	-53.17	peak	H
4	5925.000	3.07	49.21	52.28	68.20	-15.92	peak	H
5	11650.000	16.16	37.48	53.64	74.00	-20.36	peak	H
6	11650.000	16.16	23.29	39.45	54.00	-14.55	AVG	H
7	17475.000	31.21	23.64	54.85	68.20	-13.35	peak	H
1	5850.000	2.89	51.47	54.36	122.20	-67.84	peak	V
2	5855.000	2.90	50.32	53.22	110.80	-57.58	peak	V
3	5875.000	2.95	49.35	52.30	105.20	-52.90	peak	V
4	5925.000	3.07	49.51	52.58	68.20	-15.62	peak	V
5	11650.000	16.16	38.99	55.15	74.00	-18.85	peak	V
6	11650.000	16.16	25.31	41.47	54.00	-12.53	AVG	V
7	17475.000	31.21	25.14	56.35	68.20	-11.85	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT40 CH151 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	49.16	51.55	68.20	-16.65	peak	H
2	5700.000	2.52	49.61	52.13	105.20	-53.07	peak	H
3	5720.000	2.57	49.49	52.06	110.80	-58.74	peak	H
4	5725.000	2.58	51.17	53.75	122.20	-68.45	peak	H
5	11510.000	15.88	38.33	54.21	74.00	-19.79	peak	H
6	11510.000	15.88	24.44	40.32	54.00	-13.68	AVG	H
7	17265.000	30.38	24.97	55.35	68.20	-12.85	peak	H
1	5650.000	2.39	50.14	52.53	68.20	-15.67	peak	V
2	5700.000	2.52	50.95	53.47	105.20	-51.73	peak	V
3	5720.000	2.57	53.48	56.05	110.80	-54.75	peak	V
4	5725.000	2.58	57.04	59.62	122.20	-62.58	peak	V
5	11510.000	15.88	39.86	55.74	74.00	-18.26	peak	V
6	11510.000	15.88	25.44	41.32	54.00	-12.68	AVG	V
7	17265.000	30.38	26.09	56.47	68.20	-11.73	peak	V



Power	AC120V/60Hz
Test Mode	Mode 4, 802.11ac VHT40 CH159 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5850.000	2.89	47.82	50.71	122.20	-71.49	peak	H
2	5855.000	2.90	48.50	51.40	110.80	-59.40	peak	H
3	5875.000	2.95	49.31	52.26	105.20	-52.94	peak	H
4	5925.000	3.07	49.52	52.59	68.20	-15.61	peak	H
5	11590.000	16.04	37.58	53.62	74.00	-20.38	peak	H
6	11590.000	16.04	23.43	39.47	54.00	-14.53	AVG	H
7	17385.000	30.85	24.59	55.44	68.20	-12.76	peak	H
1	5850.000	2.89	48.81	51.70	122.20	-70.50	peak	V
2	5855.000	2.90	50.16	53.06	110.80	-57.74	peak	V
3	5875.000	2.95	53.97	56.92	105.20	-48.28	peak	V
4	5925.000	3.07	56.77	59.84	68.20	-8.36	peak	V
5	11590.000	16.04	39.34	55.38	74.00	-18.62	peak	V
6	11590.000	16.04	25.68	41.72	54.00	-12.28	AVG	V
7	17385.000	30.85	26.00	56.85	68.20	-11.35	peak	V



Power	AC120V/60Hz
Test Mode	Mode 5, 802.11ac VHT80 CH155 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.46	50.85	68.20	-17.35	peak	H
2	5700.000	2.52	49.44	51.96	105.20	-53.24	peak	H
3	5720.000	2.57	50.01	52.58	110.80	-58.22	peak	H
4	5725.000	2.58	48.78	51.36	122.20	-70.84	peak	H
5	5850.000	2.89	48.92	51.81	122.20	-70.39	peak	H
6	5855.000	2.90	49.06	51.96	110.80	-58.84	peak	H
7	5875.000	2.95	48.69	51.64	105.20	-53.56	peak	H
8	5925.000	3.07	49.60	52.67	68.20	-15.53	peak	H
9	11550.000	15.96	38.37	54.33	74.00	-19.67	peak	H
10	11550.000	15.96	24.61	40.57	54.00	-13.43	AVG	H
11	17325.000	30.62	24.56	55.18	68.20	-13.02	peak	H
1	5650.000	2.39	49.22	51.61	68.20	-16.59	peak	V
2	5700.000	2.52	51.29	53.81	105.20	-51.39	peak	V
3	5720.000	2.57	52.17	54.74	110.80	-56.06	peak	V
4	5725.000	2.58	54.11	56.69	122.20	-65.51	peak	V
5	5850.000	2.89	52.19	55.08	122.20	-67.12	peak	V
6	5855.000	2.90	50.58	53.48	110.80	-57.32	peak	V
7	5875.000	2.95	51.02	53.97	105.20	-51.23	peak	V
8	5925.000	3.07	49.42	52.49	68.20	-15.71	peak	V
9	11550.000	15.96	39.61	55.57	74.00	-18.43	peak	V
10	11550.000	15.96	25.57	41.53	54.00	-12.47	AVG	V
11	17325.000	30.62	25.50	56.12	68.20	-12.08	peak	V



Power	AC120V/60Hz
Test Mode	Mode 6, 802.11ax HE20 CH149 UNII-3
Note : Level = Reading + Factor Margin = Level – Limit Factor = Antenna Factor + Cable Loss – Amplifier Factor	

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector mode (PK/AVG)	AntPol. H/V
1	5650.000	2.39	48.88	51.27	68.20	-16.93	peak	H
2	5700.000	2.52	49.16	51.68	105.20	-53.52	peak	H
3	5720.000	2.57	49.04	51.61	110.80	-59.19	peak	H
4	5725.000	2.58	49.79	52.37	122.20	-69.83	peak	H
5	11490.000	15.84	37.81	53.65	74.00	-20.35	peak	H
6	11490.000	15.84	23.37	39.21	54.00	-14.79	AVG	H
7	17235.000	30.26	24.32	54.58	68.20	-13.62	peak	H
1	5650.000	2.39	50.03	52.42	68.20	-15.78	peak	V
2	5700.000	2.52	49.80	52.32	105.20	-52.88	peak	V
3	5720.000	2.57	52.96	55.53	110.80	-55.27	peak	V
4	5725.000	2.58	55.56	58.14	122.20	-64.06	peak	V
5	11490.000	15.84	38.43	54.27	74.00	-19.73	peak	V
6	11490.000	15.84	24.69	40.53	54.00	-13.47	AVG	V
7	17235.000	30.26	25.42	55.68	68.20	-12.52	peak	V