

FCC RADIO TEST REPORT FCC ID: 2ACZA-MP309

Product: Mobile Phone

Trade Name: Ole!

Model No: MP309

Serial Model: N/A

Applicant's : Shenzhen Magicpomelo Technology Co., Ltd

Address : 2905,Block A Reith International Center,No.1002 Yanhe Road,Luohu

District, Shenzhen, Guangdong.

Prepared By: Nowd Testing Services Co.,Ltd.

No. 606, FuerYuanjian Business Centre, 25 Zone, Bao'an District,

Shenzhen, Guandong

Tel: (86) 755-27830065 Fax: (86) 755-27830095

Report No.: NTS1408150273R2

Date of Test: Aug.20, 2014

Date of Rep.: Aug.29, 2014



TEST REPORT DECLARATION

Report No.: NTS1408150273R2

Applicant : Shenzhen Magicpomelo Technology Co., Ltd

Address : F/L3, Hongye Building, No.2 Yunshan East Road, Jiangbei Area,

Huizhou City, Guangdong Prov., China.

Manufacturer : HUIZHOU GUANTONG ELECTRONIC TECHNOLOGY CO.,LTD

Address : NO.2,BEIAO AVENUE,DAWENBA,AOTOU,DAYABAY,HUIZHOU

EUT Description : Mobile Phone

Trademark : Ole!

Model No. : MP309

Serial Model : N/A

Power Supply : DC 3.7V

Standards : FCC Part 15.247
Test procedure : ANSI C63.4-2009

This device described above has been tested by Nowd Testing Services Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Nowd Testing Services Co., Ltd., this document may be altered or revised by ShenZhen Nowd Testing Services Co., Ltd., personal only, and shall be noted in the revision of the document.

Date of Test:	Aug. 29, 2014
Prepared by:	jack
	Jack_Wu
	Testing Engineer
Reviewed by:	And
·	Andy Xie
	Technical Manager
Approved by:	Samuel
	somnus
	Authorized Signatory



Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD	14 14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS 3.2.2 TEST PROCEDURE	17 18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS 3.2.6 TEST RESULTS (BELOW 30 MHZ)	20 21
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . NUMBER OF HOPPING CHANNEL	36
4.1 APPLIED PROCEDURES / LIMIT	36
4.1.1 TEST PROCEDURE 4.1.2 DEVIATION FROM STANDARD	36 36
4.1.3 TEST SETUP	36
4.1.4 EUT OPERATION CONDITIONS	36
4.1.5 TEST RESULTS	37
5 . AVERAGE TIME OF OCCUPANCY	38
5.1 APPLIED PROCEDURES / LIMIT	38



_			_	_		
Т٦	h	\sim	Λ£	\sim	nto	nts
10						

Table of Contents	
	Page
5.1.1 TEST PROCEDURE 5.1.2 DEVIATION FROM STANDARD 5.1.3 TEST SETUP 5.1.4 EUT OPERATION CONDITIONS 5.1.5 TEST RESULTS	38 38 39 39 40
6 . HOPPING CHANNEL SEPARATION MEASUREMENT	46
6.1 APPLIED PROCEDURES / LIMIT 6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS 6.1.5 TEST RESULTS	46 46 46 46 46
7 . BANDWIDTH TEST	53
7.1 APPLIED PROCEDURES / LIMIT 7.1.1 TEST PROCEDURE 7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS 7.1.5 TEST RESULTS	53 53 53 53 53 54
8 . PEAK OUTPUT POWER TEST	60
8.1 APPLIED PROCEDURES / LIMIT 8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD 8.1.3 TEST SETUP 8.1.4 EUT OPERATION CONDITIONS 8.1.5 TEST RESULTS	60 60 60 60 60
9 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 9.1 DEVIATION FROM STANDARD 9.2 TEST SETUP 9.3 EUT OPERATION CONDITIONS 9.4 TEST RESULTS	66 66 66 67
10 . ANTENNA REQUIREMENT	75
10.1 STANDARD REQUIREMENT	75
10.2 EUT ANTENNA	75
11 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	76



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C				
Standard Section	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247(a)(1)	Hopping Channel Separation	PASS		
15.247(b)(1)	Peak Output Power	PASS		
15.247(c)	Radiated Spurious Emission	PASS		
15.247(a)(iii)	Number of Hopping Frequency	PASS		
15.247(a)(iii)	Dwell Time	PASS		
15.247(a)(1)	Bandwidth	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Nowd Testing Services Co.,Ltd.

Add.: No. 606, FuerYuanjian Business Centre, 25 Zone, Bao'an District,

Shenzhen, Guandong FCC Registration No.:230614;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone			
Trade Name	Ole!			
Model Name	MP309			
Serial Model	N/A			
Model Difference	N/A			
	The EUT is a Mobile Ph	one		
	Operation Frequency:	2402~2480 MHz		
	Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): □/4-DQPSK BT EDR(3Mbps): 8-DPSK		
	Bit Rate of Transmitter	1Mbps/2Mbps/3Mbps		
	Number Of Channel	79 CH		
Product Description	Antenna Designation:	Please see Note 3.		
	Output Power(Conducted):	BT(1Mbps): 3.534dBm BT EDR(2Mbps): 4.368dBm		
		BT EDR(3Mbps): 4.564dBm		
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
Channel List	Please refer to the Note	2.		
	Model: GT-001			
Adapter	Input:100-240VAC 50/60Hz 0.2A			
	Output: DC 5.0V/0.25A			
	Rated Voltage: 3.7V			
Battery	Charge Limit: 4.2V Capacity: 500mAh			
Connecting I/O Port(s)	Please refer to the User's Manual			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2

	Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
00	2402	27	2429	54	2456	
01	2403	28	2430	55	2457	
02	2404	29	2431	56	2458	
03	2405	30	2432	57	2459	
04	2406	31	2433	58	2460	
05	2407	32	2434	59	2461	
06	2408	33	2435	60	2462	
07	2409	34	2436	61	2463	
08	2410	35	2437	62	2464	
09	2411	36	2438	63	2465	
10	2412	37	2439	64	2466	
11	2413	38	2440	65	2467	
12	2414	39	2441	66	2468	
13	2415	40	2442	67	2469	
14	2416	41	2443	68	2470	
15	2417	42	2444	69	2471	
16	2418	43	2445	70	2472	
17	2419	44	2446	71	2473	
18	2420	45	2447	72	2474	
19	2421	46	2448	73	2475	
20	2422	47	2449	74	2476	
21	2423	48	2450	75	2477	
22	2424	49	2451	76	2478	
23	2425	50	2452	77	2479	
24	2426	51	2453	78	2480	
25	2427	52	2454			
26	2428	53	2455			

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PIFA Antenna	N/A	-2.0dBi	BT Antenna



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Link Mode

For Conducted Emission		
Final Test Mode	Description	
Mode 4	Link Mode	

For Radiated Emission		
Final Test Mode	Description	
Mode 1	CH00	
Mode 2	CH39	
Mode 3	CH78	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use new battery.
- (3)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: Spreadtrum				
Frequency	2402 MHz	2441 MHz	2480 MHz		
Parameters(1/2/3Mbps)	DEF	DEF	DEF		



2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 4



Mode 1/2/3

E-1 EUT



2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Mobile Phone	N/A	MP309	N/A	EUT
E-2	Adapter	N/A	GT-001	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Yes	No	1m	USB Cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



Page 12 of 77 Report No.: NTS1408150273R2

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	ation root oqui						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-101 80	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619. 05	2014.07.06	2015.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufactu rer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 7	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

	Class A (dBuV)		Class B (dBuV)		Ctondord
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average	Standard
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		




3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

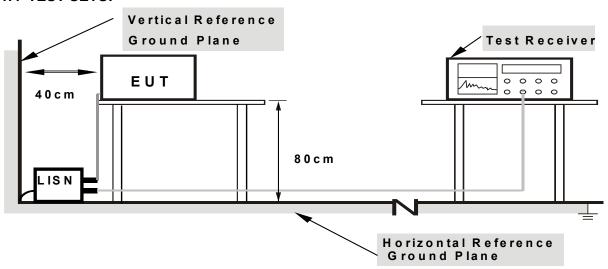

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Detector Time
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1660	30.26	11.46	41.72	65.15	-23.43	QP
0.1660	7.29	11.46	18.75	55.15	-36.40	AVG
0.2179	27.83	11.04	38.87	62.89	-24.02	QP
0.2179	5.11	11.04	16.15	52.89	-36.74	AVG
0.4097	18.55	10.68	29.23	57.65	-28.42	QP
0.4097	6.20	10.68	16.88	47.65	-30.77	AVG
0.6219	16.65	10.55	27.20	56.00	-28.80	QP
0.6219	7.13	10.55	17.68	46.00	-28.32	AVG
8.9817	17.99	10.79	28.78	60.00	-31.22	QP
8.9817	4.14	10.79	14.93	50.00	-35.07	AVG
24.5060	16.88	11.15	28.03	60.00	-31.97	QP
24.5060	3.33	11.15	14.48	50.00	-35.52	AVG

Remark

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

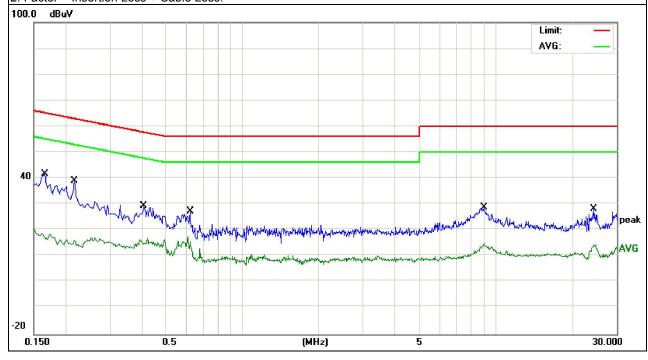




EUT:	Mobile Phone	Model Name :	MP309
Temperature :	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Datastar Tuna
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1660	34.18	11.46	45.64	65.15	-19.51	QP
0.1660	14.22	11.46	25.68	55.15	-29.47	AVG
0.2900	25.58	10.89	36.47	60.52	-24.05	QP
0.2900	5.52	10.89	16.41	50.52	-34.11	AVG
1.3540	15.99	10.52	26.51	56.00	-29.49	QP
1.3540	0.95	10.52	11.47	46.00	-34.53	AVG
1.8775	16.30	10.52	26.82	56.00	-29.18	QP
1.8775	2.11	10.52	12.63	46.00	-33.37	AVG
9.1139	26.75	10.80	37.55	60.00	-22.45	QP
9.1139	7.53	10.80	18.33	50.00	-31.67	AVG
24.1580	17.33	11.15	28.48	60.00	-31.52	QP
24.1580	2.11	11.15	13.26	50.00	-36.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

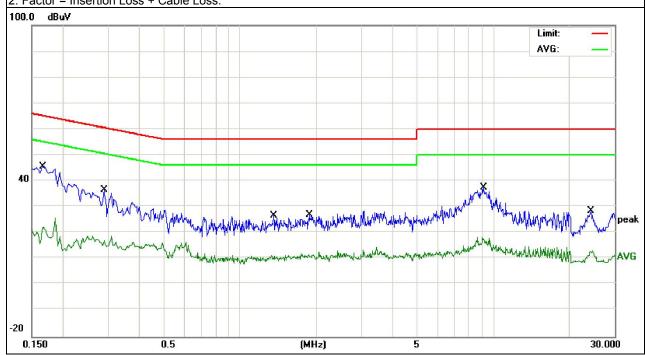



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBu	ıV/m) (at 3M)	Class B (dBuV/m) (at 3M)	
FREQUENCT (MITZ)	PEAK AVERAGE		PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted	1 MHz / 1 MHz for Dook, 1 MHz / 10Hz for Average
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation




3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

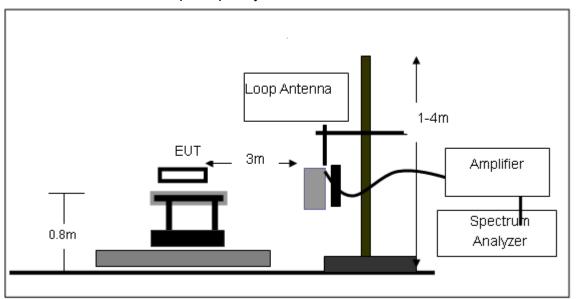


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

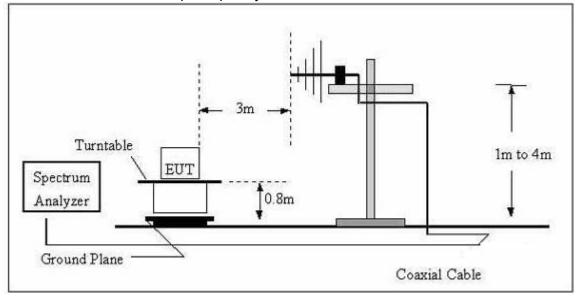



(C) Radiated Emission Test-Up Frequency Above 1GHz

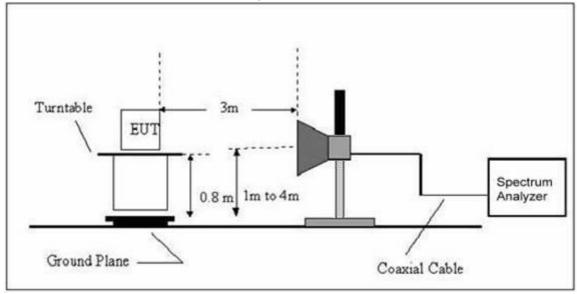

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =20 log (specific distance/test distance)(dB); Limit line = specific limits(dBuv) + distance extrapolation factor.




3.2.7 TEST RESULTS (BETWEEN 30M - 1000 MHZ)

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode:	TX

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
39.0245	14.08	13.88	27.96	40.00	-12.04	peak
109.0285	15.43	11.52	26.95	43.50	-16.55	peak
133.1511	15.82	12.23	28.05	43.50	-15.45	peak
668.1422	18.92	23.81	42.73	46.00	-3.27	peak
845.0878	14.56	27.49	42.05	46.00	-3.95	peak

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

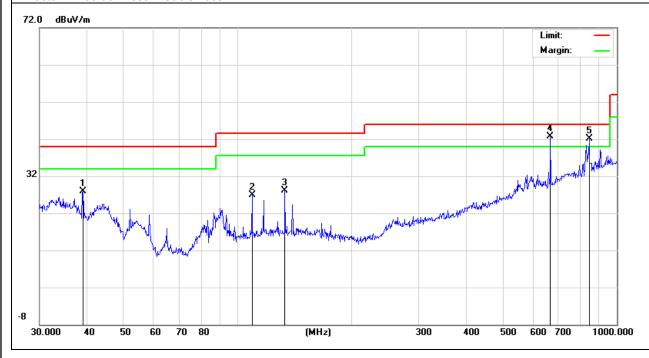




EUT:	Mobile Phone	Model Name :	MP309
Temperature :	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode:	TX

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Data eter Tura
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
166.6513	11.82	10.68	22.50	43.50	-21.00	peak
668.1422	13.85	23.81	37.66	46.00	-8.34	peak
893.8567	12.99	27.60	40.59	46.00	-5.41	peak

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

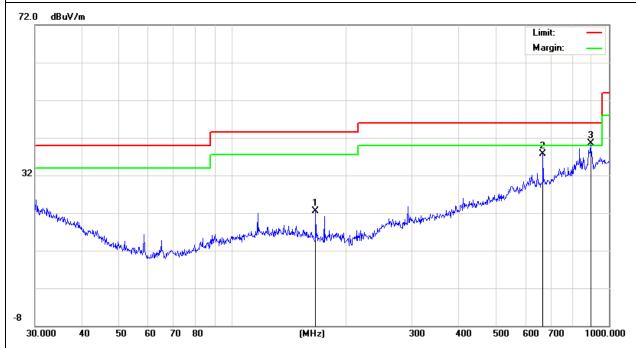




3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	Mobile Phone	Model Name :	MP309
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2402MHz - CH 00(1Mbps)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	4804.50	57.36	-3.64	53.72	74	-20.28	Pk
V	4804.50	47.73	-3.64	44.09	54	-9.91	Av
Н	4852.15	56.91	-3.68	53.23	74	-20.77	Pk
Н	4852.50	43.39	-3.67	39.72	54	-14.28	Av
Н	7323.50	46.24	-0.82	45.42	74	-28.58	Pk

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit





EUT: Mobile Phone Model Name: MP309

Temperature: 20 °C Relative Humidity: 48%

Pressure: 1010 hPa Test Voltage: DC 3.7V

Test Mode: TX 2441MHz – CH 39(1Mbps)

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	4882.15	65.1	-3.68	61.42	74	-12.58	Pk
V	4882.15	47.35	-3.68	43.67	54	-10.33	Av
Н	4882.15	63.06	-3.68	59.38	74	-14.62	Pk
Н	4882.15	46.37	-3.68	42.69	54	-11.31	Av

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit





EUT: Mobile Phone Model Name: MP309

Temperature: 20 °C Relative Humidity: 48%

Pressure: 1010 hPa Test Voltage: DC 3.7V

Test Mode: TX 2480MHz − CH 78(1Mbps)

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	4960.15	62.6	-3.59	59.01	74	-14.99	Pk
V	4960.15	46.93	-3.59	43.34	54	-10.66	Av
Н	4960.15	62.25	-3.59	58.66	74	-15.34	Pk
Н	4960.15	46.67	-3.59	43.08	54	-10.92	Av


Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

Note: Mode 1Mbps is the worst mode.





Conducted Spurious Emissions at Antenna Port: CH00 -1Mbps

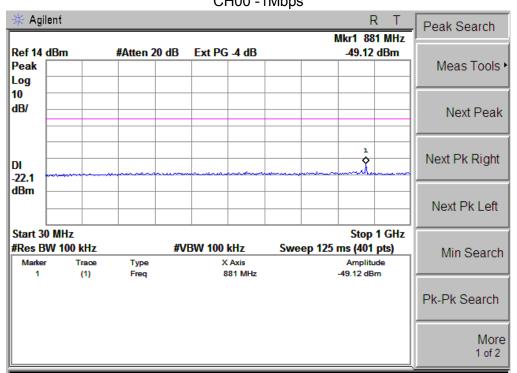

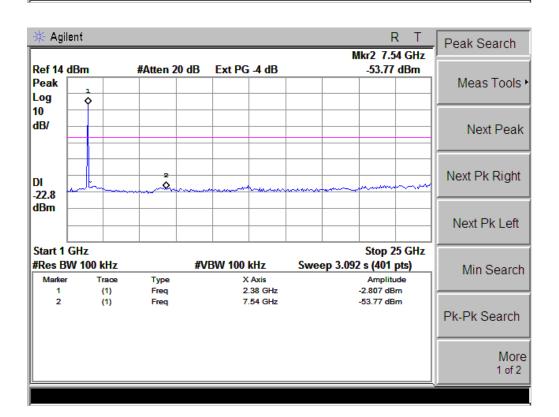





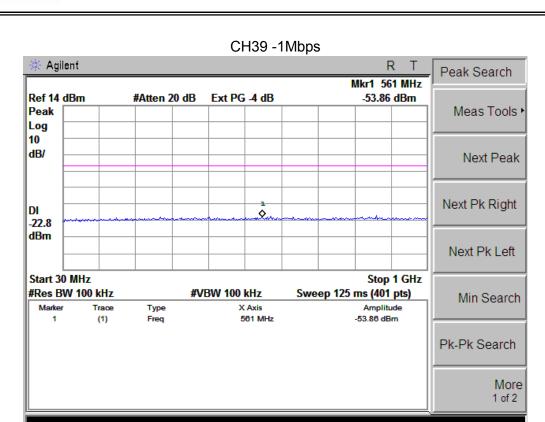

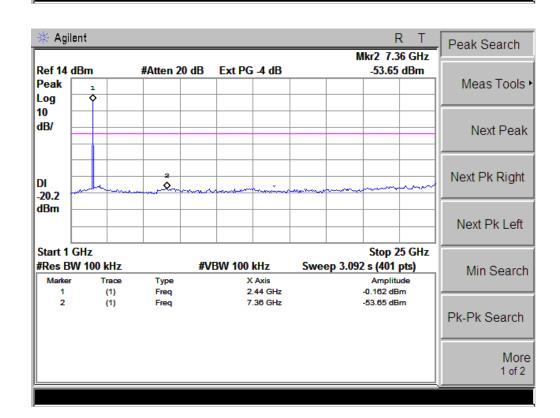





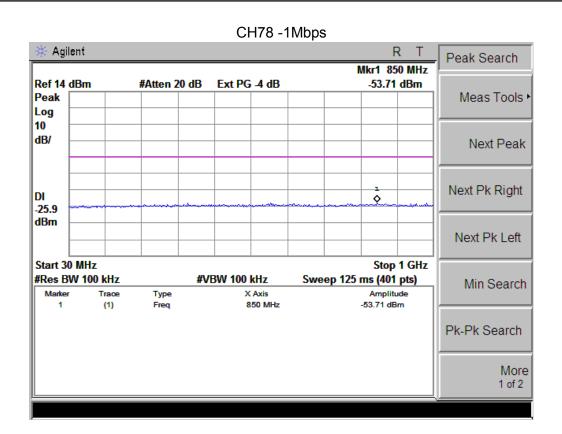

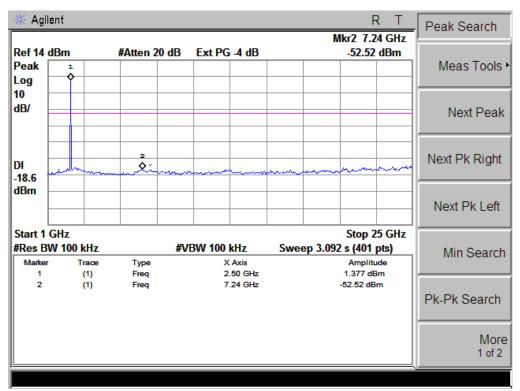





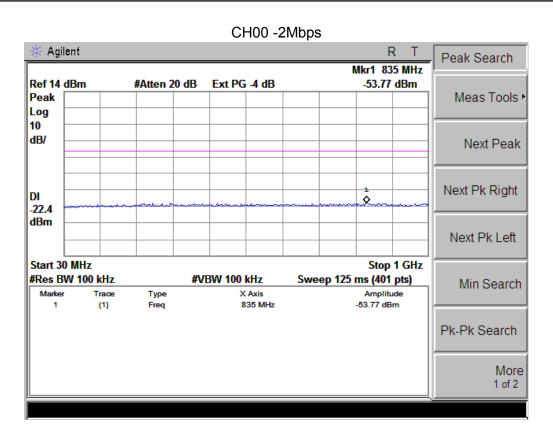

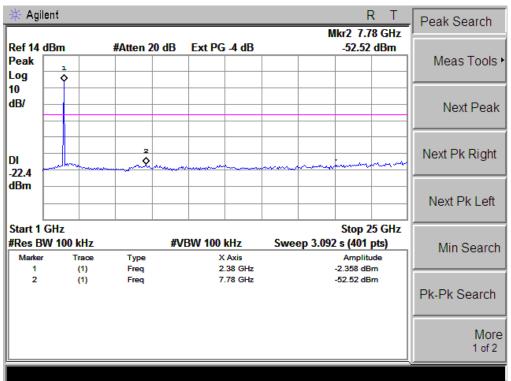





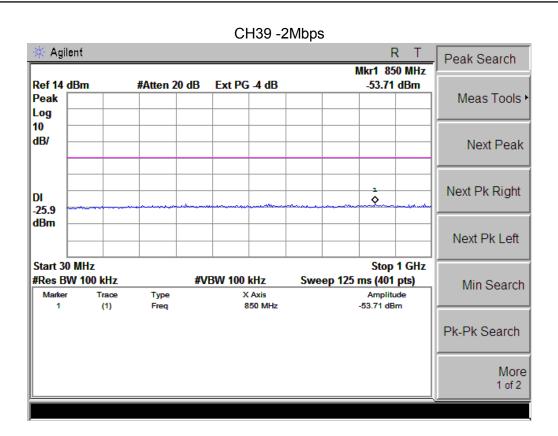

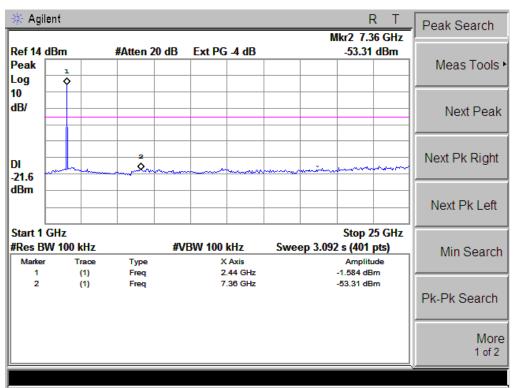





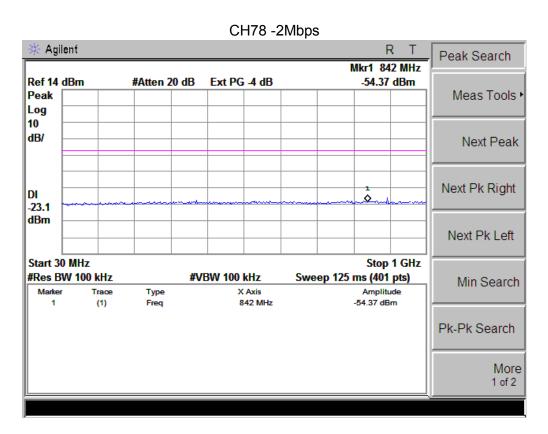

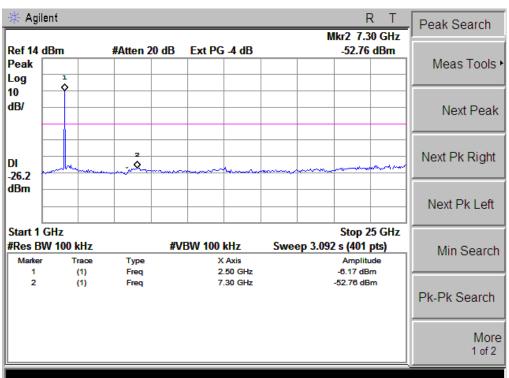





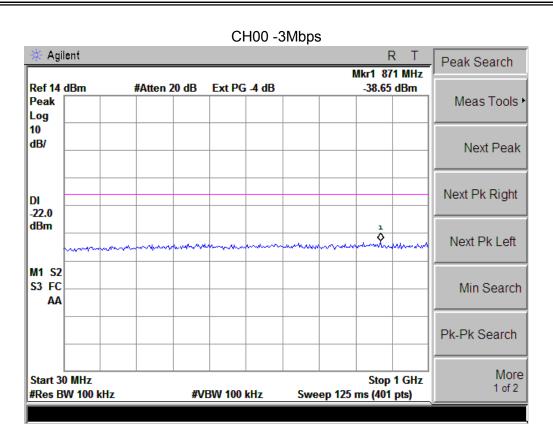

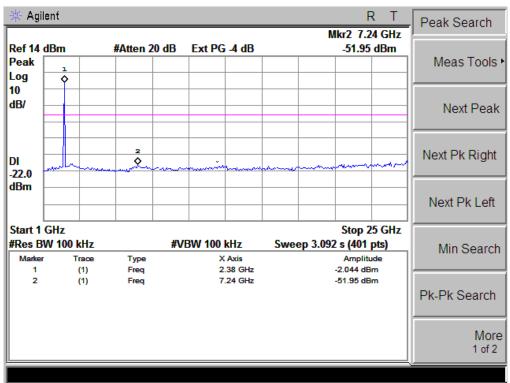





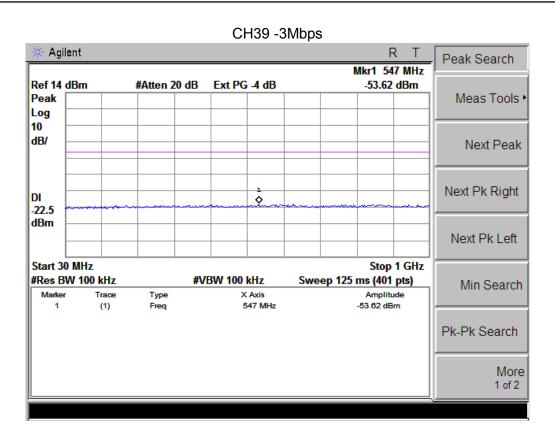

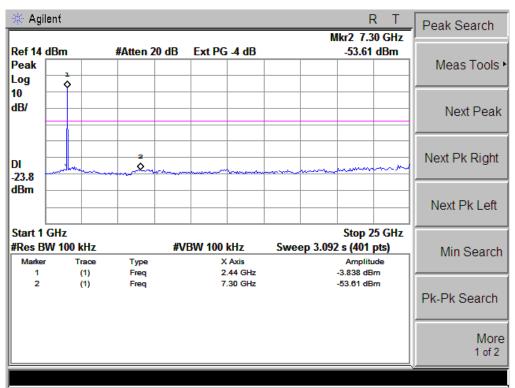



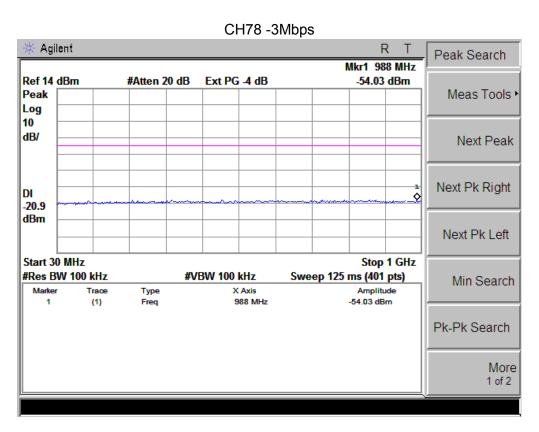

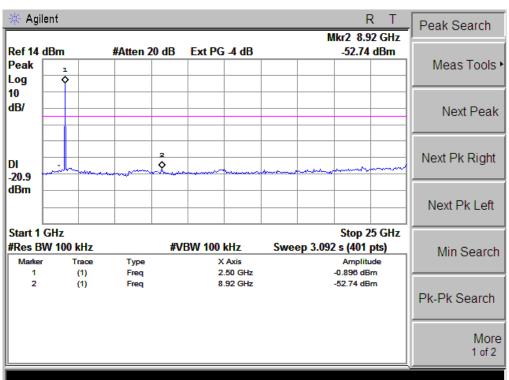



4. NUMBER OF HOPPING CHANNEL

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS	

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1% of the span
VB	VBW ≥ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE


a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b. Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel 79

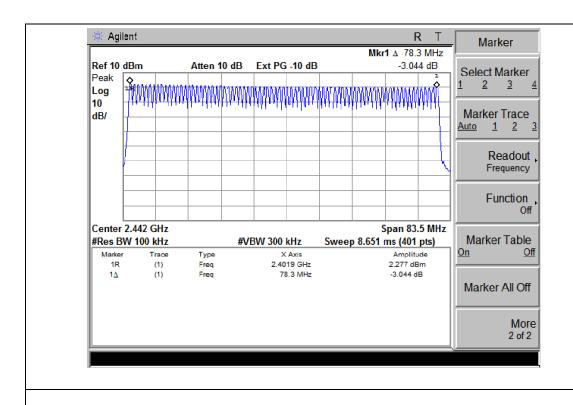



5. AVERAGE TIME OF OCCUPANCY

5.1 APPLIED PROCEDURES / LIMIT

,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
FCC Part15 (15.247) , Subpart C				
Section Test Item Limit		Frequency Range (MHz)	Result	
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. A Period Time = (channel number)*0.4

 - DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
 DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
 DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

5.1.2 DEVIATION FROM STANDARD

No deviation.



5.1.3 TEST SETUP

SPECTRUM
ANALYZER

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.5 TEST RESULTS


			,
EUT:	Mobile Phone	Model Name :	MP309
Temperature:	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39-DH5,2DH5,3DH5		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2441 MHz	2.88	0.31	0.4
2DH5	2441 MHz	2.83	0.30	0.4
3DH5	2441 MHz	2.88	0.31	0.4

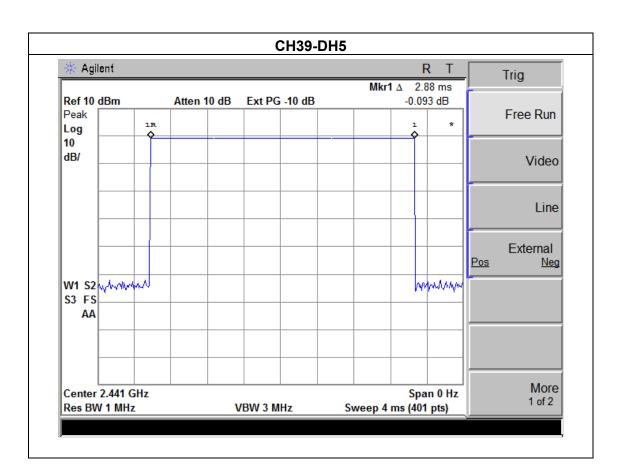



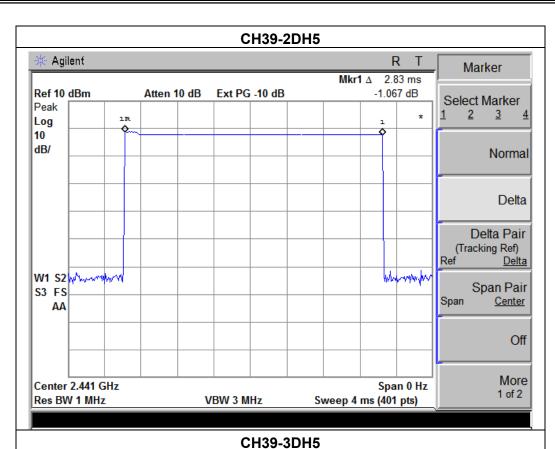

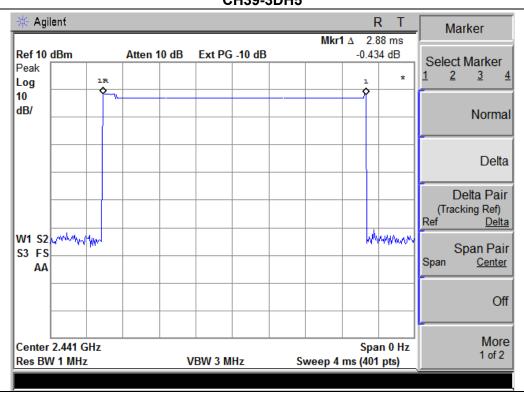




EUT: Mobile Phone Model Name: MP309

Temperature: 25 °C Relative Humidity: 60%


Pressure: 1012 hPa Test Voltage: DC 3.7V


Test Mode: CH39-DH3,2DH3,3DH3

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH3	2441 MHz	1.62	0.26	0.4
2DH3	2441 MHz	1.63	0.26	0.4
3DH3	2441 MHz	1.63	0.26	0.4

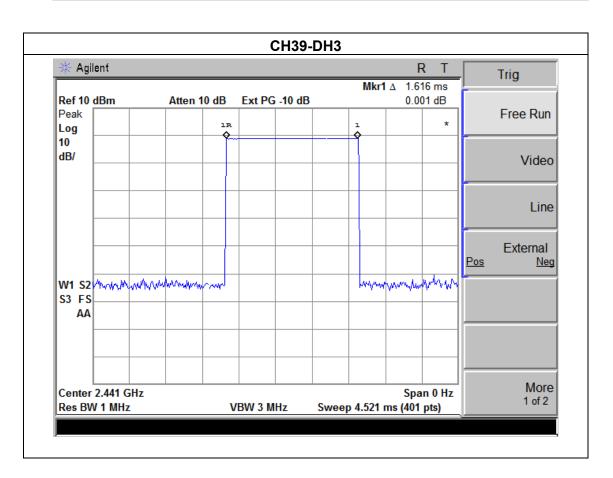



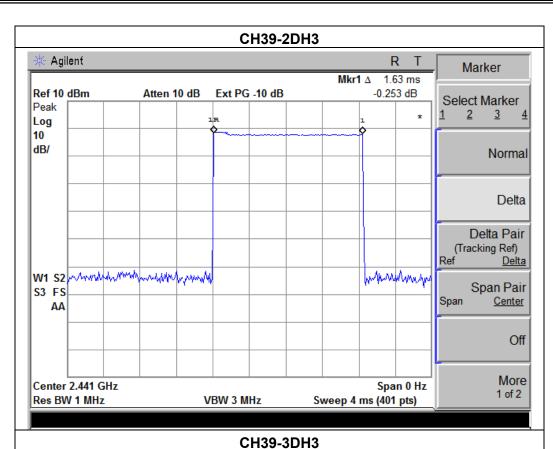

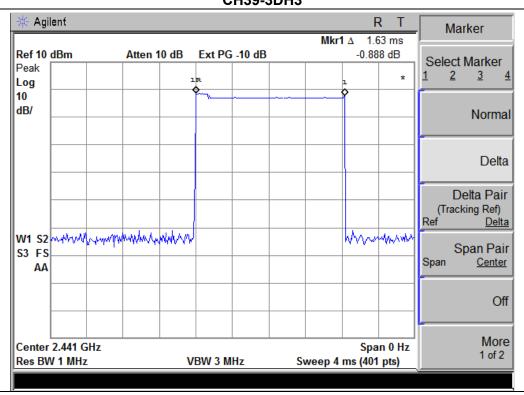




EUT : Mobile Phone Model Name : MP309

Temperature : 25 °C Relative Humidity : 60%


Pressure : 1012 hPa Test Voltage : DC 3.7V


Test Mode : CH39-DH1,2DH1,3DH1

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2441 MHz	0.37	0.12	0.4
2DH1	2441 MHz	0.37	0.12	0.4
3DH1	2441 MHz	0.37	0.12	0.4

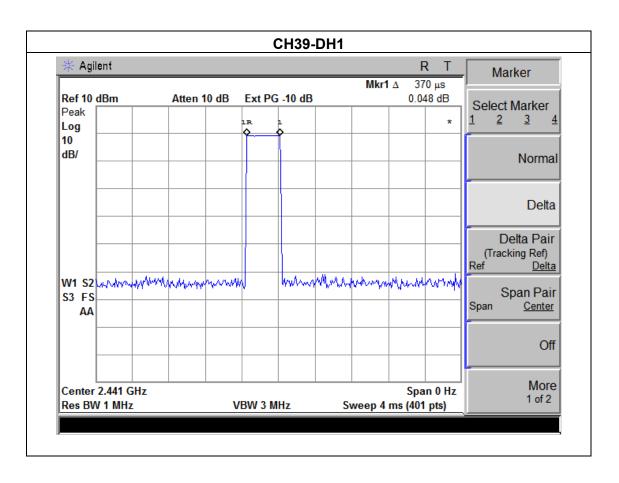



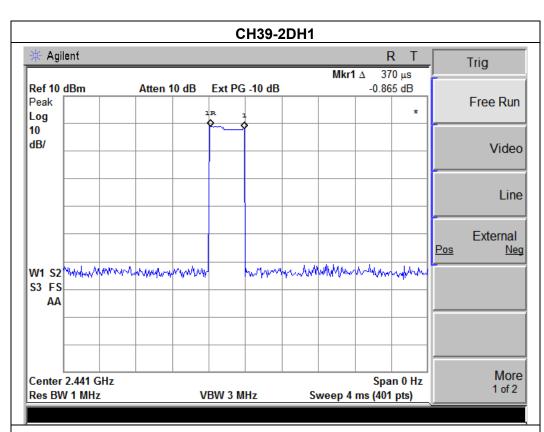

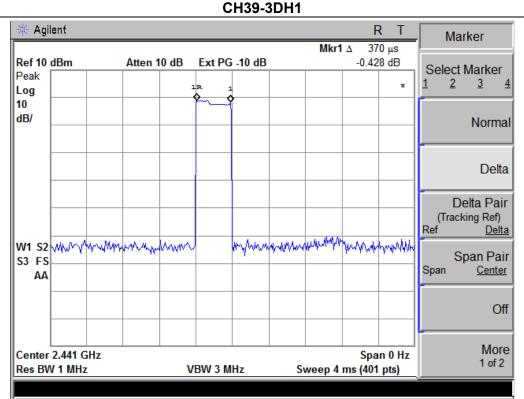



6. HOPPING CHANNEL SEPARATION MEASUREMENT

6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.




6.1.5 TEST RESULTS


EUT:	Mobile Phone	Model Name :	MP309
Temperature :	25 ℃	Relative Humidity: 60%	
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)		


Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.005	Complies
2441 MHz	1.013	Complies
2480 MHz	1.000	Complies

Ch. Separation Limits: >20dB bandwidth

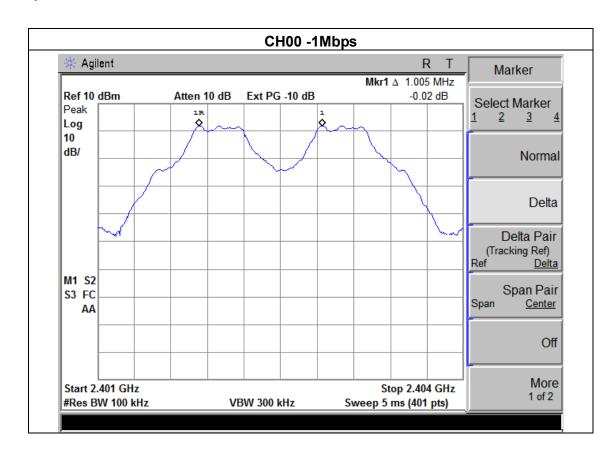



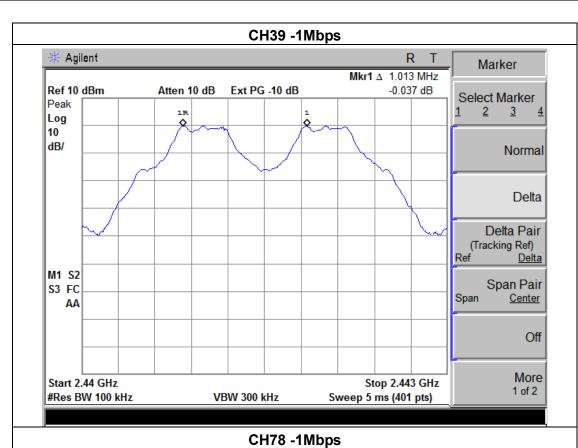

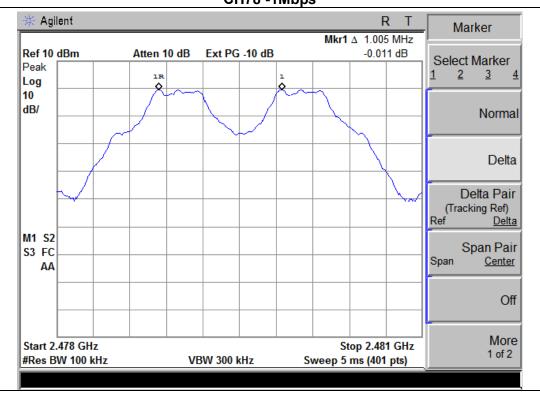



EUT: Mobile Phone Model Name: MP309


Temperature: 25 °C Relative Humidity: 60%

Pressure: 1012 hPa Test Voltage: DC 3.7V


Test Mode: CH00 / CH39 /CH78 (2Mbps Mode)


Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.005	Complies
2441 MHz	1.004	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

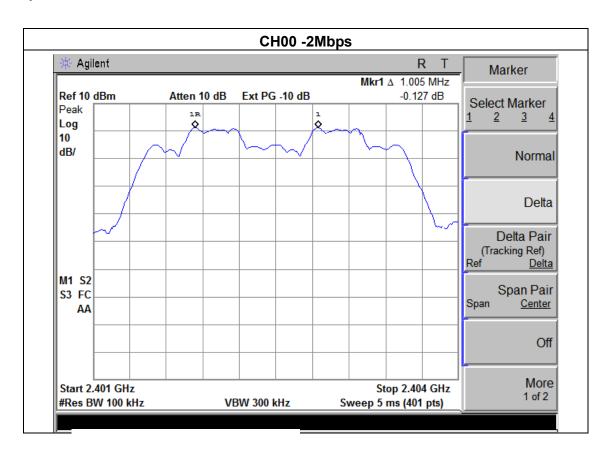



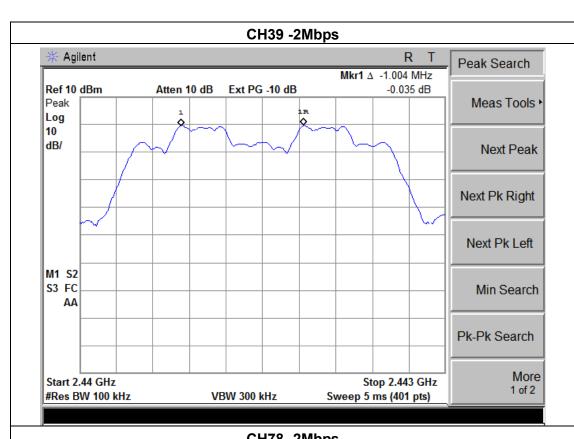

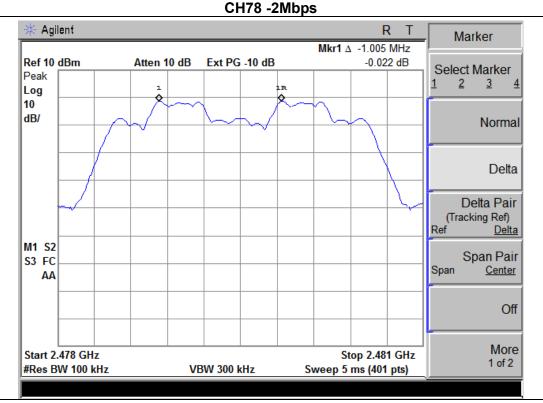





EUT:	Mobile Phone	Model Name :	MP309
Temperature :	25 ℃ Relative Humidity : 60%		
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78 (3Mbps Mode)		


Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.013	Complies
2441 MHz	1.013	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

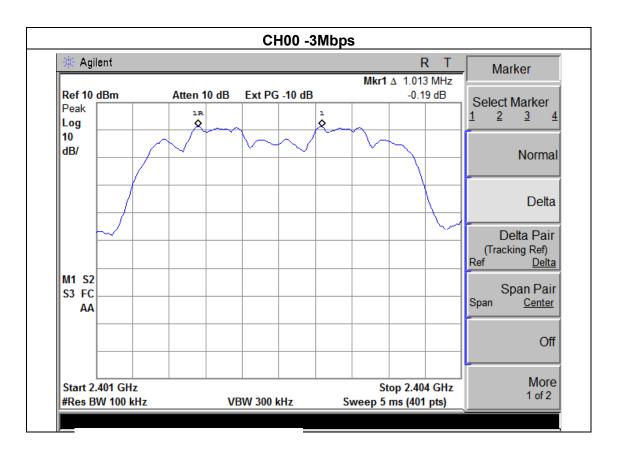



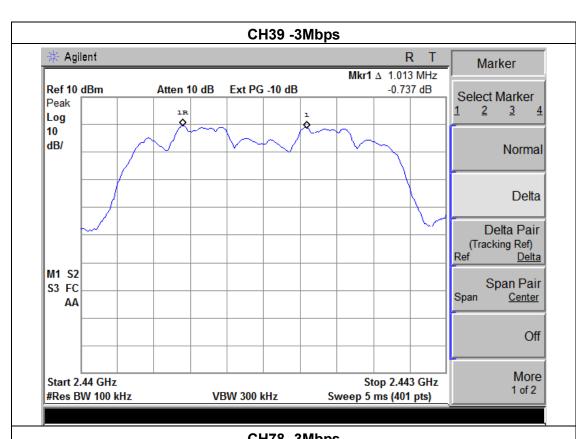

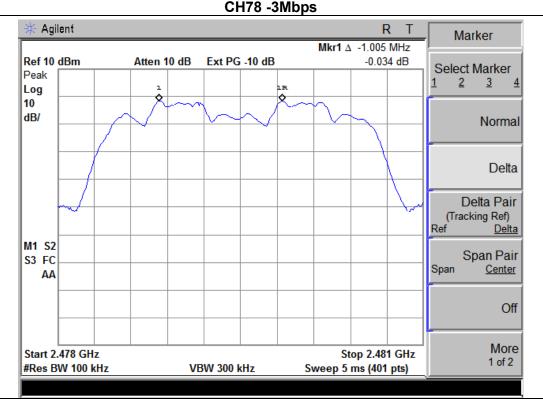



7. BANDWIDTH TEST

7.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C				
Section Test Item Frequency Range (MHz) Result				Result	
	15.247 (a)(1)	Bandwidth	2400-2483.5	PASS	

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	RBW ≥ 1% of the 20 dB bandwidth
VB	$VBW \ge RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.1.1 TEST PROCEDURE


According to the DA 00-705, the 20dB bandwidth test method as follows.

- b. Spectrum Setting : RBW= RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW, Sweep time = Auto.
- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.1.5 TEST RESULTS

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(1Mbps)		

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.128	PASS
2441 MHz	1.122	PASS
2480 MHz	1.125	PASS

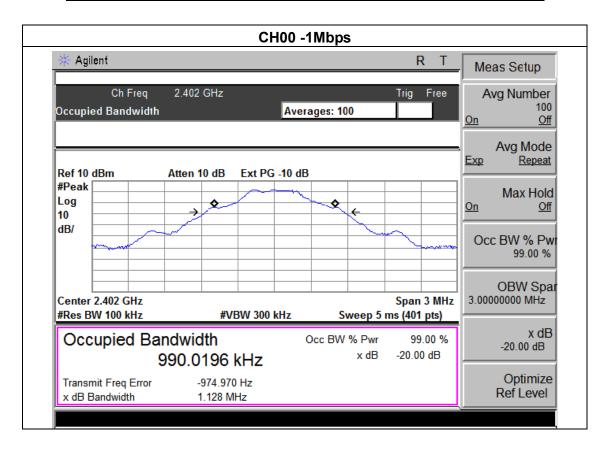



dB/

Center 2.48 GHz

#Res BW 100 kHz

Transmit Freq Error

x dB Bandwidth

Occupied Bandwidth

Report No.: NTS1408150273R2

Occ BW % Pw 99.00 %

OBW Spar 3.00000000 MHz

x dB

-20.00 dB

Optimize

Ref Level

Span 3 MHz


99.00 %

-20.00 dB

Sweep 5 ms (401 pts)

Occ BW % Pwr

x dB

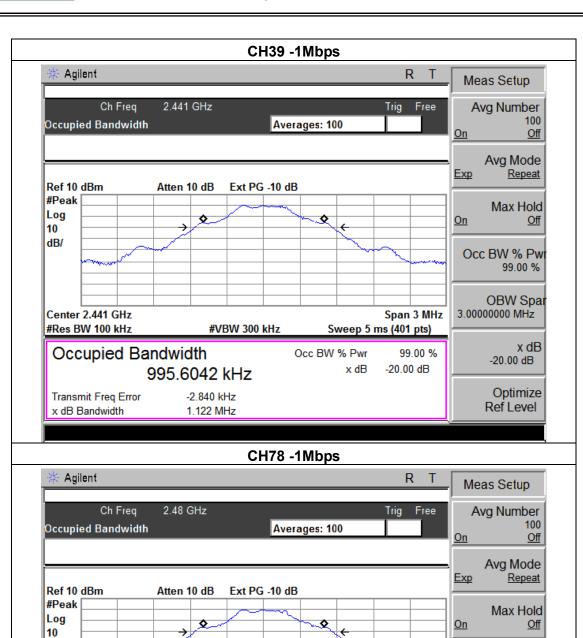

#VBW 300 kHz

994.8003 kHz

-6.386 kHz

1.125 MHz



EUT: Mobile Phone Model Name: MP309

Temperature: 25 °C Relative Humidity: 60%

Pressure: 1012 hPa Test Voltage: DC 3.7V

Test Mode: CH00 / CH39 /C78(2Mbps)

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.304	PASS
2441 MHz	1.314	PASS
2480 MHz	1.293	PASS





Center 2.48 GHz

#Res BW 100 kHz

Transmit Freq Error

x dB Bandwidth

Occupied Bandwidth

Report No.: NTS1408150273R2

Span 3 MHz

99.00 %

-20.00 dB

x dB

-20.00 dB


Optimize

Ref Level

Sweep 5 ms (401 pts)

Occ BW % Pwr

x dB

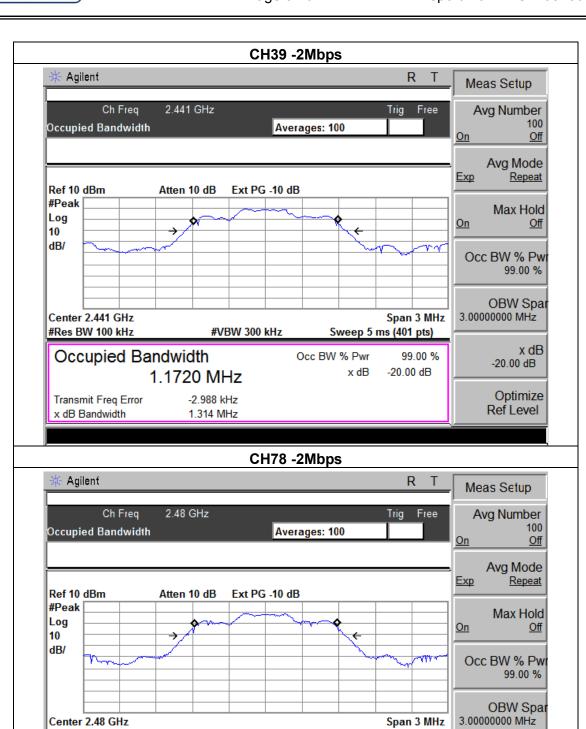

#VBW 300 kHz

1.1513 MHz

7.043 kHz

1.293 MHz



EUT: Mobile Phone Model Name: MP309

Temperature: 25 °C Relative Humidity: 60%


Pressure: 1012 hPa Test Voltage: DC 3.7V


Test Mode: CH00 / CH39 /C78(3Mbps)

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.355	PASS
2441 MHz	1.349	PASS
2480 MHz	1.354	PASS





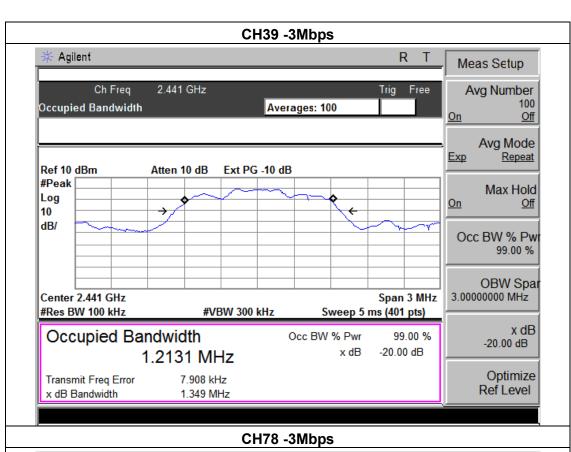

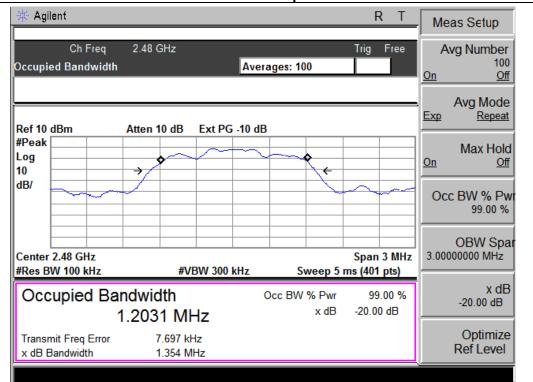



8. PEAK OUTPUT POWER TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section Test Item Limit Frequency Range (MHz) Result		Result		
15.247 (b)(i)	Peak Output Power	0.125 w or 1W	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW > the 20 dB bandwidth of the emission being measured

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.1.5 TEST RESULTS


EUT:	Mobile Phone	Model Name :	MP309
Temperature:	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)		

	1Mbps				
Test Channel	Frequency	Peak Output Power	LIMIT		
Test oname	(MHz)	(dBm)	(dBm)		
CH00	2402	2.329	20.96		
CH39	2441	2.449	20.96		
CH78	2480	3.534	20.96		
	2Mbps				
CH00	2402	3.407	20.96		
CH39	2441	3.613	20.96		
CH78	2480	4.368	20.96		
	3Mbps				
CH00	2402	3.382	20.96		
CH39	2441	3.687	20.96		
CH78	2480	4.564	20.96		

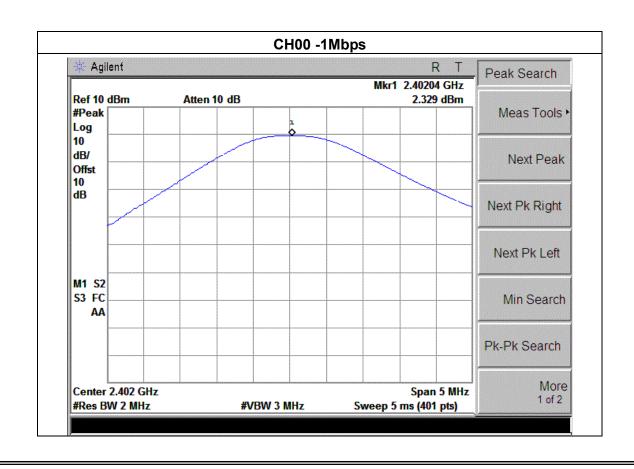




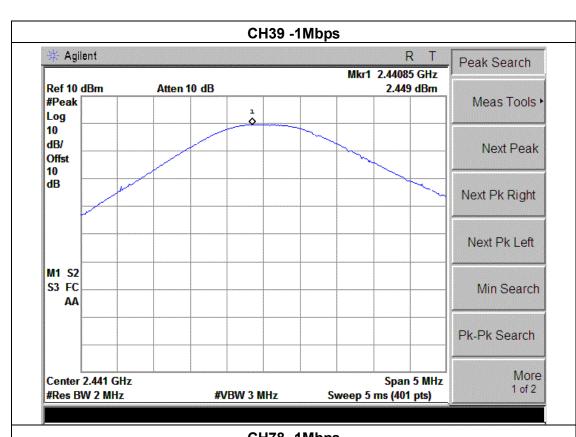

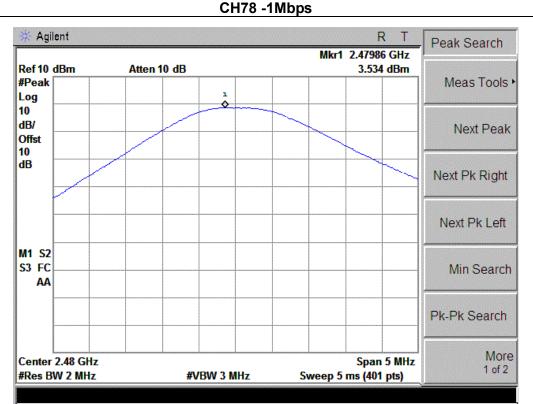





CH00 -2Mbps Agilent R T Peak Search Mkr1 2.40203 GHz Ref 15 dBm Atten 15 dB 3.407 dBm #Peak Meas Tools • Log 10 dB/ Next Peak Offst 10 dΒ Next Pk Right Next Pk Left M1 S2 S3 FC Min Search Pk-Pk Search More Center 2.402 GHz Span 5 MHz 1 of 2 #Res BW 2 MHz **#VBW 3 MHz** Sweep 5 ms (401 pts)

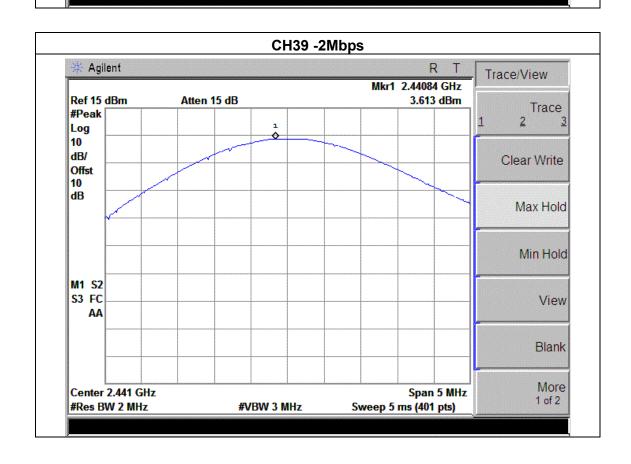





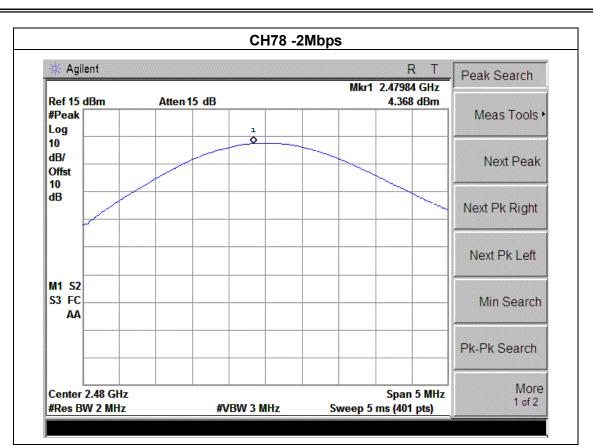

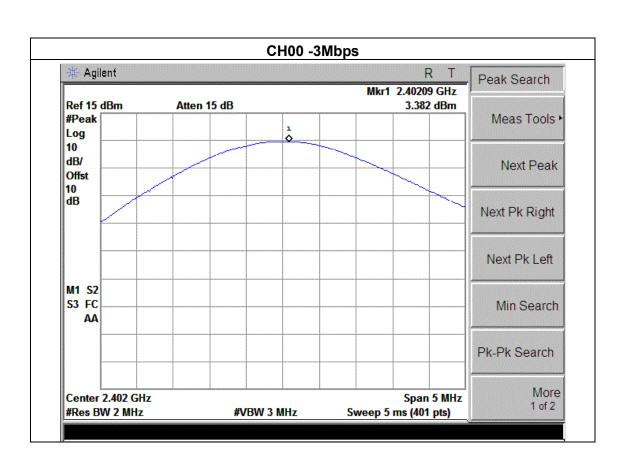



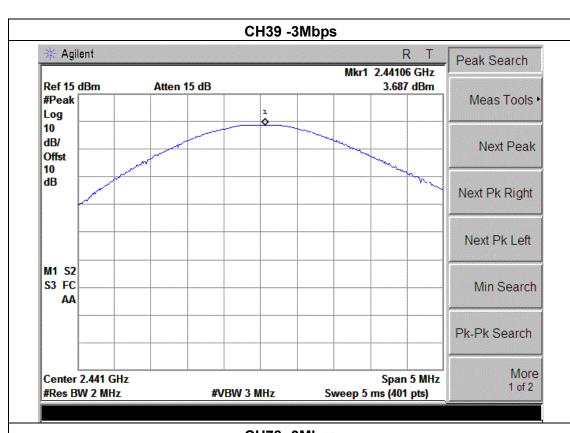

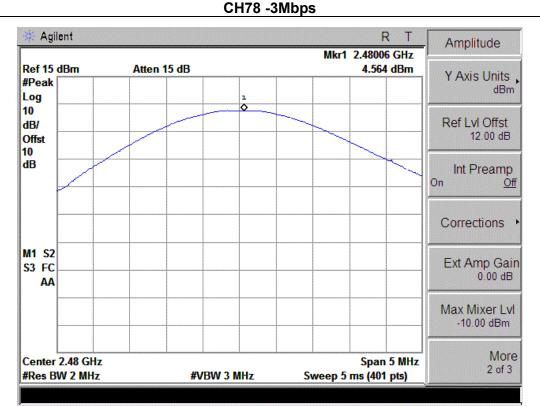



9. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

9.1 DEVIATION FROM STANDARD

No deviation.

9.2 TEST SETUP



9.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



9.4 TEST RESULTS

EUT:	Mobile Phone	Model Name :	MP309
Temperature :	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result						
1Mbps- hopping									
Left-band	42.52	20	Pass						
Right-band	44.03	20	Pass						
1Mbps- non-hopping									
Left-band	49.75	20	Pass						
Right-band	44.64	20	Pass						
2Mbps- hopping									
Left-band	48.38	20	Pass						
Right-band	42.44	20	Pass						
2Mbps- non-hopping									
Left-band	48.12	20	Pass						
Right-band	43.28	20	Pass						
3Mbps- hopping									
Left-band	46.94	20	Pass						
Right-band	41.98	20	Pass						
3Mbps- non-hopping									
Left-band	47.47	20	Pass						
Right-band	41.32	20	Pass						




Frequency Meter Reading Factor **Emission Level** Limits Margin Detector Comment Type (MHz) (dBµV) (dB) $(dB\mu V/m)$ $(dB\mu V/m)$ (dB) 1Mbps 45.42 2390 58.48 -13.06 74 -28.58 peak Vertical 2390 -13.06 46.32 74 -27.68 Horizontal 59.38 peak Vertical 2483.5 59.43 -12.78 46.65 74 -27.35 peak 2483.5 58.66 -12.78 45.88 74 -28.12 Horizontal peak 2Mbps 2390 57.76 -13.06 47.70 74 -29.30 peak Vertical -13.06 44.23 74 Horizontal 2390 57.29 -29.77 peak 74 2483.5 56.51 -12.78 43.73 -30.27 Vertical peak 2483.5 57.43 -12.78 44.65 74 -29.35 peak Horizontal 3Mbps 2390 55.94 -13.06 42.88 74 -31.12 Vertical peak 74 2390 54.97 -13.06 41.91 -32.09Horizontal peak 2483.5 54.36 -12.78 41.58 74 -32.42 peak Vertical 2483.5 55.38 -12.78 42.60 74 -31.40 Horizontal peak

Note: Test method to see chapter 3.2.




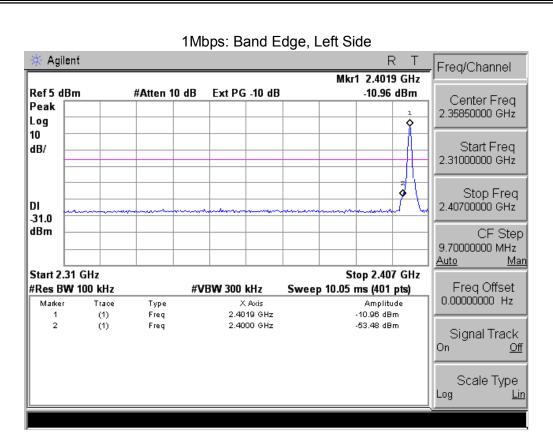

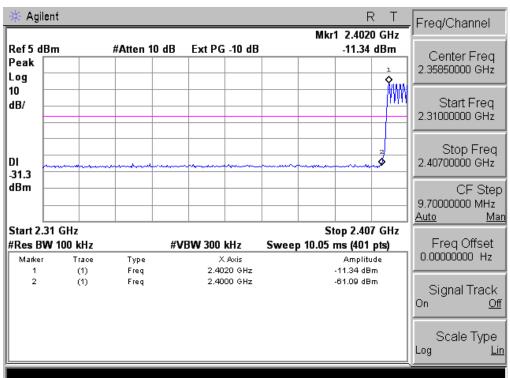





1Mbps: Band Edge, Right Side Agilent Freq/Channel Mkr1 2.47981 GHz Ref 5 dBm #Atten 10 dB Ext PG -10 dB -18.84 dBm Center Freq Peak 2.48750000 GHz Log 10 Start Freq dB/ 2.47500000 GHz Stop Freq DI 2.50000000 GHz ٥ -38.8 dBm CF Step 2.50000000 MHz <u>Auto</u> <u>Man</u> Start 2.475 GHz Stop 2.5 GHz Freq Offset 0.00000000 Hz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Туре Amplitude Marker Trace X Axis 2.47981 GHz -18.84 dBm (1) Freq 2 (1) Freq 2.48350 GHz -62.87 dBm Signal Track Scale Type

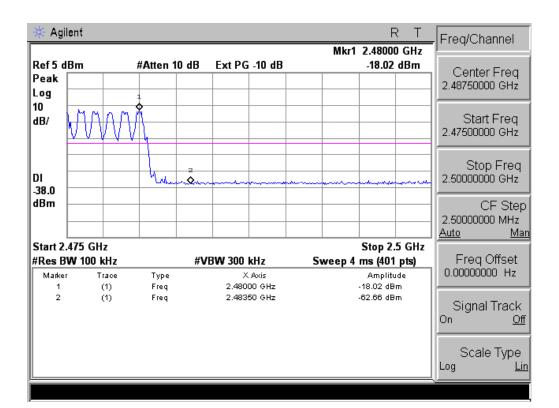




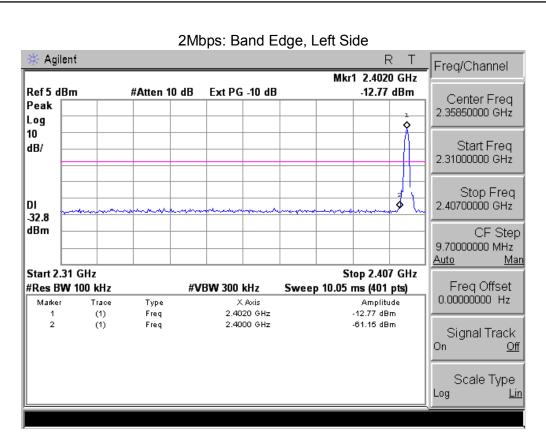


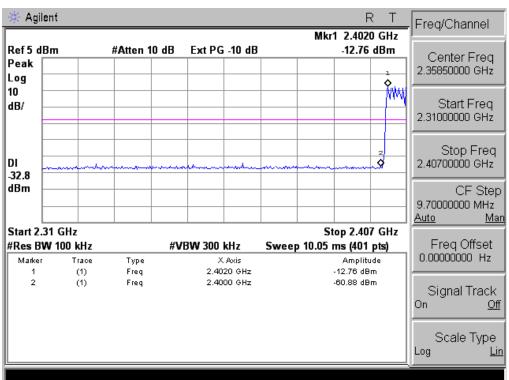




of 77 Report No.: NTS1408150273R2

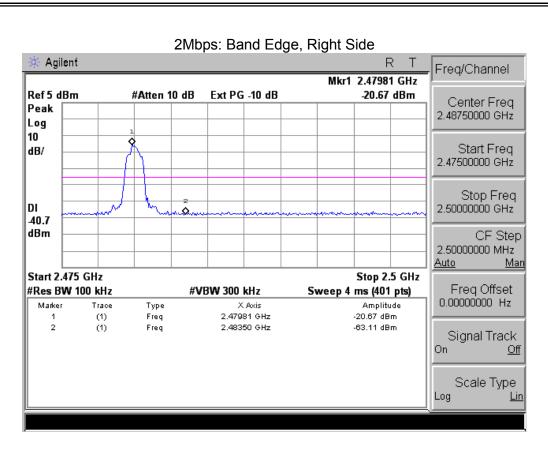

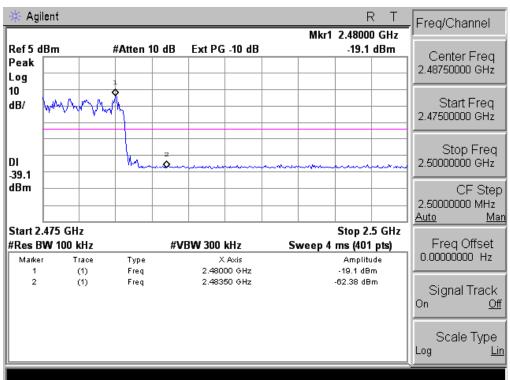




3Mbps: Band Edge, Left Side Agilent Freq/Channel Mkr1 2.4020 GHz Ref 5 dBm #Atten 10 dB Ext PG -10 dB -12.71 dBm Center Freq Peak 2.35850000 GHz Log 10 Start Freq dB/ 2.31000000 GHz Stop Freq 2.40700000 GHz DI -32.7 dBm CF Step 9.70000000 MHz <u>Auto</u> <u>Man</u> Start 2.31 GHz Stop 2.407 GHz #Res BW 100 kHz Freq Offset #VBW 300 kHz Sweep 10.05 ms (401 pts) 0.000000000 Hz Amplitude -12.71 dBm Marker Trace X Axis Туре 2.4020 GHz (1) Freq 2 2.4000 GHz (1) Freq -59.65 dBm Signal Track On <u>Off</u> Scale Type Log <u>Lin</u>

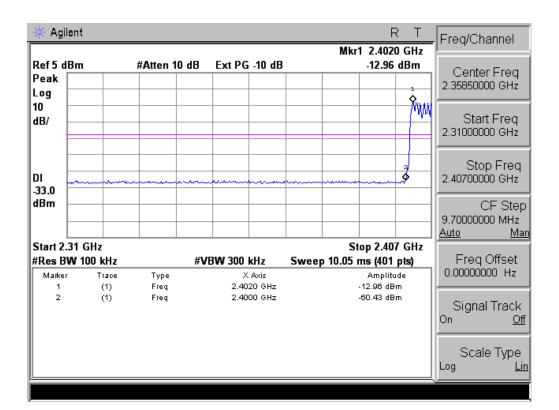



3Mbps: Band Edge, Right Side 🔆 Agilent Freq/Channel Mkr1 2.48013 GHz Ref 5 dBm #Atten 10 dB Ext PG -10 dB -20.54 dBm Center Freq Peak 2.48750000 GHz Log 10 Start Freq dB/ 2.47500000 GHz Stop Freq 2.500000000 GHz DI 40.5 dBm CF Step 2.50000000 MHz <u>Auto</u> <u>Man</u> Start 2.475 GHz Stop 2.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Freq Offset 0.00000000 Hz Marker Trace X Axis Amplitude Type 2.48013 GHz -20.54 dBm (1) Freq 2 2.48350 GHz -62.52 dBm (1) Freq Signal Track <u>Off</u> Scale Type Log <u>Lin</u>

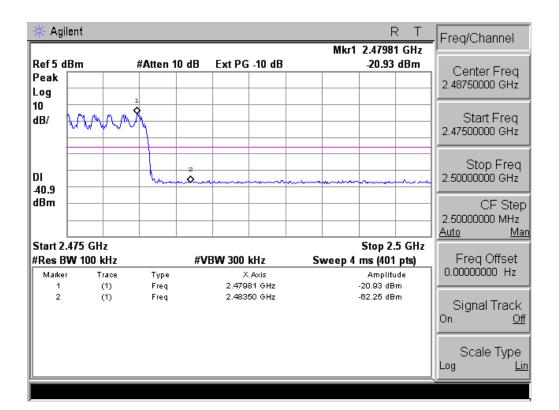



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EU	T an	tenna	is l	Integrat	ted(PCE	i) ar	ntenna.	It con	nply	y with	the	stanc	lard	requ	ıiremen	t.



11. EUT TEST PHOTO





