

FCC Part 15 Subpart C §15.247

Test Report

Equipment Under Test	RECOmanager
Model Name	RECOmanager
Applicant	Perples, Inc.
FCC ID	2AD2GRECOMANAGER
Manufacturer	Perples, Inc.
Date of Test(s)	2015. 05. 08 ~ 2015. 05. 21
Date of Issue	2015. 05. 22

In the configuration tested, the EUT complied with the standards specified above.

Issue to	Issue by
<p>Perples, Inc. 8F, 209 Dosan-daero, Gangnam-gu Seoul 135-907</p> <p>Tel.: +82-2-2051-8383 Fax: +82-2-6442-2051</p>	<p>MOVON CORPORATION 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 449-812</p> <p>Tel.: +82-31-338-8837 Fax: +82-31-338-8847</p>



Revision history

Revision	Date of issue	Description	Revised by
--	May. 22, 2015	Initial	--

Table of contents

1. GENERAL INFORMATION.....	4
2. EUT DESCRIPTION.....	5
3. MEASUREMENT EQUIPMENT	6
4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS	7
5. CONDUCTED POWER LINE TEST.....	28
6. OUT OF BAND EMISSIONS IN NON-RESTRICTED FREQUENCY BAND	32
7. 6 dB BANDWIDTH	73
8. MAXIMUM OUTPUT POWER MEASUREMENT.....	89
9. POWER SPECTRAL DENSITY MEASUREMENT	93
10. ANTENNA REQUIREMENT	107
11. RF EXPOSURE EVALUATION	108

1. General information

1.1. Details of applicant

Applicant : Perples, Inc.
Address : 8F, 209 Dosan-daero, Gangnam-gu Seoul 135-907
Contact Person : Seonggwan Lee
Telephone : +82-2-2051-8383
Fax : +82-2-6442-2051

1.2. Summary of test results

The EUT has been tested according to the following specifications;

Section in FCC part 15	Description	Result
§15.205 §15.209 §15.247(d)	Transmitter radiated spurious emissions, Conducted spurious emission	C
§15.109(a)	Receiver radiated spurious emission	C
§15.107	Conducted power line test	C
§15.247(a)(2)	6 dB Bandwidth	C
§15.247(b)(e)	Maximum Peak Output Power	C
§15.247(e)	Transmitter Power Spectral Density	C
§1.1307(b)(1)	RF exposure evaluation	C

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2009

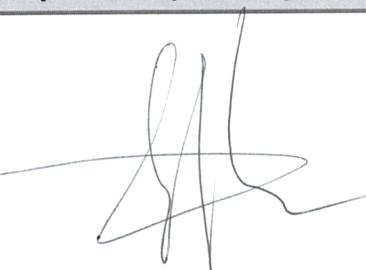
FCC Public Notice KDB 558074 D01 v03r02

TEST SITE REGISTRATION NUMBER: FCC(670686), FCC(273444)

※ Abbreviation

C Complied
N/A Not applicable
F Fail

Approval Signatories

Test and Report Completed by :	Report Approval by :
	
Kin Son Test Engineer MOVON CORPORATION	Issac Jin Technical Manager MOVON CORPORATION

2. EUT Description

Kind of product	RECOmanager
FCC ID	2AD2GRECOMANAGER
Model Name	RECOmanager
Serial Number	N/A
Power supply	AC 220V
Frequency range	2 412 MHz ~ 2 462 MHz (802.11b/g/n20) 2 422 MHz ~ 2 452 MHz (802.11n40) 2 402 MHz ~ 2 480 MHz (BLE)
Modulation technique	DSSS (802.11b) OFDM (802.11g/n20/n40) GFSK (BLE)
Number of channels	11 (802.11b/g/n20) 7(802.11n40) 40(BLE)
RF Input Output port type	Wifi : 2x2 MIMO (2tx / 2rx) BLE : 2 port
Antenna gain	Wifi : 2.4 dB i (Max.) BT : 4.75 dB i (Max.)
Test Site Registration Number	FCC(670686), FCC(273444)

2.1. Declarations by the manufacturer

None

2.2. Details of modification

None

2.3. Table for Test Modes (WLAN)

Preliminary tests were performed in different data rate to find the worst radiated emission.

The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Mode	Data rate (Worst case)	Channel No. (Freq. MHz)
802.11b	11 Mbps	01 (2 412) / 05 (2 432) / 11 (2 462)
802.11g	54 Mbps	01 (2 412) / 05 (2 432) / 11 (2 462)
802.11n_20	MCS15	01 (2 412) / 05 (2 432) / 11 (2 462)
802.11n_40	MCS15	03 (2 422) / 05 (2 432) / 09 (2 452)

3. Measurement equipment

Equipment	Manufacturer	Model	Serial number	Calibration Interval	Calibration due.
EMI Test Receiver	R&S	ESU26	100196/026	1 year	2015-12-22
Signal Generator	R&S	SMBV100	257379	1 year	2015-09-29
Spectrum Analyzer	R&S	FSV-40	100832	1 year	2015-08-13
Power Meter	Agilent	E4416A	GB41290645	1 year	2015-09-29
Power Sensor	Agilent	9327A	US40441490	1 year	2015-07-09
Double Ridge Horn Antenna	R&S	HF906	100236	2 year	2015-09-04
Horn Antenna	AH Systems	SAS-572	269	2 year	2015-09-06
Double Ridge Horn Antenna	ETS LINDGREN	3116B	133350	2 year	2016-02-26
Bi - Log Antenna	AH Systems	SAS-521-7	128	2 year	2015-10-04
Power Amplifier	MITEQ	AM-1431	1497315	1 year	2015-09-29
Power Amplifier	MITEQ	AFS43-01002600	1374382	1 year	2015-09-29
High Pass Filter	Wainwright	WHK3.0/18G-10SS	508	1 year	2015-09-29
Slidacs		3-5-44	None	1 year	2015-09-29
Controller	INNCO	CO2000	co200/064/6961003/L	N/A	N/A
Antenna Master	INNCO	MA4000	MA4000/038/6961003/L	N/A	N/A
Loop Antenna	ETS LINDGREN	6502	00118166	2 year	2015-09-27
Test Receiver	R&S	ESVD	836108/010	1 year	2016-03-03
LogBicon Antenna	Schwarz Beck	VULB9168	9168-570	1 year	2016-04-17
EMI Test Receiver	R&S	ESCS30	834115/019	1 year	2016-03-03
TWO-LINE V-NETWORK	R&S	ENV216	101408	1 year	2015-10-01
LISN	EMCO	3825/2	9010	1 year	2016-03-03

Remark;
Support equipment

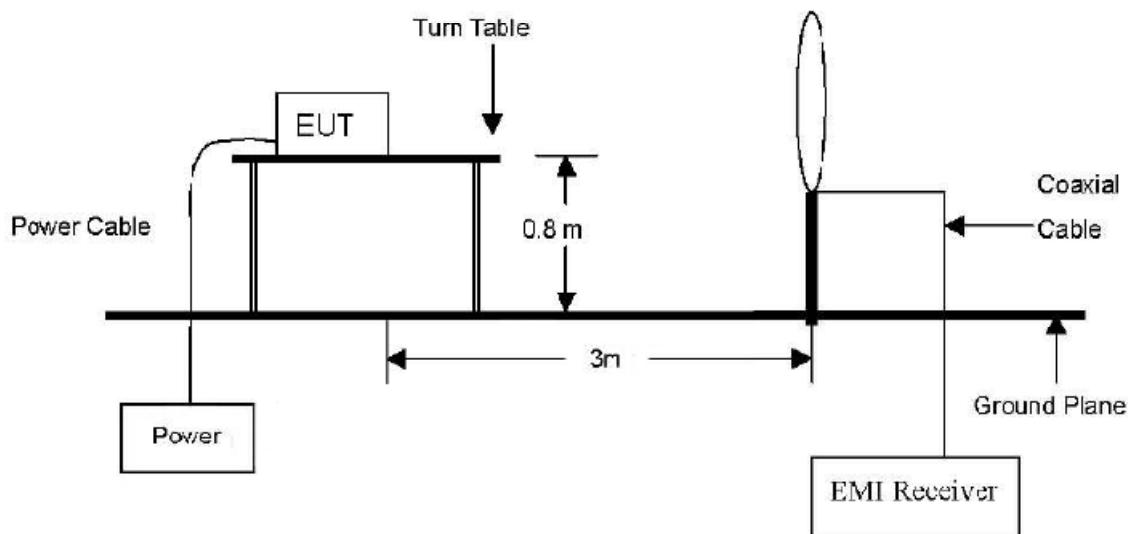
Description	Manufacturer	Model	Serial number
NOTEBOOK	DELL	Latitude E5440	8HCMN12

4. Transmitter radiated spurious emissions and conducted spurious emissions

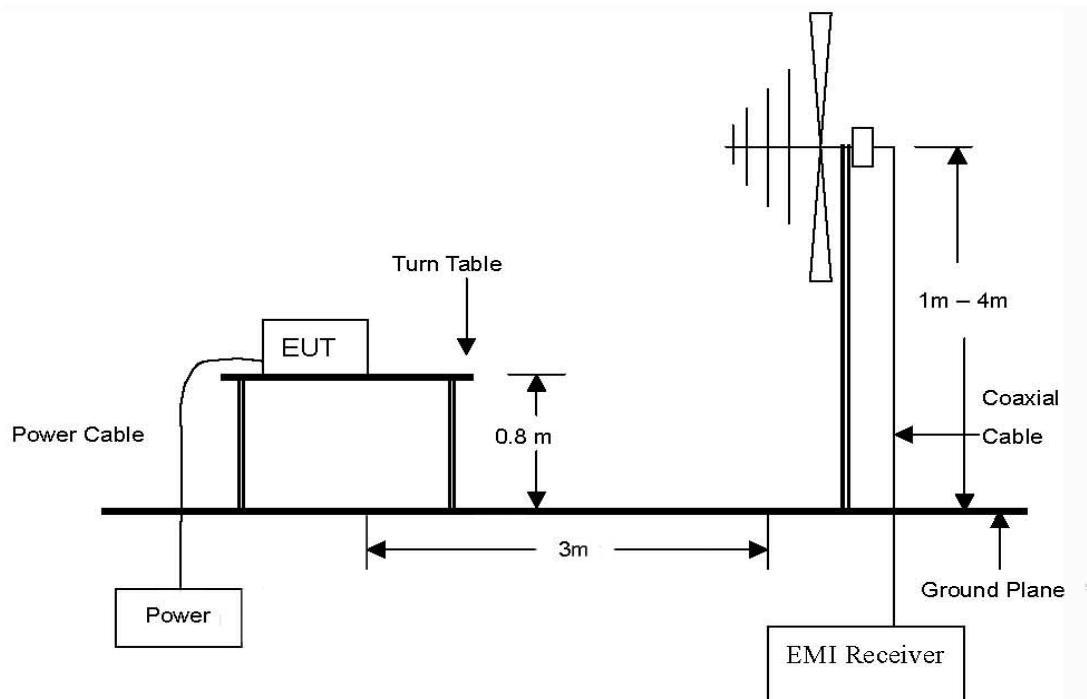
4.1. Test setup

4.1.1. Transmitter radiated spurious emissions

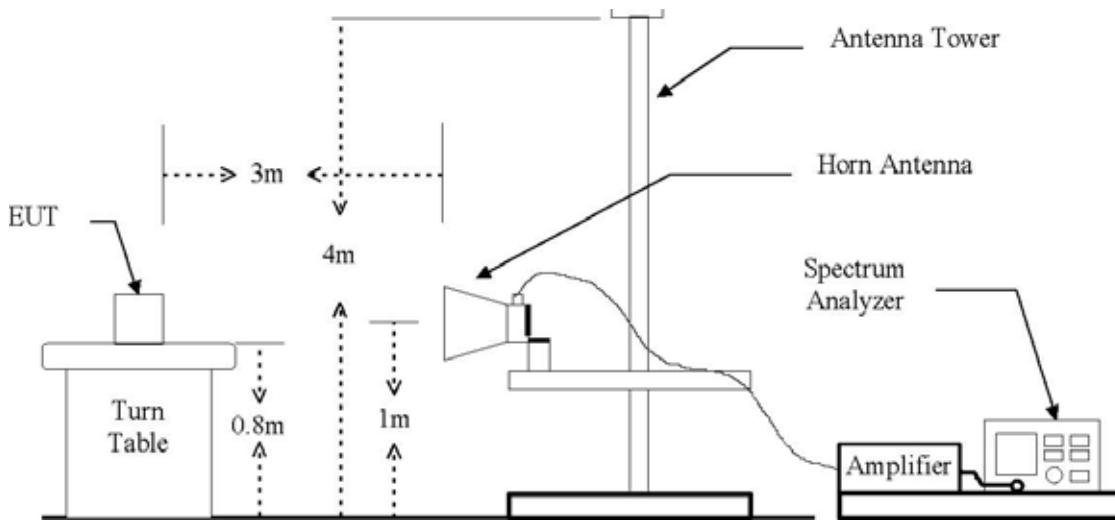
The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.



The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.



4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based in either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section §15.209(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to §15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Distance (Meters)	Radiated at 3M (dB μ V/m)	Radiated (μ V/m)
0.009–0.490	300	See the remark	2400/F(kHz)
0.490–1.705	30		24000/F(kHz)
1.705–30.0	30		30
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

According to §15.205(a), Except as provided elsewhere in this Subpart, the emissions from Restricted bands of operation shall not exceed the field strength levels specified in the following table:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.694 75 – 16.695 25	608 – 614	5.35 – 5.46
2.173 5 – 2.190 5	16.804 25 -16.804 75	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.177 25 – 4.177 75	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.207 25 – 4.207 75	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.267 75 – 6.268 25	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.311 75 – 6.312 25	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
9.362 – 8.366	156.524 75 – 156.525 25	2483.5 – 2500	17.7 – 21.4
8.376 25 – 8.386 75	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.414 25 – 8.414 75	162.012 5 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 - 3339	31.2 – 31.8
12.519 75 – 12.520 25	240 – 285	3345.8 – 3358	36.43 – 36.5
12.576 75 – 12.577 25	322 -335.4	3600 – 4400	
13.36 – 13.41			

***Remark**

1. Emission level in dB uV/m = $20 \log (\mu\text{V}/\text{m})$
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB)
Limit line=Specific limits(dB uV) + distance extrapolation factor.

4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Remark:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

4.3.2. Test procedures for conducted spurious emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 4.4.4. The limit for out of band spurious emission at the band edge is 30 dB below the fundamental emission level measured in a 100 kHz bandwidth.

4.4. Test result

Ambient temperature: 23

Relative humidity: 42 % R.H.

4.4.1. Spurious radiated emission

The frequency spectrum from 9kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode

A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11g mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11n_20MHz mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11n_40MHz mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: BLE mode (Port1)
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: BLE mode (Port2)
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

4.4.2. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	22.51	PK	V	13.36	35.87	40.00	4.13
63.95	21.74	PK	V	12.62	34.36	40.00	5.64
90.14	23.03	PK	V	8.71	31.74	43.50	11.76
321.00	26.04	PK	H	15.45	41.49	46.00	4.51
385.02	27.59	PK	H	17.11	44.70	46.00	1.30
Above 400.00	Not detected	-	-	-	-	-	-

Operation mode: 802.11g mode

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	21.35	PK	V	13.36	34.71	40.00	5.29
63.95	20.77	PK	V	12.62	33.39	40.00	6.61
90.14	22.36	PK	V	8.71	31.07	43.50	12.43
321.00	26.13	PK	H	15.45	41.58	46.00	4.42
385.02	27.55	PK	H	17.11	44.66	46.00	1.34
Above 400.00	Not detected	-	-	-	-	-	-

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11n_20 mode

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	22.05	PK	V	13.36	35.41	40.00	4.59
63.95	21.12	PK	V	12.62	33.74	40.00	6.26
90.14	23.22	PK	V	8.71	31.93	43.50	11.57
321.00	25.58	PK	H	15.45	41.03	46.00	4.97
385.02	27.69	PK	H	17.11	44.80	46.00	1.20
Above 400.00	Not detected	-	-	-	-	-	-

Operation mode: 802.11n_40 mode

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	23.25	PK	V	13.36	36.61	40.00	3.39
63.95	20.05	PK	V	12.62	32.67	40.00	7.33
90.14	23.64	PK	V	8.71	32.35	43.50	11.15
321.00	25.69	PK	H	15.45	41.14	46.00	4.86
385.02	27.54	PK	H	17.11	44.65	46.00	1.35
Above 400.00	Not detected	-	-	-	-	-	-

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: BLE mode (Port1)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	22.56	PK	V	13.36	35.92	40.00	4.08
63.95	20.22	PK	V	12.62	32.84	40.00	7.16
90.14	22.67	PK	V	8.71	31.38	43.50	12.12
321.00	25.69	PK	H	15.45	41.14	46.00	4.86
385.02	27.36	PK	H	17.11	44.47	46.00	1.53
Above 400.00	Not detected	-	-	-	-	-	-

Operation mode: BLE mode (Port2)

Radiated emissions			Ant.	Correction factors	Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. Factor+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
38.73	22.14	PK	V	13.36	35.50	40.00	4.50
63.95	20.05	PK	V	12.62	32.67	40.00	7.33
90.14	22.69	PK	V	8.71	31.40	43.50	12.10
321.00	25.14	PK	H	15.45	40.59	46.00	5.41
385.02	27.29	PK	H	17.11	44.40	46.00	1.60
Above 400.00	Not detected	-	-	-	-	-	-

Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: 802.11b mode

A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 803.96	63.11	Peak	H	33.26	44.10	52.27	74.00	21.73
4 803.96	60.04	Avg	H	33.26	44.10	49.20	54.00	4.80
7 205.95	55.13	Peak	H	35.66	43.05	47.74	74.00	26.26
7 205.95	55.80	Avg	H	35.66	43.05	48.41	54.00	5.59
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 884.17	57.06	Peak	H	33.26	44.10	46.22	74.00	27.78
4 884.17	53.46	Avg	H	33.26	44.10	42.62	54.00	11.38
Above 4 000	Not detected	-	-	-	-	-	-	-

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 944.23	56.52	Peak	H	33.26	44.10	45.68	74.00	28.32
4 944.23	50.71	Avg	H	33.26	44.10	39.87	54.00	14.13
Above 4 000	Not detected	-	-	-	-	-	-	-

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11g mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11n_20 mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: 802.11n_40 mode
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: BLE mode (Port1)
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 803.96	63.22	Peak	H	33.26	44.10	52.38	74.00	21.62
4 803.96	51.25	Avg	H	33.26	44.10	40.41	54.00	13.59
7 205.95	58.97	Peak	H	35.66	43.05	51.58	74.00	22.42
7 205.95	45.90	Avg	H	35.66	43.05	38.51	54.00	15.49
Above 8 000	Not detected		-	-	-	-	-	-

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 879.46	69.53	Peak	H	33.26	44.10	58.69	74.00	15.31
4 879.46	55.99	Avg	H	33.26	44.10	45.15	54.00	8.85
7 319.51	66.48	Peak	H	35.66	43.05	59.09	74.00	14.91
7 319.51	51.88	Avg	H	35.66	43.05	44.49	54.00	9.51
Above 8 000	Not detected		-	-	-	-	-	-

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 960.35	58.06	Peak	H	33.26	44.10	58.69	74.00	15.31
2 144.35	45.32	Avg	H	33.26	44.10	45.15	54.00	8.85
7 440.06	51.34	Peak	H	35.66	43.05	43.95	74.00	30.05
7 440.06	43.31	Avg	H	35.66	43.05	35.92	54.00	18.08
Above 8 000	Not detected		-	-	-	-	-	-

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: BLE mode (Port2)
A. Low channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 803.96	63.23	Peak	H	33.26	44.10	52.39	74.00	21.61
4 803.96	51.28	Avg	H	33.26	44.10	40.44	54.00	13.56
7 205.95	58.99	Peak	H	35.66	43.05	51.60	74.00	22.40
7 205.95	45.36	Avg	H	35.66	43.05	37.97	54.00	16.03
Above 8 000	Not detected	-	-	-	-	-	-	-

B. Middle channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 879.46	69.55	Peak	H	33.26	44.10	58.71	74.00	15.29
4 879.46	55.84	Avg	H	33.26	44.10	45.00	54.00	9.00
7 319.51	66.91	Peak	H	35.66	43.05	59.52	74.00	14.48
7 319.51	51.28	Avg	H	35.66	43.05	43.89	54.00	10.11
Above 8 000	Not detected	-	-	-	-	-	-	-

C. High channel

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4 960.35	58.25	Peak	H	33.26	44.10	47.41	74.00	26.59
2 144.35	45.38	Avg	H	33.26	44.10	34.54	54.00	19.46
7 440.06	51.2	Peak	H	35.66	43.05	43.81	74.00	30.19
7 440.06	43.28	Avg	H	35.66	43.05	35.89	54.00	18.11
Above 8 000	Not detected	-	-	-	-	-	-	-

Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

4.4.4. Band Edge

Operation mode: 802.11b mode

A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Operation mode: 802.11g mode

A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Operation mode: 802.11n_20 mode
A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Operation mode: 802.11g mode
A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Operation mode: BLE mode (Port1)
A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

Operation mode: BLE mode (Port2)
A. 2 310 - 2 390 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

B. 2 483.5 – 2 500 MHz measurement

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

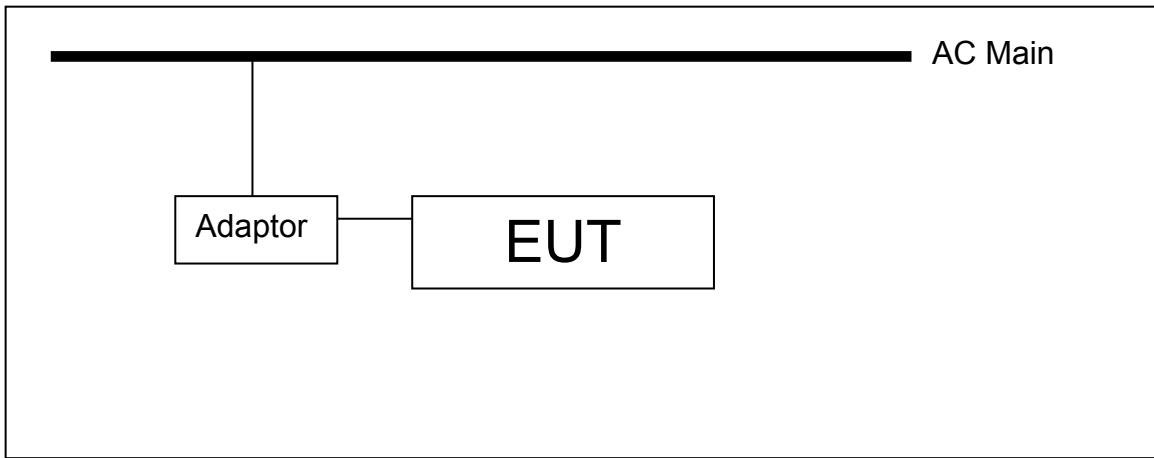
Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5. Conducted power line test

5.1 Test setup



5.2 Limit

According to §15.107(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/ 50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Remark

Decreases with the logarithm of the frequency.

5.3 Test procedures

The test procedure is performed in a 6.5 m × 3.6 m × 3.6 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

5.4 Test results

 Ambient temperature: 23

 Relative humidity: 42 % R.H.

Frequency range: 0.15 MHz ~ 30 MHz

Measured bandwidth: 9 kHz

Freq. (MHz)	Line	Q-Peak		
		Level(dB μ V/m)	Limit(dB μ V/m)	Margin(dB)
0.153	N	55.66	65.84	10.18
0.162	H	54.79	65.38	17.27
0.441	H	39.77	57.04	17.27
0.450	N	39.93	56.88	16.95
0.510	H	31.08	56.00	24.92
24.348	N	35.27	60.00	24.73

Freq. (MHz)	Line	Average		
		Level(dB μ V/m)	Limit(dB μ V/m)	Margin(dB)
0.153	H	44.04	55.84	11.80
0.453	H	38.35	46.82	8.47
0.543	N	30.70	46.82	16.12
1.047	H	23.12	46.00	22.88
2.010	H	25.88	46.00	20.12
24.35	H	30.51	50.00	19.49

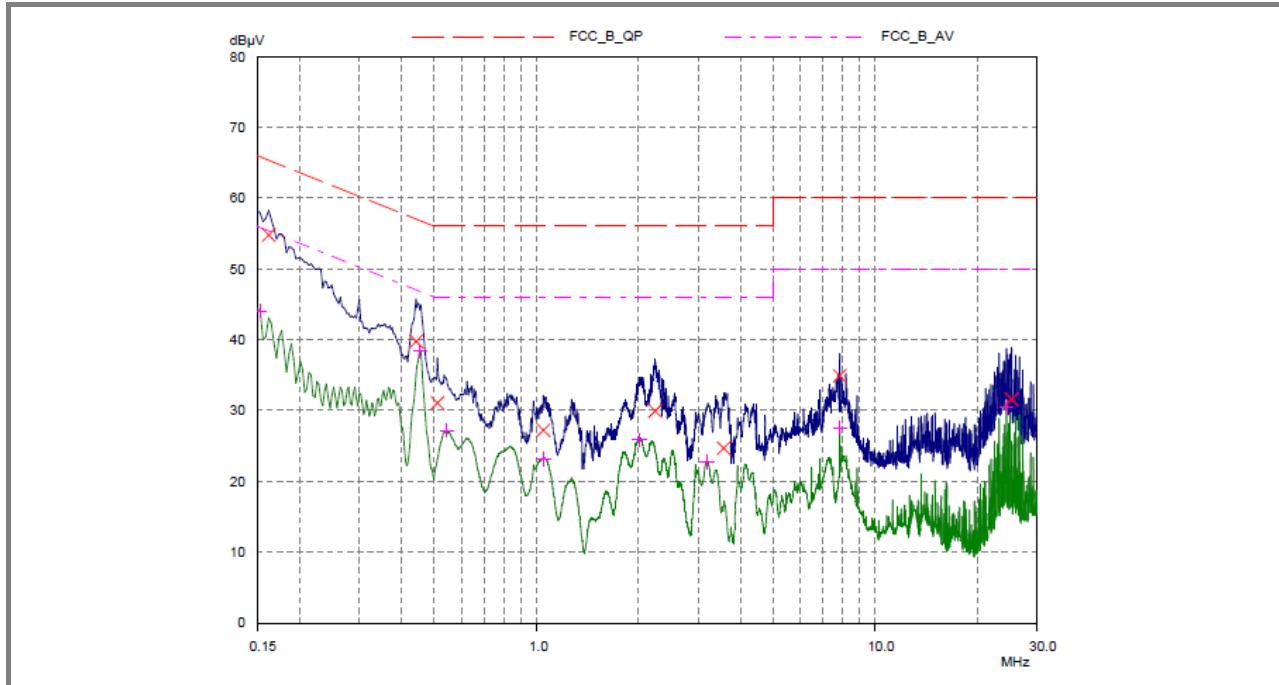
Remark

Line(H): Hot

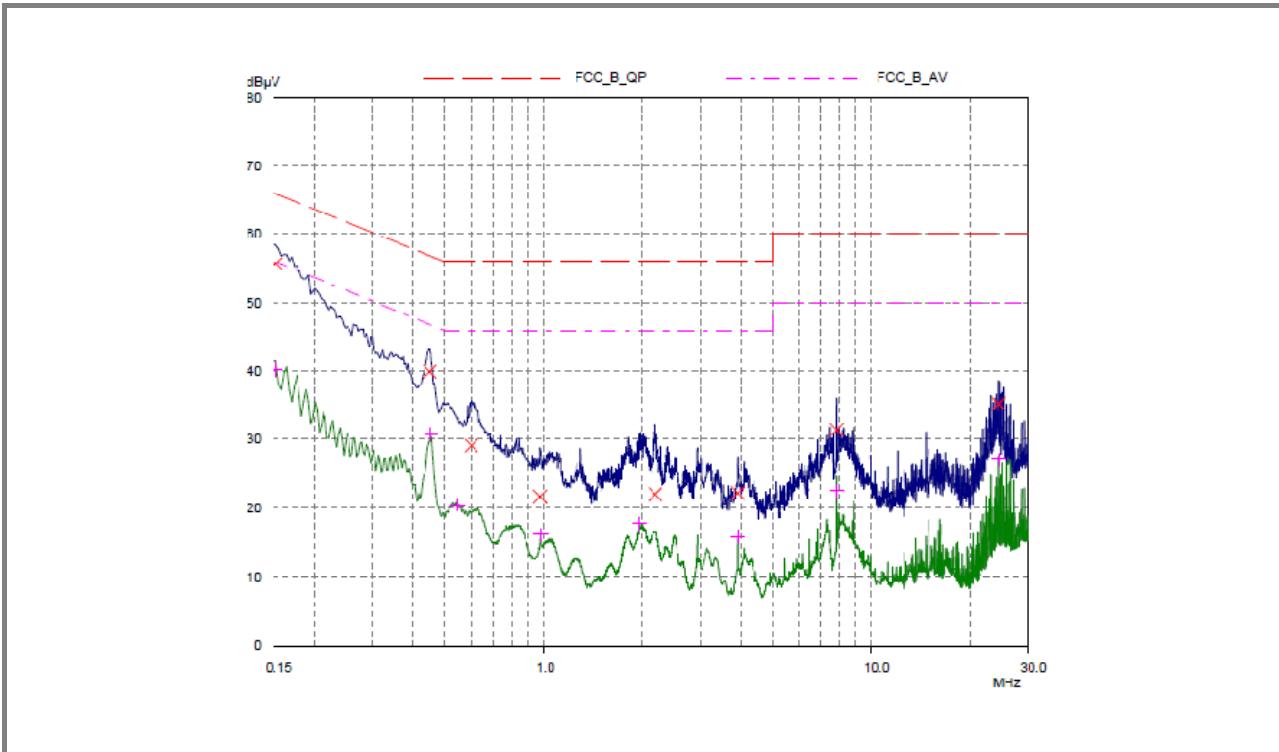
Line(N): Neutral

Plot of conducted power line

Test mode: Hot



Test mode: Neutral



6. *Out of Band Emissions in non-restricted frequency band*

6.1. Test requirements and limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc). If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

6.2. Test procedure

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz (See below note for actual setting)
3. Set the VBW $\geq 3 \times$ RBW (See below note for actual setting)
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow the trace to stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

(Note: This test item was tested with below settings.)

- RBW= 100kHz, VBW= 100kHz for frequency range: 9 kHz ~ 30 MHz
- RBW= 1MHz, VBW= 1MHz for frequency range: 30 MHz ~26.5 GHz

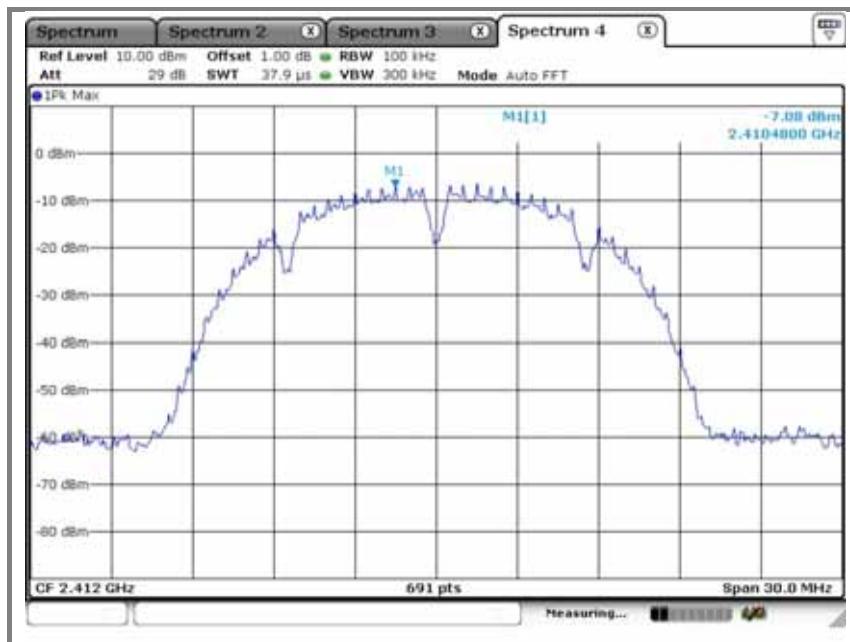
If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 100 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

6.3. Test results : **Comply** (refer to Next page – test plots)

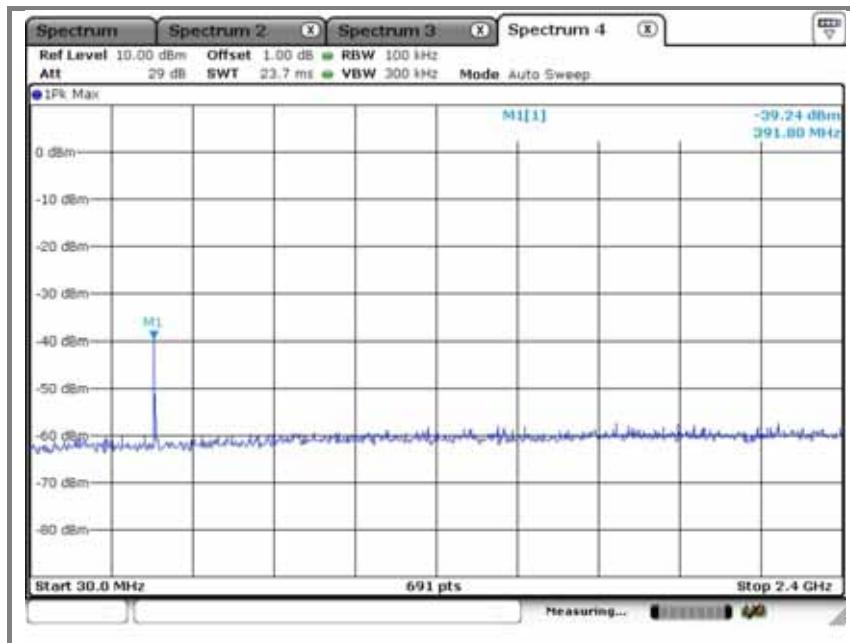
Operation mode: 802.11b mode (Ant 1)

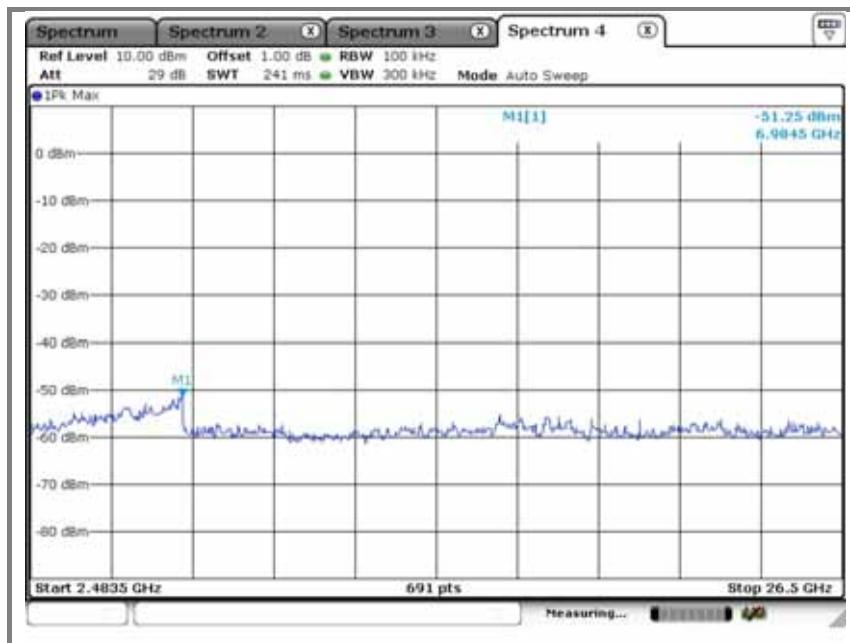
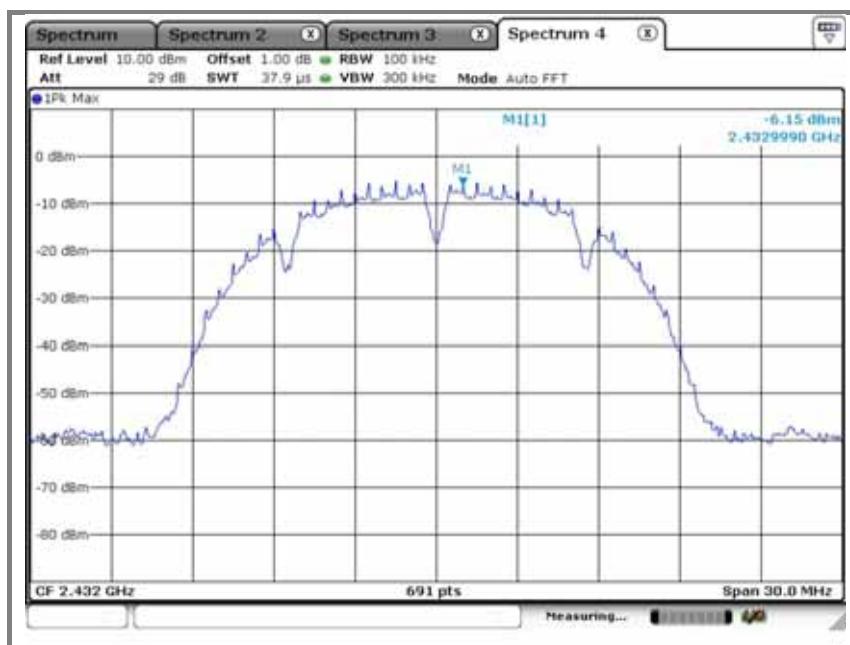
A. Low channel

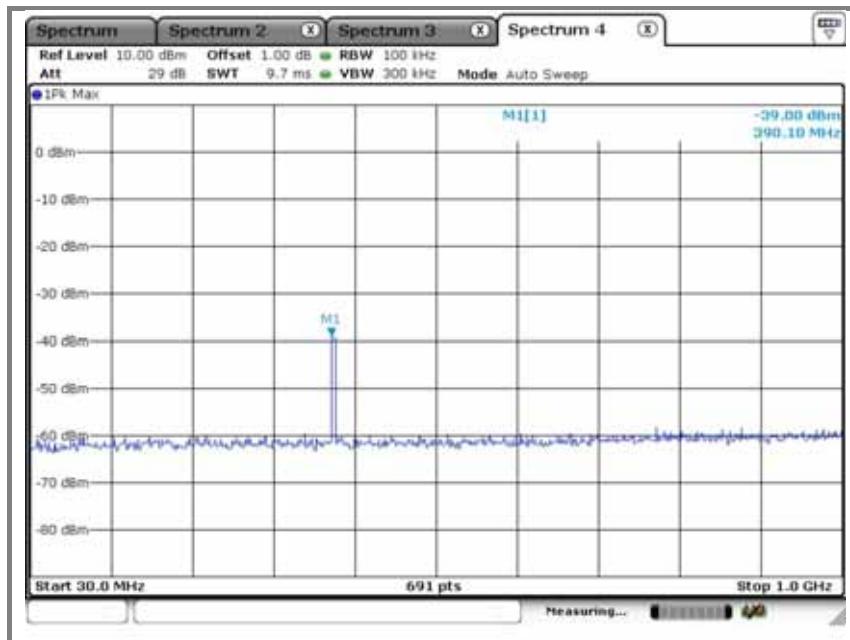
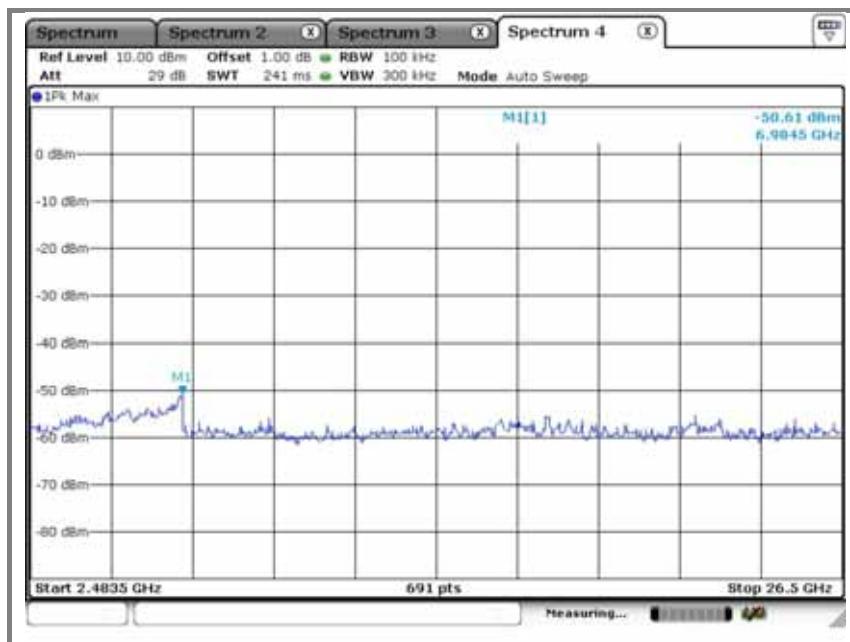
Reference level measurement

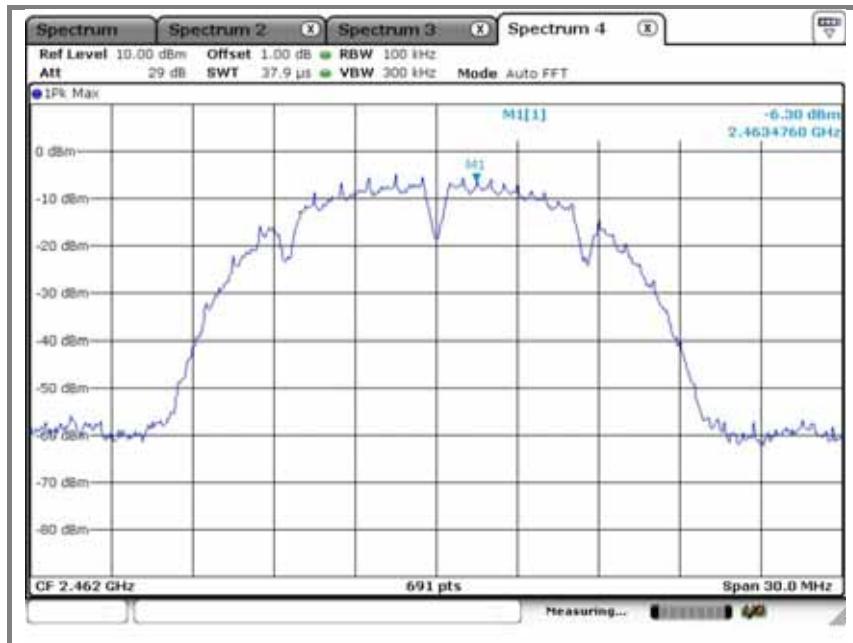
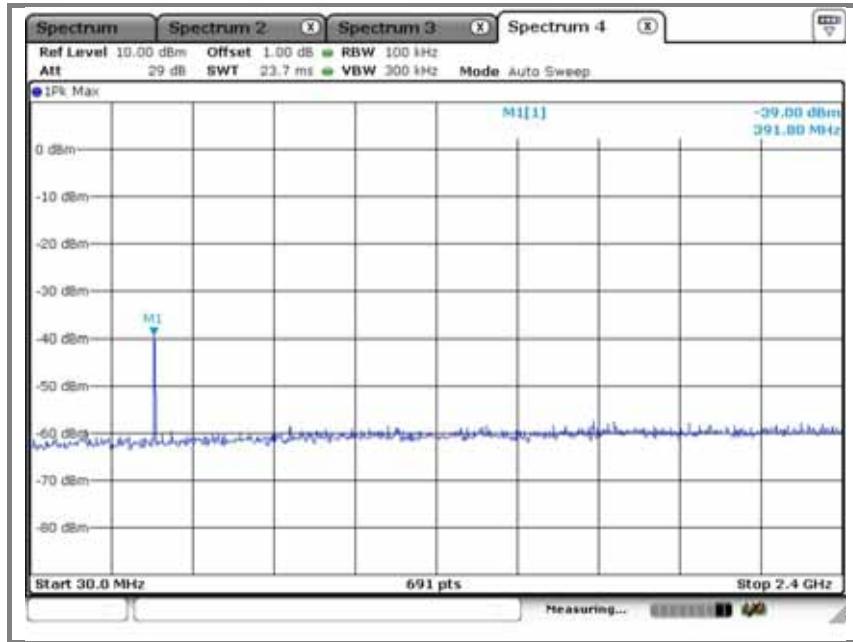


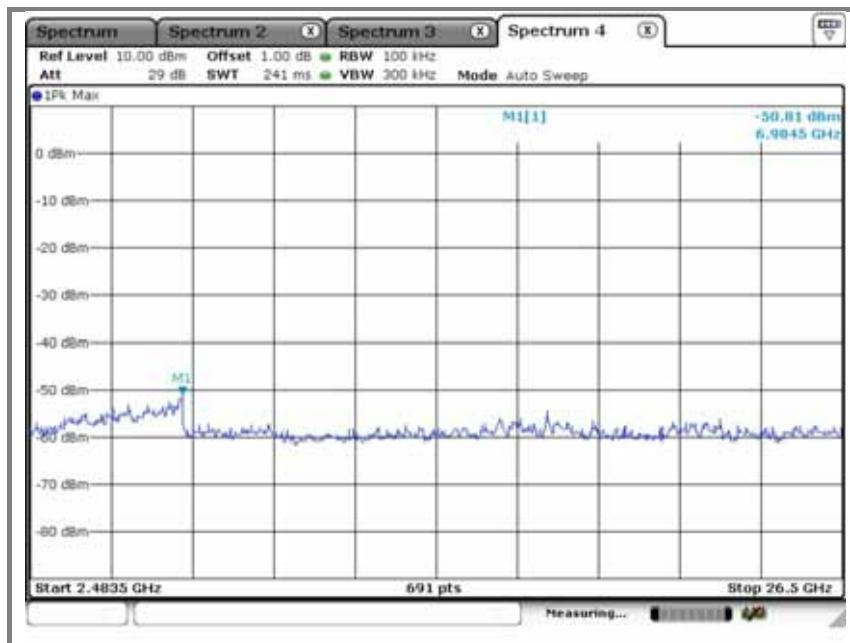
Emission level measurement 1

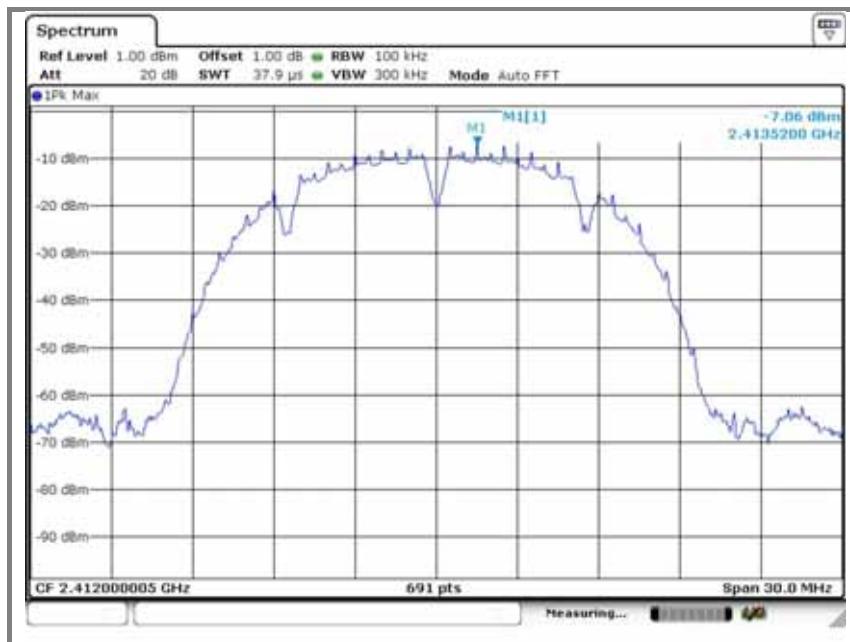
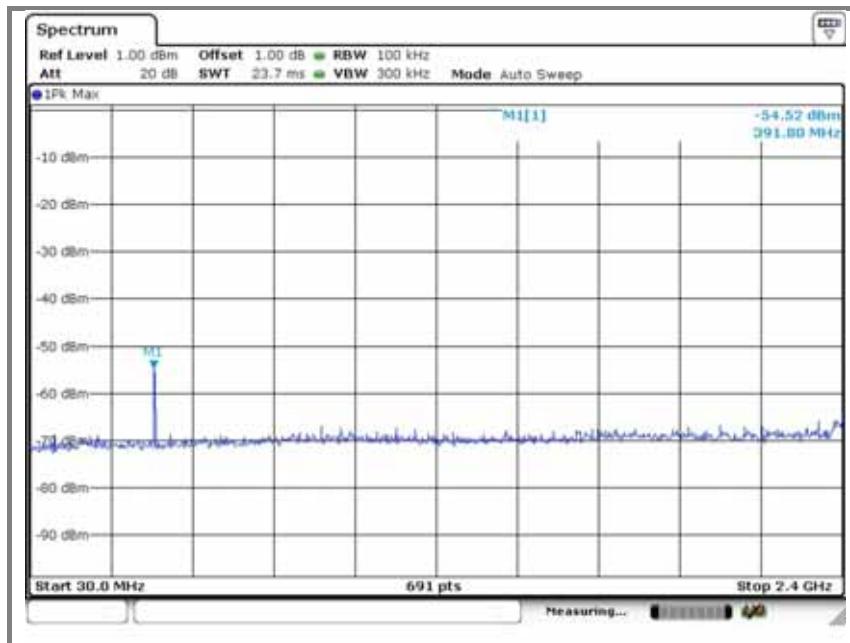


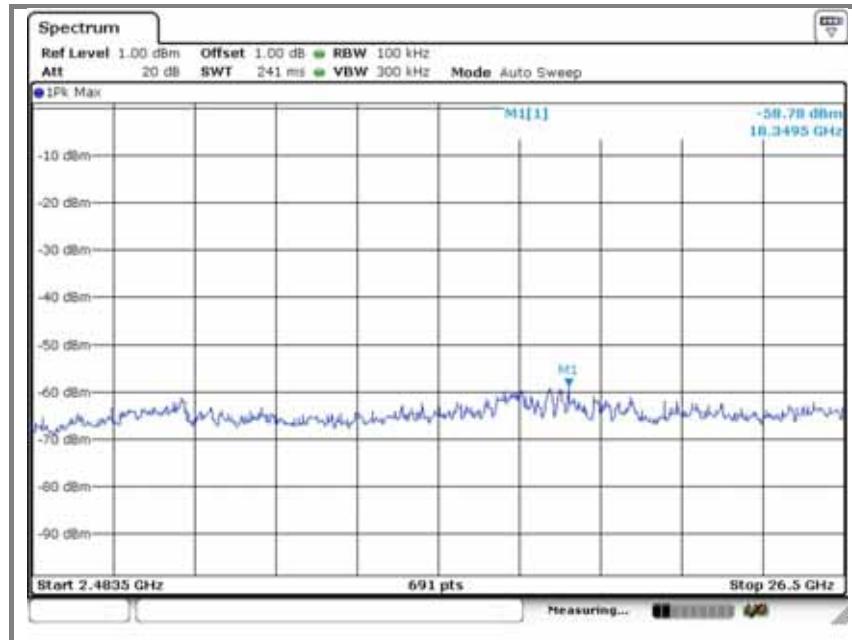
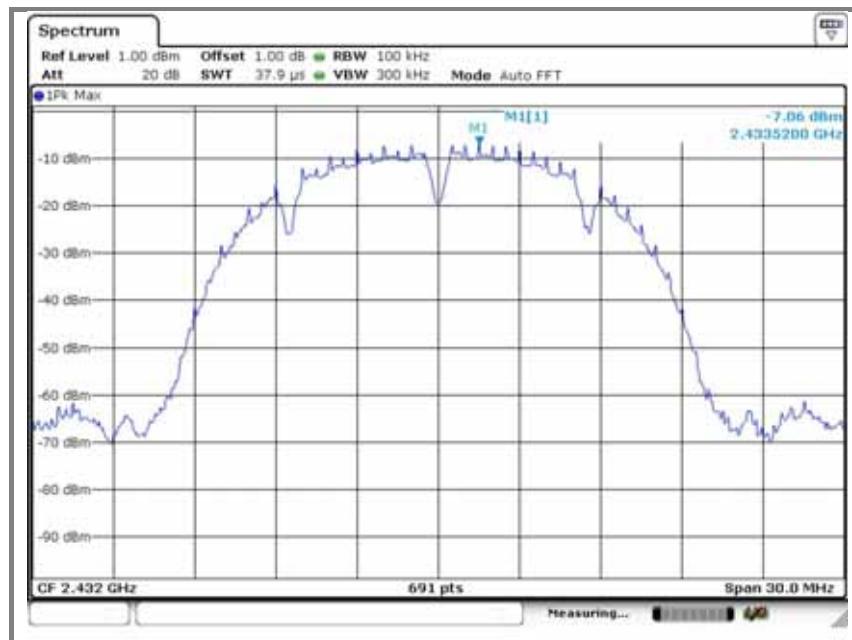
Emission level measurement 2**B. Middle channel**
Reference level measurement

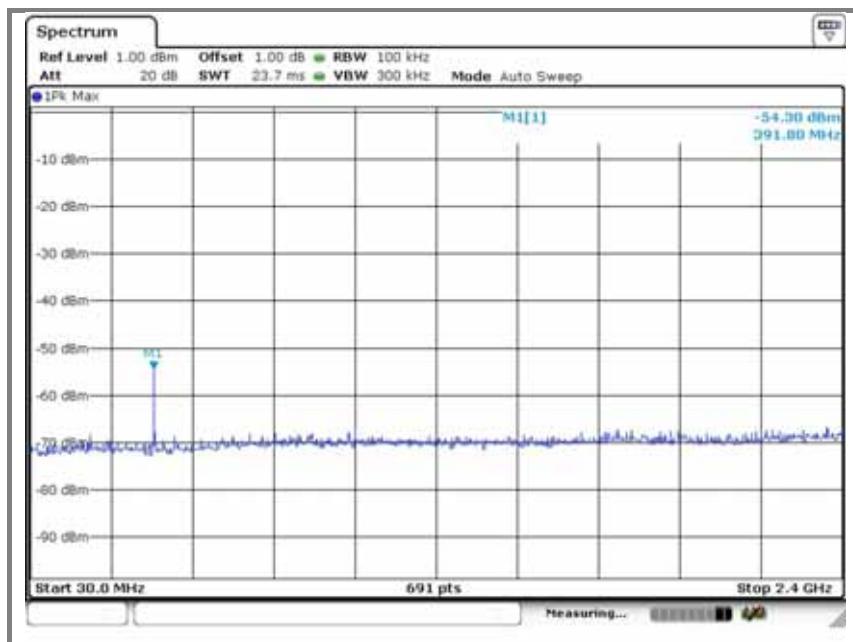
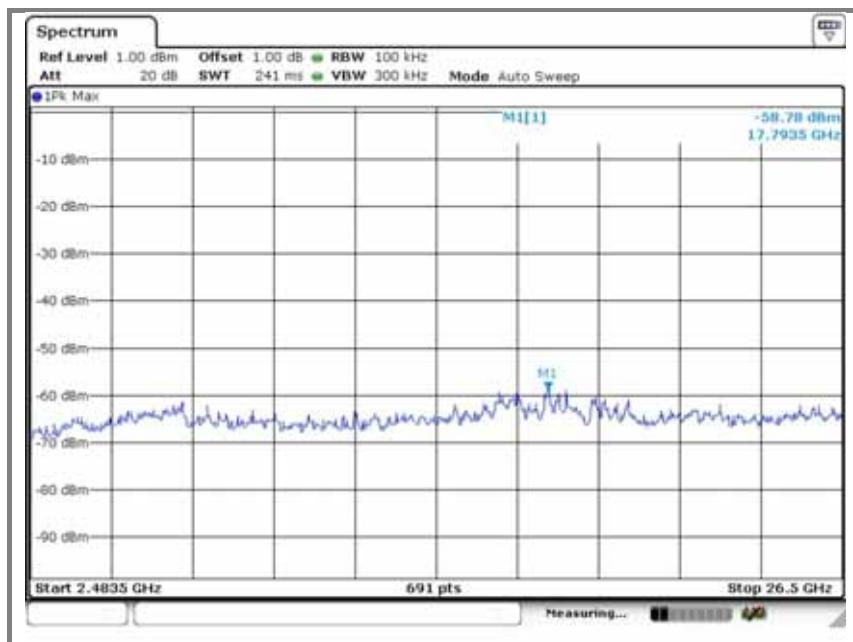
Emission level measurement 1**Emission level measurement 2**

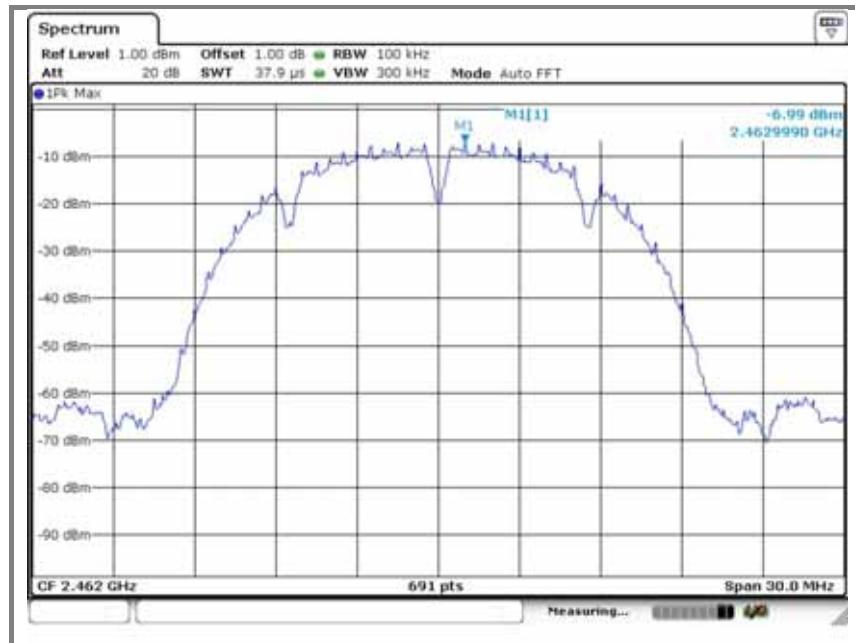
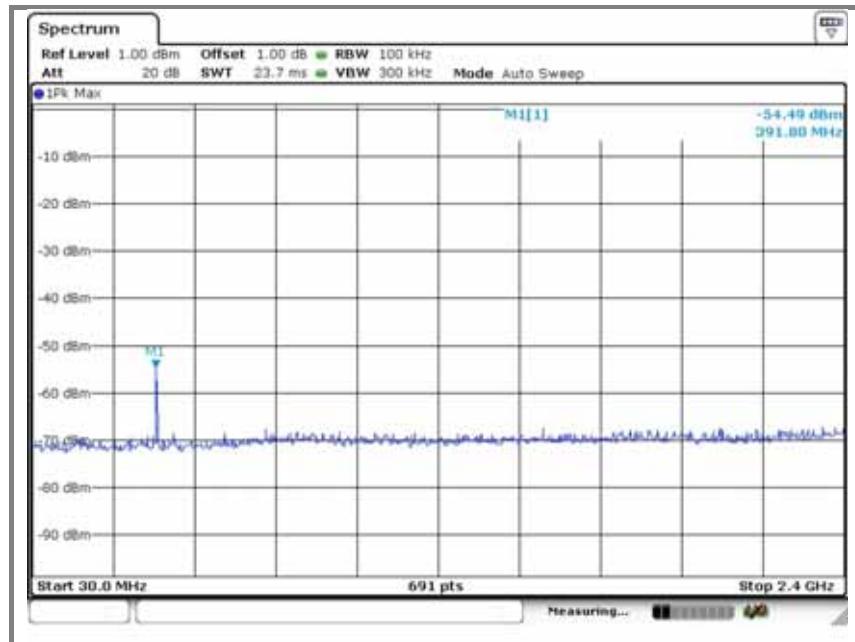
C. High channel**Reference level measurement****Emission level measurement 1**

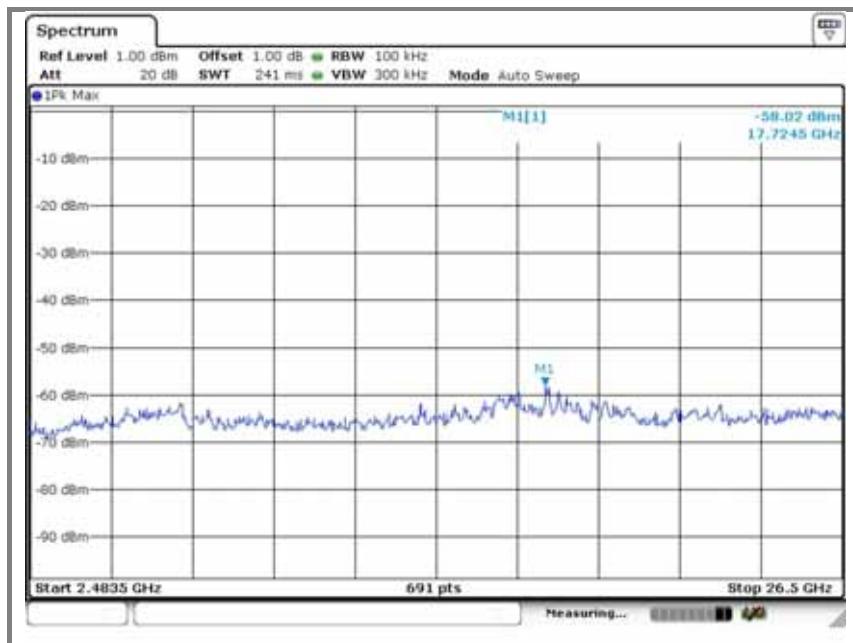
Emission level measurement 2

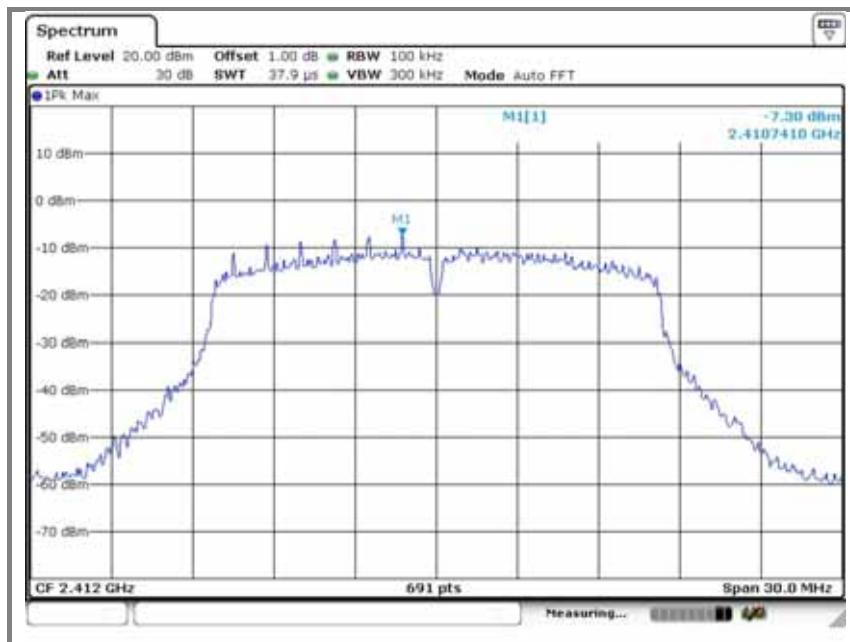
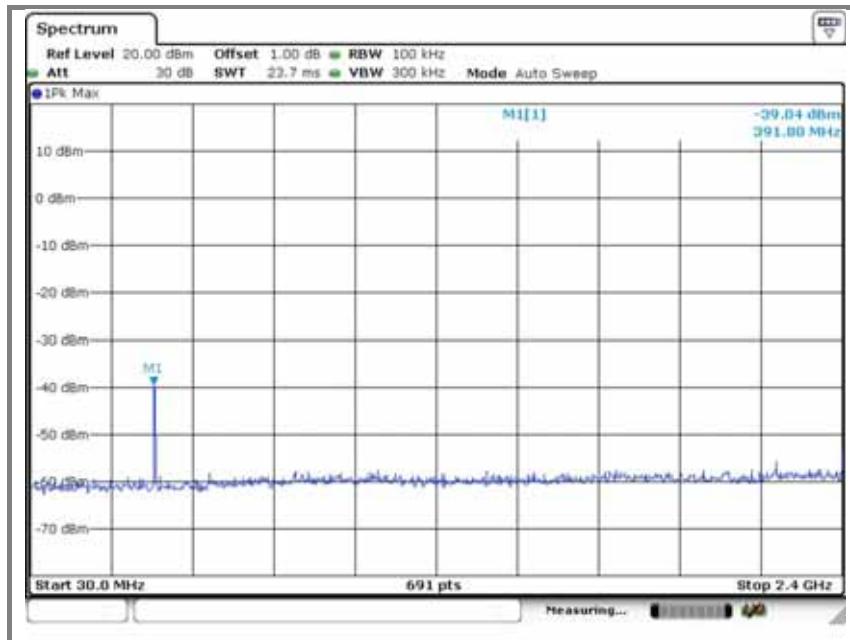
Operation mode: 802.11b mode (Ant 2)**A. Low channel****Reference level measurement****Emission level measurement 1**

Emission level measurement 2**B. Middle channel****Reference level measurement**

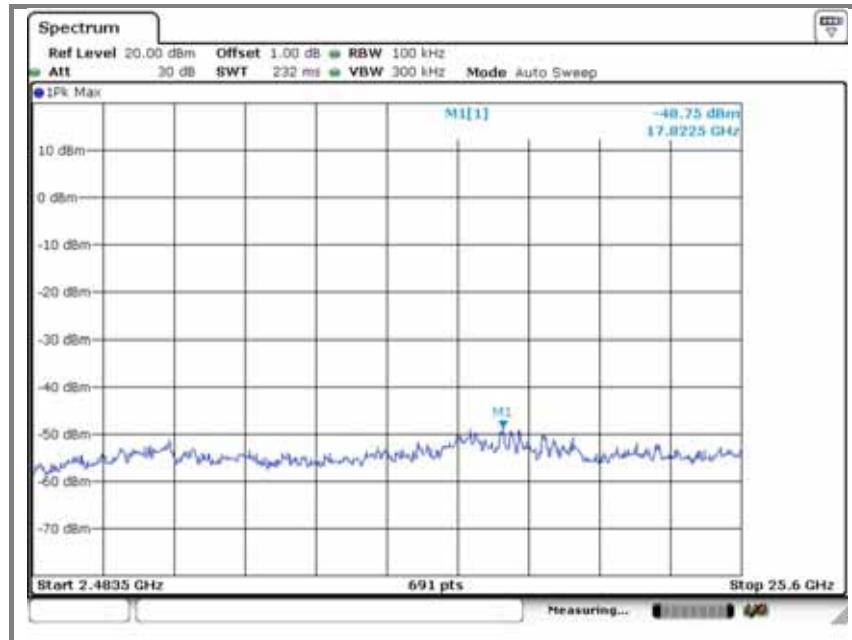
Emission level measurement 1**Emission level measurement 2**

C. High channel**Reference level measurement****Emission level measurement 1**

Emission level measurement 2

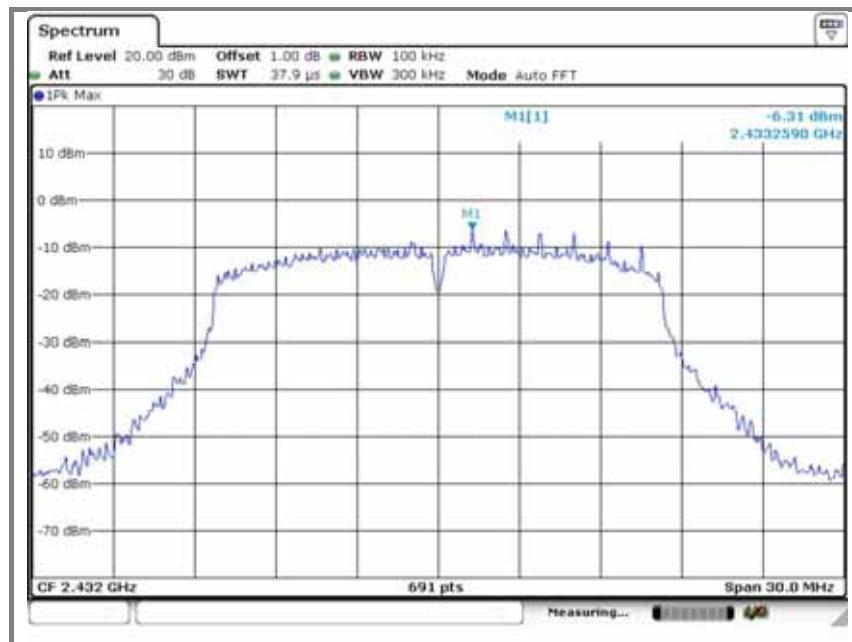
Operation mode: 802.11g mode (Ant 1)**A. Low channel****Reference level measurement****Emission level measurement 1**

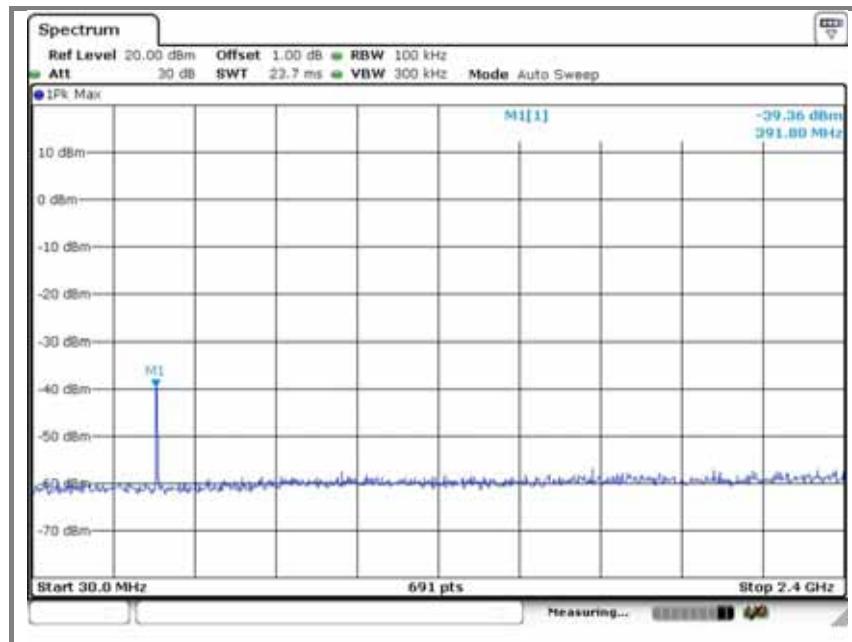
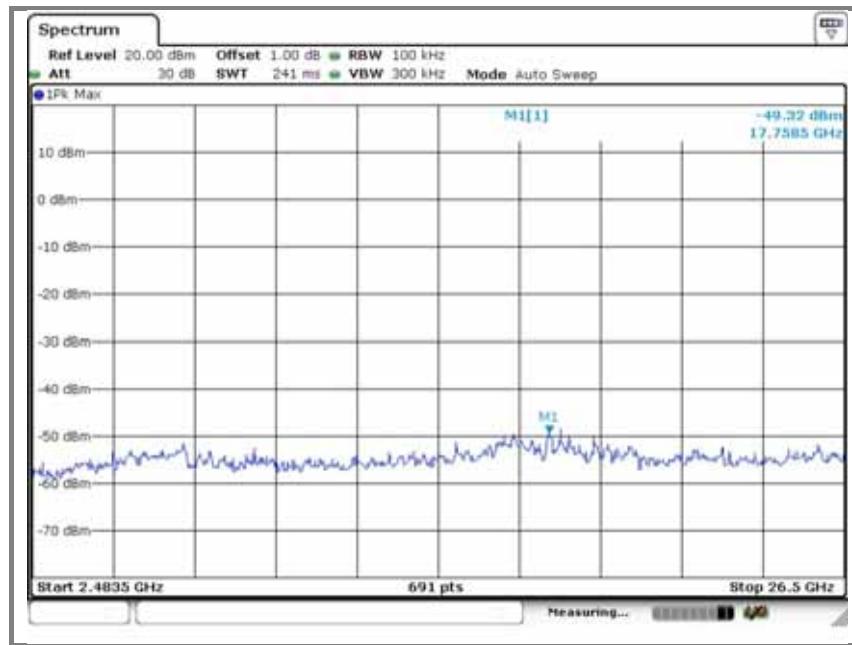
Emission level measurement 2

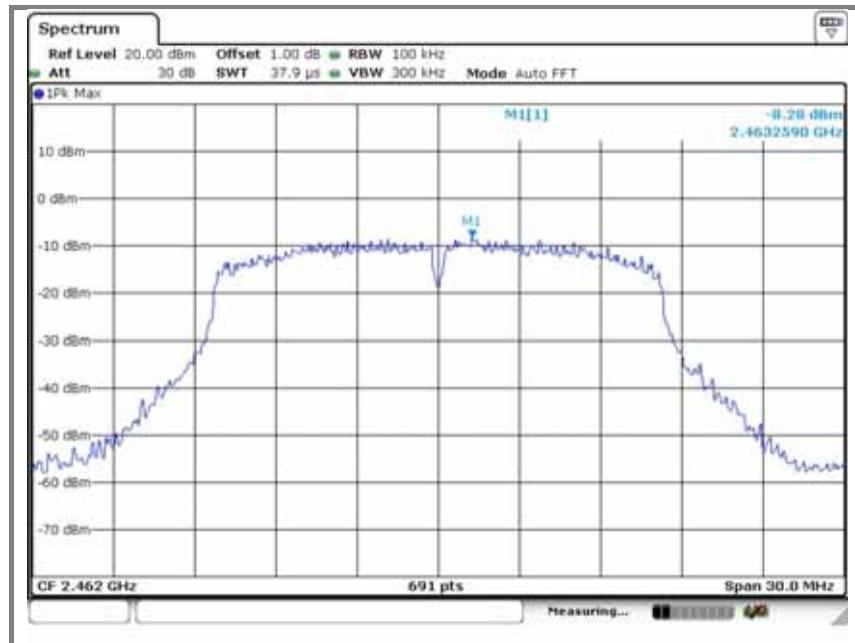
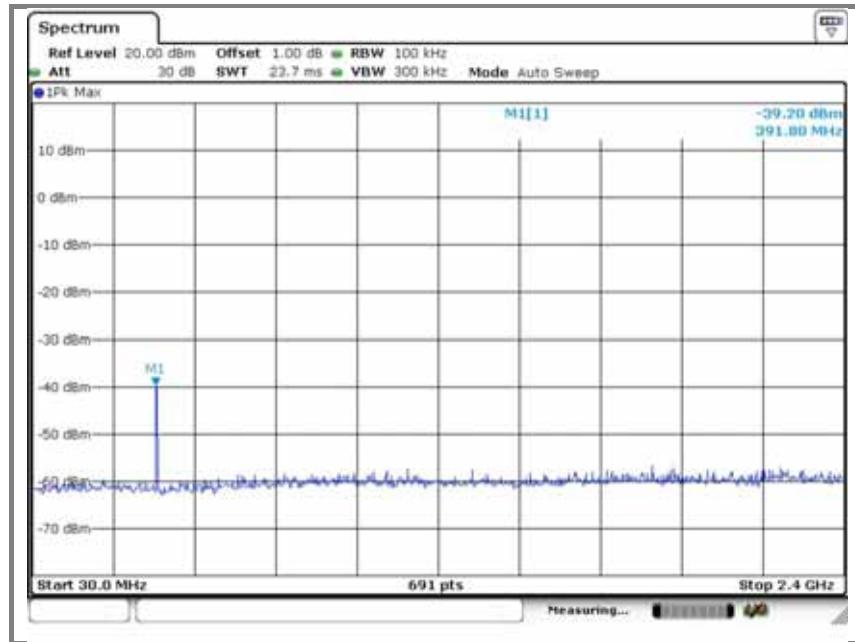


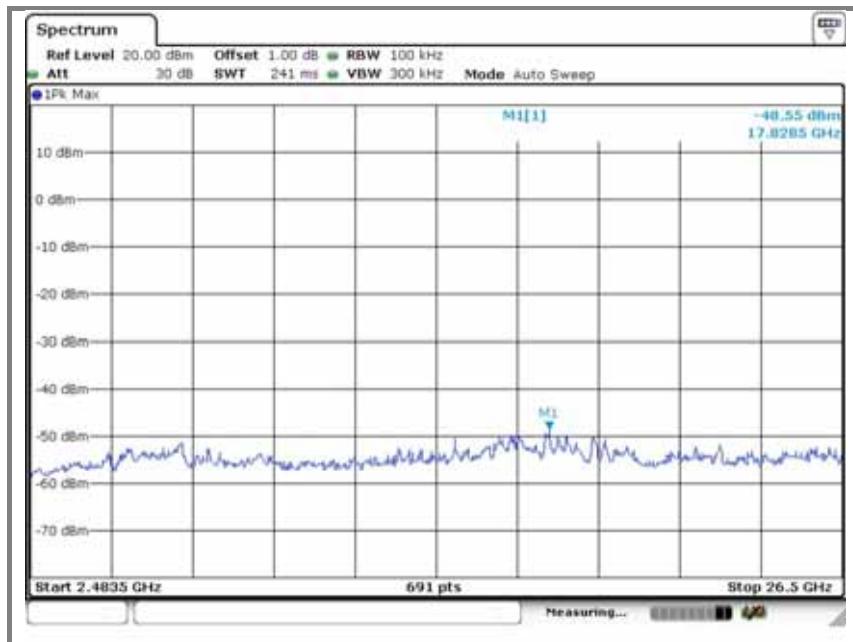
B. Middle channel

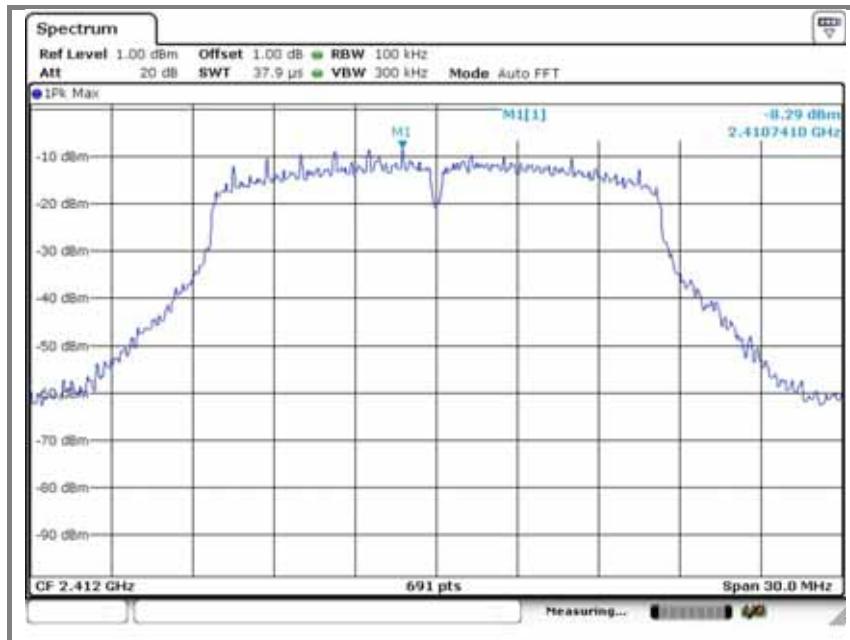
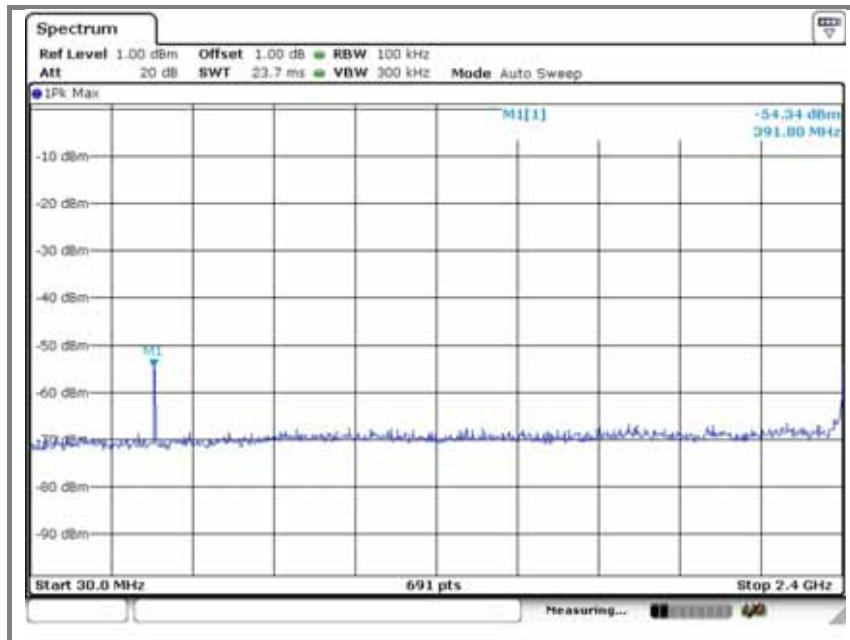
Reference level measurement

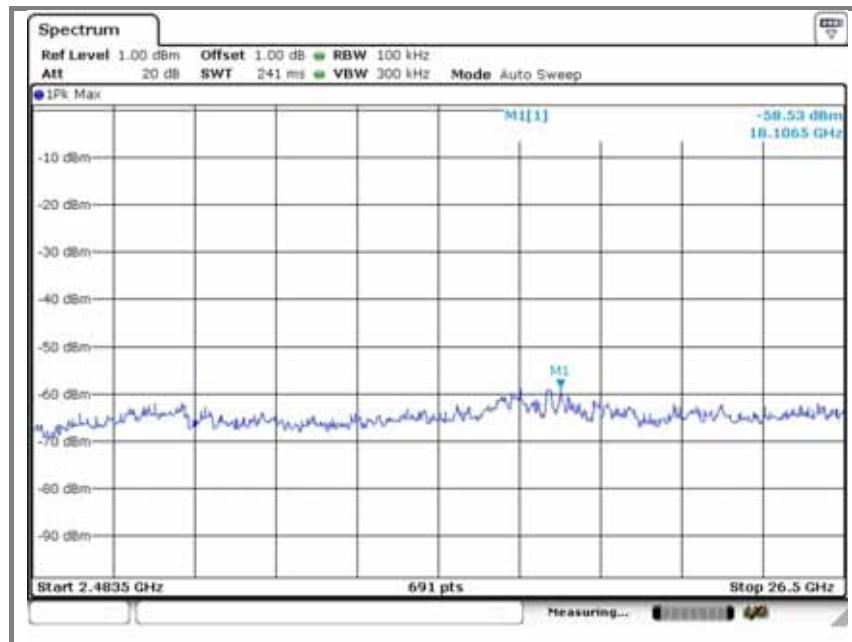
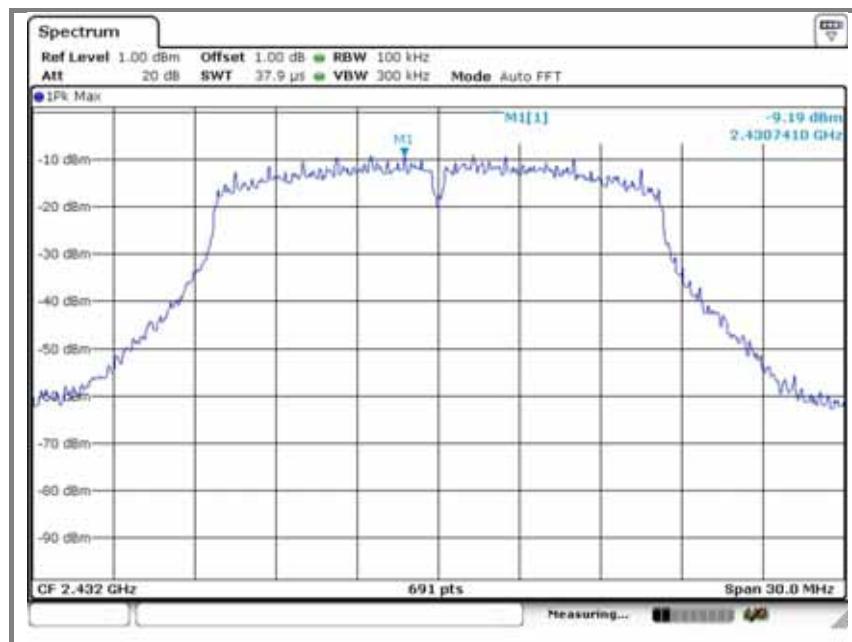


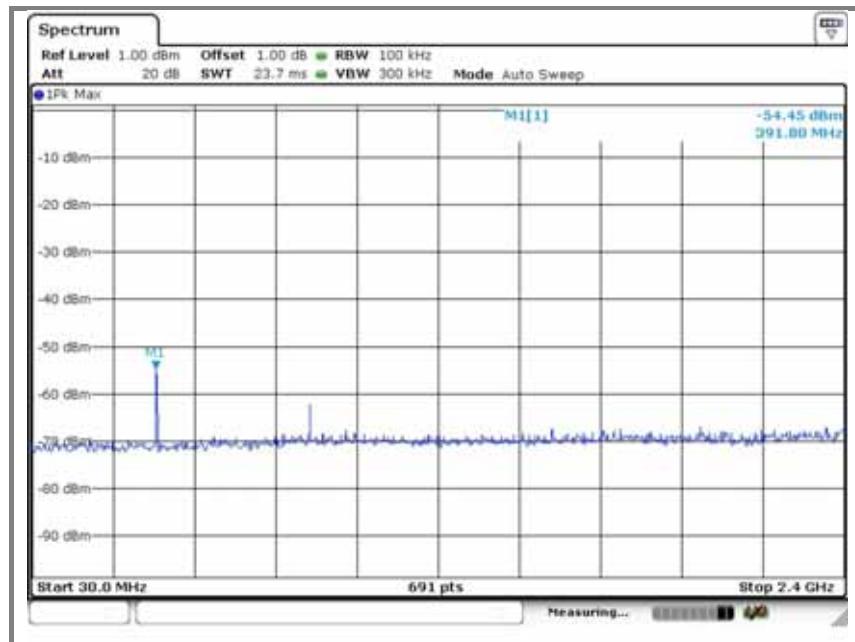
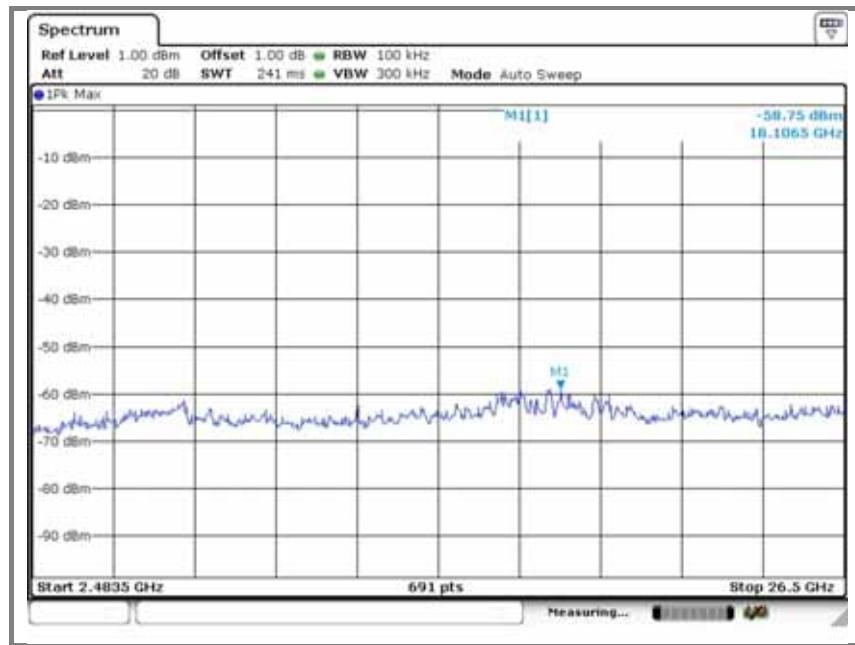
Emission level measurement 1**Emission level measurement 2**

C. High channel**Reference level measurement****Emission level measurement 1**

Emission level measurement 2

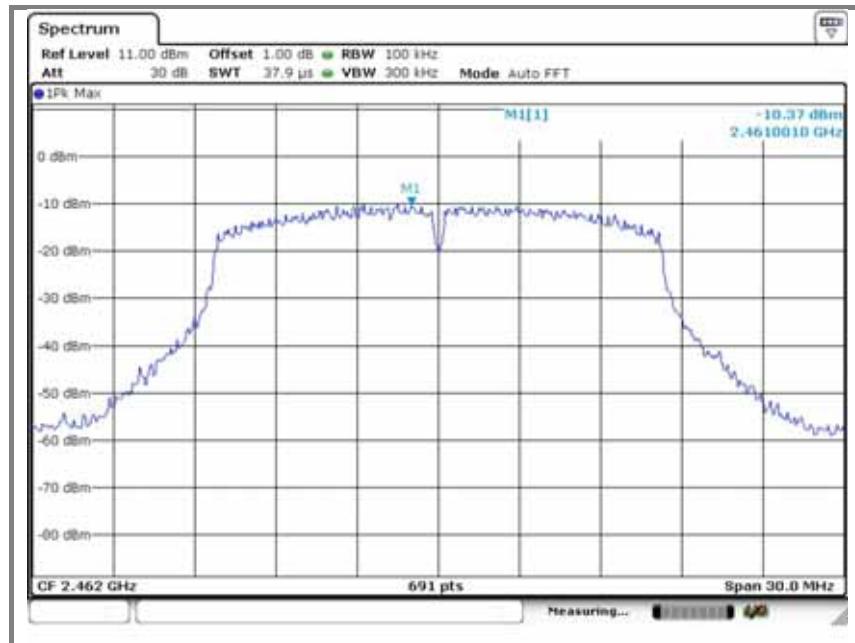
Operation mode: 802.11g mode (Ant 2)**A. Low channel****Reference level measurement****Emission level measurement 1**

Emission level measurement 2**B. Middle channel****Reference level measurement**

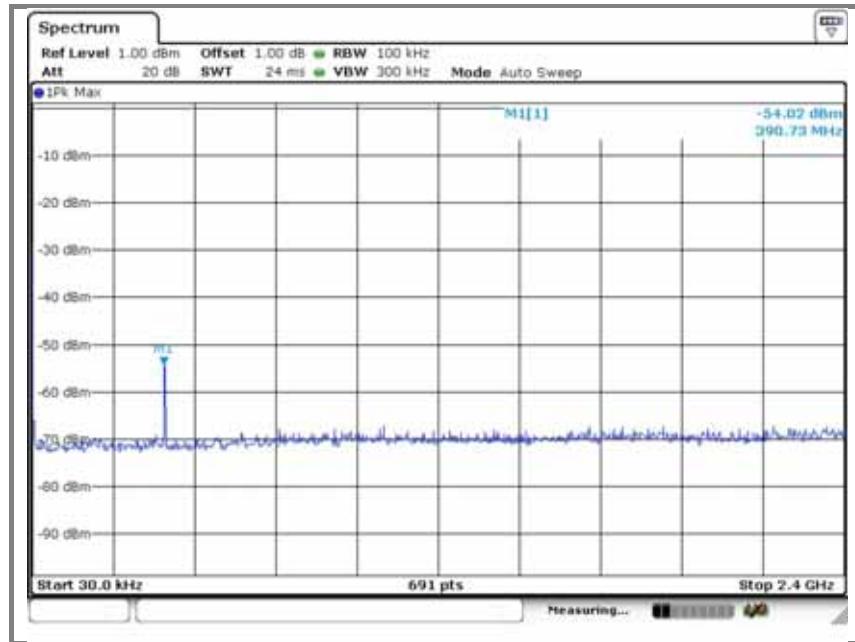
Emission level measurement 1**Emission level measurement 2**

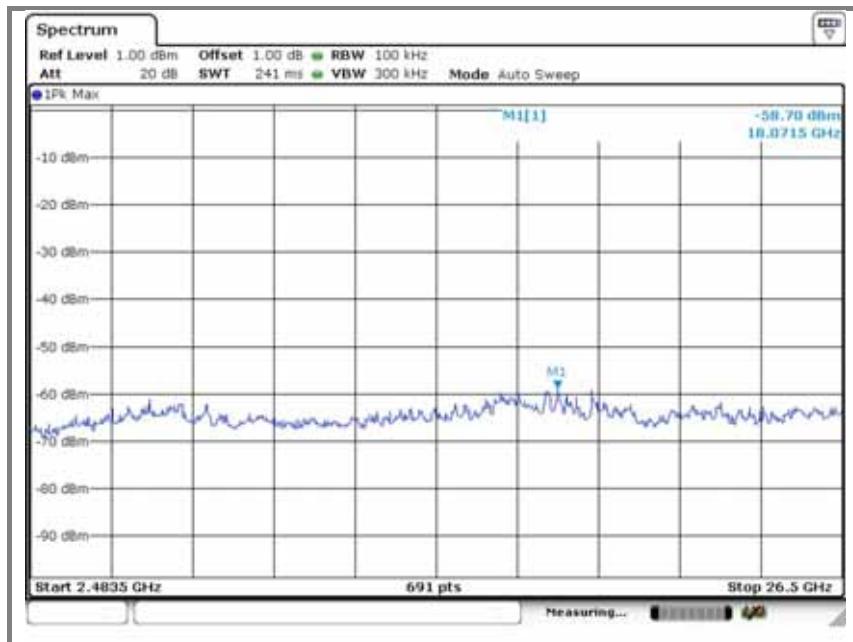
C. High channel

Reference level measurement



Emission level measurement 1

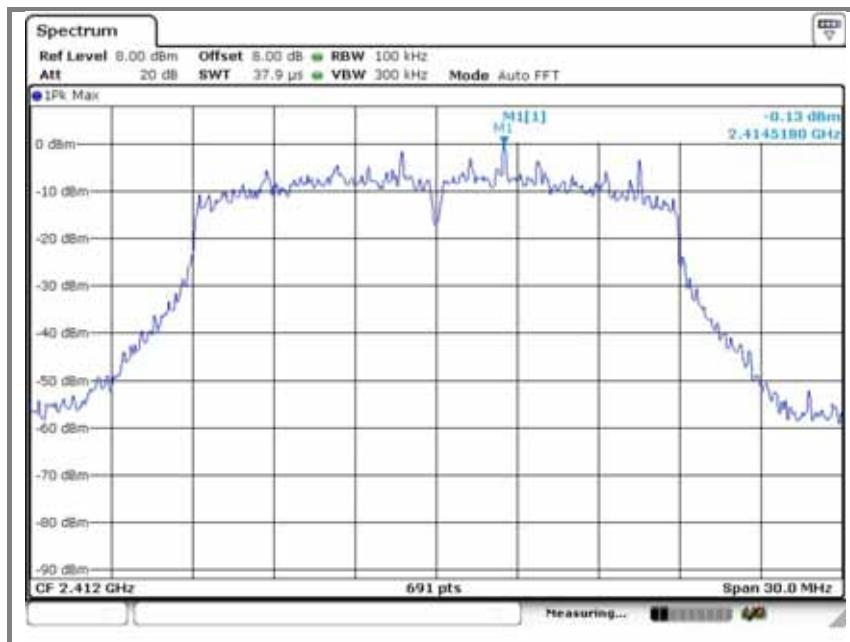


Emission level measurement 2

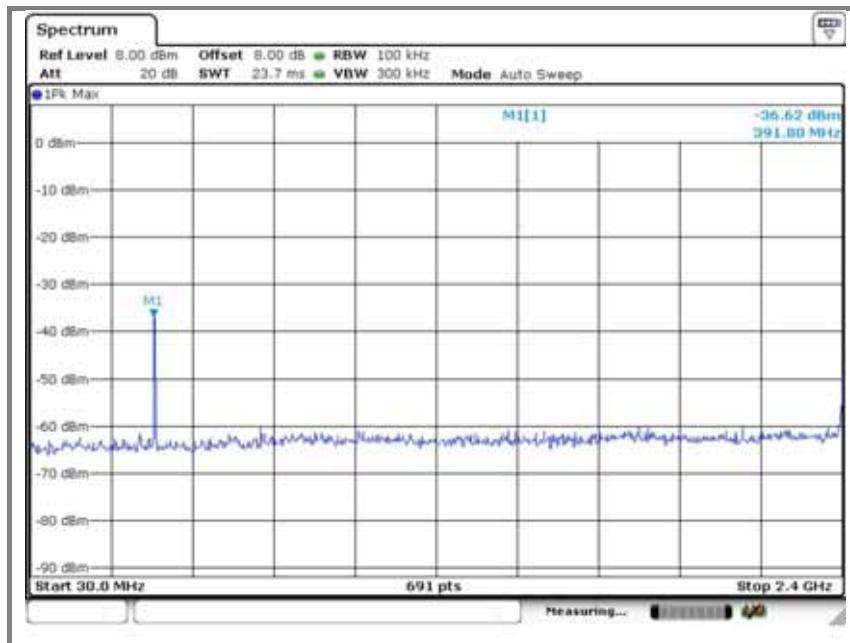
Operation mode: 802.11n_20 mode (MIMO)

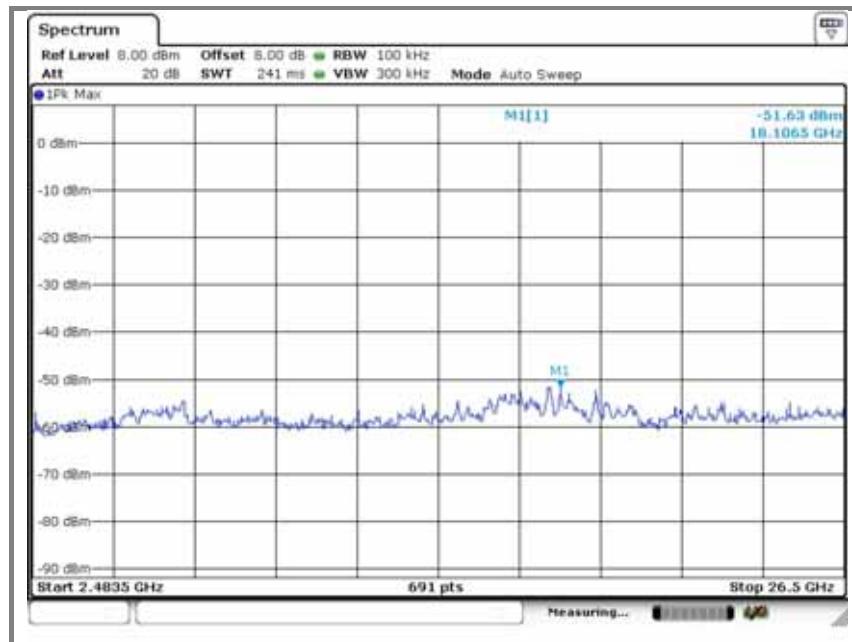
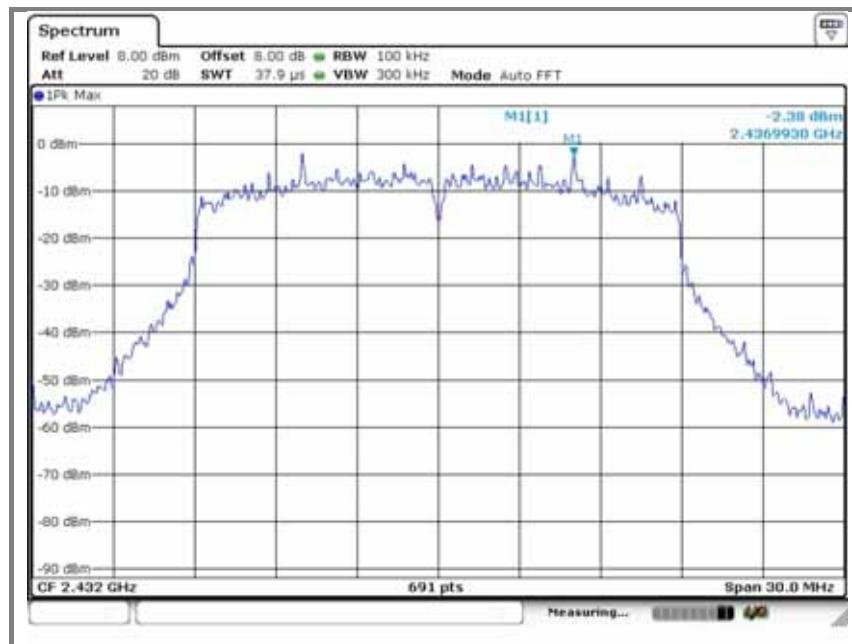
A. Low channel

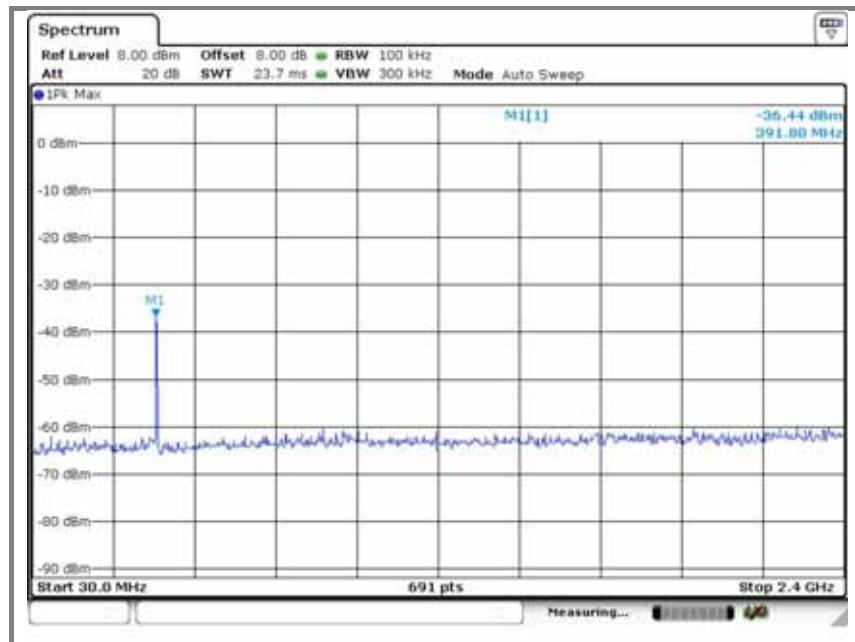
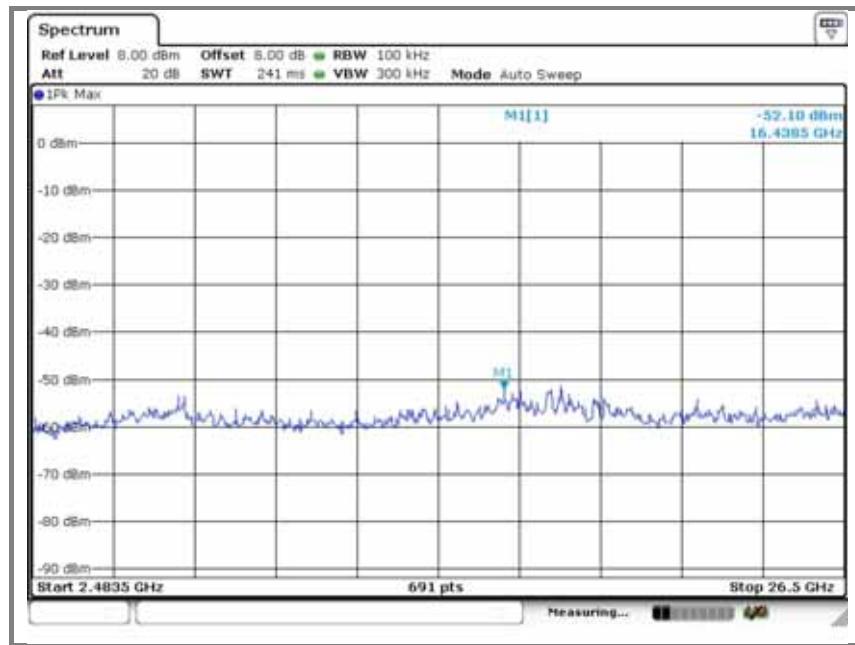
Reference level measurement



Emission level measurement 1

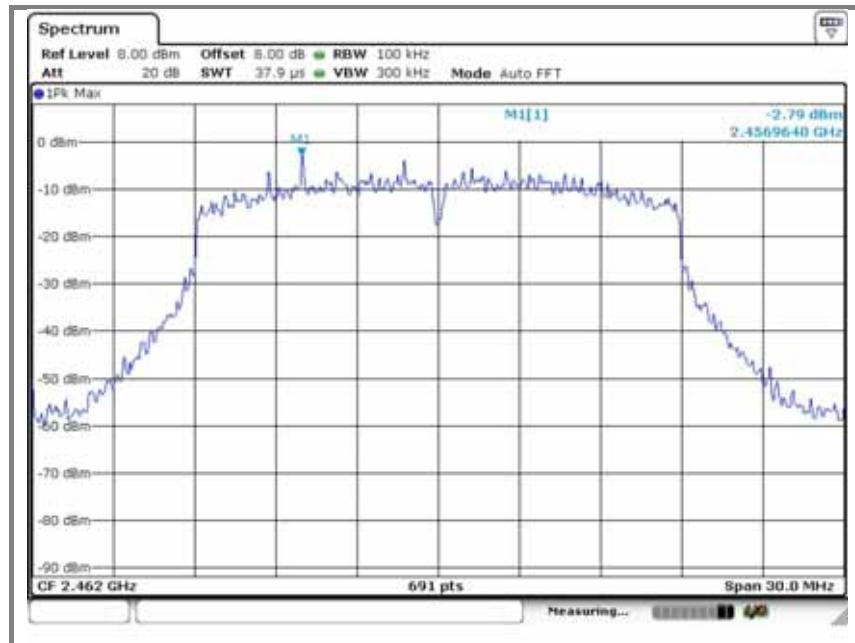


Emission level measurement 2**B. Middle channel****Reference level measurement**

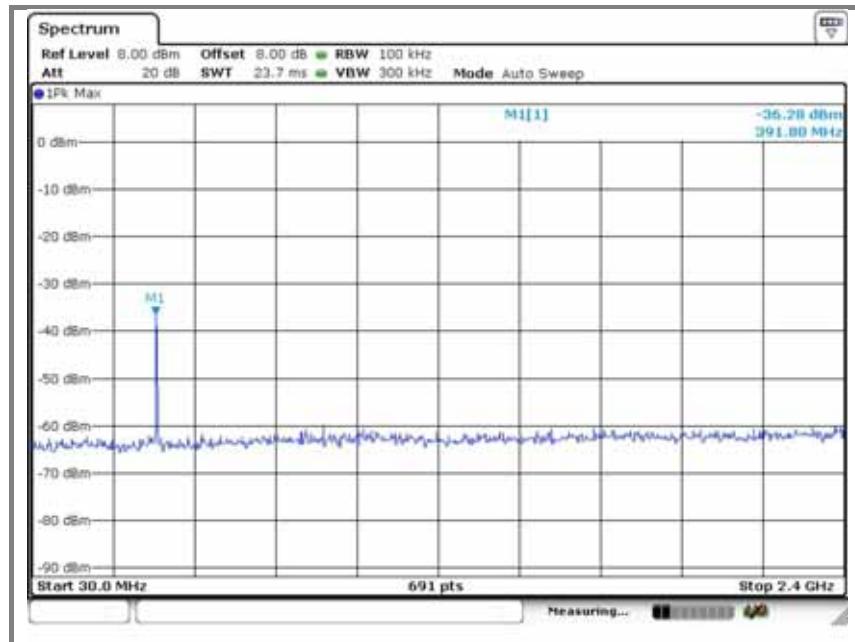
Emission level measurement 1**Emission level measurement 2**

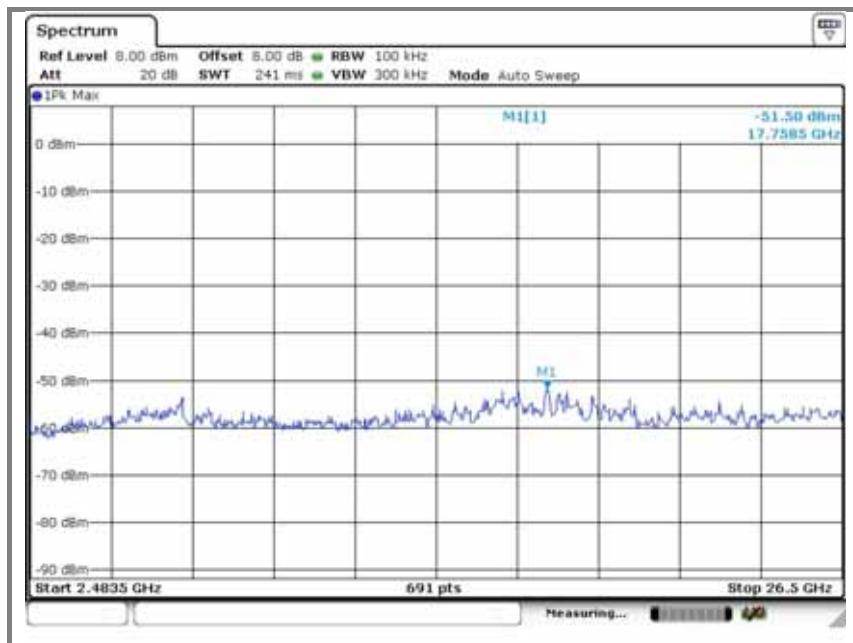
C. High channel

Reference level measurement



Emission level measurement 1

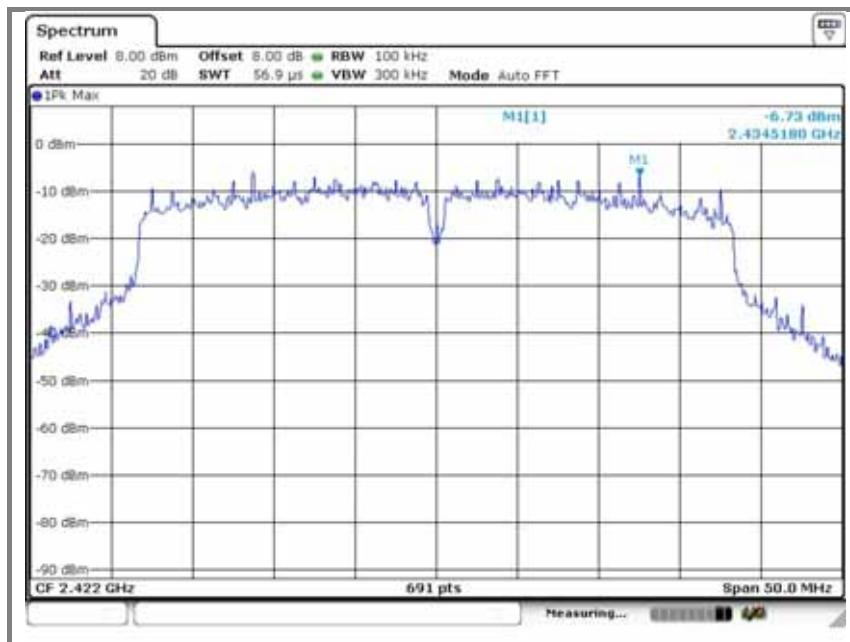


Emission level measurement 2

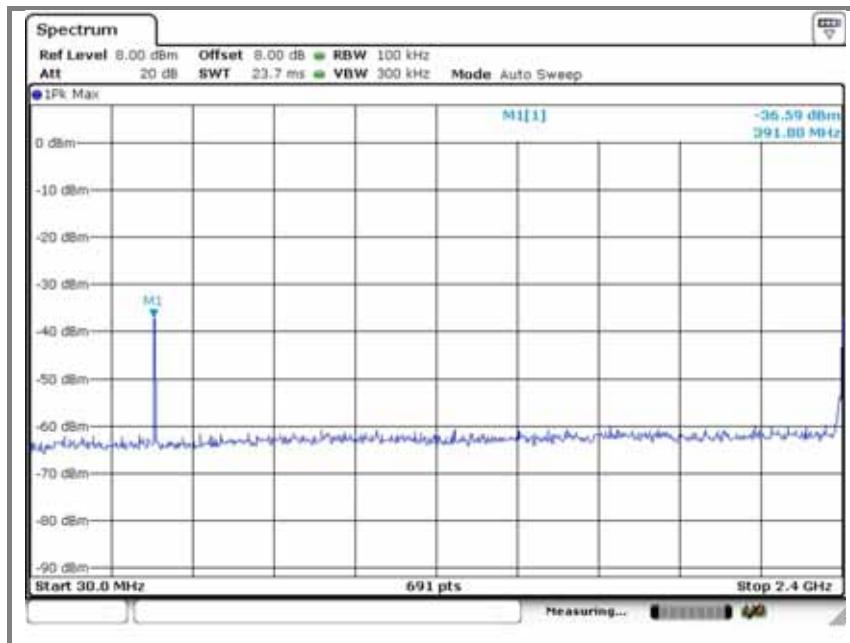
Operation mode: 802.11n_40 mode (MIMO)

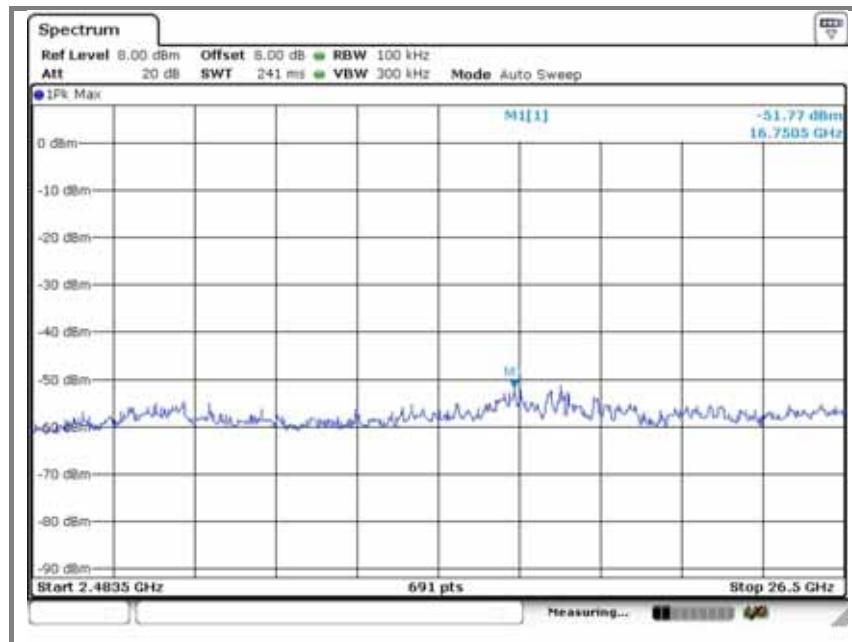
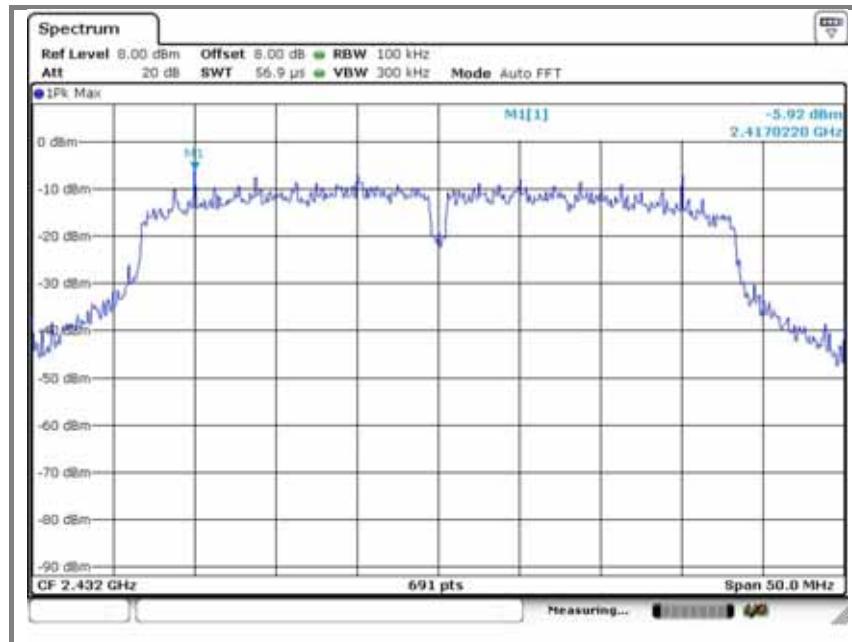
A. Low channel

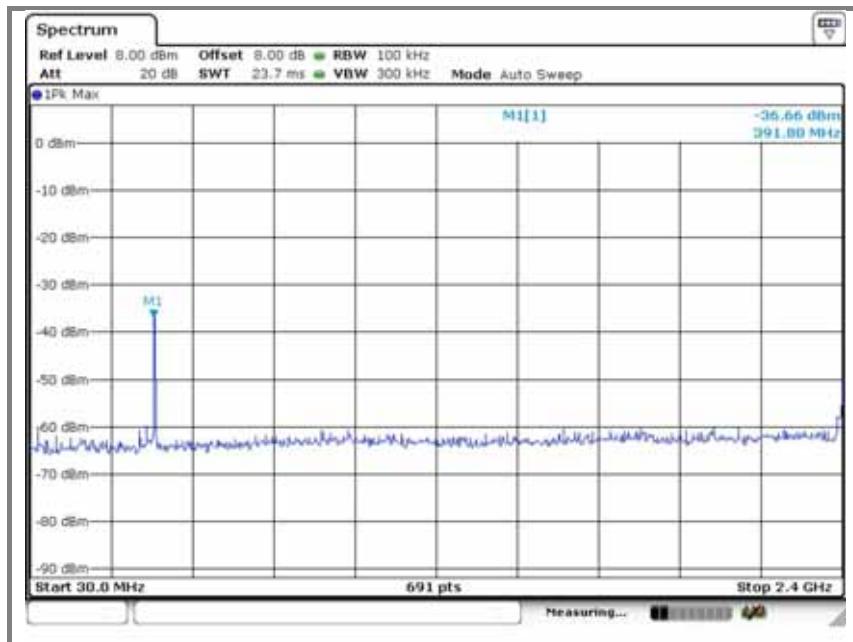
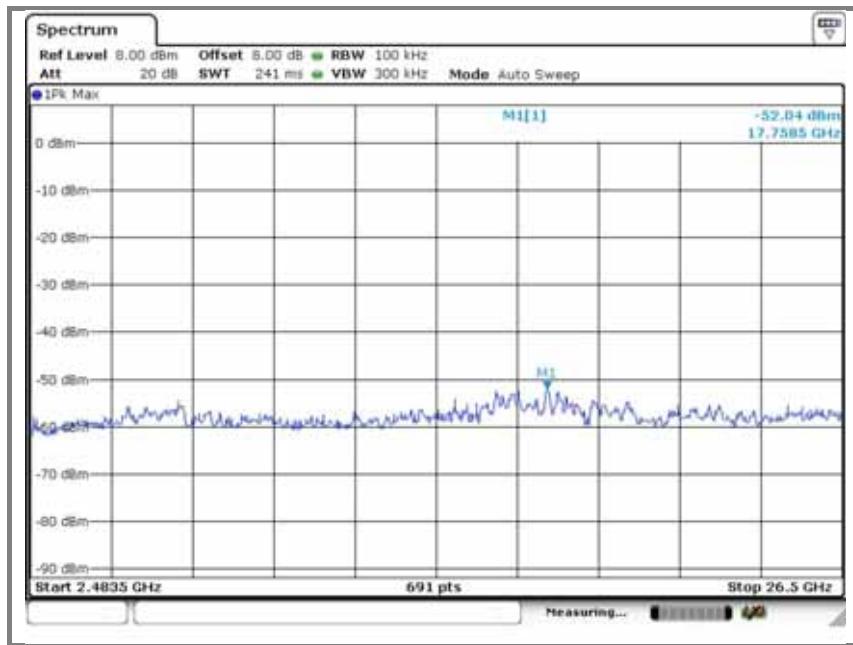
Reference level measurement

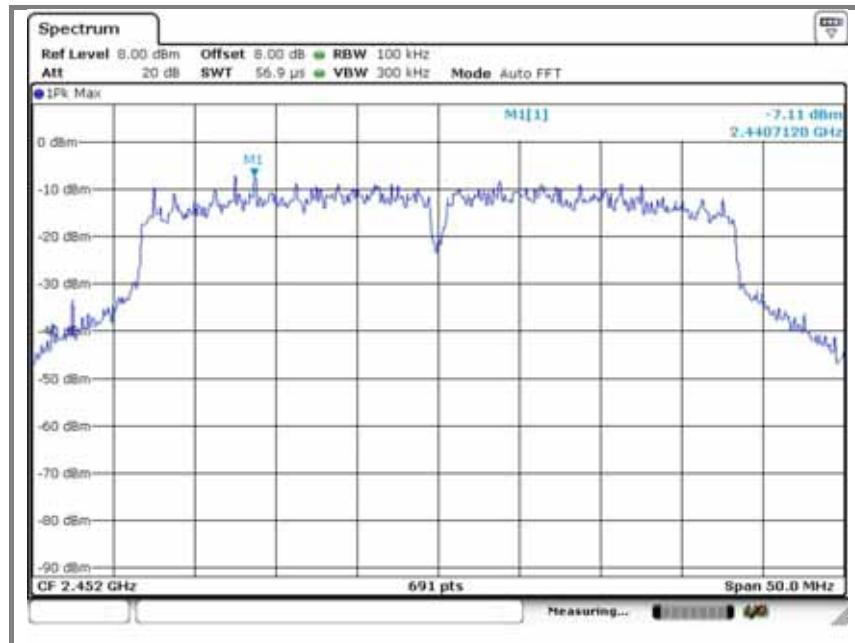
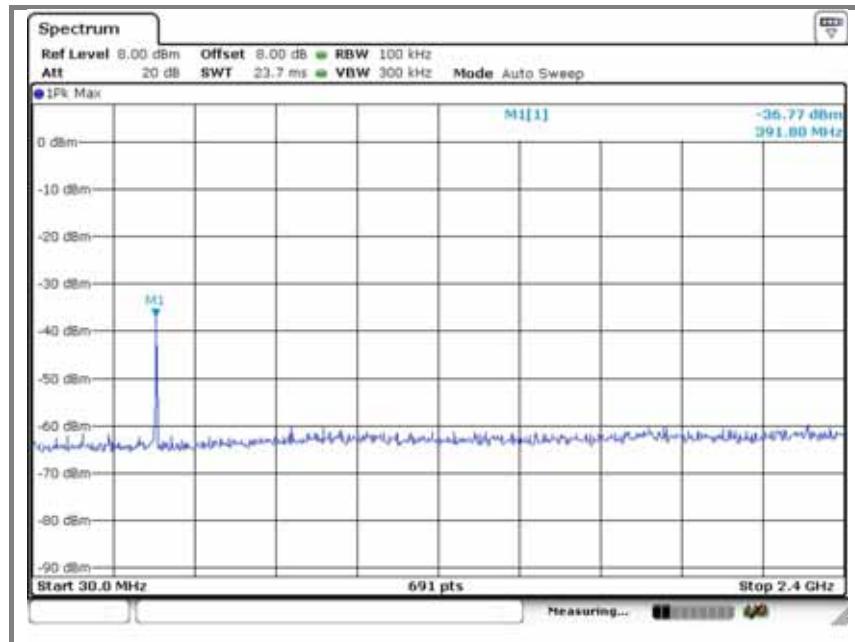


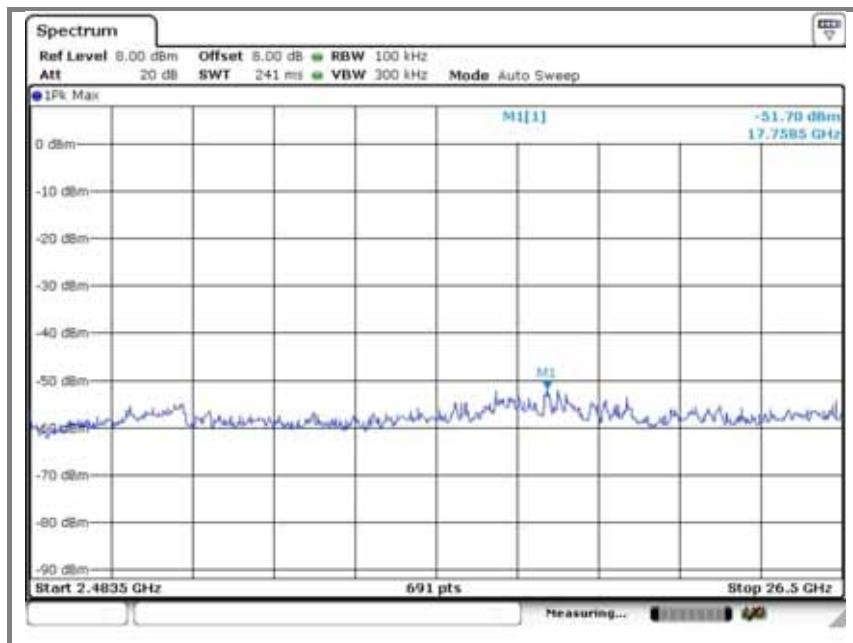
Emission level measurement 1

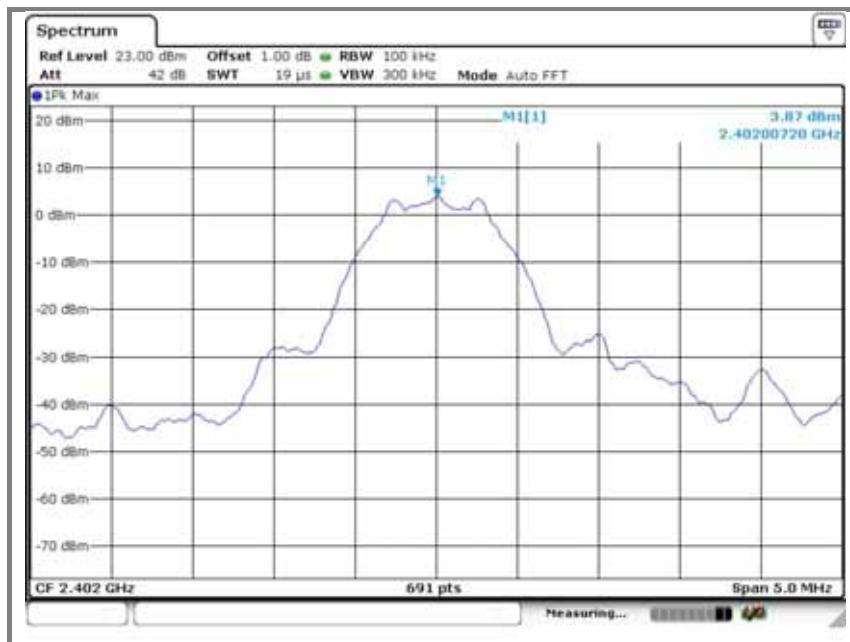
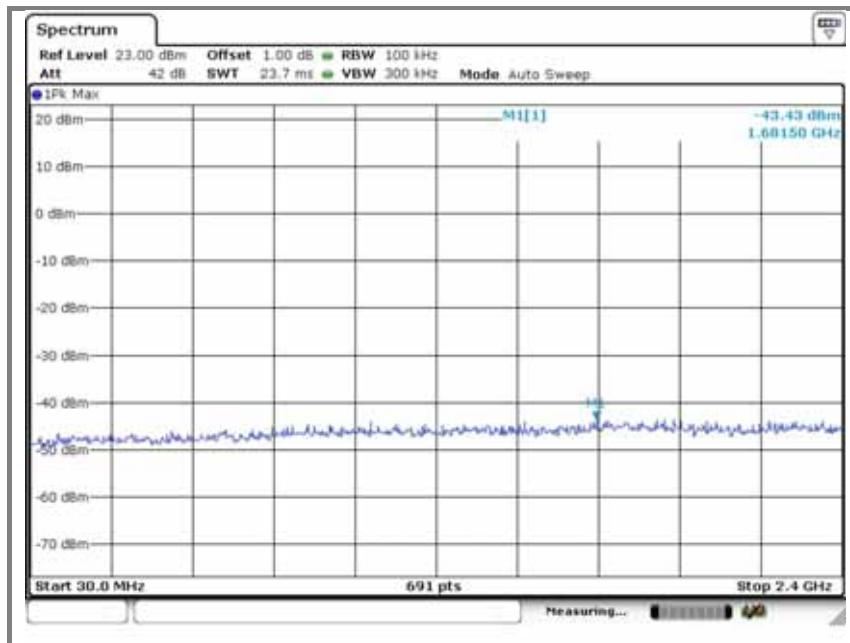


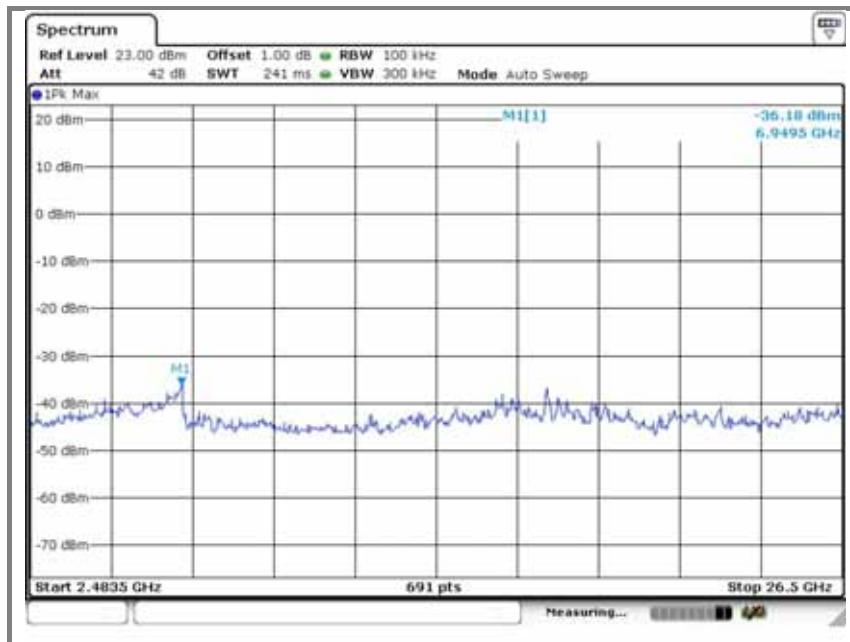
Emission level measurement 2**B. Middle channel****Reference level measurement**

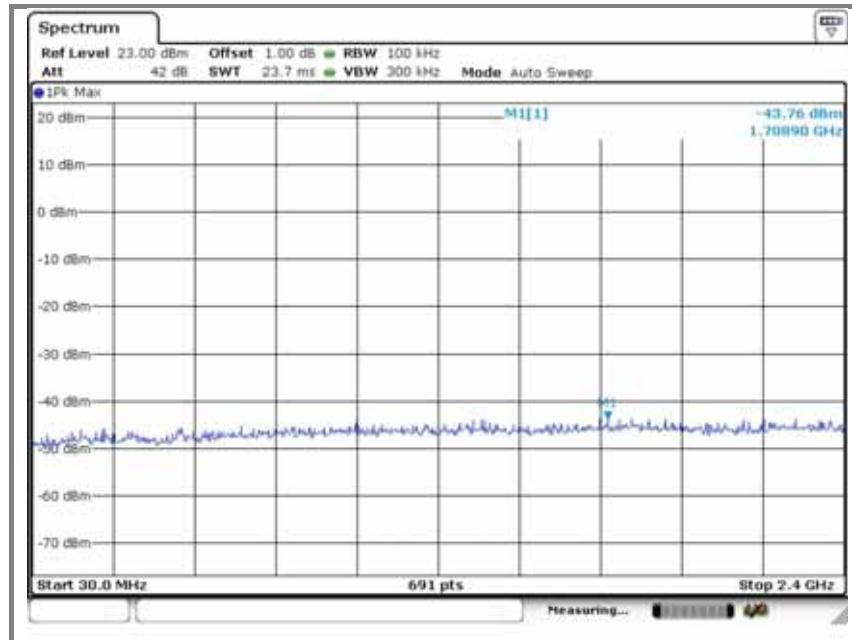
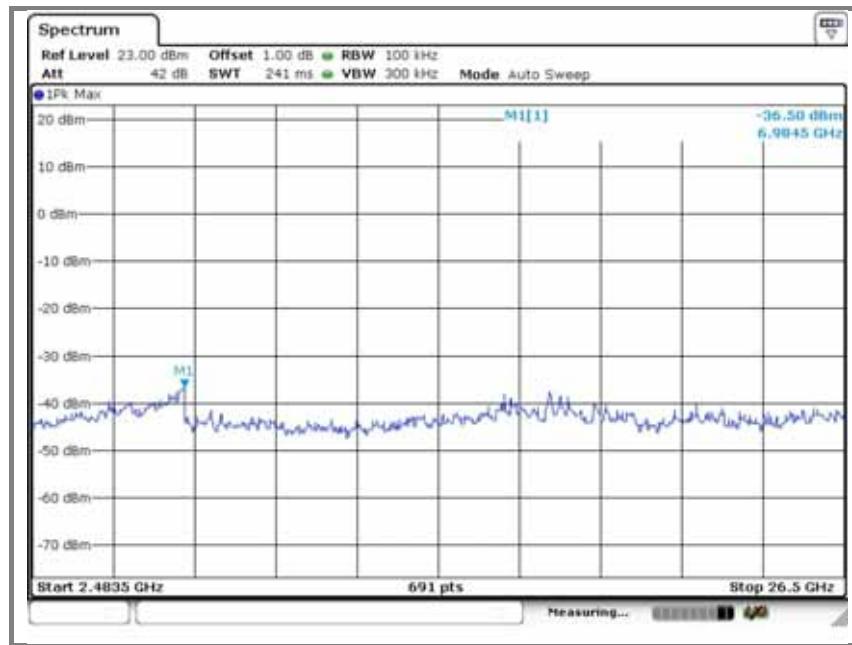
Emission level measurement 1**Emission level measurement 2**

C. High channel**Reference level measurement****Emission level measurement 1**

Emission level measurement 2

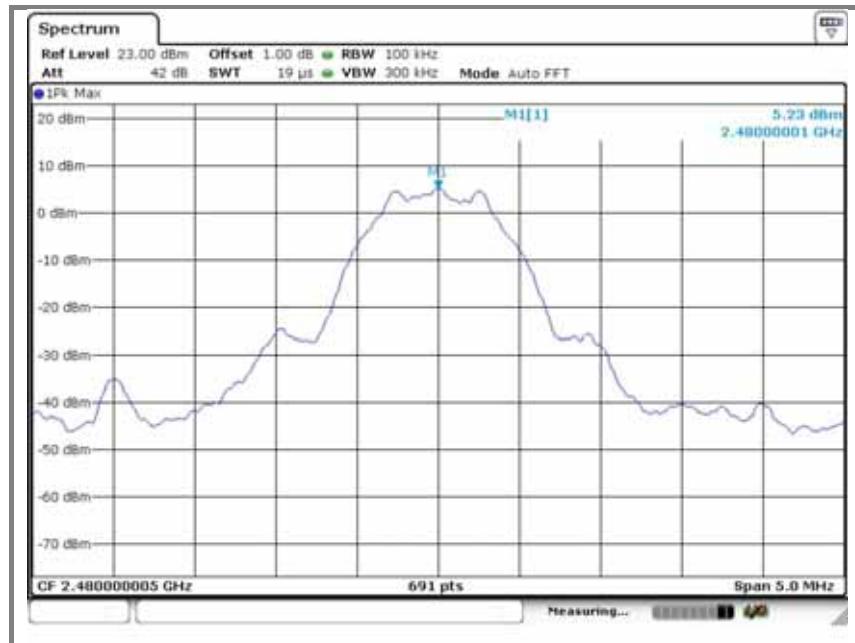
Operation mode: BLE mode (Port1)**A. Low channel****Reference level measurement****Emission level measurement 1**

Emission level measurement 2**B. Middle channel****Reference level measurement**

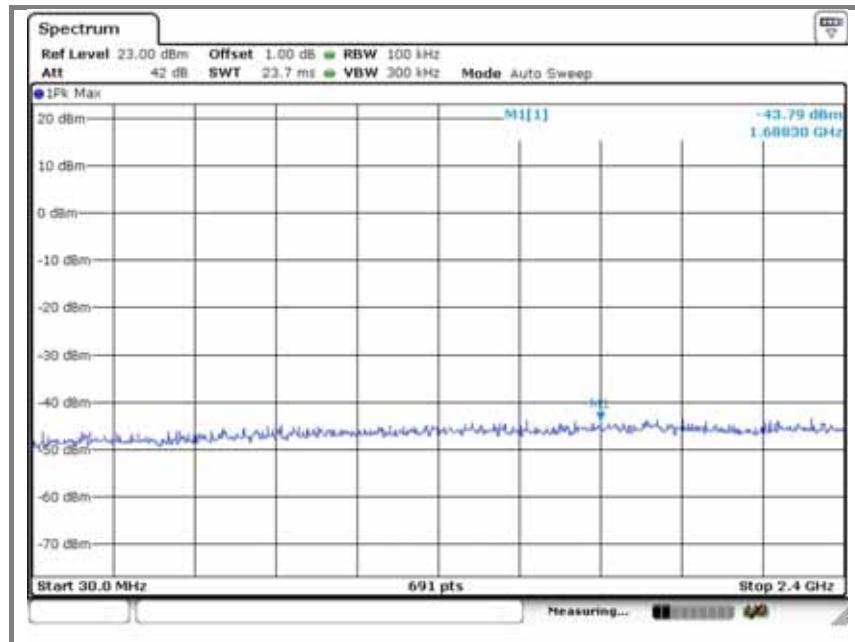
Emission level measurement 1**Emission level measurement 2**

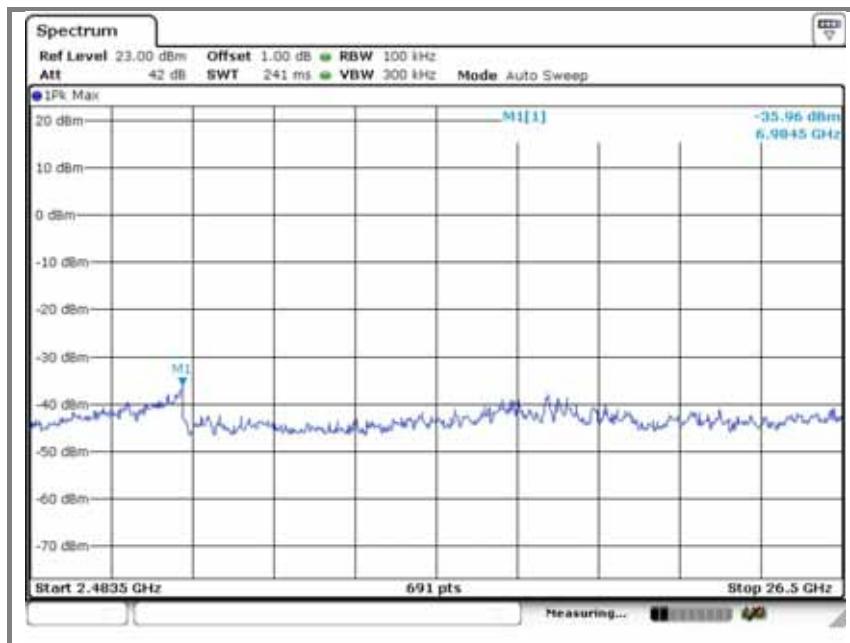
C. High channel

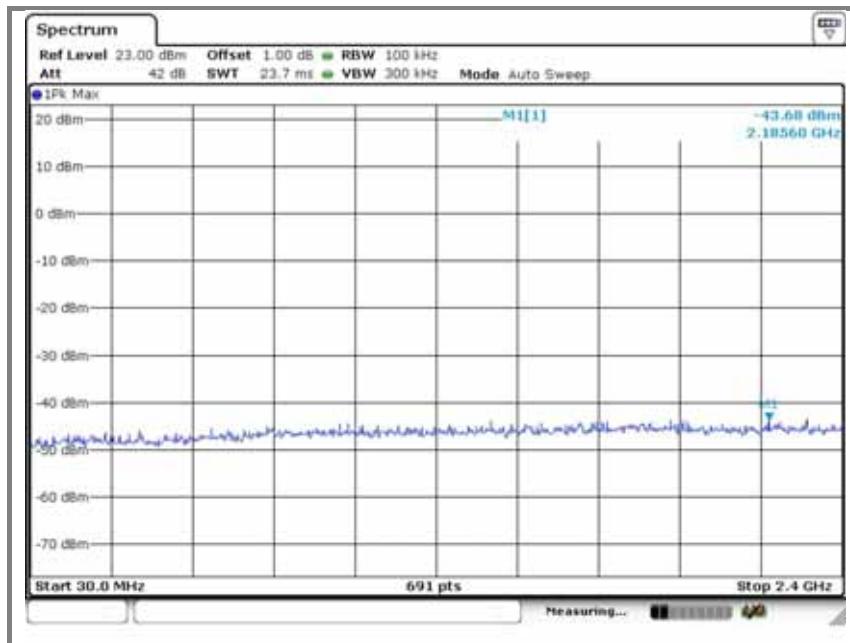
Reference level measurement

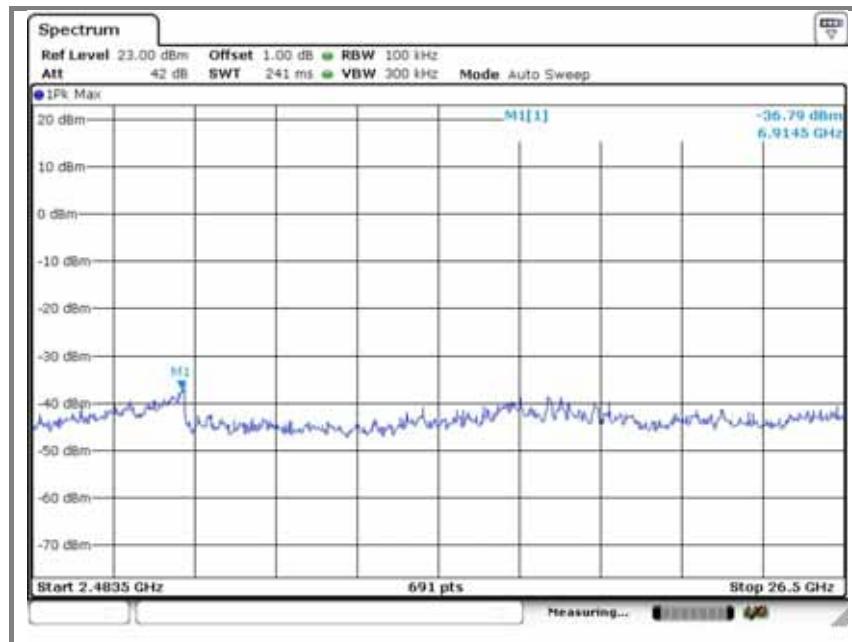
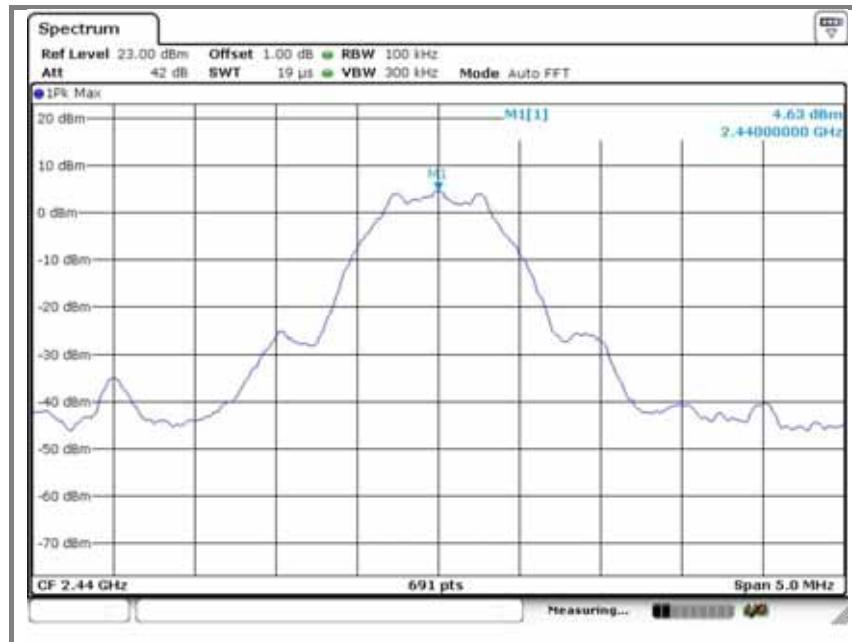


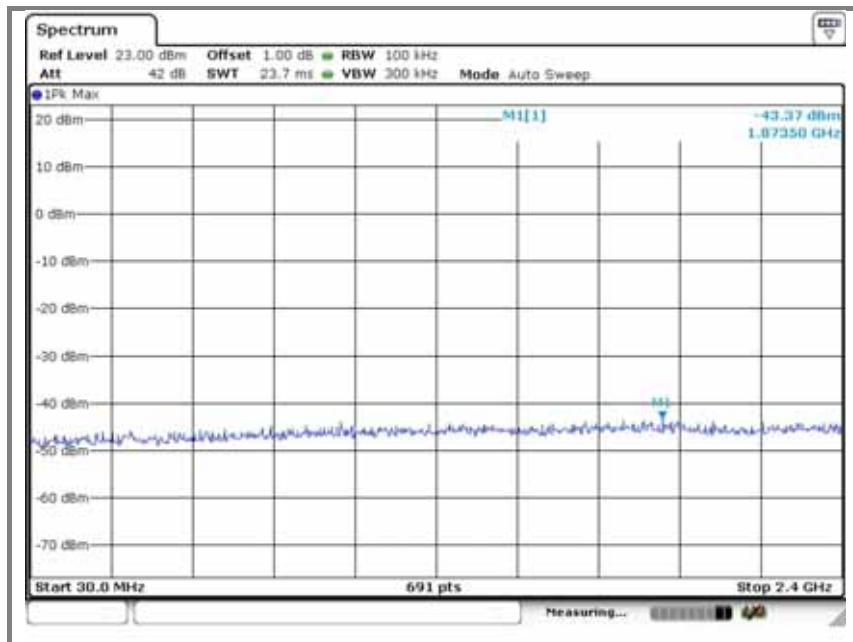
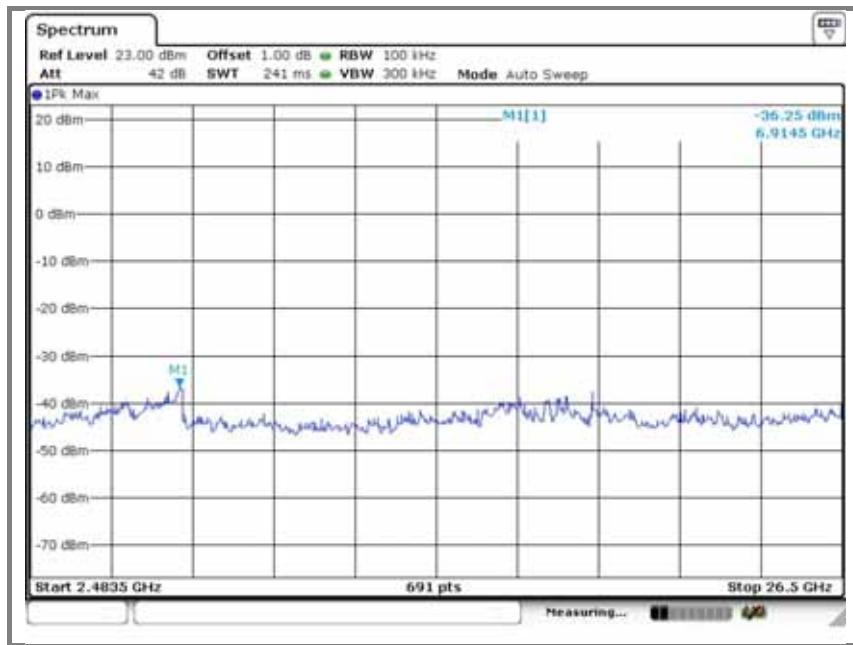
Emission level measurement 1



Emission level measurement 2

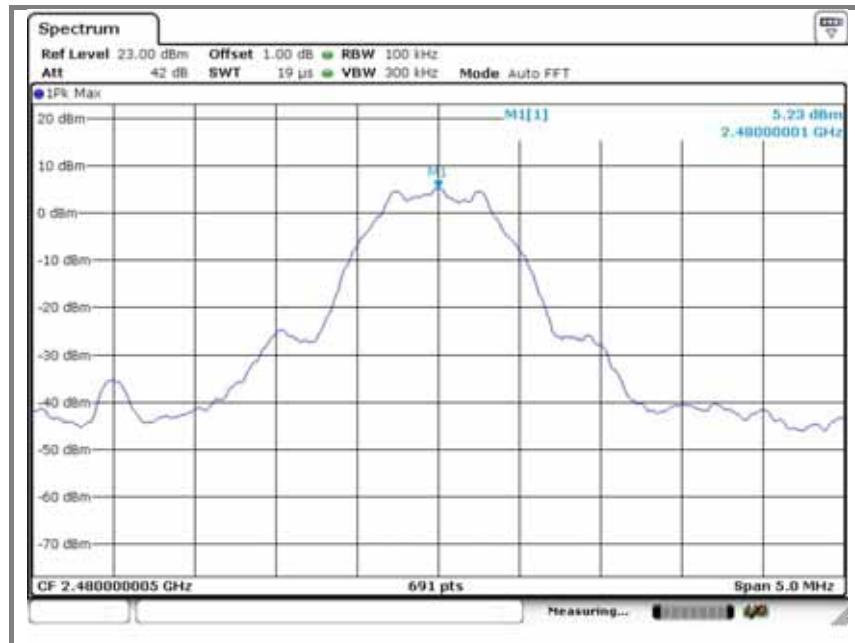
Operation mode: BLE mode (Port2)**A. Low channel****Reference level measurement****Emission level measurement 1**

Emission level measurement 2**B. Middle channel****Reference level measurement**

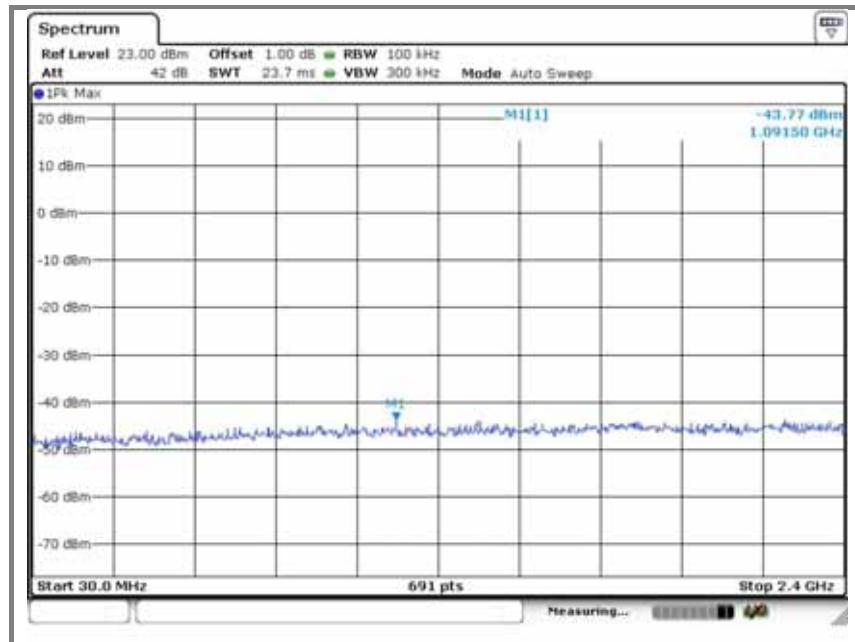
Emission level measurement 1**Emission level measurement 2**

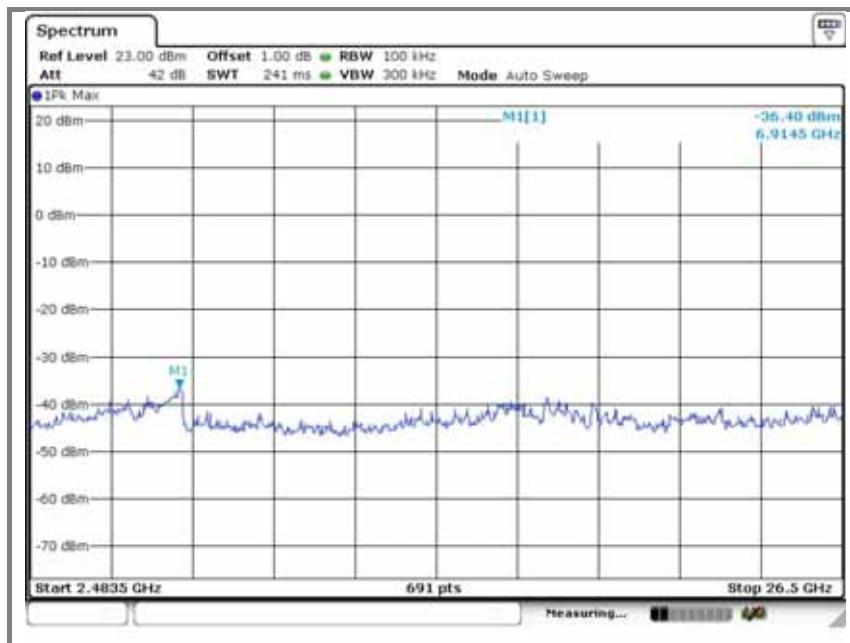
C. High channel

Reference level measurement




Emission level measurement 1



Emission level measurement 2

7. 6 dB bandwidth

7.1. Test setup



7.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz

7.3. Test procedure

1. The 6 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 100 kHz, Span = 5 MHz.

7.4. Test results

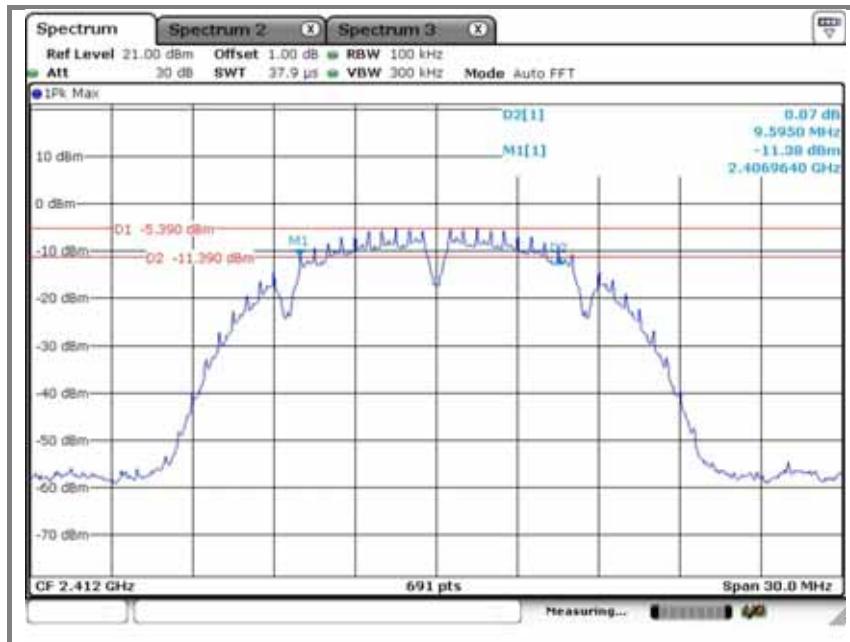
Ambient temperature: 23

Relative humidity: 51 % R.H.

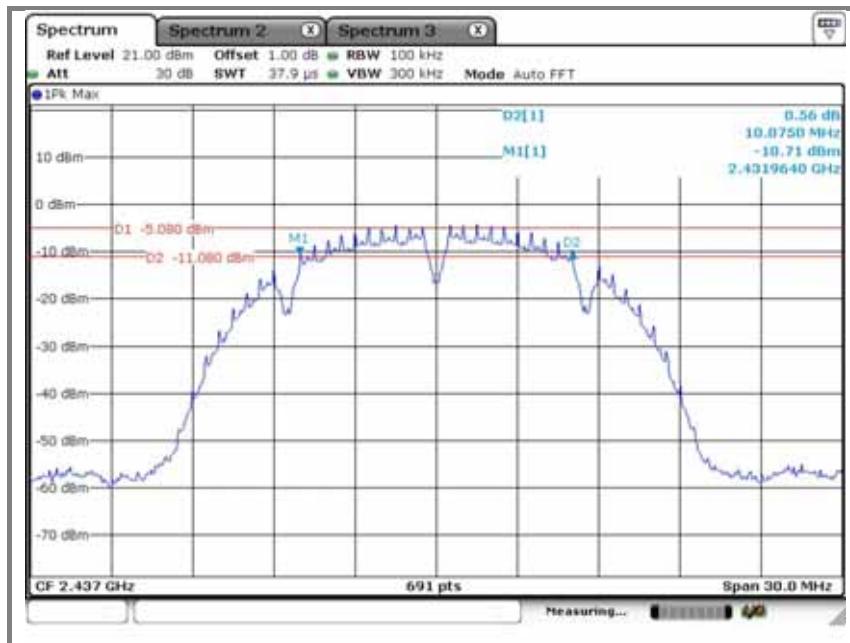
Mode	Frequency(MHz)	6 dB bandwidth(MHz)
802.11b (Ant 1)	2 412	9.59
	2 432	10.08
	2 472	10.07
802.11b (Ant 2)	2 412	10.07
	2 432	10.07
	2 472	10.07
802.11g (Ant 1)	2 412	15.72
	2 432	15.11
	2 472	15.15
802.11g (Ant 2)	2 412	15.11
	2 432	15.11
	2 472	15.50
802.11n_20 (MIMO)	2 412	15.15
	2 432	15.02
	2 472	13.89
802.11n_40 (MIMO)	2 422	30.17
	2 432	30.25
	2 462	35.17
BLE (Port1)	2 402	0.70
	2 440	0.70
	2 480	0.70
BLE (Port2)	2 402	0.71
	2 440	0.70
	2 480	0.70

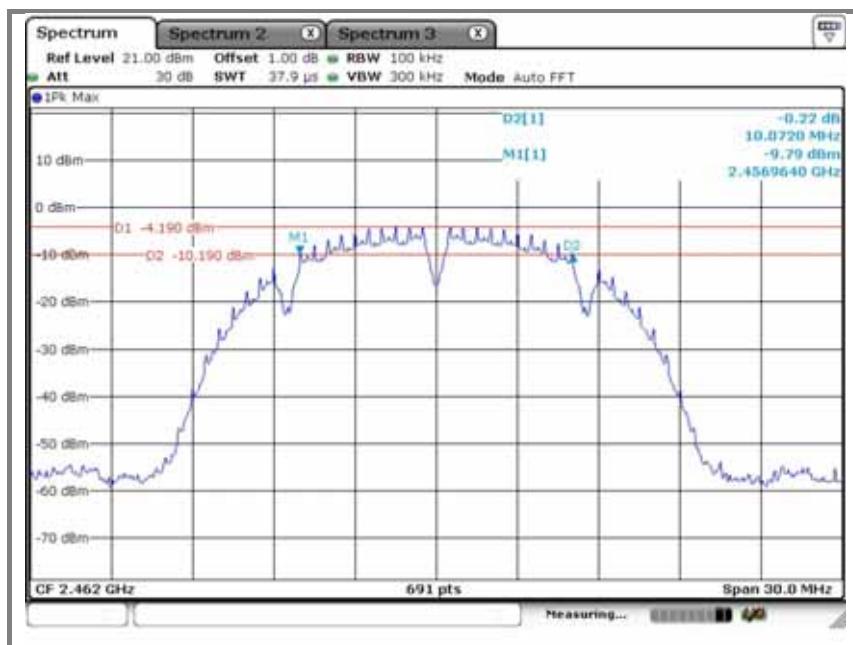
Operation mode: 802.11b mode (Ant 1)

A. Low channel



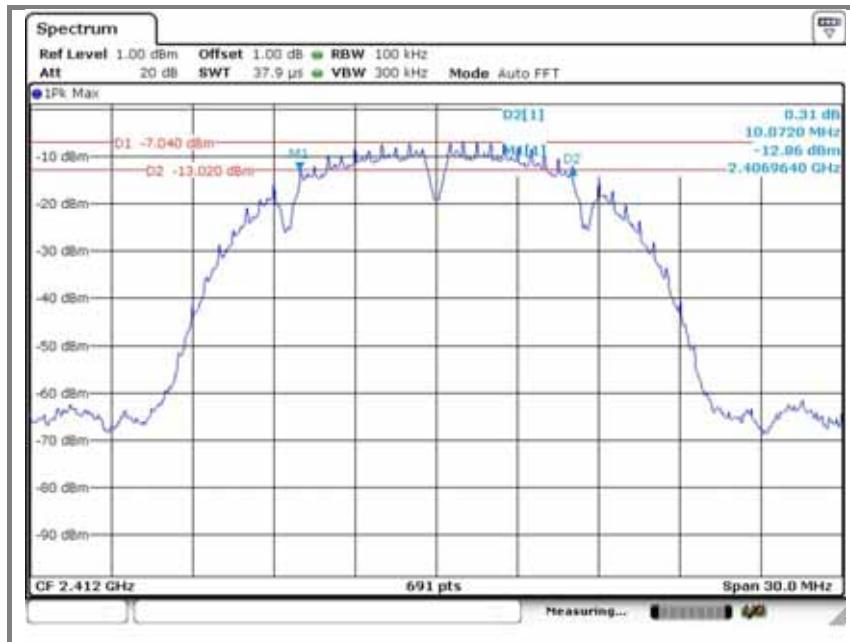
B. Middle channel



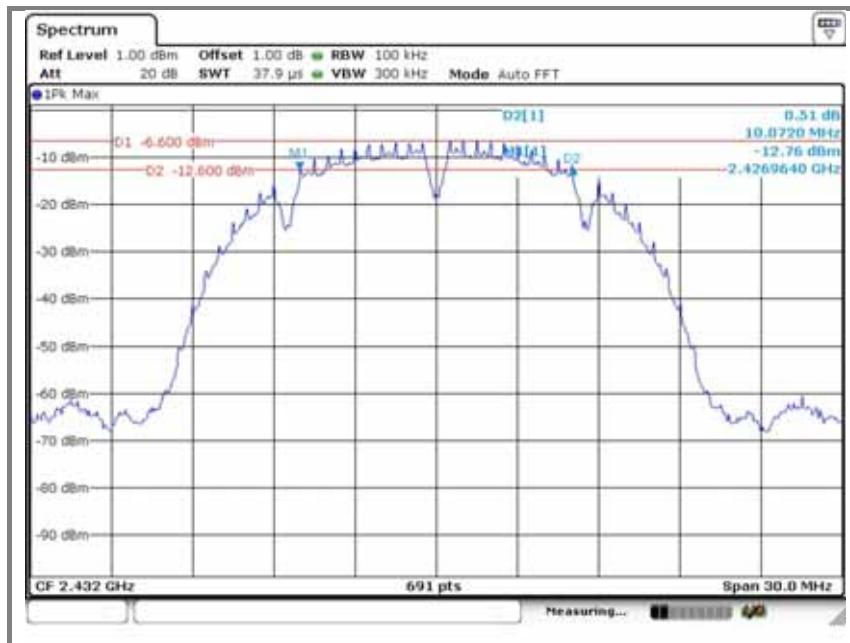
C. High channel

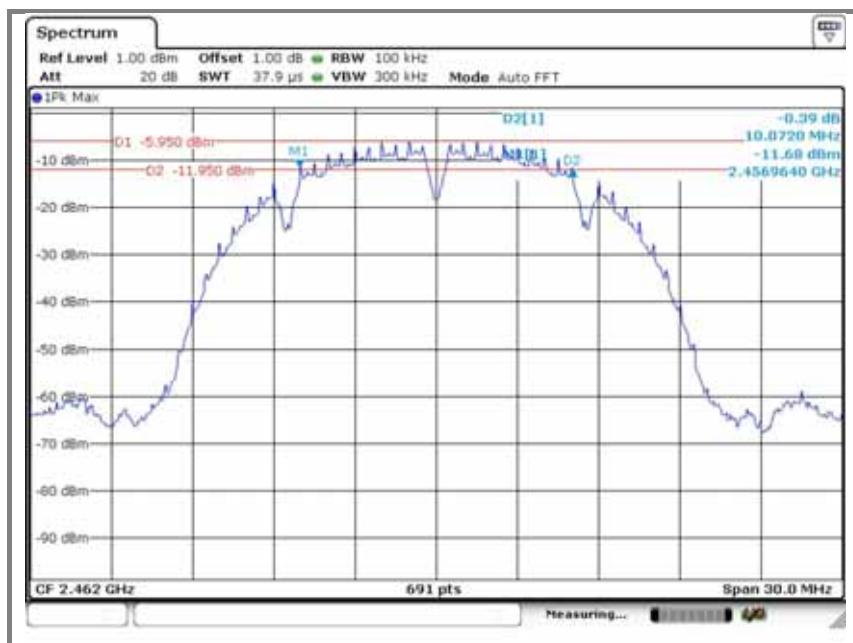
Operation mode: 802.11b mode (Ant 2)

A. Low channel



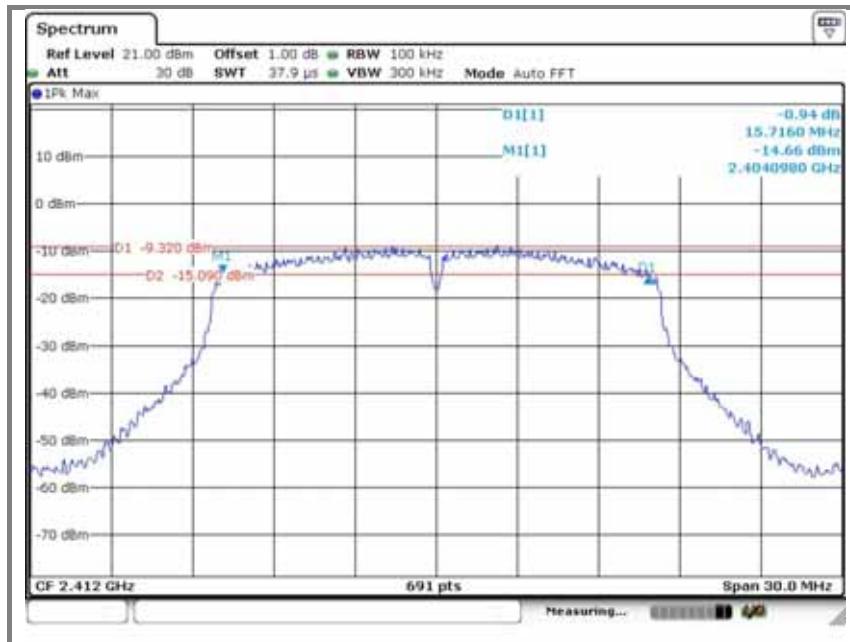
B. Middle channel



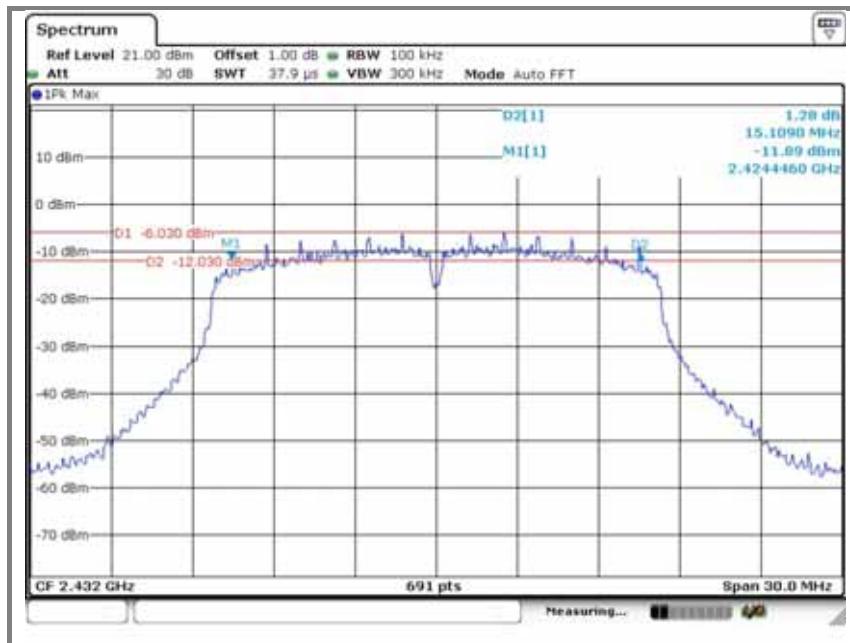
C. High channel

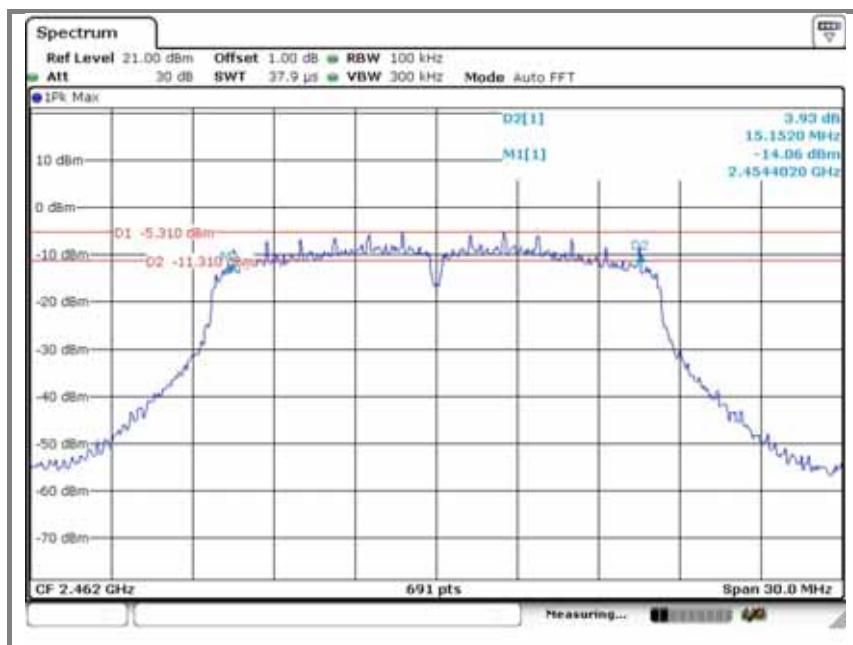
Operation mode: 802.11g mode (Ant 1)

A. Low channel



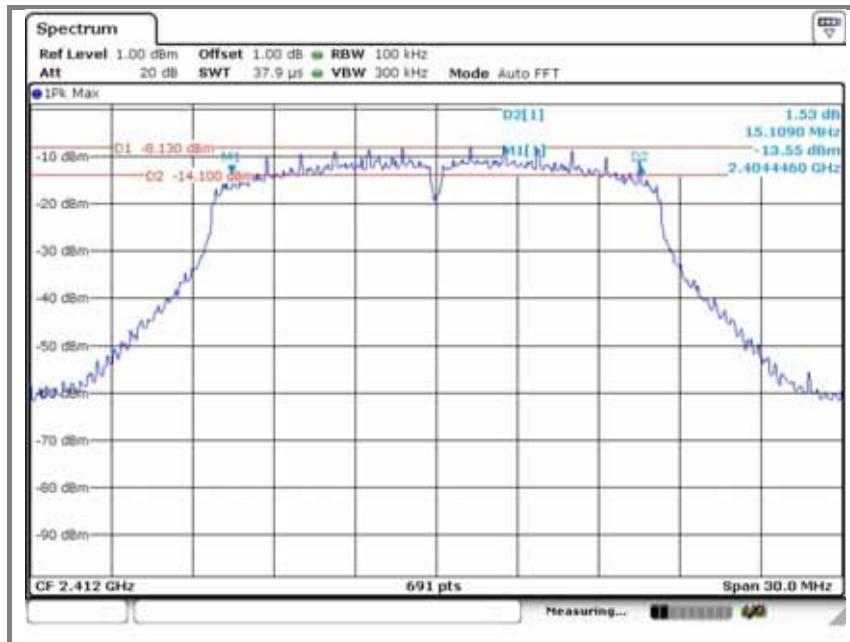
B. Middle channel



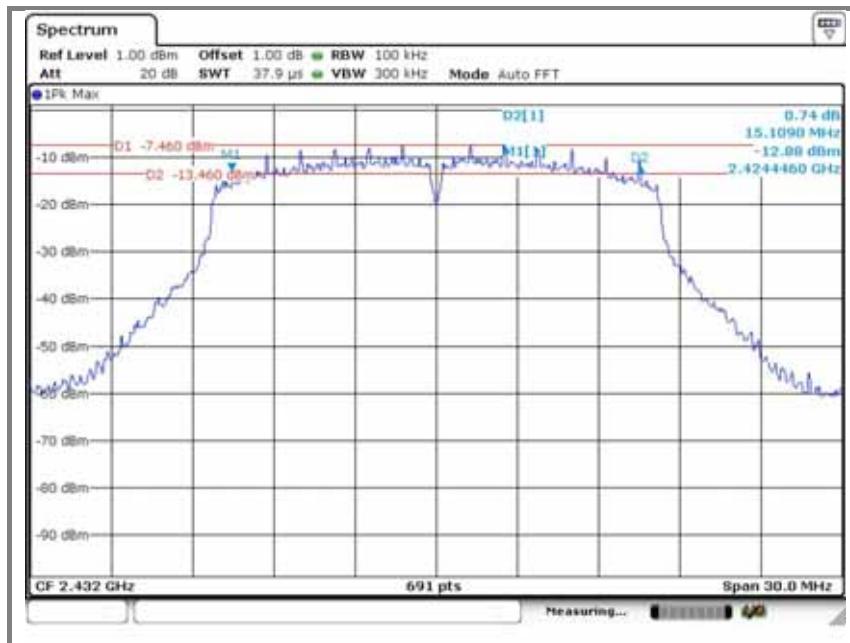
C. High channel

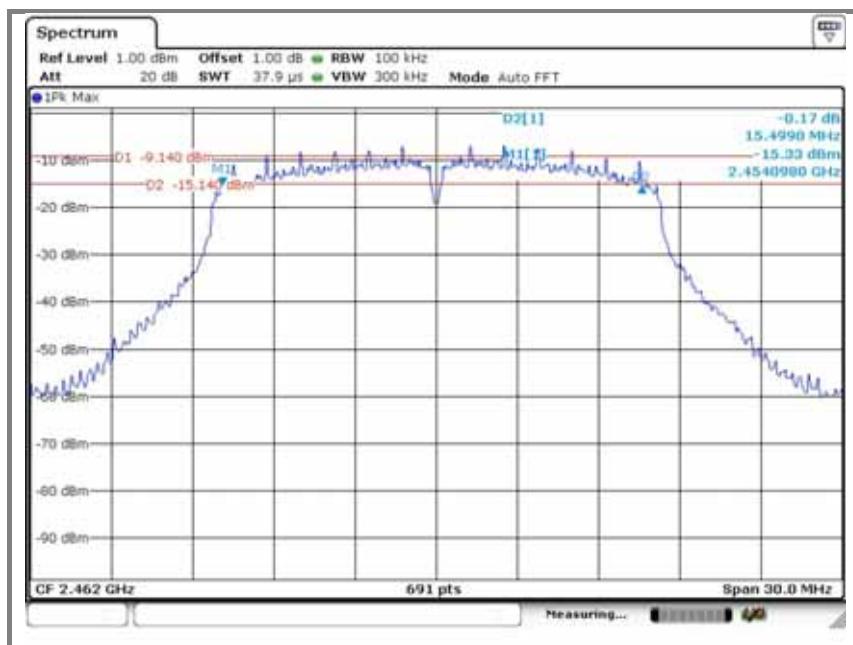
Operation mode: 802.11g mode (Ant 2)

A. Low channel



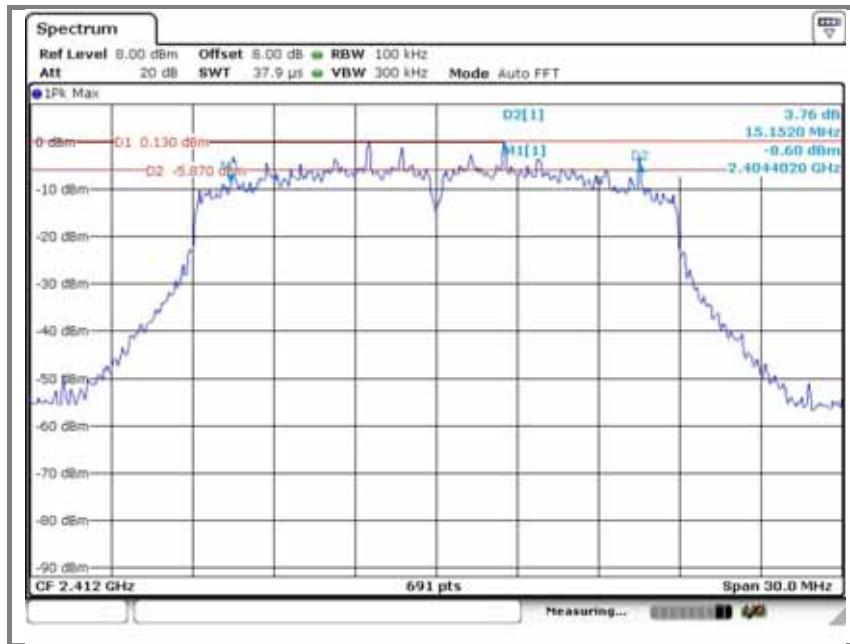
B. Middle channel



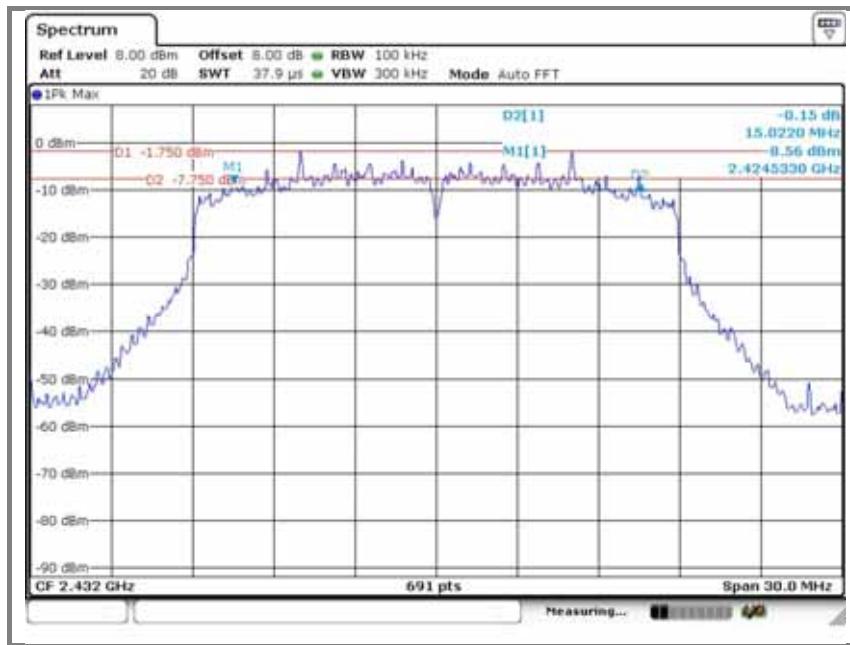
C. High channel

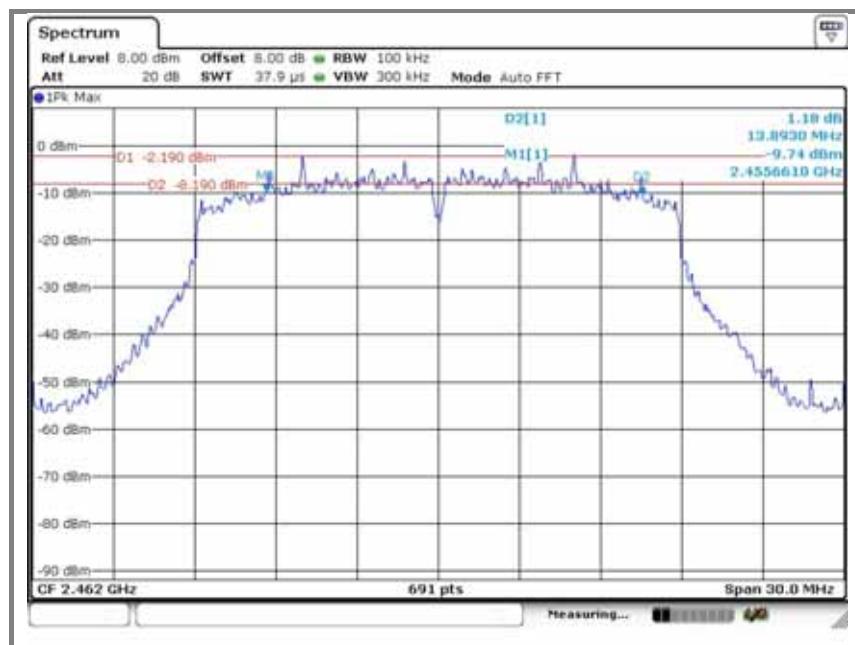
Operation mode: 802.11n20 mode (MIMO)

A. Low channel



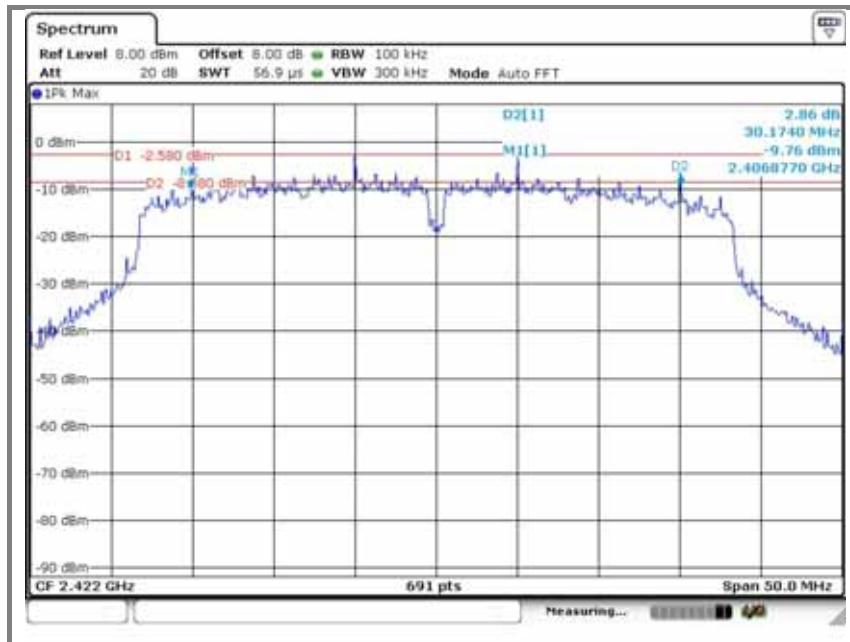
B. Middle channel



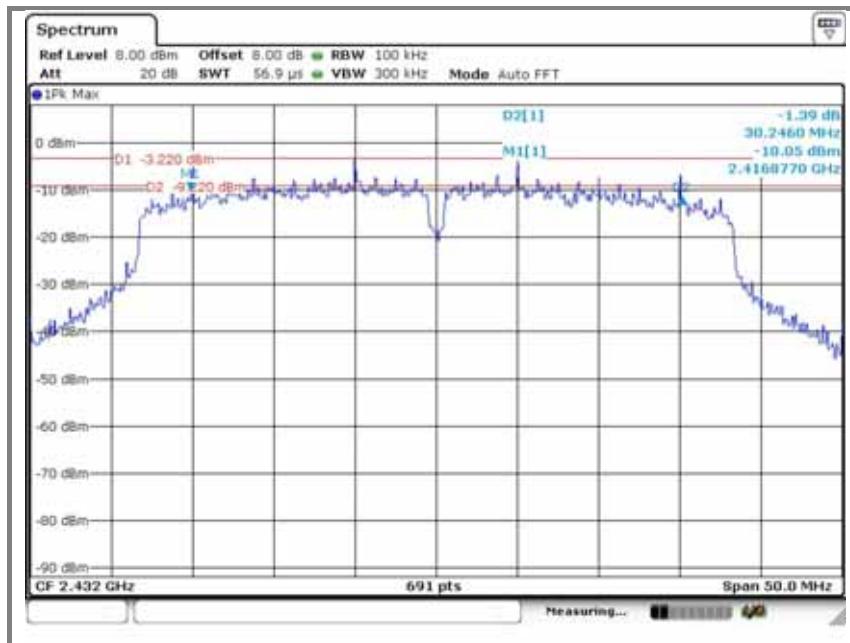
C. High channel

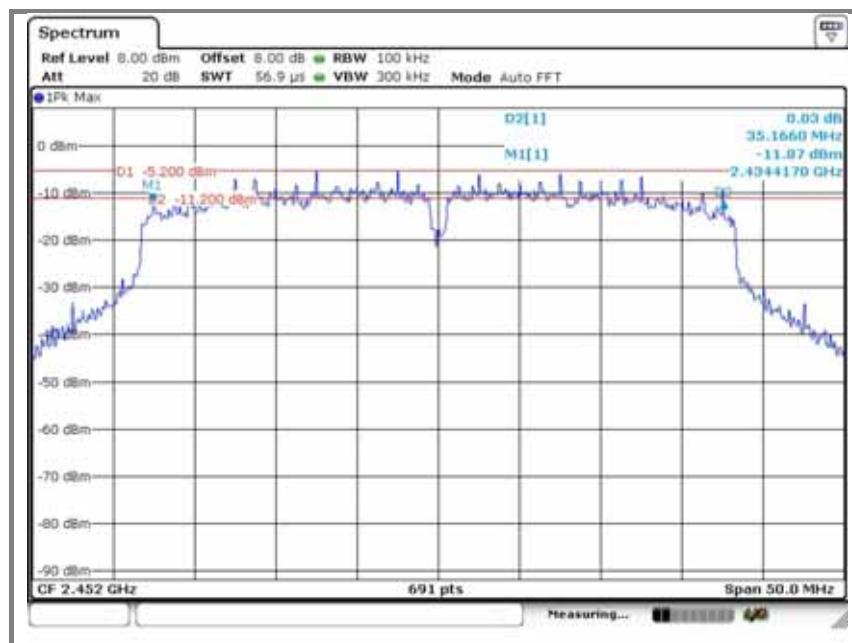
Operation mode: 802.11n40 mode (MIMO)

A. Low channel



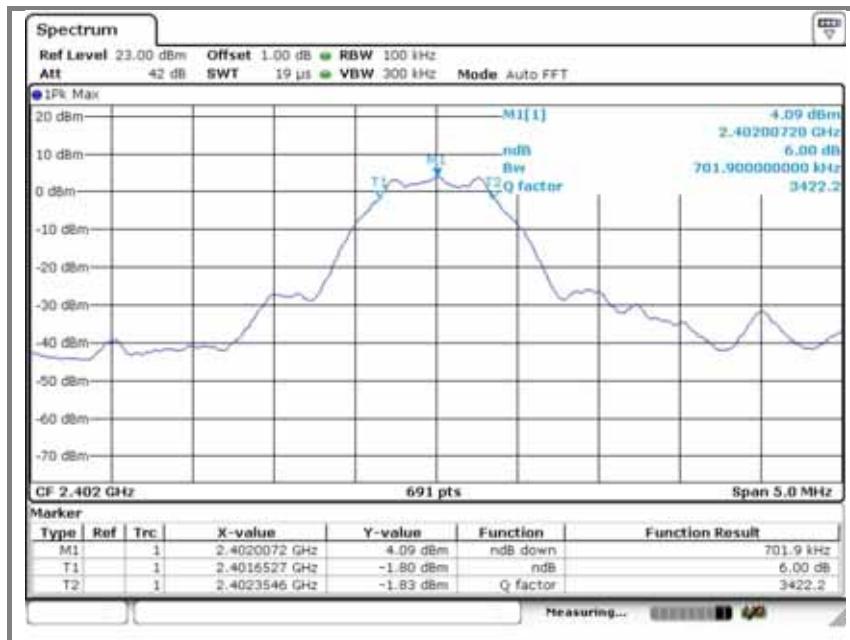
B. Middle channel



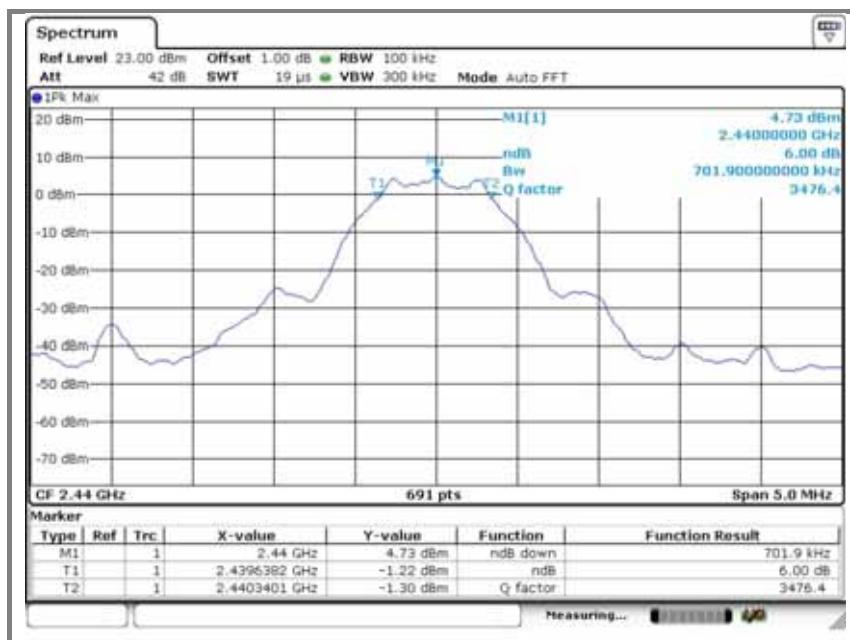
C. High channel

Operation mode: Operation mode: BLE mode (Port1)

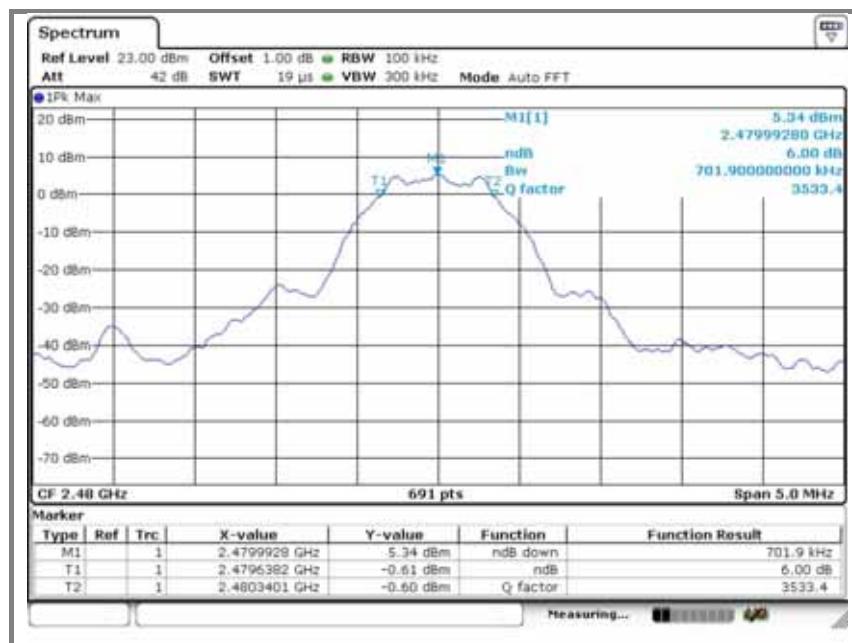
A. Low channel



B. Middle channel

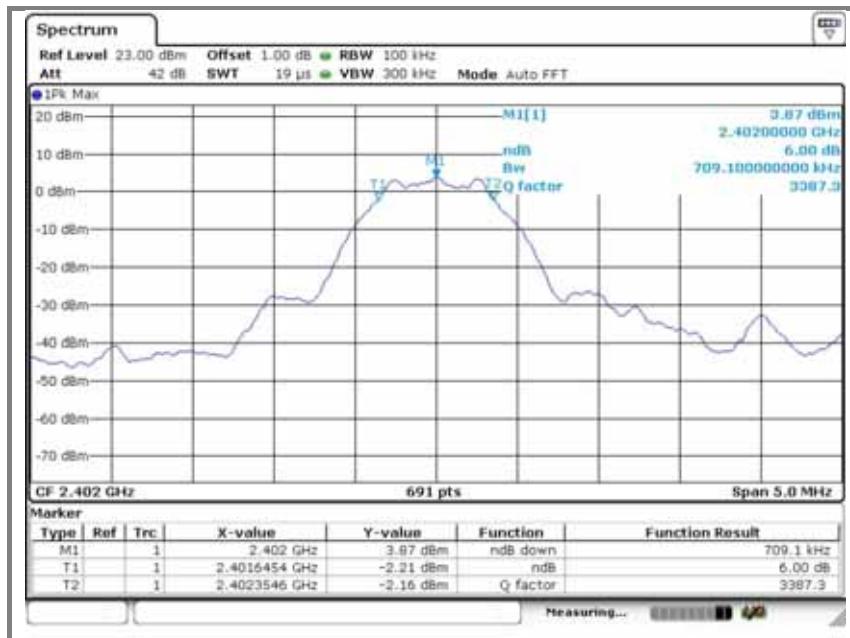


C. High channel

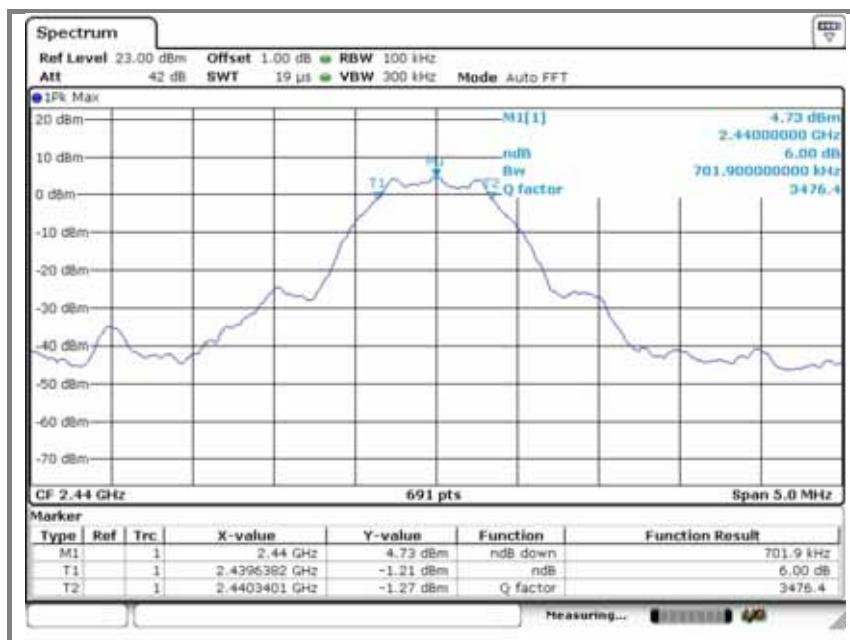


Operation mode: Operation mode: BLE mode (Port2)

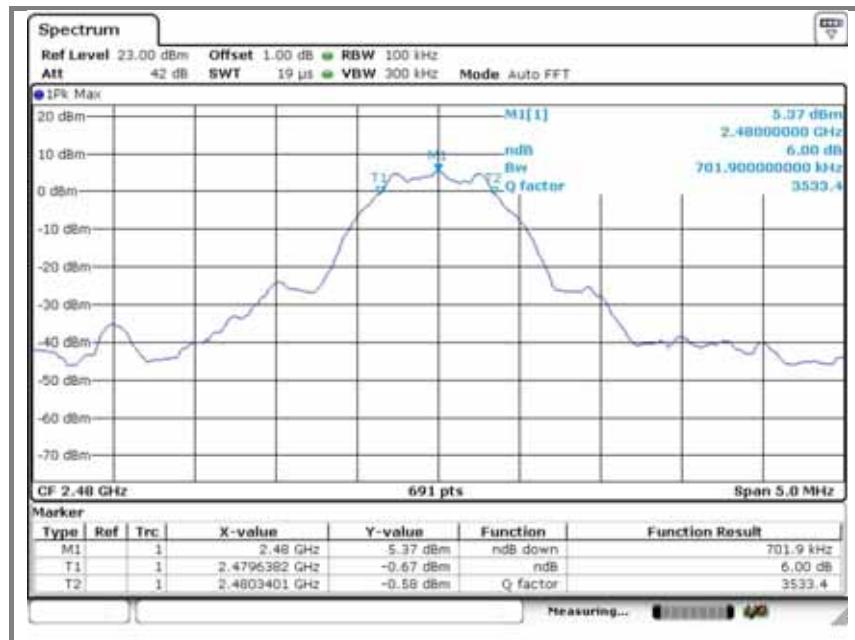
A. Low channel



B. Middle channel




C. High channel



8. Maximum Output Power Measurement

8.1. Test setup.



8.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 6 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

8.3 Test procedure

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter(PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

8.4 Test results

Ambient temperature: 23
 Relative humidity: 42 % R.H.

Mode	Frequency (MHz)	Conducted power (dBm)	Limit (dBm)
802.11b (Ant 1)	2 412	4.17	30
	2 432	4.98	
	2 472	5.75	
802.11b (Ant 2)	2 412	3.43	30
	2 432	4.04	
	2 472	4.39	
802.11g (Ant 1)	2 412	3.78	30
	2 432	4.49	
	2 472	5.34	
802.11g (Ant 2)	2 412	3.26	30
	2 432	3.70	
	2 472	4.12	
802.11n_20 (MIMO)	2 412	5.69	30
	2 432	7.12	
	2 472	4.58	
802.11n_40 (MIMO)	2 422	7.61	30
	2 432	7.29	
	2 462	6.97	
BLE (Port1)	2 402	4.59	30
	2 440	5.26	
	2 480	5.44	
BLE (Port2)	2 402	4.59	30
	2 440	5.25	
	2 480	5.45	

9. Power Spectral Density Measurement

9.1. Test setup



9.2. Limit

< 8dBm @ 3kHz BW

9.3. Test procedure (PKPSD)

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;

Span = 1.5 times the DTS bandwidth

RBW = 3kHz RBW = 100kHz

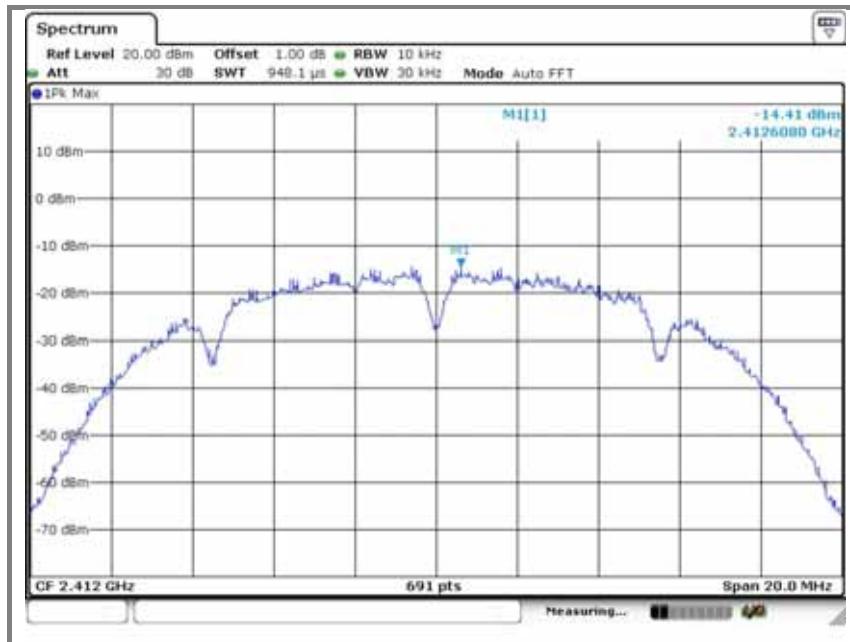
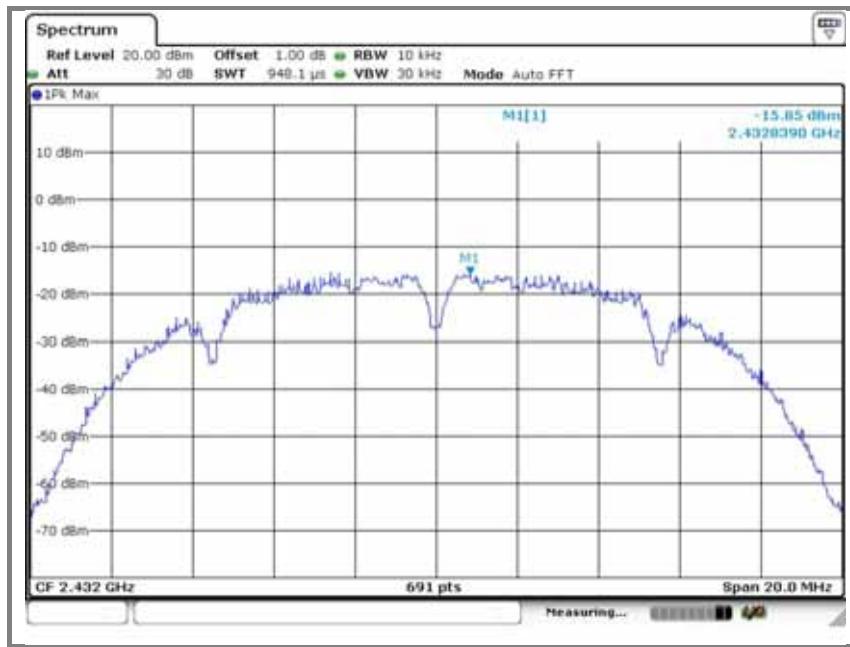
VBW = 3 x RBW, Sweep = Auto couple

Detector function = peak, Trace = max hold

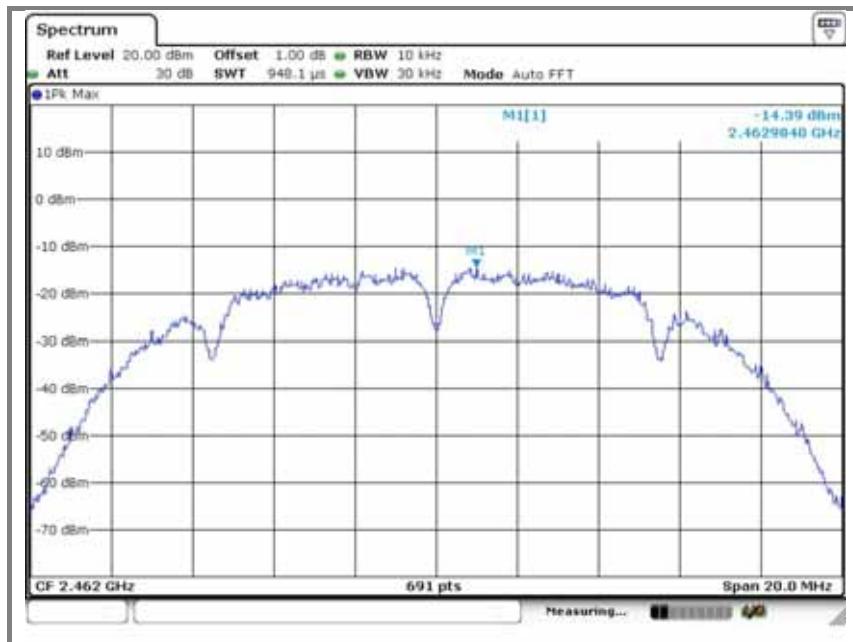
9.4. Test results

Ambient temperature: 23
 Relative humidity: 42 % R.H.

Operation mode	Frequency (MHz)	Peak output power(dBm)	Limit (dBm)
802.11b (Ant 1)	2 412	-14.41	8
	2 432	-15.85	
	2 472	-14.39	
802.11b (Ant 2)	2 412	-16.64	8
	2 432	-16.82	
	2 472	-14.47	
802.11g (Ant 1)	2 412	-15.78	8
	2 432	-15.85	
	2 472	-14.82	
802.11g (Ant 2)	2 412	-16.86	8
	2 432	-17.66	
	2 472	-15.17	
802.11n_20 (MIMO)	2 412	-12.68	8
	2 432	-13.17	
	2 472	-13.59	
802.11n_40 (MIMO)	2 422	-15.45	8
	2 432	-15.99	
	2 462	-17.34	
BLE (Port1)	2 402	-5.85	8
	2 440	-4.88	
	2 480	-4.24	
BLE (Port2)	2 402	-5.92	8
	2 440	-4.90	
	2 480	-4.26	

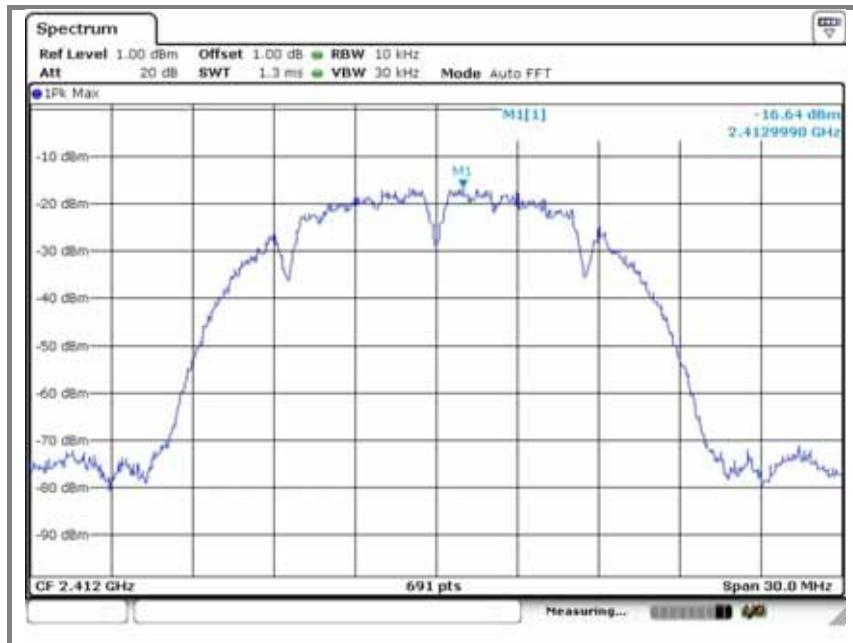
Operation mode: 802.11b mode (Ant 1)**A. Low channel****B. Middle channel**

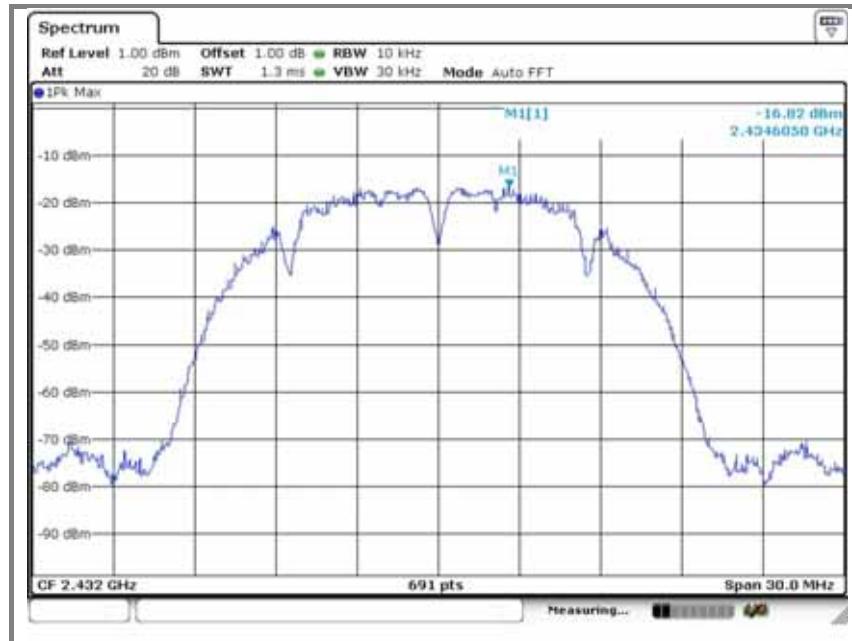
C. High channel

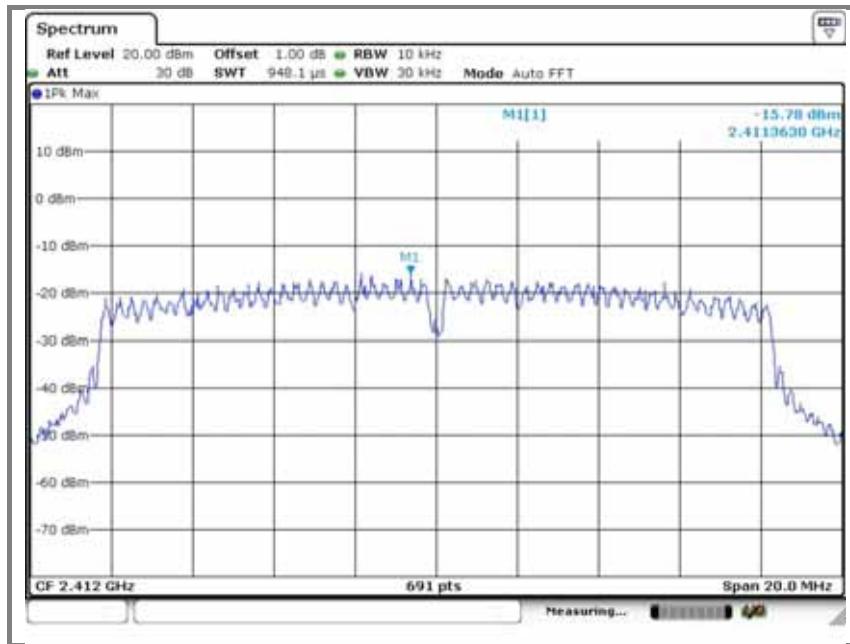
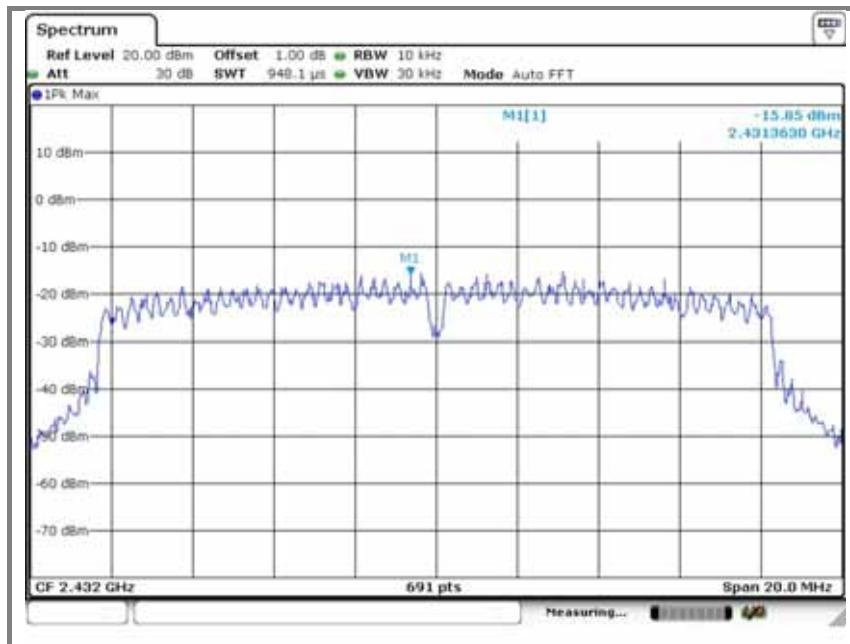


Operation mode: 802.11b mode (Ant 2)

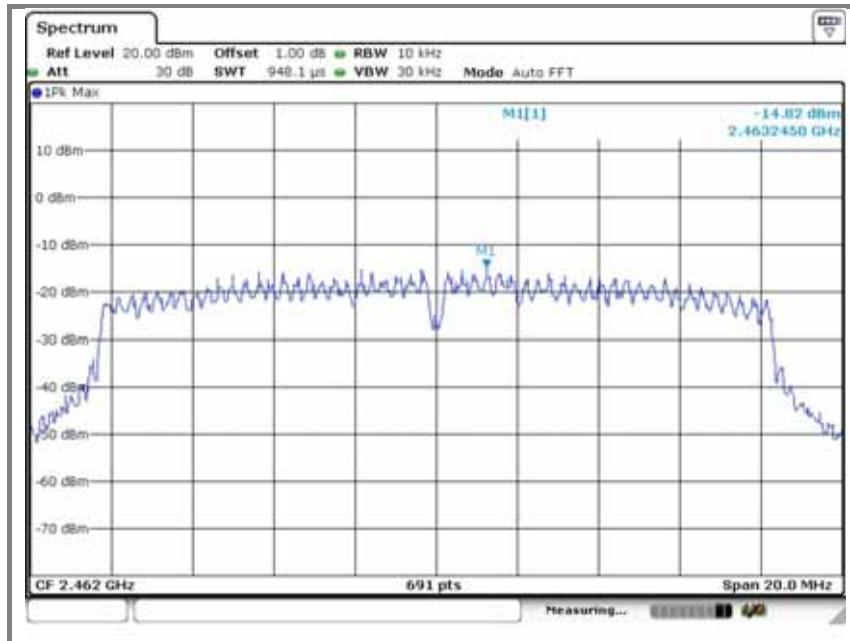
A. Low channel



B. Middle channel**C. High channel**

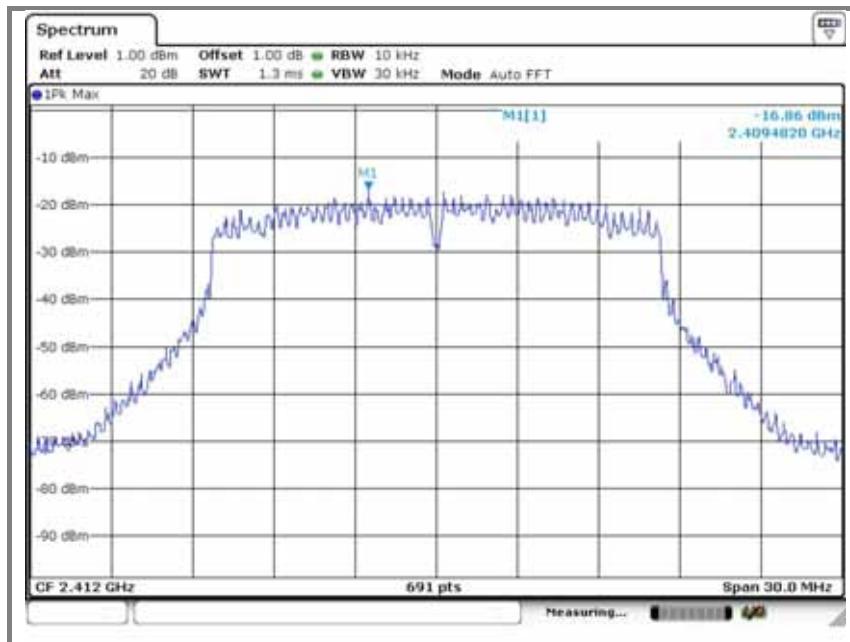
Operation mode: 802.11g mode (Ant 1)**A. Low channel****B. Middle channel**

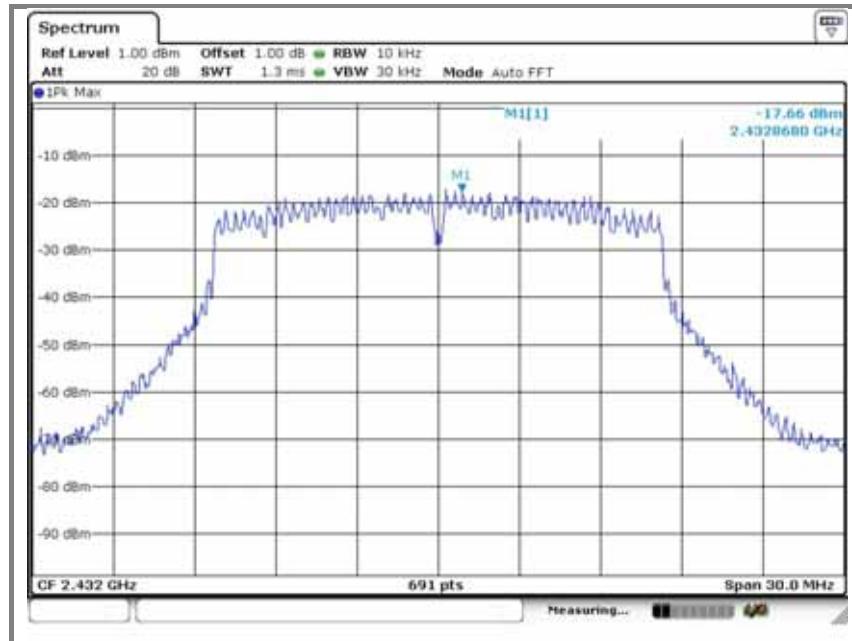
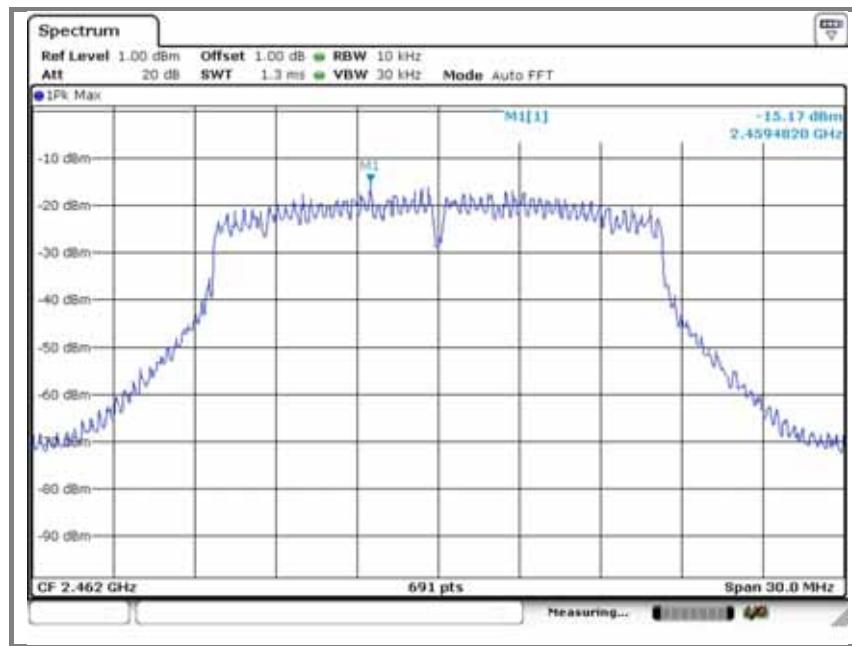
C. High channel

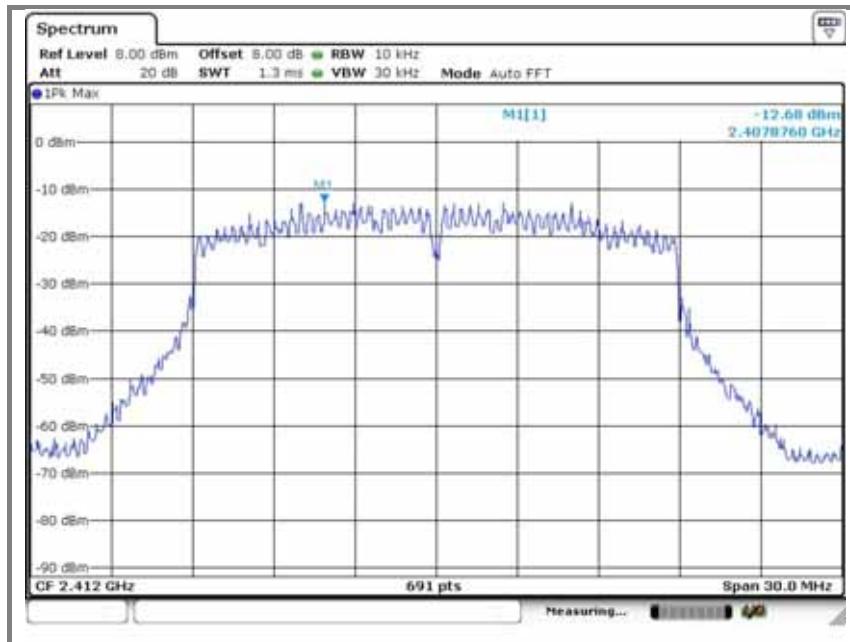
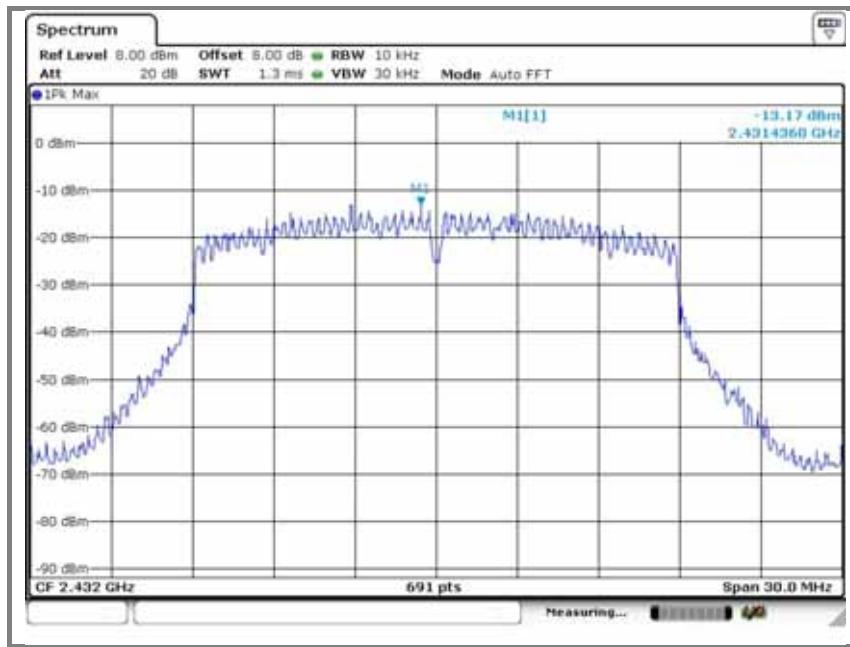


Operation mode: 802.11g mode (Ant 2)

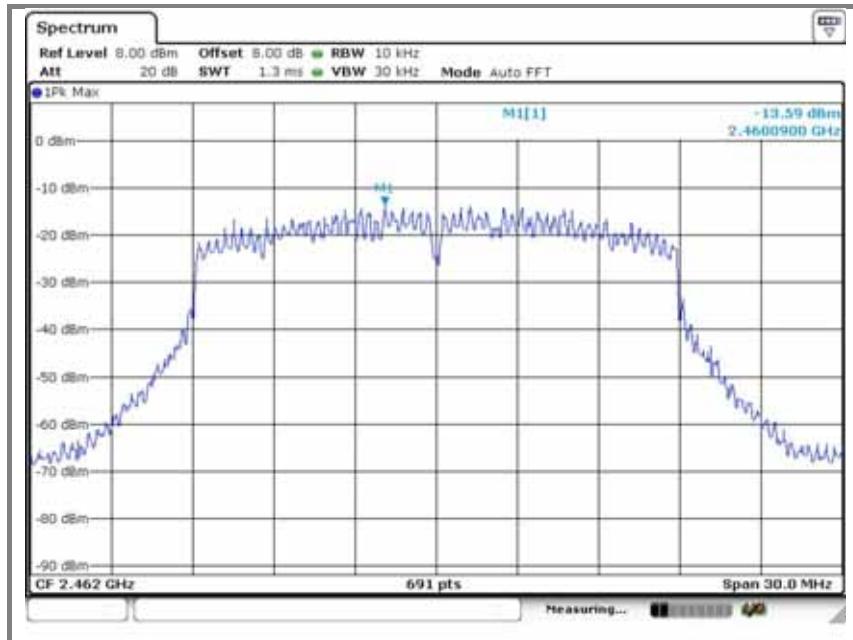
A. Low channel



B. Middle channel**C. High channel**

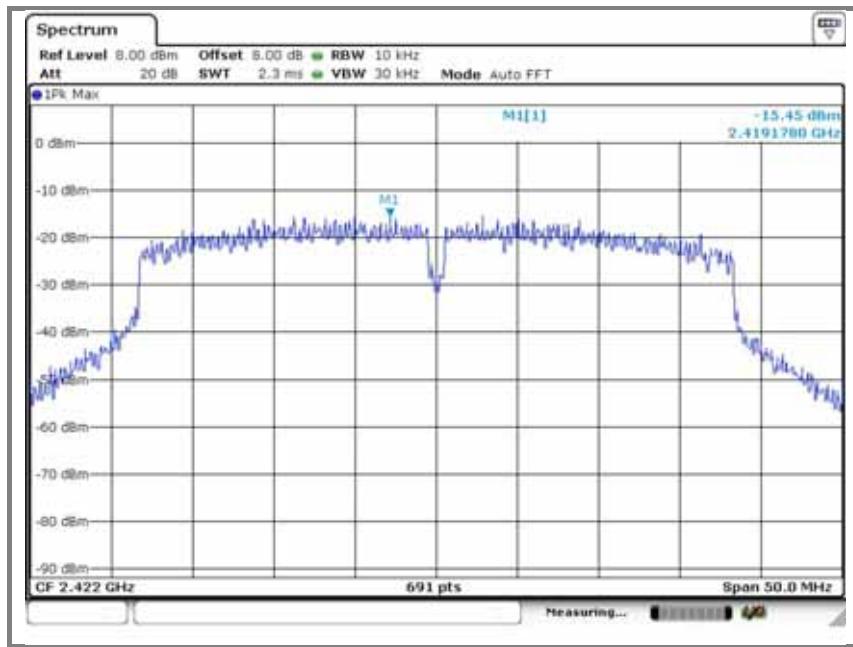
Operation mode: 802.11n_20 mode (MIMO)**A. Low channel****B. Middle channel**

C. High channel

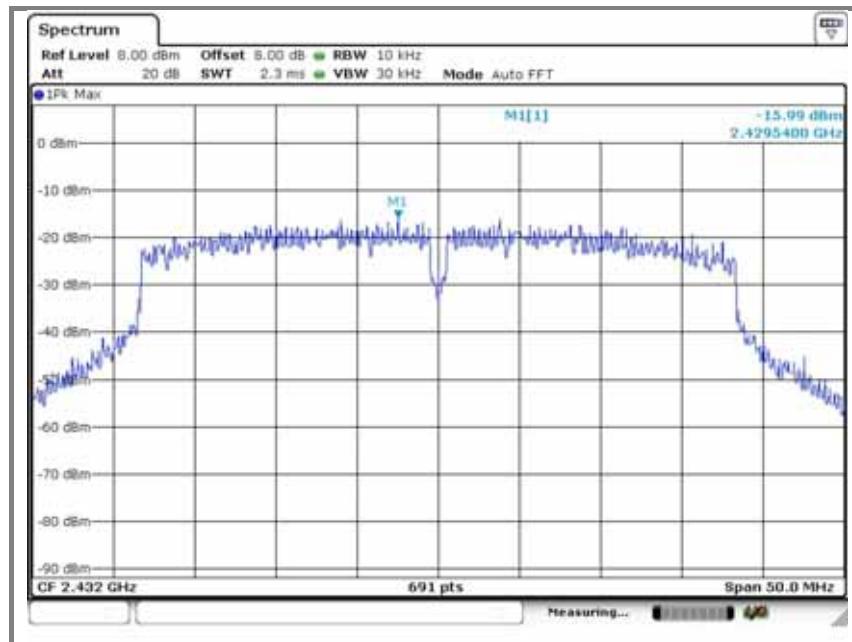


Operation mode: 802.11n_40 mode (MIMO)

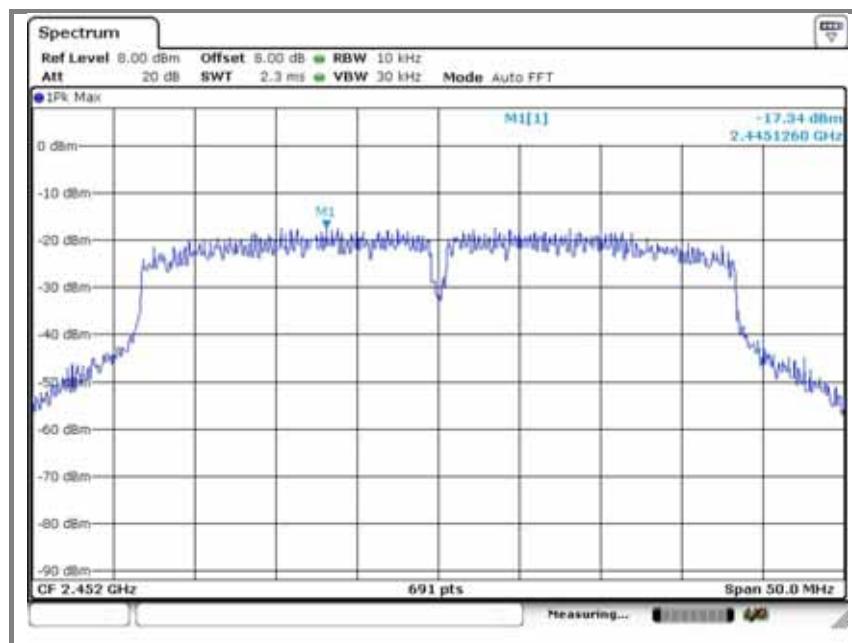
A. Low channel

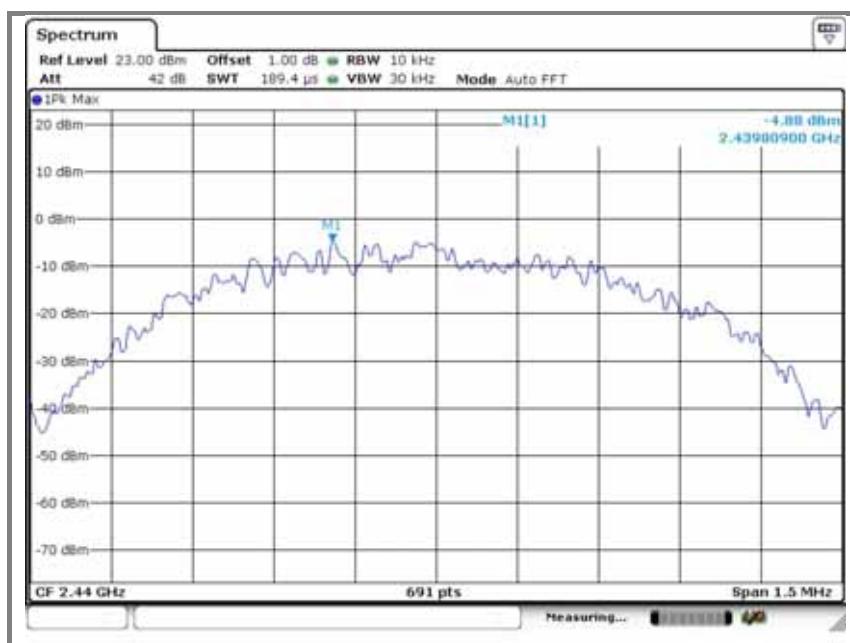


B. Middle channel



C. High channel



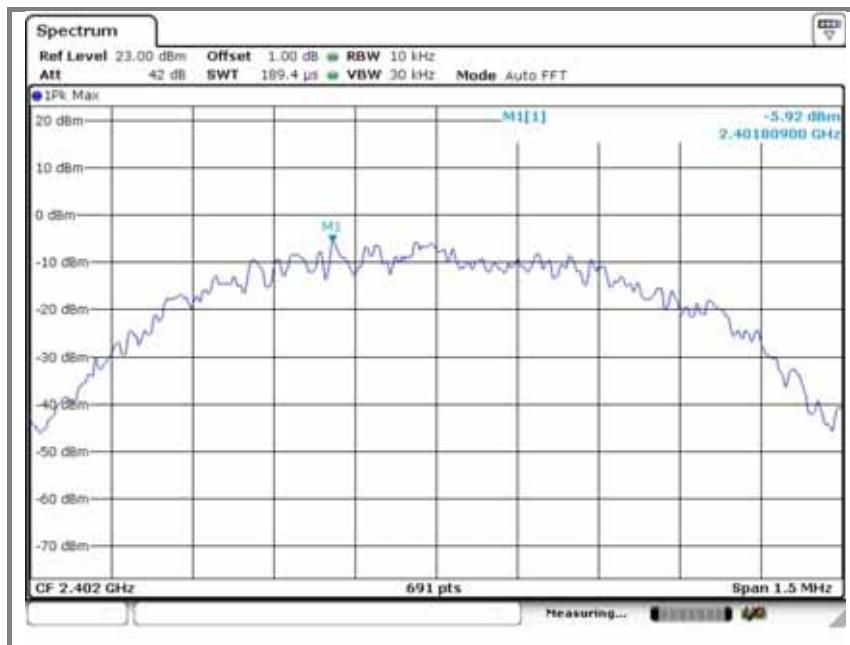
Operation mode: Operation mode: BLE mode (Port1)**A. Low channel****B. Middle channel**

C. High channel



Operation mode: Operation mode: BLE mode (Port2)

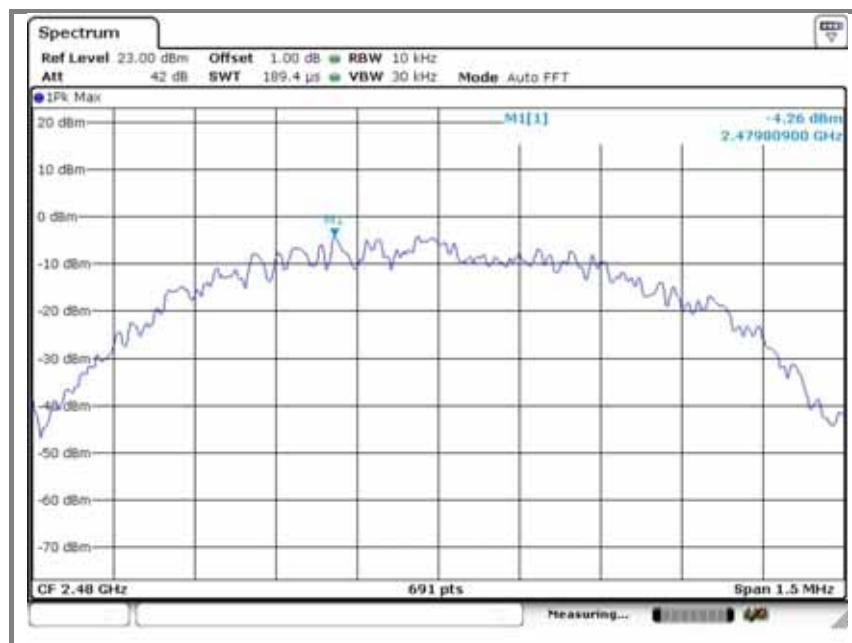
A. Low channel



B. Middle channel



C. High channel



10. Antenna requirement

10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB_i are used.

10.2. Antenna Connected Construction

Antenna used in this product is PCB Pattern antenna
Antenna gain: 2.4 dB_i (802.11b/g/n20/n40) / 4.75 dB_i (BLE)

11. RF exposure evaluation

11.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

Limits for maximum permissible exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Average time
(A) Limits for Occupational / Control exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300 – 1 500	--	--	F/1 500	6
<u>1 500 – 100 000</u>	--	--	<u>1</u>	<u>30</u>

11.2. Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = Power density in mW/cm^2

P_{out} =output power to antenna in mW

G = Numeric gain of the antenna relative to isotropic antenna

$\pi=3.1416$

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm^2 . If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

11.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

11.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: 2.4 dBi (802.11b/g/n20/n40) / 4.75 dBi (BLE)

Mode	Frequency (MHz)	Output Peak power to antenna (dBm)	Antenna gain (dBi)	Antenna Gain (dBi) Numeric	Power density at 20 cm (mW/cm ²)	Power density Limits (mW/cm ²)
802.11b (Ant 1)	2 412	4.17	2.40	1.74	0.006	1
	2 432	4.98			0.007	
	2 472	5.75			0.007	
802.11b (Ant 2)	2 412	3.43	2.40	1.74	0.006	1
	2 432	4.04			0.006	
	2 472	4.39			0.006	
802.11g (Ant 1)	2 412	3.78	2.40	1.74	0.006	1
	2 432	4.49			0.006	
	2 472	5.34			0.007	
802.11g (Ant 2)	2 412	3.26	2.40	1.74	0.005	1
	2 432	3.70			0.006	
	2 472	4.12			0.006	
802.11 n_20 (MIMO)	2 412	5.69	2.40	1.74	0.007	1
	2 432	7.12			0.008	
	2 472	4.58			0.006	
802.11 n_40 (MIMO)	2 422	7.61	2.40	1.74	0.009	1
	2 432	7.29			0.009	
	2 462	6.97			0.008	
BLE (Port1)	2 402	4.59	4.75	2.99	0.008	1
	2 440	5.26			0.009	
	2 480	5.44			0.009	
BLE (Port1)	2 402	4.59	4.75	2.99	0.008	1
	2 440	5.25			0.009	
	2 480	5.45			0.009	

Remark

The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm² .