



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

## MPE TEST REPORT

### FCC Per 47 CFR 2.1091(b)

Report Reference No.....: CTL1412042914-WM

FCC ID.....:

Compiled by

( position+printed name+signature)..  
File administrators Jennifer NI

*Jennifer NI*

Name of the organization performing  
the tests

Test Engineer Jacky Chen

*Jacky Chen*

( position+printed name+signature)..  
Approved by

( position+printed name+signature)..  
Manager Tracy Qi

*Tracy Qi*

Date of issue.....: Jan. 13, 2015

**Test Laboratory Name** .....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,  
Nanshan District, Shenzhen, China 518055

**Applicant's name** .....: **DCOM Technology Co., LTD**

Address.....: Room 8004, B/51, 2<sup>nd</sup> Dist, Shangtang Songzi Park, Minzhi,  
Longhua, Shenzhen, China

#### Test specification:

Standard .....: **FCC Per 47 CFR 2.1091(b)**

TRF Originator .....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF .....: Dated 2011-01

#### Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: **802.11b/g/n wireless ADSL Router**

**FCC ID**.....: **2AD2HDWAN150USERIES**

Trade Mark .....: N/A

Model/Type reference.....: DWA-N150Series, DWA-N300Series

Modulation .....: 802.11b DSSS, 802.11g/n: OFDM

Work Frequency Range.....: 802.11b/g/n(20MHz): 2412~2462MHz

Antenna Type .....: MIMO

Antenna Gain.....: 5dBi

Result.....: **Positive**

# Test Report

|                   |                  |               |
|-------------------|------------------|---------------|
| Test Report No. : | CTL1412042914-WM | Jan. 13, 2015 |
|                   |                  | Date of issue |

Equipment under Test : 802.11b/g/n wireless ADSL Router

Model /Type : DWA-N150Series

Listed Modes : DWA-N300Series

Difference Description : Only the color and model's name is different

**Applicant** : DCOM Technology Co., LTD

Address : Room 8004, B/51, 2<sup>nd</sup> Dist, Shangtang Songzi Park, Minzhi, Longhua, Shenzhen, China

**Manufacturer** : DCOM Technology Co., LTD

Address : Room 8004, B/51, 2<sup>nd</sup> Dist, Shangtang Songzi Park, Minzhi, Longhua, Shenzhen, China


|  |                 |
|--|-----------------|
| <b>Test Result</b> according to the standards on page 4: | <b>Positive</b> |
|--|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Content

|  |          |
|--|----------|
| <b><u>1. SUMMARY</u></b>                             | <b>4</b> |
| 1.1. <b>EUT configuration</b>                        | <b>4</b> |
| 1.2. <b>Equipment Under Test</b>                     | <b>4</b> |
| 1.3. <b>Description of the test mode</b>             | <b>4</b> |
| 1.4. <b>NOTE</b>                                     | <b>5</b> |
| <b><u>2. TEST ENVIRONMENT</u></b>                    | <b>5</b> |
| 2.1. <b>Address of the test laboratory</b>           | <b>6</b> |
| 2.2. <b>Environmental conditions</b>                 | <b>6</b> |
| 2.3. <b>Statement of the measurement uncertainty</b> | <b>6</b> |
| <b><u>3. METHOD OF MEASUREMENT</u></b>               | <b>7</b> |

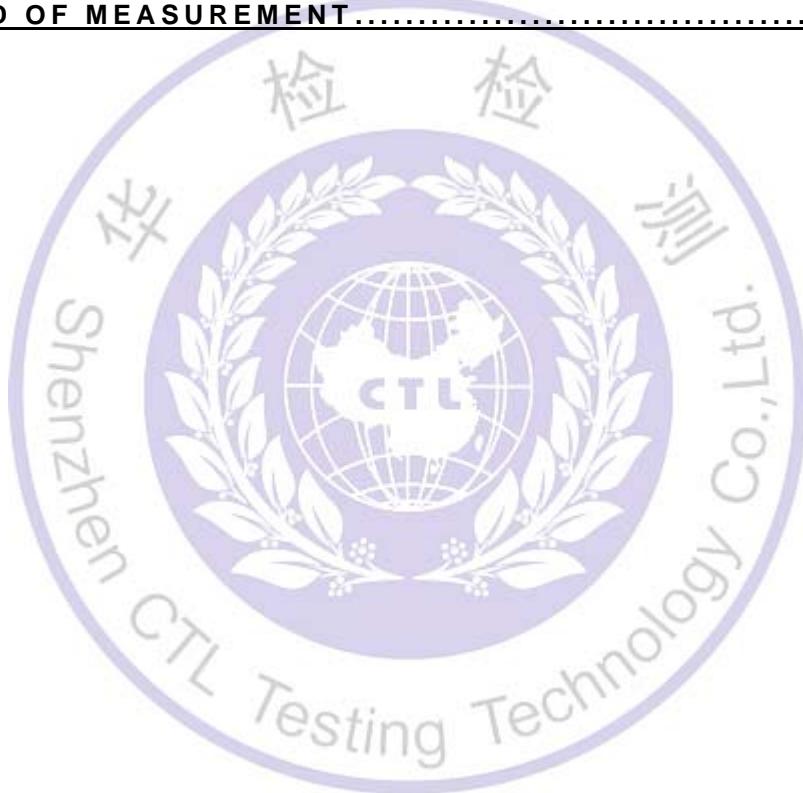

## 1. SUMMARY

### 1.1. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

- AC Adapter

Manufacturer: DCOM Technology Co., LTD  
Model No.: JOD-120100

### 1.2. Equipment Under Test

#### Power supply system utilised

Power supply voltage :  120V / 60 Hz  115V / 60Hz  
 12 V DC  24 V DC  
 Other (specified in blank below)

### 1.3. Description of the test mode

IEEE 802.11b/g/n(HT20): Thirteen channels are provided to the EUT, but only eleventh channels used for USA and Canada.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

#### 1.4. NOTE

1. The EUT is a **WIFI-Speaker**, The functions of the EUT listed as below:


|                         | Test Standards                           | Reference Report |
|-------------------------|--|------------------|
| WLAN 802.11b/g, 802.11n | FCC Part 15 Subpart C<br>(Section15.247) | CTL1412042914-WF |
|                         | FCC Per 47 CFR 2.1091(b)                 | CTL1412042914-WM |

2. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|-------------|-----------|-----------|-----------|
| 802.11b             | ✓           | —         | —         | —         |
| 802.11g             | ✓           | —         | —         | —         |
| 802.11n(20MHz)      | ✓           | —         | —         | —         |

3. The EUT incorporates a MIMO function, Physically, the EUT provides two completed transmitter and two completed receivers.

| Modulation Mode | TX Function |
|-----------------|-------------|
| 802.11b         | 1TX         |
| 802.11g         | 1TX         |
| 802.11n (20MHz) | 2TX         |

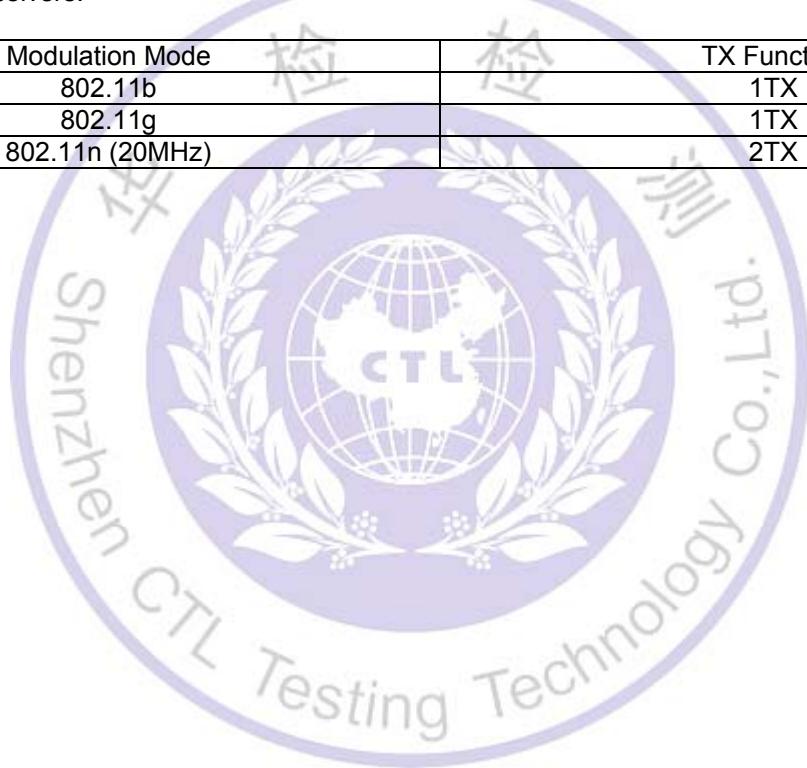

## 2. TEST ENVIRONMENT

### 2.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2009) and CISPR Publication 22.

### 2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

### 2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10dB                  | (1)   |
| Radiated Emission     | 1~12.75GHz | 4.32dB                  | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.22dB                  | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### **3. Method of measurement**

#### **3.1. Applicable Standard**

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

#### **3.2. Limit**

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 6                       |
| 3.0 – 30                                    | 1842/f                       | 4.89/f                       | (900/f)*                            | 6                       |
| 30 – 300                                    | 61.4                         | 0.163                        | 1.0                                 | 6                       |
| 300 – 1500                                  | /                            | /                            | f/300                               | 6                       |
| 1500 – 100,000                              | /                            | /                            | 5                                   | 6                       |

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 30                      |
| 3.0 – 30                                    | 824/f                        | 2.19/f                       | (180/f)*                            | 30                      |
| 30 – 300                                    | 27.5                         | 0.073                        | 0.2                                 | 30                      |
| 300 – 1500                                  | /                            | /                            | f/1500                              | 30                      |
| 1500 – 100,000                              | /                            | /                            | 1.0                                 | 30                      |

F=frequency in MHz

\*=Plane-wave equivalent power density

#### **3.3. MPE Calculation Method**

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

S=PG/4πR<sup>2</sup>

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna is 5 dBi, the RF power density can be obtained.

## TEST RESULTS

### For 802.11 b

| Test Frequency (MHz) | Minimum Separation Distance (cm) | Output Power (dBm) | Output Power (mW) | Antenna Gain (Nemeric) | Power Density Limit (mW/cm <sup>2</sup> ) | Power Density At 20 cm (mW/cm <sup>2</sup> ) | Test Results |
|----------------------|----------------------------------|--------------------|-------------------|------------------------|---|--|--------------|
| 2412                 | 20.00                            | 9.36               | 8.63              | 3.1623                 | 1.000                                     | 0.0543                                       | Pass         |
| 2437                 | 20.00                            | 9.43               | 8.77              | 3.1623                 | 1.000                                     | 0.0552                                       | Pass         |
| 2462                 | 20.00                            | 9.31               | 8.53              | 3.1623                 | 1.000                                     | 0.0537                                       | Pass         |

### For 802.11 g

| Test Frequency (MHz) | Minimum Separation Distance (cm) | Output Power (dBm) | Output Power (mW) | Antenna Gain (Nemeric) | Power Density Limit (mW/cm <sup>2</sup> ) | Power Density At 20 cm (mW/cm <sup>2</sup> ) | Test Results |
|----------------------|----------------------------------|--------------------|-------------------|------------------------|---|--|--------------|
| 2412                 | 20.00                            | 9.26               | 7.38              | 3.1623                 | 1.000                                     | 0.0531                                       | Pass         |
| 2437                 | 20.00                            | 9.23               | 7.45              | 3.1623                 | 1.000                                     | 0.0527                                       | Pass         |
| 2462                 | 20.00                            | 9.21               | 7.13              | 3.1623                 | 1.000                                     | 0.0524                                       | Pass         |

### For 802.11 n (20MHz)

| Test Frequency (MHz) | Minimum Separation Distance (cm) | Output Power (dBm) |           |       | Output Power (mW) | Antenna Gain (Nemeric) | Power Density Limit (mW/cm <sup>2</sup> ) | Power Density At 20 cm (mW/cm <sup>2</sup> ) | Test Results |
|----------------------|----------------------------------|--------------------|-----------|-------|-------------------|------------------------|---|--|--------------|
|                      |                                  | Antenna 1          | Antenna 2 | Total |                   |                        |   |  |              |
| 2412                 | 20.00                            | 6.42               | 6.49      | 9.47  | 8.85              | 6.3241                 | 1.000                                     | 0.1114                                       | Pass         |
| 2437                 | 20.00                            | 6.39               | 6.41      | 9.41  | 8.73              | 6.3241                 | 1.000                                     | 0.1098                                       | Pass         |
| 2462                 | 20.00                            | 6.50               | 6.38      | 9.45  | 8.81              | 6.3241                 | 1.000                                     | 0.1108                                       | Pass         |

## 4. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 (b) for the controlled RF Exposure.

.....End of Report.....