




# FCC Test Report

**Equipment** : 2.1 Audio Docking Station  
**Brand Name** : j5create  
**Model No.** : JSS800  
**FCC ID** : 2AD37JSS800  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DSS  
**Applicant** : KaiJet Technology International Limited  
6F., No.113, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan, R.O.C.  
**Manufacturer** : Magic Control Technology Corp.  
10F., No.123, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan R.O.C.

The product sample received on Nov. 19, 2015 and completely tested on Dec. 21, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

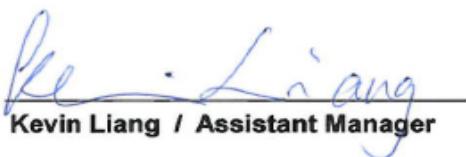  
Kevin Liang / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment .....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	7
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT.....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	The Worst Case Power Setting Parameter .....	9
2.3	The Worst Case Measurement Configuration .....	10
2.4	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>14</b>
3.1	AC Power-line Conducted Emissions .....	14
3.2	Measuring Instruments.....	14
3.3	20dB Bandwidth and Carrier Frequency Separation.....	19
3.4	Number of Hopping Frequencies .....	21
3.5	Time of Occupancy (Dwell Time) .....	23
3.6	RF Output Power.....	25
3.7	Transmitter Radiated Bandedge Emissions.....	27
3.8	Transmitter Radiated Unwanted Emissions .....	34
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>58</b>

### APPENDIX A. TEST PHOTOS

### APPENDIX B. PHOTOGRAPHS OF EUT



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.4210520MHz 46.98 (Margin 10.45dB) - QP 40.78 (Margin 6.65 dB) - AV	FCC 15.207	Complied
3.3	15.247(a)	20dB Bandwidth	EDR: 1.2460MHz	N/A	Complied
3.3	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0029MHz	ChS $\geq$ BW <sub>20dB</sub> x2/3.	Complied
3.4	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	N $\geq$ 15	Complied
3.5	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.315sec	0.4 s within 0.4 x N	Complied
3.6	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: 0.34 EDR: -0.37	Power [dBm] BR:21 EDR:21	Complied
3.7	15.247(d)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.52MHz 57.42 (Margin 16.58dB) - PK 45.34 (Margin 8.66dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.8	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:158.04MHz 40.42 (Margin 3.08dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	0.34
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power.				

#### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information		
Ant. Cat.	Ant. Type	Gain (dBi)
Integral	Build-in PCB	1.76



### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:	
<input type="checkbox"/> Other:	

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 78.38% - test mode single channel-DH5	1.06
<input checked="" type="checkbox"/> 78.76% - test mode single channel-DH5	1.04

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.

### 1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> External AC adapter	<input checked="" type="checkbox"/> From Host System	<input type="checkbox"/> From Battery



## 1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter 1	Brand Name	Asian Power Devices Inc	Model Name	WA-40E19FU-AAAF
	Power Rating	I/P: 100-240V ~ 50-60Hz, 1A Max ; O/P: 19V --- 2.1A		
	Power Cord	Wall mount, no power cord.		
AC Adapter 2	Brand Name	Powertron Electronics Corp.	Model Name	PA1030-190T3A189
	Power Rating	I/P: 100-240V ~ 50-60Hz, 0.8A ; O/P: 19V --- 1.89A 36W Max		
	Power Cord	0.8 meter, non-shielded cable, w/o ferrite core		
USB Cable 1	Brand Name	Hisetec Electronic Co.,Ltd.	Model Name	5CU12060000001
	Type	USB C Type M to USB 2.0 AM		
	Signal Line	0.6 meter, Shielded cable, w/o ferrite core		
USB Cable 2	Brand Name	Hisetec Electronic Co.,Ltd.	Model Name	5CU12060000001
	Type	USB C Type M to USB 2.0 AM		
	Signal Line	0.6 meter, Shielded cable, w/o ferrite core		
Audio Cable	Brand Name	Hisetec Electronic Co.,Ltd.	Model Name	5CZ02100000001
	Signal Line	1 meter, non-shielded cable, w/o ferrite core		

Note: Regarding to more detail and other information, please refer to user manual.

Support Equipment - Radiated Emission			
No.	Equipment	Brand Name	Model Name
1	Notebook	DELL	E5540
2	AC Adapter for Notebook	DELL	HA65NM130

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- FCC Public Notice DA 00-705

## 1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan City, Taiwan, R.O.C.	
Test Site Registration Number: 636805			
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Anthony	22°C / 59%
RF Conducted	TH01-HY	Howard	23°C / 64%
Radiated Emission	03CH09-HY	Terry	21.9°C / 59%



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	
AC power-line conducted emissions	±2.3 dB	
Emission bandwidth, 6dB bandwidth	±0.6 %	
RF output power, conducted	±0.1 dB	
Power density, conducted	±0.6 dB	
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature	±0.8 °C	
Humidity	±5 %	
DC and low frequency voltages	±0.9%	
Time	±1.4 %	
Duty Cycle	±0.6 %	



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains ( $N_{TX}$ )	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	0.34	BR-1Mbps
EDR	1	2 Mbps	EDR-2Mbps	-0.78	
EDR	1	3 Mbps	EDR-3Mbps	-0.37	

Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).  
Note 2: Bluetooth EDR uses a combination of  $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).  
Note 3: Modulation modes consist below configuration:  
    FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps:  $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)  
Note 4: RF output power specifies that Maximum Peak Conducted Output Power.

### 2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	ISRT_ 2.1.10.3488		
Modulation Mode	2402 MHz	2441 MHz	2480 MHz
BR,1Mbps	Default	Default	Default
EDR,2Mbps	Default	Default	Default
EDR,3Mbps	Default	Default	Default



## 2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Radio link with adapter 1
2	Radio link with adapter 2

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps


The Worst Case Mode for Following Conformance Tests							
<b>Tests Item</b>	Transmitter Radiated Bandedge Emissions Transmitter Radiated Unwanted Emissions						
<b>Test Condition</b>	Radiated measurement						
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.						
<b>Operating Mode</b>	Operating Mode Description						
1	Radio link with adapter 1						
2	Radio link with adapter 2						
<b>Modulation Mode</b>	BR-1Mbps、EDR-2Mbps、EDR-3Mbps						
<b>Orthogonal Planes of EUT</b>	<table><thead><tr><th>X Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td></tr><tr><td>V</td><td></td></tr></tbody></table>	X Plane	Z Plane			V	
X Plane	Z Plane						
V							

## 2.4 Test Setup Diagram


Test Setup Diagram – AC Line Conducted Emission Test (Mode 1)

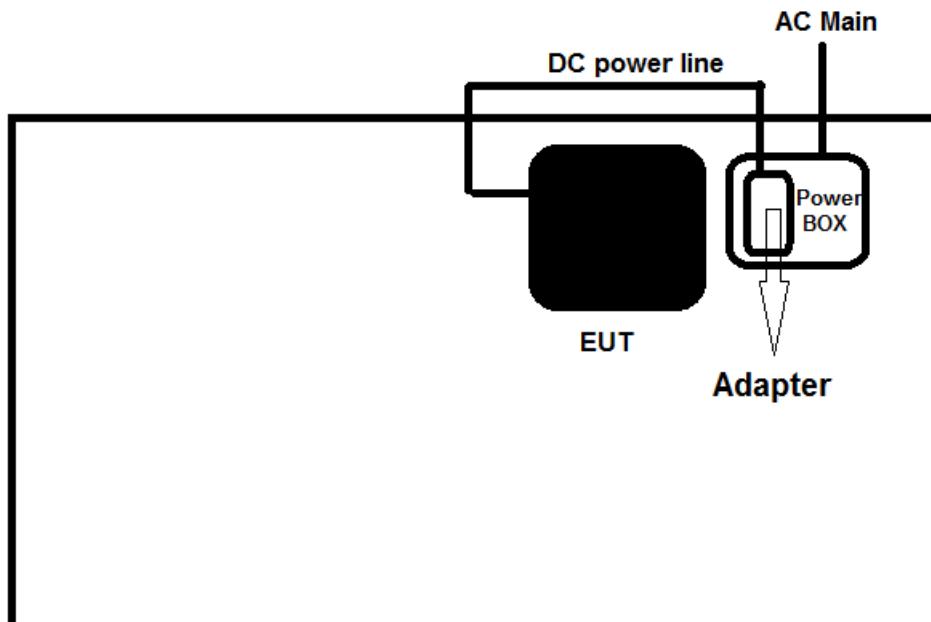


Test Setup Diagram – AC Line Conducted Emission Test (Mode 2)

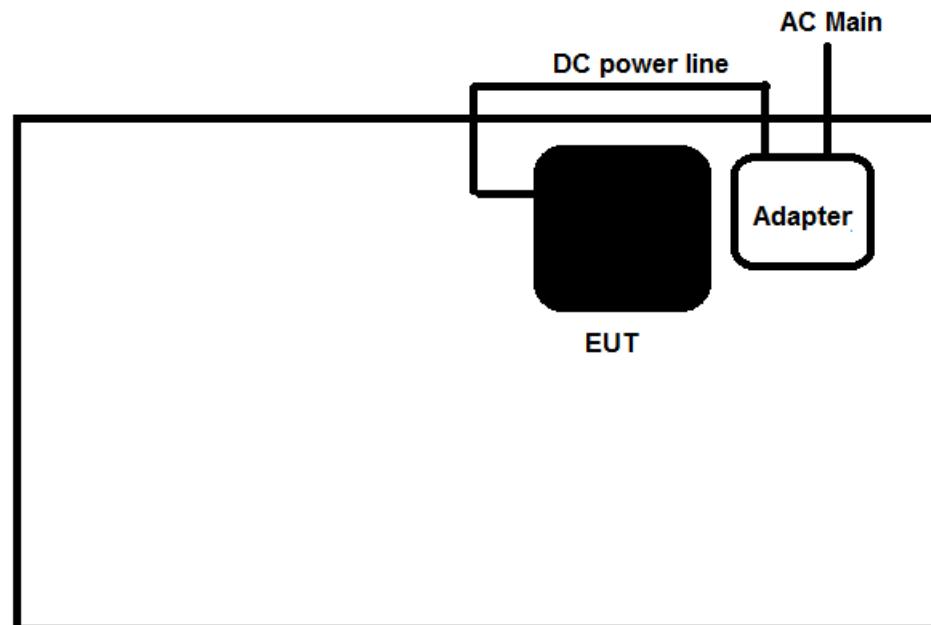


Test Setup Diagram - Radiated Below 1GHz Test (Mode 1)

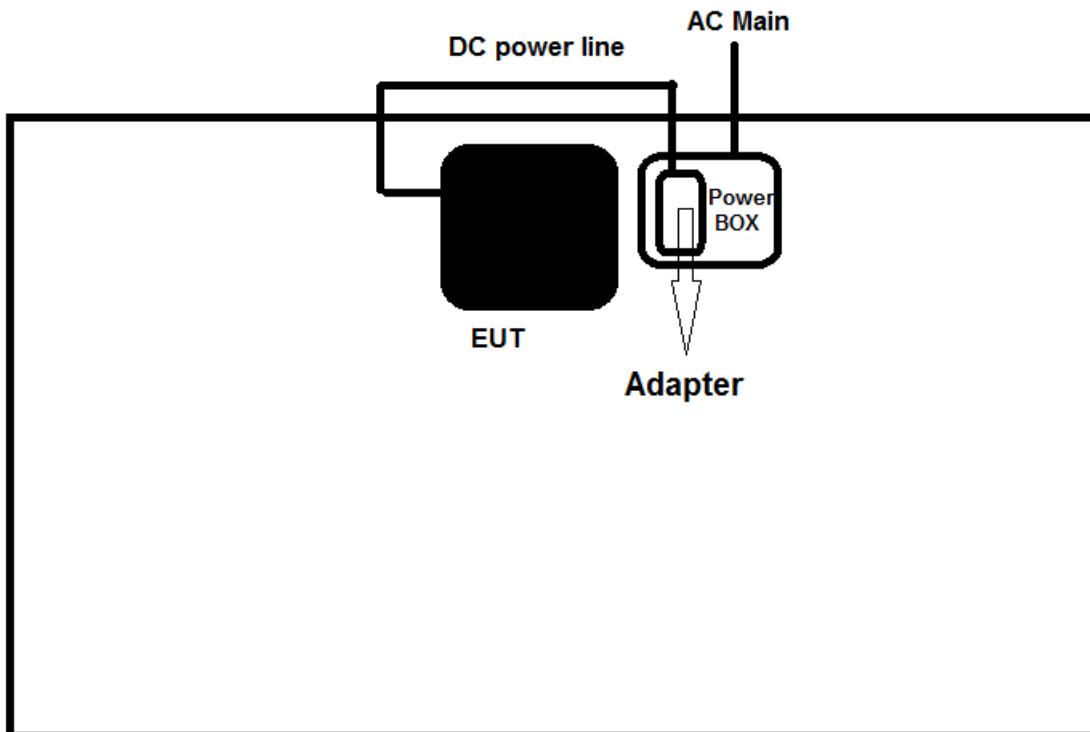

Test Setup Diagram - Radiated Below 1GHz Test (Mode 2)

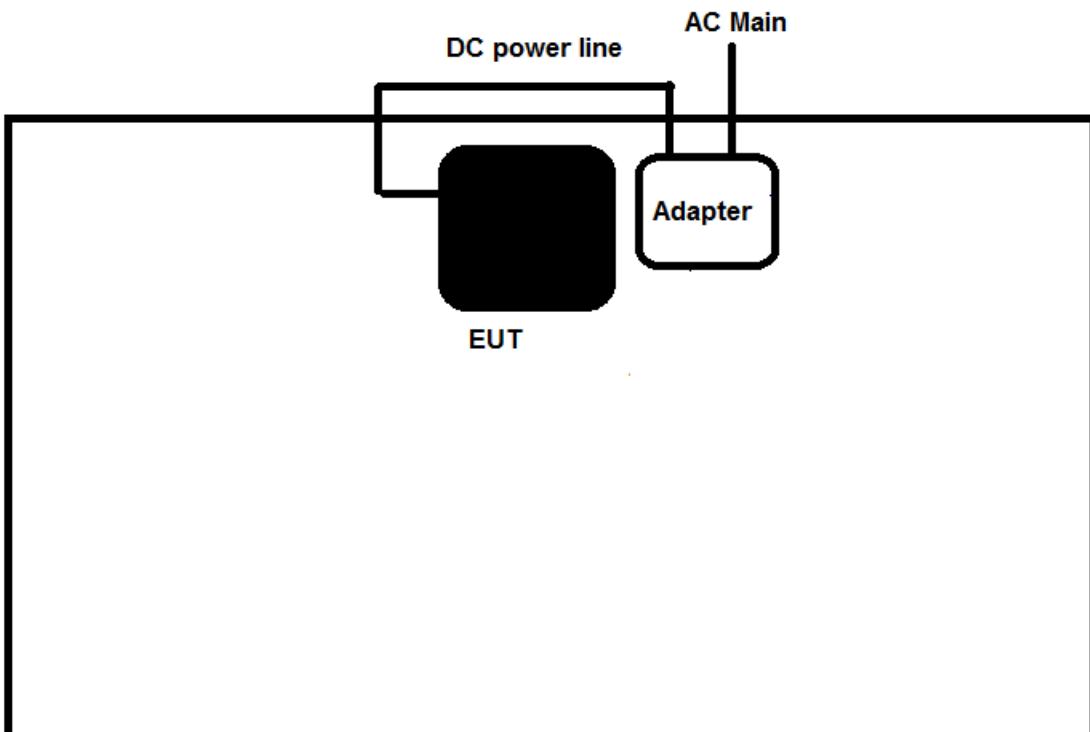

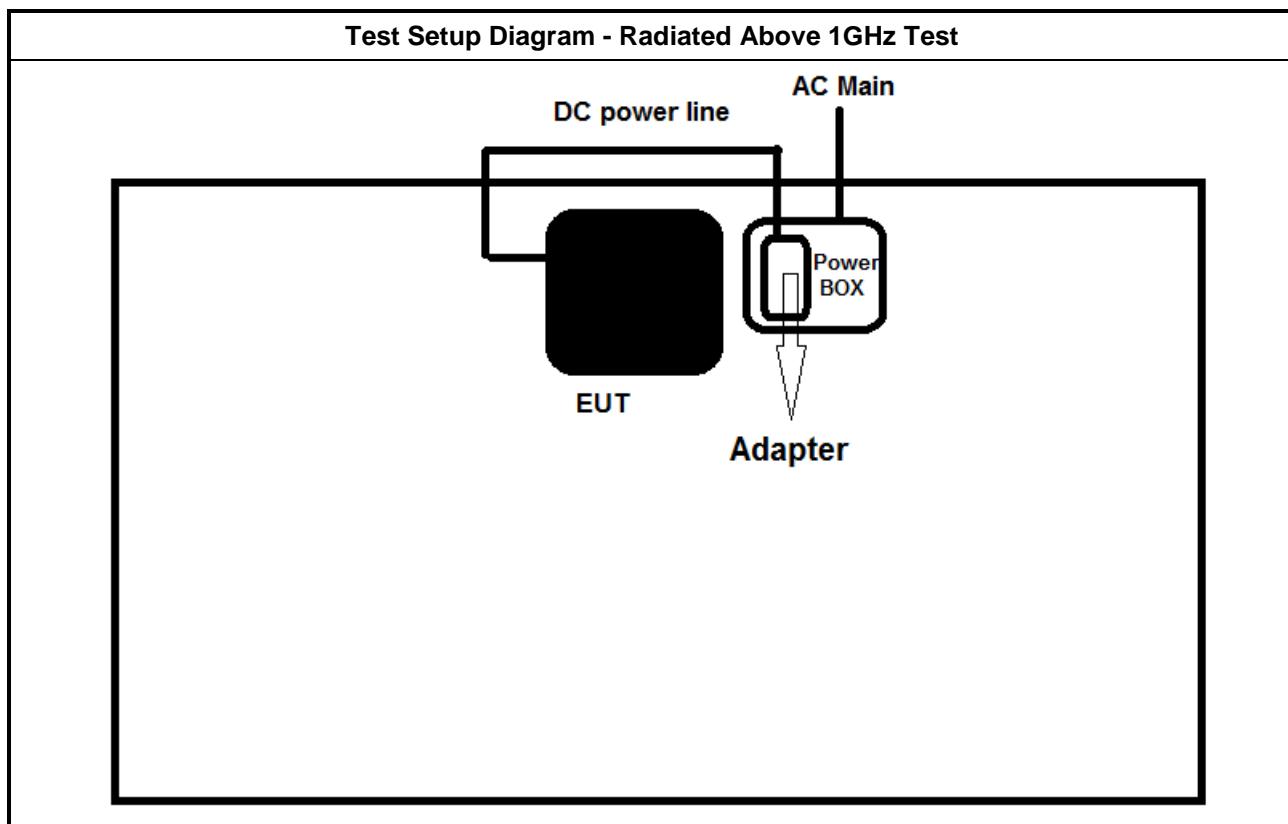

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


#### 3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.2.1 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.


##### 3.2.2 Test Setup

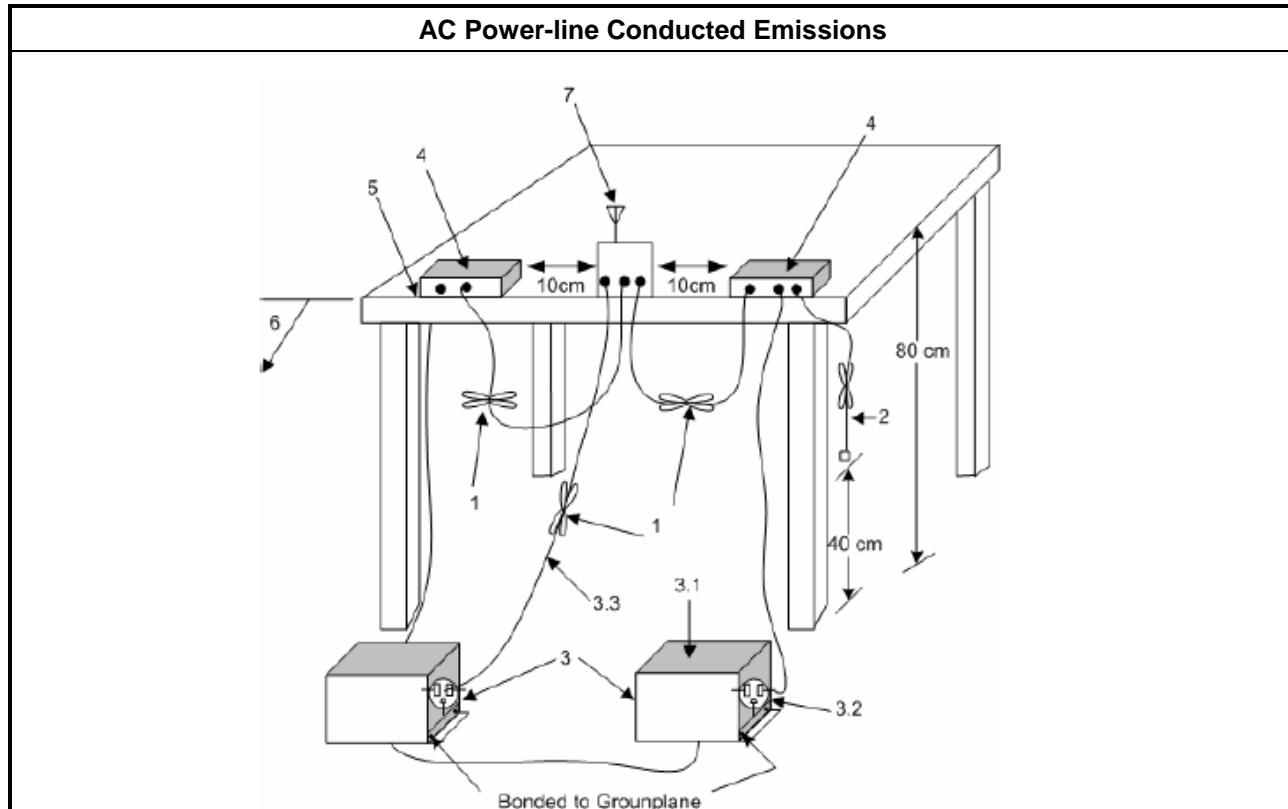





## 3.2.3 Test Result of AC Power-line Conducted Emissions

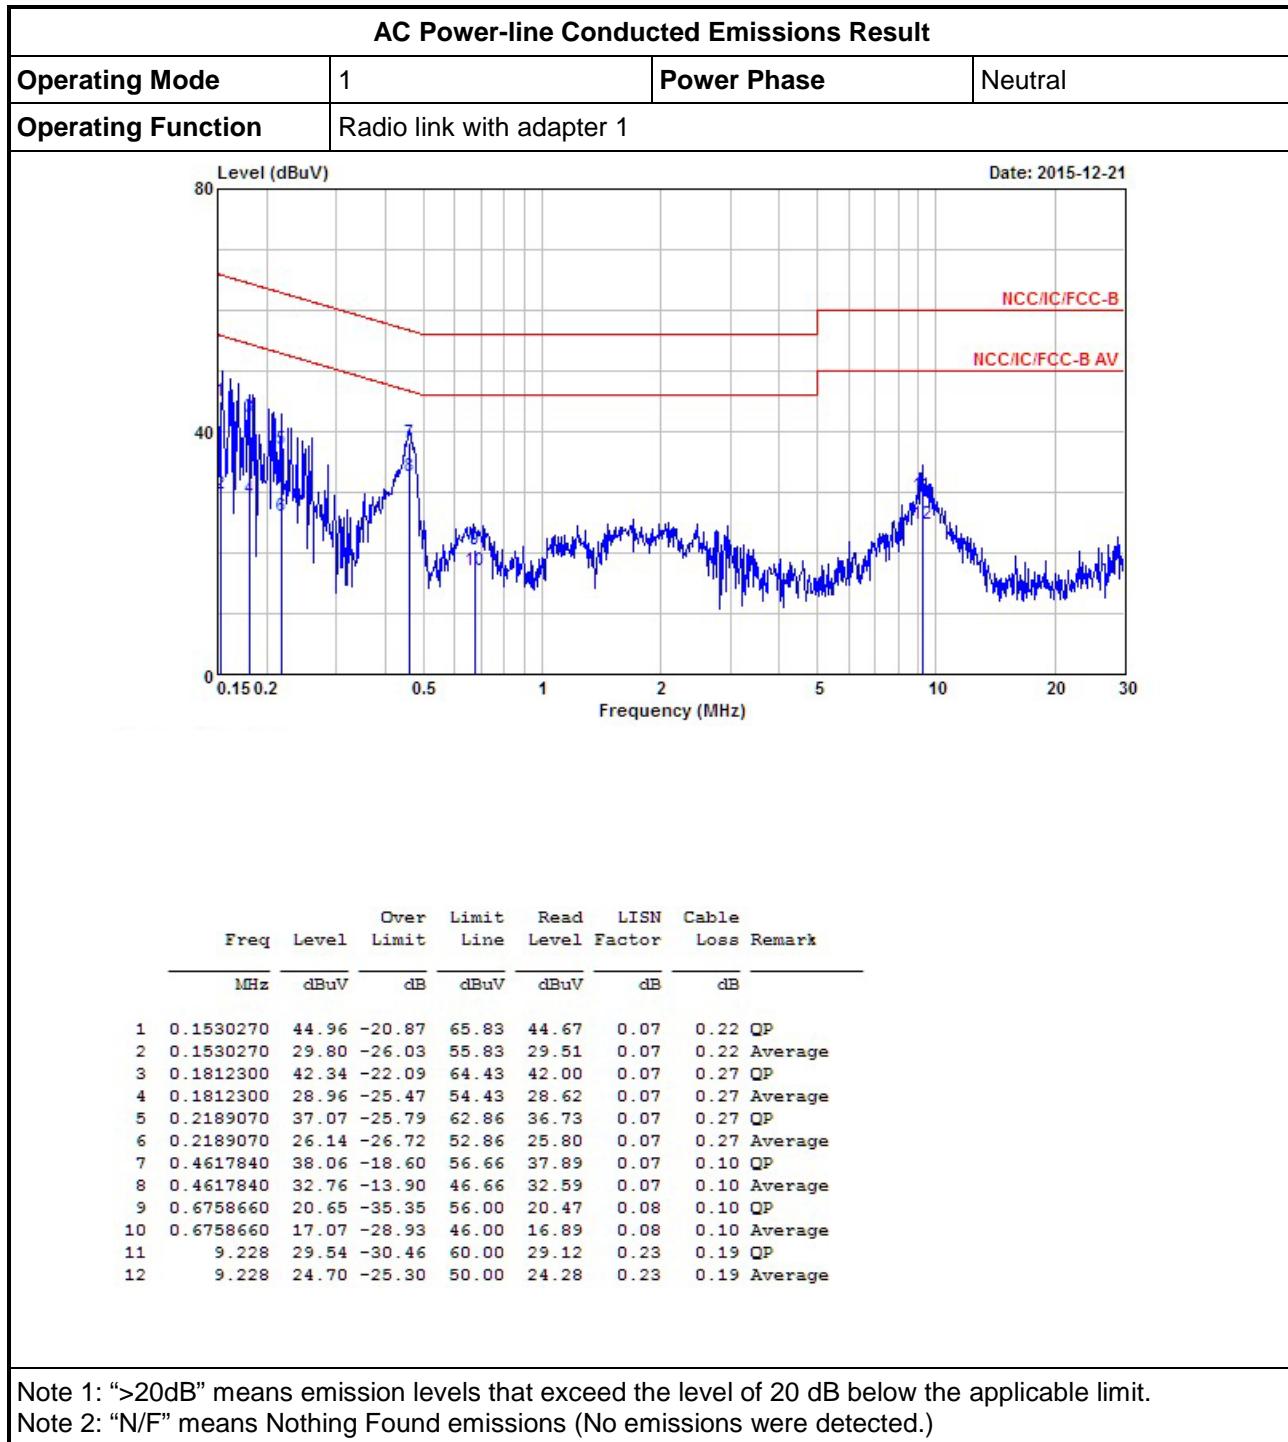

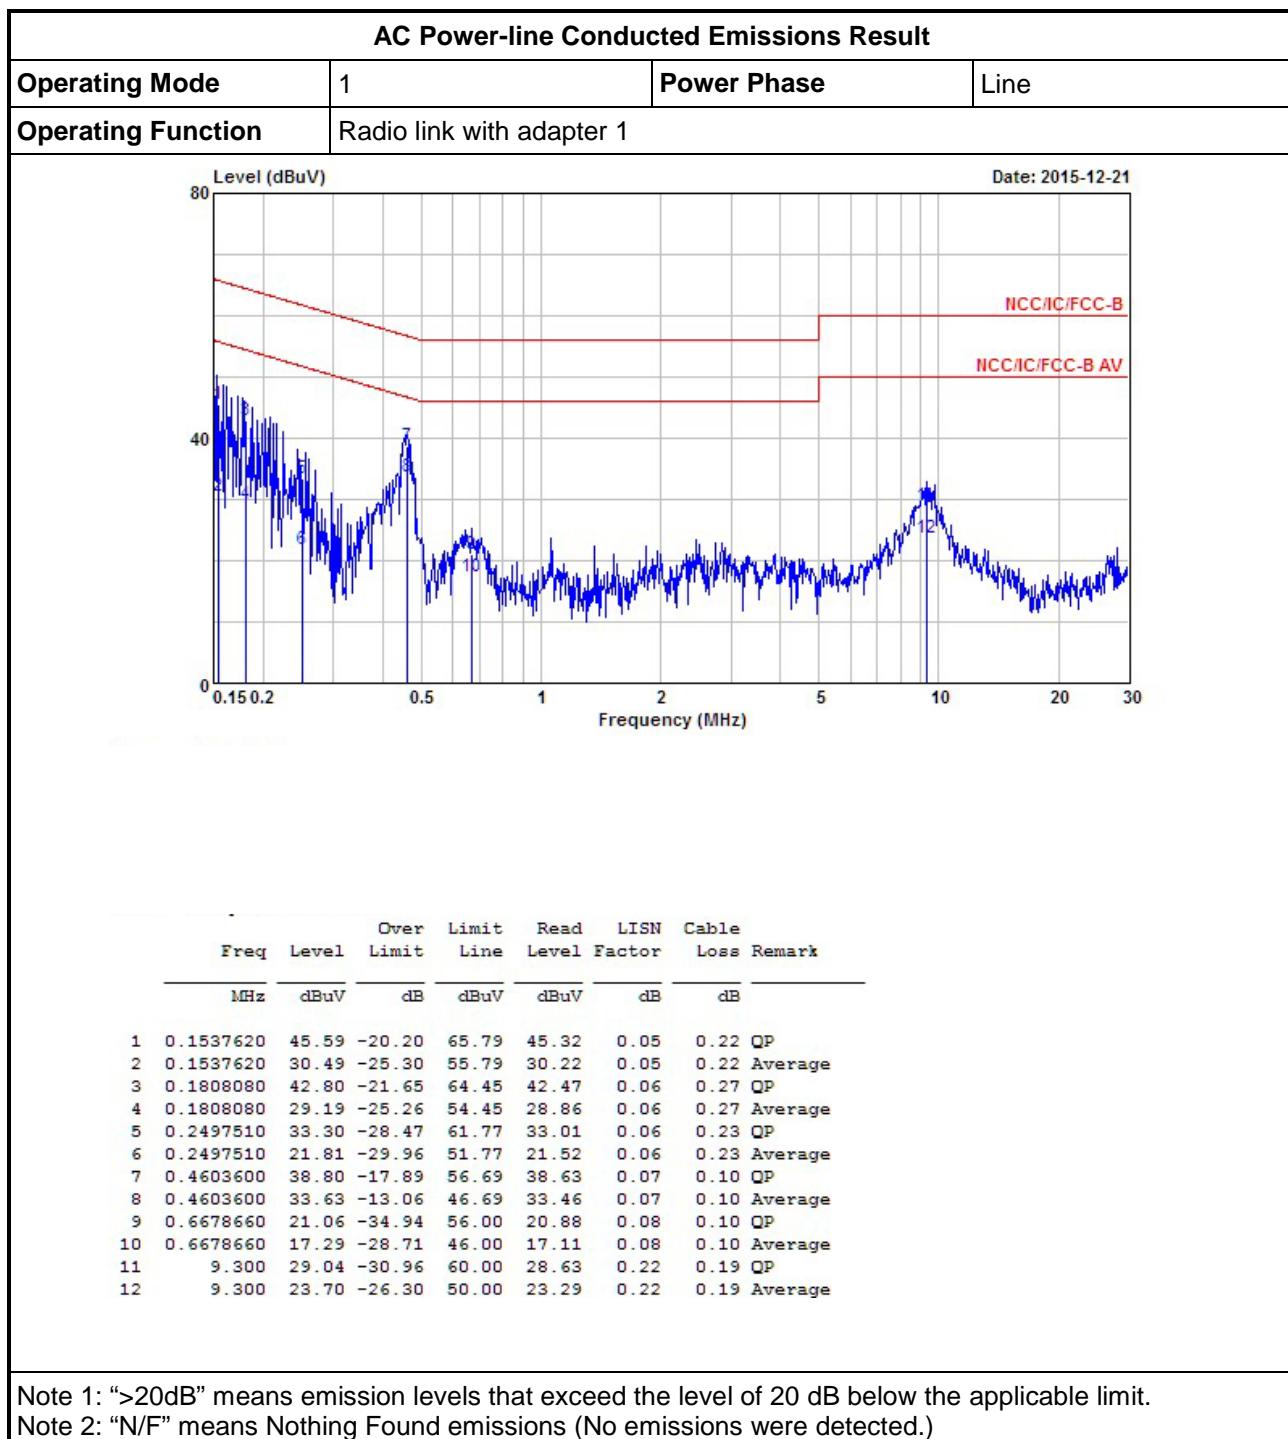

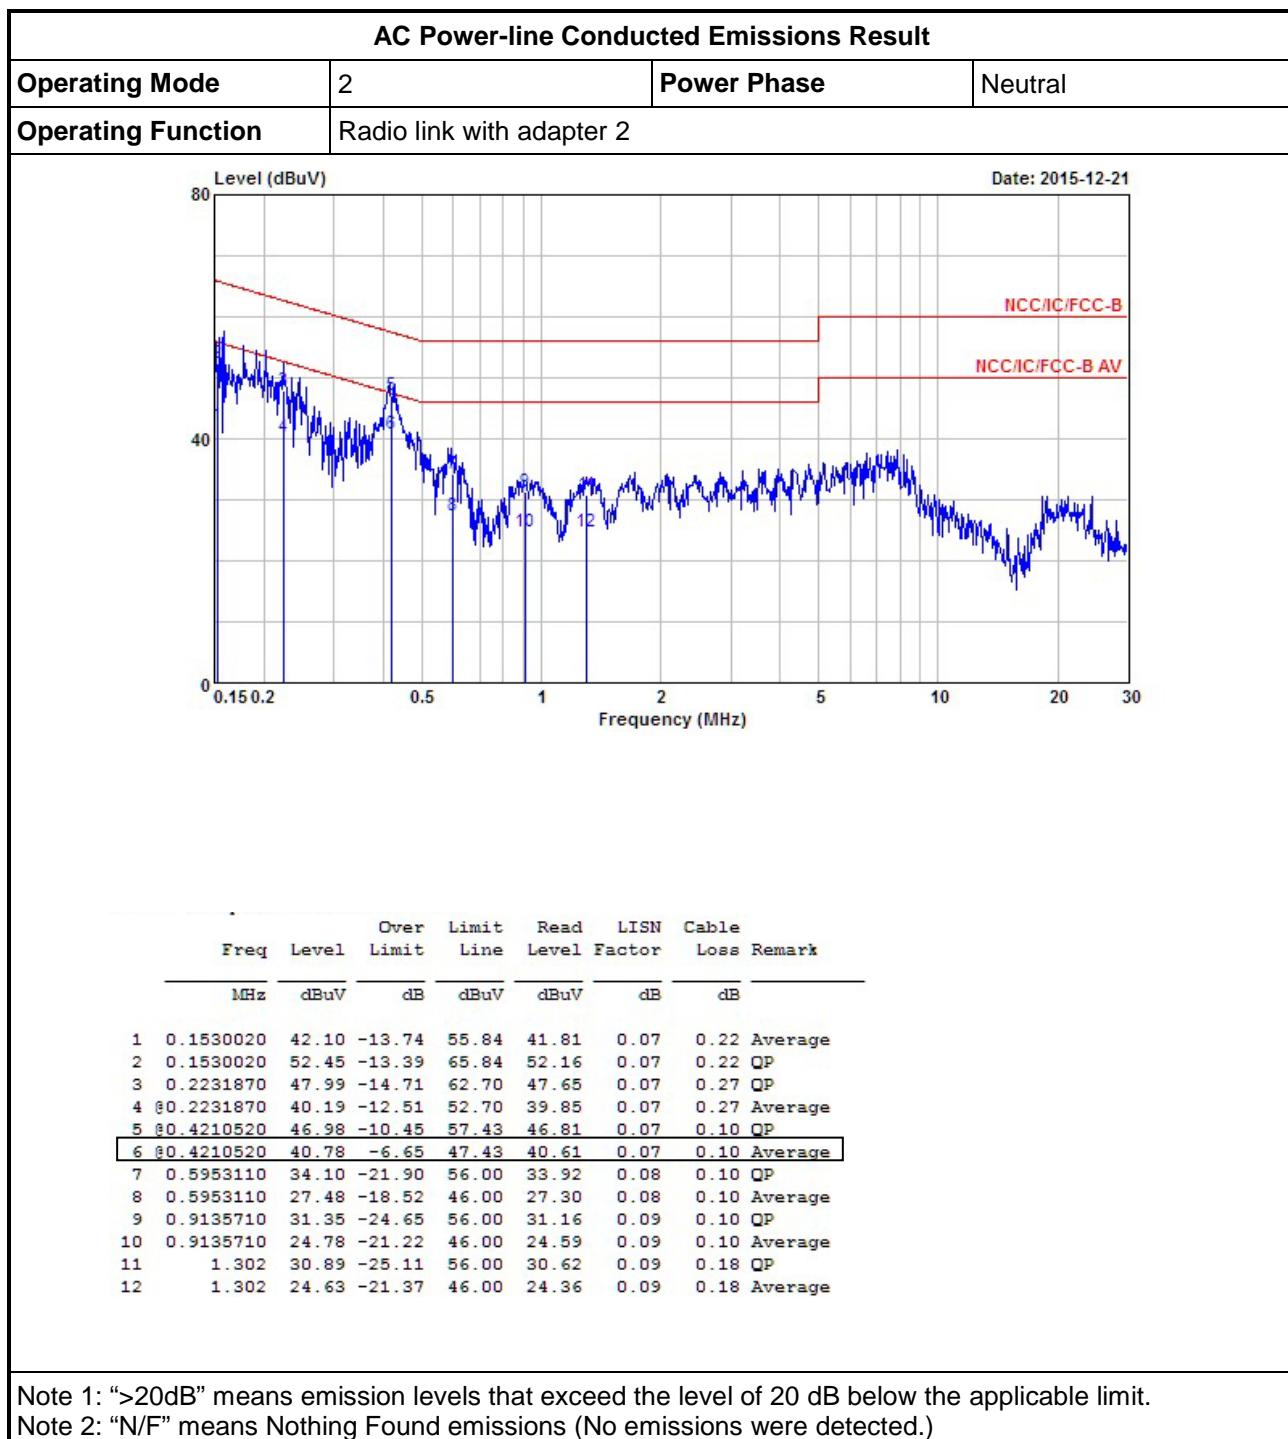

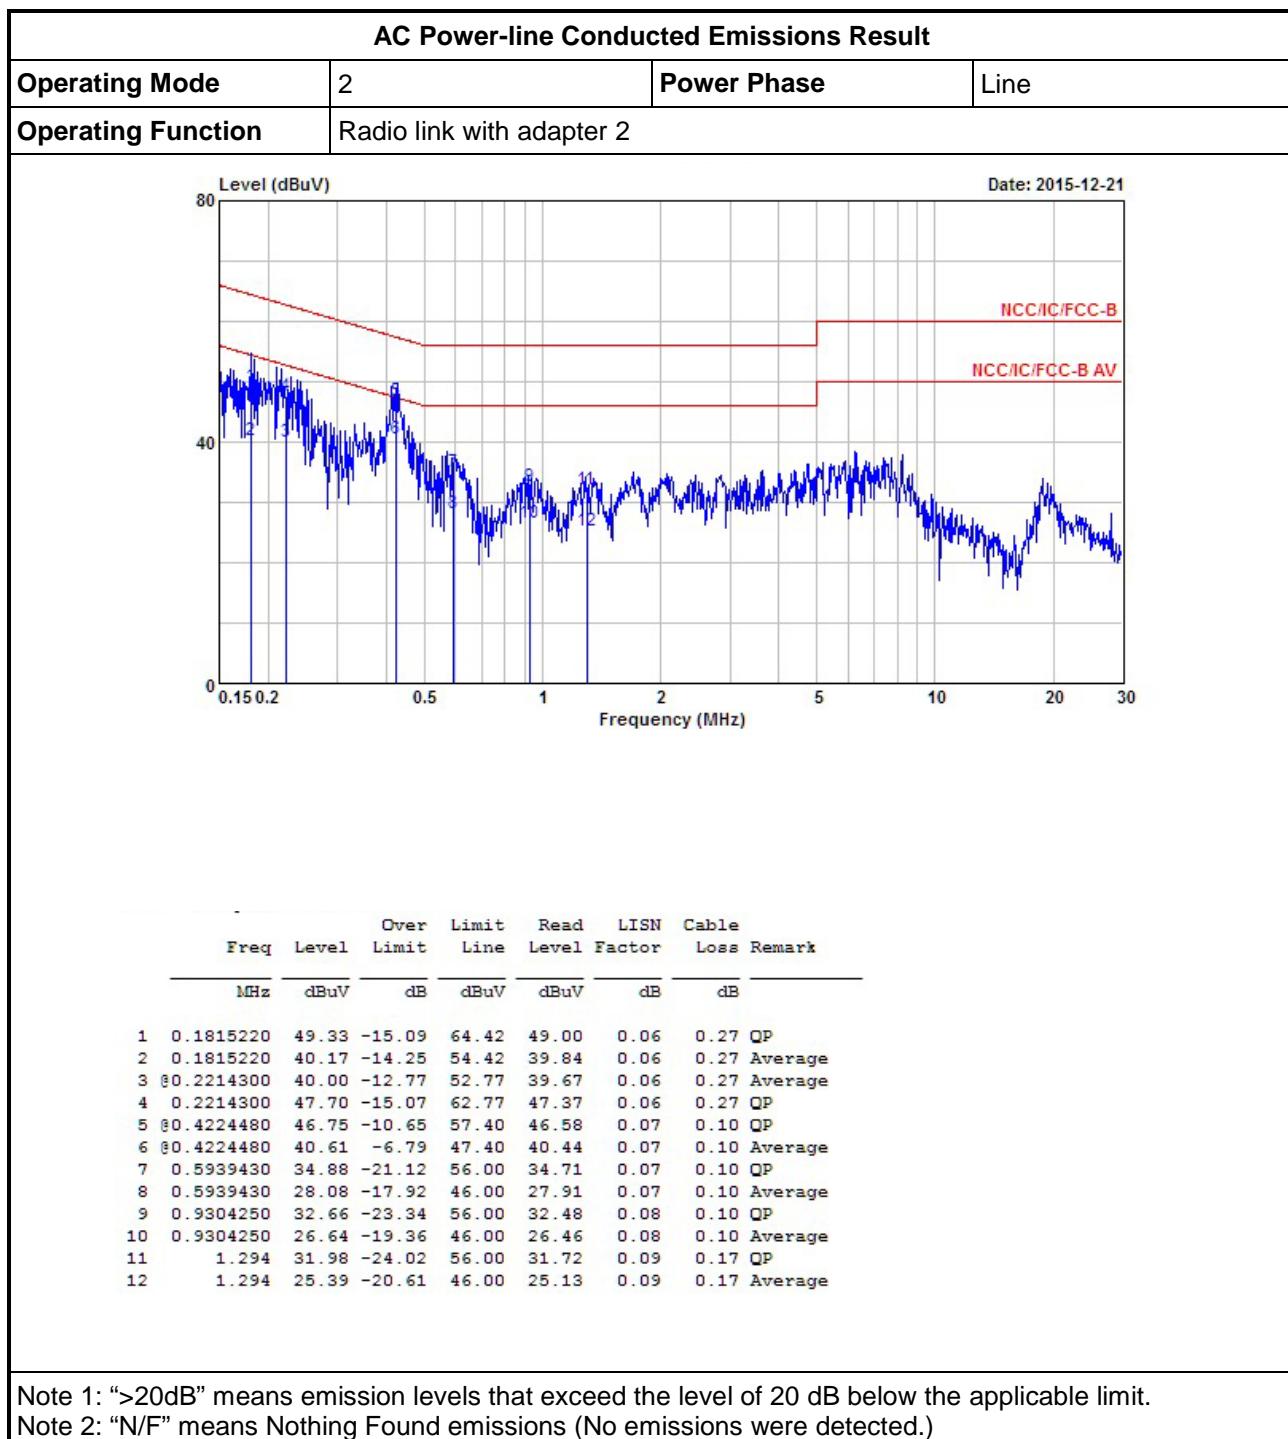

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.3 20dB Bandwidth and Carrier Frequency Separation

#### 3.3.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).	
<input checked="" type="checkbox"/> N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).	

N: Number of Hopping Frequencies; ChS: Hopping Channel Separation


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.8.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.3.4 Test Setup

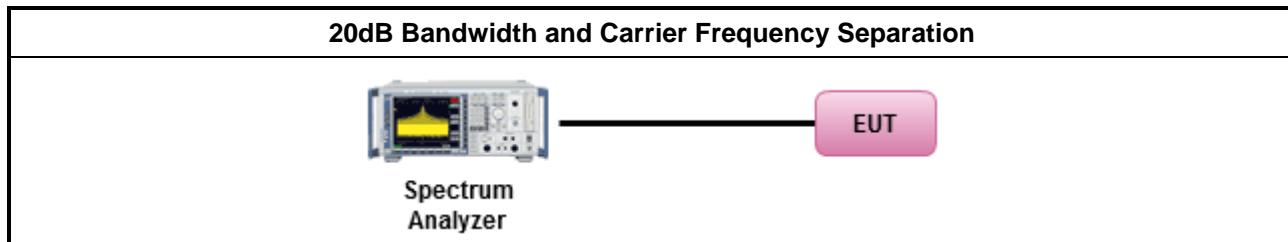

### 3.3.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	0.6599	0.7120	1.0029	0.440
BR-1Mbps	2441	0.6643	0.7163	1.0029	0.443
BR-1Mbps	2480	0.6886	0.7206	1.0029	0.459
EDR-3Mbps	2402	1.2460	1.1461	1.0029	0.831
EDR-3Mbps	2441	1.2460	1.1461	1.0029	0.831
EDR-3Mbps	2480	1.2460	1.1461	1.0029	0.831
<b>Result</b>			<b>Complied</b>		

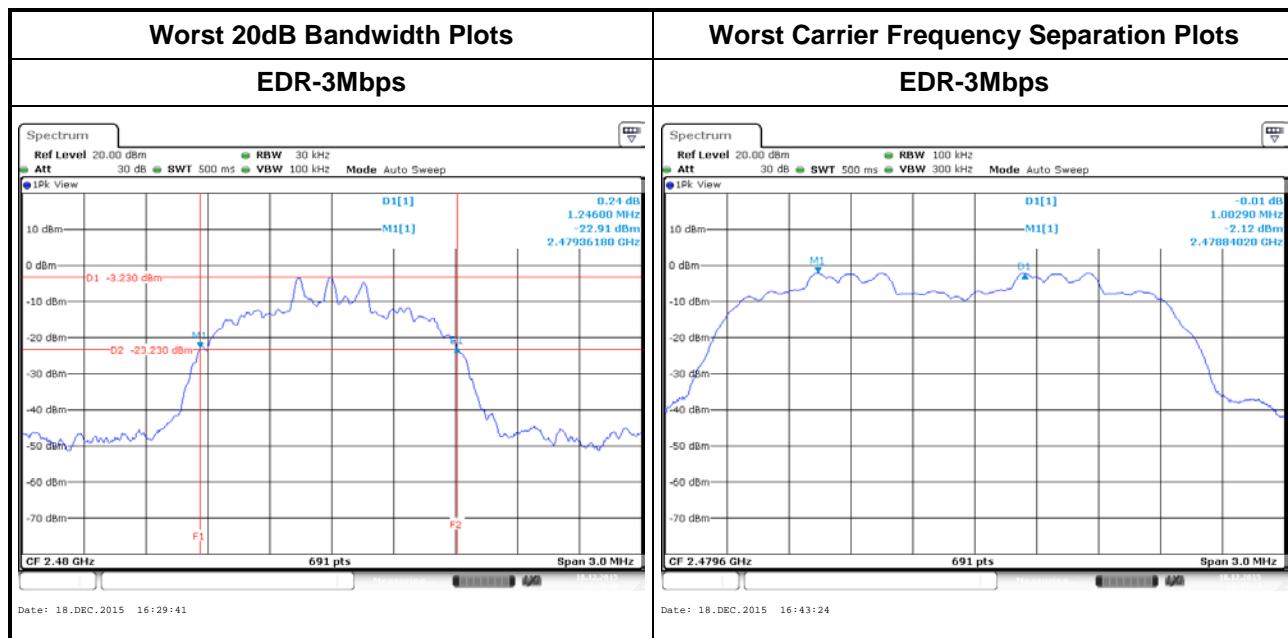

## 3.4 Number of Hopping Frequencies

### 3.4.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).	
<input checked="" type="checkbox"/> N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).	

N: Number of Hopping Frequencies; ChS: Hopping Channel Separation


### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.8.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

### 3.4.4 Test Setup

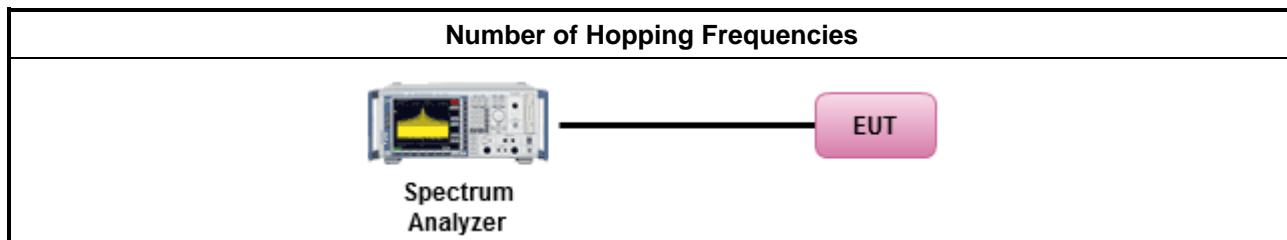

### 3.4.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-1Mbps	2402-2480	79	15
EDR-3Mbps	2402-2480	79	15
<b>Result</b>	<b>Complied</b>		



### 3.5 Time of Occupancy (Dwell Time)

#### 3.5.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band: Dwell time $\leq$ 0.4 second within $0.4 \times N$
<b>N:</b> Number of Hopping Frequencies


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input checked="" type="checkbox"/> The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


#### 3.5.4 Test Setup

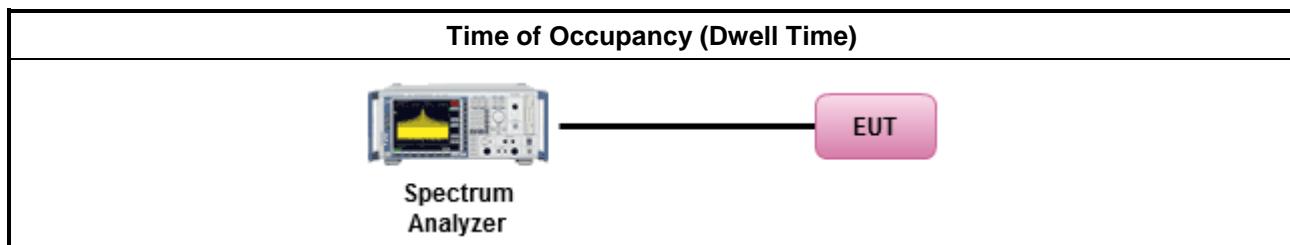



### 3.5.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-1Mbps	2402	2.94	106.7	0.314	0.4
EDR-3Mbps	2402	2.96	106.7	0.315	0.4
<b>Result</b>		<b>Complied</b>			

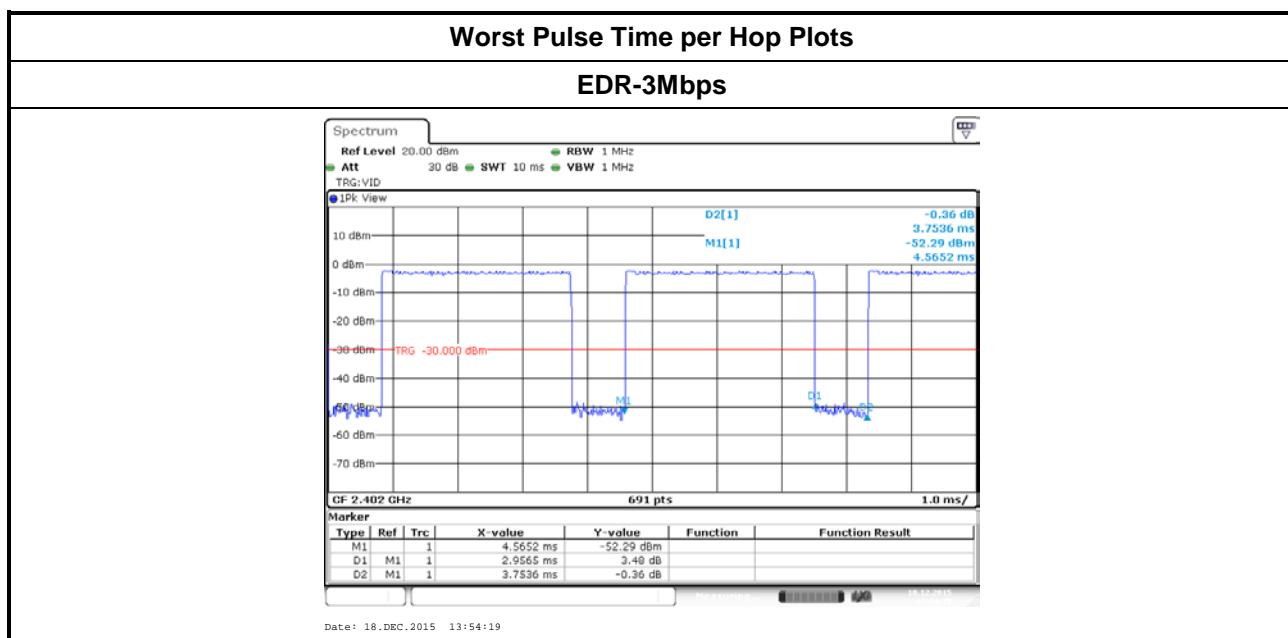



## 3.6 RF Output Power

### 3.6.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> For Hopping Channel: $N \geq 75$	
	<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15$	
	<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
	<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)	
<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)	
$G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	
$P_{eirp}$ = e.i.r.p. Power in dBm.	
N: Number of Hopping Frequencies	
ChS: Hopping Channel Separation	


### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
<input type="checkbox"/> Refer as FCC DA 00-0705, spectrum analyzer for peak power.	
<input checked="" type="checkbox"/> Refer as FCC DA 00-0705, peak power meter for peak power.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).	
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.	
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.	

### 3.6.4 Test Setup

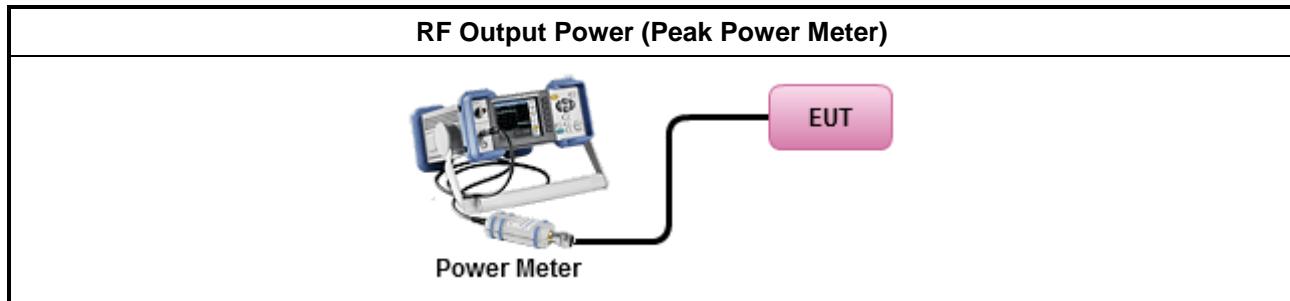

### 3.6.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	-0.04	21	1.76	1.72	27
BR-1Mbps	2441	0.26	21	1.76	2.02	27
BR-1Mbps	2480	0.34	21	1.76	2.1	27
EDR-3Mbps	2402	-0.83	21	1.76	0.93	27
EDR-3Mbps	2441	-0.41	21	1.76	1.35	27
EDR-3Mbps	2480	-0.37	21	1.76	1.39	27
<b>Result</b>		<b>Complied</b>				

### 3.6.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power
BR-1Mbps	2402	-1.48	1.06	-0.42	1.76	1.34
BR-1Mbps	2441	-1.27	1.06	-0.21	1.76	1.55
BR-1Mbps	2480	-1.09	1.06	-0.03	1.76	1.73
EDR-3Mbps	2402	-4.42	1.04	-3.38	1.76	-1.62
EDR-3Mbps	2441	-4.06	1.04	-3.02	1.76	-1.26
EDR-3Mbps	2480	-4.02	1.04	-2.98	1.76	-1.22
<b>Result</b>		<b>Complied</b>				

## 3.7 Transmitter Radiated Bandedge Emissions

### 3.7.1 Transmitter Radiated Bandedge Emissions Limit

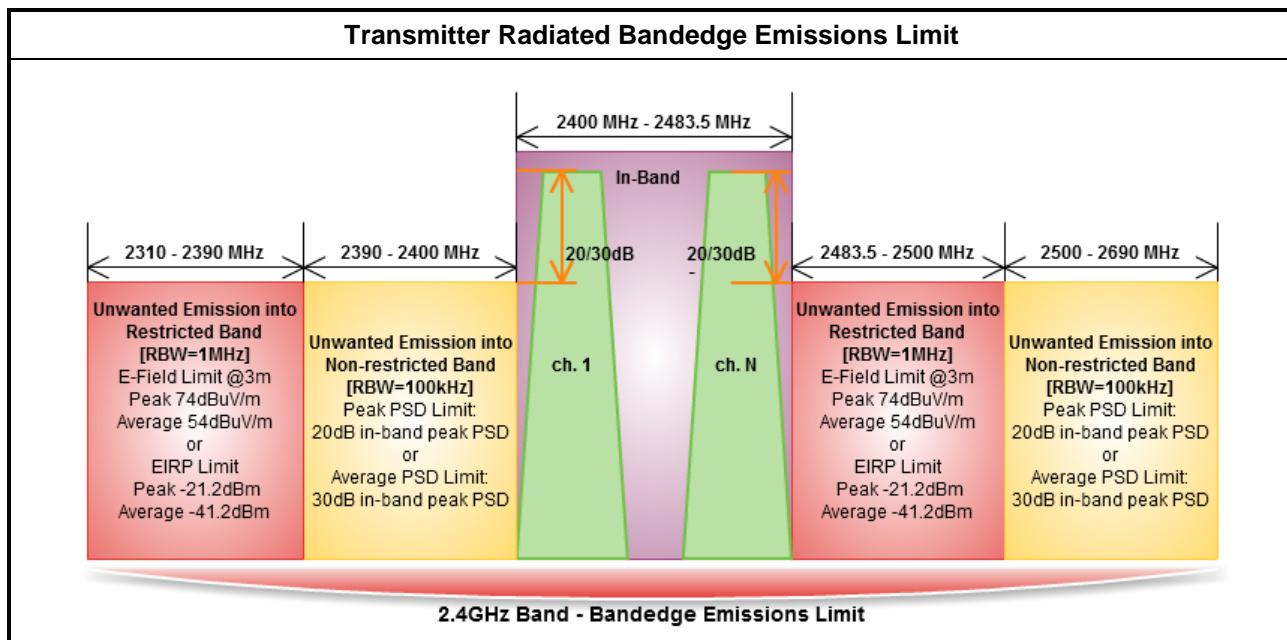


### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.7.3 Test Procedures

<b>Test Method – General Information</b>	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.10 for band-edge testing.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.8.6 for band-edge testing into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m.

### 3.7.4 Test Setup

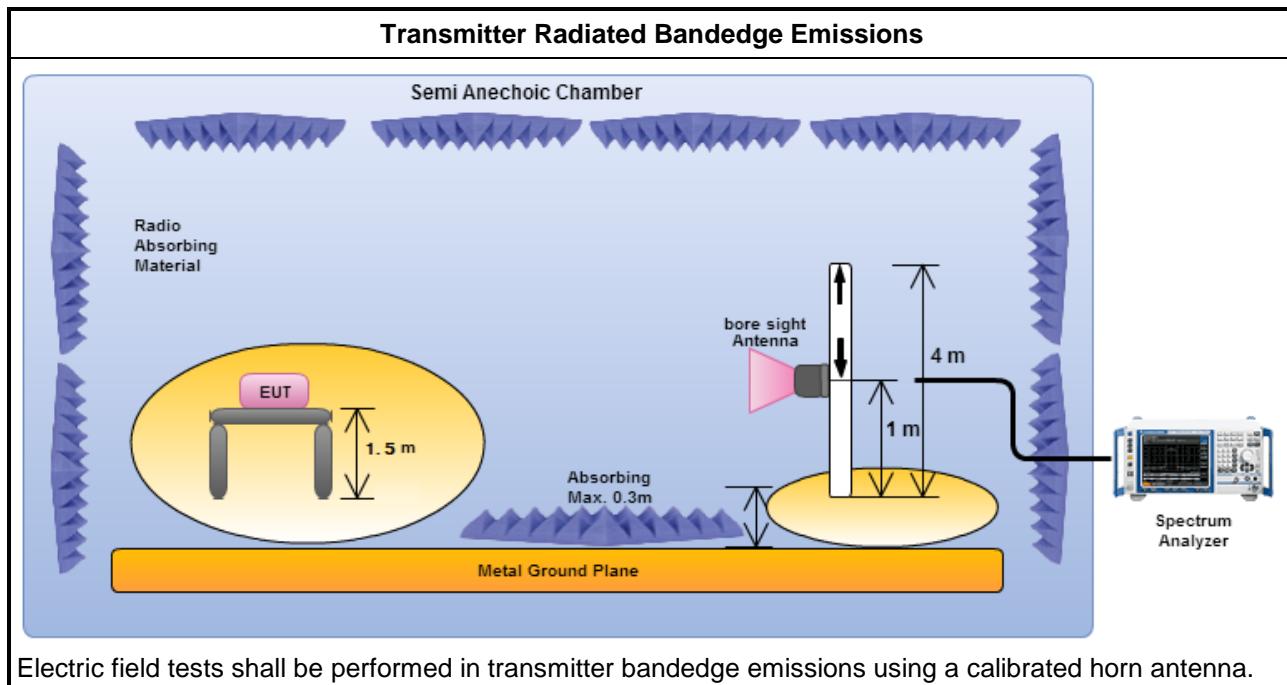


### 3.7.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)							
Modulation	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Pol.
BR-1Mbps	2402	99.14	2399.96	54.94	44.20	20	V
BR -1Mbps	2480	97.17	2546.08	46.83	50.34	20	V
EDR-2Mbps	2402	96.80	2399.98	48.00	48.80	20	V
EDR-2Mbps	2480	95.24	2530.40	46.51	48.73	20	V
EDR-3Mbps	2402	96.93	2399.96	48.76	48.17	20	V
EDR-3Mbps	2480	95.59	2549.76	46.87	48.72	20	V

Note 1: Measurement worst emissions of receive antenna polarization

Transmitter Radiated Bandedge Emissions (Restricted Band)									
Modulation Mode	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
BR-1Mbps	2402	3	2363.45	56.47	74	2386.09	44.66	54	V
BR -1Mbps	2480	3	2486.56	57.42	74	2483.52	45.34	54	V
EDR-2Mbps	2402	3	2347.21	56.37	74	2389.42	44.35	54	V
EDR-2Mbps	2480	3	2492.48	56.91	74	2495.52	45.12	54	V
EDR-3Mbps	2402	3	2380.99	56.35	74	2389.76	44.39	54	V
EDR-3Mbps	2480	3	2489.28	56.90	74	2493.28	45.12	54	V


Note 1: Measurement worst emissions of receive antenna polarization.  
Note 2: Average emission setting: RBW=1MHz; VBW  $\geq 1/T$ , where T is "Pulse On Time", e.g., DH5 VBW $\geq 1/3.125\text{ms}$ , VBW=1kHz

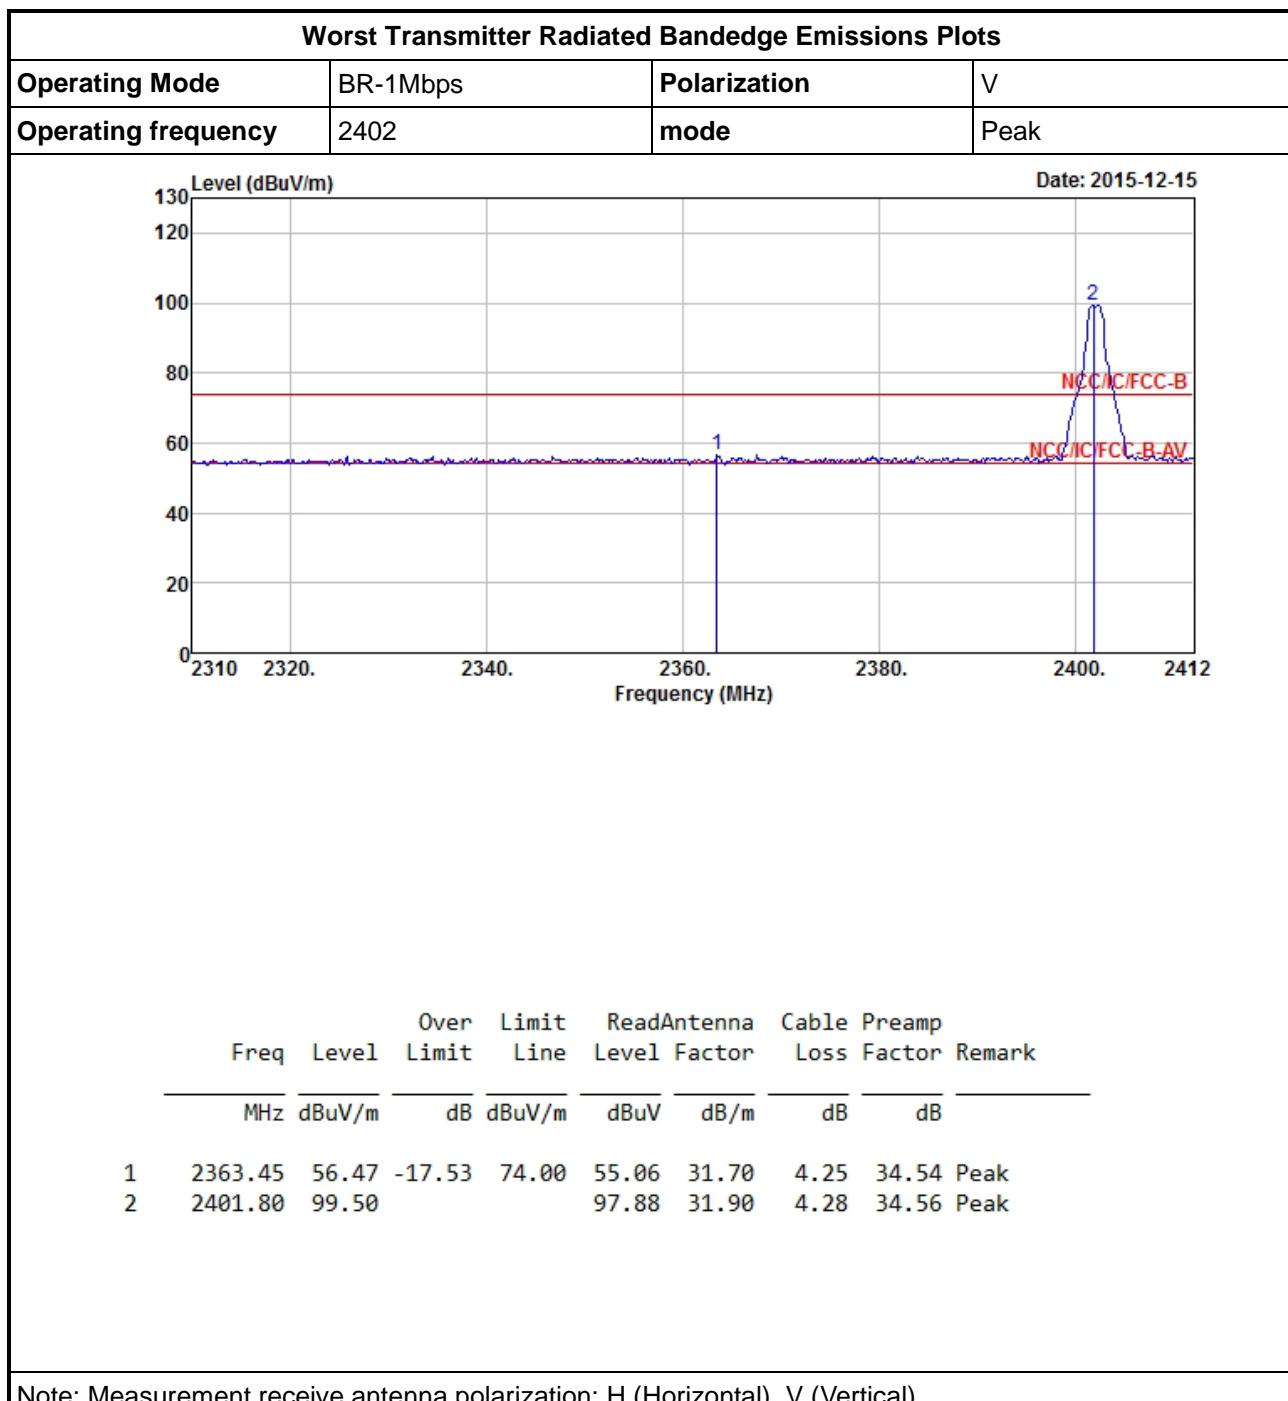





## Worst Transmitter Radiated Bandedge Emissions Plots

<b>Operating Mode</b>	BR-1Mbps	<b>Polarization</b>	V
<b>Operating frequency</b>	2402	<b>mode</b>	Average

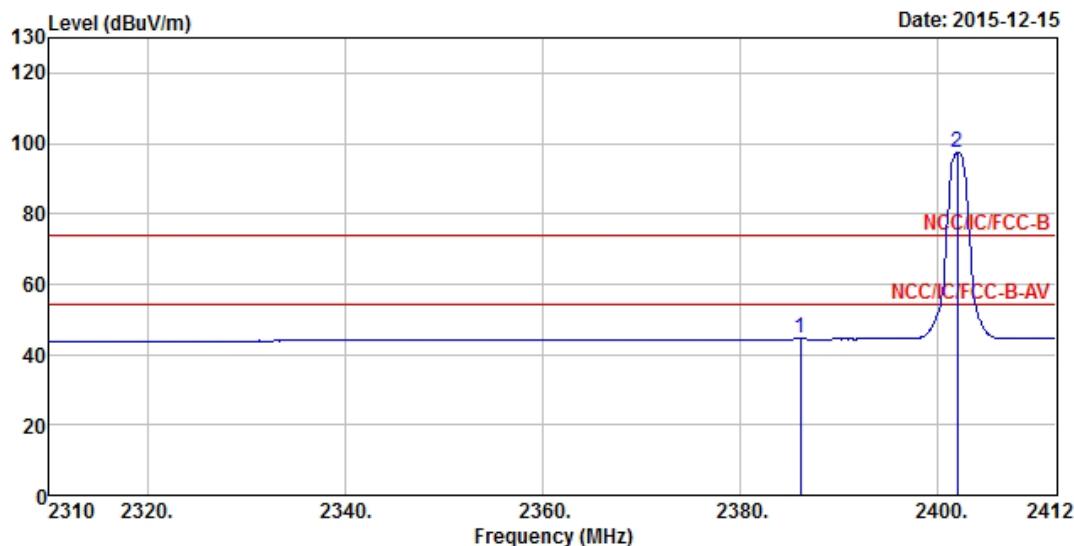


Note: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

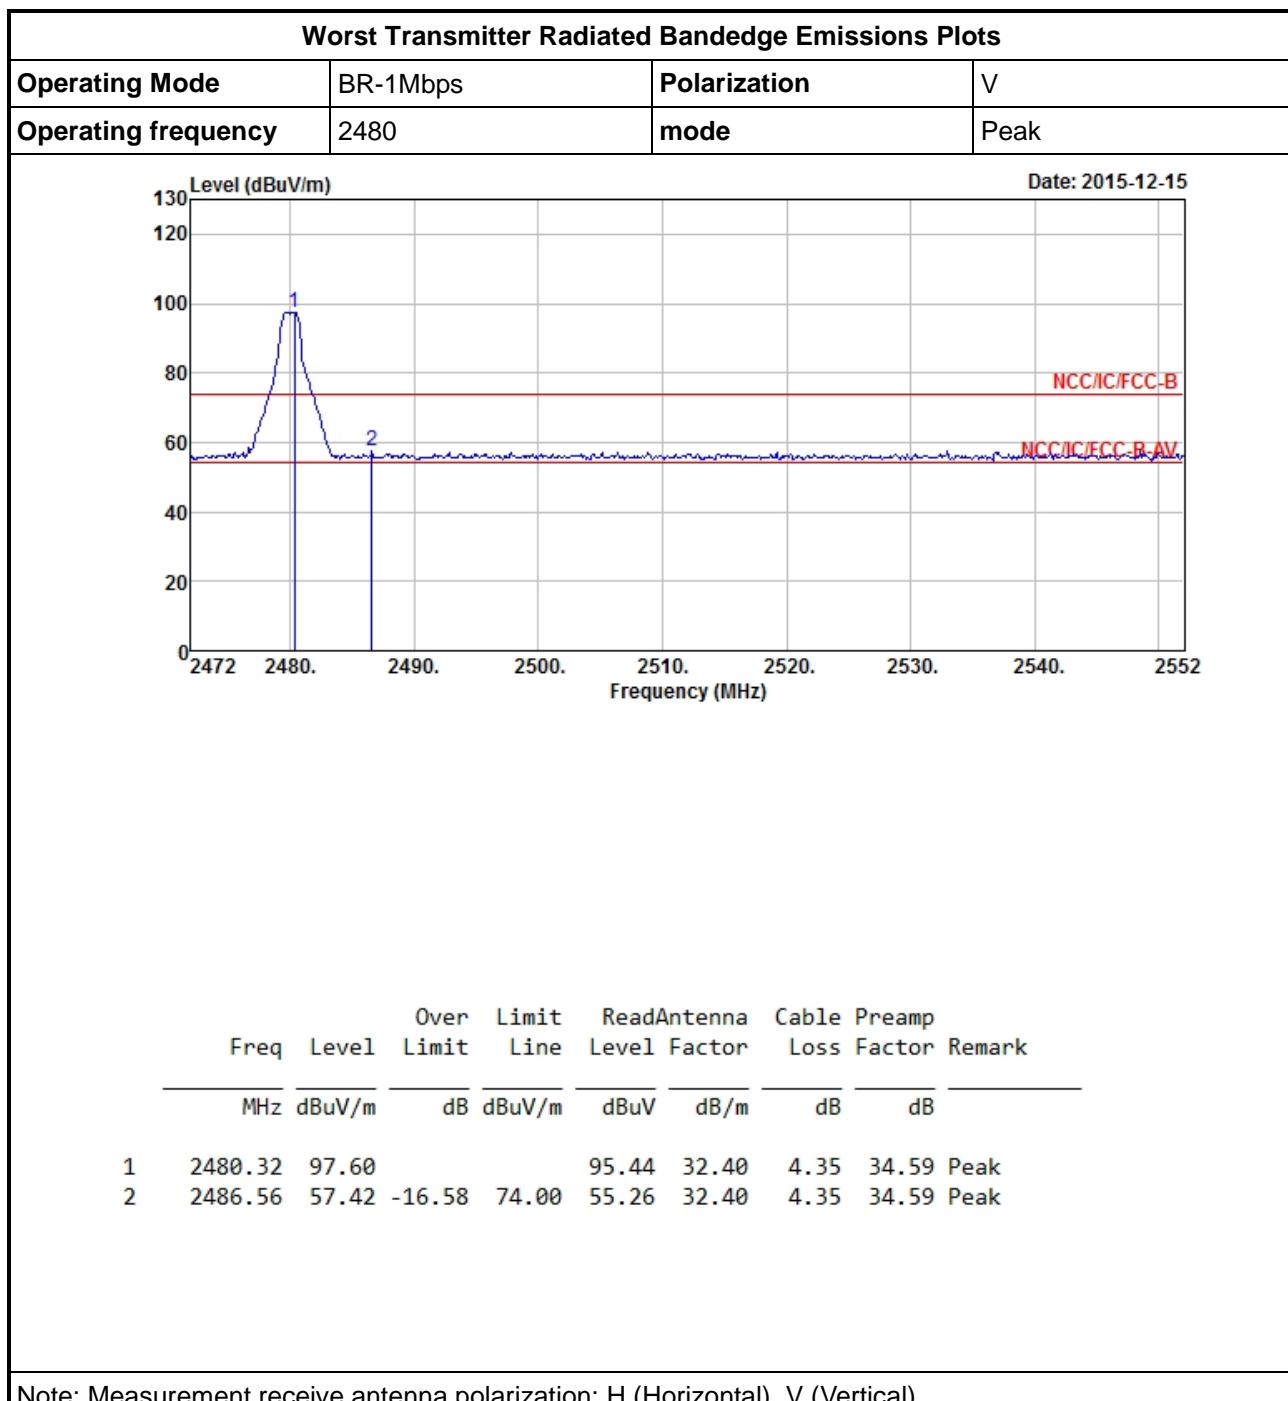

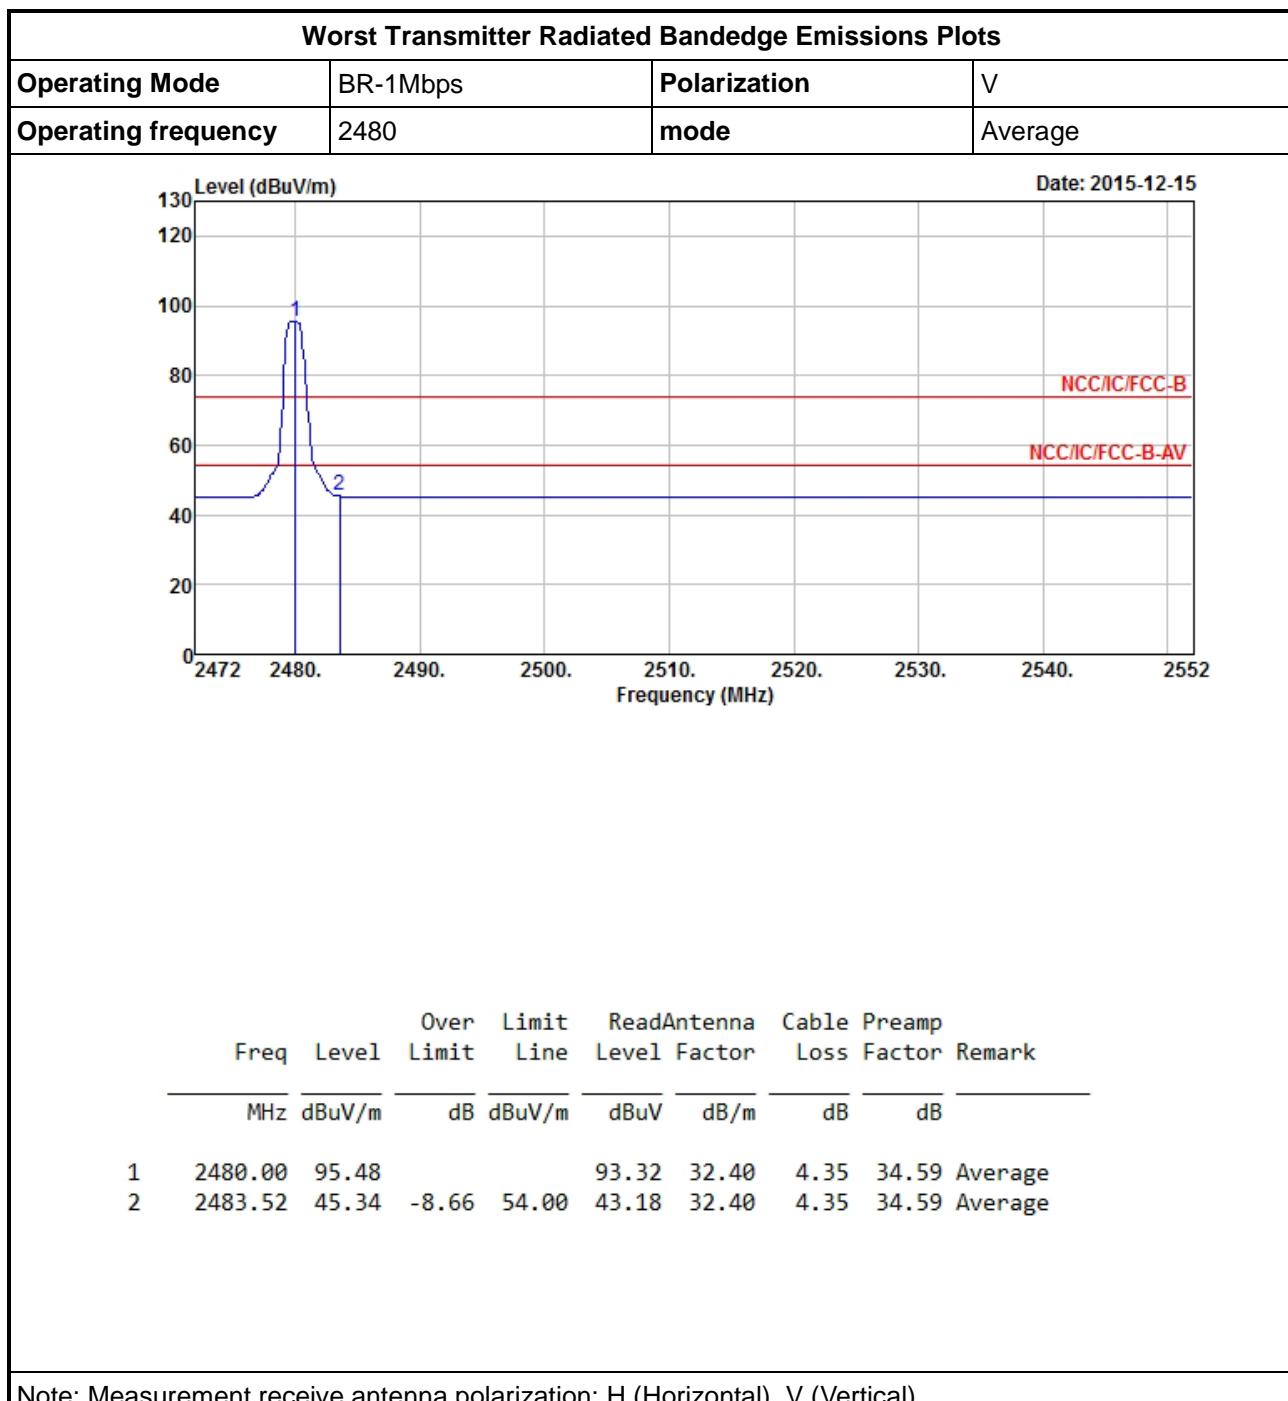

### 3.7.6 Test Result of Transmitter Hopping Bandedge Emissions

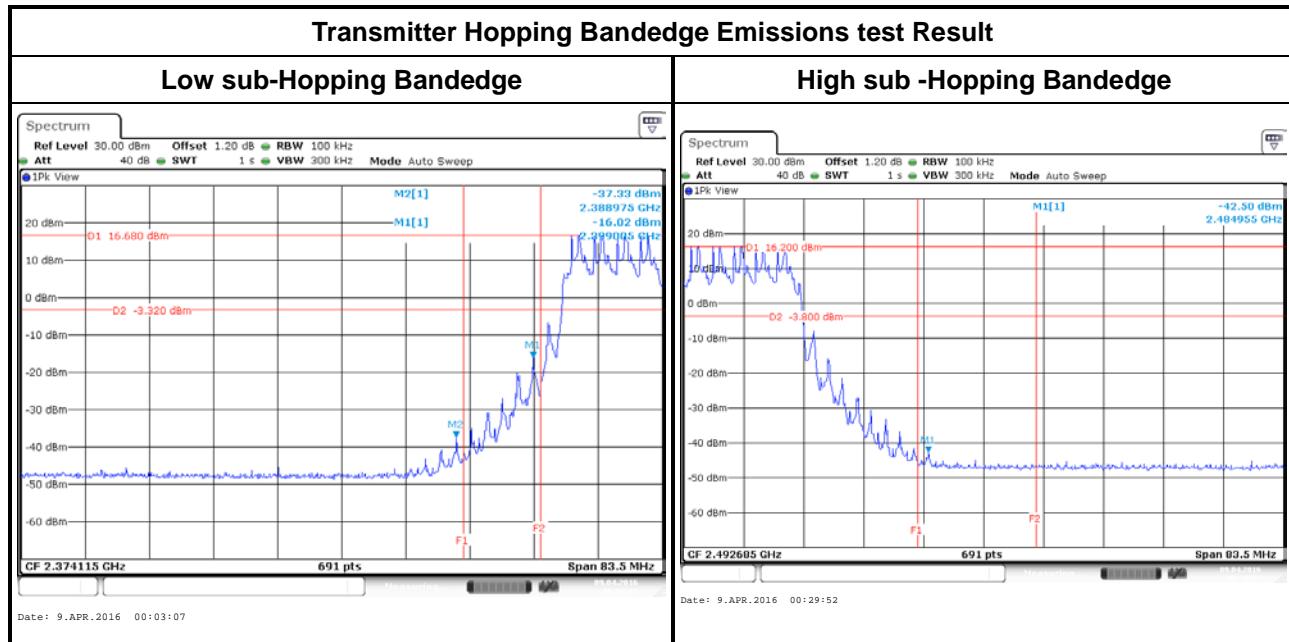



## 3.8 Transmitter Radiated Unwanted Emissions

### 3.8.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

### 3.8.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.8.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$ , where T is pulse time.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


### 3.8.4 Test Setup

#### Transmitter Radiated Unwanted Emissions (below 30MHz)

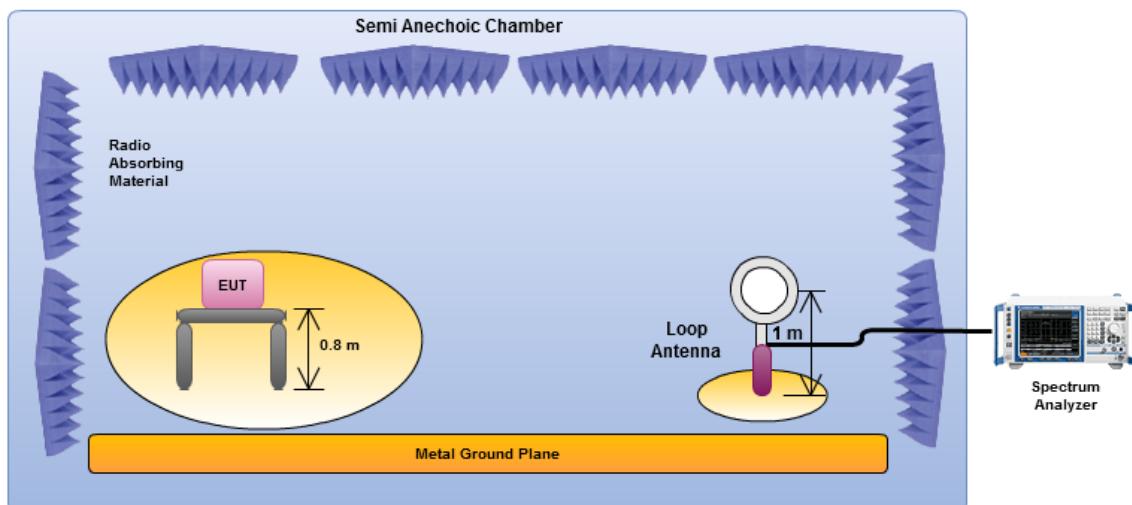


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. The center of the loop shall be 1 m above the ground.

#### Transmitter Radiated Unwanted Emissions (below 1GHz)

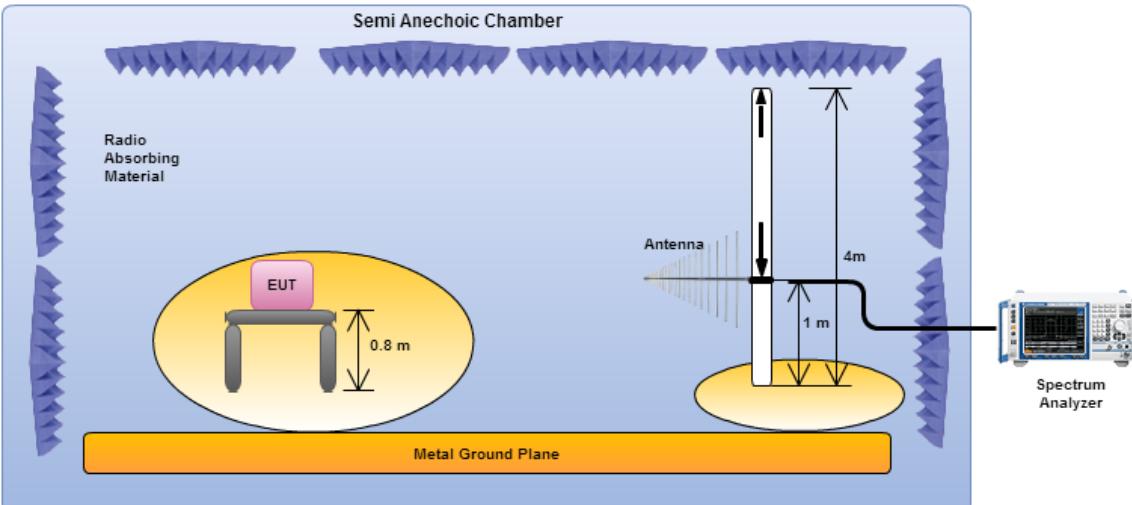


Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna. the antenna height shall be varied from 1 m to 4 m.

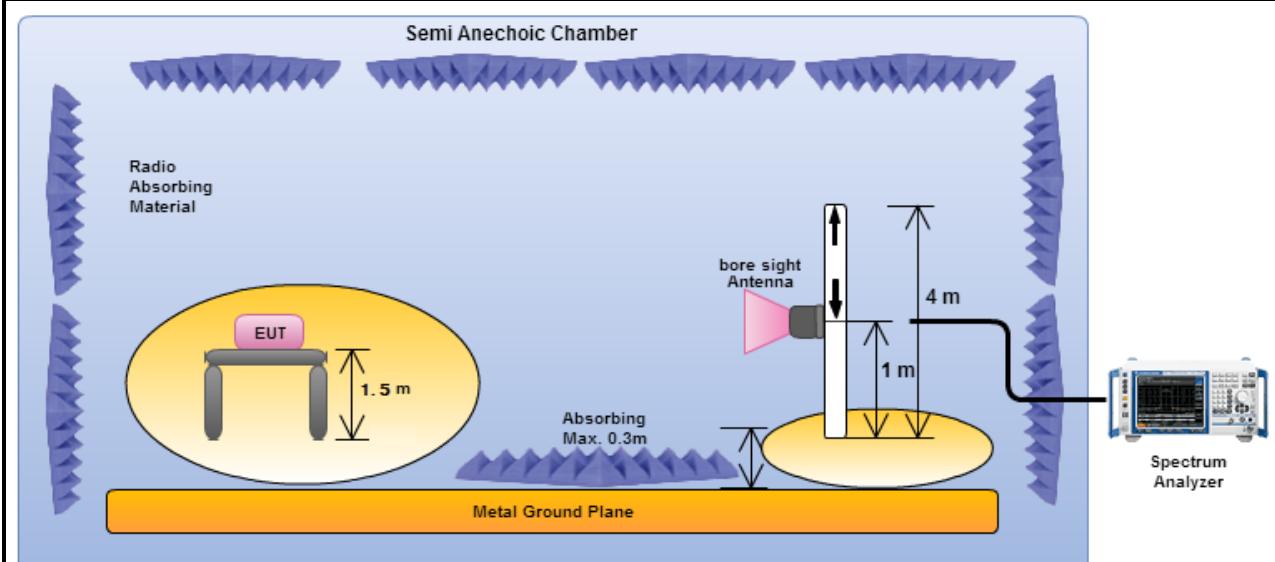
**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.



## 3.8.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

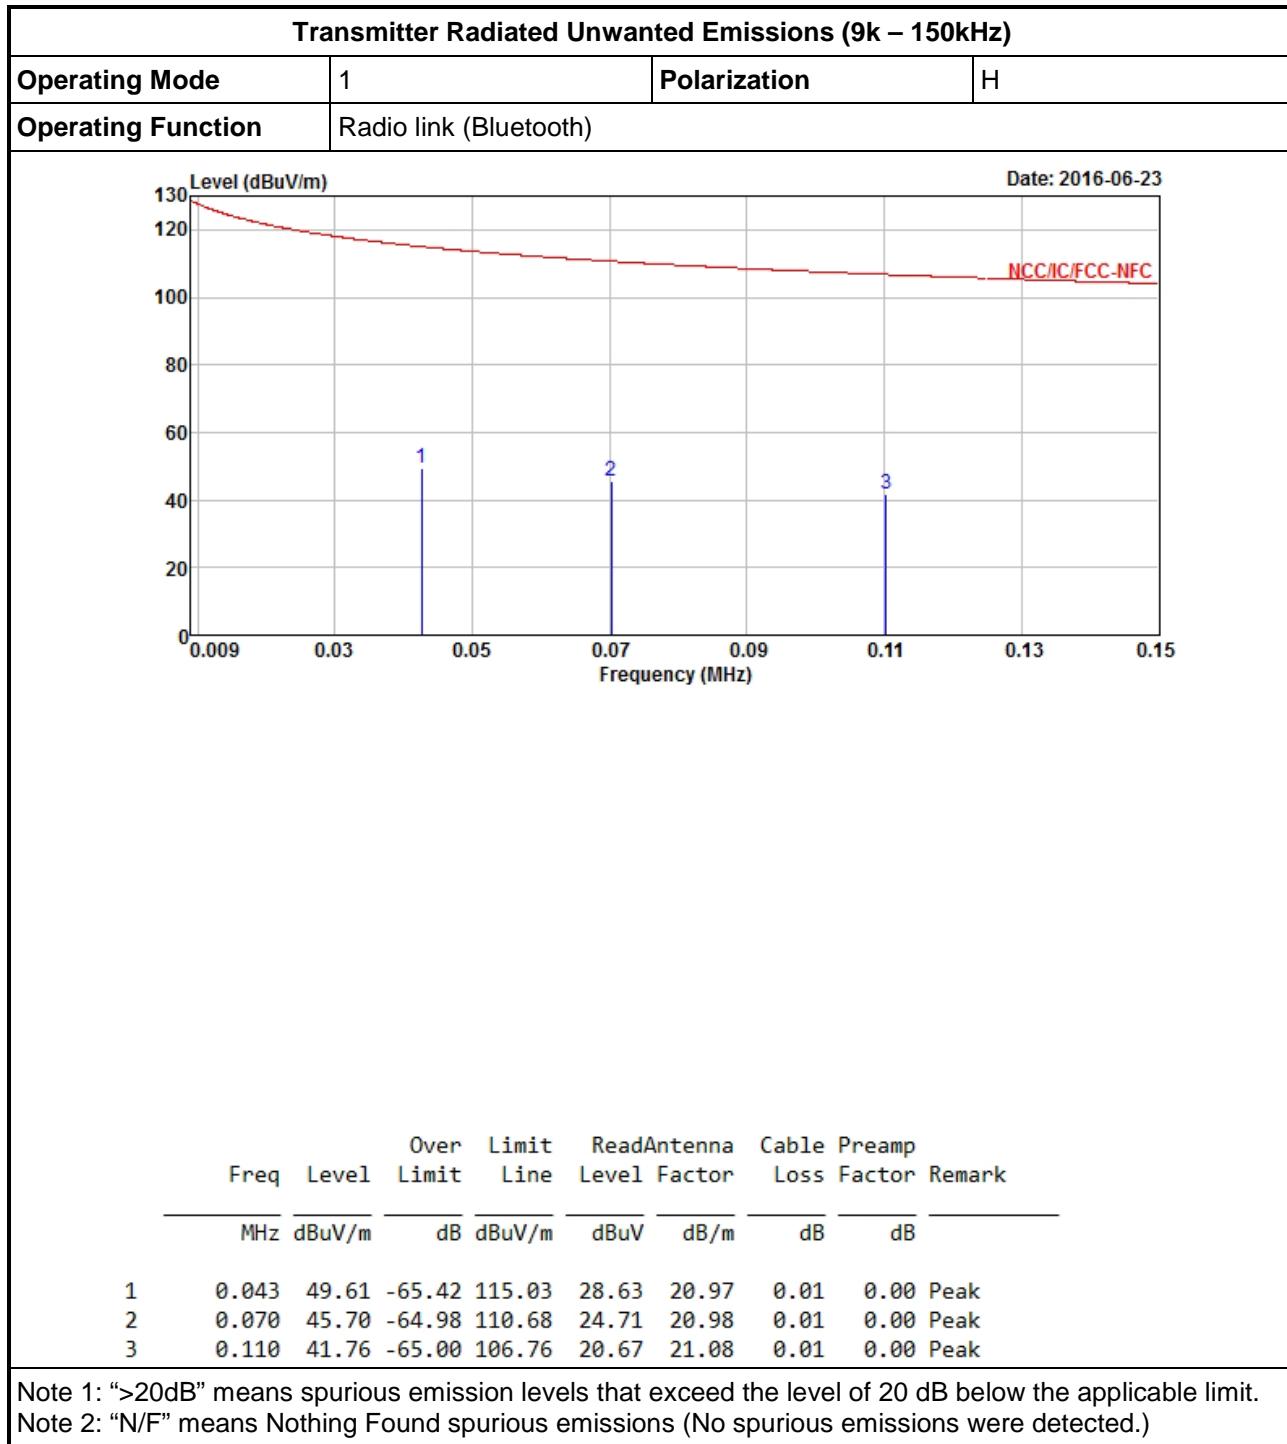

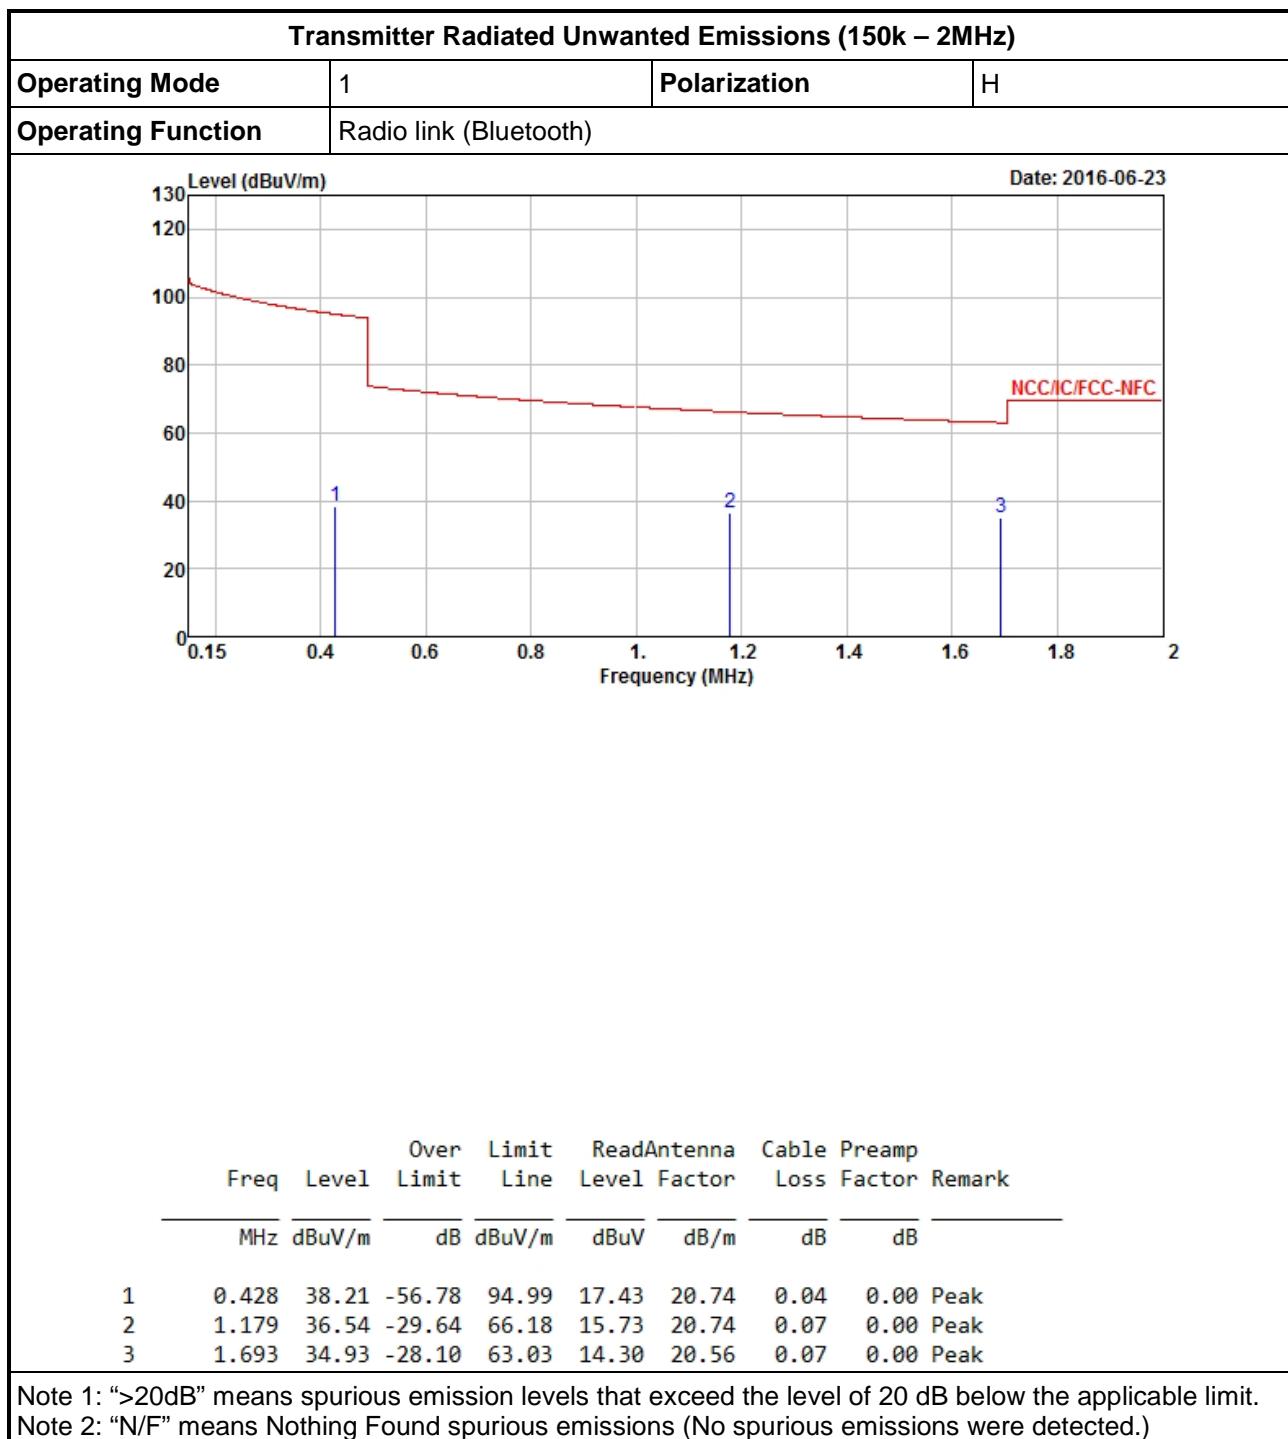



## Transmitter Radiated Unwanted Emissions (2M – 8MHz)

Operating Mode	1	Polarization	H					
Operating Function	Radio link (Bluetooth)							
Level (dBuV/m)			Date: 2016-06-23					
Over Limit ReadAntenna Cable Preamp								
Freq	Level	Limit	Line	Level	Factor	Cable	Preamp	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	3.632	34.61	-34.93	69.54	14.15	20.35	0.11	0.00 Peak
2	4.868	34.66	-34.88	69.54	13.64	20.85	0.17	0.00 Peak
3	6.404	34.88	-34.66	69.54	13.68	21.01	0.19	0.00 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)



## Transmitter Radiated Unwanted Emissions (8M – 25MHz)


Operating Mode	1	Polarization	H				
Operating Function	Radio link (Bluetooth)						
Level (dBuV/m)			Date: 2016-06-23				
Freq	Level	Over Limit	Read	Antenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	
1	13.372	34.57	-34.97	69.54	12.97	21.37	0.23 0.00 Peak
2	16.636	33.78	-35.76	69.54	12.10	21.43	0.25 0.00 Peak
3	22.620	33.63	-35.91	69.54	11.80	21.55	0.28 0.00 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)



## Transmitter Radiated Unwanted Emissions (25M – 30MHz)

<b>Operating Mode</b>	1	<b>Polarization</b>	H
<b>Operating Function</b>	Radio link (Bluetooth)		

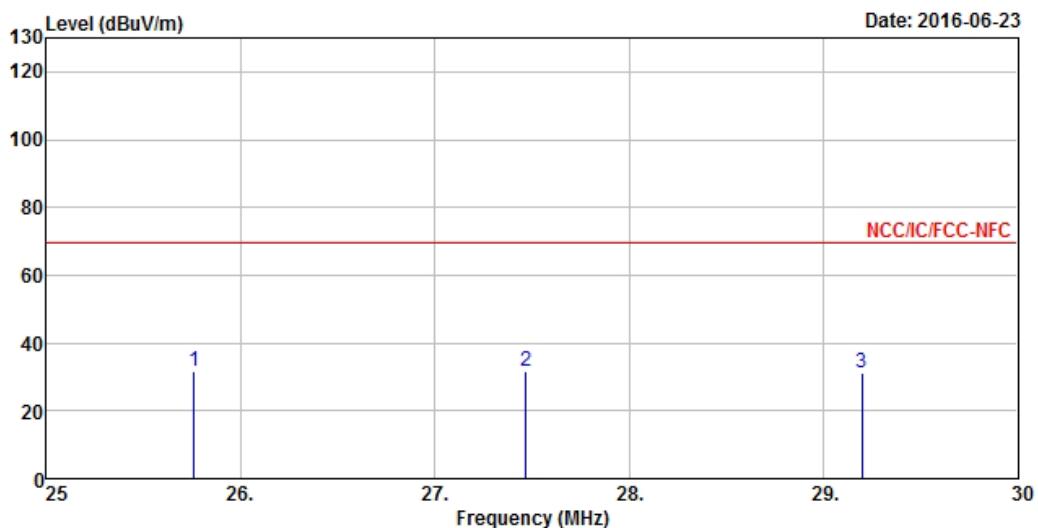


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
5.760	31.68	-37.86	69.54	9.77	21.62	0.29	0.00	Peak
7.470	31.44	-38.10	69.54	9.49	21.65	0.30	0.00	Peak
9.200	31.41	-38.13	69.54	9.42	21.68	0.31	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)




## Transmitter Radiated Unwanted Emissions (9k – 150kHz)

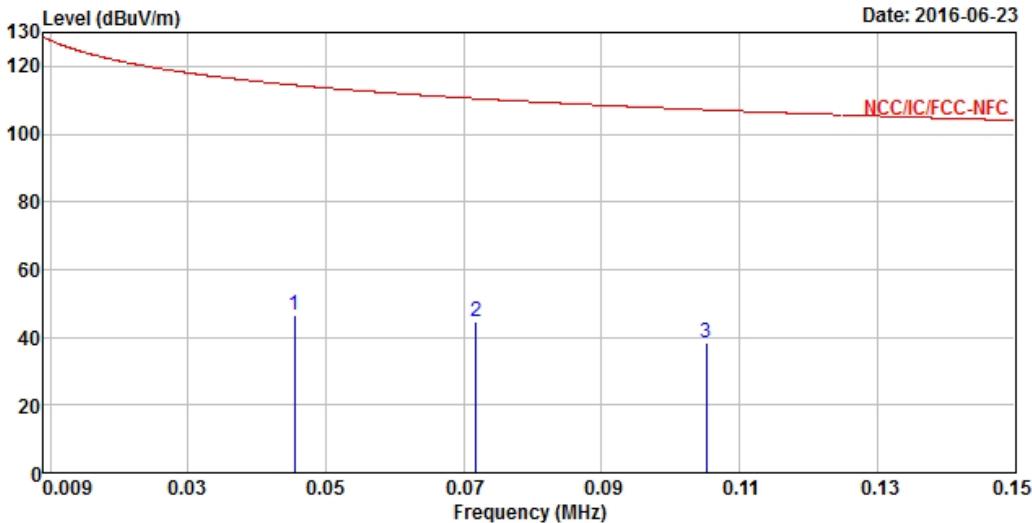Operating Mode	2	Polarization	H																										
Operating Function	Radio link (Bluetooth)																												
																													
<table><thead><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th>Over</th><th>Limit</th><th>Read</th><th>Antenna</th><th>Cable</th><th>Preamp</th><th rowspan="2">Remark</th></tr><tr><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dB</td><td>dBuV/m</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td></td></tr></tbody></table>						Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Line	Limit	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
Freq	Level	Over	Limit	Read	Antenna			Cable	Preamp	Remark																			
		Line	Limit	Level	Factor	Loss	Factor																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																						
1	0.045	46.66	-67.81	114.47	25.70	20.95	0.01	0.00 Peak																					
2	0.072	44.44	-66.05	110.49	23.44	20.99	0.01	0.00 Peak																					
3	0.105	38.55	-68.62	107.17	17.45	21.09	0.01	0.00 Peak																					


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

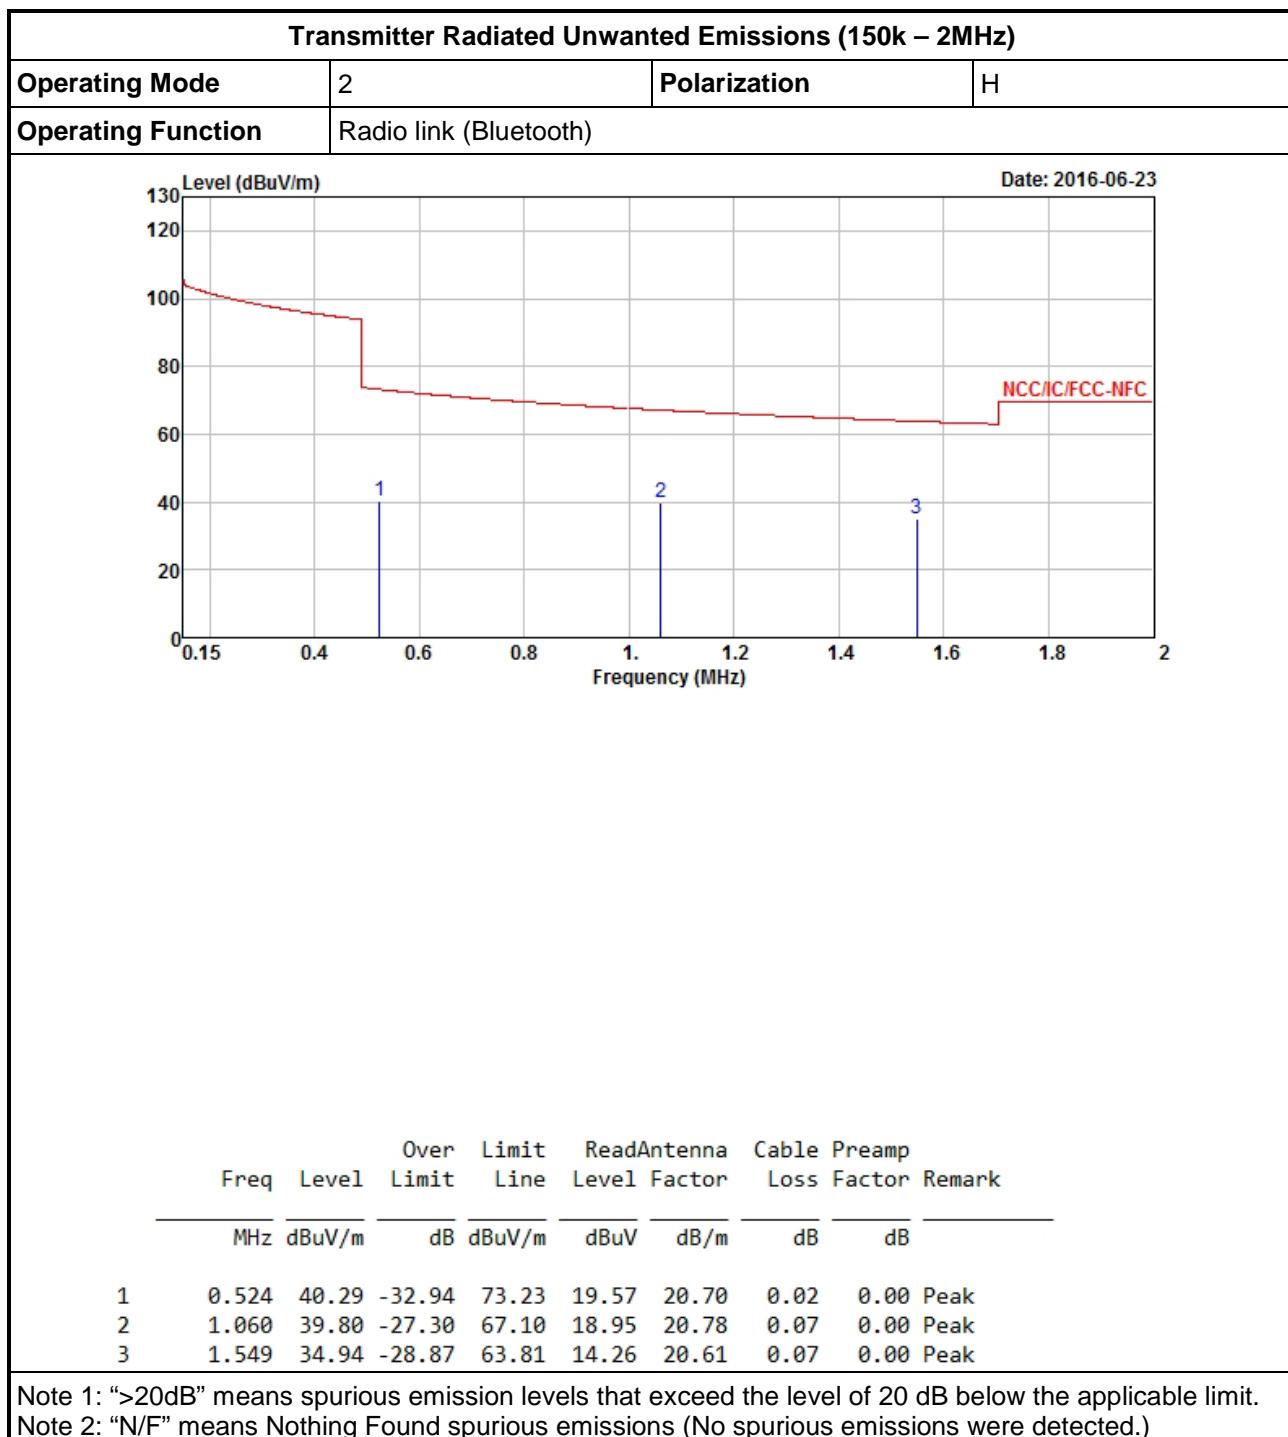




## Transmitter Radiated Unwanted Emissions (2M – 8MHz)

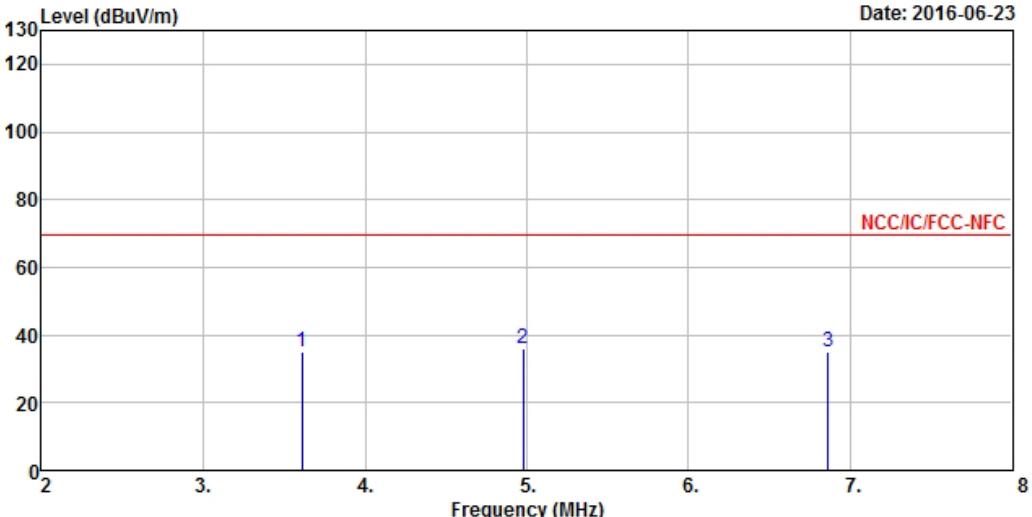Operating Mode	2	Polarization	H																																								
Operating Function	Radio link (Bluetooth)																																										
			Date: 2016-06-23																																								
<table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Read</th><th>Antenna</th><th>Cable</th><th>Preamp</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>3.608</td><td>34.84</td><td>-34.70</td><td>69.54</td><td>14.39</td><td>20.34</td><td>0.11 0.00 Peak</td></tr><tr><td>2</td><td>4.976</td><td>36.08</td><td>-33.46</td><td>69.54</td><td>15.01</td><td>20.89</td><td>0.18 0.00 Peak</td></tr><tr><td>3</td><td>6.860</td><td>34.97</td><td>-34.57</td><td>69.54</td><td>13.73</td><td>21.05</td><td>0.19 0.00 Peak</td></tr></tbody></table>			Freq	Level	Over Limit	Read	Antenna	Cable	Preamp	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		1	3.608	34.84	-34.70	69.54	14.39	20.34	0.11 0.00 Peak	2	4.976	36.08	-33.46	69.54	15.01	20.89	0.18 0.00 Peak	3	6.860	34.97	-34.57	69.54	13.73	21.05	0.19 0.00 Peak	
Freq	Level	Over Limit	Read	Antenna	Cable	Preamp	Remark																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB																																					
1	3.608	34.84	-34.70	69.54	14.39	20.34	0.11 0.00 Peak																																				
2	4.976	36.08	-33.46	69.54	15.01	20.89	0.18 0.00 Peak																																				
3	6.860	34.97	-34.57	69.54	13.73	21.05	0.19 0.00 Peak																																				

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

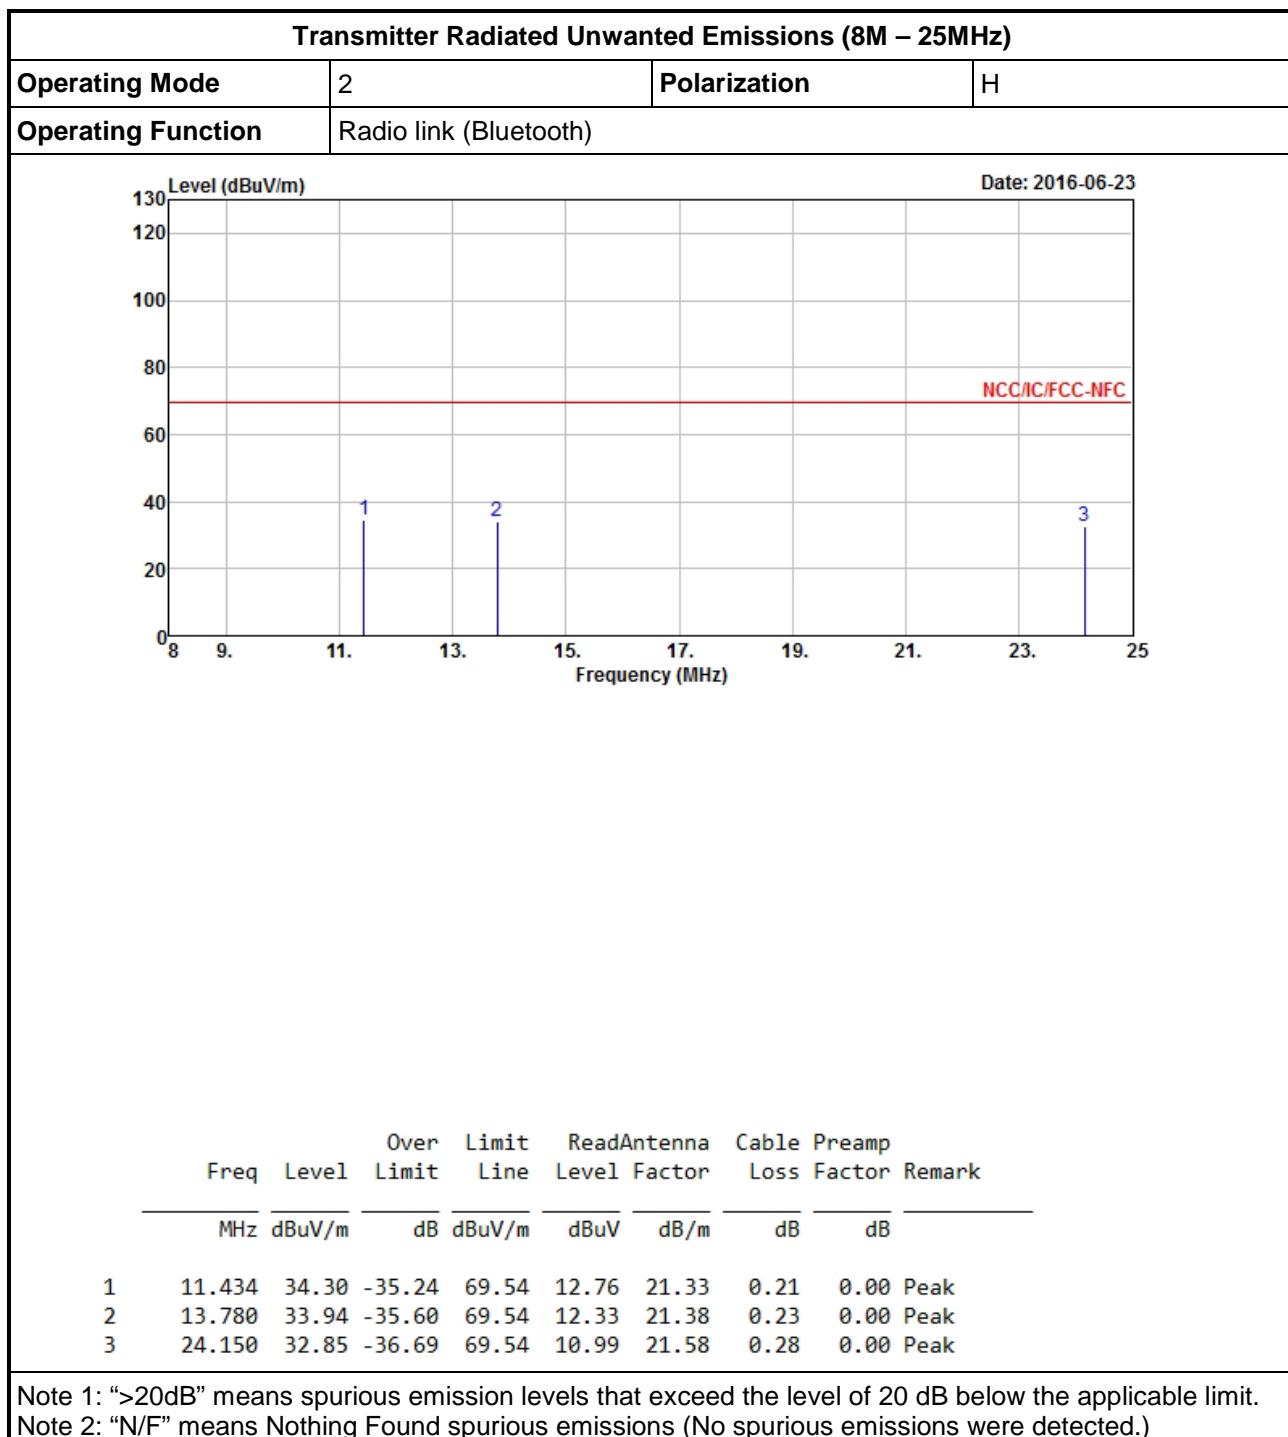




## Transmitter Radiated Unwanted Emissions (25M – 30MHz)


Operating Mode	2	Polarization	H																																																			
Operating Function	Radio link (Bluetooth)																																																					
Level (dBuV/m)			Date: 2016-06-23																																																			
<table><thead><tr><th></th><th>Over Limit</th><th>Read</th><th>Antenna</th><th>Cable</th><th>Preamp</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>25.650</td><td>31.66</td><td>-37.88</td><td>69.54</td><td>9.76</td><td>21.61</td><td>0.29</td><td>0.00</td><td>Peak</td></tr><tr><td>2</td><td>26.800</td><td>31.08</td><td>-38.46</td><td>69.54</td><td>9.15</td><td>21.64</td><td>0.29</td><td>0.00</td><td>Peak</td></tr><tr><td>3</td><td>29.700</td><td>30.48</td><td>-39.06</td><td>69.54</td><td>8.47</td><td>21.69</td><td>0.32</td><td>0.00</td><td>Peak</td></tr></tbody></table>				Over Limit	Read	Antenna	Cable	Preamp		Freq	Level	Limit	Line	Level	Factor	Loss	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	1	25.650	31.66	-37.88	69.54	9.76	21.61	0.29	0.00	Peak	2	26.800	31.08	-38.46	69.54	9.15	21.64	0.29	0.00	Peak	3	29.700	30.48	-39.06	69.54	8.47	21.69	0.32	0.00	Peak	
	Over Limit	Read	Antenna	Cable	Preamp																																																	
Freq	Level	Limit	Line	Level	Factor	Loss																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB																																																
1	25.650	31.66	-37.88	69.54	9.76	21.61	0.29	0.00	Peak																																													
2	26.800	31.08	-38.46	69.54	9.15	21.64	0.29	0.00	Peak																																													
3	29.700	30.48	-39.06	69.54	8.47	21.69	0.32	0.00	Peak																																													


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)




## 3.8.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

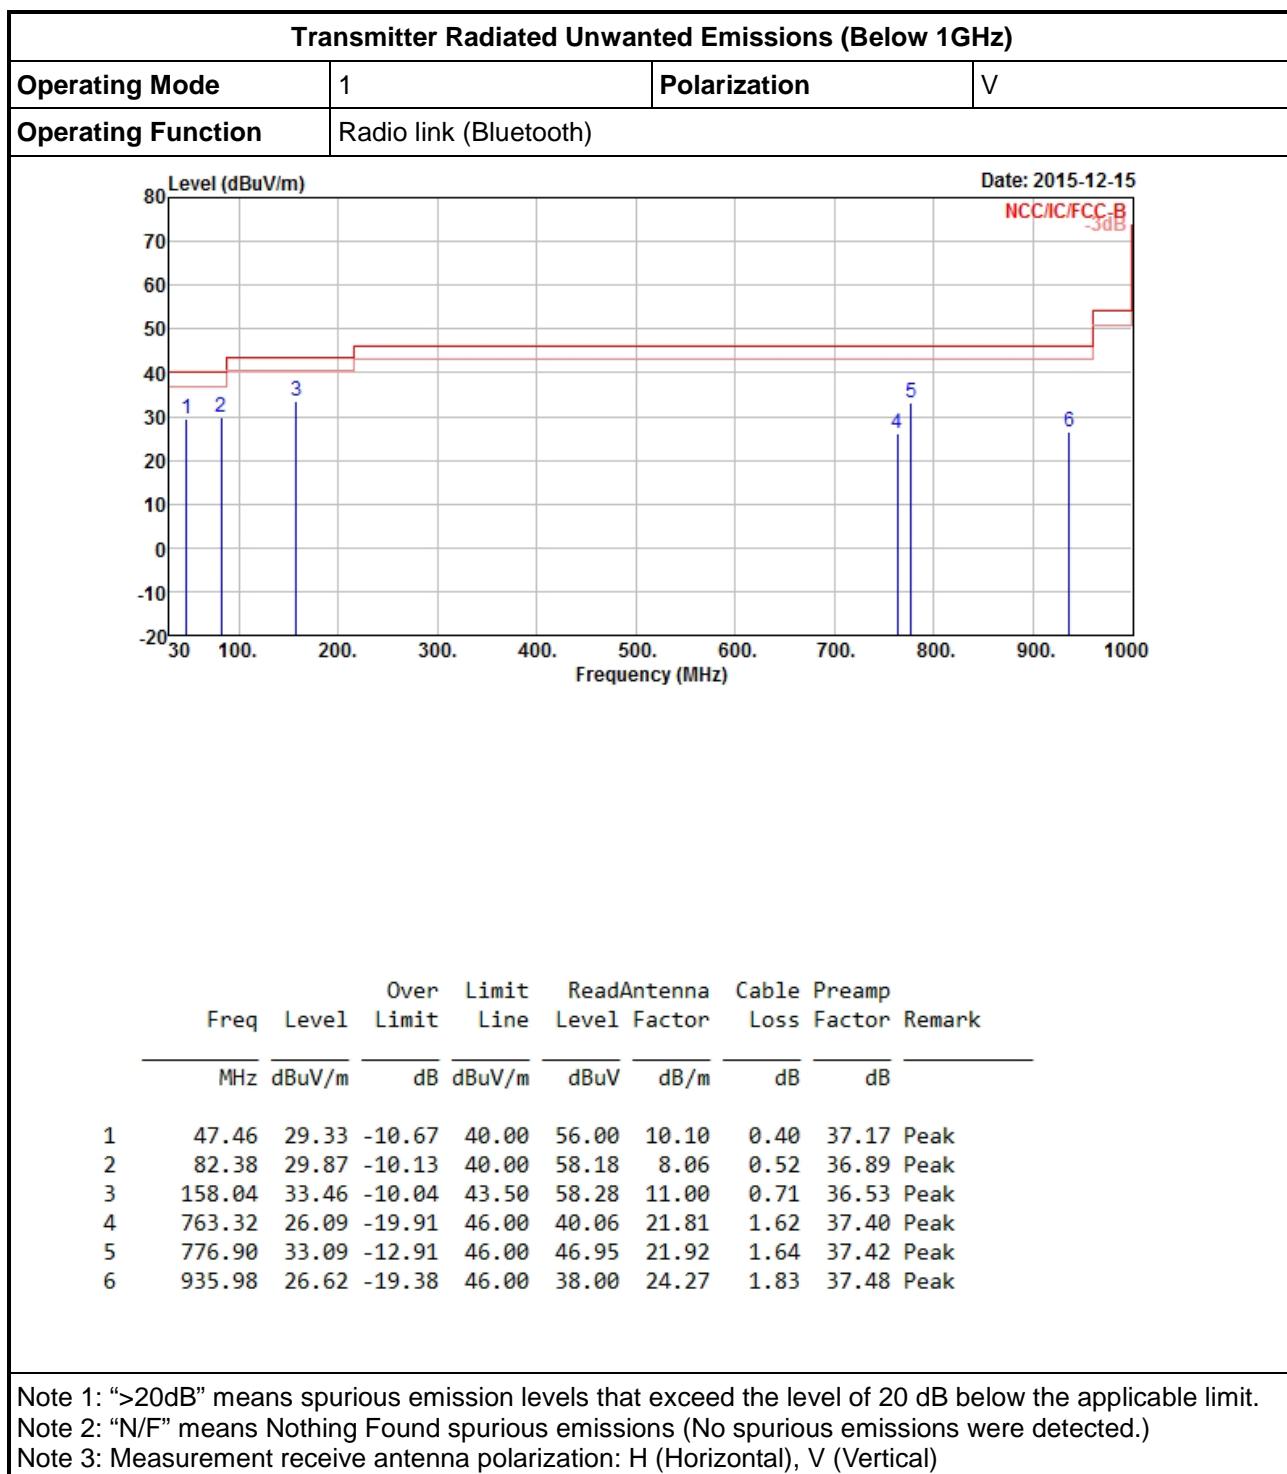

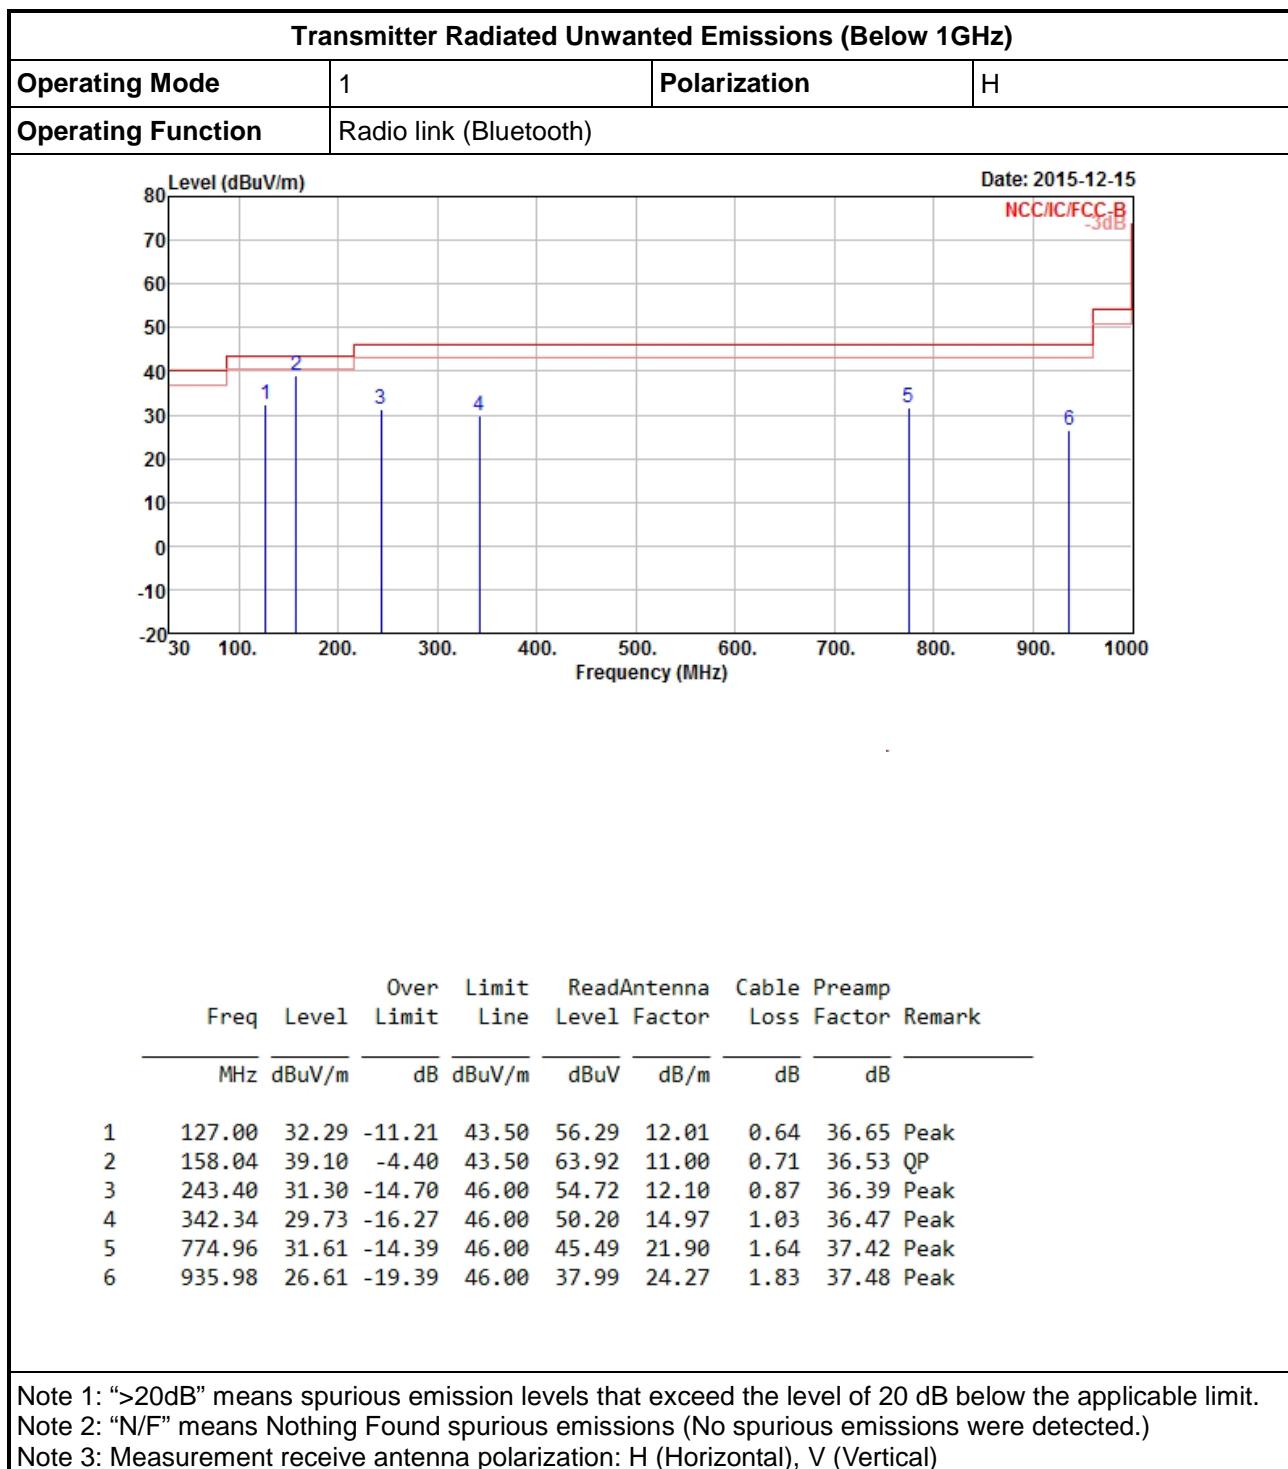


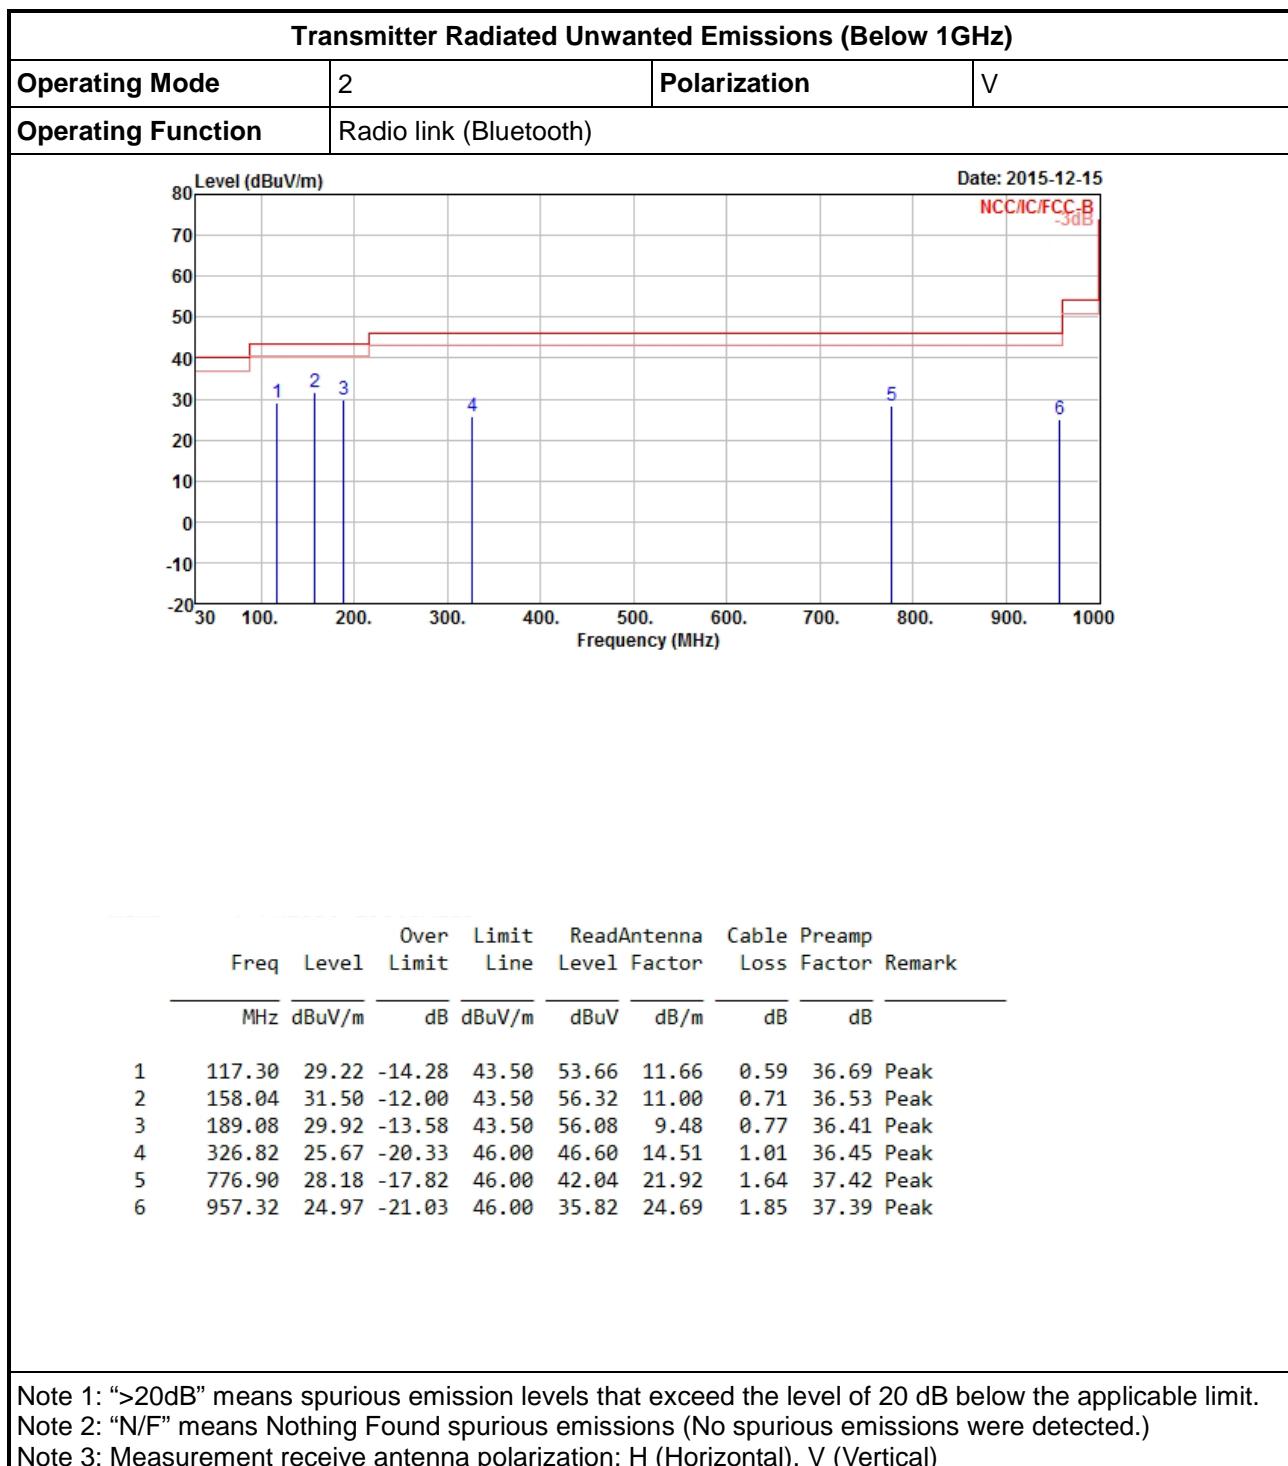


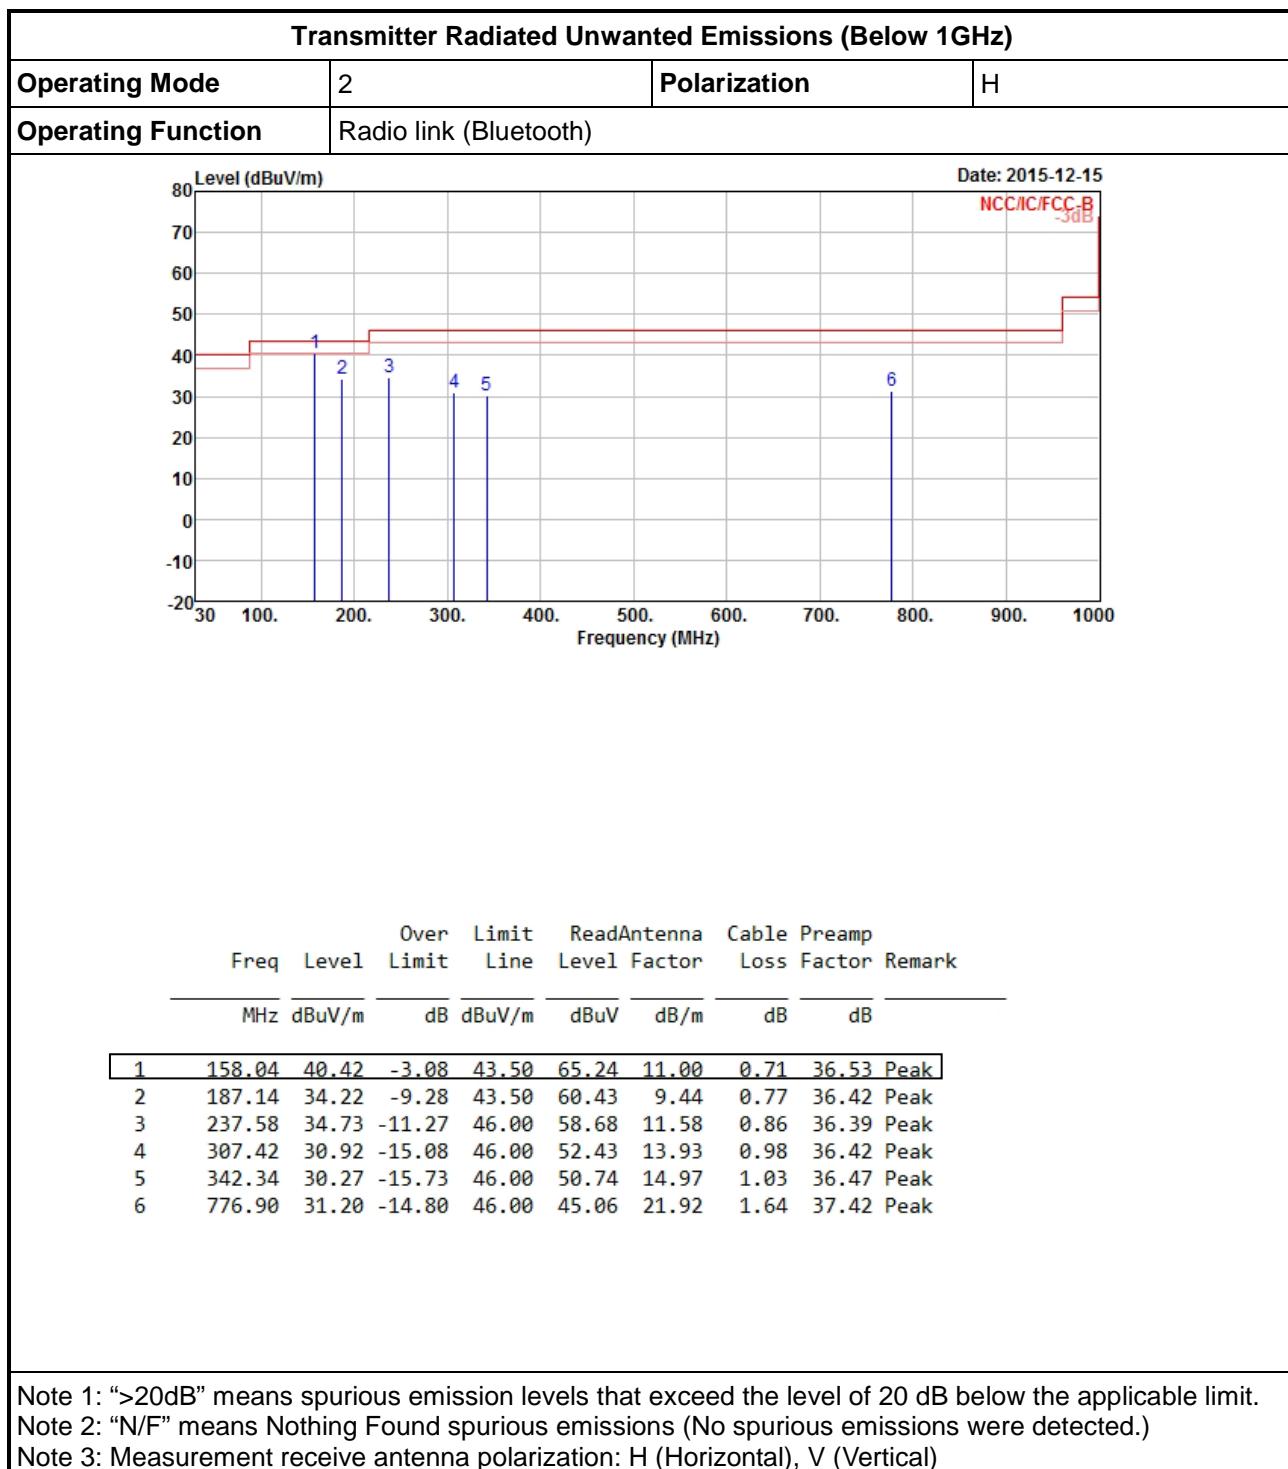






## 3.8.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

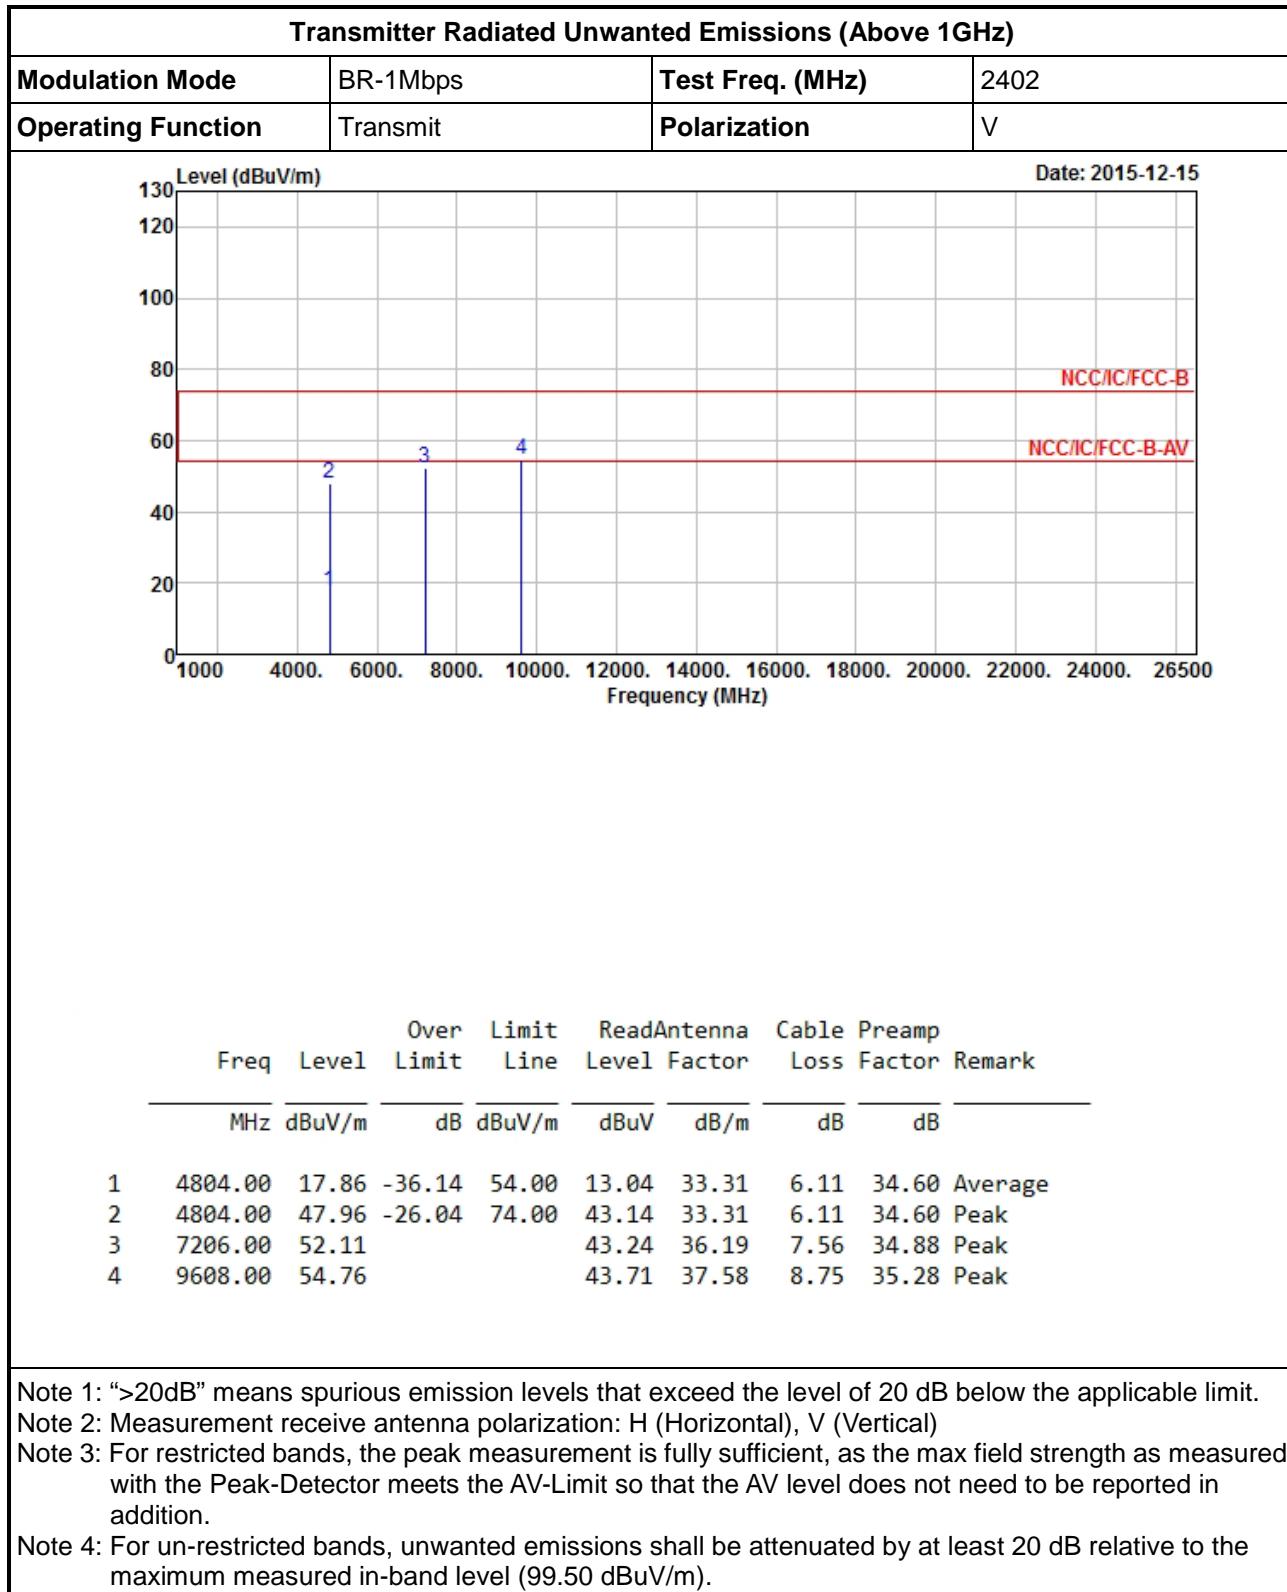


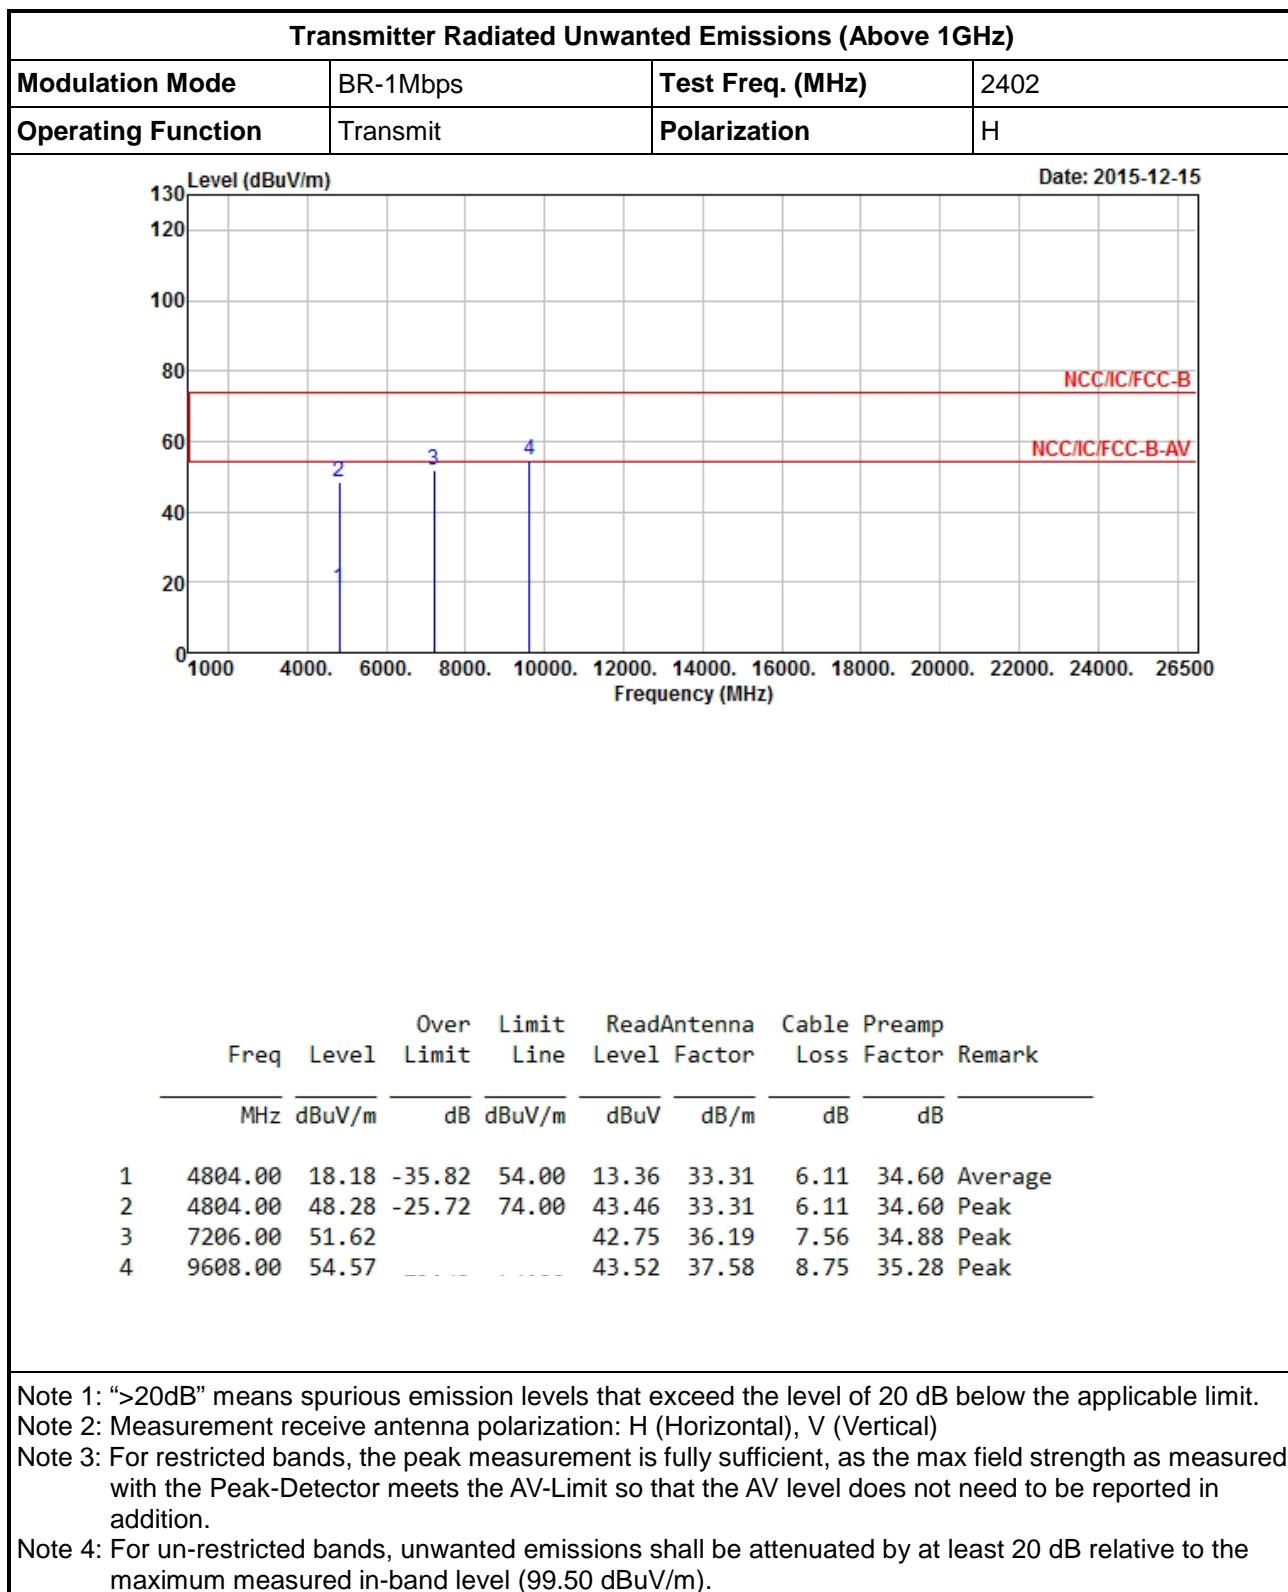

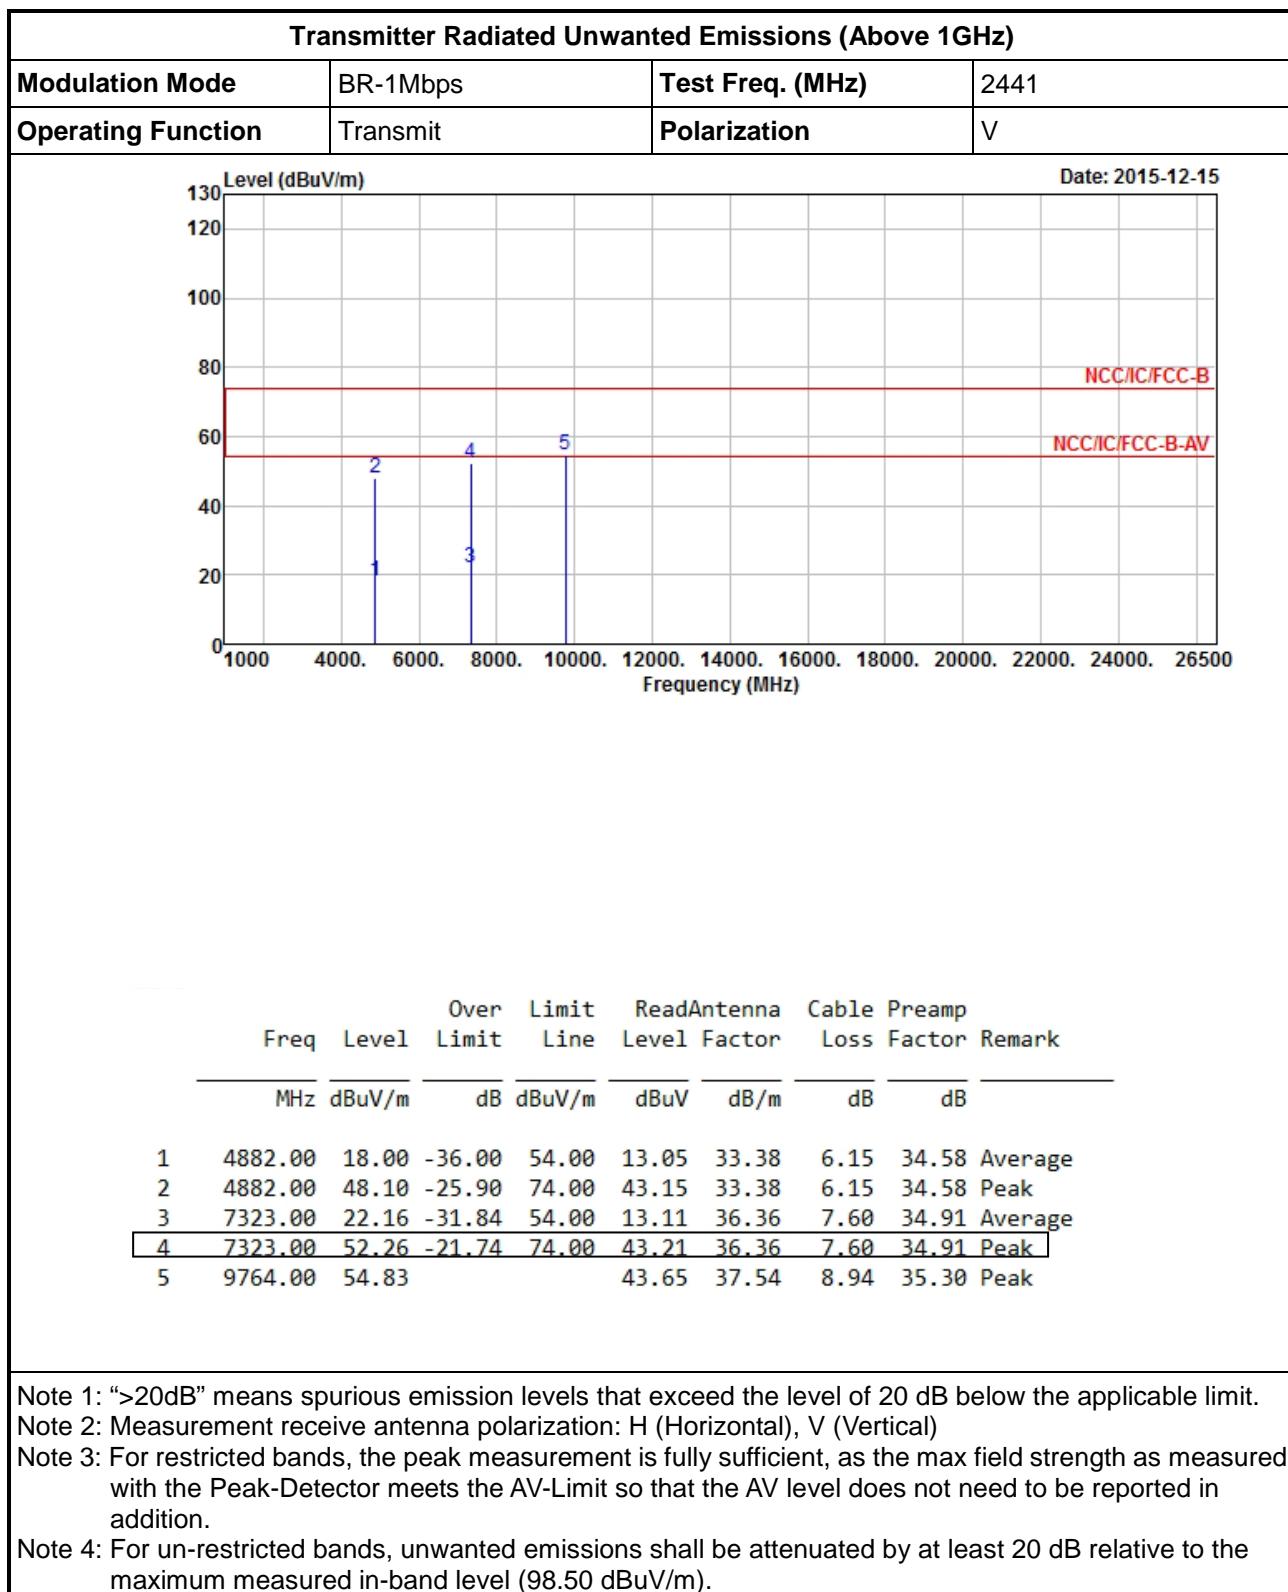

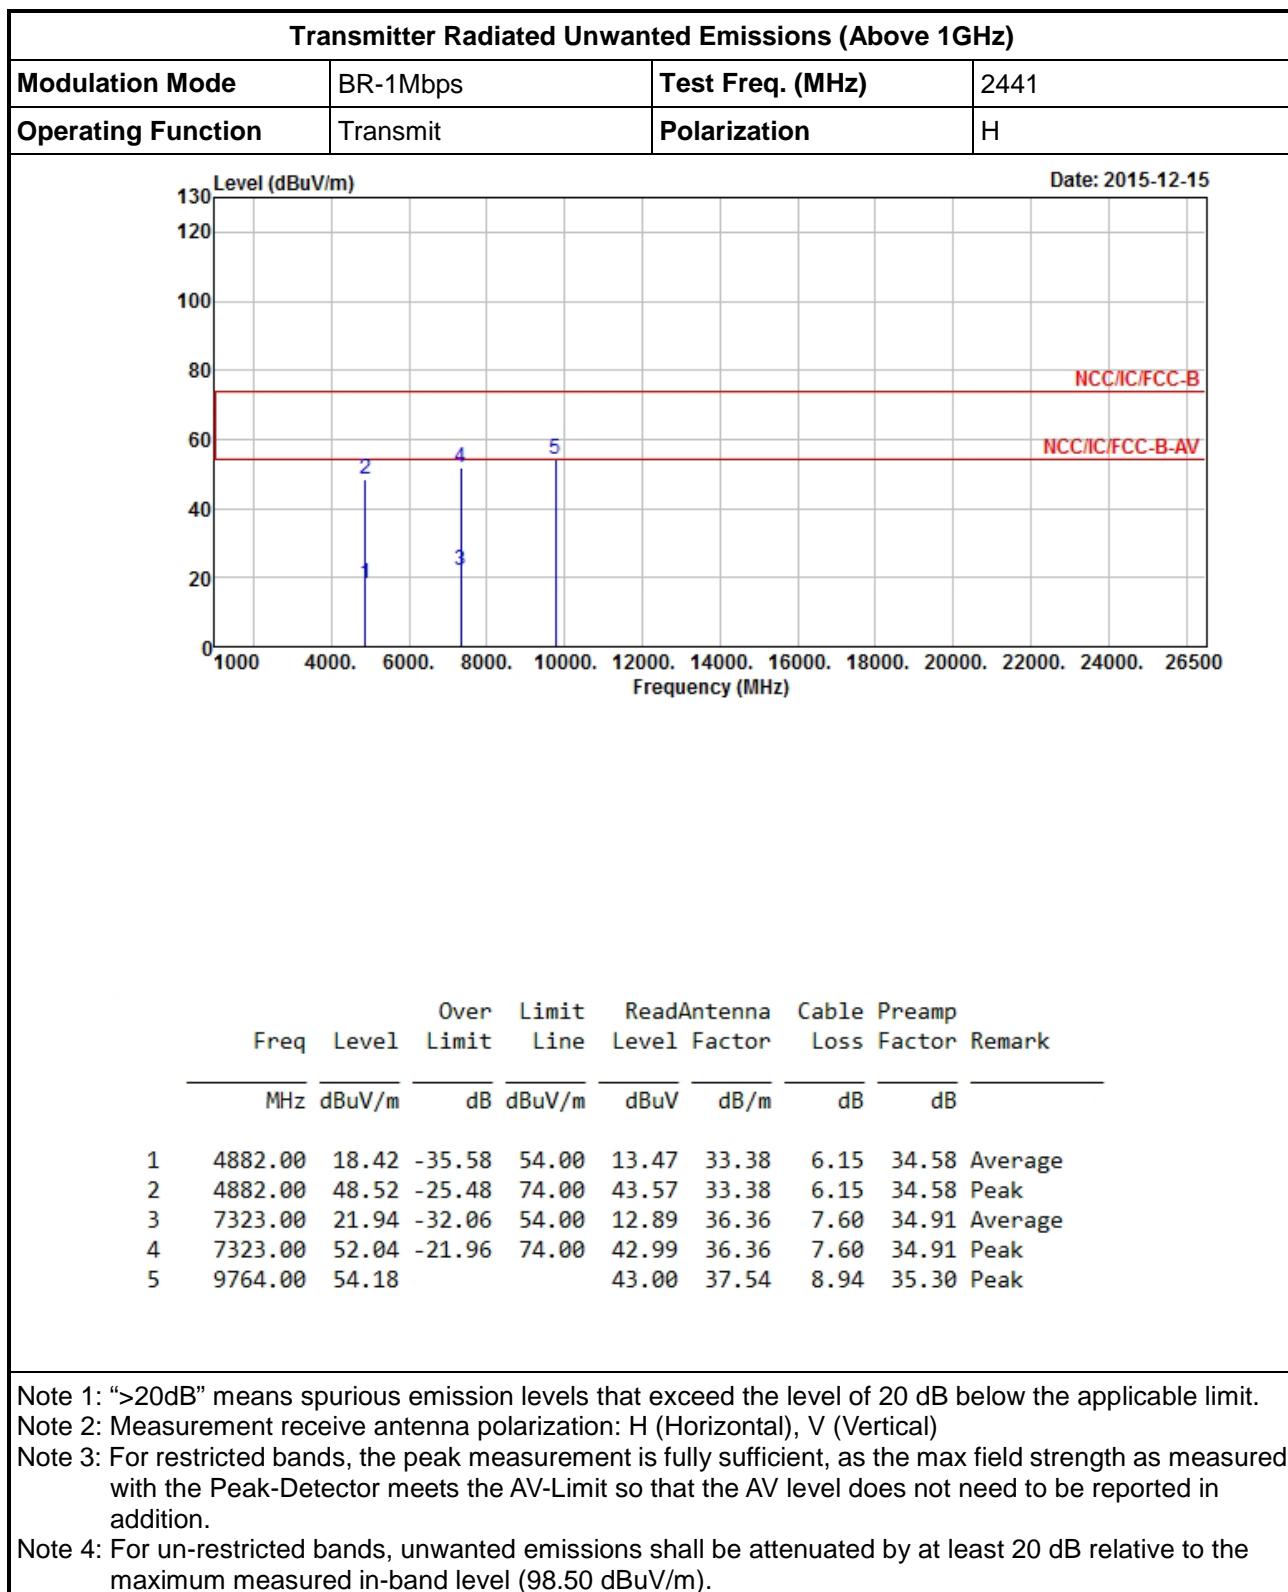

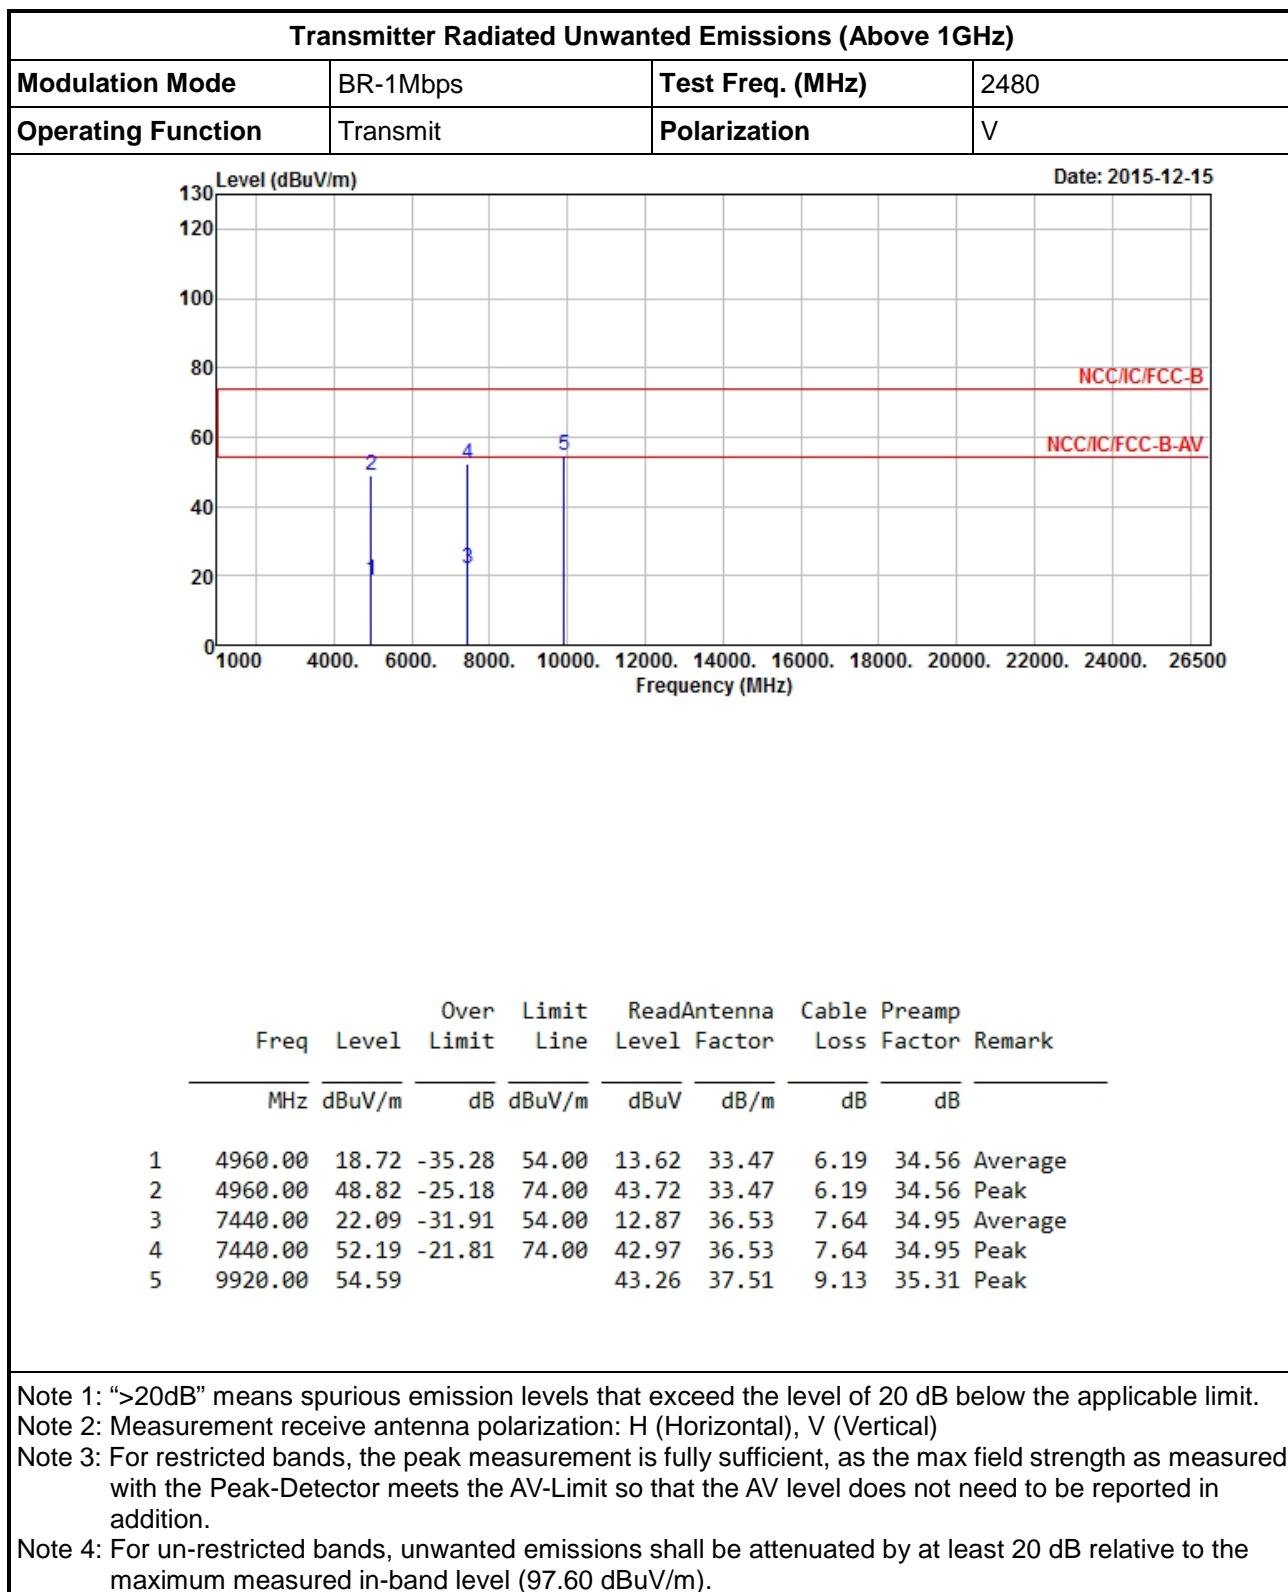

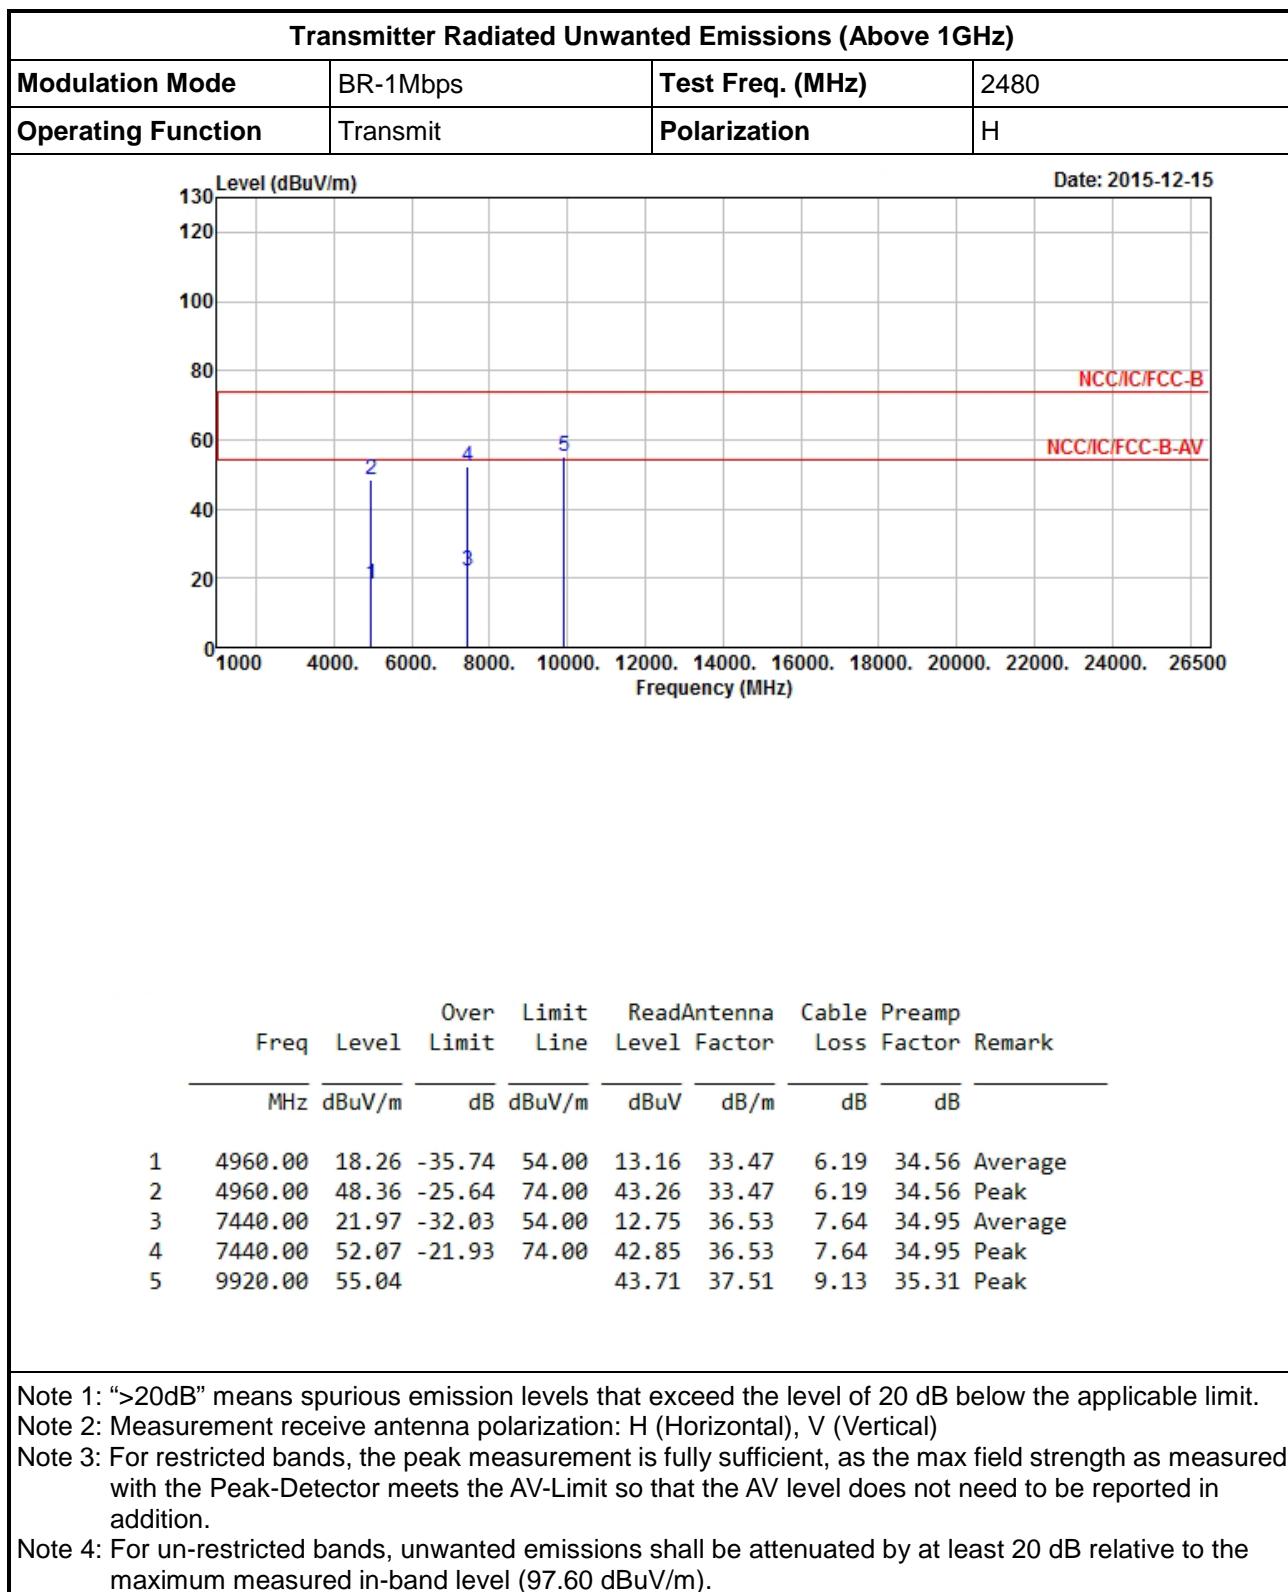



## 4 Test Equipment and Calibration Data

### < AC Conduction >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 15, 2015	Apr. 14, 2016
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2015	Jan. 21, 2016
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2015	Oct. 29, 2016
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	N/A

### < RF Conducted >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 06, 2015	May 05, 2016
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	Jul. 27, 2016
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	Jan. 28, 2016
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	Jan. 28, 2016

### < Radiated Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz 3m	Jul. 01, 2015	Jun. 30, 2016
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz 3m	Jul. 01, 2015	Jun. 30, 2016
Amplifier	EMC	EMC9135	980232	9kHz ~ 1.0GHz	Jan. 27, 2015	Jan. 26, 2016
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Sep. 10, 2015	Sep. 09, 2016
Spectrum	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	Jul. 15, 2015	Jul. 14, 2016
Bilog Antenna	TESEQ	CBL 6112D	35418	30MHz ~ 1GHz	Mar. 30, 2015	Mar. 29, 2016
Horn Antenna	AARONIA AG	POWERLOG 70180	05192	1GHz ~ 18GHz	Jan. 05, 2015	Jan. 04, 2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170614	18GHz ~ 40GHz	Dec. 29, 2014	Dec. 28, 2016
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jul. 23, 2015	Jul. 22, 2016
RF Cable-high	Jye Bao	RG142	03CH09-HY	1GHz ~ 40GHz	Jul. 23, 2015	Jul. 22, 2016
Turn Table	Chain Tek	T-200S	1308028	0 ~ 360 degree	N/A	N/A
Antenna Mast	Chain Tek	MBS-400	1308049	1 ~ 4 m	N/A	N/A

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Loop Antenna	ROHDE&SCHWARZ	HFH2-Z2	100330	9 kHz~30 MHz	Nov. 10, 2014	Nov. 09, 2016