



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

Part 15.247

Report Reference No. **CTL1501140132-WW**

Compiled by

(position+printed name+signature) .. File administrators Jacky Chen

Jacky Chen

Name of the organization performing
the tests Test Engineer Tracy Qi

Tracy Qi

(position+printed name+signature) ..

Approved by
(position+printed name+signature) .. Manager Tracy Qi

Tracy Qi

Date of issue Feb. 10, 2015

Test Laboratory Name **Shenzhen CTL Testing Technology Co., Ltd.**

Address Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Applicant's name **United Telelinks (Bangalore) Limited**

Address NO 39/13, Appareddy palya Main Road, off 7th Main, HAL2nd
stage, Indiranagar 2nd stage, Bangalore, India -560038

Test specification:

Standard FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–
2483.5 MHz, and 5725–5850 MHz.

TRF Originator Shenzhen CTL Testing Technology Co., Ltd.

Master TRF Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the
Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the
material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume
liability for damages resulting from the reader's interpretation of the reproduced material due to its
placement and context.

Test item description **handsets**

FCC ID **2AD3G-X4009**

Trade Mark N/A

Model/Type reference X4009

GSM/WCDMA

Transmit 2G:GSM 850: 824~849MHz, PCS 1900: 1850~1910MHz
3G:WCDMA Band II: 1850-1910MHz,
WCDMA Band V: 824~849MHz

Receive 2G:GSM 850: 869~894MHz, PCS 1900: 1930~1990MHz
3G:WCDMA Band II: 1930~1990MHz,
WCDMA Band V: 869~894MHz

Release Version 2G:R99
3G:Rel-6

Type of modulation.....: 2G: GMSK for GSM/GPRS
3G: QPSK
GPRS Type: Class B
GPRS Class: Class 12

GPS

work frequency: 1575.42MHz

Type of modulation.....: BPSK

Bluetooth

Work frequency: 2402~2480MHz

Version: V3.0+EDR, V4.0

Type of modulation.....: FHSS

Data Rate: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)

Wi-Fi

Work frequency: 802.11b/g/n(20MHz): 2412~2462MHz
802.11n(40MHz): 2422~2452MHz


Type of modulation.....: 802.11b DSSS, 802.11g/n: OFDM

Data Rate: 802.11b: 1/2/5.5/11 Mbps
802.11g: 6/9/12/18/24/36/48/54 Mbps
802.11n: up to 150 Mbps

Antenna Gain: 1.29 dBi for GSM850 and WCDMA Band V
2.27 dBi for PCS1900 and WCDMA Band II
0.84 dBi for Bluetooth and Wi-Fi

Antenna type: Internal

Result: **Positive**

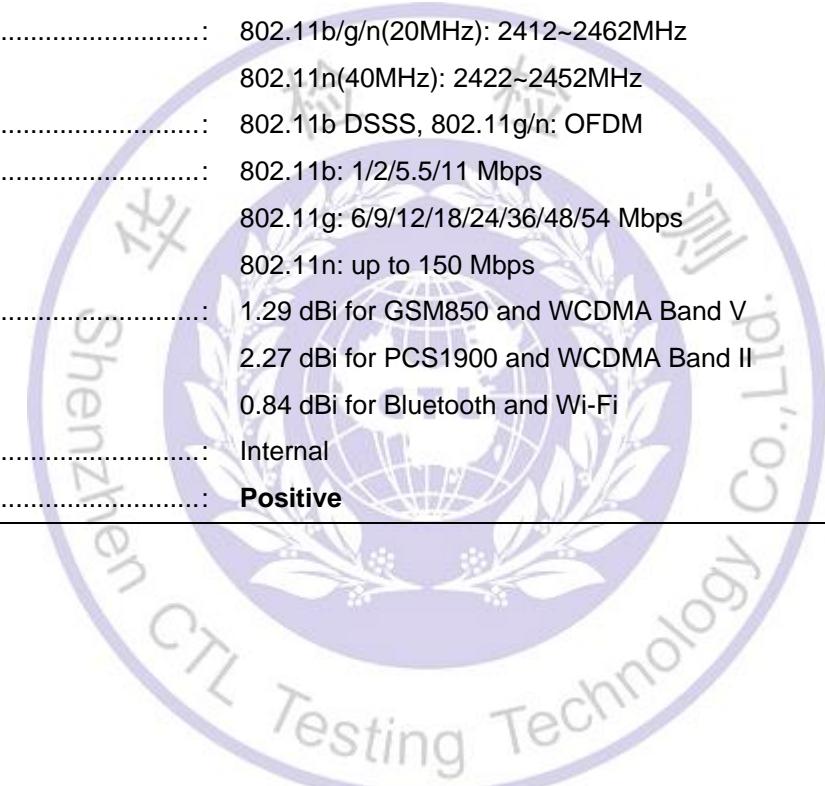

TEST REPORT

Test Report No. :	CTL1501140132-WW	Feb. 10, 2015 Date of issue
-------------------	------------------	--------------------------------

Equipment under Test : handsets

Model /Type : X4009

Applicant : **United Telelinks (Bangalore) Limited**

Address : NO 39/13, Appareddy palya Main Road, off 7th Main, HAL2nd stage, Indiranagar 2nd stage, Bangalore, India -560038

Manufacturer **NEW EXPLORER TELECOM CO.,LTD**

Address ROOM 5B, 5TH FLOOR, BLDG.1, FINANCE BASE, NO.8 KEFA RD, NANSHAN, SHENZHEN, CHINA

Test Result according to the standards on page 5:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>2.</u>	<u>SUMMARY</u>	<u>6</u>
2.1.	General Remarks	6
2.2.	Equipment Under Test	6
2.3.	Short description of the Equipment under Test (EUT)	6
2.4.	EUT operation mode	7
2.5.	EUT configuration	7
2.6.	NOTE	7
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Configuration of Tested System	8
3.5.	Duty Cycle	8
3.6.	Statement of the measurement uncertainty	9
3.7.	Equipments Used during the Test	9
3.8.	Summary of Test Result	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>11</u>
4.1.	Conducted Emissions Test	11
4.2.	Radiated Emission Test	14
4.3.	6dB Bandwidth Measurement	22
4.4.	Maximum Peak Output Power	31
4.5.	Band Edge Measurement	
	33_Toc411436346	
4.6.	Power Spectral Density Measurement	66
4.7.	Spurious RF Conducted Emission	75
4.8.	Operation Frequency Range of 20dB Bandwidth	88
4.9.	Antenna Requirement	93
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>94</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>96</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.

ANSI C63.4-2009

[**KDB Publication No. 558074 D01 v03r02 Guidance on Measurements for Digital Transmission Systems**](#)



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Dec. 20, 2014

Testing commenced on : Dec. 20, 2014

Testing concluded on : Jan. 20, 2015

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	: <input checked="" type="radio"/> 120V / 60 Hz <input type="radio"/> 115V / 60Hz
	: <input type="radio"/> 12 V DC <input type="radio"/> 24 V DC
	: <input type="radio"/> Other (specified in blank below)

DC 3.7V from battery

Description of the test mode

IEEE 802.11b/g/n(HT20): Thirteen channels are provided to the EUT, but only eleventh channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

IEEE 802.11n (HT40)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
3	2422	8	2447
4	2427	9	2452
5	2432		
6	2437		
7	2442		

2.3. Short description of the Equipment under Test (EUT)

A **handsets** with UMTS/GSM, Bluetooth, GPS and wifi function.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2412MHz), mid (2437MHz) and high (2462MHz) for 802.11b/g/n(HT20) and Channel low (2422MHz), mid (2437MHz) and high (2452MHz) for 802.11 n HT40 with highest data rate are chosen for full testing.
3. Test Mode:

Test Mode(TM)	Description	Remark
1	Transmitting	802.11 b 2412MHz, 2437MHz, 2462MHz
2	Transmitting	802.11 g 2412MHz, 2437MHz, 2462MHz
3	Transmitting	802.11 n HT20 2412MHz, 2437MHz, 2462MHz
4	Transmitting	802.11 n HT40 2422MHz, 2437MHz, 2452MHz

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

- AC adapter

Manufacturer : MGT

Model No. : Strong4.0

- Earphone

Manufacturer : MGT

Model No. : -----

2.6. NOTE

1. The EUT is an 802.11b/g/n **handsets**, The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g, 802.11n	FCC Part 15 Subpart C (Section15.247)	CTL1501140132-WW CTL1501140132-SAR

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	✓	—	—	—
802.11g	✓	—	—	—
802.11n(20MHz)	✓	—	—	—
802.11n(40MHz)	✓	—	—	—

3. The EUT incorporates a SISO function, Physically, the EUT provides two completed transmitter and two completed receivers.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCCID: 2AD3G-X4009 filing to comply with of the FCC part15.247 Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

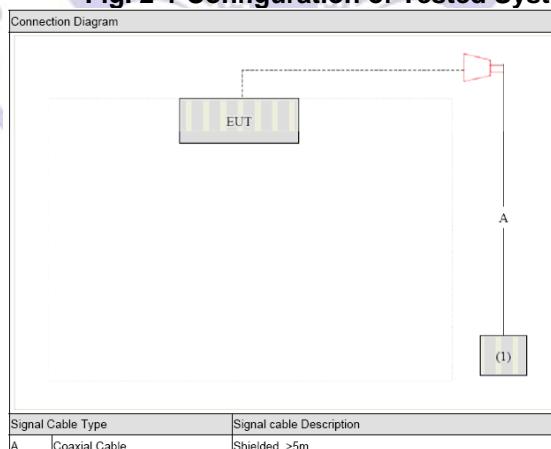

3.5. Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/> Operated normally mode for worst duty cycle		
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle		
Mode	Duty Cycle (%)	Duty Factor (dB)
11b	100	0
11g	100	0
11n HT20	100	0
11n HT40	100	0

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.7. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12	2015/07/11
EMI Test Receiver	R&S	ESCI	103710	2014/07/10	2015/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2014/07/06	2015/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2014/07/06	2015/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12	2015/07/11
Horn Antenna	SCHWARZBECK	BBHA9170	1562	2014/07/12	2015/07/11
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2014/07/12	2015/07/11
LISN	R&S	ENV216	101316	2014/07/10	2015/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2014/07/10	2015/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2014/07/10	2015/07/09
Amplifier	HP	8447D	3113A07663	2014/07/10	2015/07/09
Transient Limiter	Com-Power	LIT-153	532226	2014/07/10	2015/07/09
Radio Communication Tester	R&S	CMU200	3655A03522	2014/07/06	2015/07/05
Temperature/Humidity Meter	zhicheng	ZC1-2	22522	2014/07/10	2015/07/09
SIGNAL GENERATOR	HP	8647A	3200A00852	2014/07/10	2015/07/09
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2014/07/06	2015/07/05
Power Sensor	Anritsu	MA2411B	0738552	2014/07/06	2015/07/05
Climate Chamber	ESPEC	EL-10KA	A20120523	2014/07/06	2015/07/05
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	/	2014/07/06	2015/07/05
High-Pass Filter	K&L	41H10-1375/U12750-O/O	/	2014/07/06	2015/07/05
RF Cable	HUBER+SUHNER	RG214	/	2014/07/09	2015/07/08

3.8. Summary of Test Result

FCC PART 15		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	Normal Link	11 Mbps	1
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission	11b/DSSS	11 Mbps	1/6/11
	11g/OFDM	54 Mbps	1/6/11
	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
	11b/DSSS	11 Mbps	1/6/11
Radiated Emission 30MHz~1GHz	11g/OFDM	54 Mbps	1/6/11
	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
	11b/DSSS	11 Mbps	1/6/11
Radiated Emission 1GHz~10th Harmonic	11g/OFDM	54 Mbps	1/6/11
	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
	11b/DSSS	11 Mbps	1/11
Band Edge Compliance of RF Emission	11g/OFDM	54 Mbps	1/11
	11n(20MHz)/OFDM	65Mbps	1/11
	11n(40MHz)/OFDM	150Mbps	3/9

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

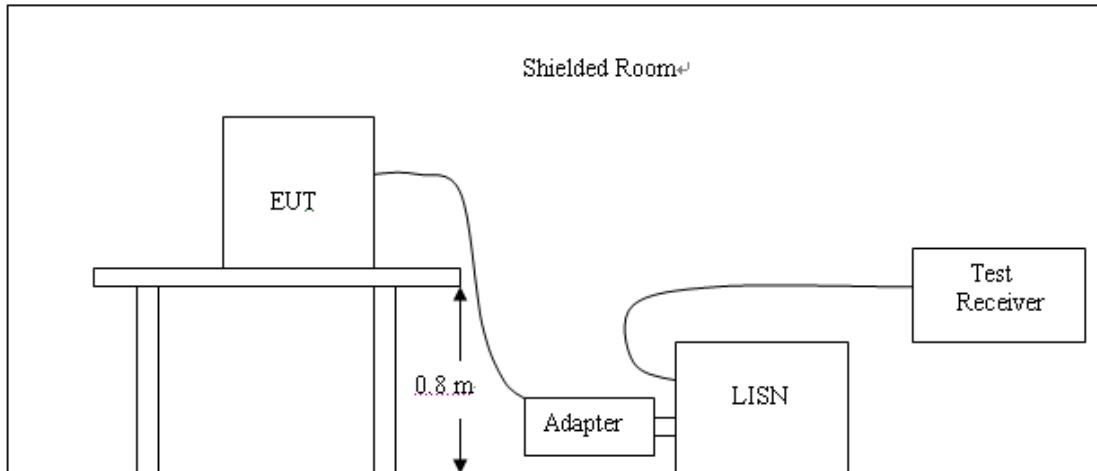

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

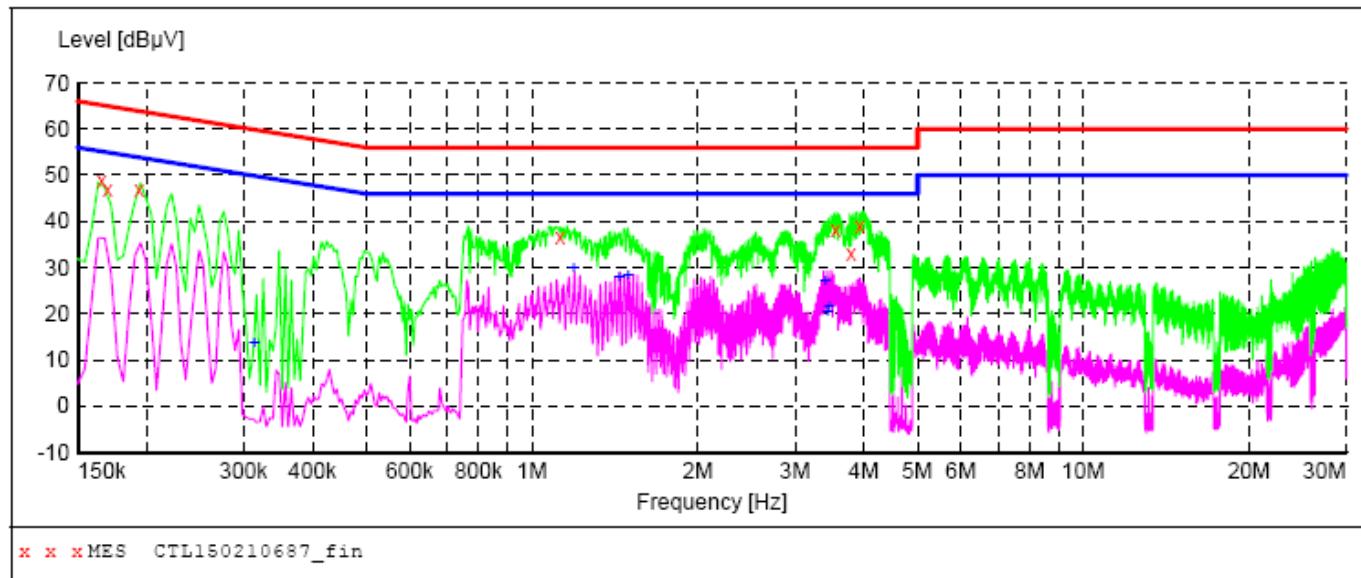**MEASUREMENT RESULT: "CTL150210687_fin"**

2/10/2015 5:16PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.166000	48.80	10.2	65	16.4	QP	L1	GND
0.170000	47.00	10.2	65	18.0	QP	L1	GND
0.194000	46.80	10.2	64	17.1	QP	L1	GND
1.124000	36.50	10.3	56	19.5	QP	L1	GND
3.554000	38.10	10.4	56	17.9	QP	L1	GND
3.794000	32.90	10.4	56	23.1	QP	L1	GND

MEASUREMENT RESULT: "CTL150210687_fin2"

2/10/2015 5:16PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.314000	13.50	10.2	50	36.4	AV	L1	GND
1.190000	29.80	10.3	46	16.2	AV	L1	GND
1.442000	27.90	10.3	46	18.1	AV	L1	GND
1.496000	28.30	10.3	46	17.7	AV	L1	GND
3.410000	27.00	10.4	46	19.0	AV	L1	GND
3.440000	20.40	10.4	46	25.6	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

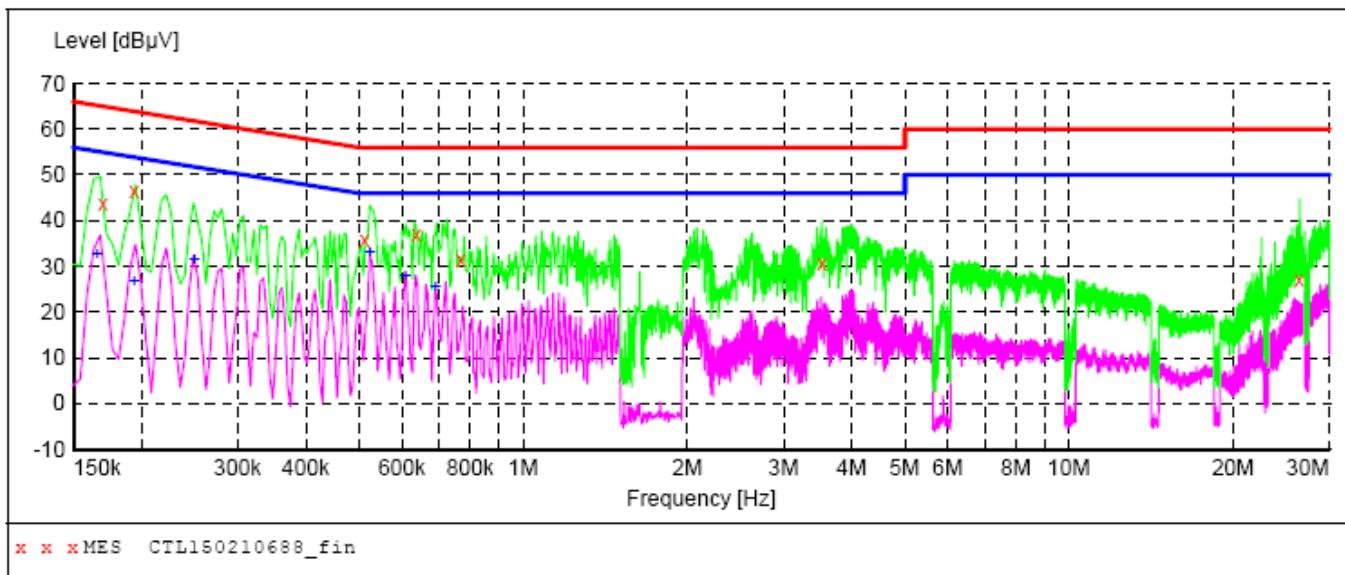

MEASUREMENT RESULT: "CTL150210688_fin"

2/10/2015 5:19PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.170000	43.80	10.2	65	21.2	QP	N	GND
0.194000	46.60	10.2	64	17.3	QP	N	GND
0.512000	35.70	10.2	56	20.3	QP	N	GND
0.638000	36.90	10.2	56	19.1	QP	N	GND
0.770000	31.40	10.2	56	24.6	QP	N	GND
3.524000	30.80	10.4	56	25.2	QP	N	GND

MEASUREMENT RESULT: "CTL150210688_fin2"


2/10/2015 5:19PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.166000	32.70	10.2	55	22.5	AV	N	GND
0.194000	26.60	10.2	54	27.3	AV	N	GND
0.250000	31.60	10.2	52	20.2	AV	N	GND
0.524000	33.20	10.2	46	12.8	AV	N	GND
0.608000	27.90	10.2	46	18.1	AV	N	GND
0.692000	25.70	10.2	46	20.3	AV	N	GND


4.2. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

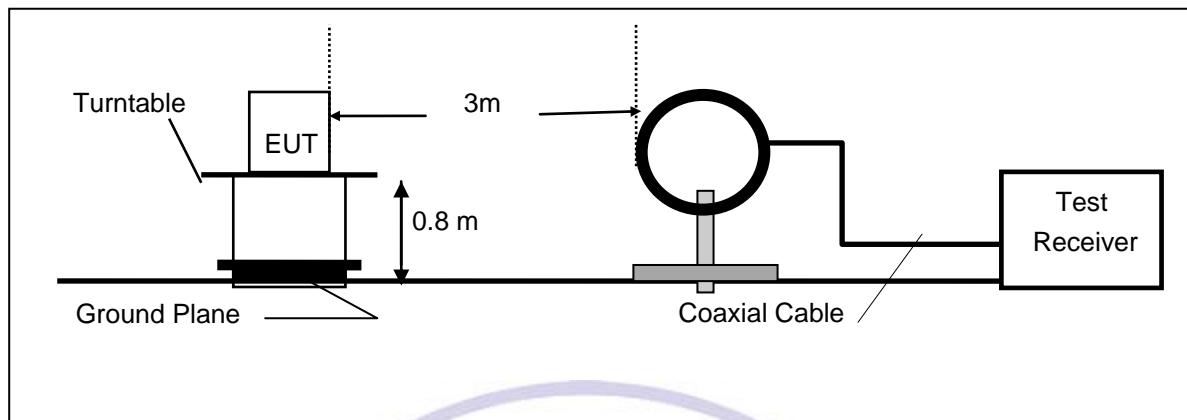

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

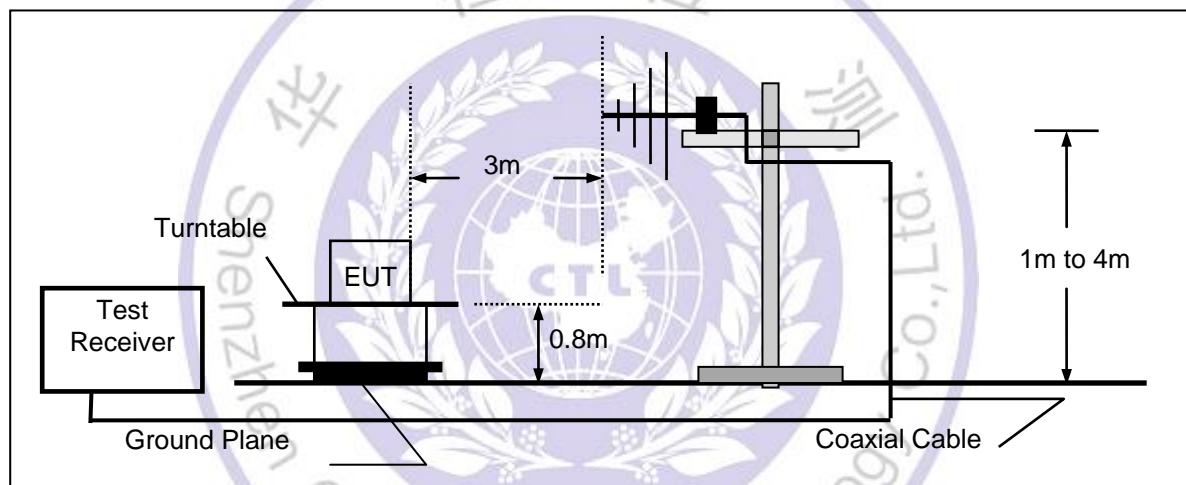

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

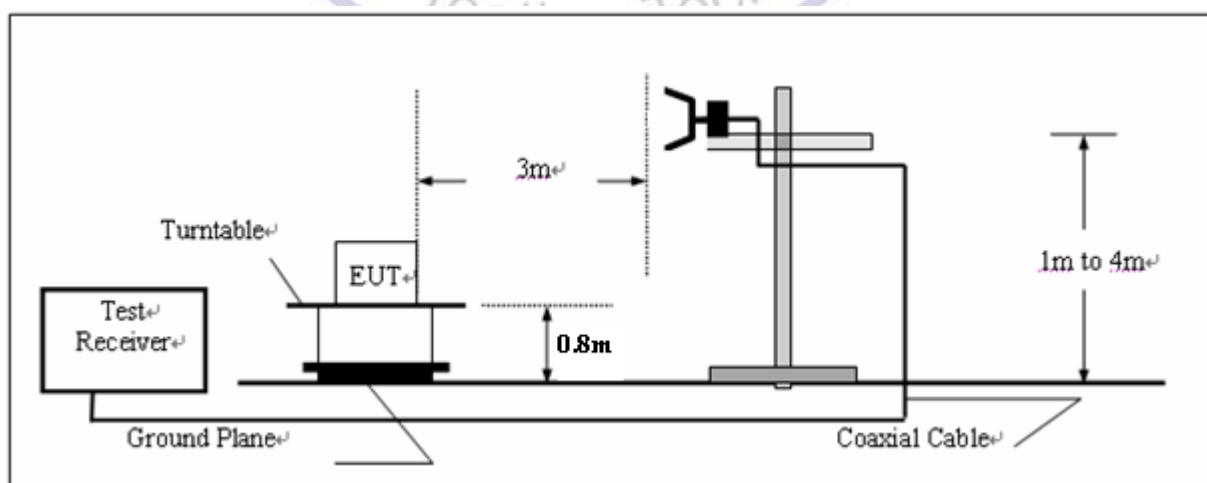

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f > 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Repeat above procedures until all frequency measurements have been completed.

Note:

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

TEST RESULTS

9KHz-30MHz:

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor= $40 \log (\text{specific distance} / \text{test distance})$ (dB);
 Limit line= specific limits (dBuV) + distance extrapolation factor.

Below 1GHz:

The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz JB1

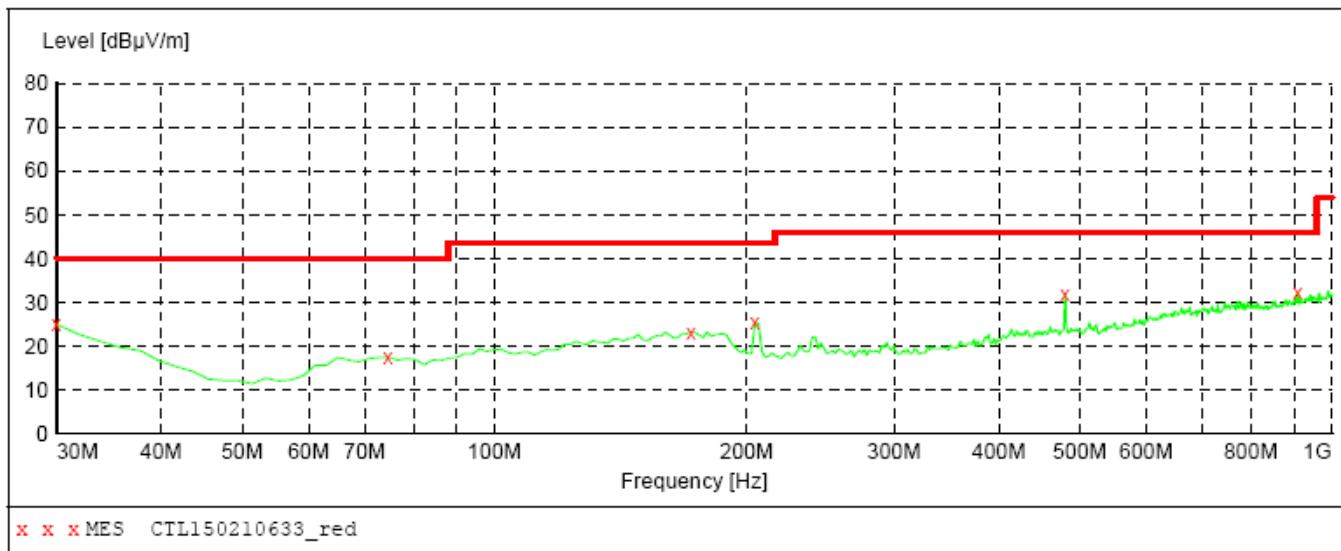


MEASUREMENT RESULT: "CTL150210633_red"

2/10/2015 4:37PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.90	21.1	40.0	15.1	---	0.0	0.00	HORIZONTAL
74.620000	17.50	8.5	40.0	22.5	---	0.0	0.00	HORIZONTAL
171.620000	23.20	13.4	43.5	20.3	---	0.0	0.00	HORIZONTAL
204.600000	25.40	14.4	43.5	18.1	---	0.0	0.00	HORIZONTAL
480.080000	32.00	20.1	46.0	14.0	---	0.0	0.00	HORIZONTAL
910.760000	32.10	26.2	46.0	13.9	---	0.0	0.00	HORIZONTAL

SWEET TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

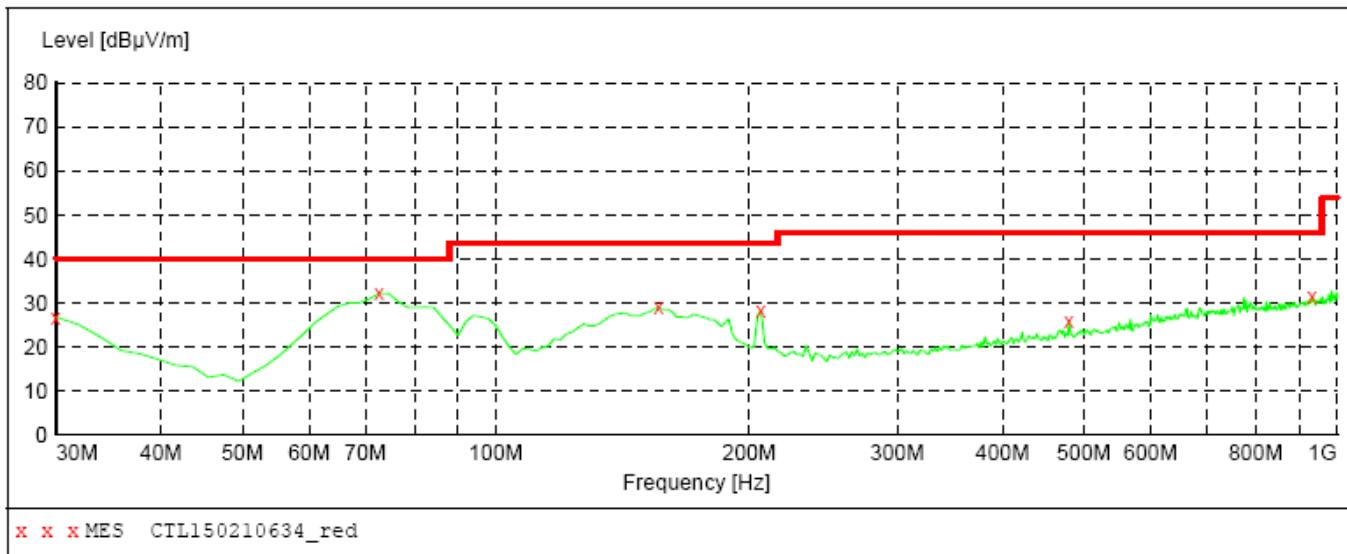***MEASUREMENT RESULT: "CTL150210634_red"***

2/10/2015 4:39PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	26.70	21.1	40.0	13.3	---	0.0	0.00	VERTICAL
72.680000	32.10	8.5	40.0	7.9	---	0.0	0.00	VERTICAL
156.100000	28.90	14.0	43.5	14.6	---	0.0	0.00	VERTICAL
206.540000	28.40	14.3	43.5	15.1	---	0.0	0.00	VERTICAL
480.080000	25.90	20.1	46.0	20.1	---	0.0	0.00	VERTICAL
934.040000	31.40	26.4	46.0	14.6	---	0.0	0.00	VERTICAL



Above 1GHz:
802.11b

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2411.9	79.6	30.8	110.4	Fundamental	/	PK
	H	192.1	13.1	14.8	27.9	46	18.1	PK
	H	472.8	11.8	19.7	31.5	46	14.5	PK
	V	3200	47.2	-0.6	46.6	54(note3)	7.4	PK
	V	4824	45.6	2.6	48.2	54(note3)	5.8	PK
	V	7236	61.2	8.1	69.3	74	4.7	PK
	V	7236	40.2	8.9	49.1	54	4.9	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
6	V	2437	78.6	31.2	109.8	Fundamental	/	PK
	H	201.2	16.2	15.2	31.4	46	14.6	PK
	H	725.1	4.5	21.2	25.7	46	20.3	PK
	V	3200	48.2	-0.6	47.6	54(note3)	6.4	PK
	V	4876	44.8	2.8	47.6	54(note3)	6.4	PK
	V	7298.5	60.0	8.8	68.8	74	5.2	PK
	V	7298.5	41.1	8.1	49.2	54	4.8	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
11	V	2462.3	80.3	30.9	111.2	Fundamental	/	PK
	H	103.5	14.2	14.9	29.1	46	16.9	PK
	H	468.5	10.4	21.2	31.6	46	14.4	PK
	V	3200	46.9	-0.6	46.3	54(note3)	7.7	PK
	V	4927	45.3	3	48.3	54(note3)	5.7	PK
	V	7386	58.3	8.9	67.2	74	6.8	PK
	V	7386	39.4	8.9	48.3	54	5.7	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

802.11g

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2411.9	76.3	31.9	108.2	Fundamental	/	PK
	H	153.2	11.4	15.7	27.1	46	18.9	PK
	H	453.9	11.5	21.3	32.8	46	13.2	PK
	V	3200	49.3	-0.6	48.7	54(note3)	5.3	PK
	V	4824	46.9	2.6	49.5	54(note3)	4.5	PK
	V	7236	60.2	8.9	69.1	74	4.9	PK
	V	7236	39.4	8.9	48.3	54	5.7	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
6	V	2437	76.5	31.2	107.7	Fundamental	/	PK
	H	396.1	14.6	14.8	29.4	46	16.6	PK
	H	443.7	8.1	21.2	29.3	46	16.7	PK
	V	3200	48.1	-0.6	47.5	54(note3)	6.5	PK
	V	4876	44.4	2.8	47.2	54(note3)	6.8	PK
	V	7298.5	60.6	8.8	69.4	74	4.6	PK
	V	7298.5	40.9	8.8	49.7	54	4.3	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
11	V	2462.3	75.9	30.9	106.8	Fundamental	/	PK
	H	106.8	6.2	21.2	27.4	46	18.6	PK
	H	396.1	14.8	14.7	29.5	46	16.5	PK
	V	3200	49.5	-0.6	48.9	54(note3)	5.1	PK
	V	4927	46.1	3.0	49.1	54(note3)	4.9	PK
	V	7386	60.8	8.9	69.7	74	4.3	PK
	V	7386	43.8	8.9	52.7	54	1.3	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

802.11n(20MHz)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2411.9	76.4	30.7	107.1	Fundamental	/	PK
	H	196.4	7.9	21.2	29.1	46	16.9	PK
	H	426.1	16.3	15.1	31.4	46	14.6	PK
	V	3200	49.9	-0.6	49.3	54(note3)	4.7	PK
	V	4824	45.3	2.6	47.9	54(note3)	6.1	PK
	V	7236	60.2	8.9	69.1	74	4.9	PK
	V	7236	38.7	8.9	47.6	54	6.4	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
6	V	2437	75.7	31.2	106.9	Fundamental	/	PK
	H	267.7	5.3	21.2	26.5	46	19.5	PK
	H	604.3	17.6	16.0	33.6	46	12.4	PK
	V	3200	48.5	-0.6	47.9	54(note3)	6.1	PK
	V	4876	46.6	2.8	49.4	54(note3)	4.6	PK
	V	7298.5	58.1	8.8	66.9	74	7.1	PK
	V	7298.5	38.8	8.8	47.6	54	6.4	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
11	V	2462.3	74.9	30.9	105.8	Fundamental	/	PK
	H	113.4	13.6	14.7	28.3	46	17.7	PK
	H	493.7	12.9	21.2	34.1	46	11.9	PK
	V	3200	50.9	-0.6	50.3	54(note3)	3.7	PK
	V	4927	44.7	3.0	47.7	54(note3)	6.3	PK
	V	7386	58.8	9.0	67.8	74	6.2	PK
	V	7386	39.2	9.0	48.2	54	5.8	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

802.11n(40MHz)

CH	Antenna	Frequency (MHz)	Reading Level (dB _B uV/m)	Factor (dB)	Measure Level (dB _B uV/m)	Limit (dB _B uV/m)	Margin (dB)	Detector
3	V	2422.1	74.5	30.7	105.2	Fundamental	/	PK
	H	241.5	7.9	21.2	29.1	46	16.9	PK
	H	713.1	18.5	15.1	33.6	46	12.4	PK
	V	3200	48.7	-0.6	48.1	54(note3)	5.9	PK
	V	4844.1	45.0	2.6	47.6	54(note3)	6.4	PK
	V	7266	60.2	8.9	69.1	74	4.9	PK
	V	7266	41.4	8.9	50.3	54	3.7	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
6	V	2437	74.9	31.2	106.1	Fundamental	/	PK
	H	201.7	6.0	21.2	27.2	46	18.8	PK
	H	561.6	14.7	16.0	30.7	46	15.3	PK
	V	3200	48.2	-0.6	47.6	54(note3)	6.4	PK
	V	4876	45.9	2.8	48.7	54(note3)	5.3	PK
	V	7298.5	60.8	8.8	69.6	74	4.4	PK
	V	7298.5	37.7	8.8	46.5	54	7.5	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK
9	V	2452.1	74.8	30.9	105.7	Fundamental	/	PK
	H	332.4	9.4	14.7	24.1	46	21.9	PK
	H	501.3	10.3	21.2	31.5	46	14.5	PK
	V	3200	48.5	-0.6	47.9	54(note3)	6.1	PK
	V	4904	42.9	3.0	45.9	54(note3)	8.1	PK
	V	7356.1	60.4	9.0	69.4	74	4.6	PK
	V	7356.2	37.1	9.0	46.1	54	7.9	AV
	H	24000	60.5	-8.9	51.6	54	2.4	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4. RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value.

4.3. 6dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

LIMIT


For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


Product	:	Handsets
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	9616	500	Pass
06	2437	9617	500	Pass
11	2462	9555	500	Pass


Channel 01 (2412MHz)

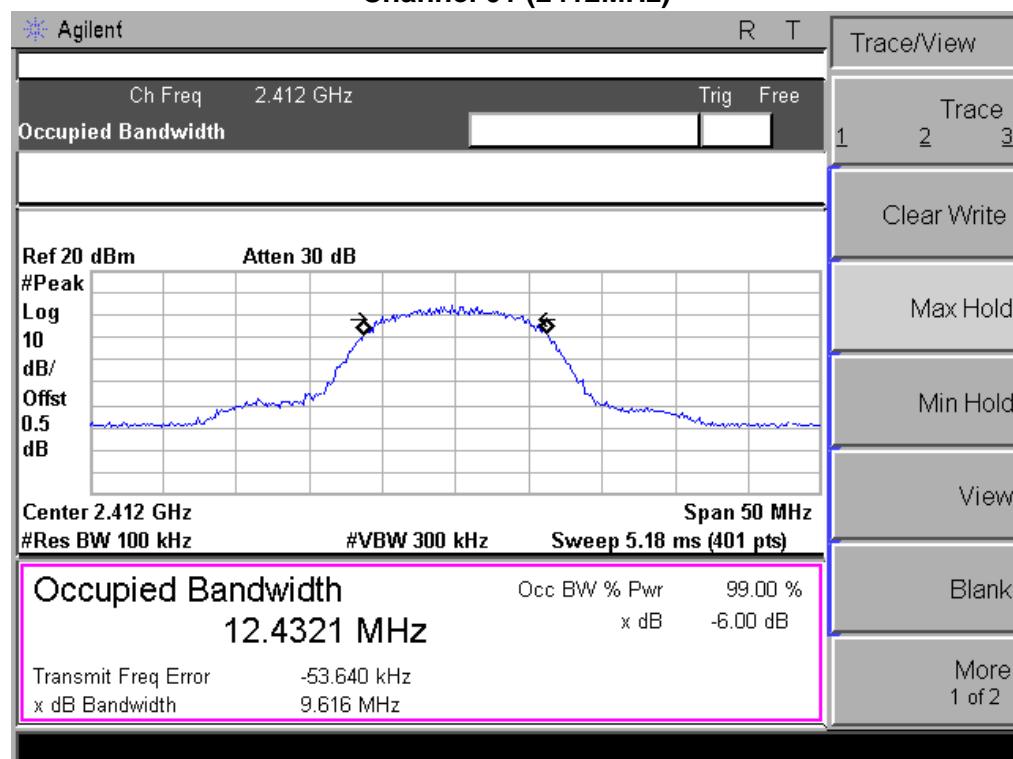

Channel 06 (2437MHz)

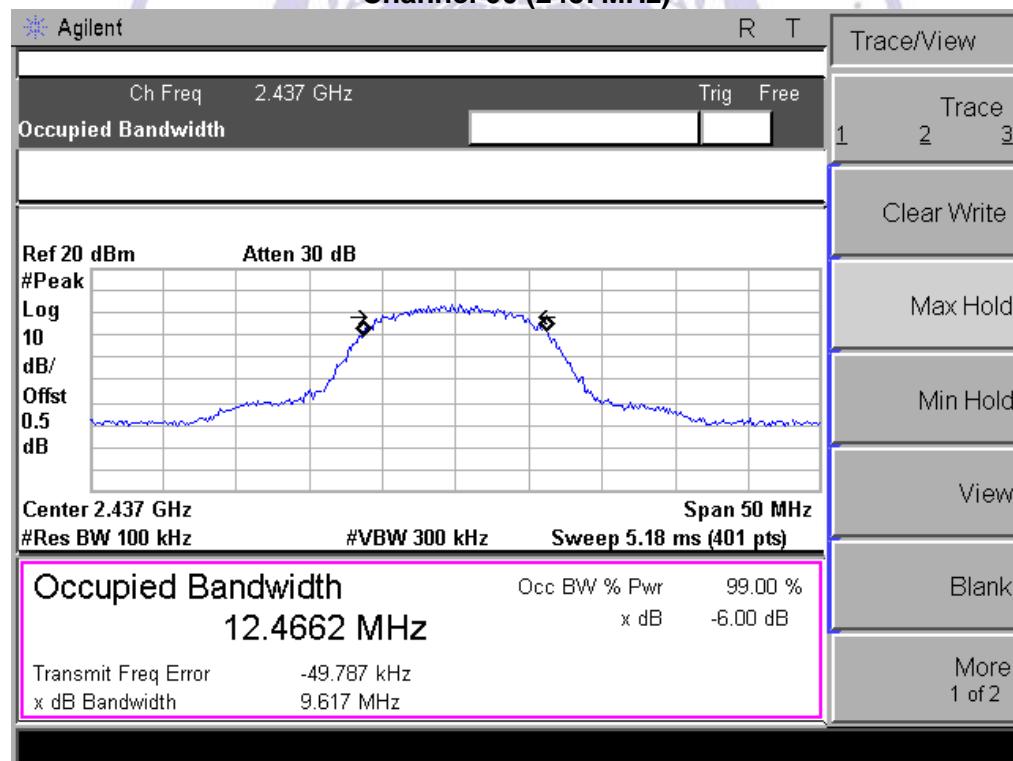


Channel 11 (2462MHz)

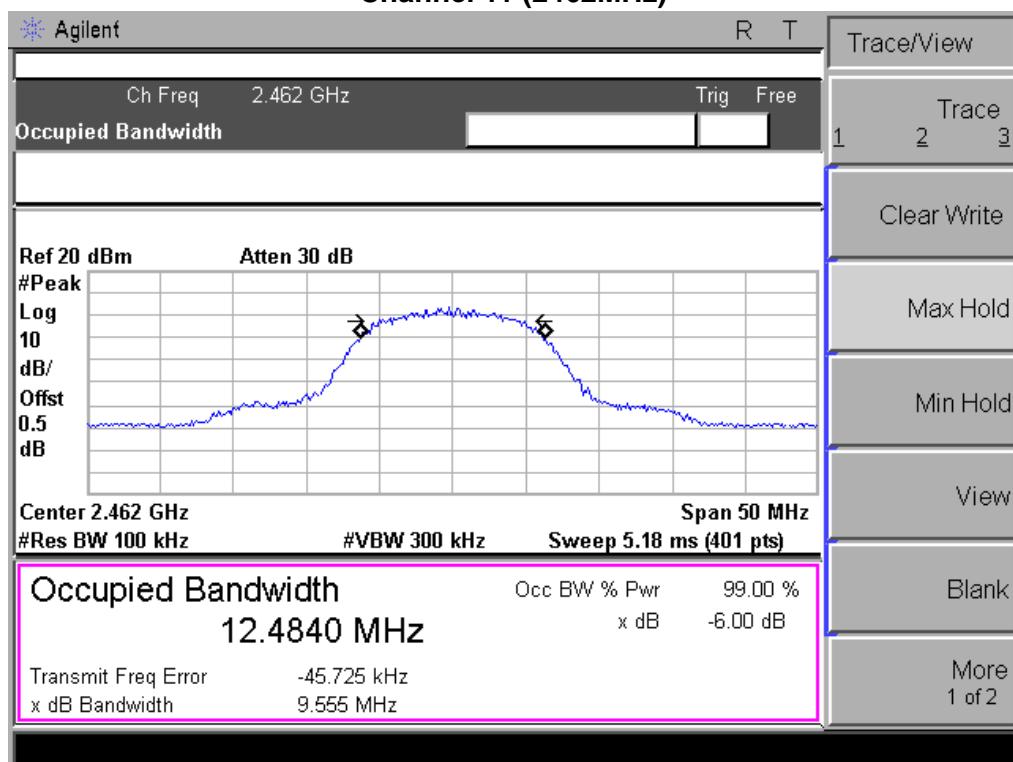


Product	:	Handsets
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	16576	500	Pass
06	2437	16500	500	Pass
11	2462	16575	500	Pass


Channel 01 (2412MHz)

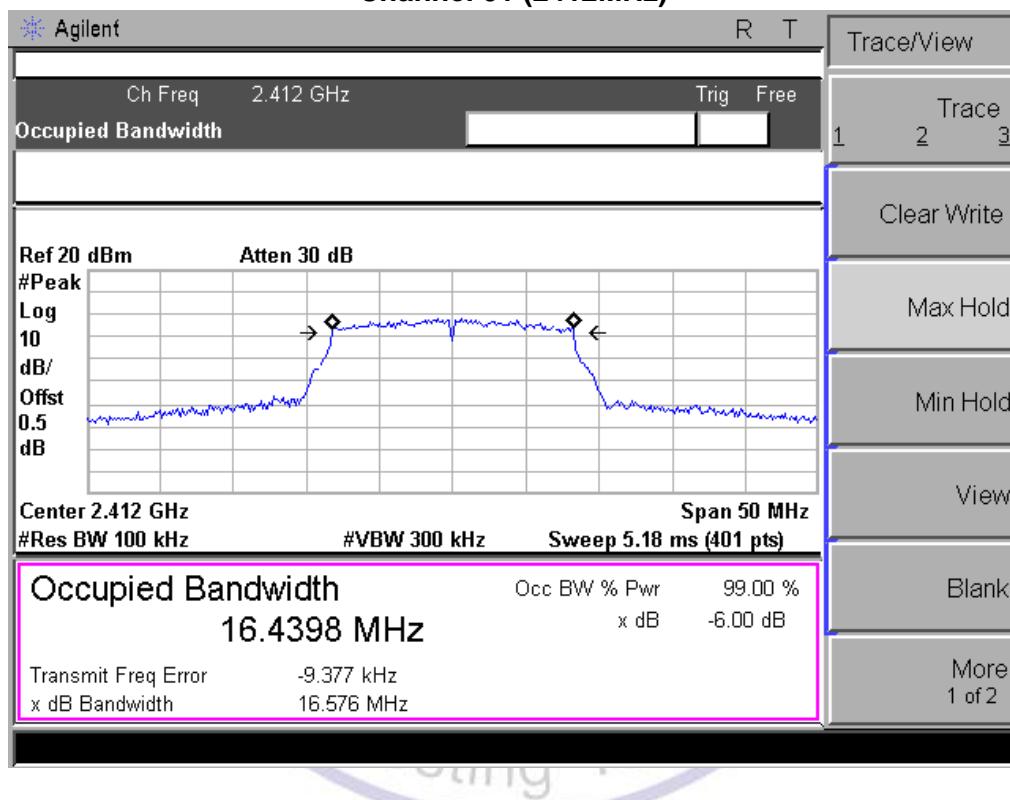

Channel 06 (2437MHz)

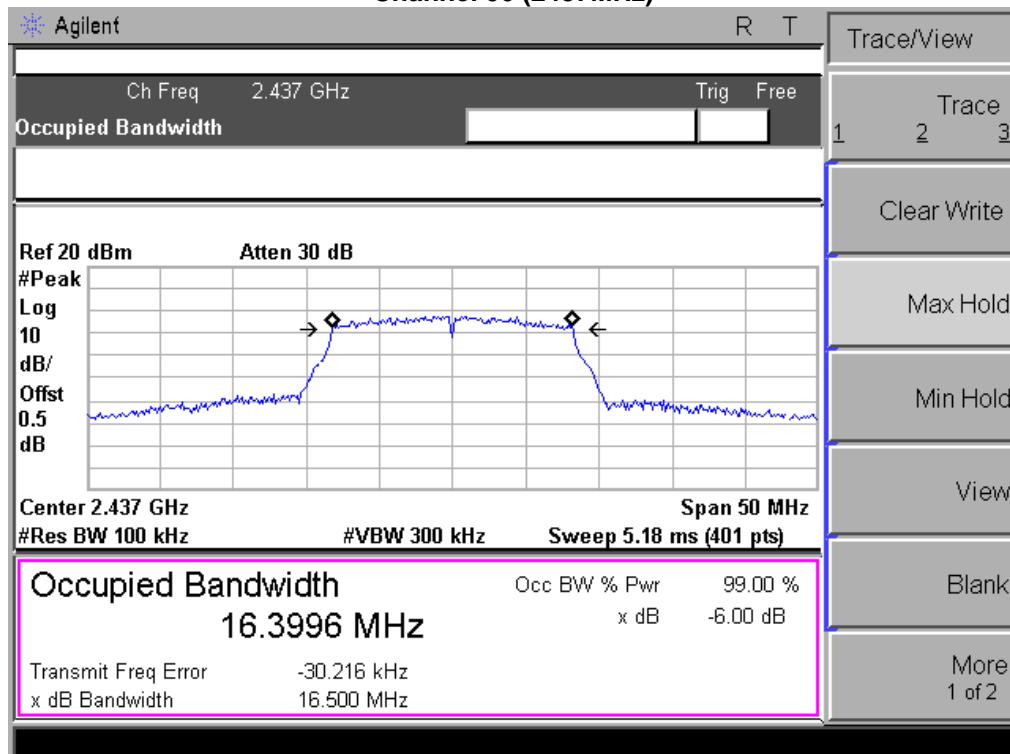


Channel 11 (2462MHz)

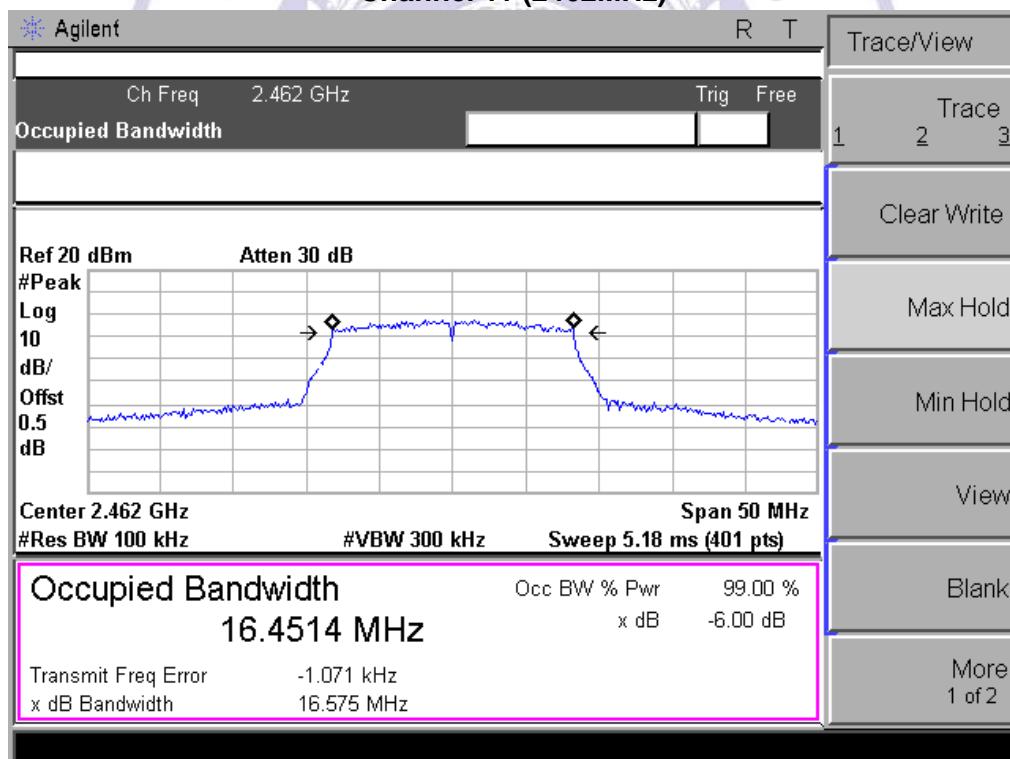


Product	:	Handsets
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz)


Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	17721	500	Pass
06	2437	17764	500	Pass
11	2462	17777	500	Pass

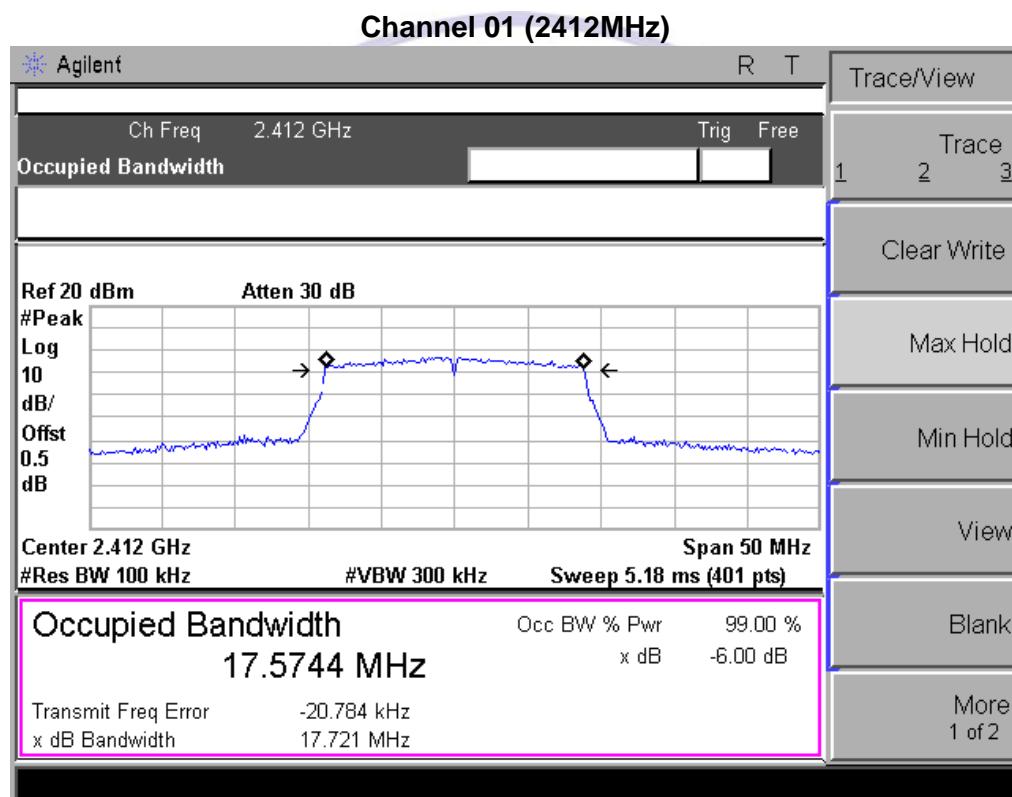

Channel 06 (2437MHz)

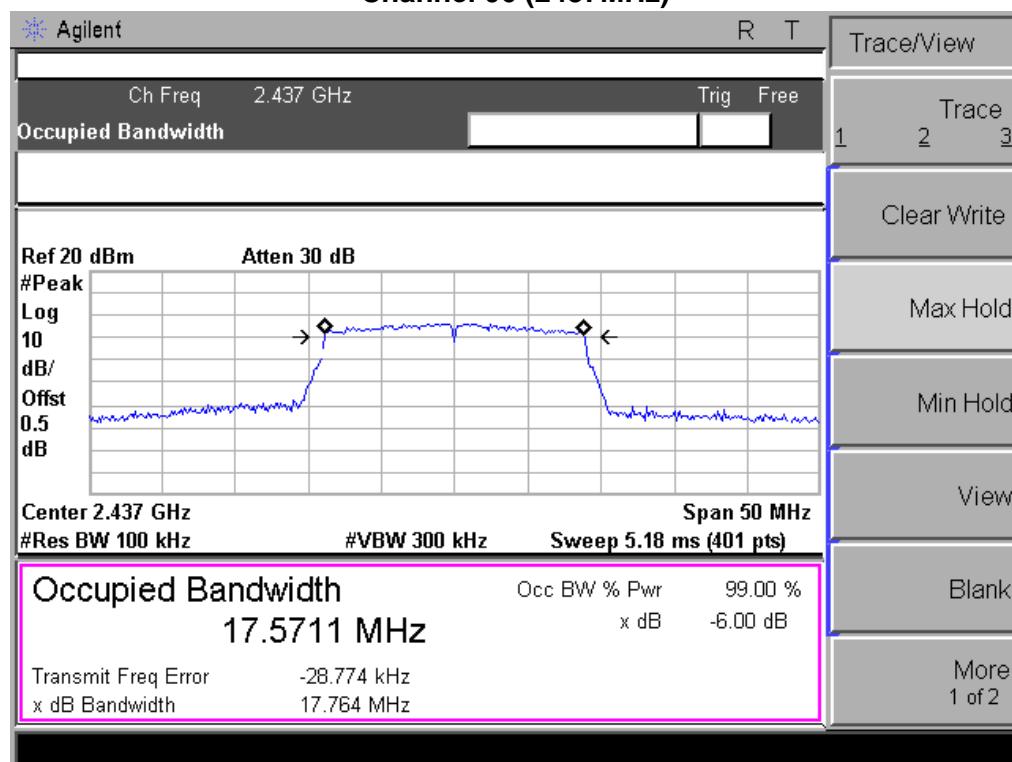


Channel 11 (2462MHz)

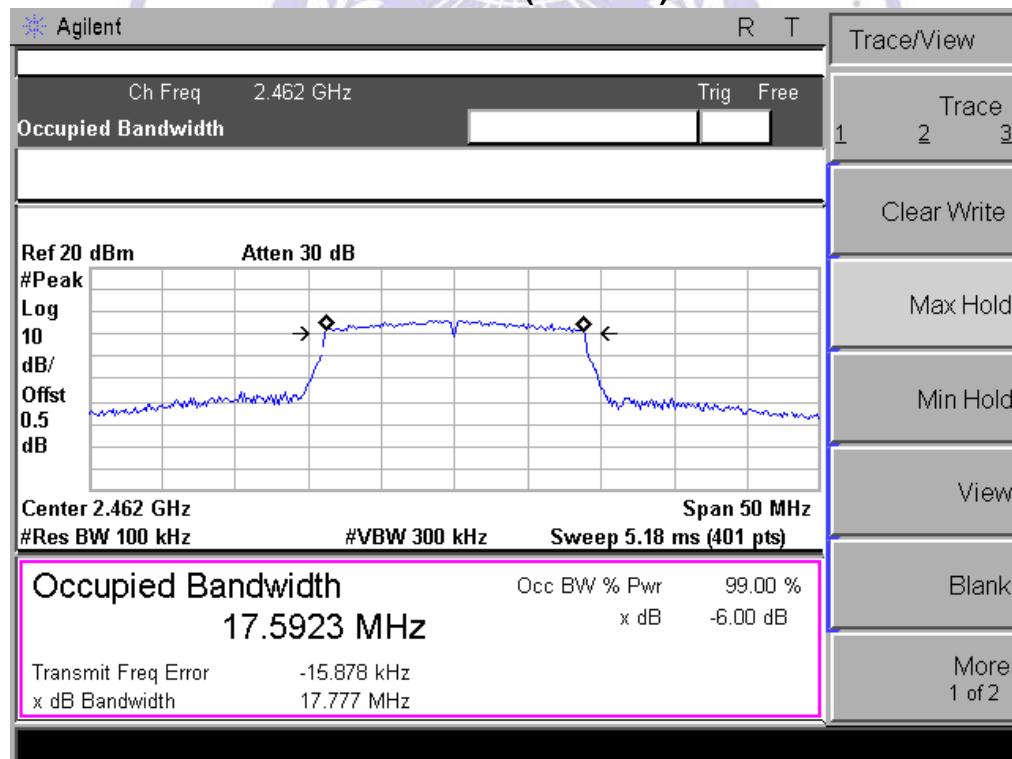


Product	:	Handsets
Test Item	:	6dB Occupied Bandwidth
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
03	2422	36520	500	Pass
06	2437	36098	500	Pass
09	2452	36202	500	Pass


Channel 03 (2422MHz)

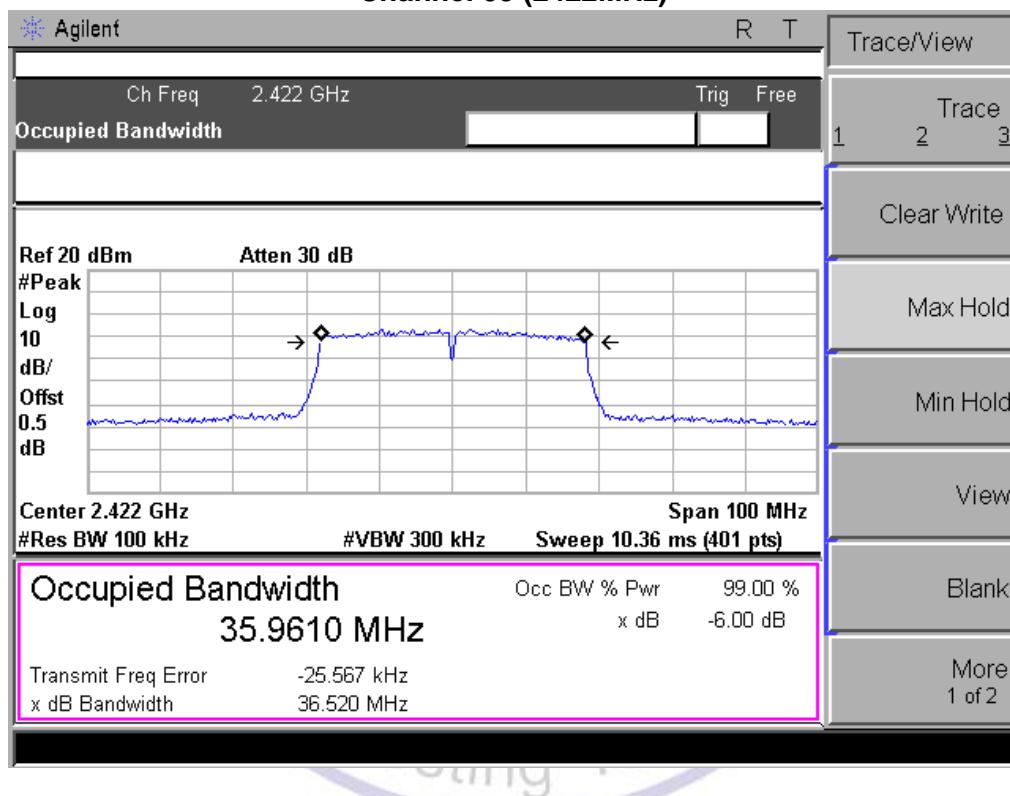

Channel 06 (2437MHz)

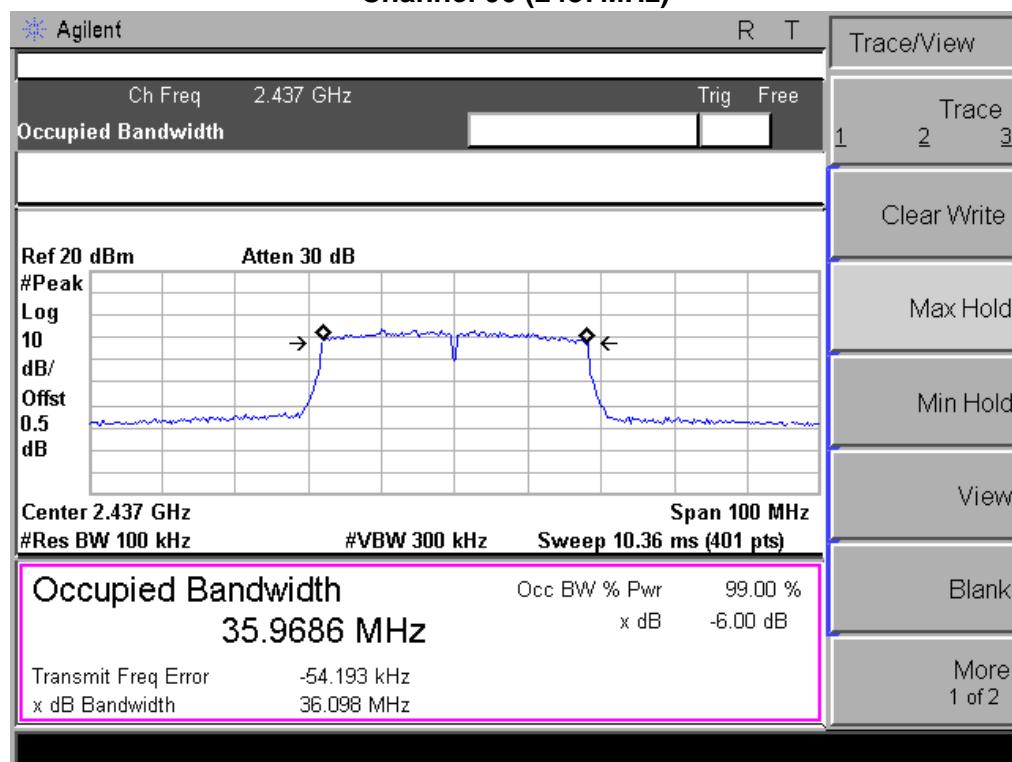


Channel 09 (2452MHz)

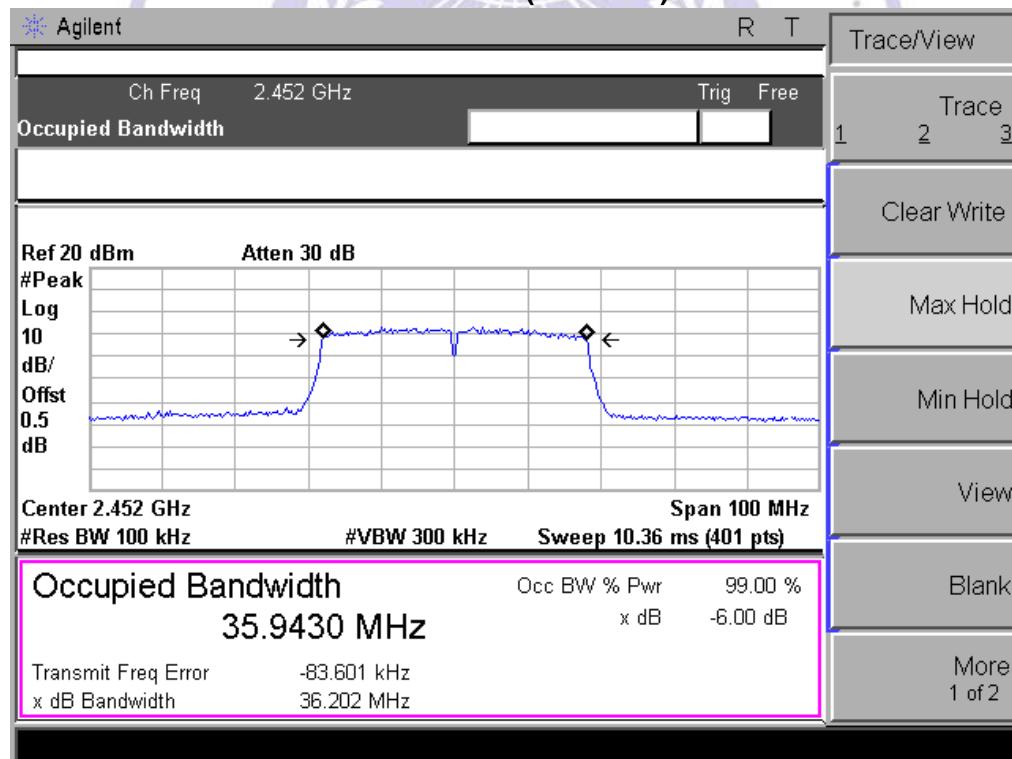

4.4. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to C63.10 -2013 and KDB558074 D01 v03r02, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

LIMIT

The Peak Output Power Measurement limits are 30dBm.

TEST RESULTS

Product	:	Handsets
Test Item	:	Power Output
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2412	17.65	30.00	Pass
6	2437	17.92	30.00	Pass
11	2462	17.83	30.00	Pass

Product	:	Handsets
Test Item	:	Power Output
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2412	20.26	30.00	Pass
6	2437	20.81	30.00	Pass
11	2462	20.63	30.00	Pass


Product	:	Handsets
Test Item	:	Power Output
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2412	21.39	30.00	Pass
6	2437	21.97	30.00	Pass
11	2462	21.02	30.00	Pass

Product	:	Handsets
Test Item	:	Power Output
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)


Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
3	2422	19.58	30.00	Pass
6	2437	20.33	30.00	Pass
9	2452	19.94	30.00	Pass

Note: The test results including the cable loss.

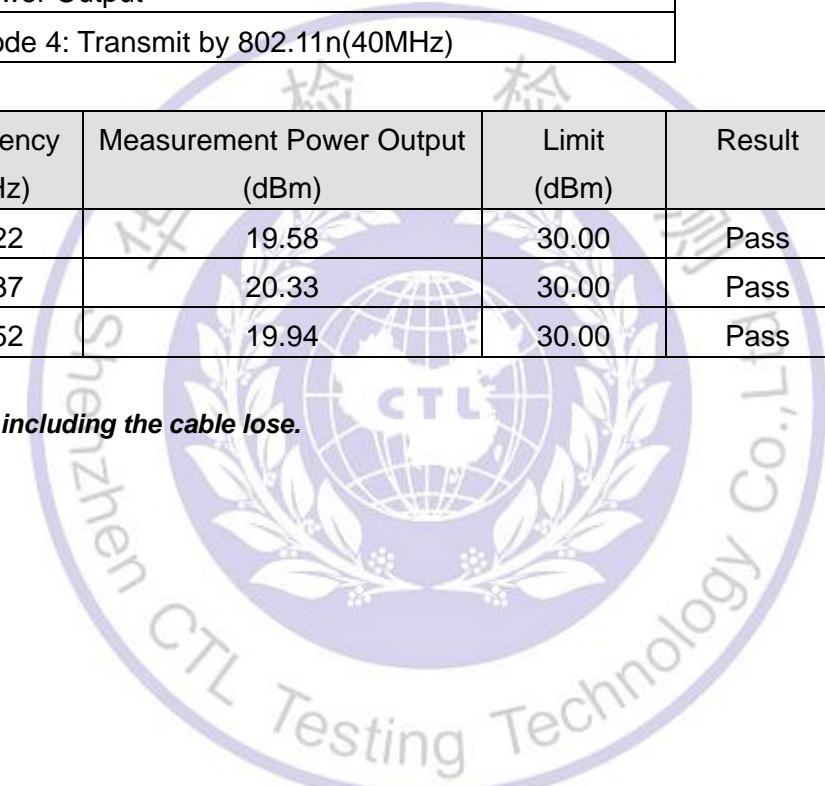

4.5. Band Edge Measurement

TEST CONFIGURATION



TEST PROCEDURE


According to FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS)

Set RBW 1MHz, VBW 3MHz PEAK detector for PK value, RMS detector for AV value

LIMIT


1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209(see Section 15.205(c)).

Frequency (MHz)	Limit Average (dB _{AV} /m)	Limit Peak (dB _{PK} /m)
Below 2390 or Above 2483.5	54	74

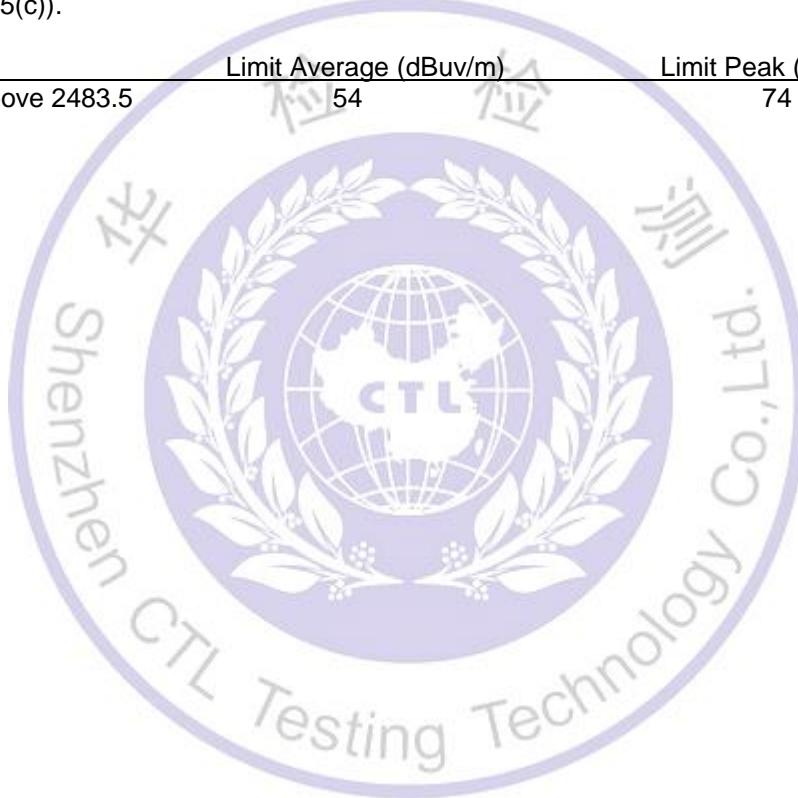


TEST RESULTS

Transmitting mode: 802.11b

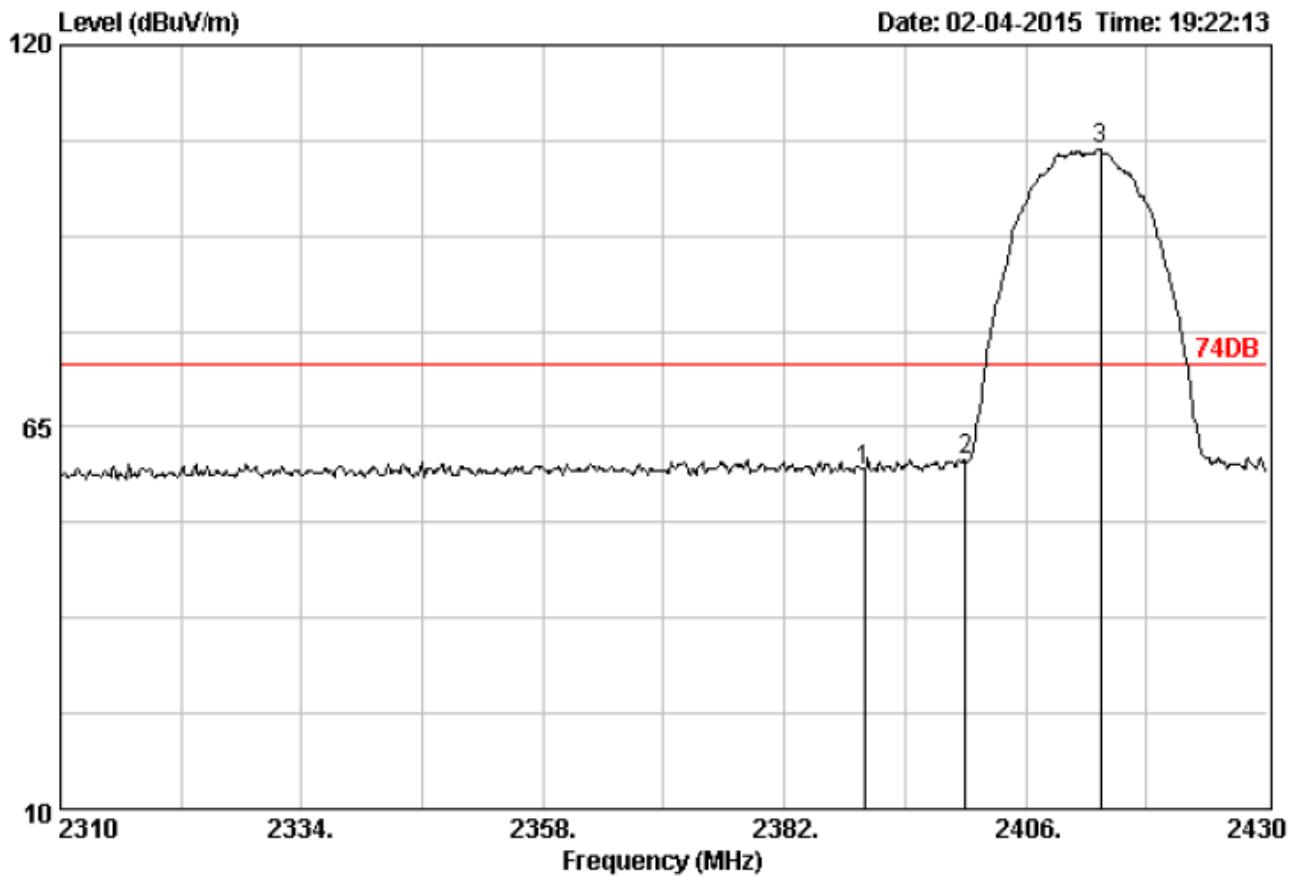


Site no. : 3m Chamber Data no. : 486
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.00	28.78	4.61	60.81	58.84	74.00	15.16	Peak	
2 2400.00	28.78	4.61	62.07	60.10	74.00	13.90	Peak	
3 2413.44	28.81	4.63	106.90	104.98	74.00	-30.98	Peak	

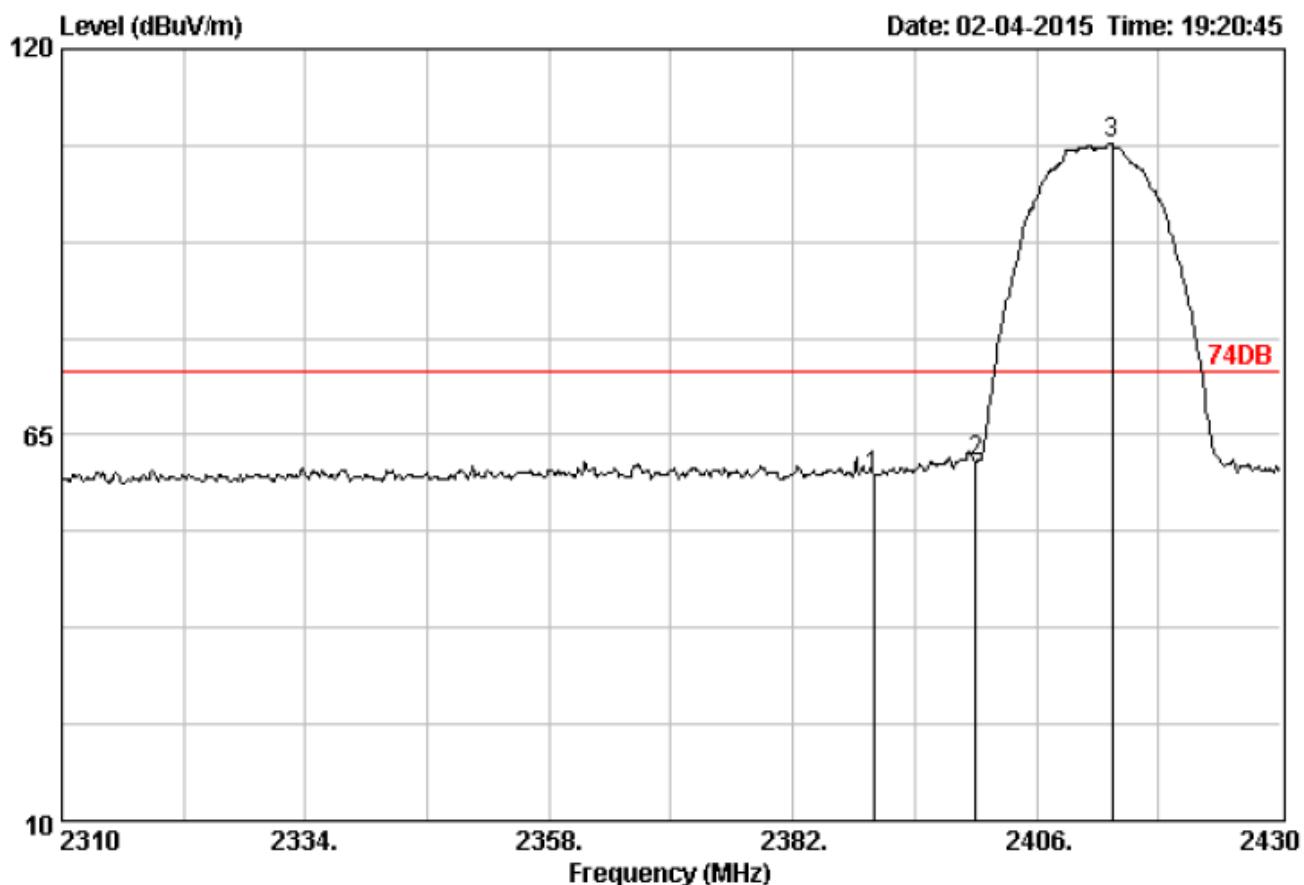


Site no. : 3m Chamber Data no. : 485
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.00	28.78	4.61	61.07	59.10	74.00	14.90	Peak	
2 2400.00	28.78	4.61	63.16	61.19	74.00	12.81	Peak	
3 2413.44	28.81	4.63	108.47	106.55	74.00	-32.55	Peak	

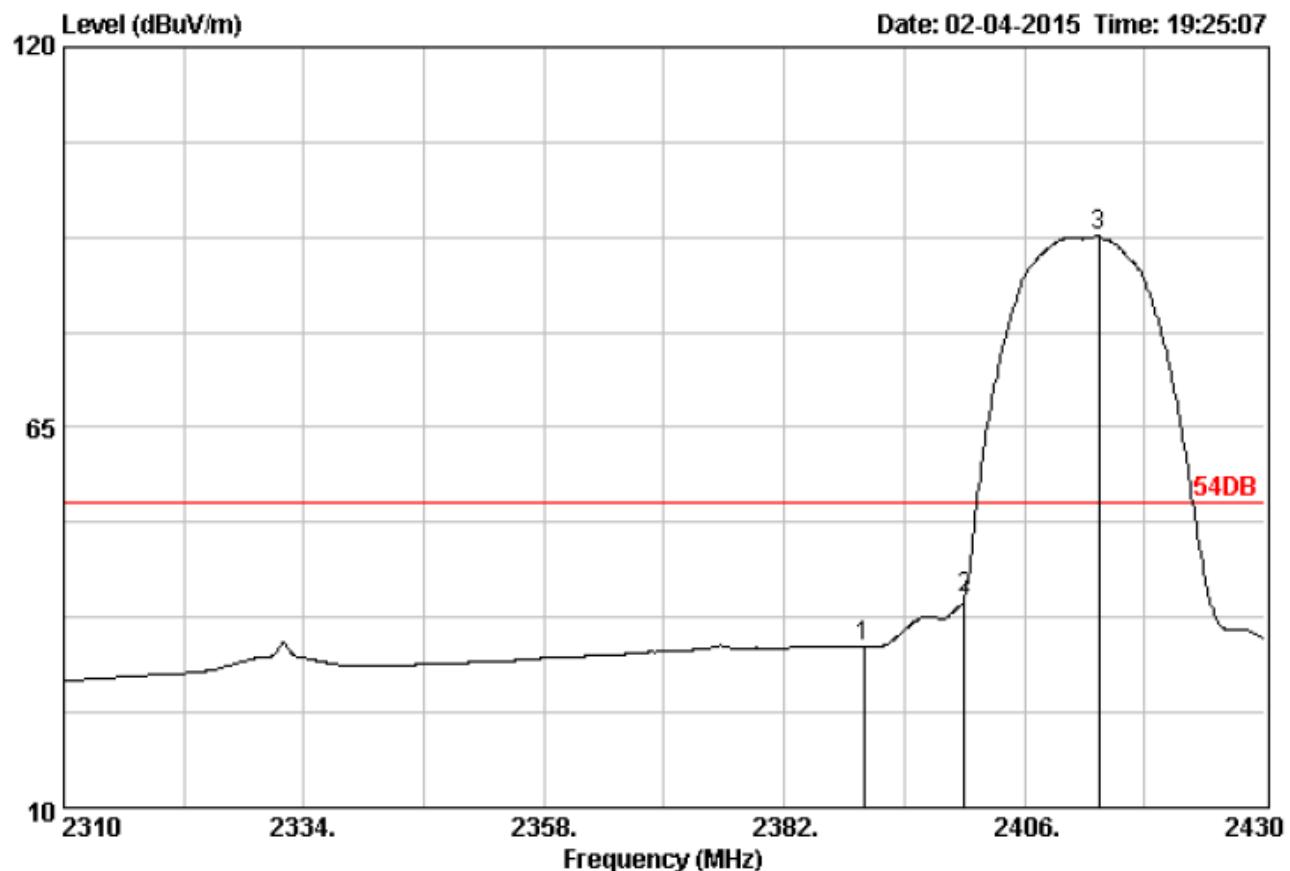


Site no. : 3m Chamber Data no. : 487
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	35.20	33.23	54.00	20.77	Average
2 2400.00	28.78	4.61	42.29	40.32	54.00	13.68	Average
3 2413.44	28.81	4.63	94.61	92.69	54.00	-38.69	Average

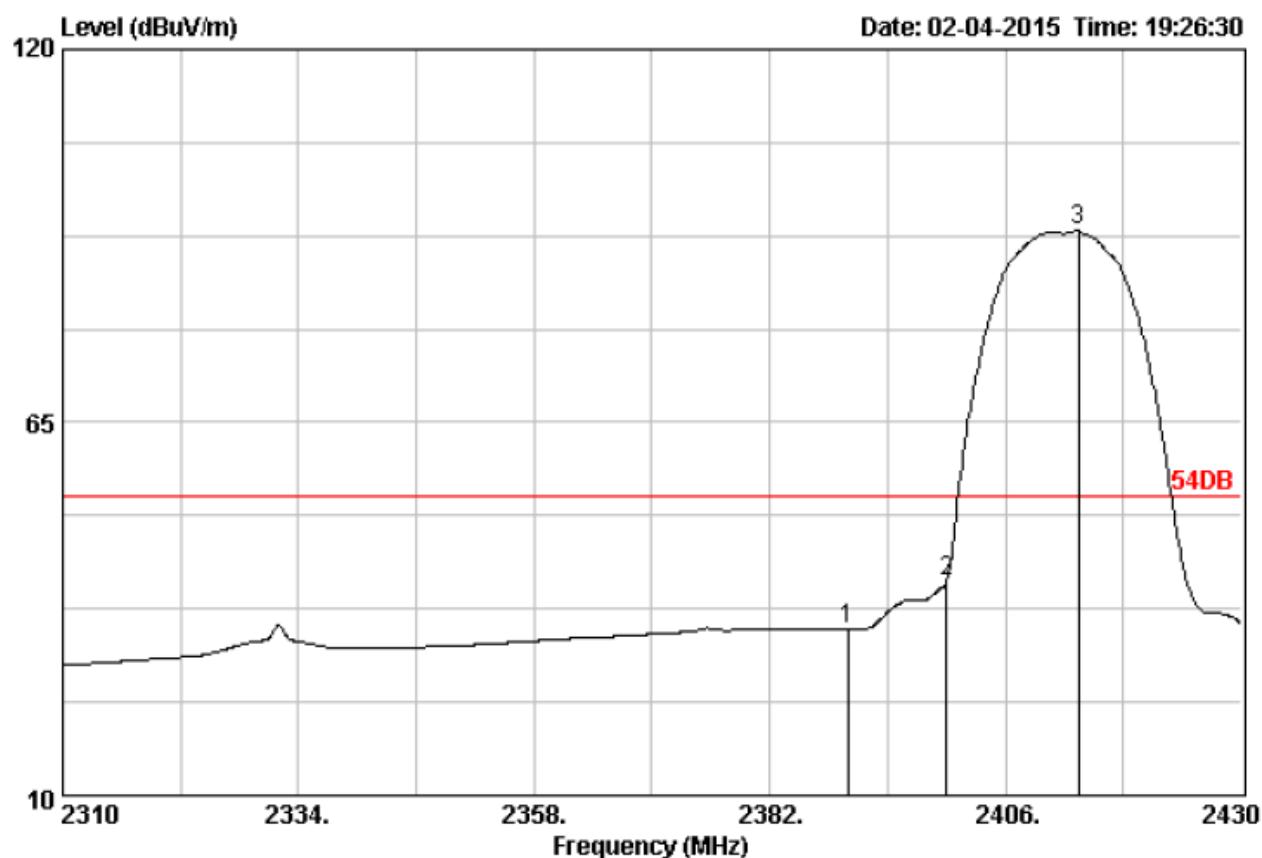


Site no. : 3m Chamber Data no. : 488
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2390.00	28.78	4.61	36.42	34.45	54.00	19.55	Average
2 2400.00	28.78	4.61	43.64	41.67	54.00	12.33	Average
3 2413.44	28.81	4.63	95.21	93.29	54.00	-39.29	Average

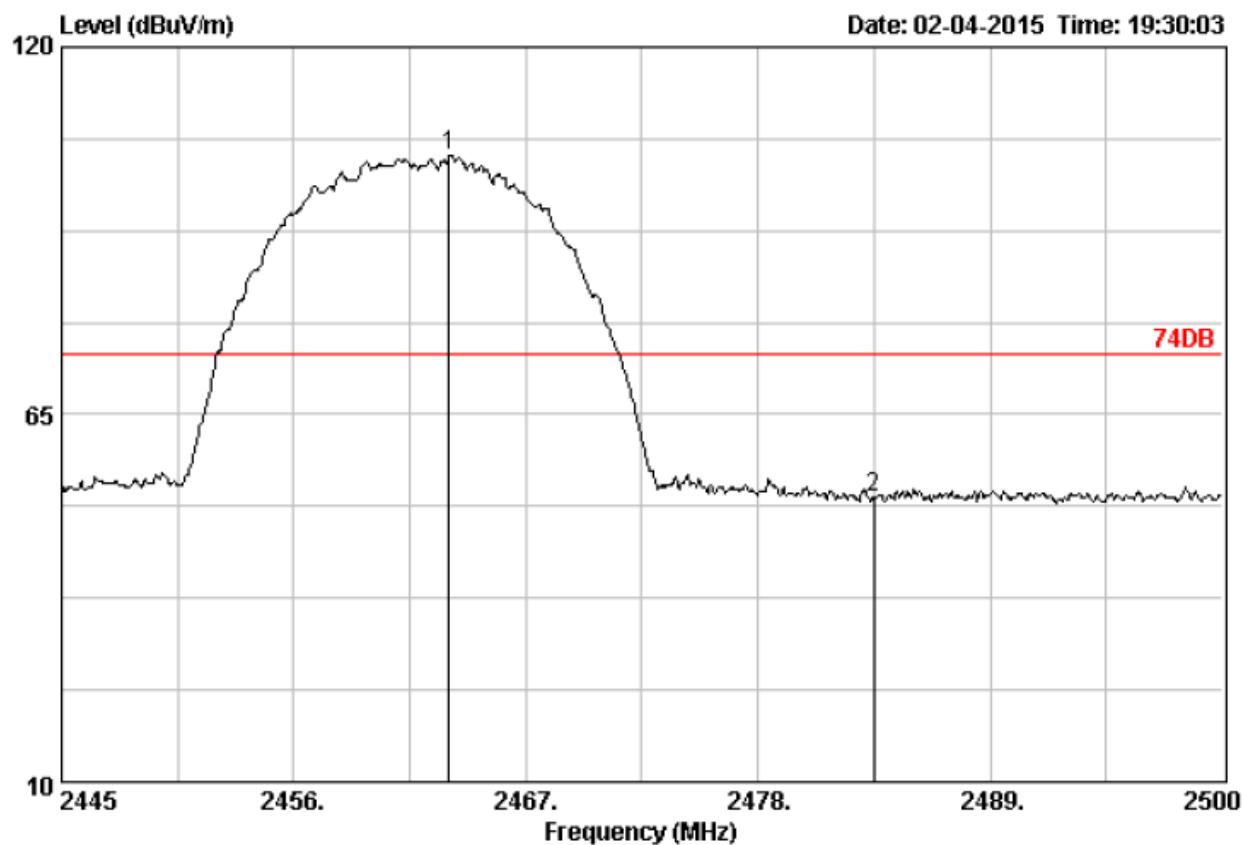


Site no. : 3m Chamber Data no. : 489
Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
Limit : 74DB
Env. / Ins. : 23°C/54%
Engineer :
EUT :
Power :
M/N :
Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2463.37	28.90	4.68	105.50	103.71	74.00	-29.71	Peak
2 2483.50	28.93	4.70	54.41	52.66	74.00	21.34	Peak

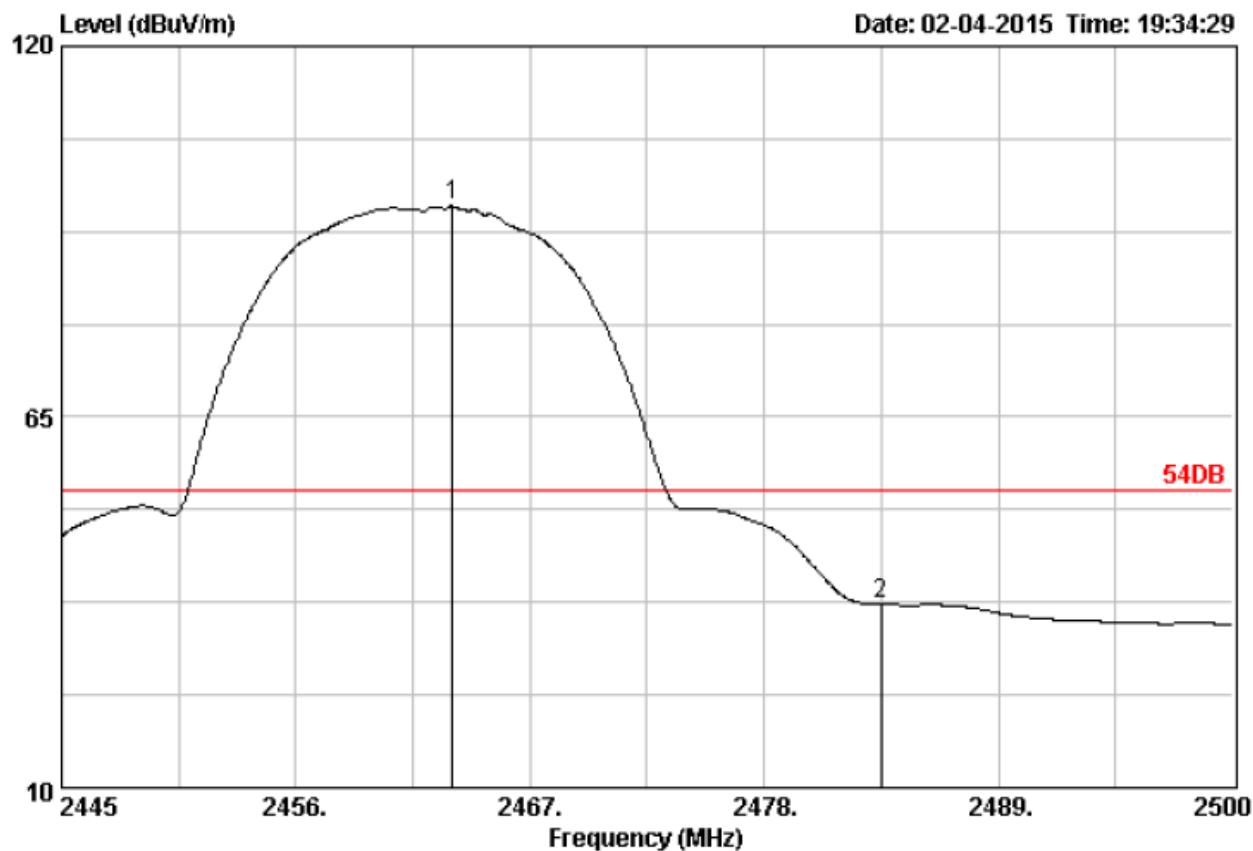


Site no. : 3m Chamber Data no. : 491
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2463.37	28.90	4.68	98.11	96.32	54.00	-42.32	Average
2 2483.50	28.93	4.70	38.98	37.23	54.00	16.77	Average

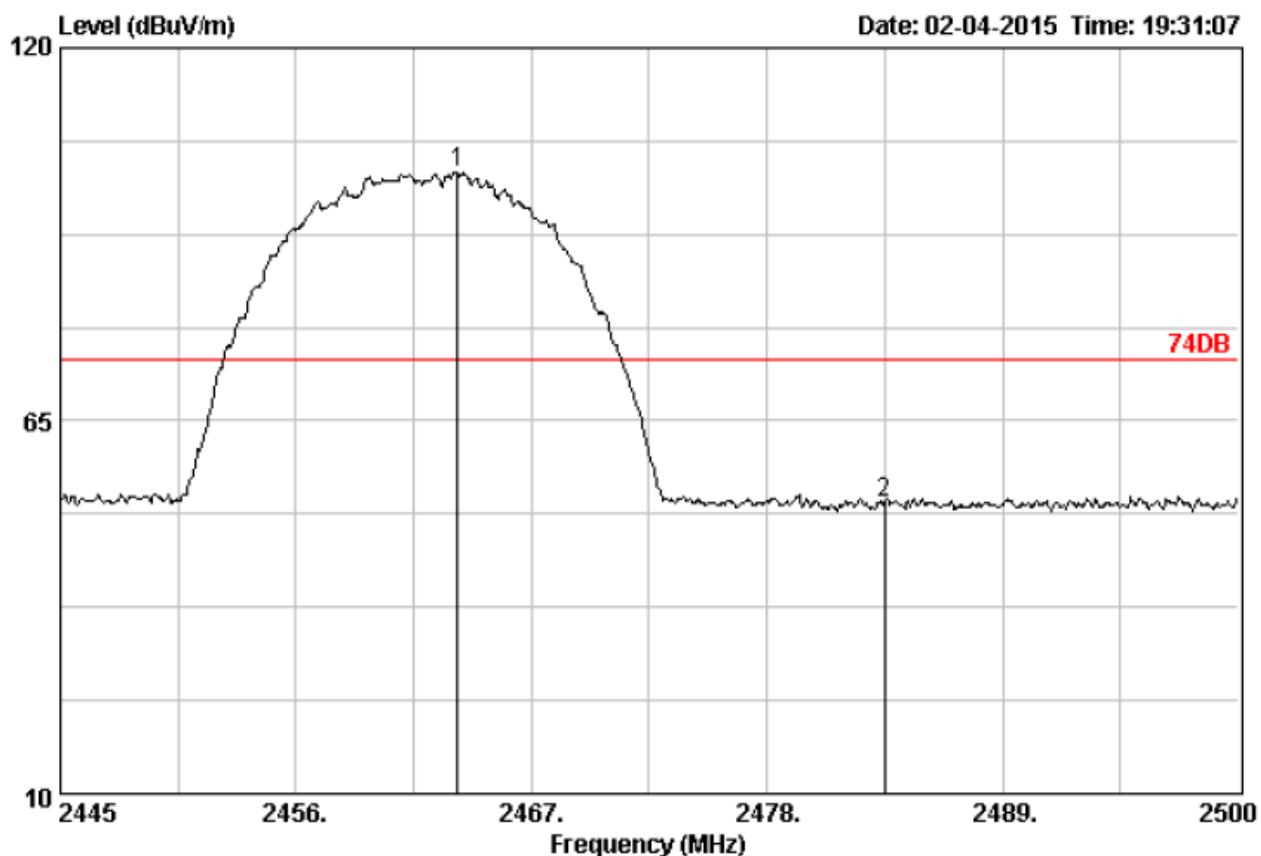

Site no. : 3m Chamber Data no. : 490
Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
Limit : 74DB
Env. / Ins. : 23°C/54%
Engineer :
EUT :
Power :
M/N :
Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dB _{UV})	Level (dB _{UV} /m)	Limits (dB _{UV} /m)	Margin (dB)	Remark
1 2463.54	28.90	4.68	103.50	101.71	74.00	-27.71	Peak
2 2483.50	28.93	4.70	54.68	52.93	74.00	21.07	Peak

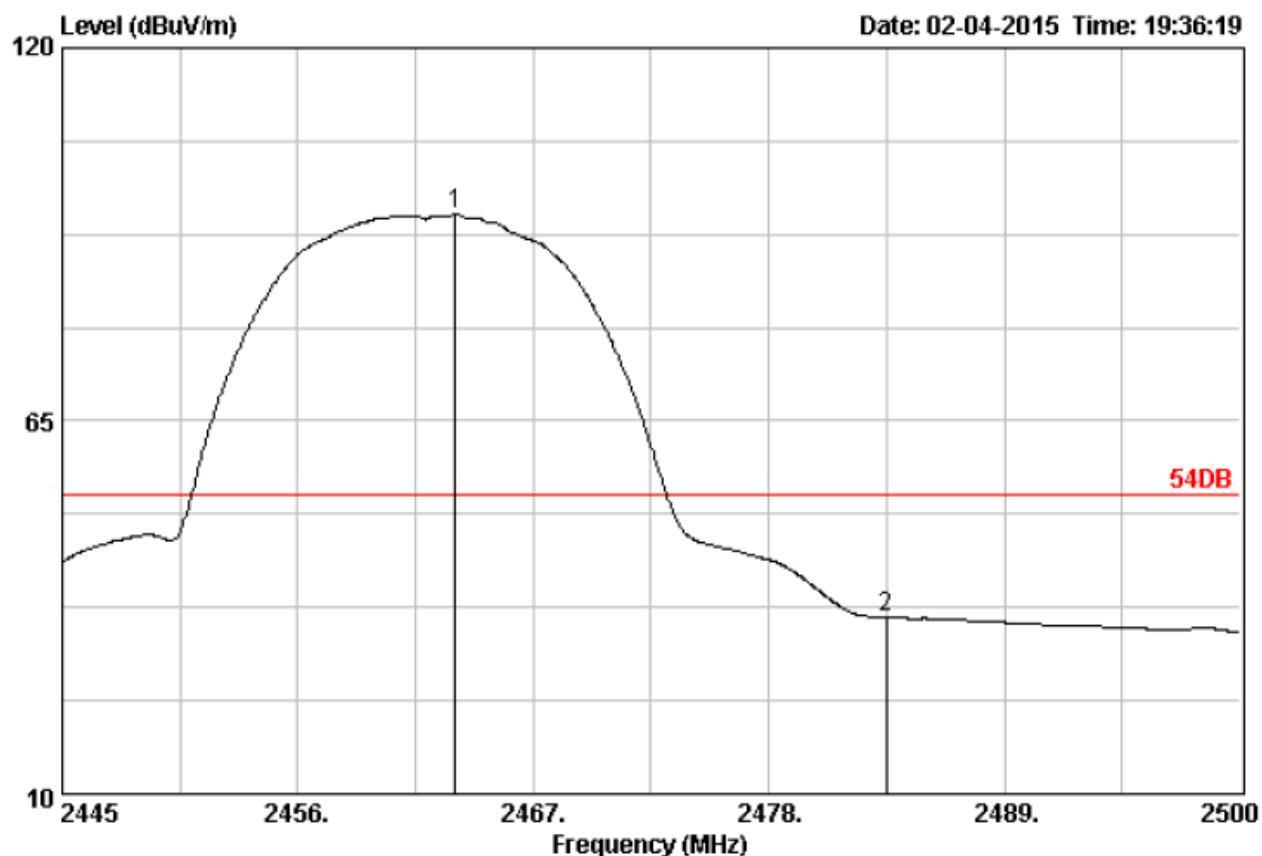

Site no. : 3m Chamber Data no. : 492
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2463.37	28.90	4.68	97.35	95.56	54.00	-41.56	Average	
2 2483.50	28.93	4.70	37.73	35.98	54.00	18.02	Average	

For 802.11g Mode:

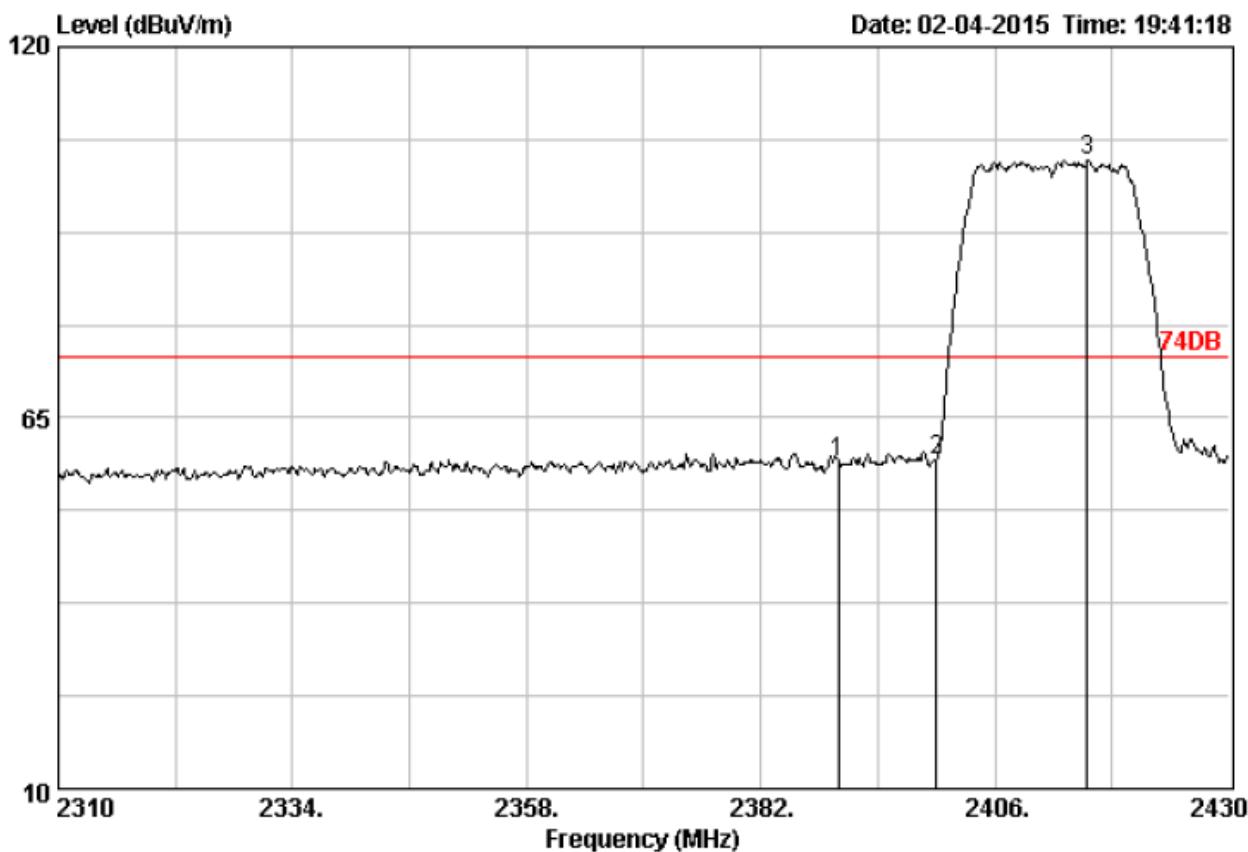


Site no. : 3m Chamber Data no. : 494
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.00	28.78	4.61	60.28	58.31	74.00	15.69	Peak	
2 2400.00	28.78	4.61	60.81	58.84	74.00	15.16	Peak	
3 2415.48	28.81	4.63	105.11	103.19	74.00	-29.19	Peak	

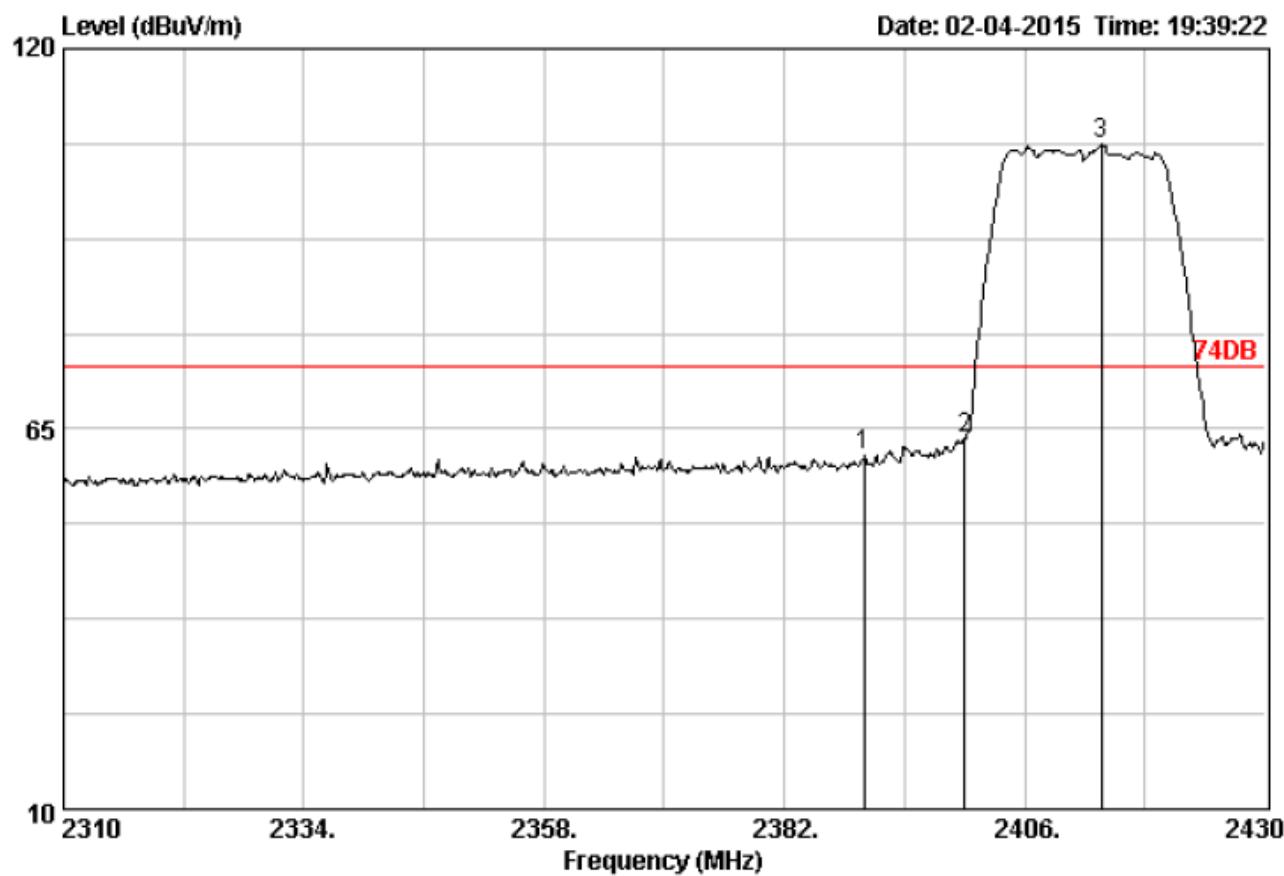


Site no. : 3m Chamber Data no. : 493
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission				Remark
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.00	28.78	4.61	63.09	61.12	74.00	12.88	Peak	
2 2400.00	28.78	4.61	65.62	63.65	74.00	10.35	Peak	
3 2413.68	28.81	4.63	107.98	106.06	74.00	-32.06	Peak	

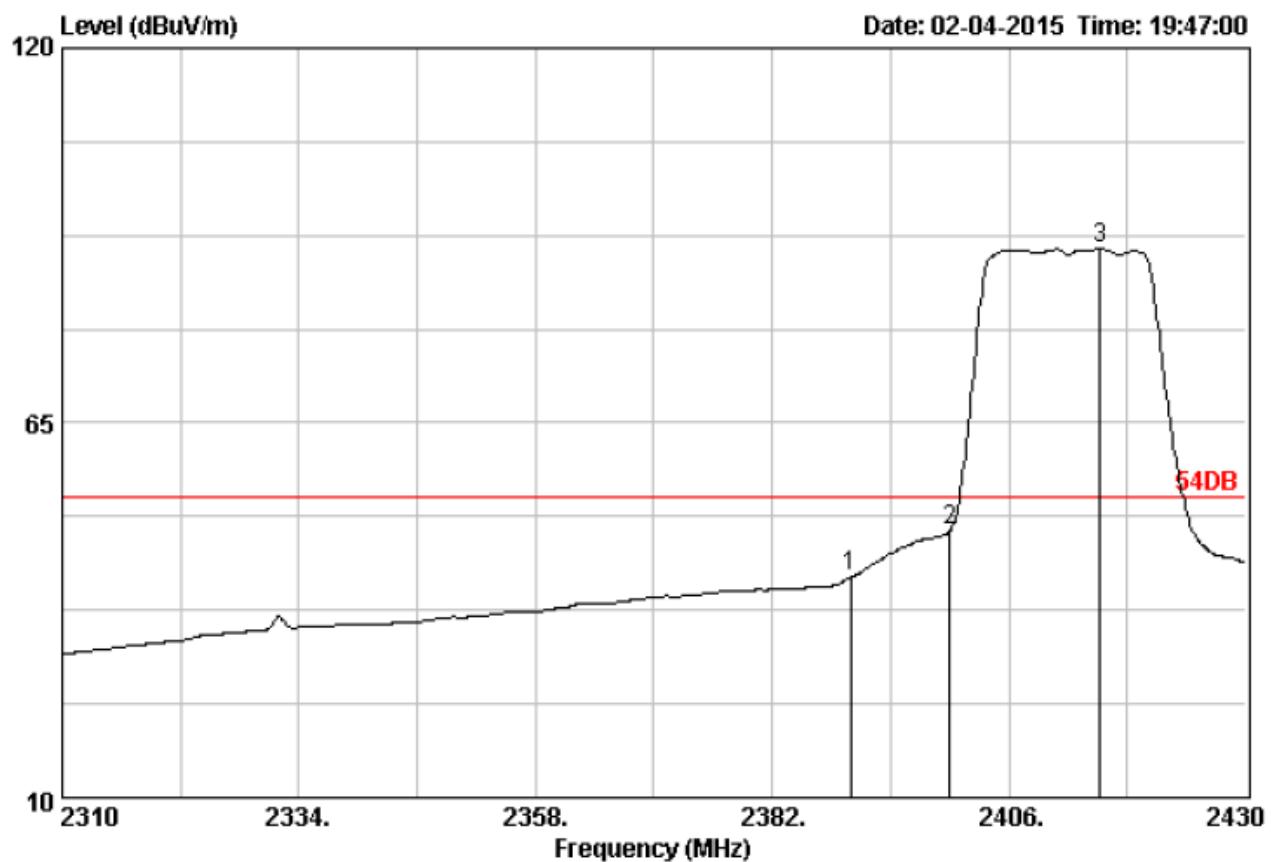


Site no. : 3m Chamber Data no. : 496
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	44.30	42.33	54.00	11.67	Average
2 2400.00	28.78	4.61	51.10	49.13	54.00	4.87	Average
3 2415.24	28.81	4.63	92.56	90.64	54.00	-36.64	Average

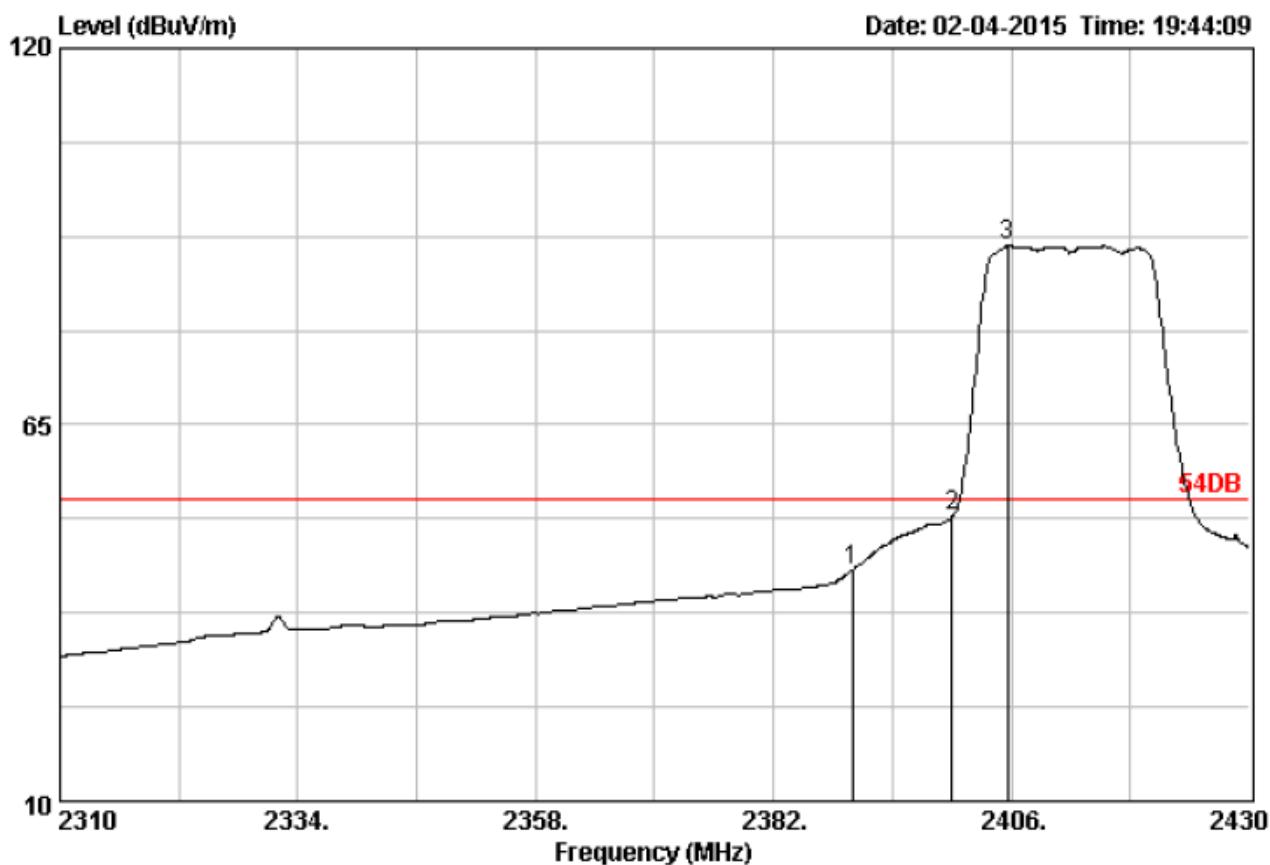


Site no. : 3m Chamber Data no. : 495
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	45.82	43.85	54.00	10.15	Average
2 2400.00	28.78	4.61	53.51	51.54	54.00	2.46	Average
3 2405.64	28.81	4.63	93.04	91.12	54.00	-37.12	Average

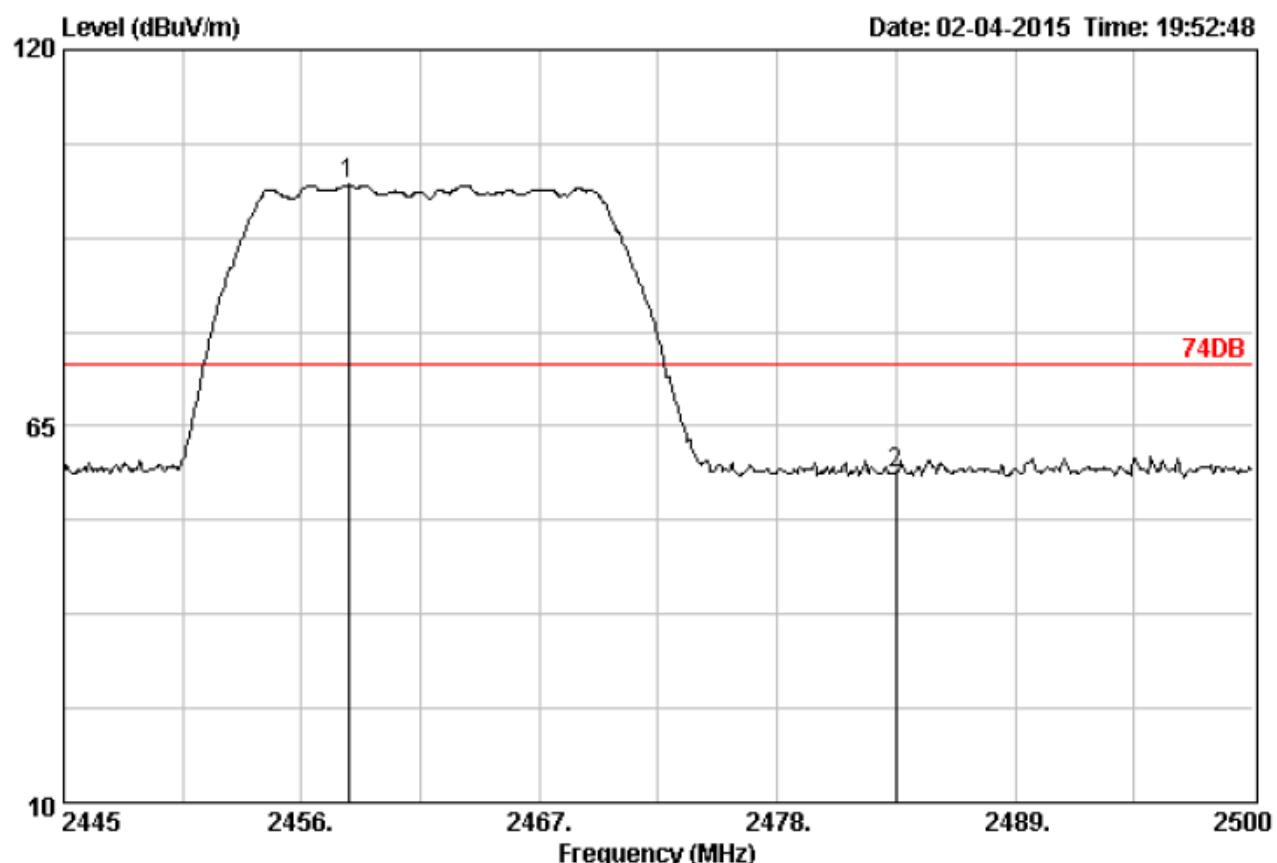


Site no. : 3m Chamber Data no. : 498
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2458.15	28.90	4.68	102.04	100.25	74.00	-26.25	Peak
2 2483.50	28.93	4.70	59.97	58.22	74.00	15.78	Peak

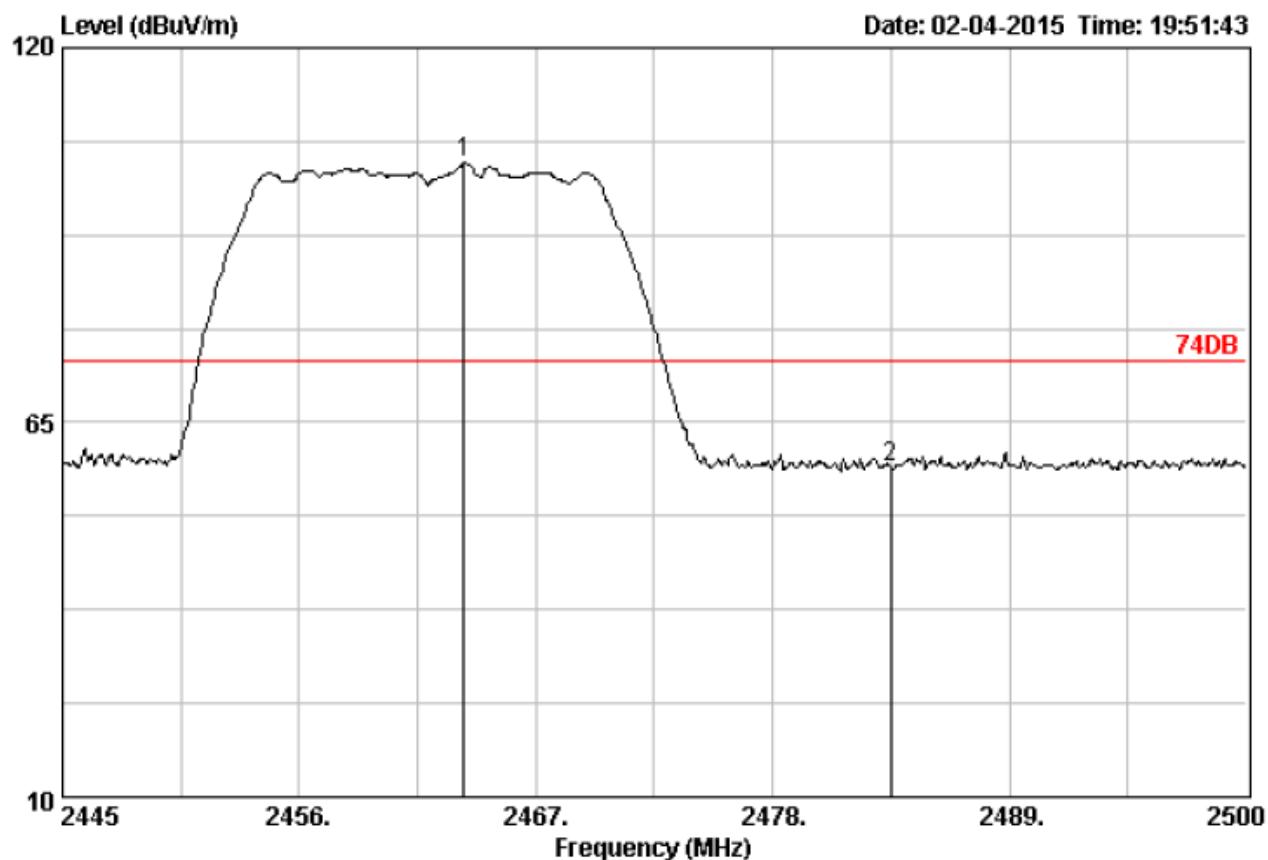

Site no. : 3m Chamber Data no. : 497
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2463.65	28.90	4.68	104.84	103.05	74.00	-29.05	Peak
2 2483.50	28.93	4.70	60.31	58.56	74.00	15.44	Peak

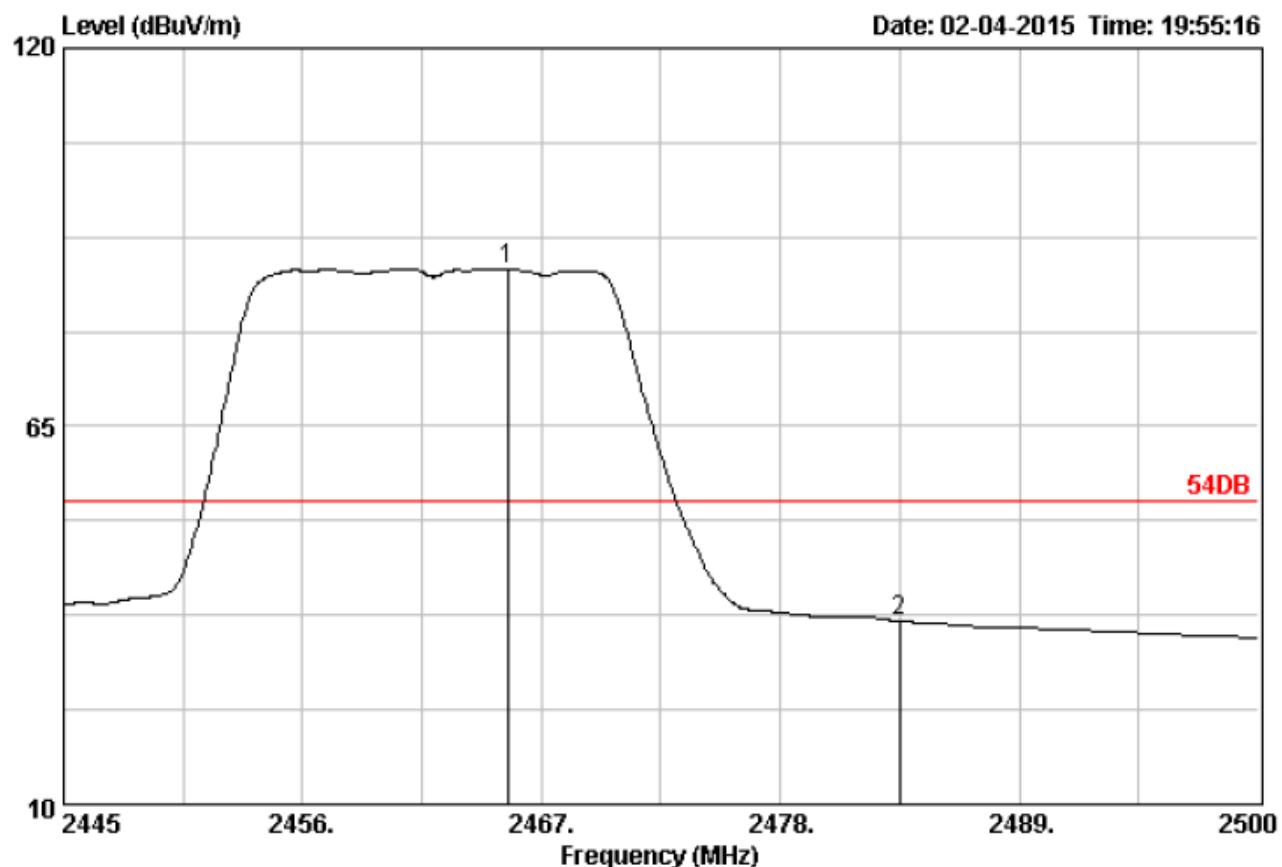

Site no. : 3m Chamber
Dis. / Ant. : 3m DRH-118
Limit : 54DB
Env. / Ins. : 23°C/54%
Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 499
Ant. pol. : HORIZONTAL


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2465.46	28.90	4.68	89.77	87.98	54.00	-33.98	Average
2 2483.50	28.93	4.70	38.36	36.61	54.00	17.39	Average

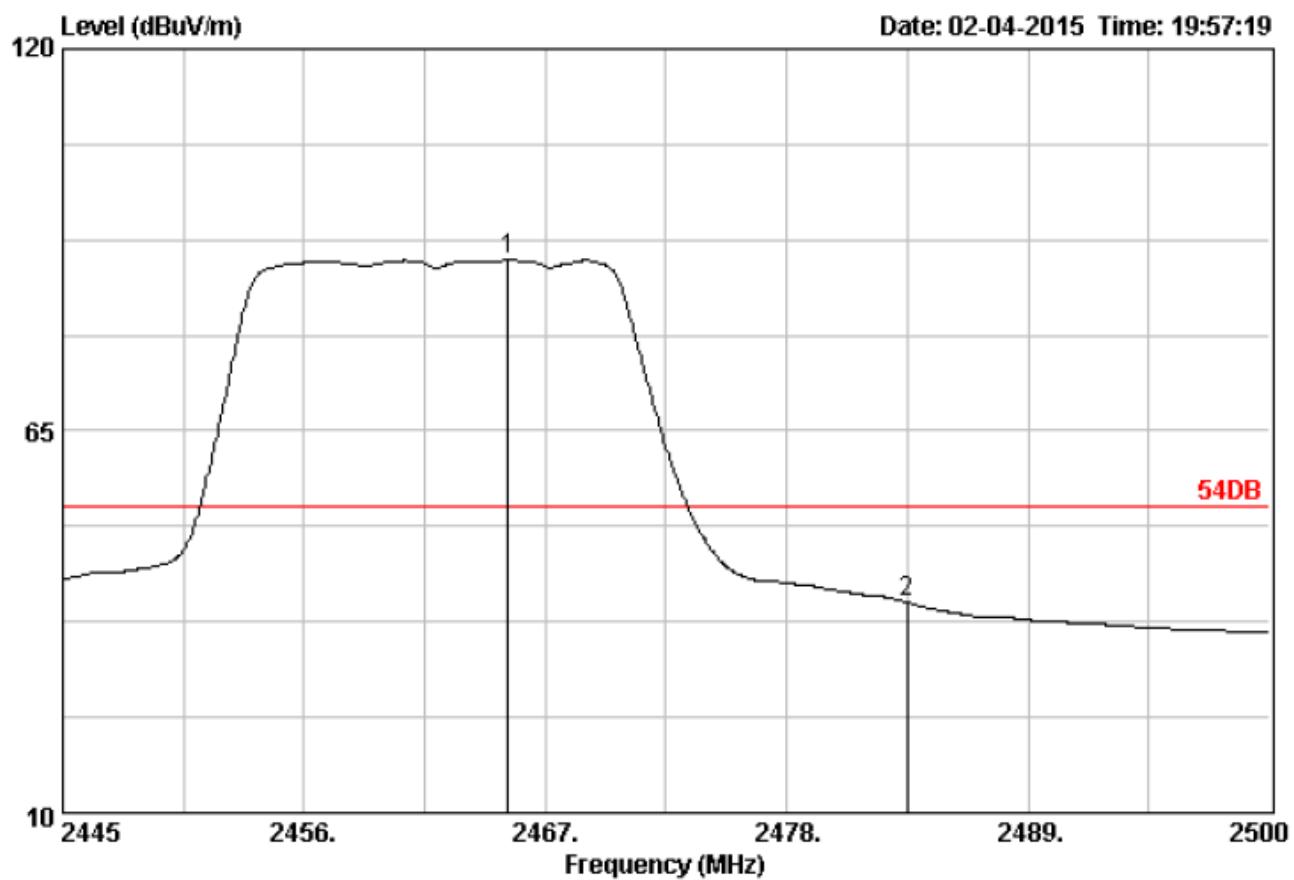

Site no. : 3m Chamber Data no. : 500
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2465.30	28.90	4.68	91.45	89.66	54.00	-35.66	Average	
2 2483.50	28.93	4.70	42.02	40.27	54.00	13.73	Average	

For 802.11n (20MHz) Mode:

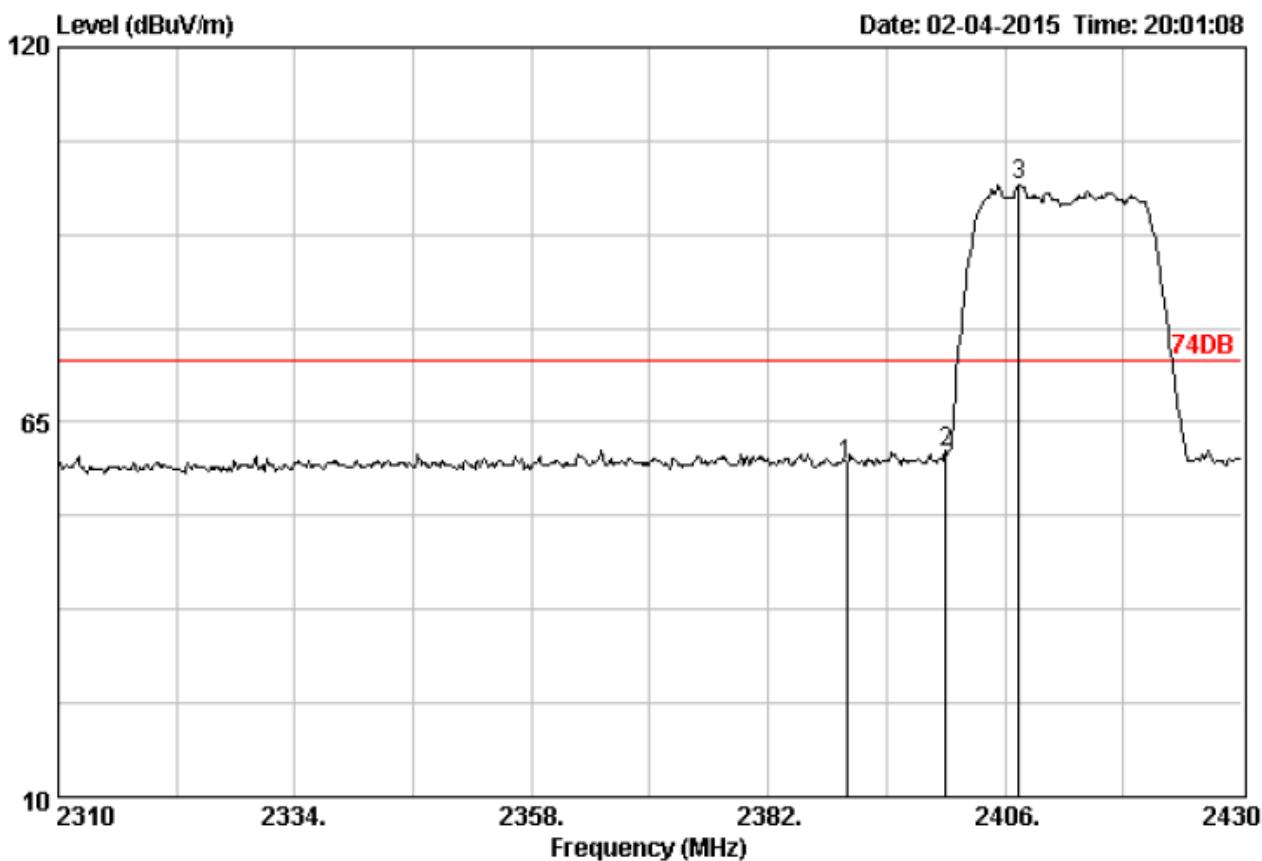


Site no. : 3m Chamber Data no. : 502
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	60.65	58.68	74.00	15.32	Peak
2 2400.00	28.78	4.61	62.57	60.60	74.00	13.40	Peak
3 2407.44	28.81	4.63	101.76	99.84	74.00	-25.84	Peak

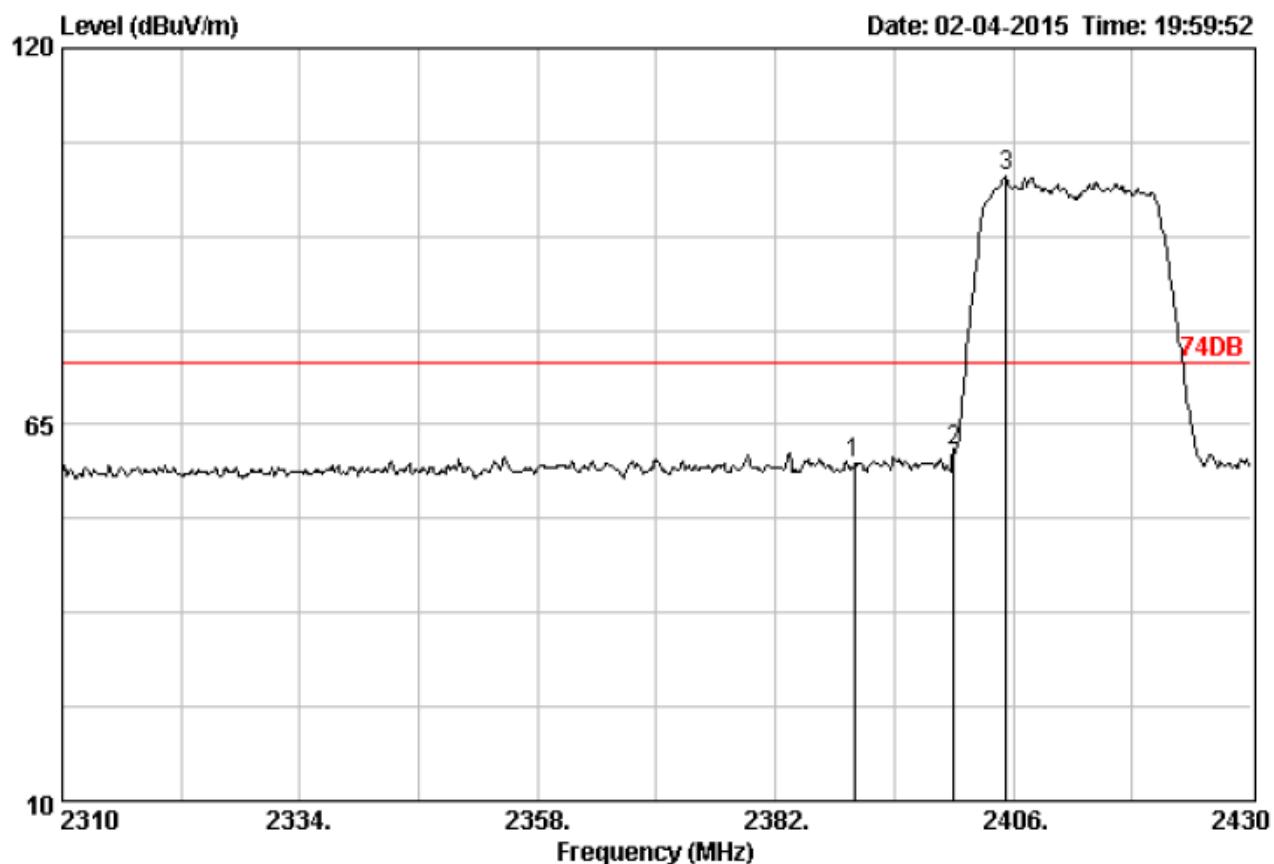


Site no. : 3m Chamber Data no. : 501
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	61.38	59.41	74.00	14.59	Peak
2 2400.00	28.78	4.61	63.27	61.30	74.00	12.70	Peak
3 2405.28	28.81	4.63	103.29	101.37	74.00	-27.37	Peak

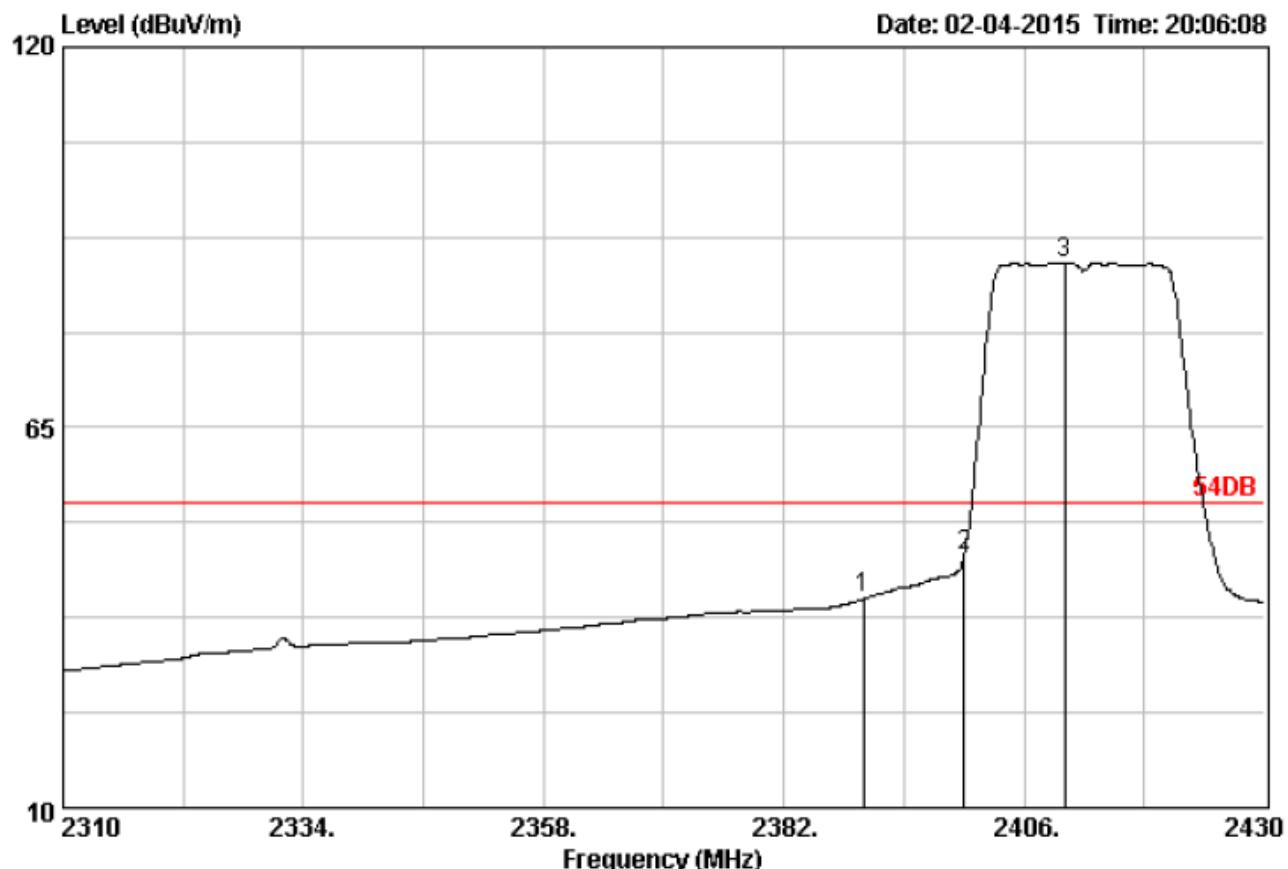

Site no. : 3m Chamber Data no. : 504
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	42.21	40.24	54.00	13.76	Average
2 2400.00	28.78	4.61	48.51	46.54	54.00	7.46	Average
3 2410.08	28.81	4.63	90.74	88.82	54.00	-34.82	Average

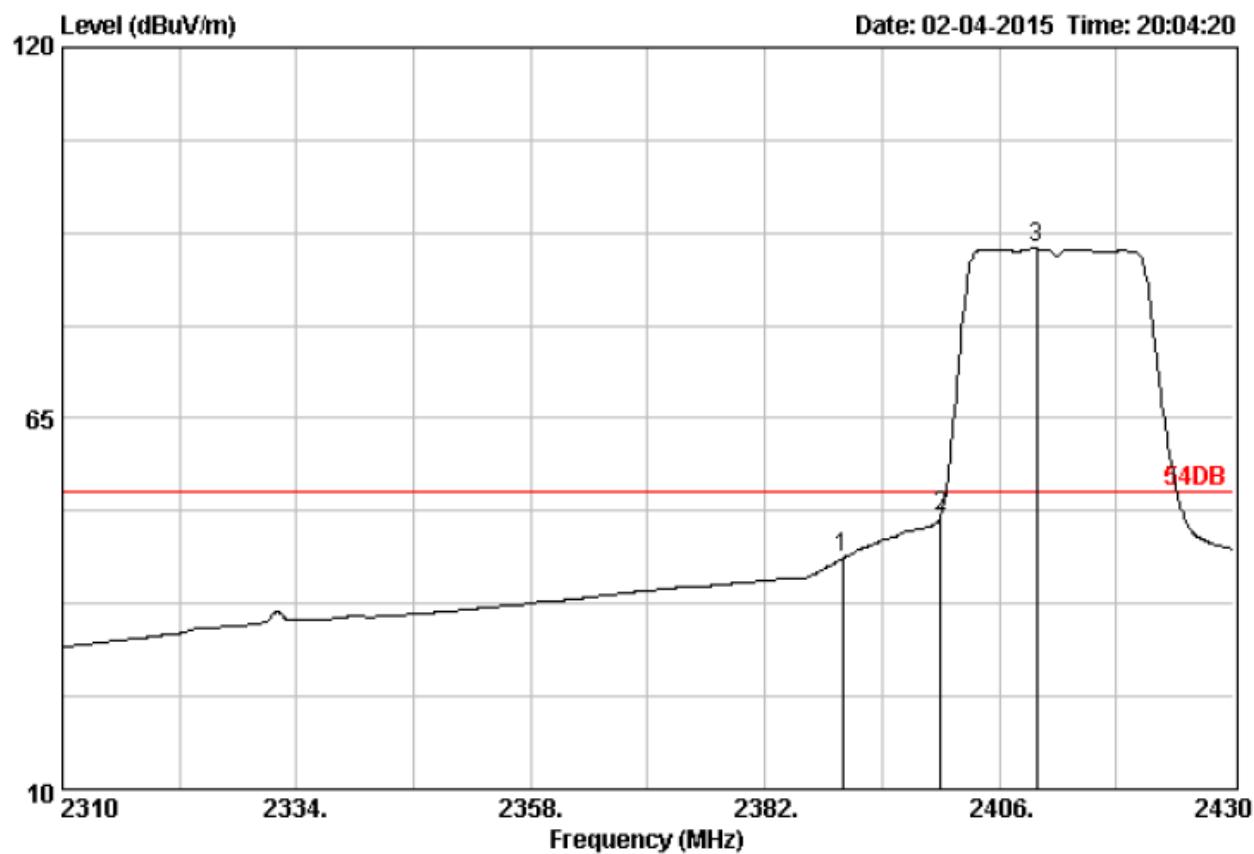

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Data no. : 503
 Ant. pol. : VERTICAL


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	46.27	44.30	54.00	9.70	Average
2 2400.00	28.78	4.61	52.56	50.59	54.00	3.41	Average
3 2409.84	28.81	4.63	92.06	90.14	54.00	-36.14	Average

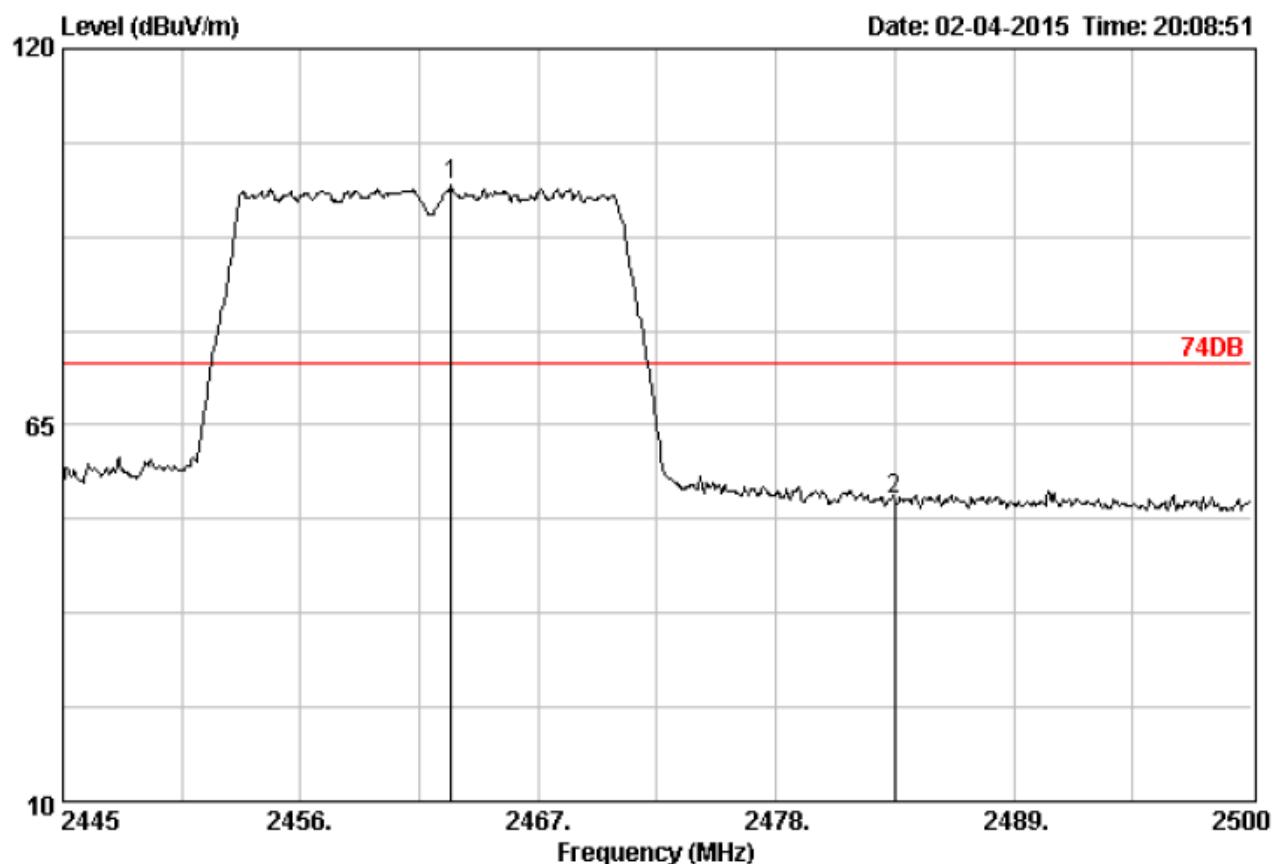

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Data no. : 505
 Ant. pol. : HORIZONTAL

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.99	28.90	4.68	101.78	99.99	74.00	-25.99	Peak
2 2483.50	28.93	4.70	55.98	54.23	74.00	19.77	Peak

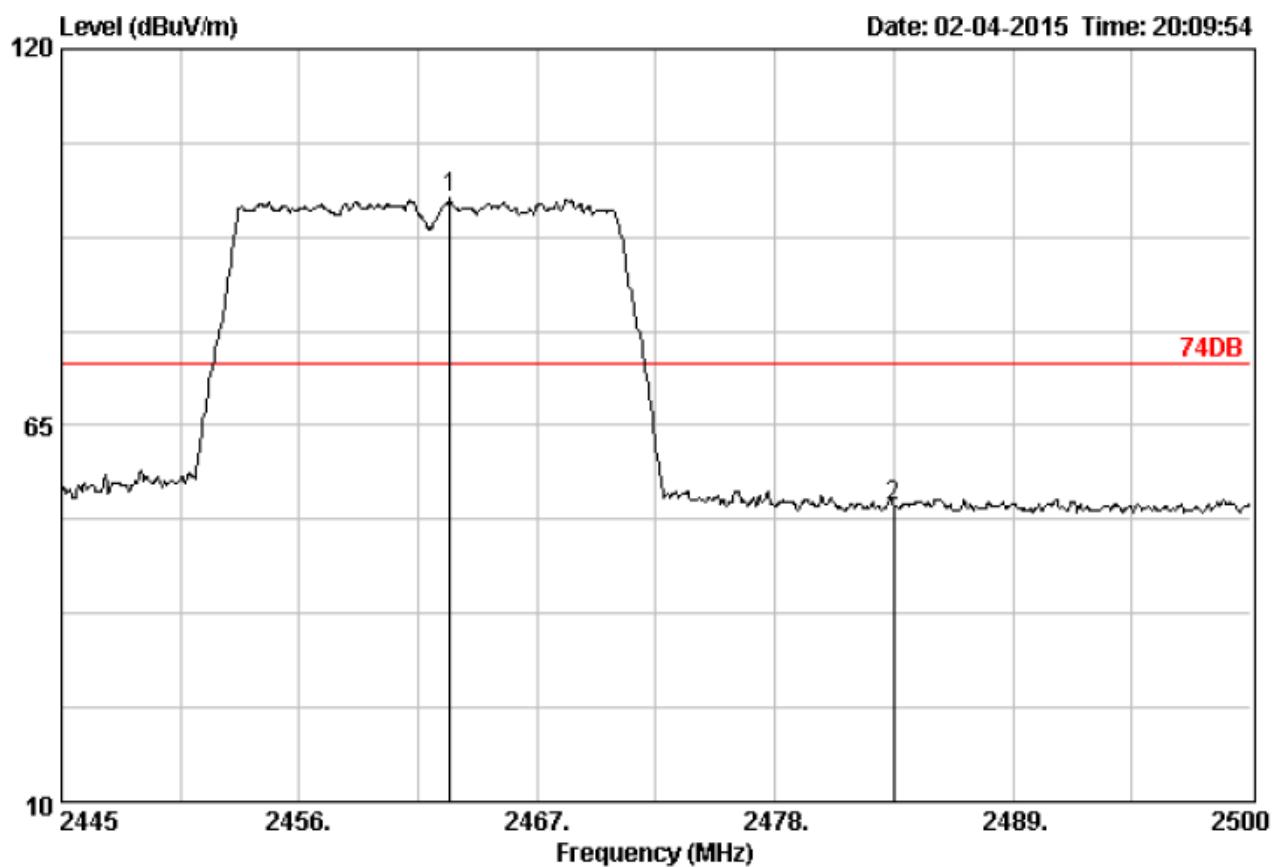


Site no. : 3m Chamber Data no. : 506
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2462.99	28.90	4.68	99.91	98.12	74.00	-24.12	Peak
2 2483.50	28.93	4.70	55.08	53.33	74.00	20.67	Peak

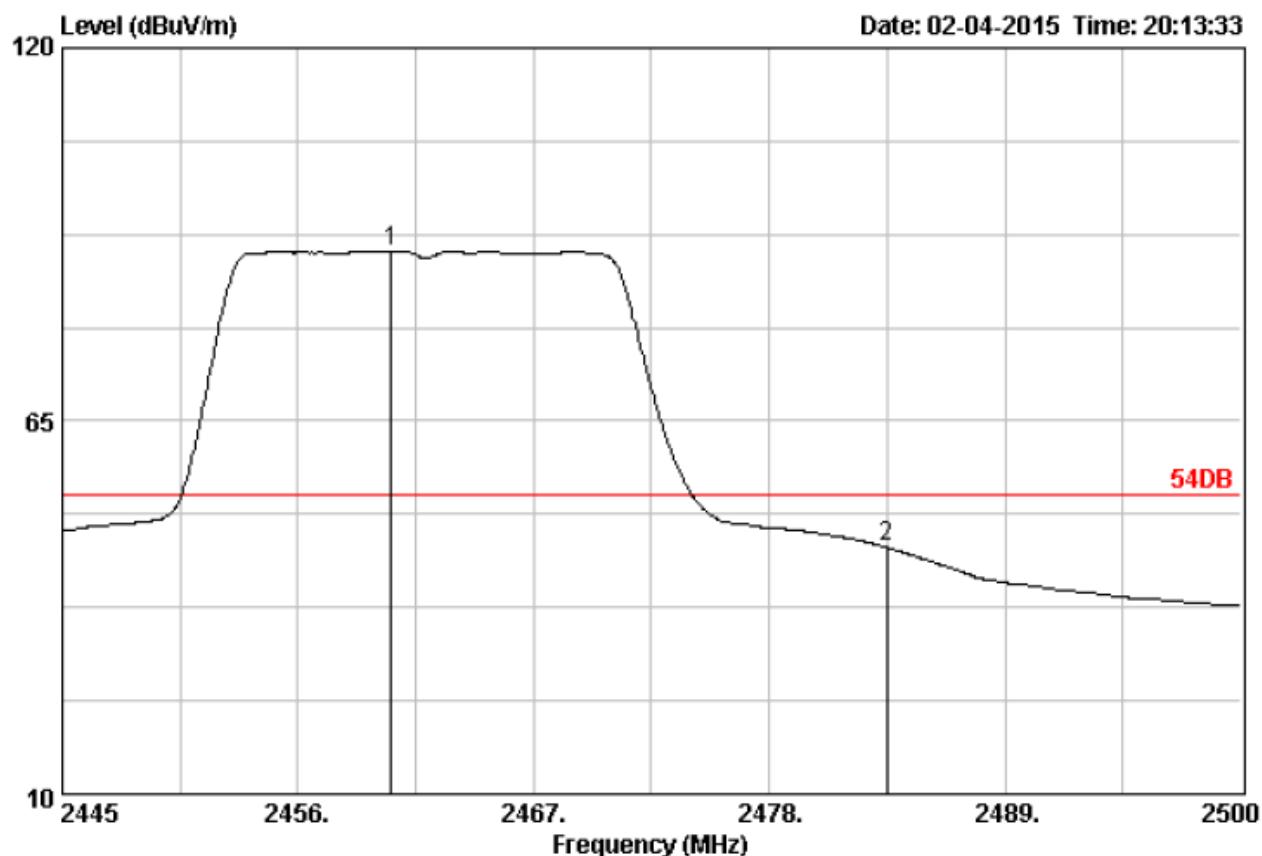

Site no. : 3m Chamber Data no. : 507
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2460.35	28.90	4.68	91.82	90.03	54.00	-36.03	Average	
2 2483.50	28.93	4.70	48.11	46.36	54.00	7.64	Average	

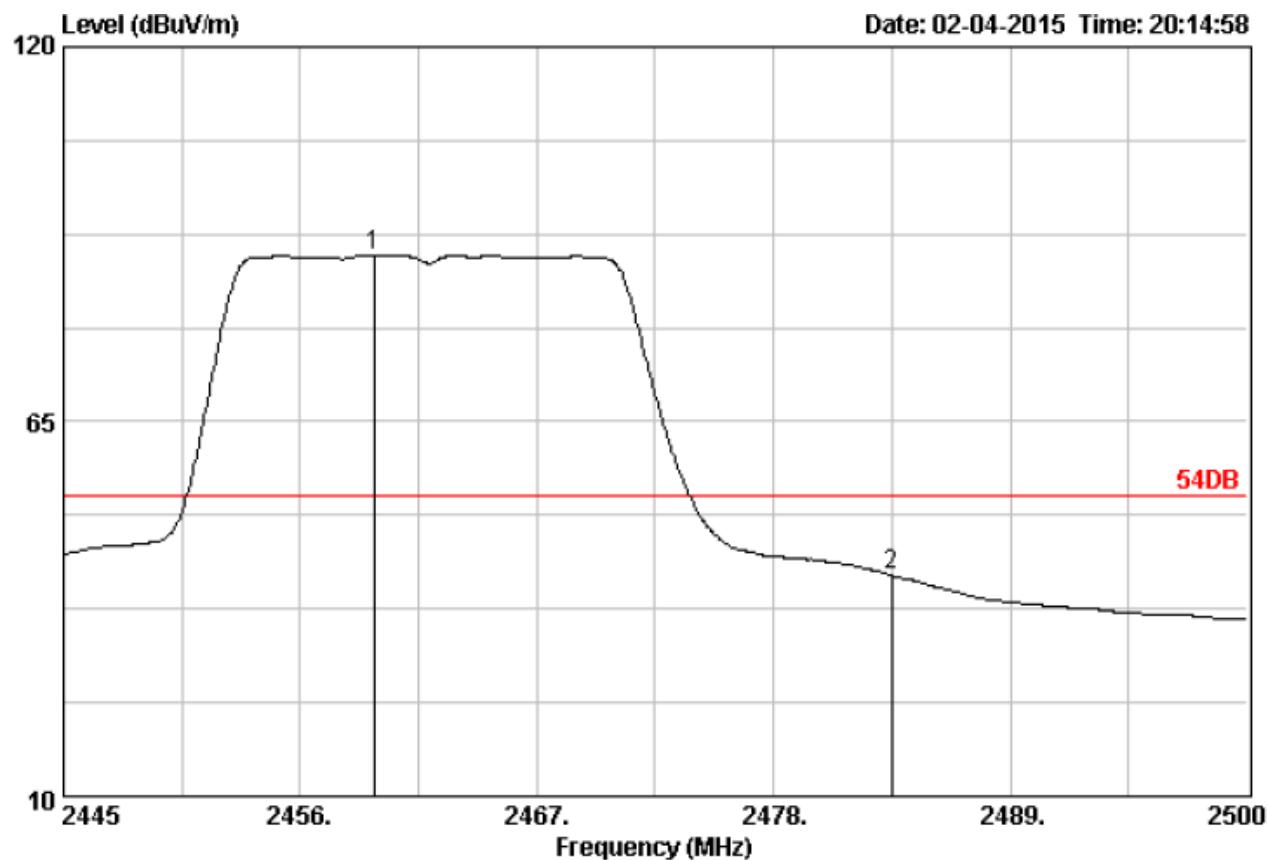

Site no. : 3m Chamber Data no. : 508
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2459.41	28.90	4.68	91.13	89.34	54.00	-35.34	Average	
2 2483.50	28.93	4.70	44.11	42.36	54.00	11.64	Average	

For 802.11n (40MHz) Mode:

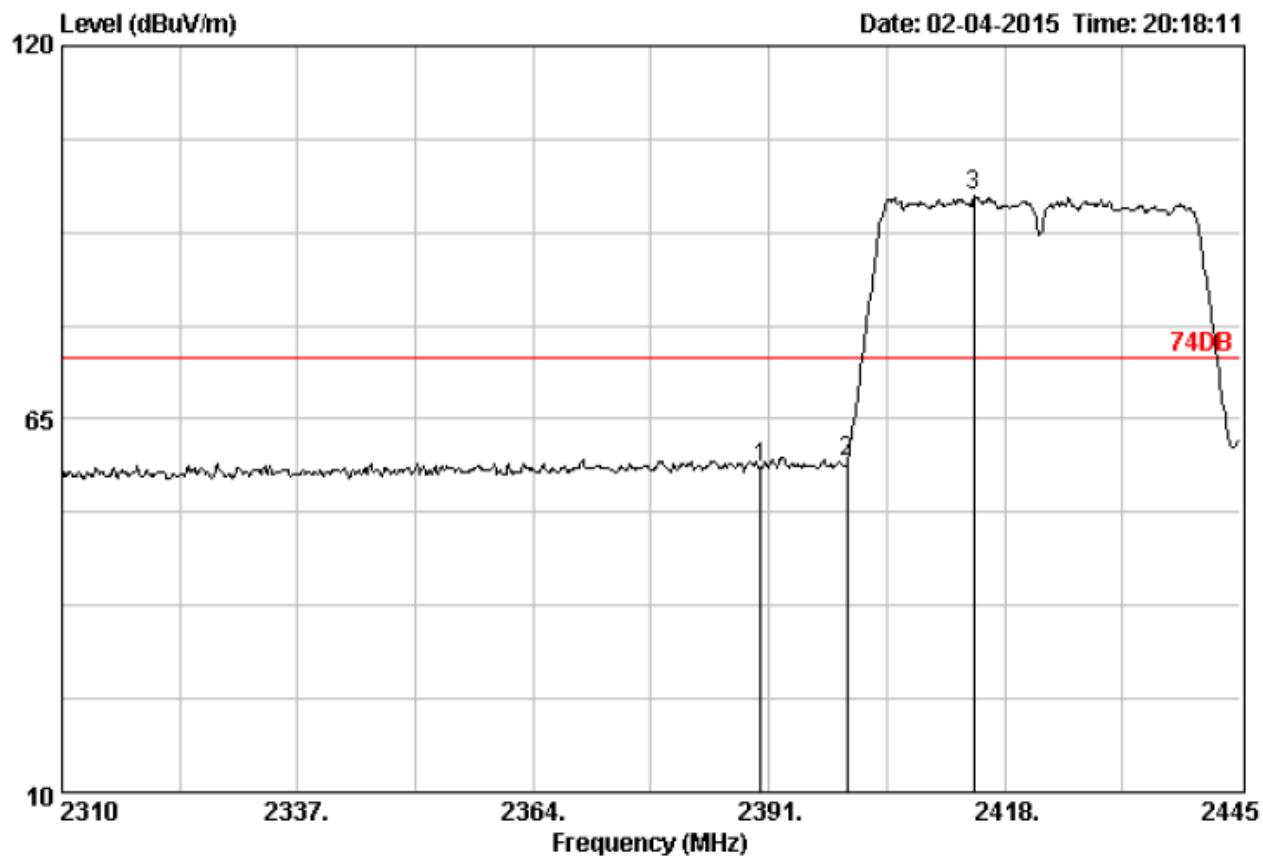


Site no. : 3m Chamber Data no. : 510
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission					Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.00	28.78	4.61	59.62	57.65	74.00	16.35	Peak	
2 2400.00	28.78	4.61	60.55	58.58	74.00	15.42	Peak	
3 2414.49	28.81	4.63	99.76	97.84	74.00	-23.84	Peak	

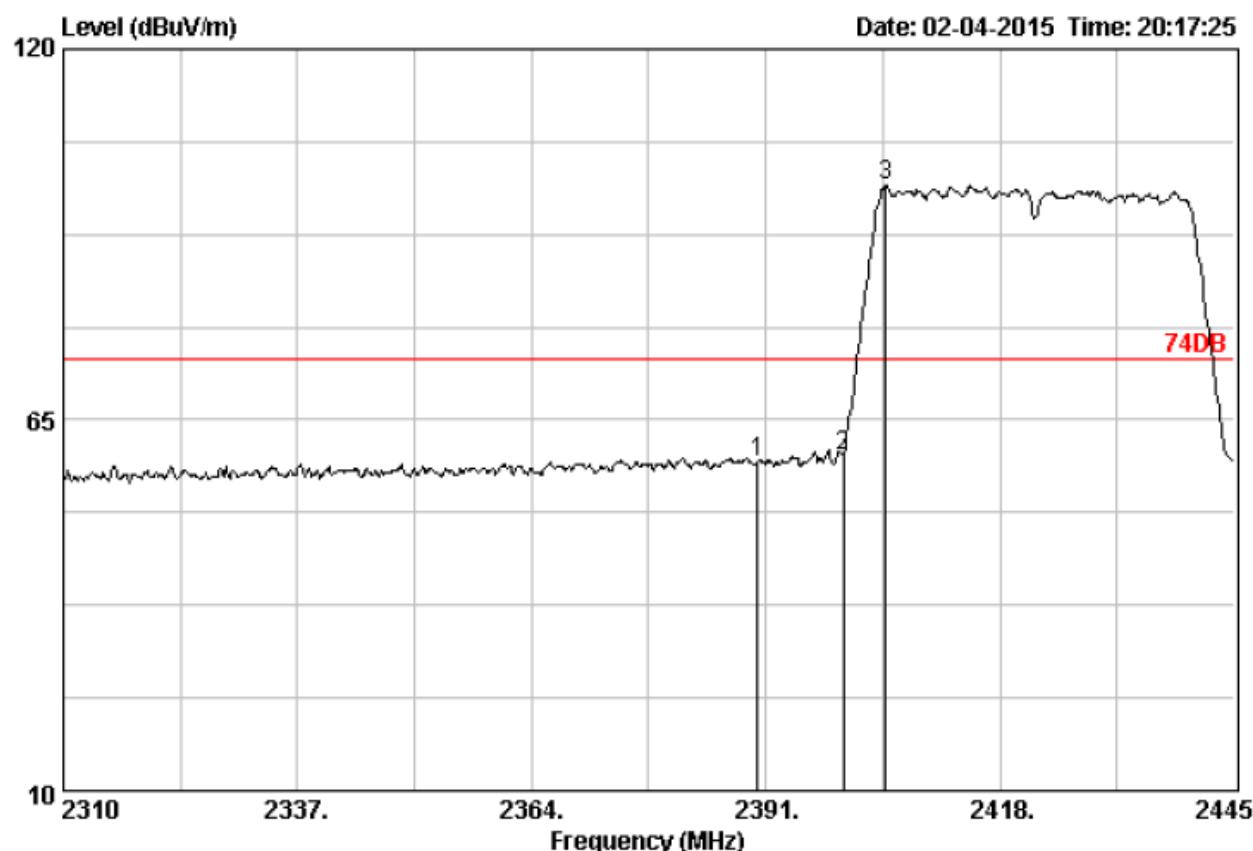


Site no. : 3m Chamber Data no. : 509
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	60.75	58.78	74.00	15.22	Peak
2 2400.00	28.78	4.61	61.56	59.59	74.00	14.41	Peak
3 2404.77	28.81	4.63	101.74	99.82	74.00	-25.82	Peak

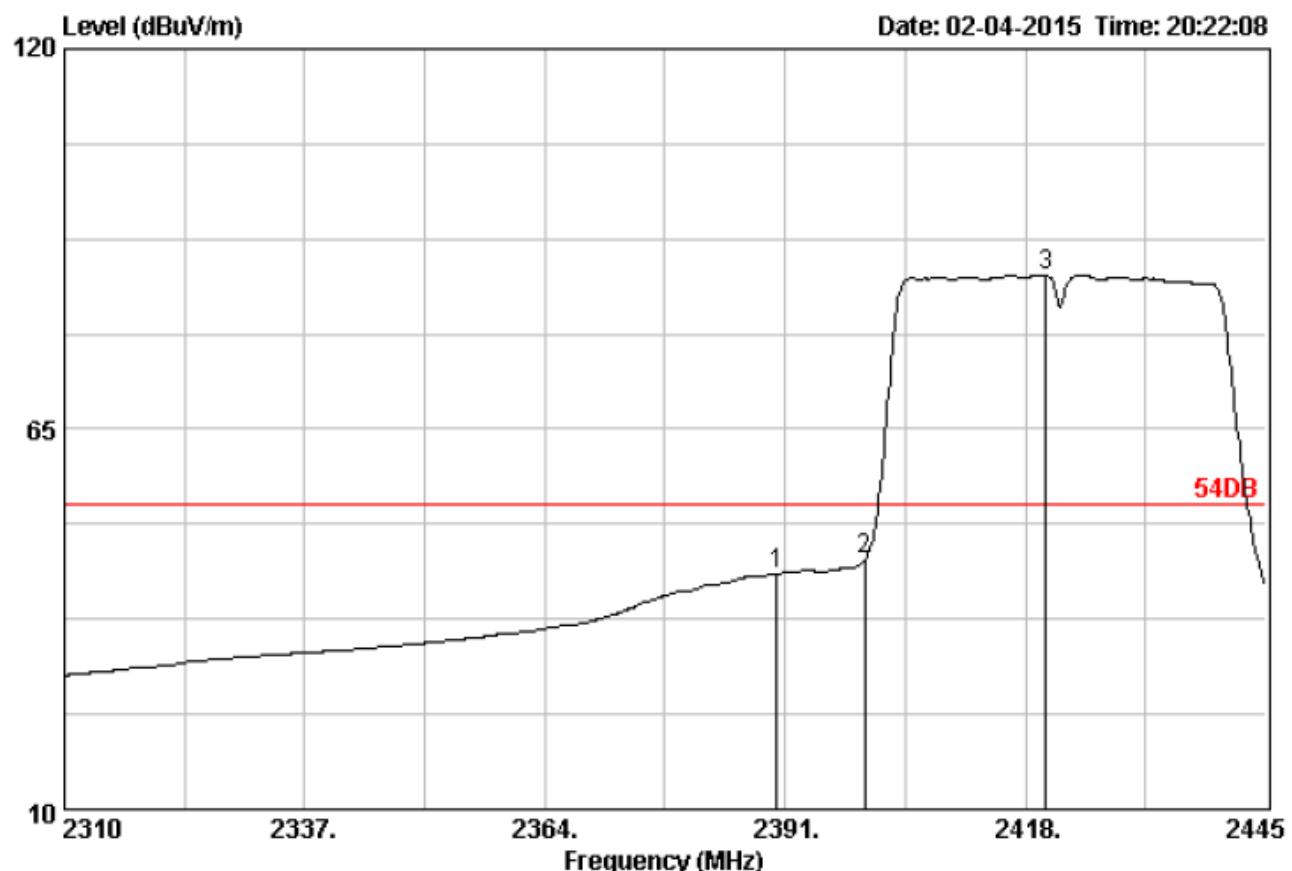


Site no. : 3m Chamber Data no. : 511
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	46.06	44.09	54.00	9.91	Average
2 2400.00	28.78	4.61	48.15	46.18	54.00	7.82	Average
3 2420.30	28.84	4.64	89.15	87.27	54.00	-33.27	Average

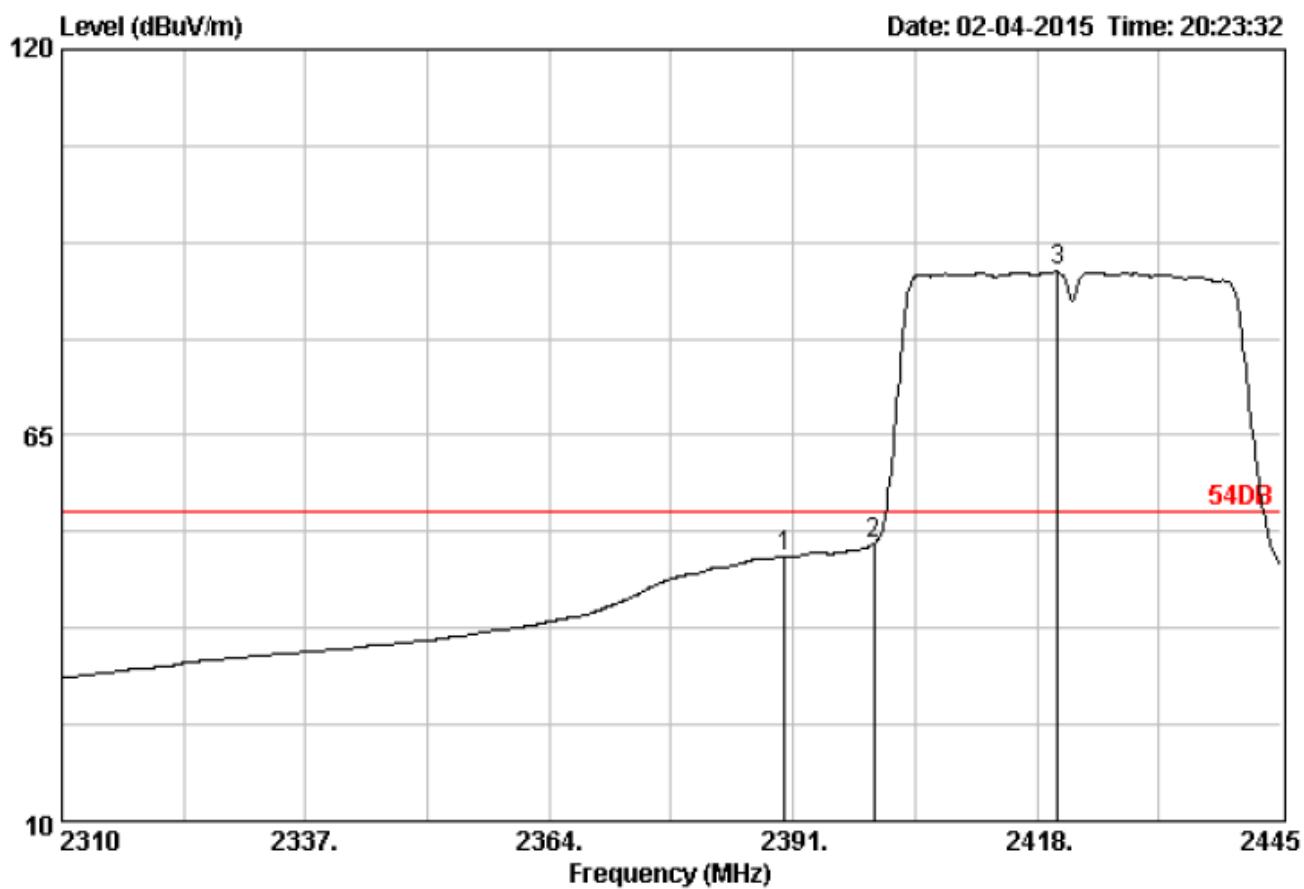


Site no. : 3m Chamber Data no. : 512
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
 Limit : 54DB
 Env. / Ins. : 23*C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.78	4.61	49.66	47.69	54.00	6.31	Average
2 2400.00	28.78	4.61	51.62	49.65	54.00	4.35	Average
3 2420.30	28.84	4.64	90.17	88.29	54.00	-34.29	Average

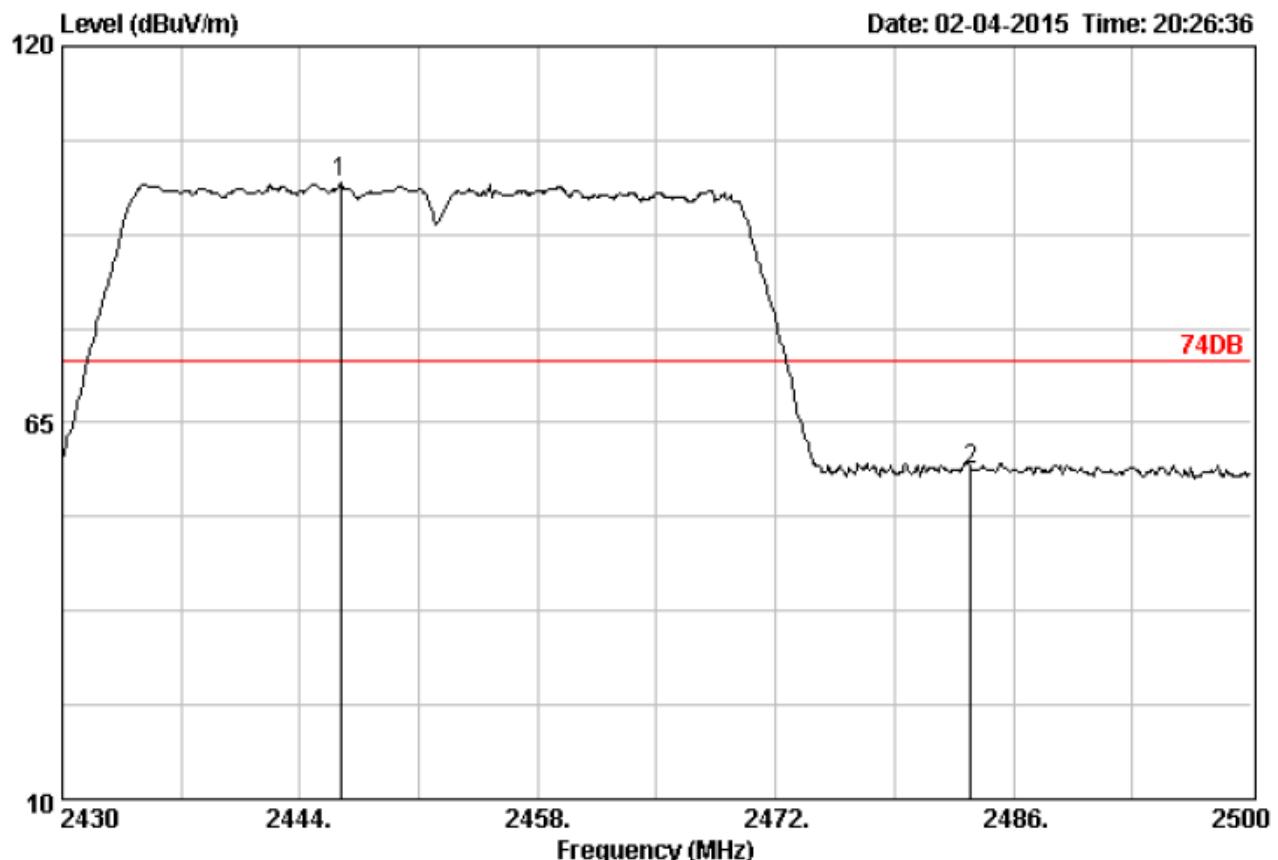

Site no. : 3m Chamber Data no. : 514
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2446.38	28.87	4.66	101.81	99.97	74.00	-25.97	Peak
2 2483.50	28.93	4.70	59.91	58.16	74.00	15.84	Peak

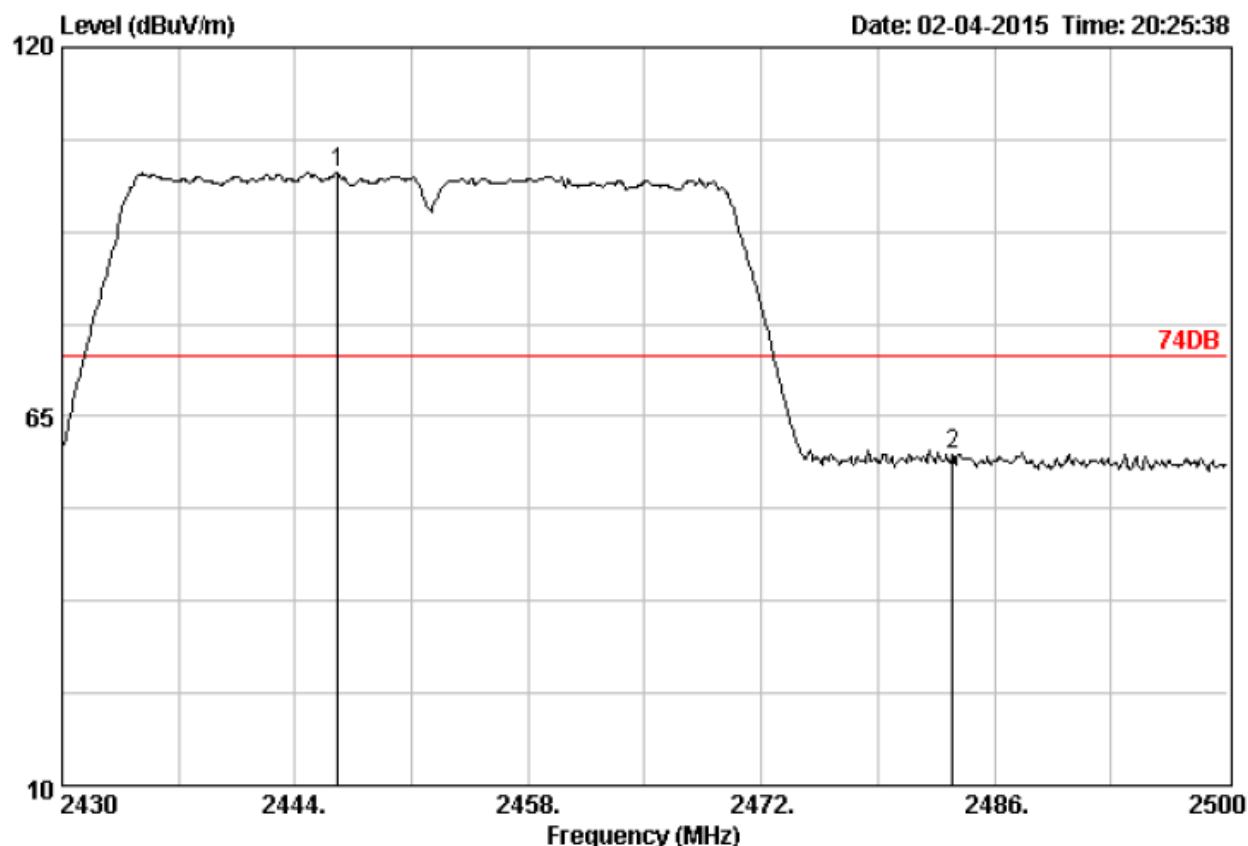

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 74DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Data no. : 513
 Ant. pol. : VERTICAL


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2446.59	28.87	4.66	103.23	101.39	74.00	-27.39	Peak
2 2483.50	28.93	4.70	61.11	59.36	74.00	14.64	Peak

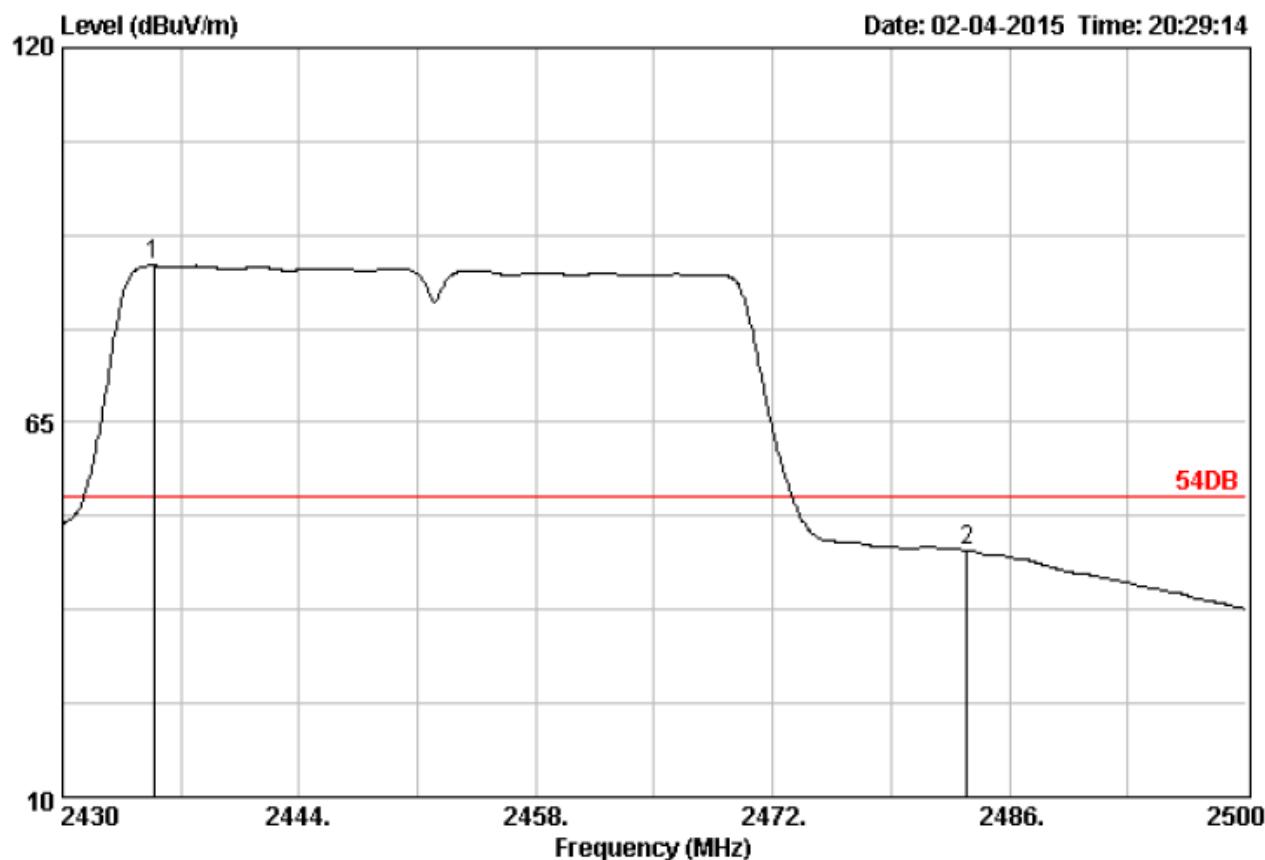

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : 54DB
 Env. / Ins. : 23°C/54%
 Engineer :
 EUT :
 Power :
 M/N :
 Test Mode :

Data no. : 515
 Ant. pol. : HORIZONTAL

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
<hr/>							
1 2435.39	28.84	4.64	89.93	88.04	54.00	-34.04	Average
2 2483.50	28.93	4.70	47.99	46.24	54.00	7.76	Average

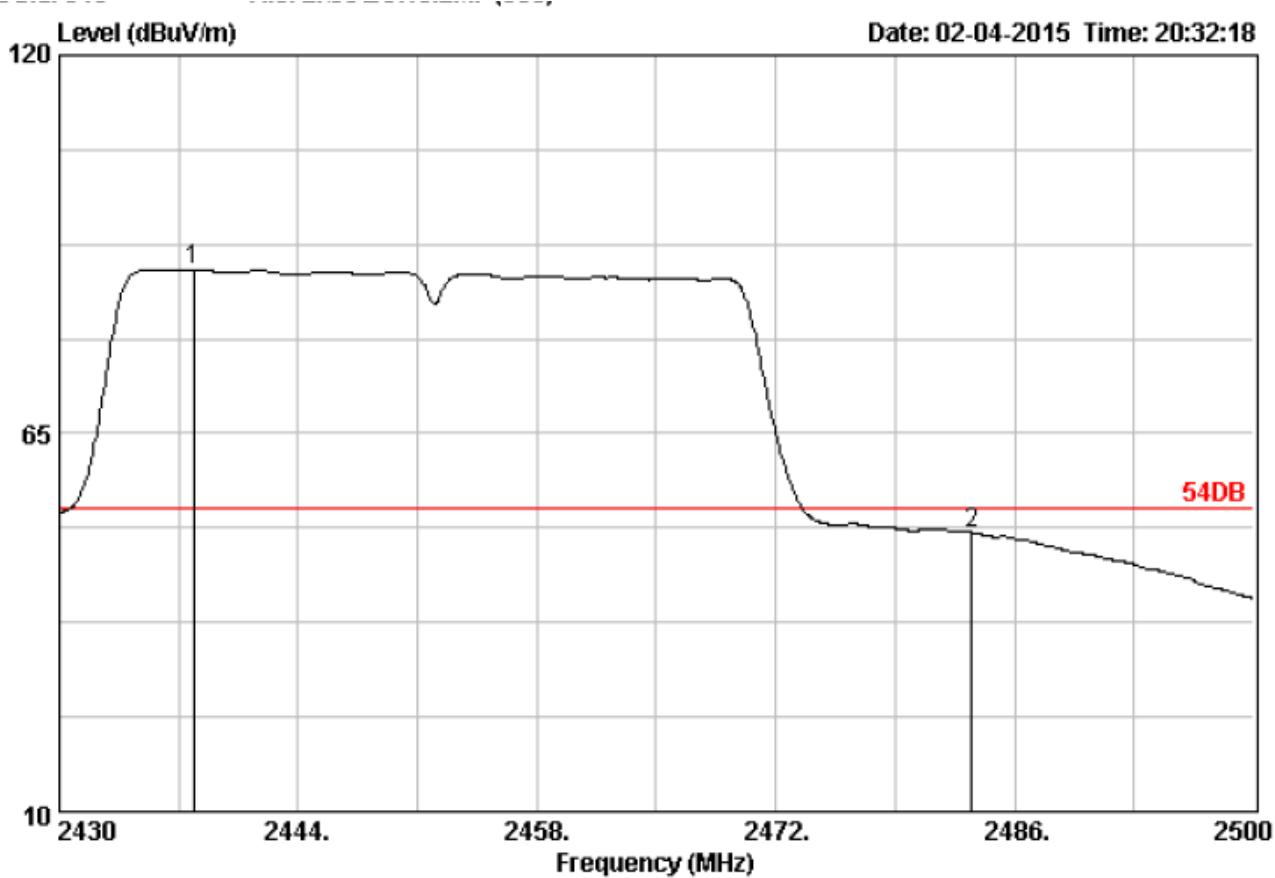


Site no. : 3m Chamber Data no. : 516
Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL
Limit : 54DB
Env. / Ins. : 23°C/54%
Engineer :
EUT :
Power :
M/N :
Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2437.84	28.87	4.66	90.65	88.81	54.00	-34.81	Average
2 2483.50	28.93	4.70	52.35	50.60	54.00	3.40	Average

4.6. Power Spectral Density Measurement

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, VBW \geq 10KHz, SPAN to 1.5 times greater than the EBW.,

LIMIT


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


Product	:	Handsets
Test Item	:	Power Spectral Density
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-9.365	8	Pass
06	2437	-10.18	8	Pass
11	2462	-10.21	8	Pass


Channel 01 (2412MHz)

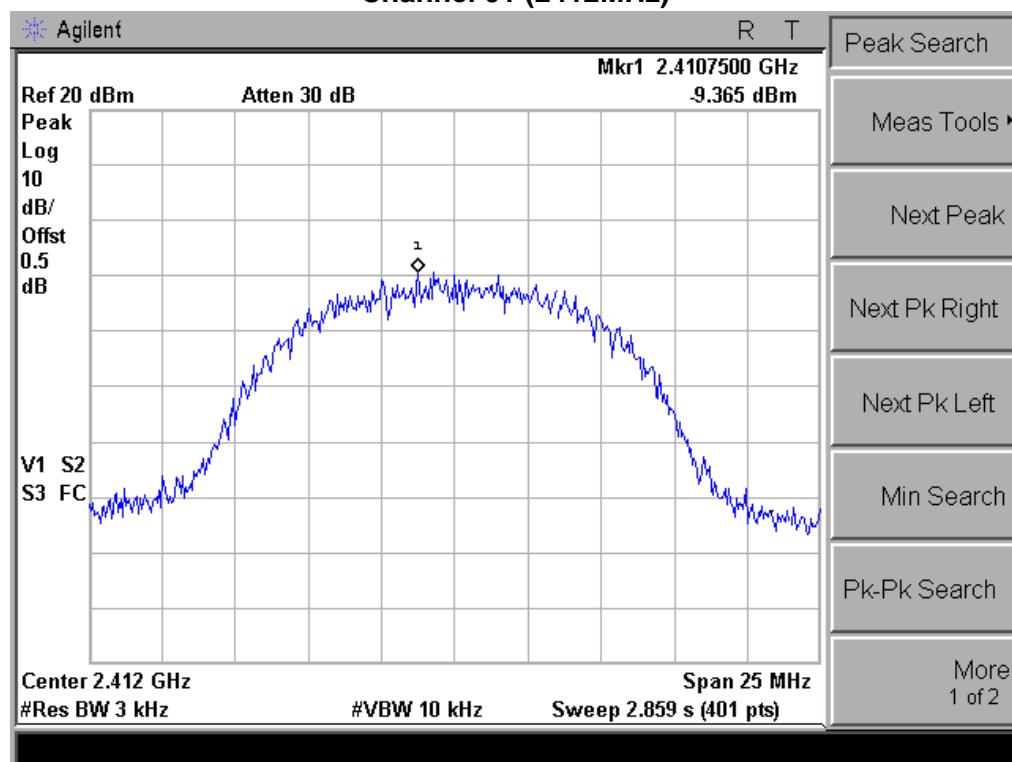

Channel 06 (2437MHz)

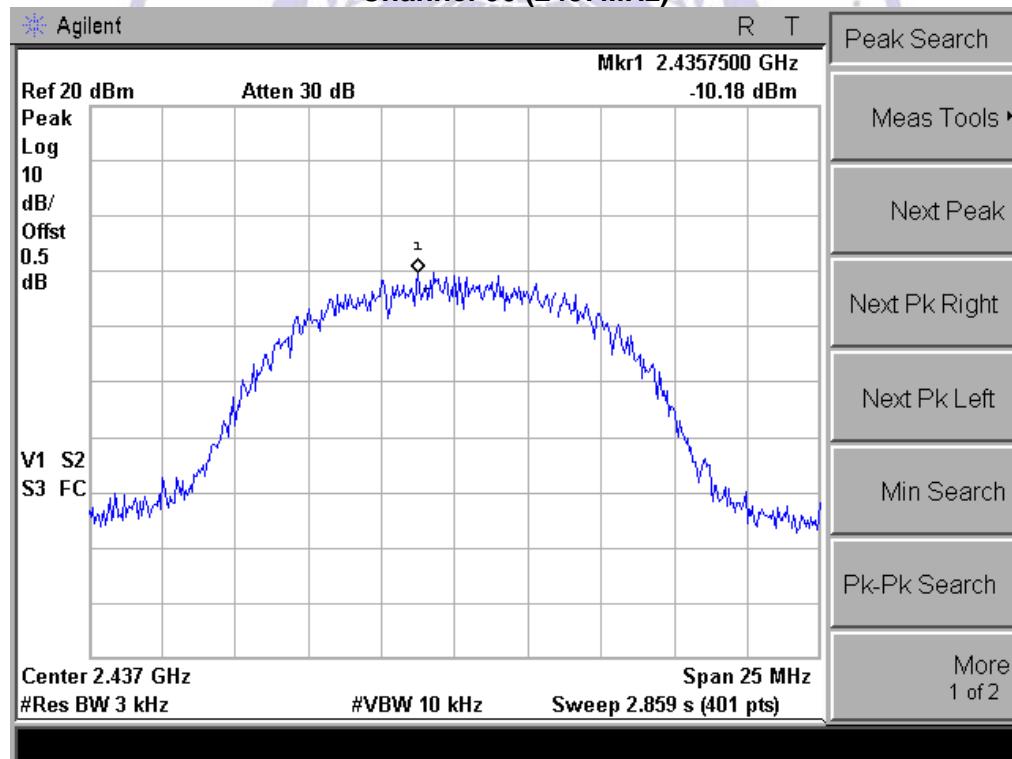


Channel 11 (2462MHz)

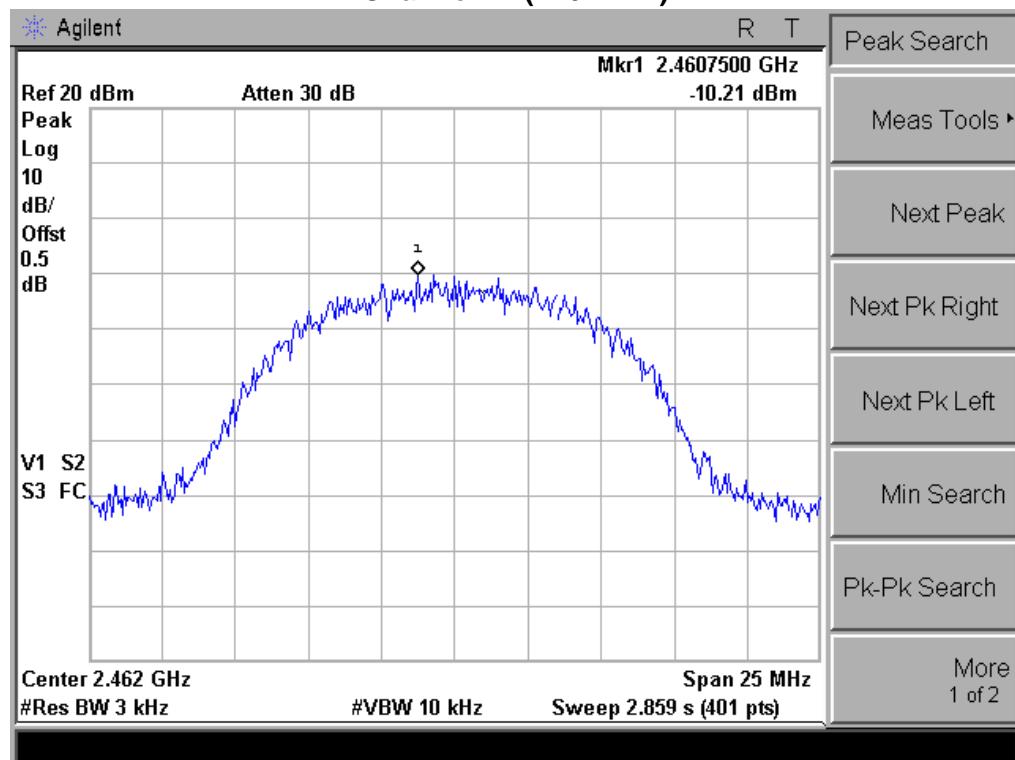


Product	:	Handsets
Test Item	:	Power Spectral Density
Test Mode	:	Mode 2: Transmit by 802.11g


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-15.70	8	Pass
06	2437	-15.52	8	Pass
11	2462	-15.99	8	Pass

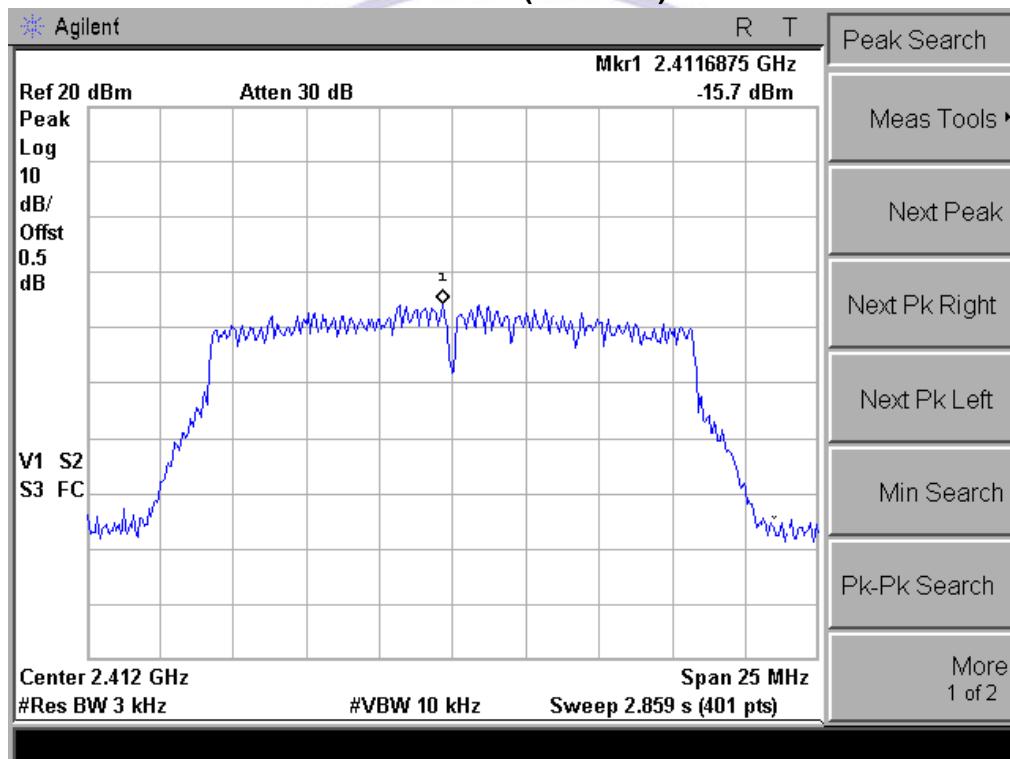Channel 01 (2412MHz)

Channel 06 (2437MHz)

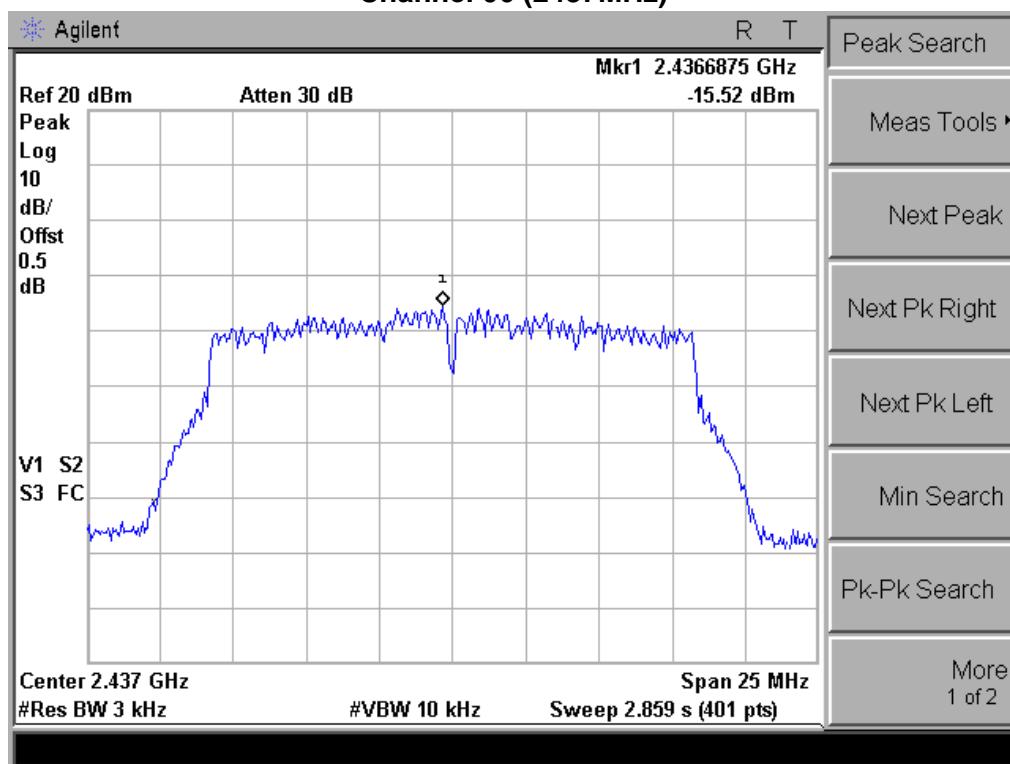


Channel 11 (2462MHz)

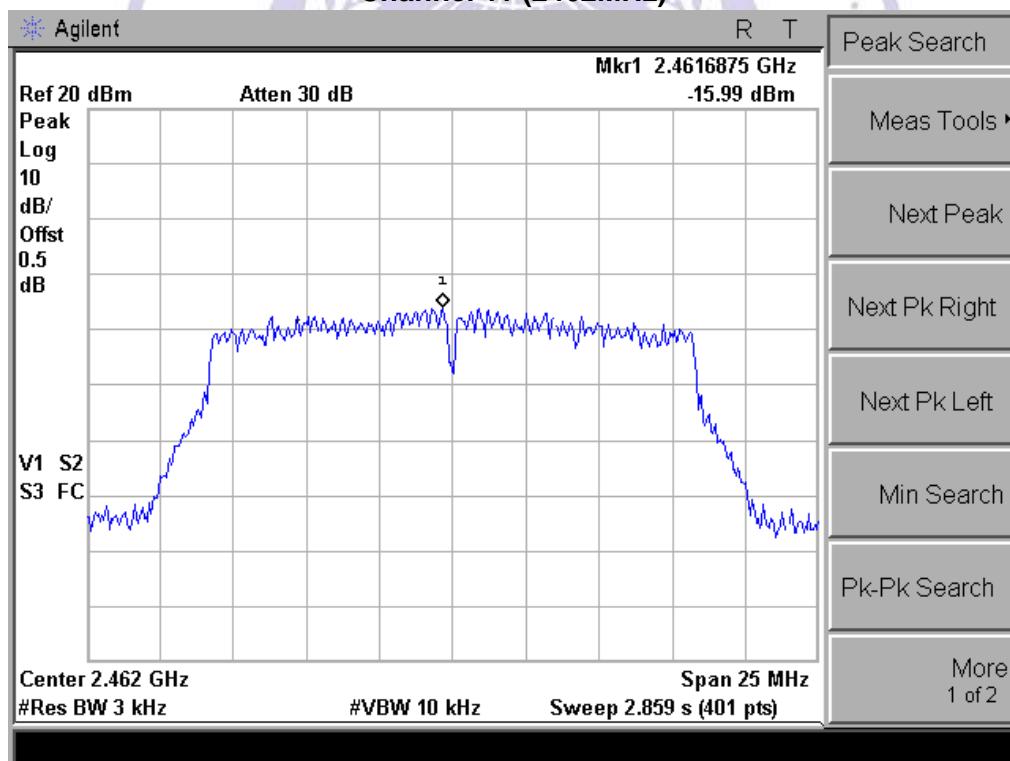


Product	:	Handsets
Test Item	:	Power Spectral Density
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-16.51	8	Pass
06	2437	-16.69	8	Pass
11	2462	-16.68	8	Pass

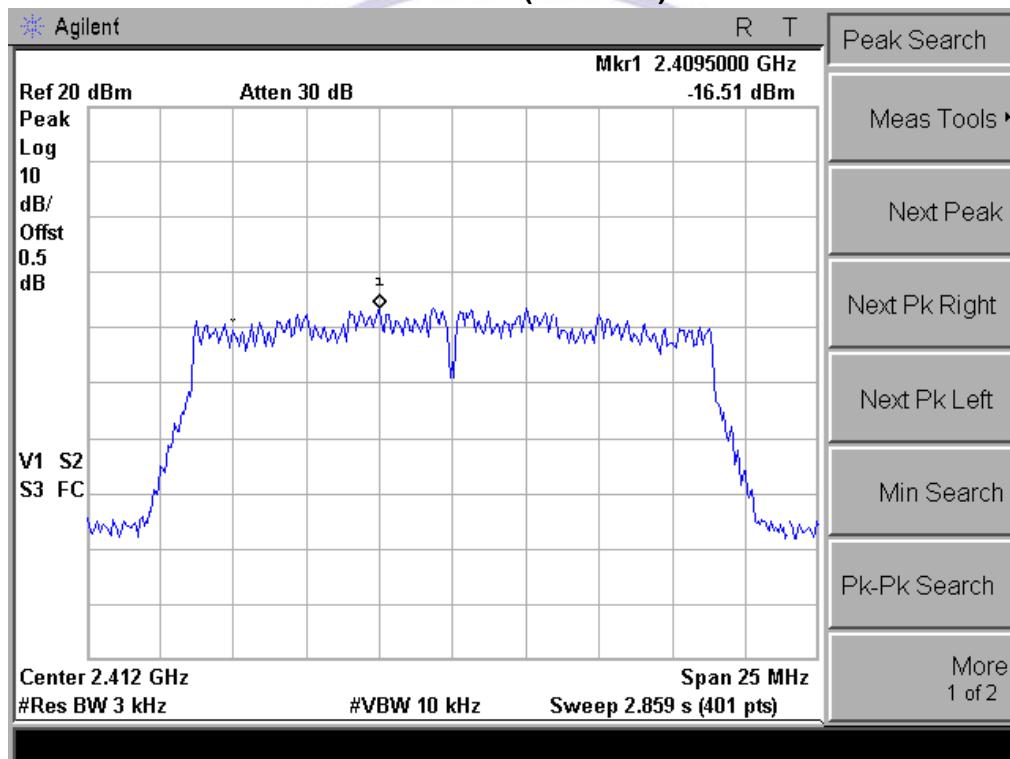Channel 01 (2412MHz)

Channel 06 (2437MHz)

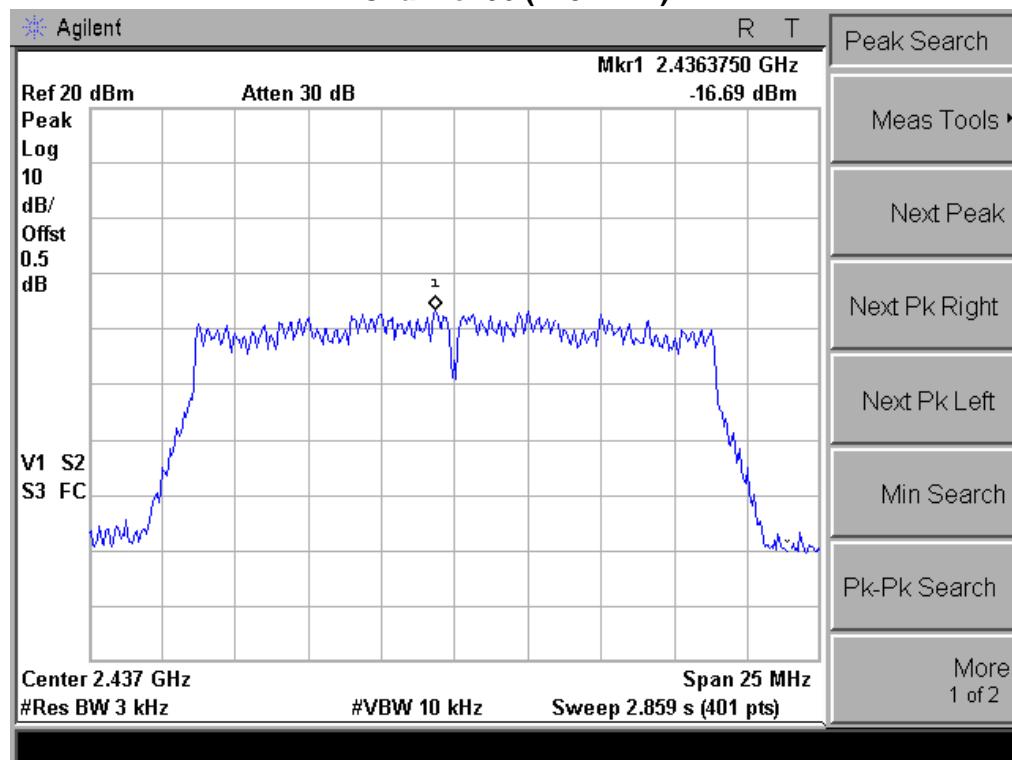


Channel 11 (2462MHz)

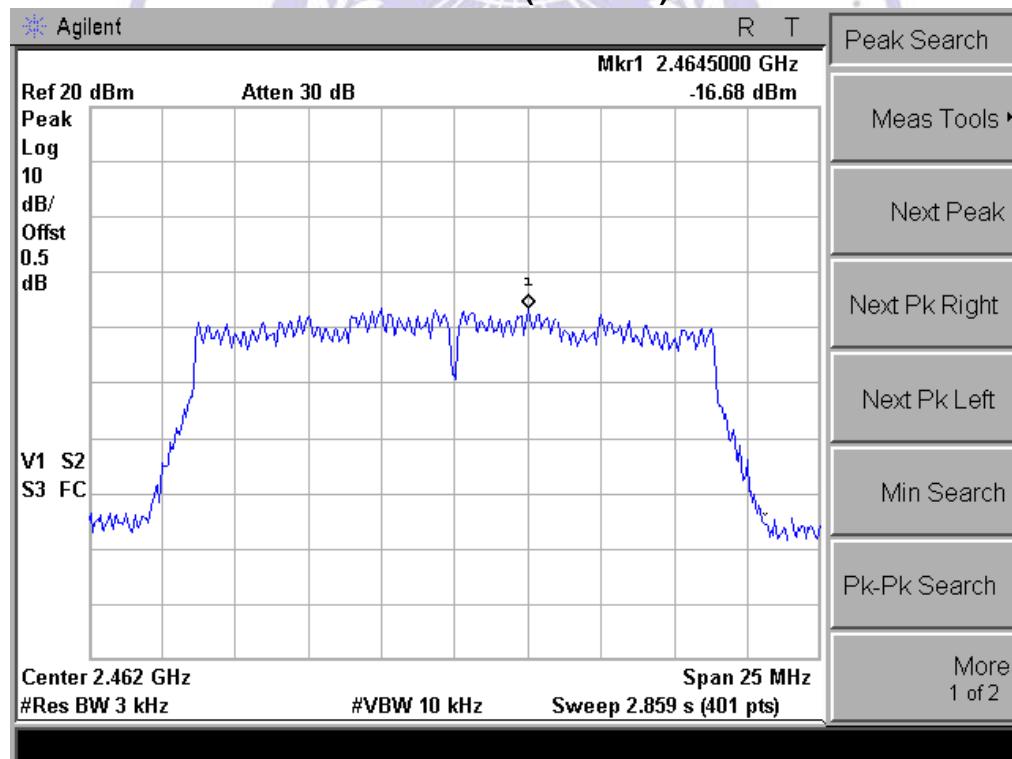


Product	:	Handsets
Test Item	:	Power Spectral Density
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
03	2422	-19.45	8	Pass
06	2437	-20.05	8	Pass
09	2452	-19.85	8	Pass


Channel 03 (2422MHz)

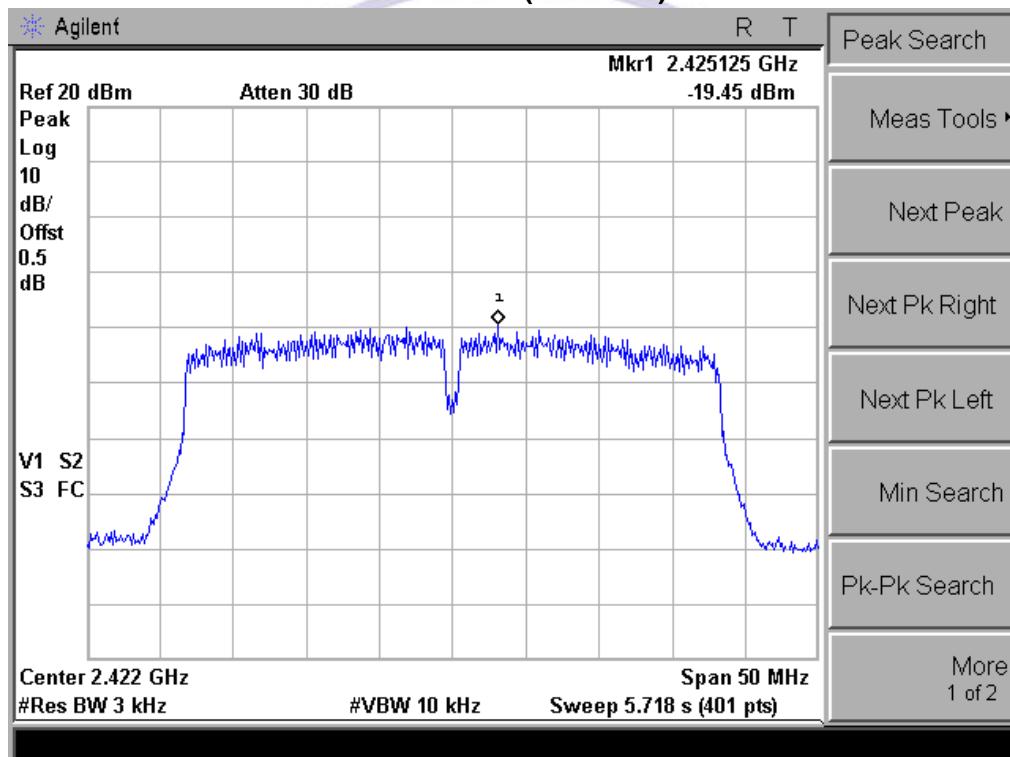

Channel 06 (2437MHz)

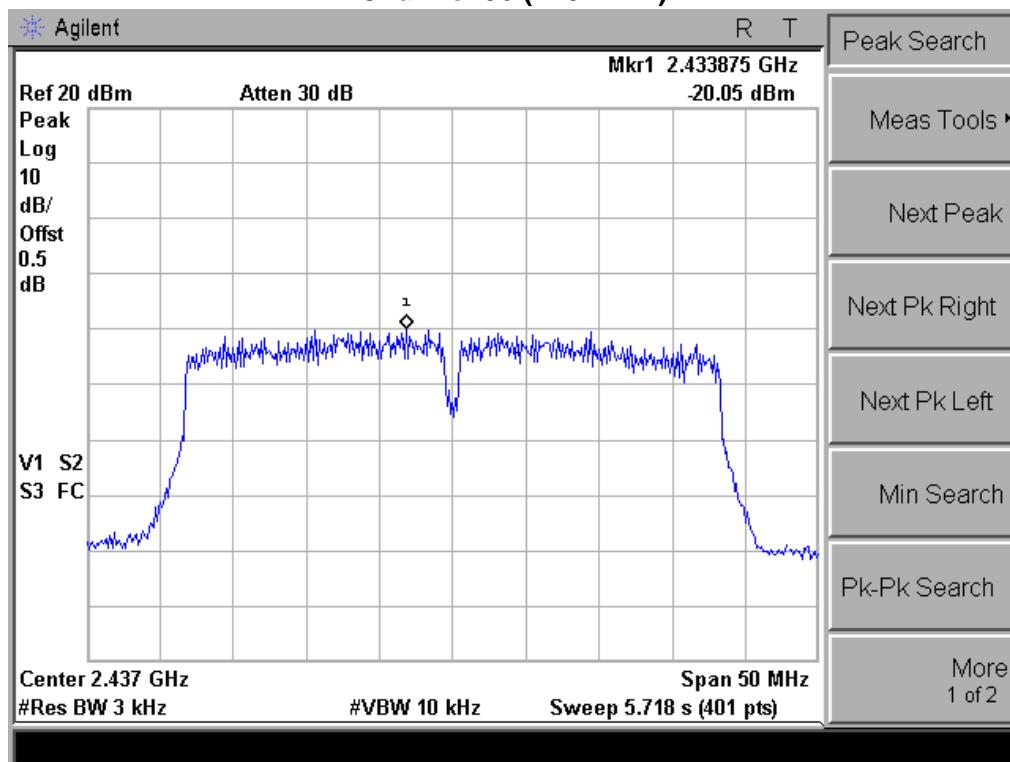


Channel 09 (2452MHz)

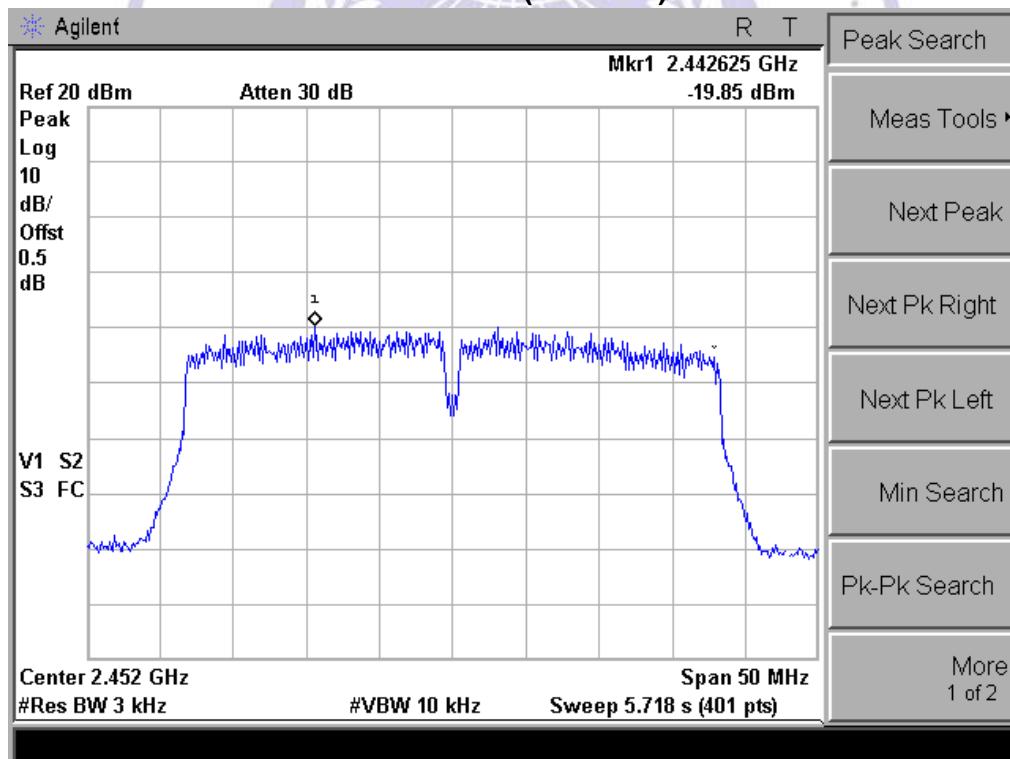

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measure frequeny range from 30MHz to 26.5GHz.


LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.



TEST RESULTS

Product	:	Handsets
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 1: Transmit by 802.11b


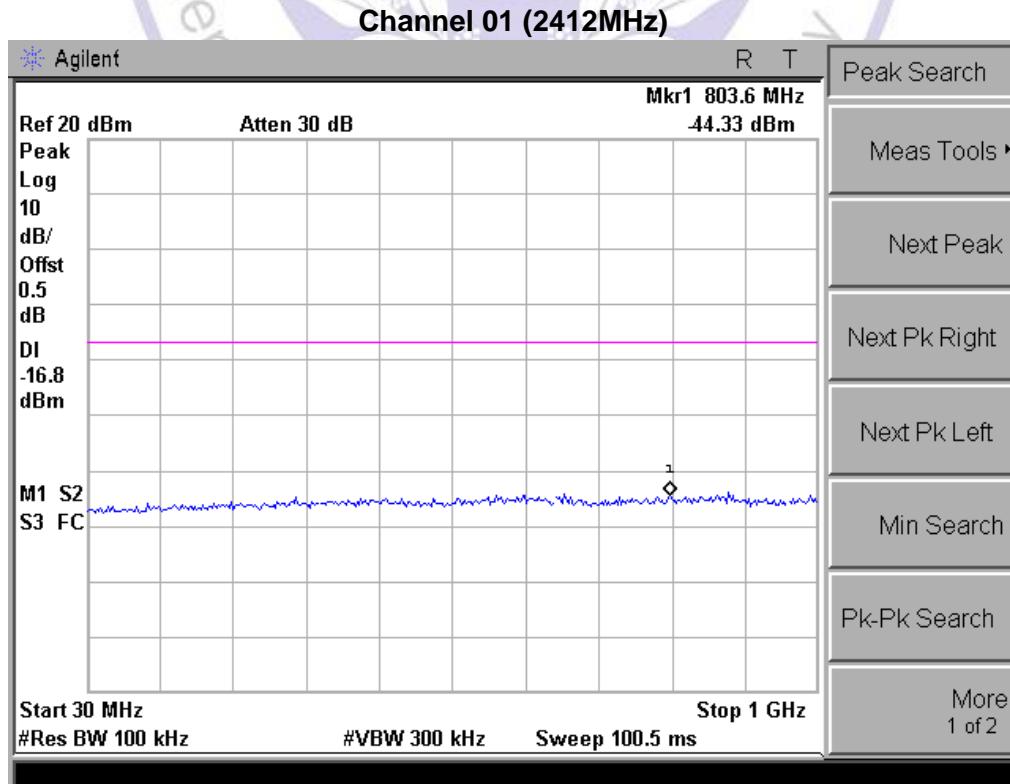


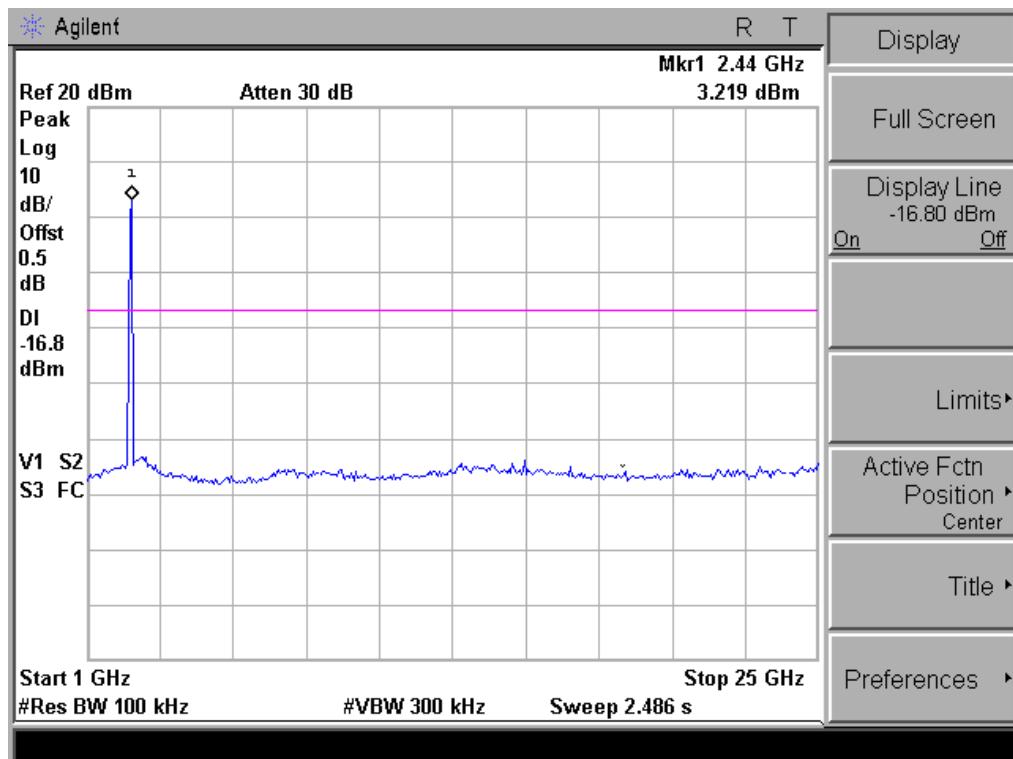

Channel 06 (2437MHz)

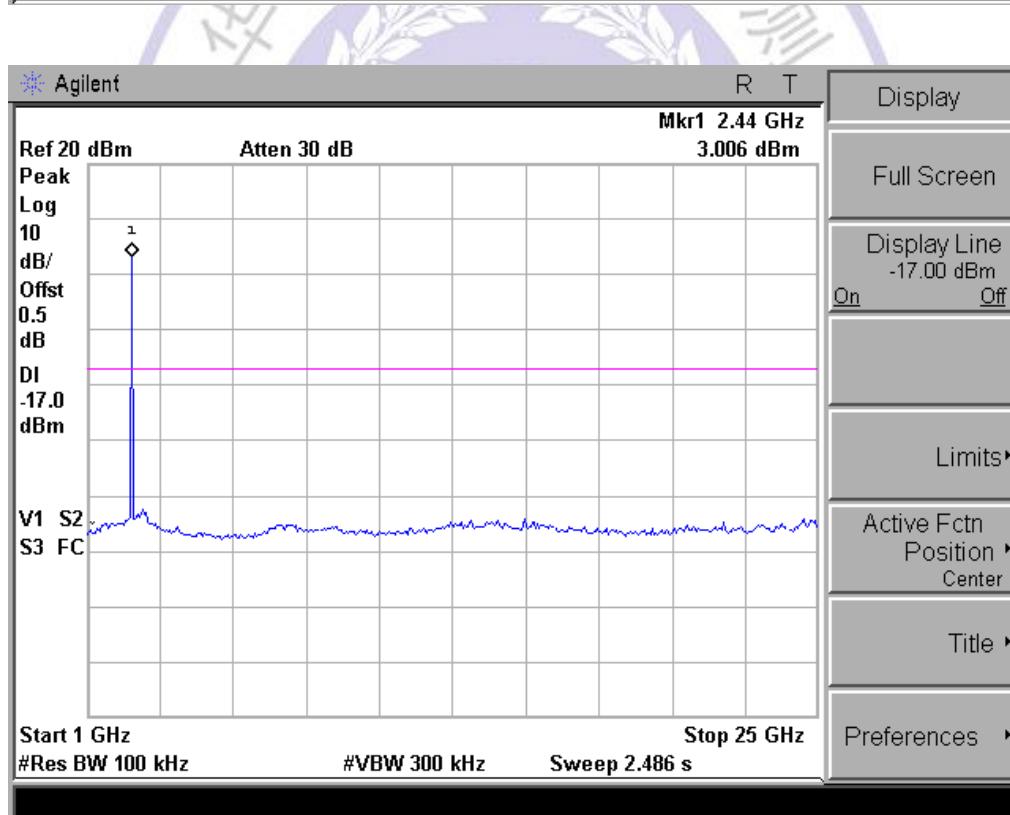
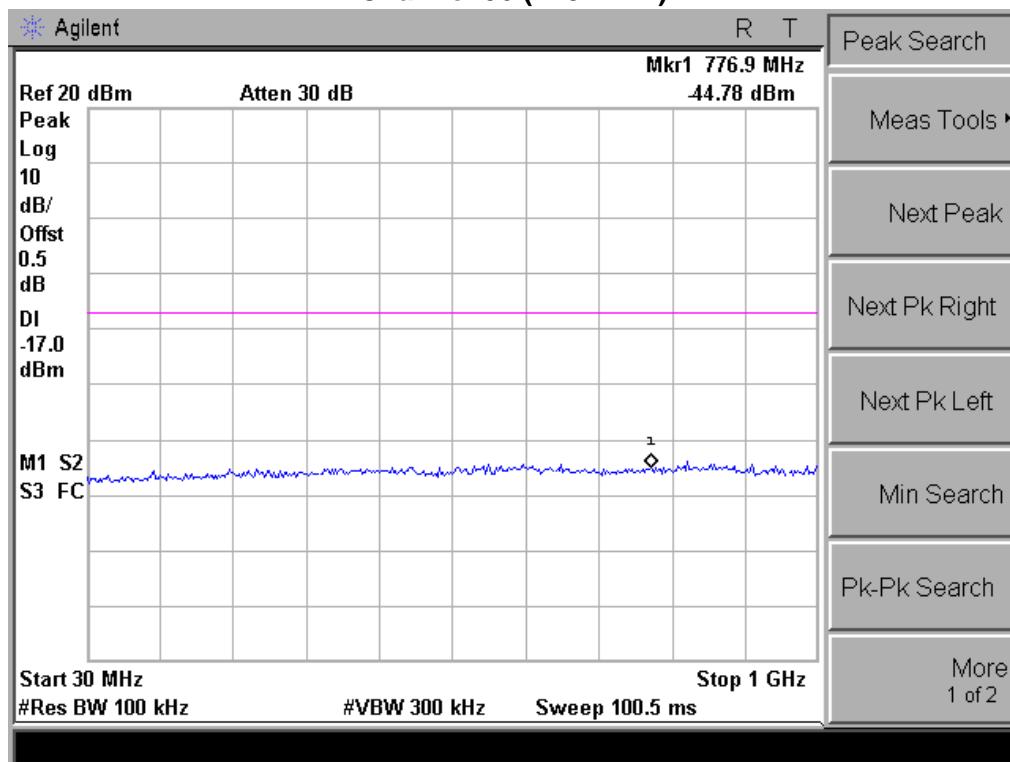


Channel 11 (2462MHz)

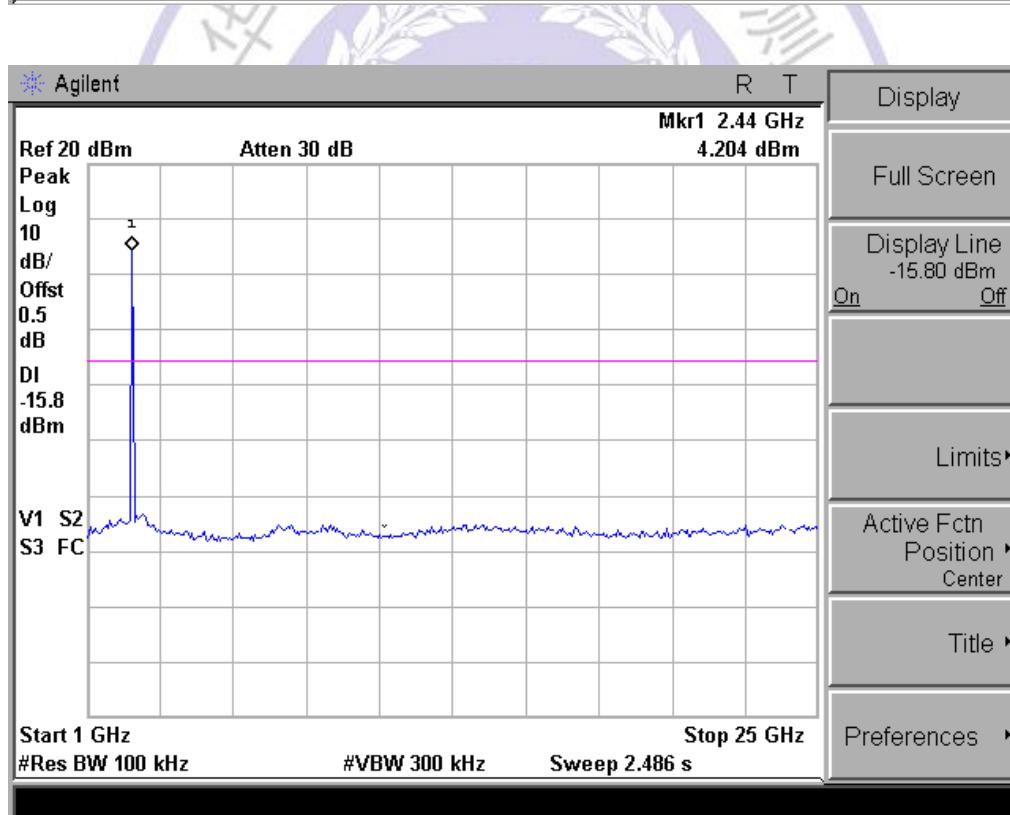
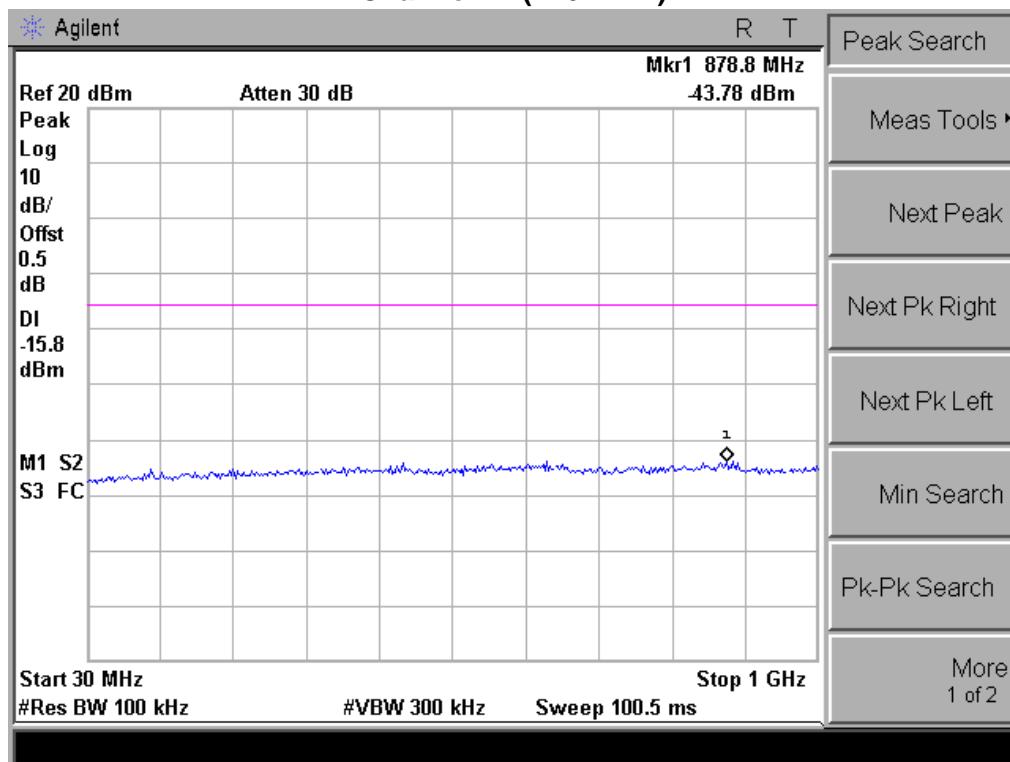


Product	:	Handsets
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 2: Transmit by 802.11g



Channel 01 (2412MHz)

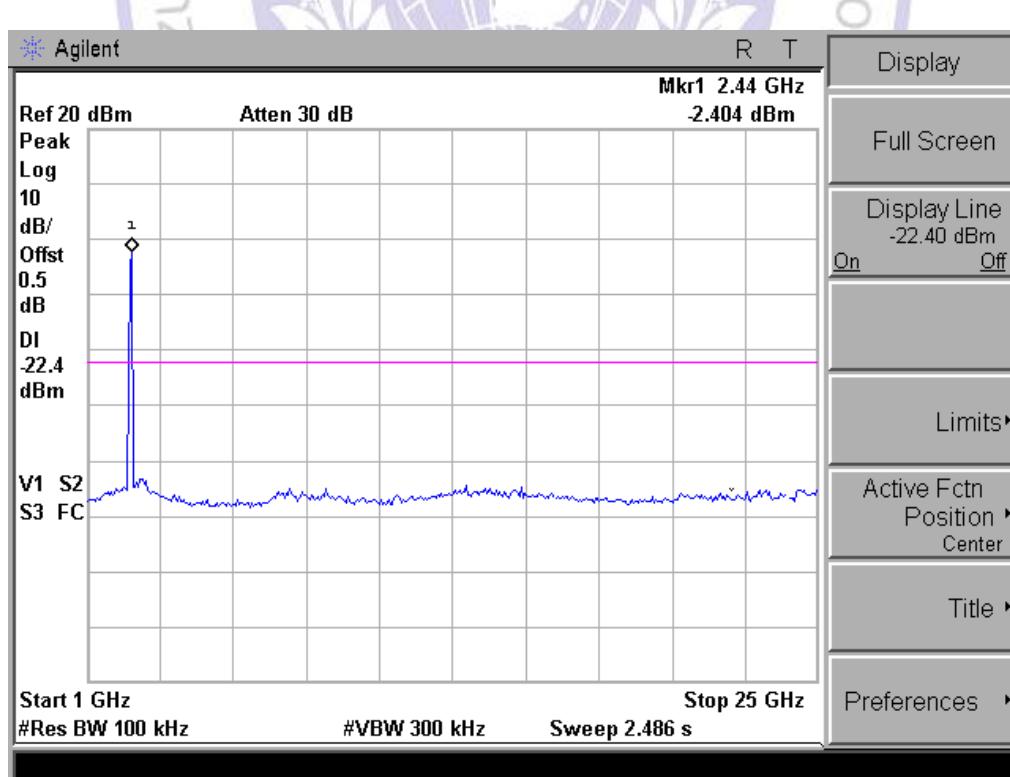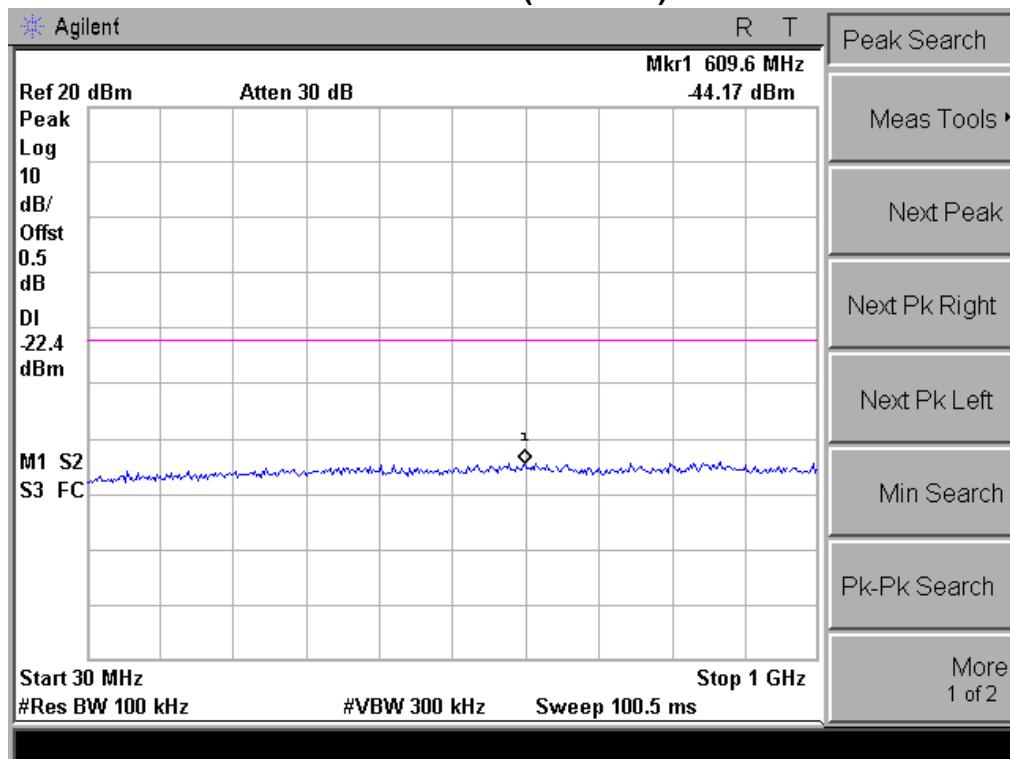

Channel 06 (2437MHz)

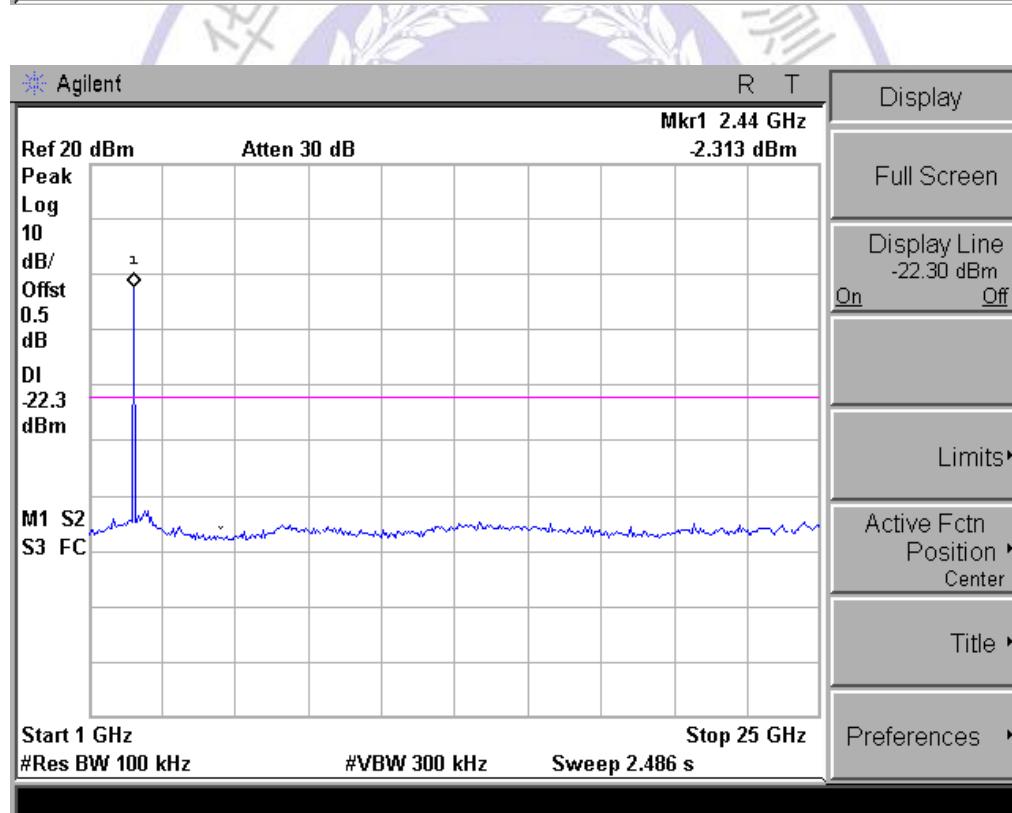
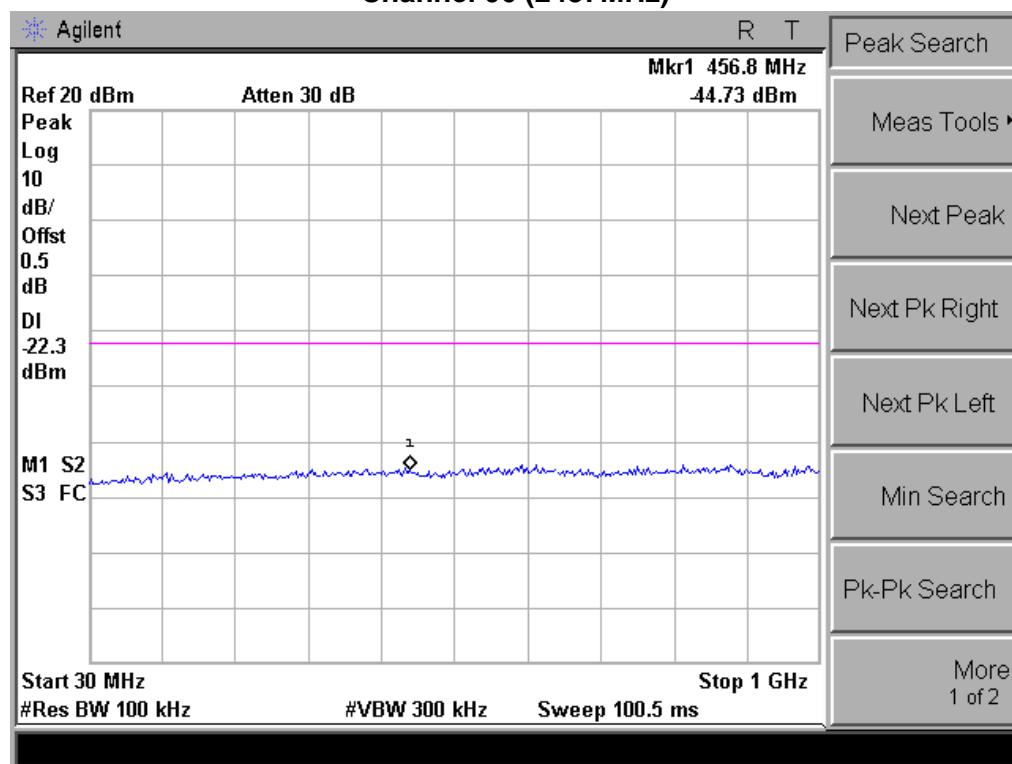


Channel 11 (2462MHz)

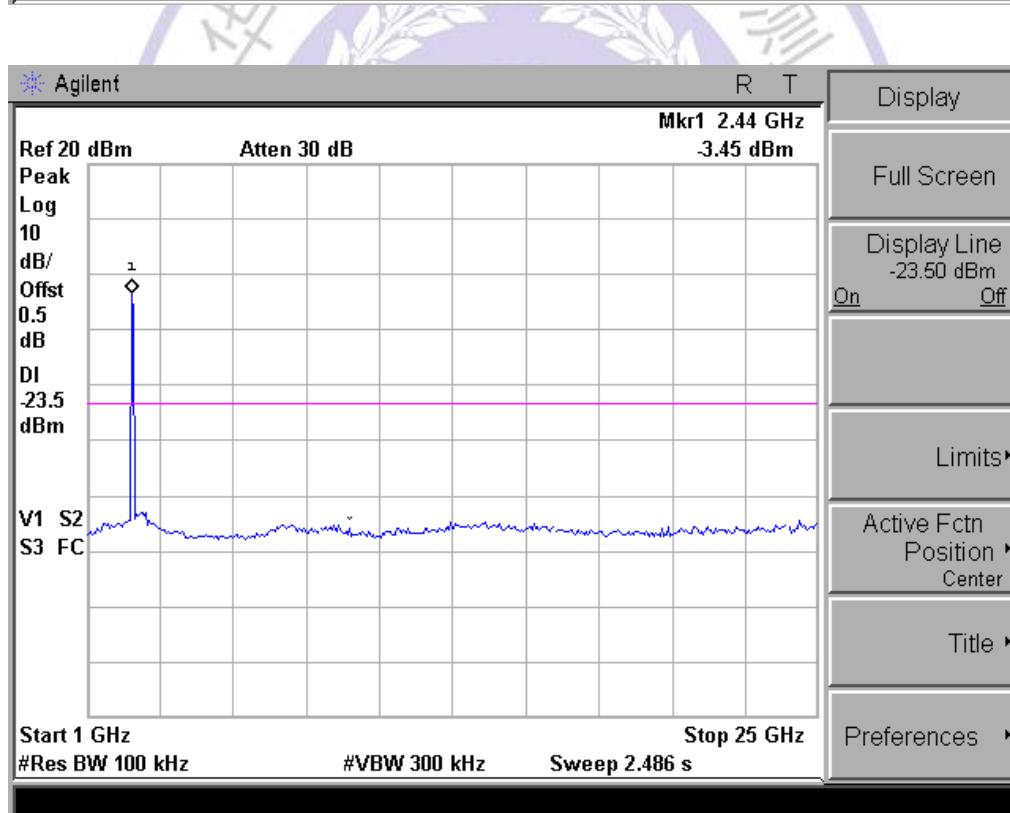
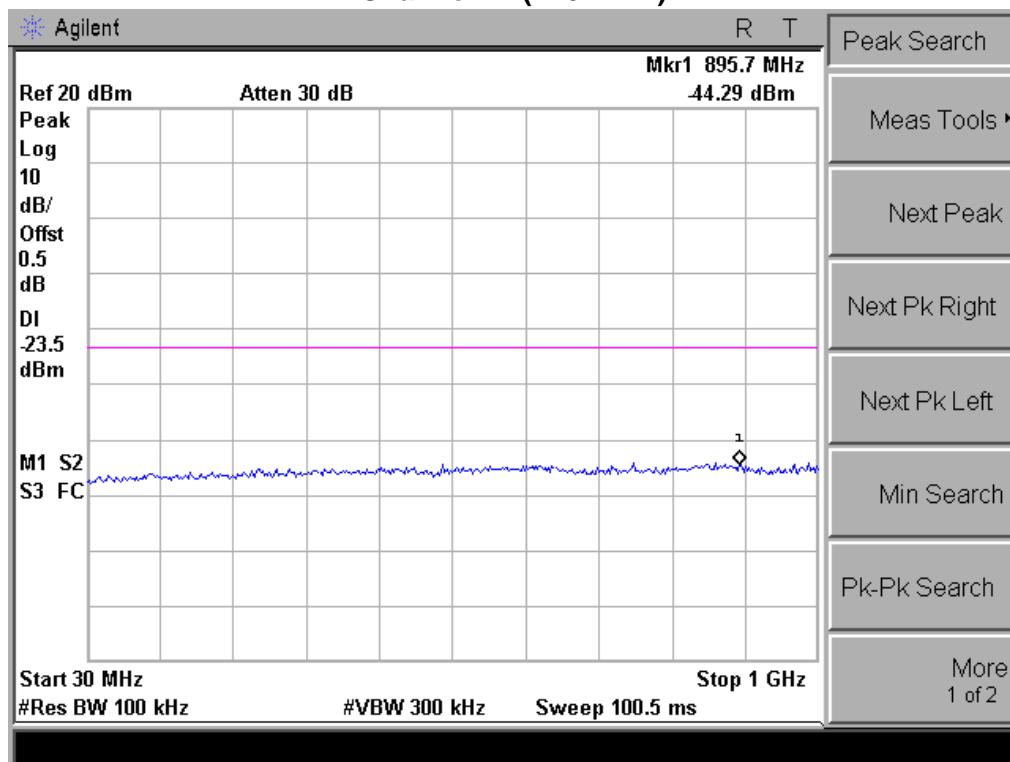


Product	:	Handsets
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz)



Channel 01 (2412MHz)

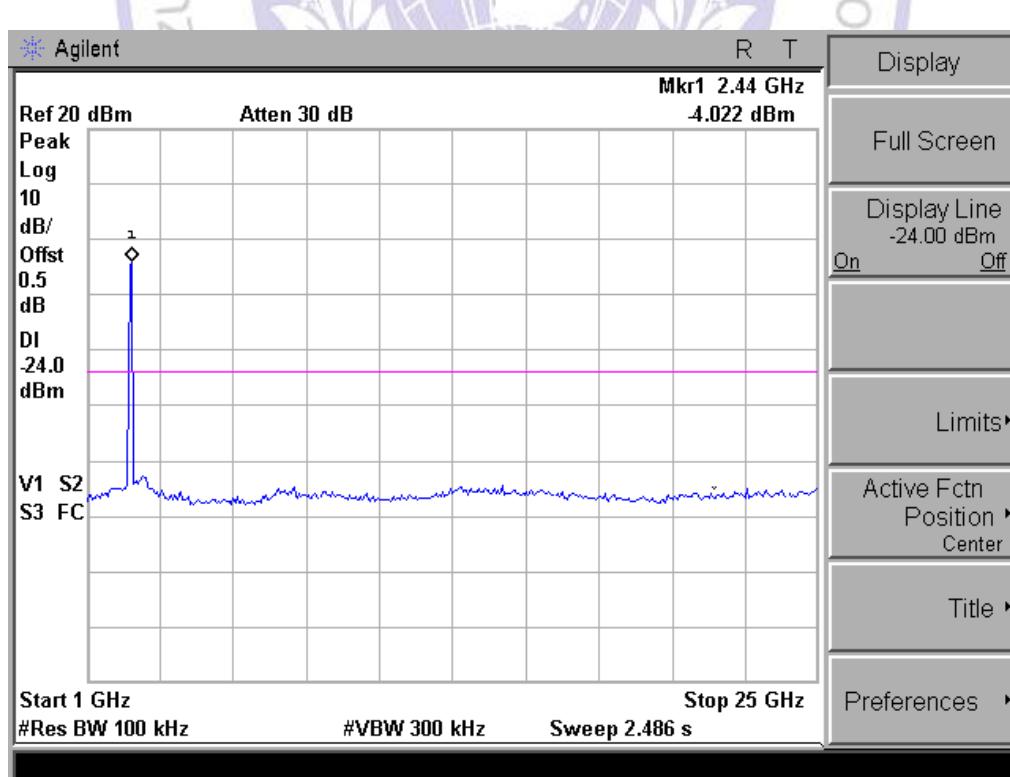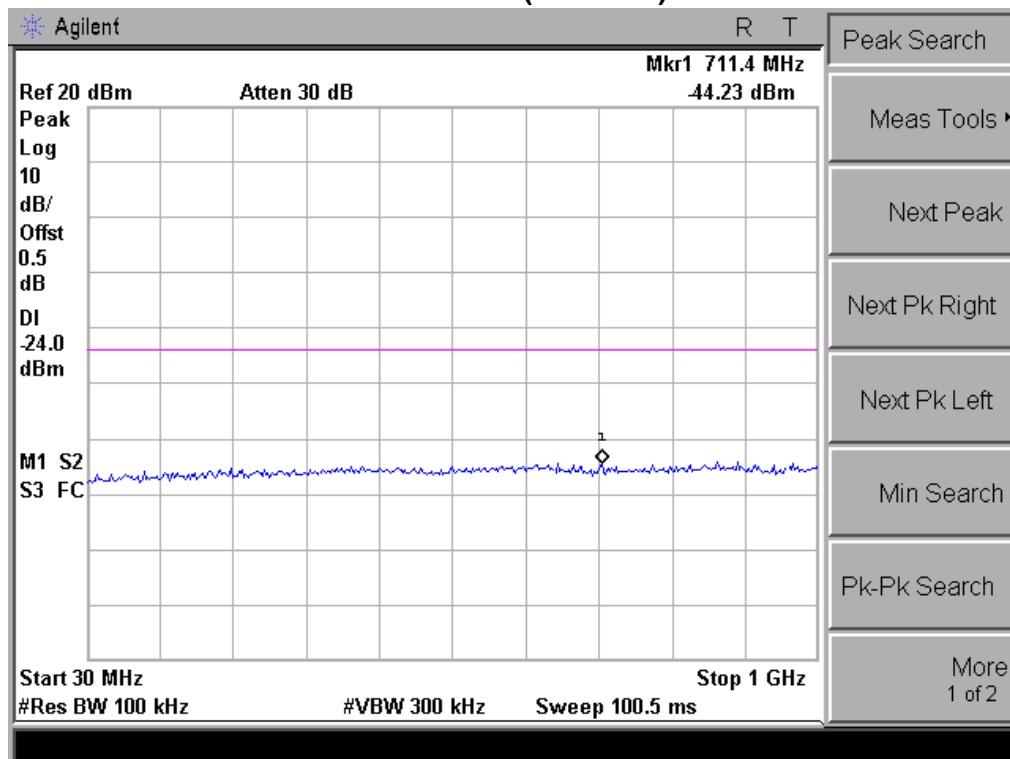



Channel 06 (2437MHz)

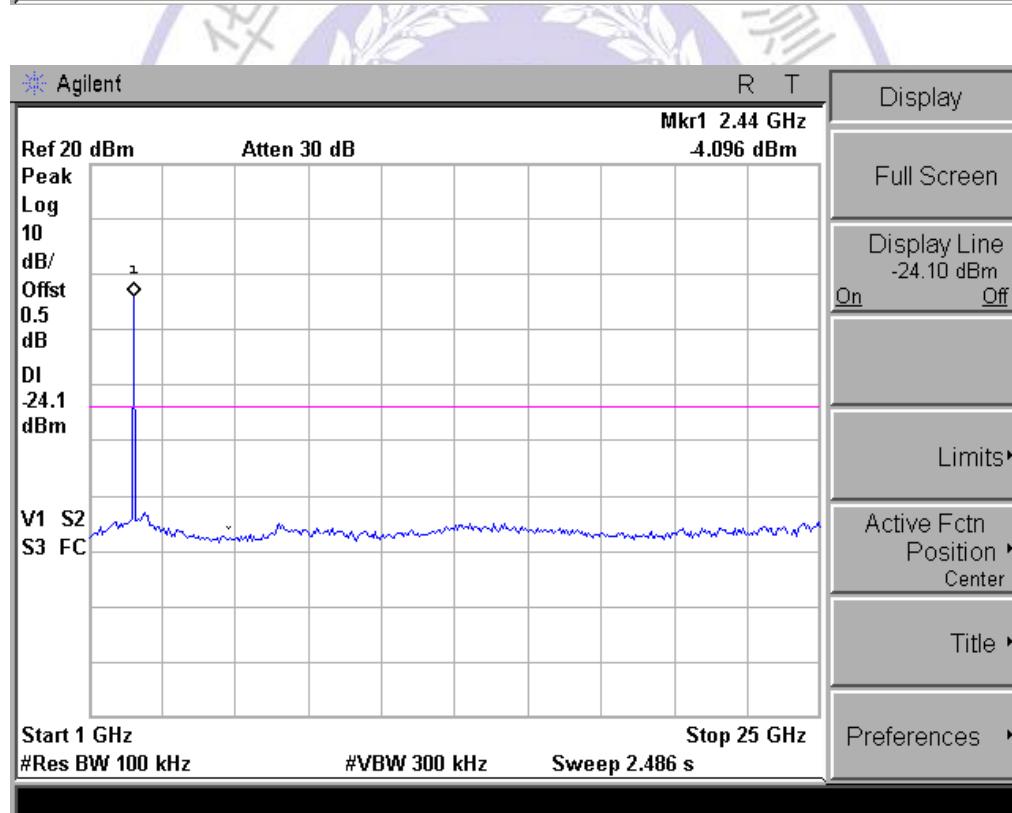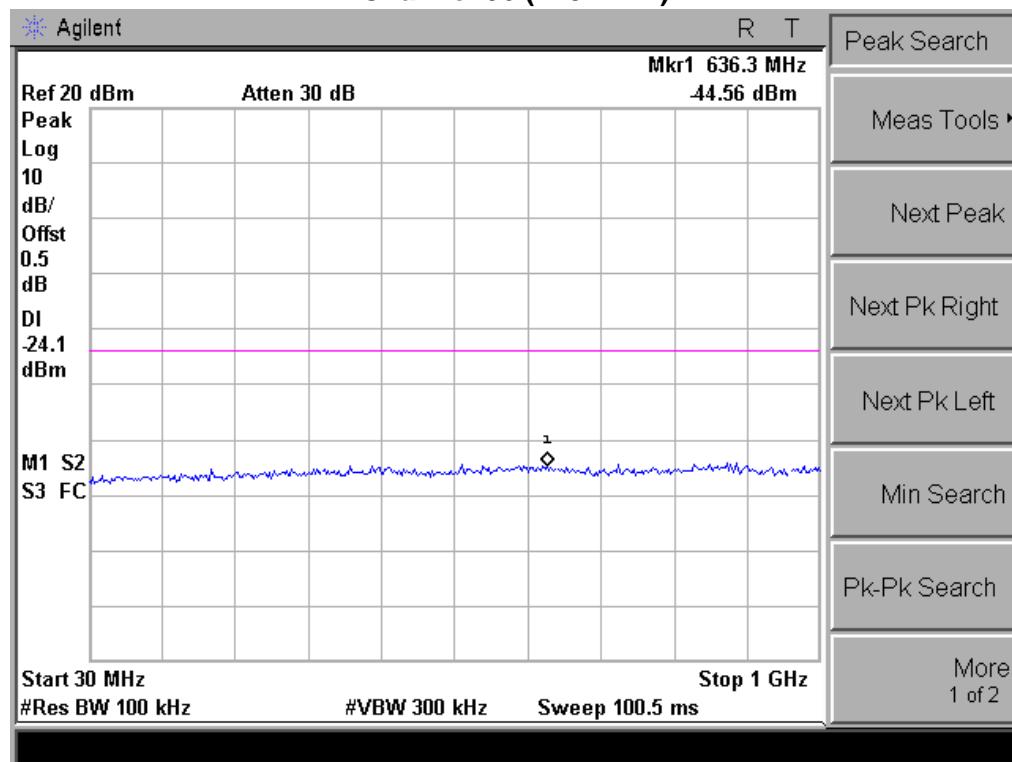



Channel 11 (2462MHz)

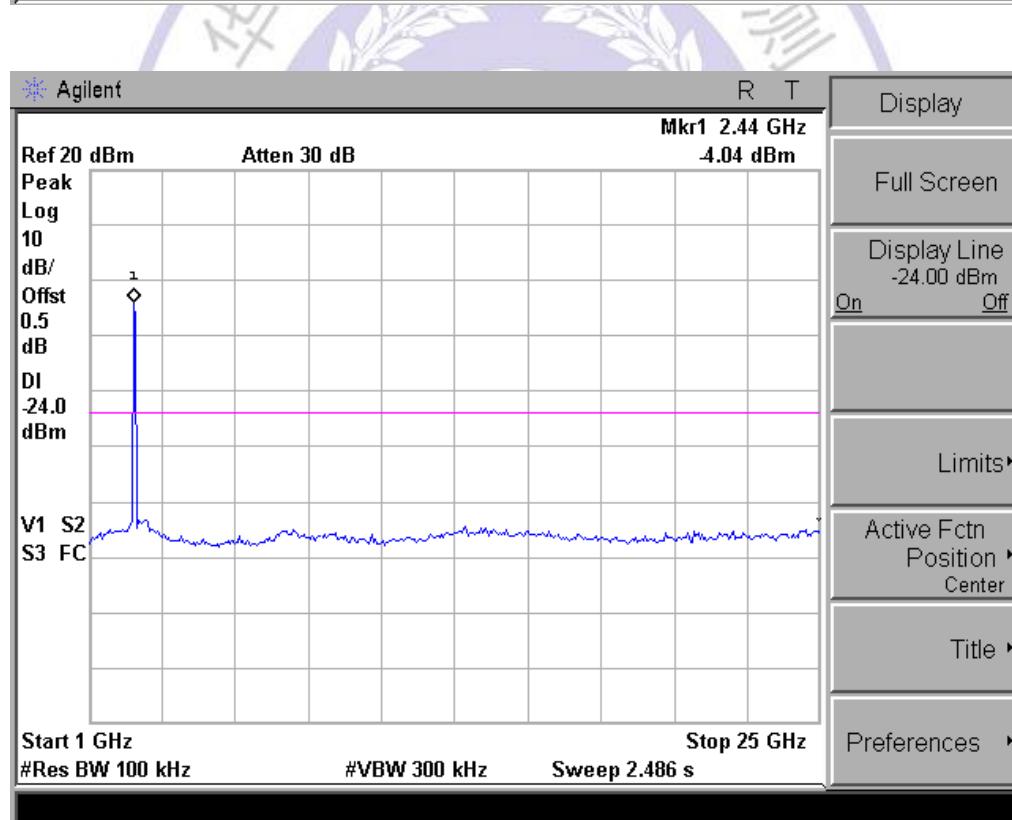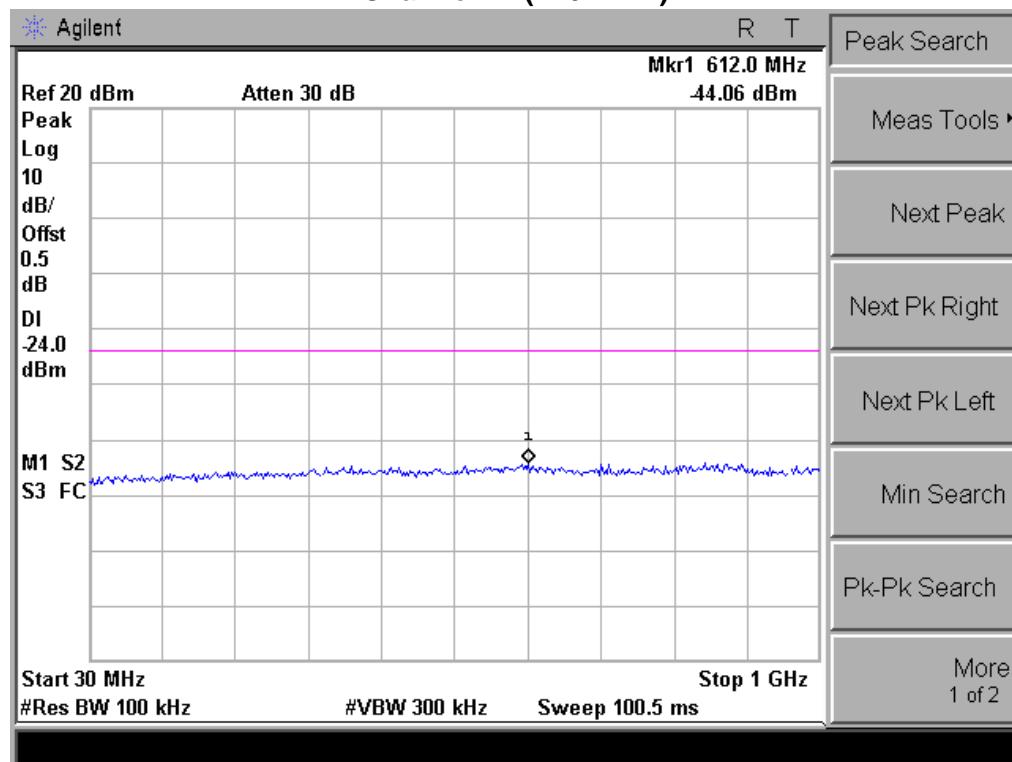



Product	:	Handsets
Test Item	:	RF Antenna Conducted Spurious
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz)

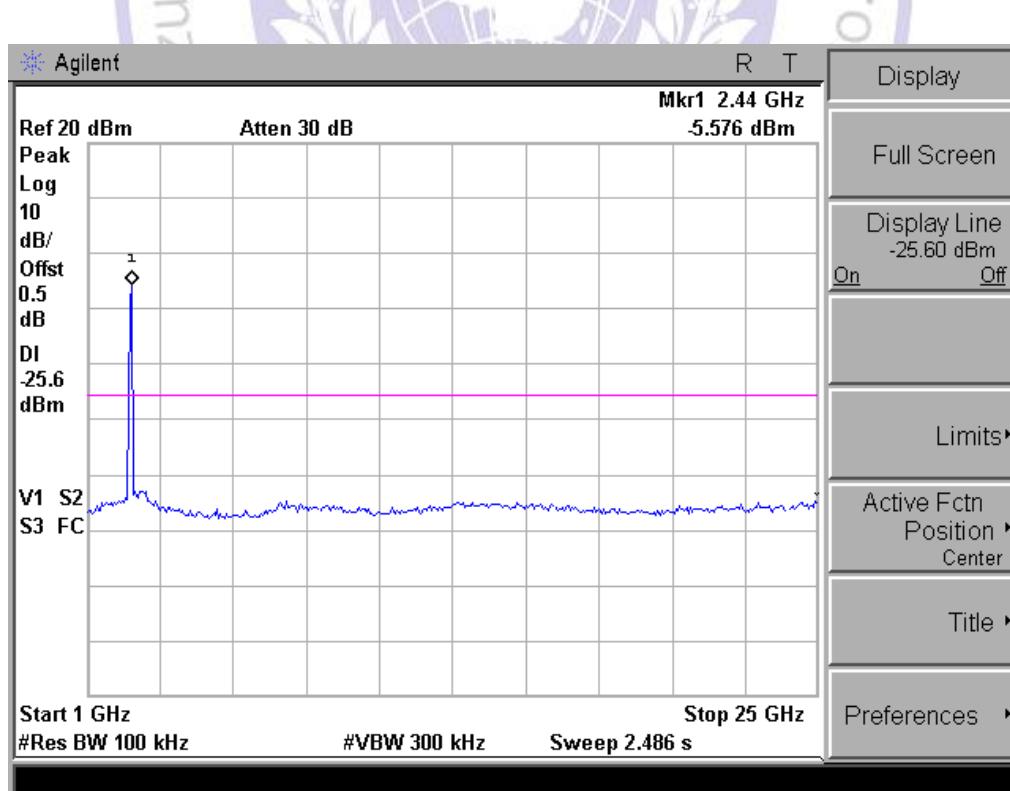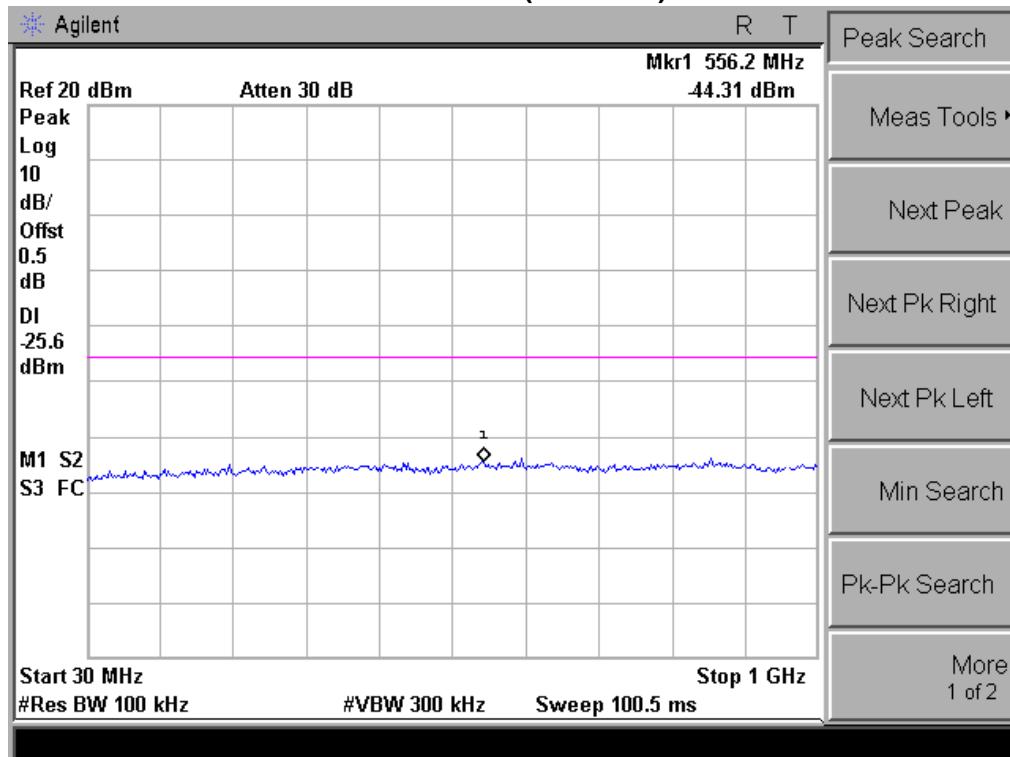Channel 03 (2422MHz)

Channel 06 (2437MHz)

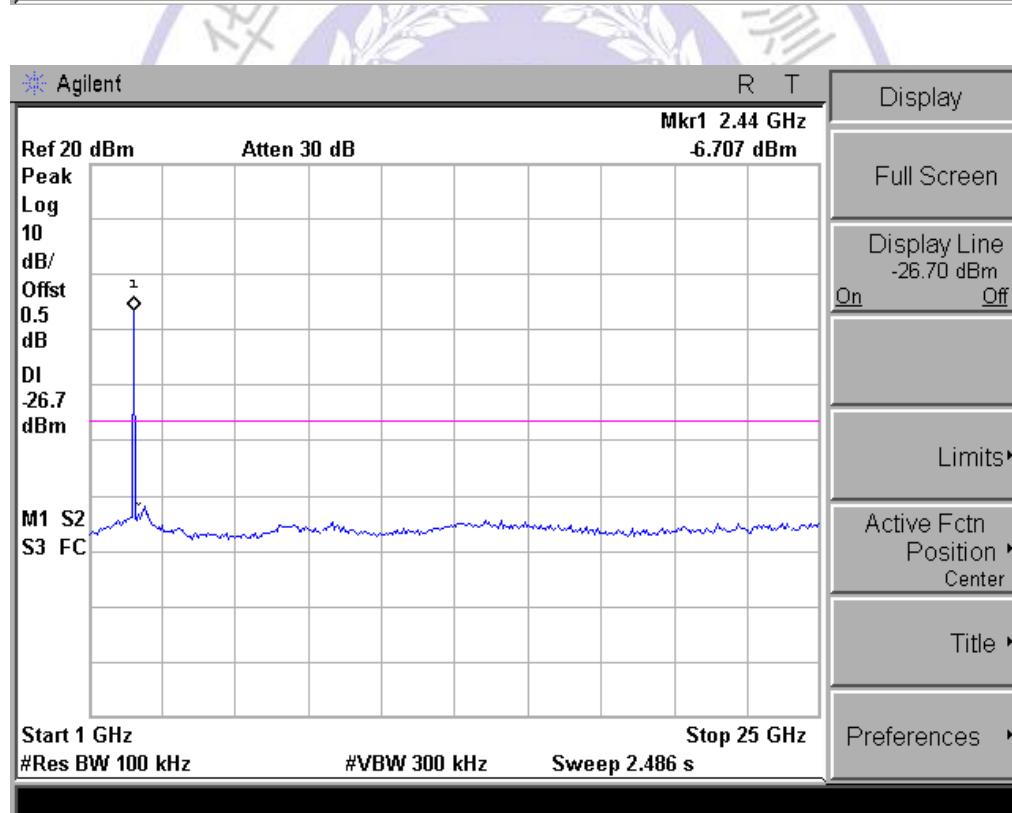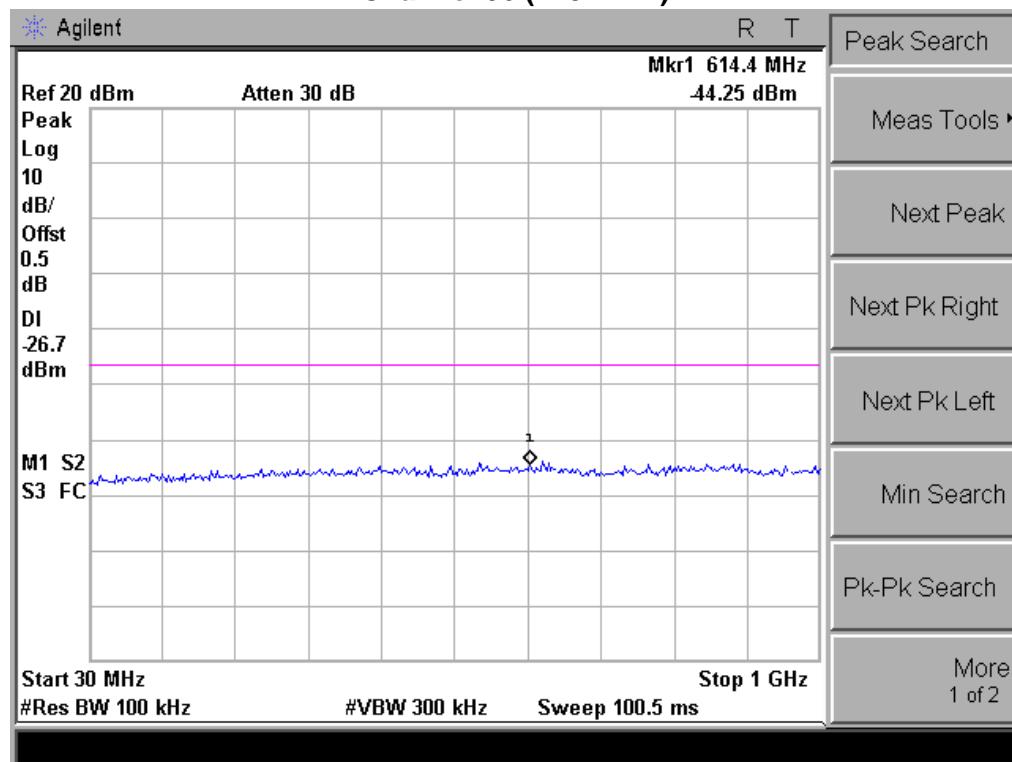


Channel 09 (2452MHz)

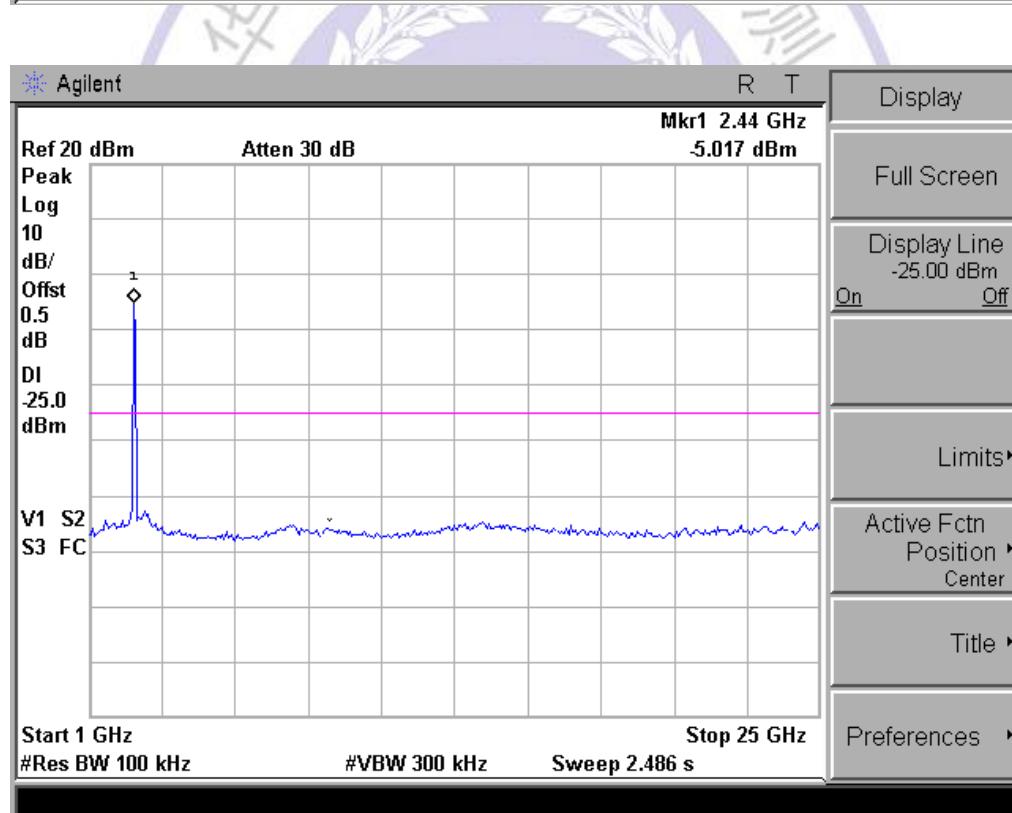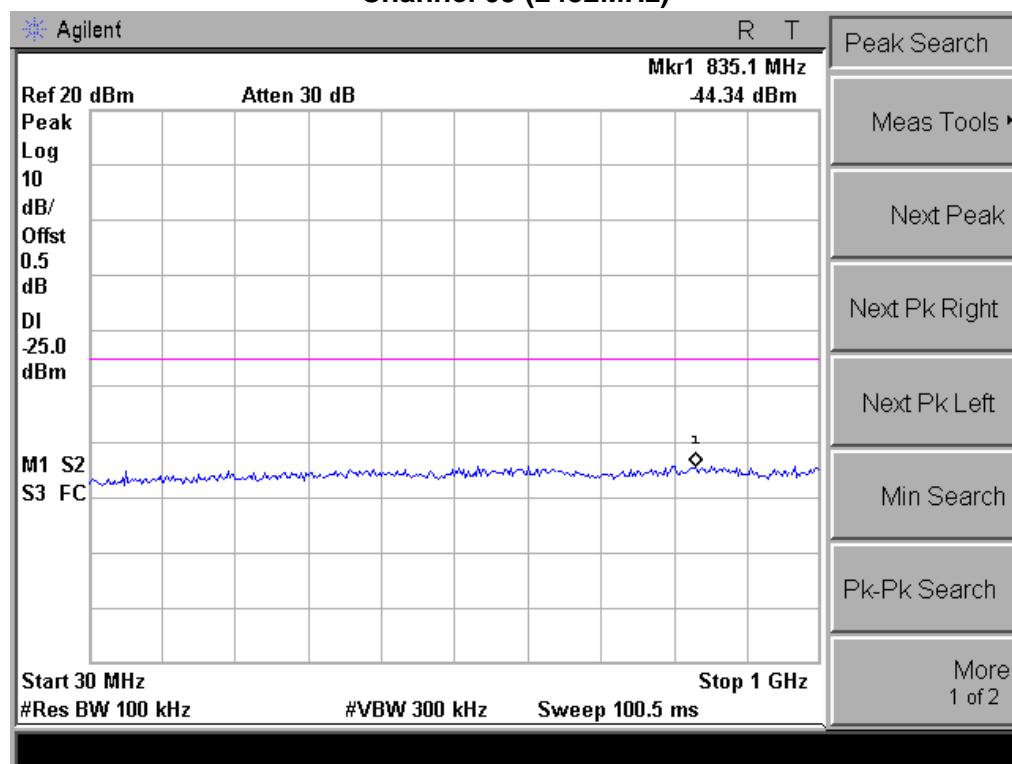

4.8. Operation Frequency Range of 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE


The EUT was tested according to KDB 558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100 kHz, Span greater than RBW.


LIMIT

20 dB bandwidth of the emission is contained within the operation frequency band.


TEST RESULT


For 802.11b Mode:

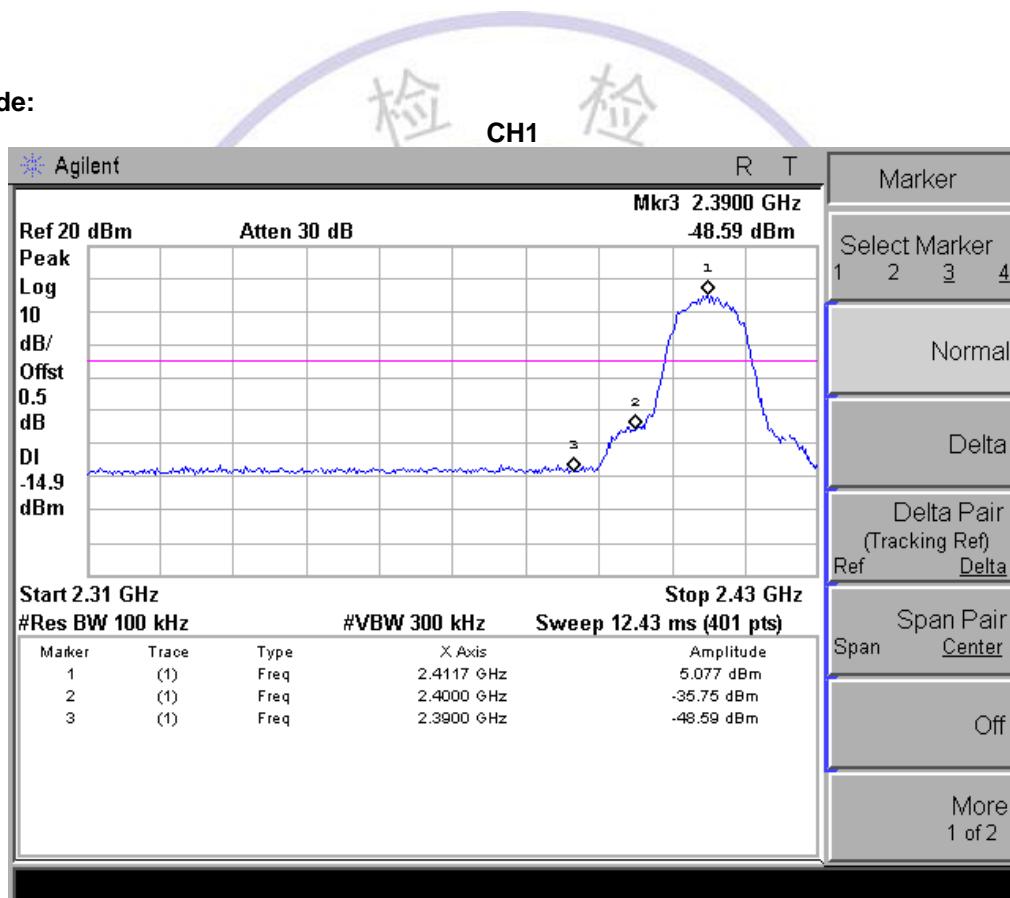

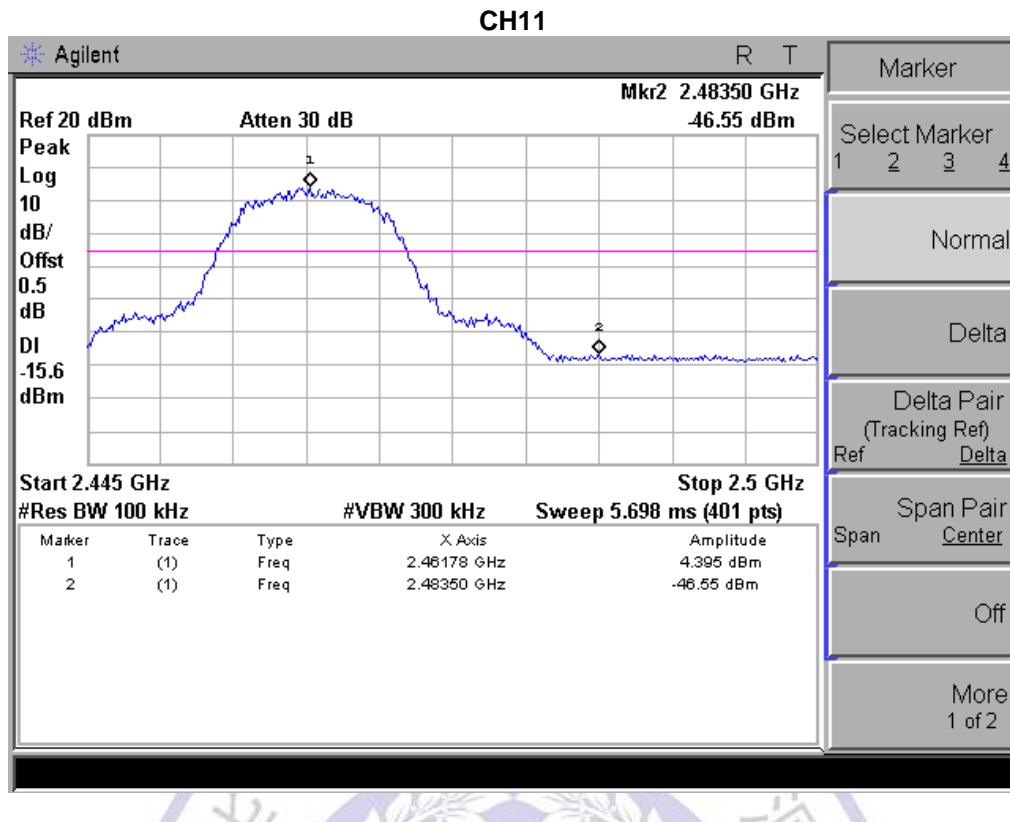


For 802.11g Mode:

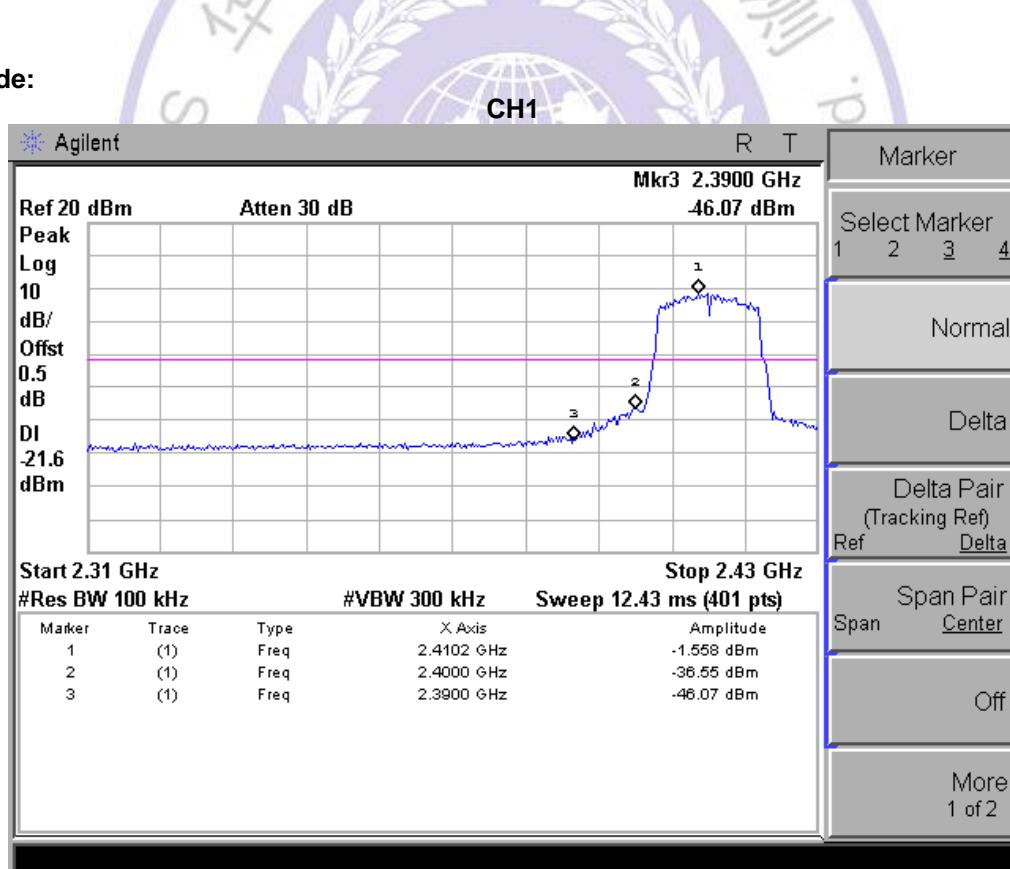


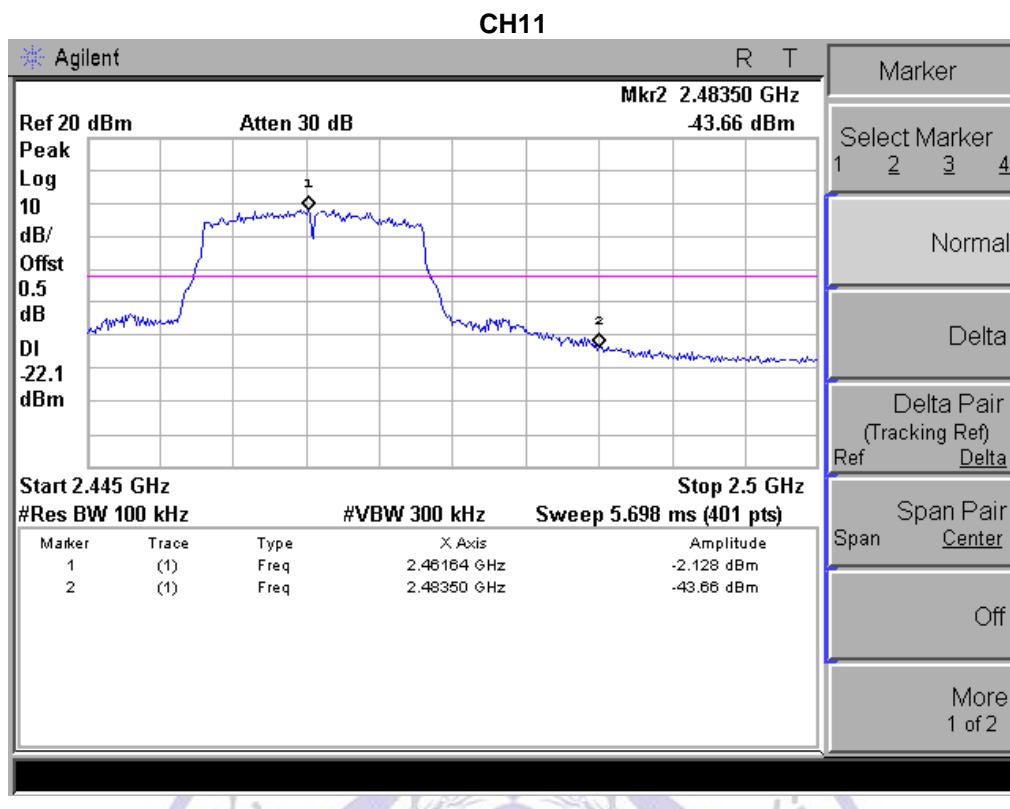

For 802.11n (20MHz) Mode:

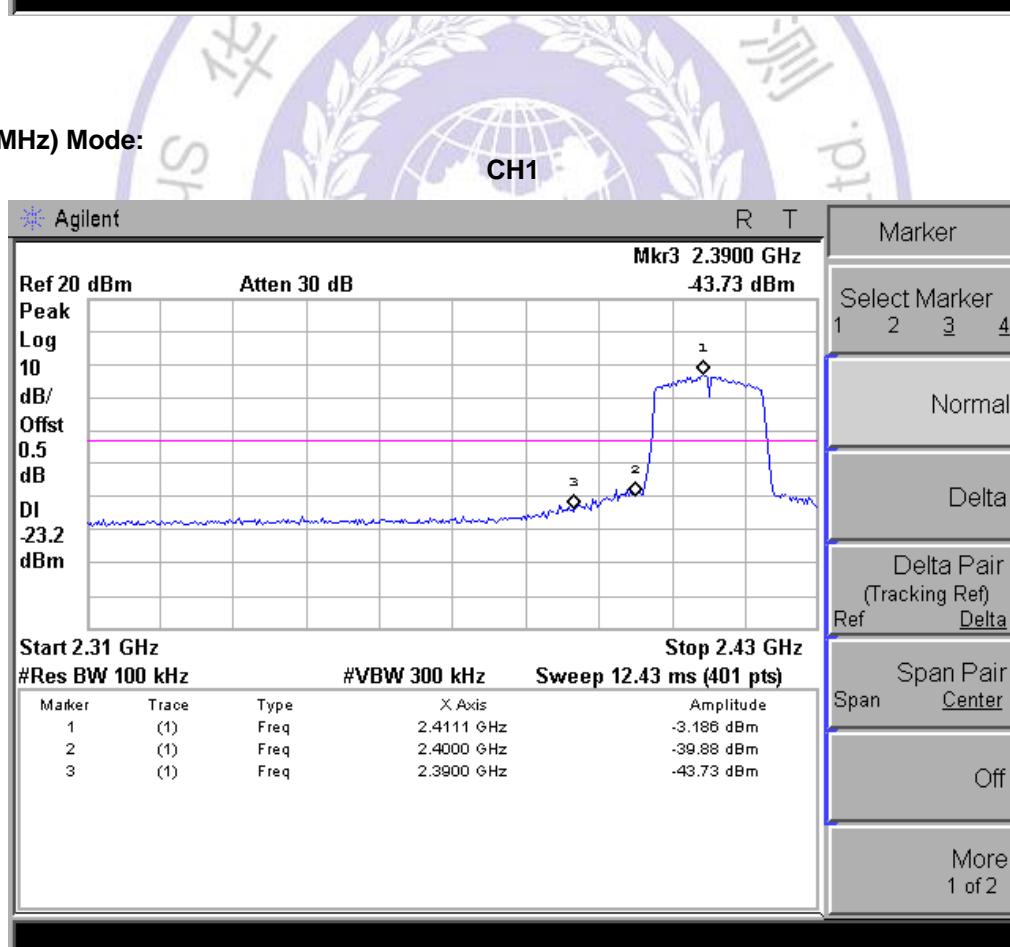


CH11

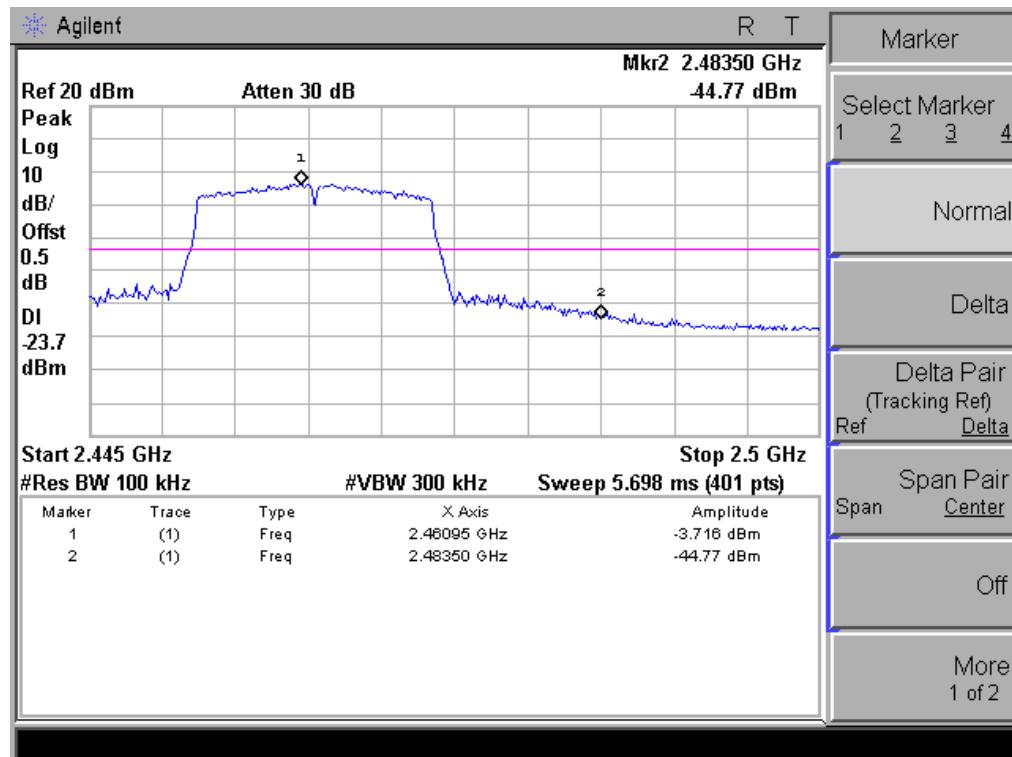


For 802.11n (40MHz) Mode:

CH3

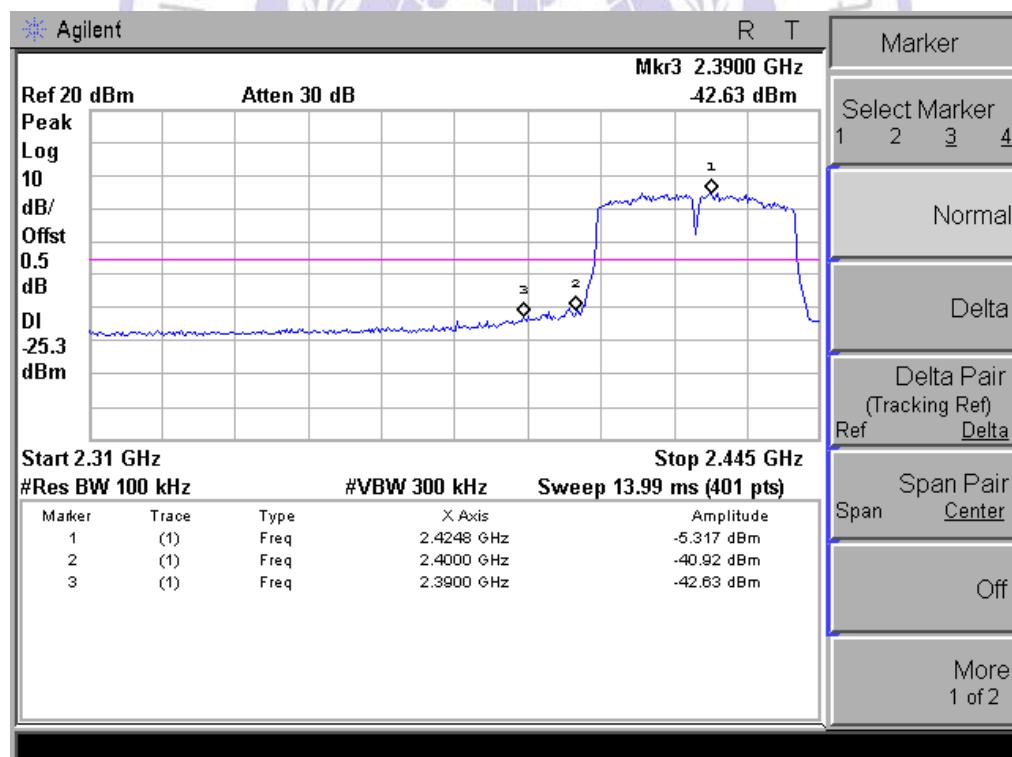

CH9

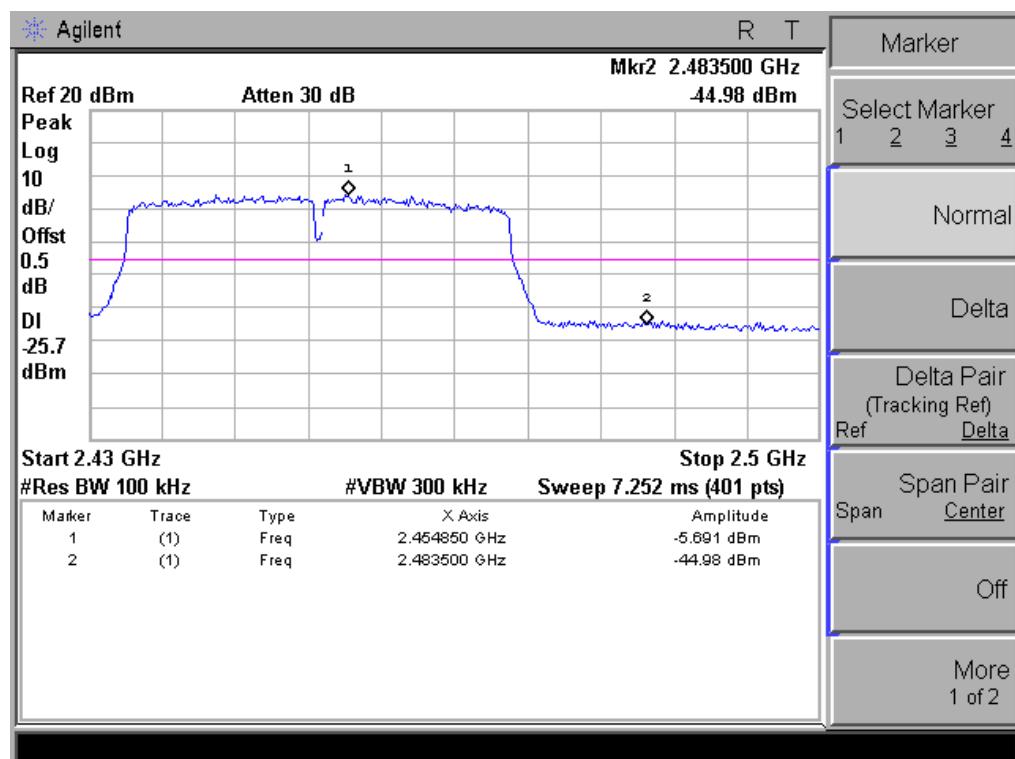

4.9. Antenna Requirement

STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

ANTENNA CONNECTED CONSTRUCTION

The directional gains of antenna used for transmitting is 0.84 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

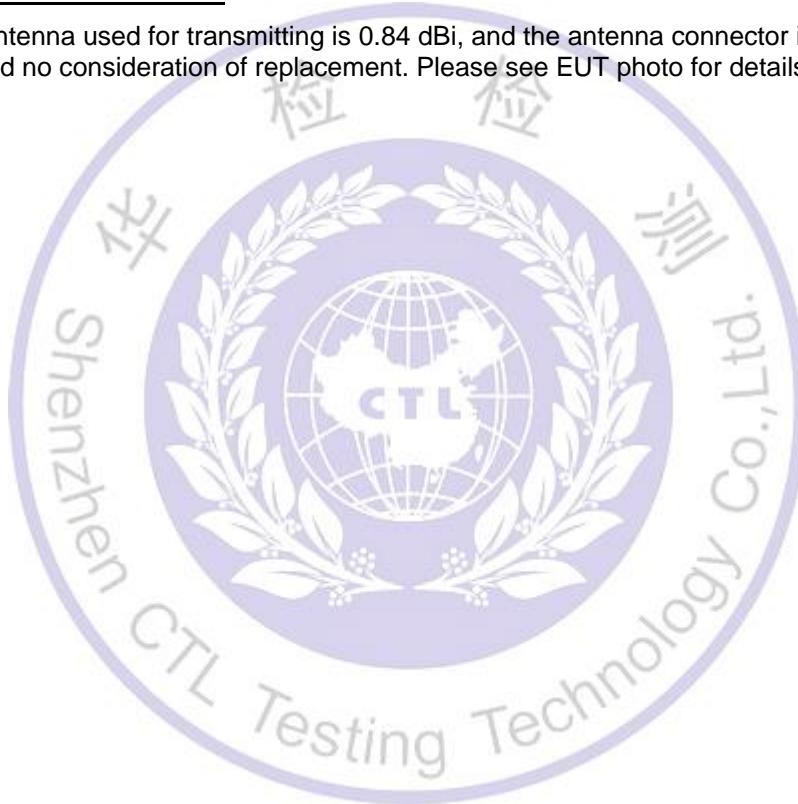

5. Test Setup Photos of the EUT

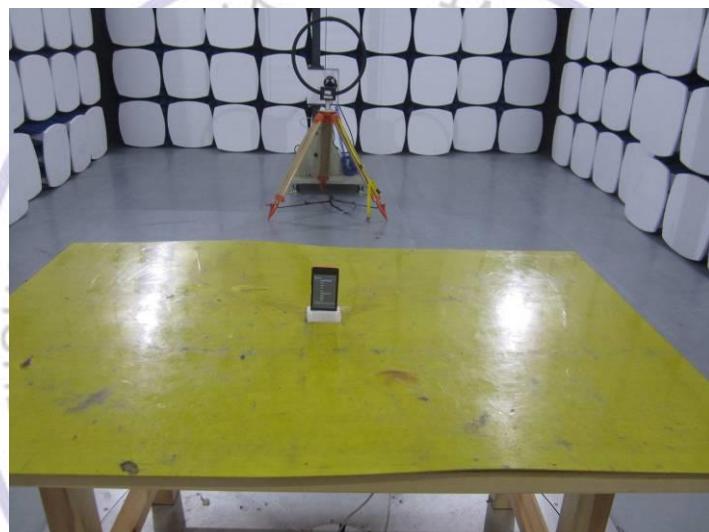





6. External and Internal Photos of the EUT



External Photos of EUT







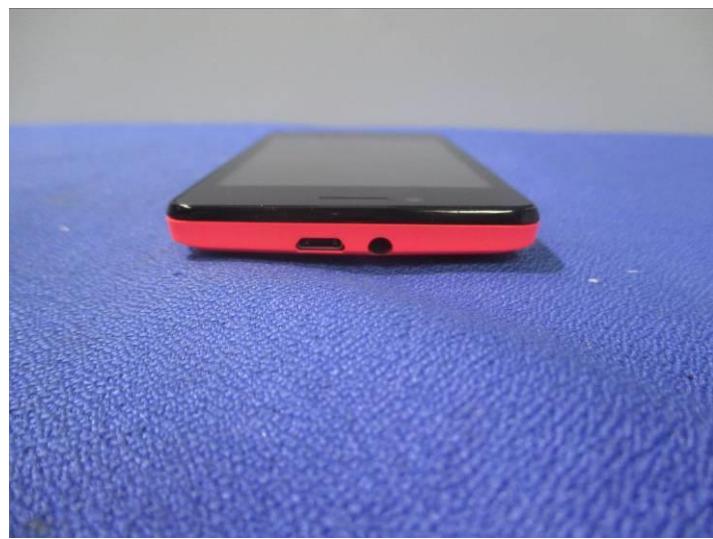

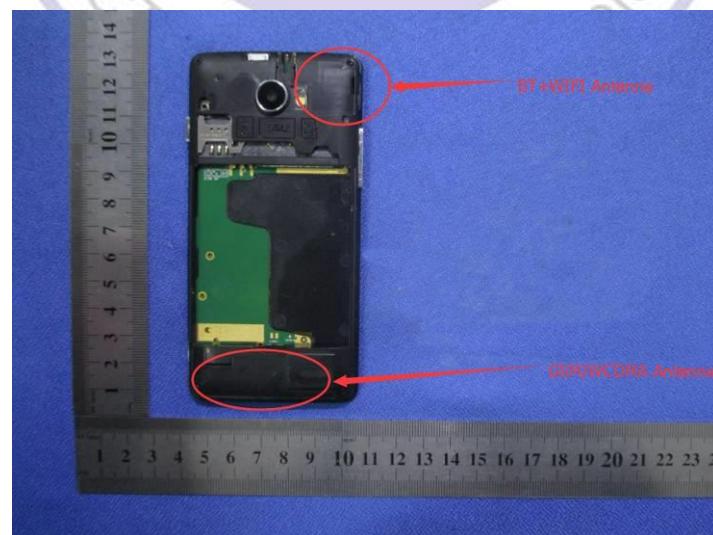Internal Photos of EUT

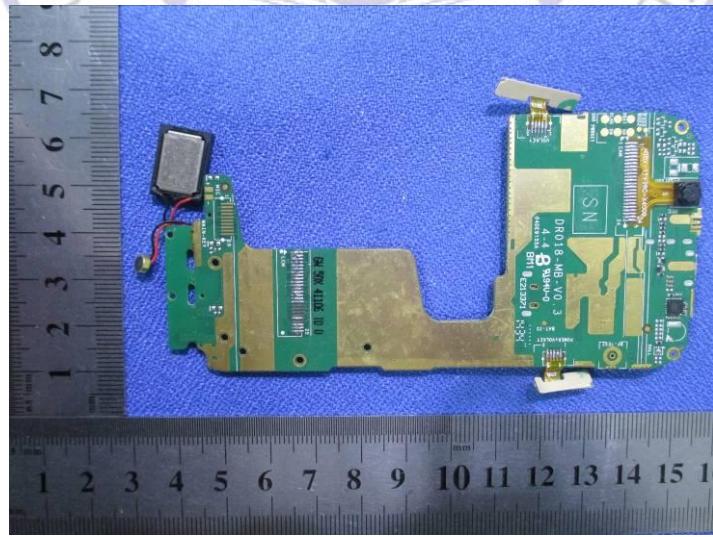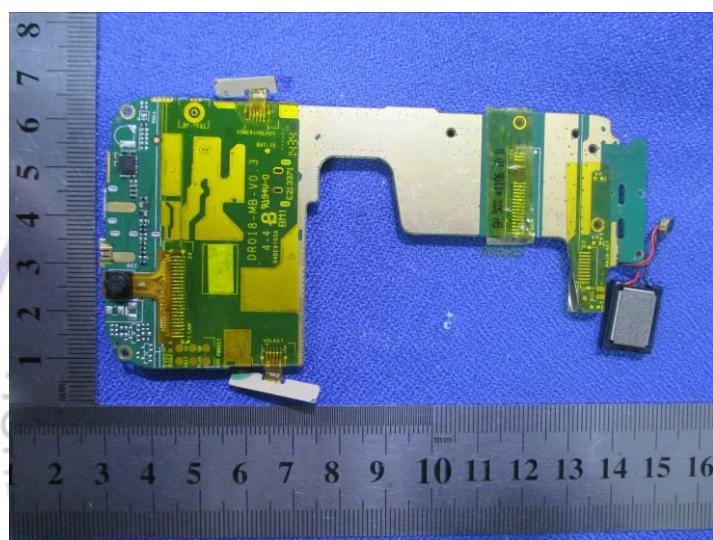

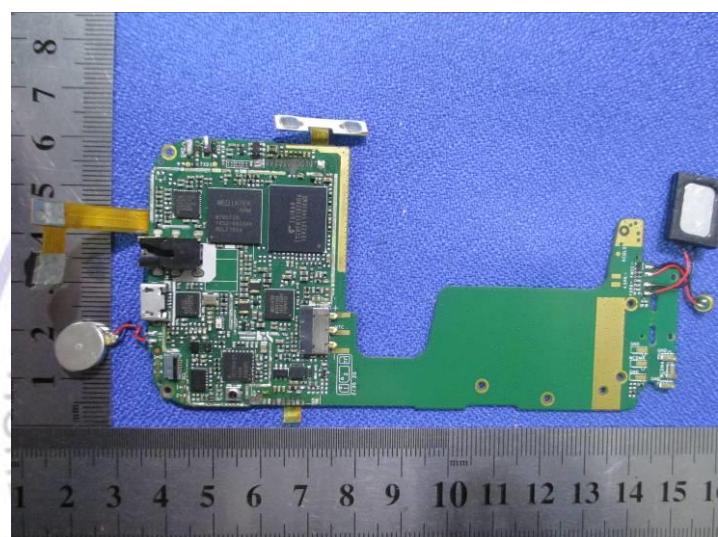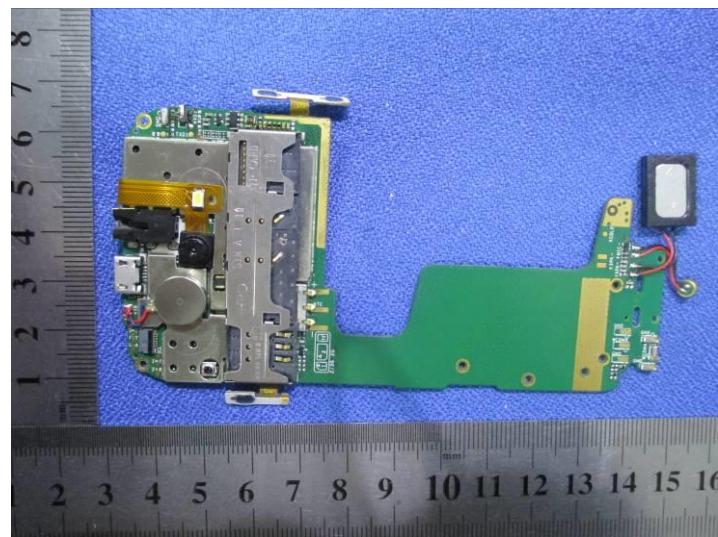

.....End of Report.....